

## APPLICATION CERTIFICATION FCC Part 15C

On Behalf of  
UP Global Sourcing Ltd.

Stereo Bluetooth Headphones  
Model No.: EE3072

FCC ID: 2AAR2EE3072

Prepared for : UP Global Sourcing Ltd.  
Address : Manor Mill, Victoria St, Chadderton, OL9 0DD, United Kingdom  
Of Great Britain And Northern Ireland

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science &  
Industry Park, Nanshan District, Shenzhen, Guangdong, P.R.  
China.

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20181209  
Date of Test : June 19-June 28, 2018  
Date of Report : July 6, 2018

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Accessory and Auxiliary Equipment .....	6
1.3. Description of Test Facility .....	6
1.4. Measurement Uncertainty .....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>8</b>
3.1. Operating Mode .....	8
3.2. Configuration and peripherals .....	8
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>9</b>
<b>5. 20DB BANDWIDTH TEST.....</b>	<b>10</b>
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement .....	10
5.4. Operating Condition of EUT .....	10
5.5. Test Procedure .....	10
5.6. Test Result .....	11
<b>6. CARRIER FREQUENCY SEPARATION TEST.....</b>	<b>15</b>
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement .....	15
6.4. Operating Condition of EUT .....	15
6.5. Test Procedure .....	16
6.6. Test Result .....	16
<b>7. NUMBER OF HOPPING FREQUENCY TEST .....</b>	<b>19</b>
7.1. Block Diagram of Test Setup.....	19
7.2. The Requirement For Section 15.247(a)(1)(iii).....	19
7.3. EUT Configuration on Measurement .....	19
7.4. Operating Condition of EUT .....	19
7.5. Test Procedure .....	19
7.6. Test Result .....	20
<b>8. DWELL TIME TEST .....</b>	<b>21</b>
8.1. Block Diagram of Test Setup.....	21
8.2. The Requirement For Section 15.247(a)(1)(iii).....	21
8.3. EUT Configuration on Measurement .....	21
8.4. Operating Condition of EUT .....	21
8.5. Test Procedure .....	22
8.6. Test Result .....	22
<b>9. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>33</b>
9.1. Block Diagram of Test Setup.....	33
9.2. The Requirement For Section 15.247(b)(1).....	33

9.3.	EUT Configuration on Measurement .....	33
9.4.	Operating Condition of EUT .....	33
9.5.	Test Procedure .....	34
9.6.	Test Result .....	34
<b>10.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>38</b>
10.1.	Block Diagram of Test Setup.....	38
10.2.	The Requirement For Section 15.247(d) .....	39
10.3.	Transmitter Emission Limit .....	40
10.4.	Restricted bands of operation .....	41
10.5.	Configuration of EUT on Measurement .....	41
10.6.	Test Procedure .....	42
10.7.	Data Sample.....	43
10.8.	The Field Strength of Radiation Emission Measurement Results .....	43
<b>11.</b>	<b>BAND EDGE COMPLIANCE TEST .....</b>	<b>71</b>
11.1.	Block Diagram of Test Setup.....	71
11.2.	The Requirement For Section 15.247(d) .....	71
11.3.	EUT Configuration on Measurement .....	71
11.4.	Operating Condition of EUT .....	71
11.5.	Test Procedure .....	72
11.6.	Test Result .....	72
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..</b>	<b>82</b>
12.1.	Block Diagram of Test Setup.....	82
12.2.	Test System Setup.....	82
12.3.	Power Line Conducted Emission Measurement Limits.....	83
12.4.	Configuration of EUT on Measurement .....	83
12.5.	Operating Condition of EUT .....	83
12.6.	Test Procedure .....	83
12.7.	Data Sample.....	84
12.8.	Power Line Conducted Emission Measurement Results .....	84
<b>13.</b>	<b>CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST .....</b>	<b>87</b>
13.1.	Block Diagram of Test Setup.....	87
13.2.	The Requirement For Section 15.247(d) .....	87
13.3.	EUT Configuration on Measurement .....	87
13.4.	Operating Condition of EUT .....	87
13.5.	Test Procedure .....	88
13.6.	Test Result .....	88
<b>14.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>92</b>
14.1.	The Requirement .....	92
14.2.	Antenna Construction .....	92

## Test Report Certification

Applicant : UP Global Sourcing Ltd.  
Manufacturer : TESONIC INT'L (HK) LTD.  
Product : Stereo Bluetooth Headphones  
Model No. : EE3072

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.10: 2013**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : June 19-June 28, 2018  
Date of Report: July 6, 2018

Prepared by :

*Star Yang*  
  
(Star Yang, Engineer)

Approved &  
Authorized Signer :

*Sean Liu*  
(Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Stereo Bluetooth Headphones
Model Number	:	EE3072
Bluetooth version	:	V4.2 classic mode
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain(Max)	:	0 dBi
Antenna type	:	Integral Antenna
Modulation mode	:	GFSK, $\pi/4$ DQPSK Because of firmware limitation, this device only supports Bluetooth V4.2(BR+EDR mode) without the BLE mode and EDR 8DPSK mode
Trade Name	:	N/A
Rating	:	Input: 5V $\overline{=}$ 0.5A
Applicant	:	UP Global Sourcing Ltd.
Address	:	Manor Mill, Victoria St, Chadderton, OL9 0DD, United Kingdom Of Great Britain And Northern Ireland
Manufacturer	:	TESONIC INT'L (HK) LTD.
Address	:	China Main Office: Room 2801, the 28th, Office Tower, 6007 Shennan Blvd, Shenzhen, China Zipcode: 518040
Date of sample received	:	June 13, 2018
Date of Test	:	June 19-June 28, 2018

## 1.2. Accessory and Auxiliary Equipment

Notebook PC: Manufacturer: Lenovo  
M/N: ThinkPad X240  
S/N:n.a

### 1.3. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358  Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2  Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193  Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

#### 1.4.Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	Jan. 05, 2019
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 06, 2018	Jan. 05, 2019
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 06, 2018	Jan. 05, 2019
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 06, 2018	Jan. 05, 2019
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	Jan. 05, 2019
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	Jan. 05, 2019
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	Jan. 05, 2019
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 06, 2018	Jan. 05, 2019
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	Jan. 05, 2019
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 06, 2018	Jan. 05, 2019
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 06, 2018	Jan. 05, 2019

### 3. OPERATION OF EUT DURING TESTING

#### 3.1.Operating Mode

The mode is used: Transmitting mode


Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

#### 3.2.Configuration and peripherals

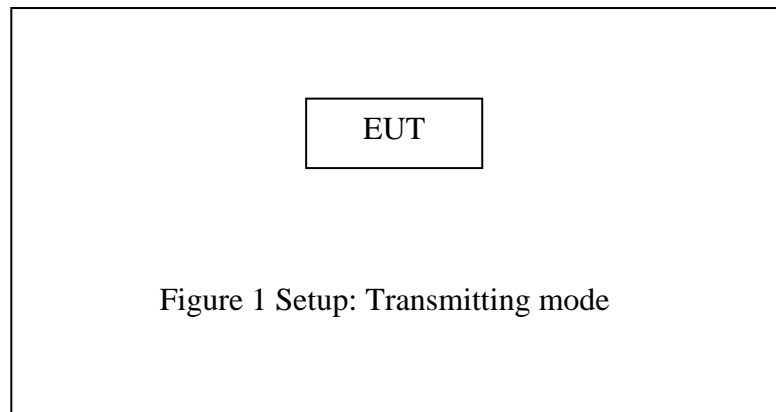




## 4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 20DB BANDWIDTH TEST

### 5.1. Block Diagram of Test Setup

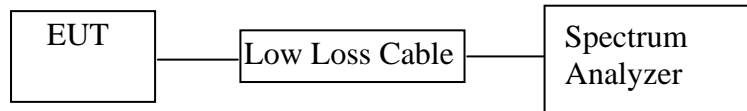

(EUT: Stereo Bluetooth Headphones)

### 5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. The RBW should be 1%~5% of OBW.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


### 5.6. Test Result

Channel	Frequency (MHz)	GFSK mode 20dB Bandwidth (MHz)	$\pi/4$ DQPSK mode 20dB Bandwidth (MHz)	Result
Low	2402	0.769	1.220	Pass
Middle	2441	0.773	1.242	Pass
High	2480	0.773	1.220	Pass

The spectrum analyzer plots are attached as below.


## GFSK Mode

### Low channel

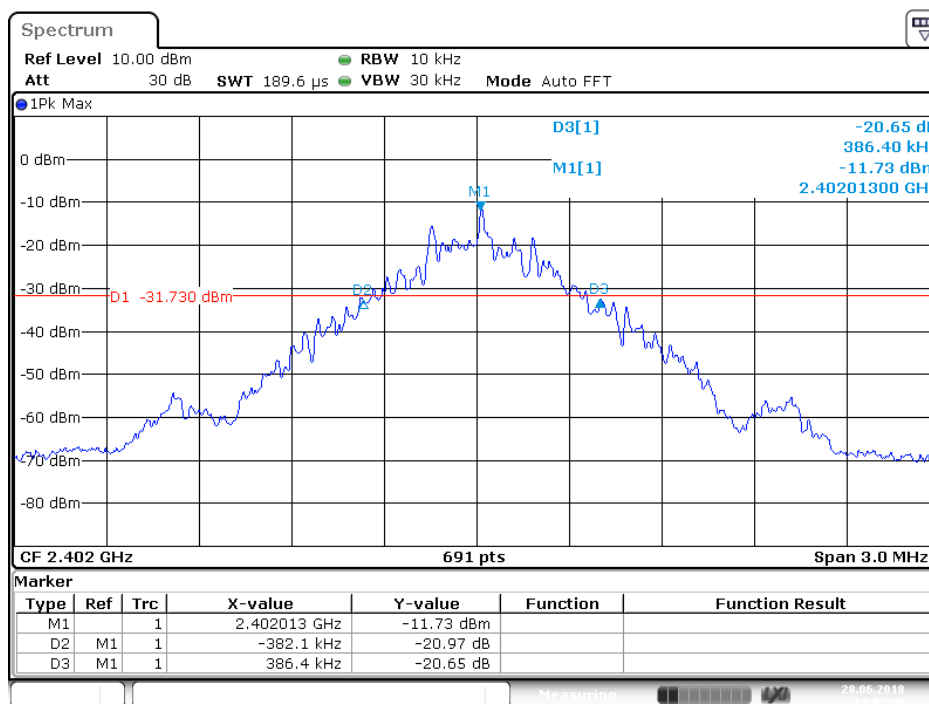

Date: 28.JUN.2018 14:42:28

### Middle channel

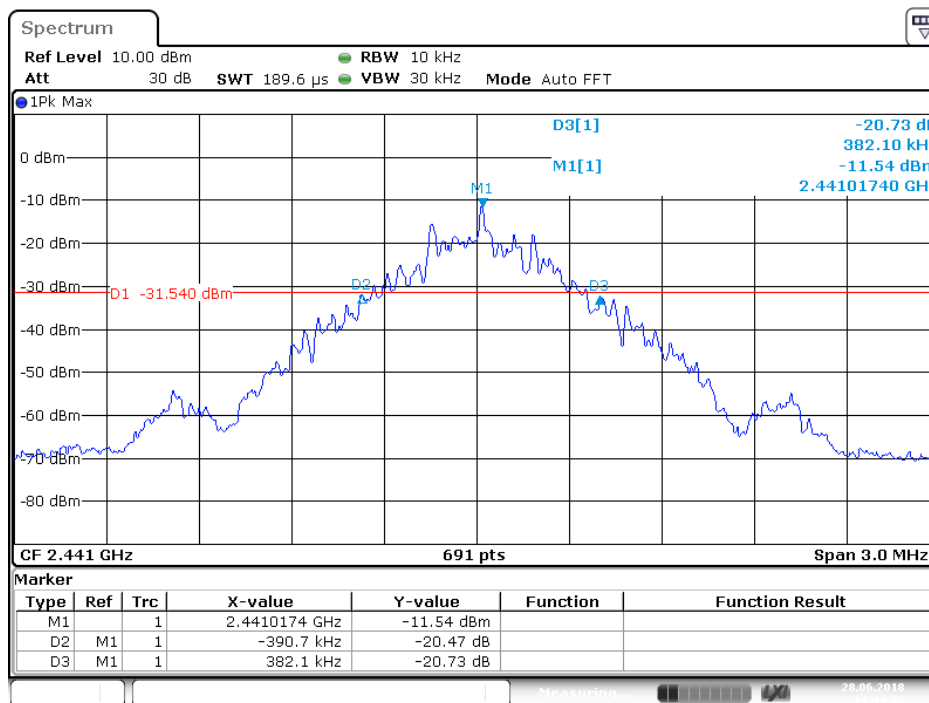

Date: 28.JUN.2018 14:44:08

Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com


## High channel

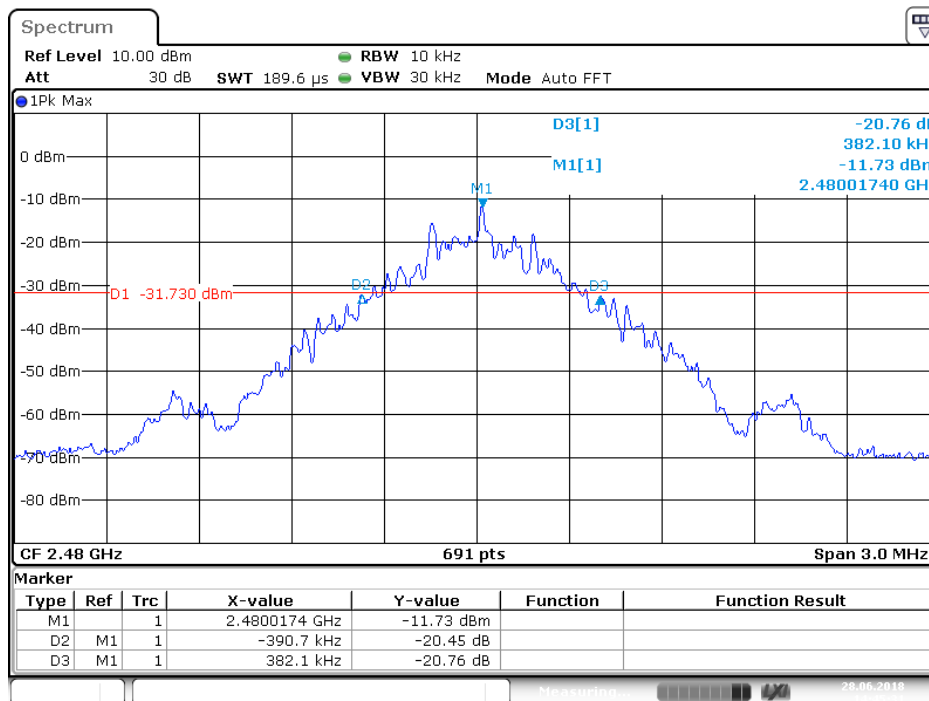

Date: 28.JUN.2018 14:45:31


## $\pi/4$ DQPSK Mode

## Low channel

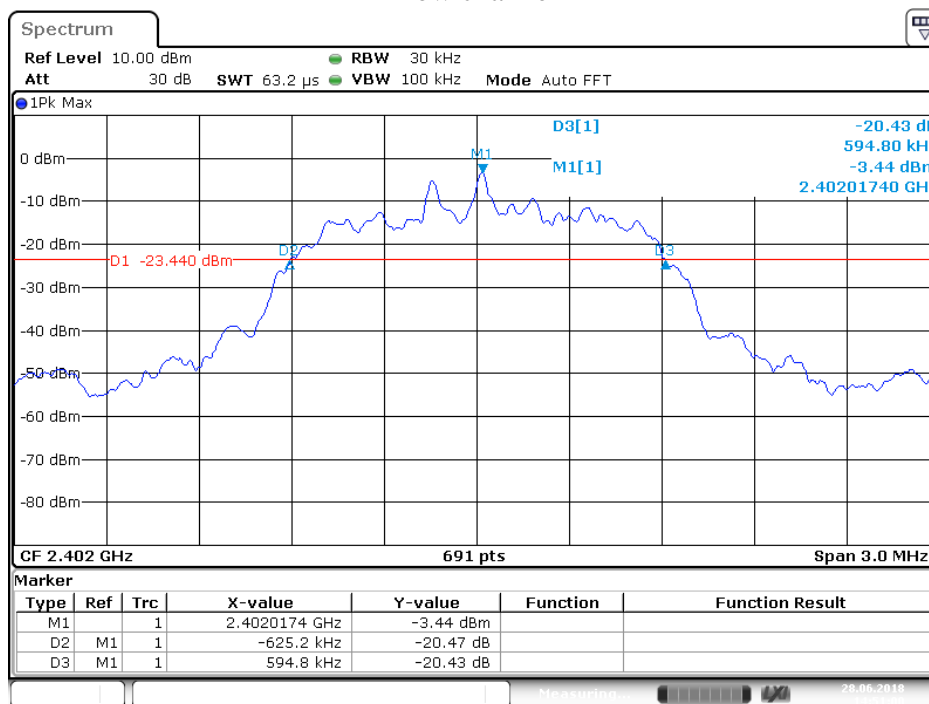


Date: 28.JUN.2018 14:51:00

## Middle channel

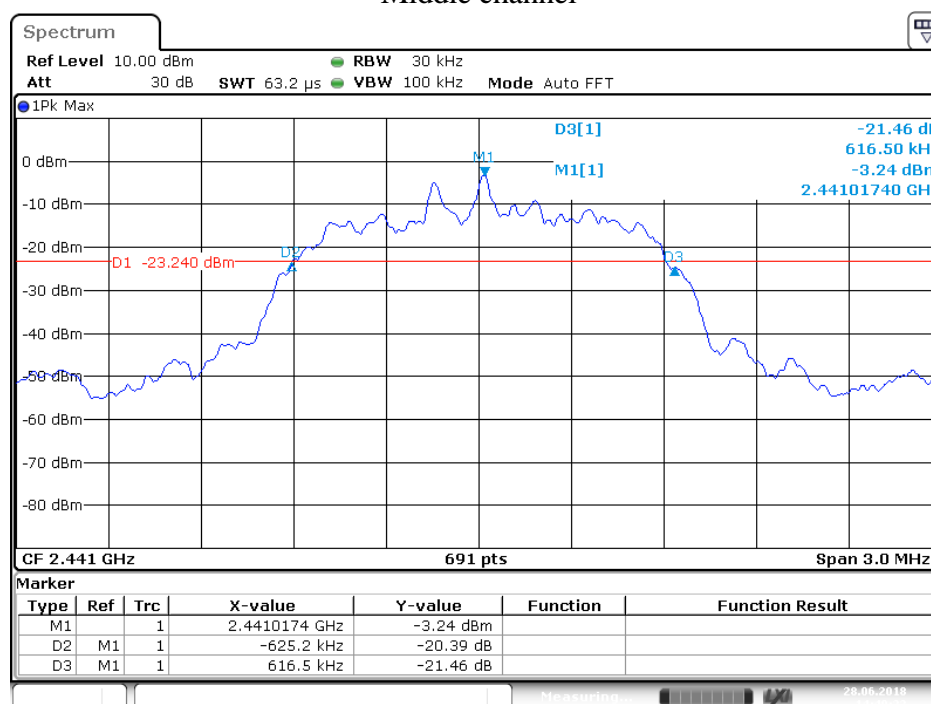

Date: 28.JUN.2018 14:49:22

## High channel

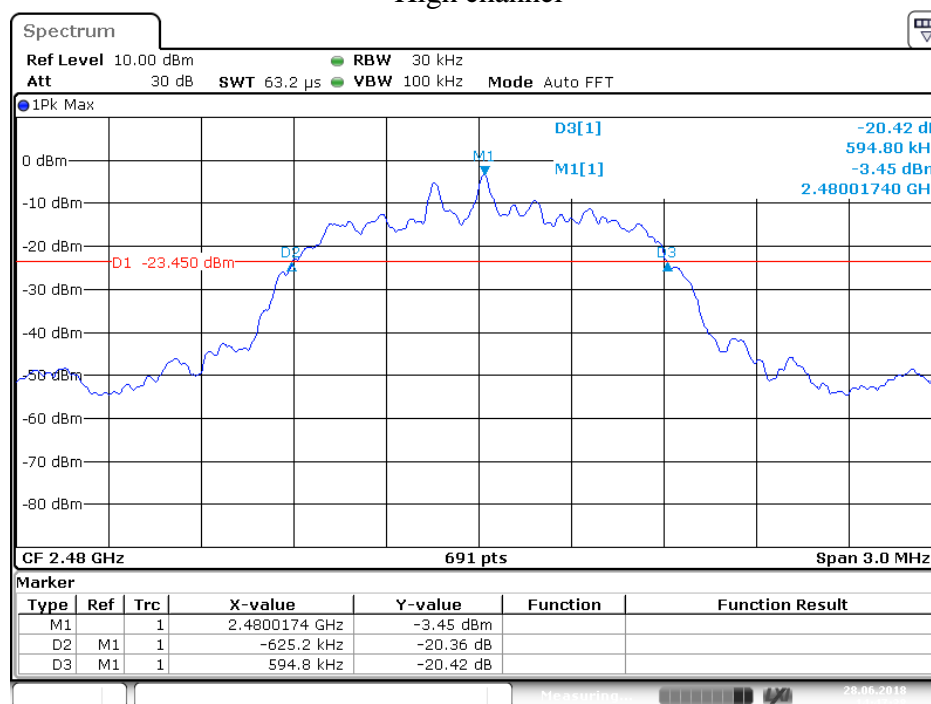

Date: 28.JUN.2018 14:47:39

## 6. CARRIER FREQUENCY SEPARATION TEST

### 6.1. Block Diagram of Test Setup



(EUT: Stereo Bluetooth Headphones)

### 6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

## 6.5. Test Procedure

- 6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz. Adjust Span to 3MHz.
- 6.5.3. Set the adjacent channel of the EUT Maxhold another trace.
- 6.5.4. Measurement the channel separation

## 6.6. Test Result

GFSK mode (Worst case)


Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.0029	25KHz or 20dB bandwidth	PASS
	2403			
Middle	2440	1.0029	25KHz or 20dB bandwidth	PASS
	2441			
High	2479	1.0029	25KHz or 20dB bandwidth	PASS
	2480			

The spectrum analyzer plots are attached as below.




## GFSK Mode

### Low channel

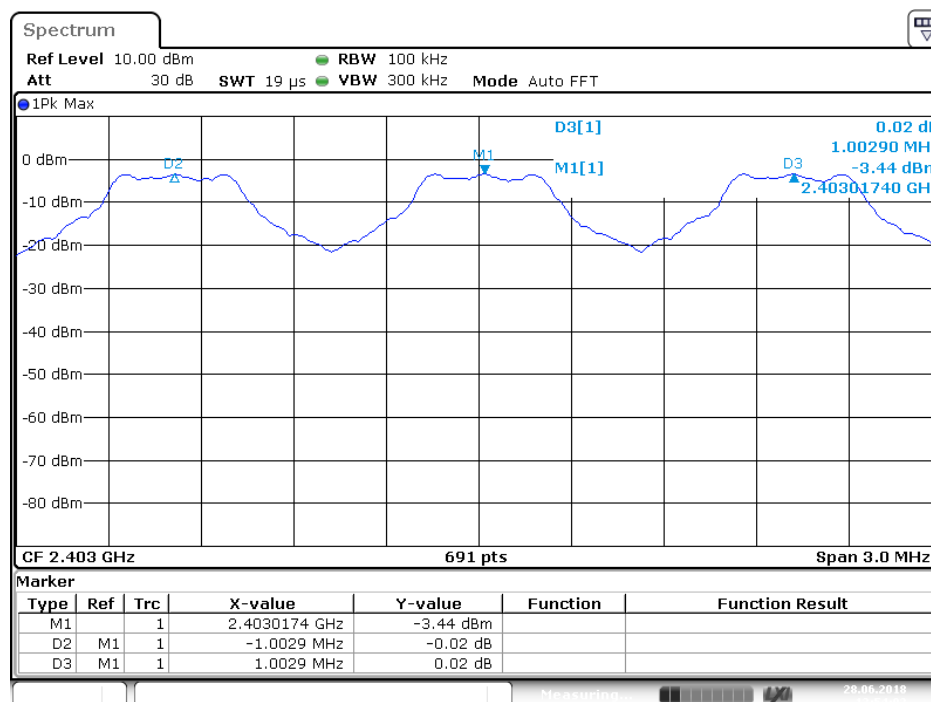

Date: 28.JUN.2018 13:54:02

### Middle channel

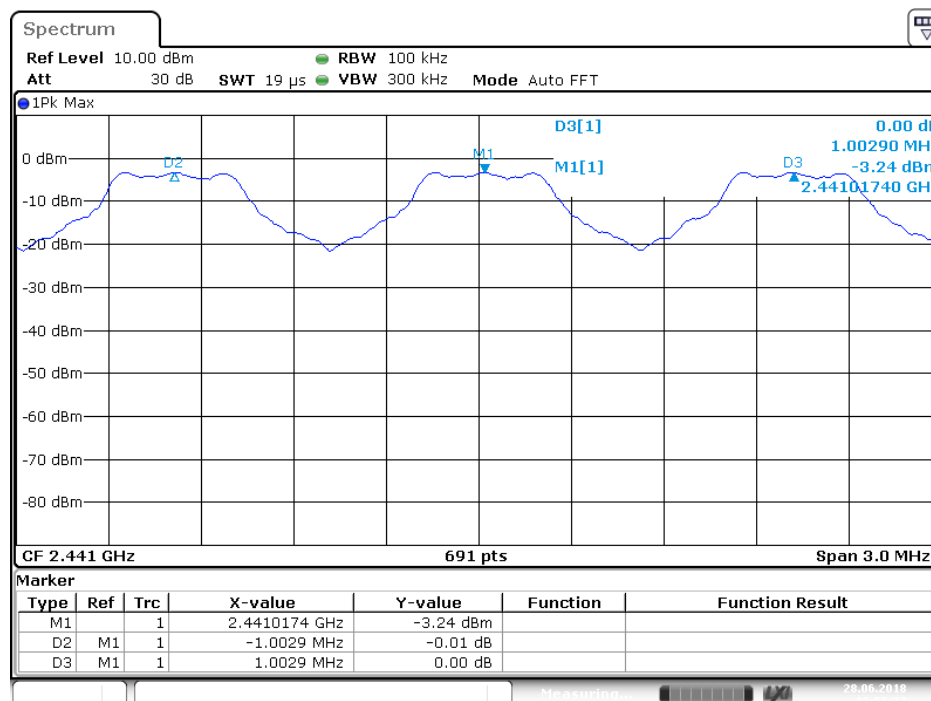

Date: 28.JUN.2018 13:55:28

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## High channel

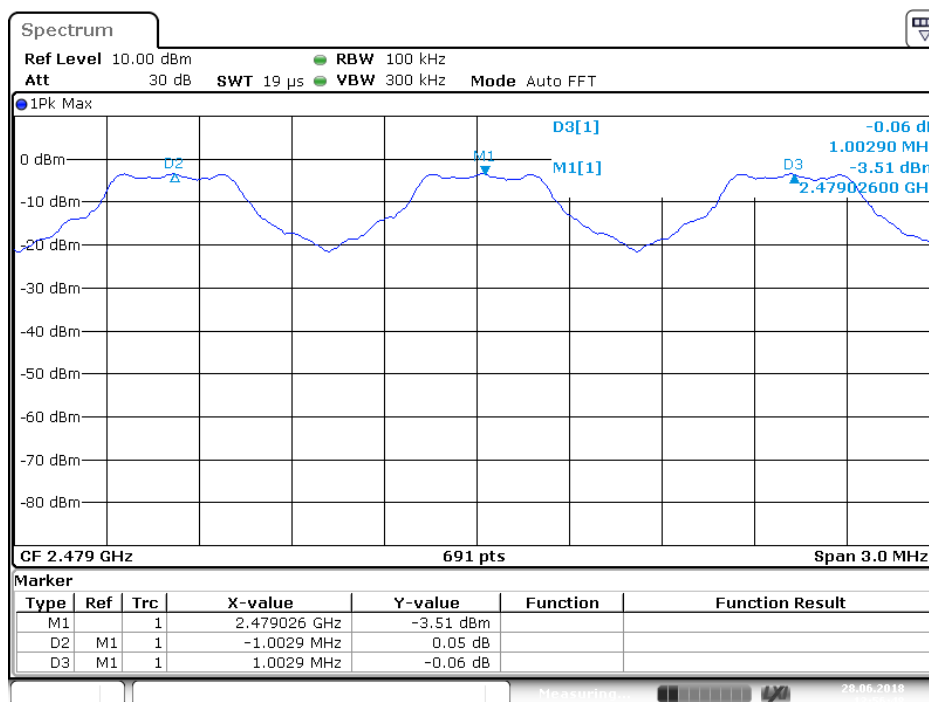

Date: 28.JUN.2018 13:56:49

## 7. NUMBER OF HOPPING FREQUENCY TEST

### 7.1. Block Diagram of Test Setup



(EUT: Stereo Bluetooth Headphones)

### 7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=90MHz, RBW=100 kHz, VBW=300 kHz.


7.5.3. Max hold, view and count how many channel in the band.

## 7.6.Test Result

Total number of hopping channel	Measurement result(CH)	Limit(CH)	Result
	79	$\geq 15$	PASS

The spectrum analyzer plots are attached as below.


Number of hopping channels (GFSK)

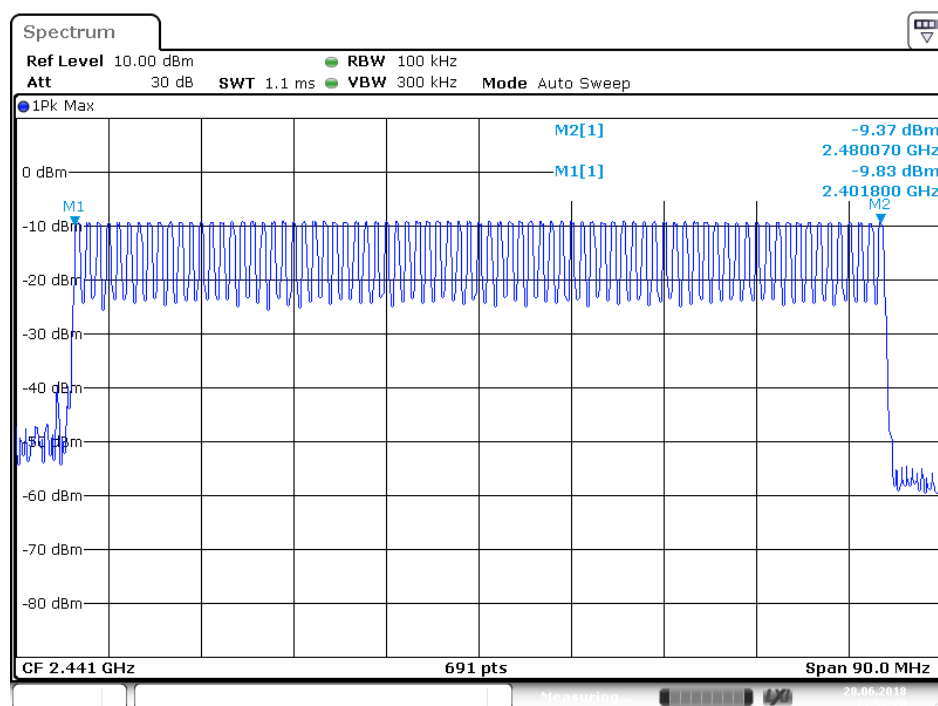

Date: 28.JUN.2018 13:52:20

## 8. DWELL TIME TEST

### 8.1. Block Diagram of Test Setup

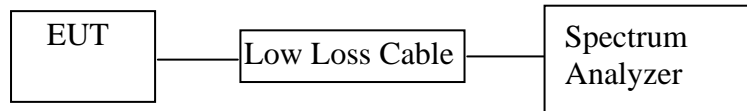

(EUT: Stereo Bluetooth Headphones)

### 8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

## 8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Span=0Hz, Adjust Sweep=5ms, 10ms, 15ms. Get the pulse time.

8.5.4. Repeat above procedures until all frequency measured were complete.

## 8.6. Test Result

### GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.442	141.44	400
	2441	0.442	141.44	400
	2480	0.449	143.68	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.710	273.60	400
	2441	1.710	273.60	400
	2480	1.710	273.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	2.978	317.65	400
	2441	2.978	317.65	400
	2480	2.978	317.65	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				


### Π/4-DQPSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
2DH1	2402	0.449	143.68	400
	2441	0.449	143.68	400
	2480	0.449	143.68	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
2DH3	2402	1.739	278.24	400
	2441	1.710	273.60	400
	2480	1.710	273.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
2DH5	2402	2.978	317.65	400
	2441	2.978	317.65	400
	2480	2.978	317.65	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				

The spectrum analyzer plots are attached as below.


## GFSK Mode

### DH1 Low channel

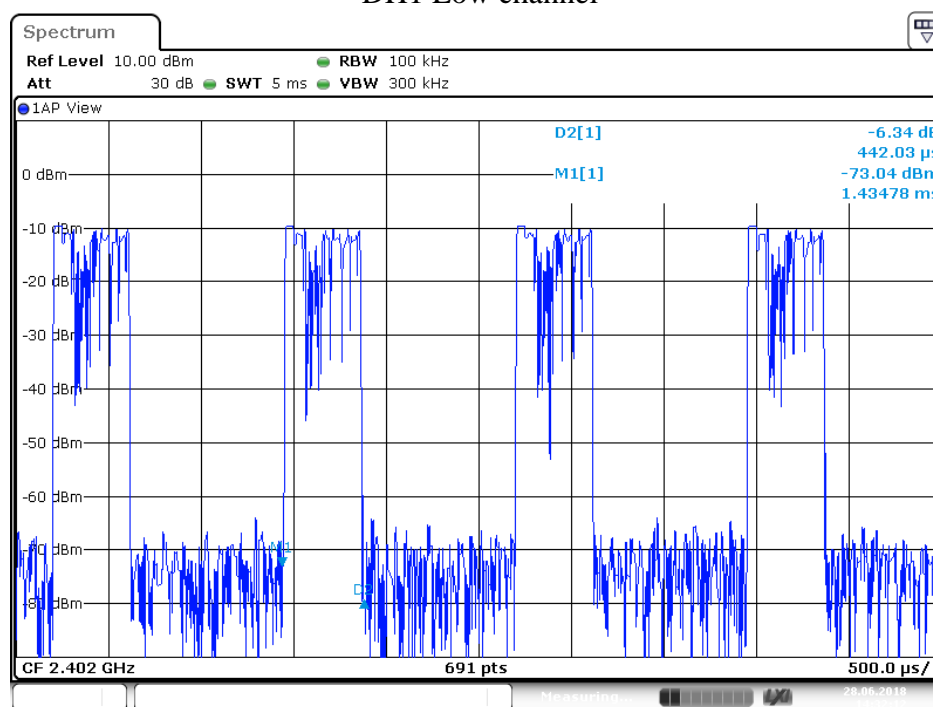

Date: 28.JUN.2018 14:32:13


### DH1 Middle channel

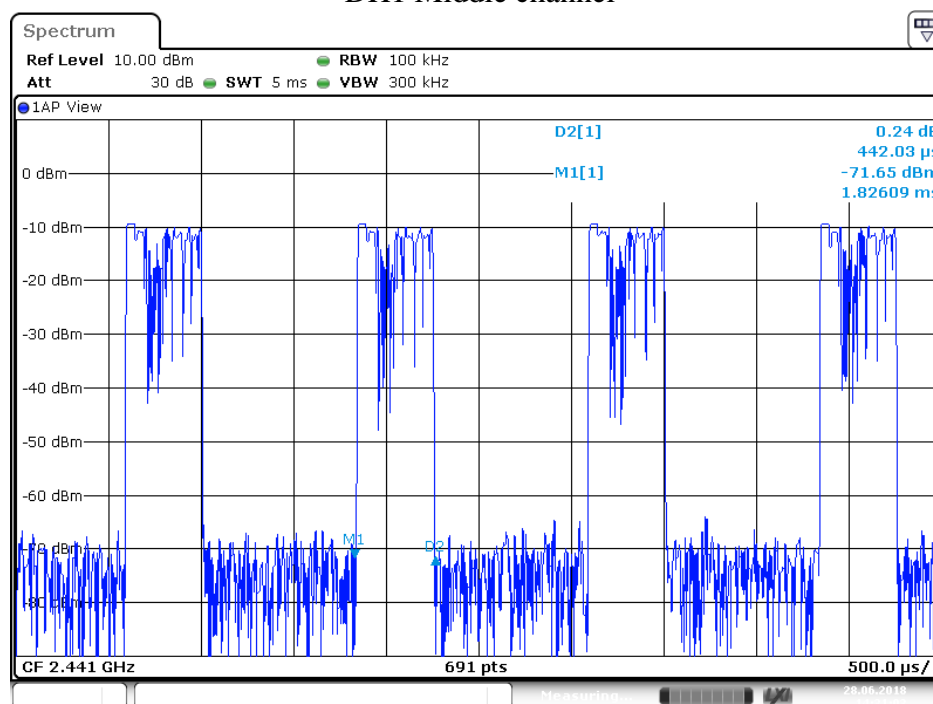

Date: 28.JUN.2018 14:31:03




## DH1 High channel

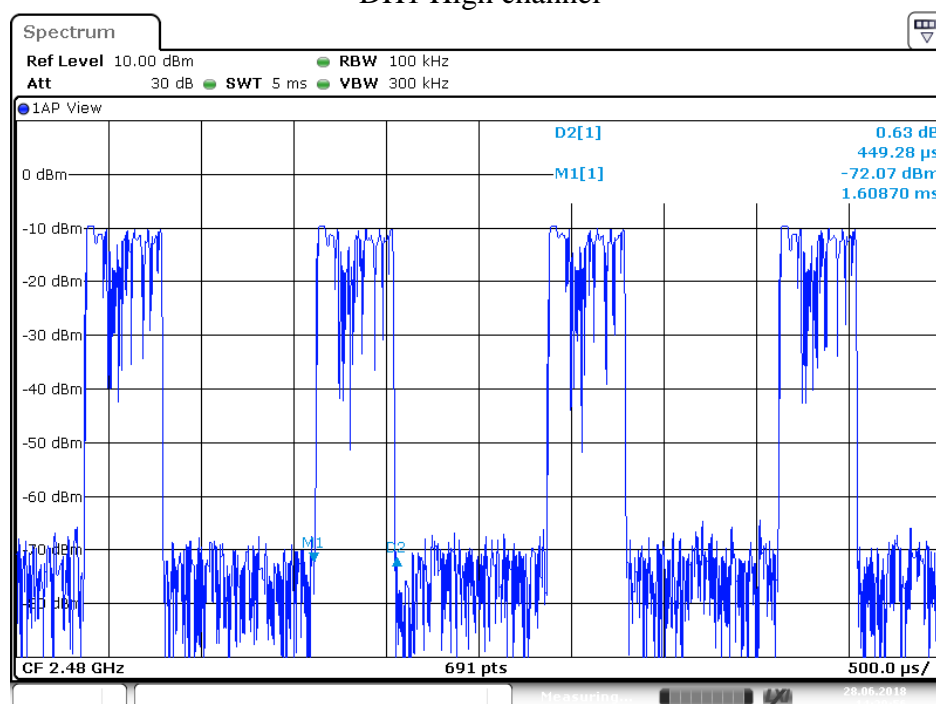


Date: 28.JUN.2018 14:29:57

## DH3 Low channel

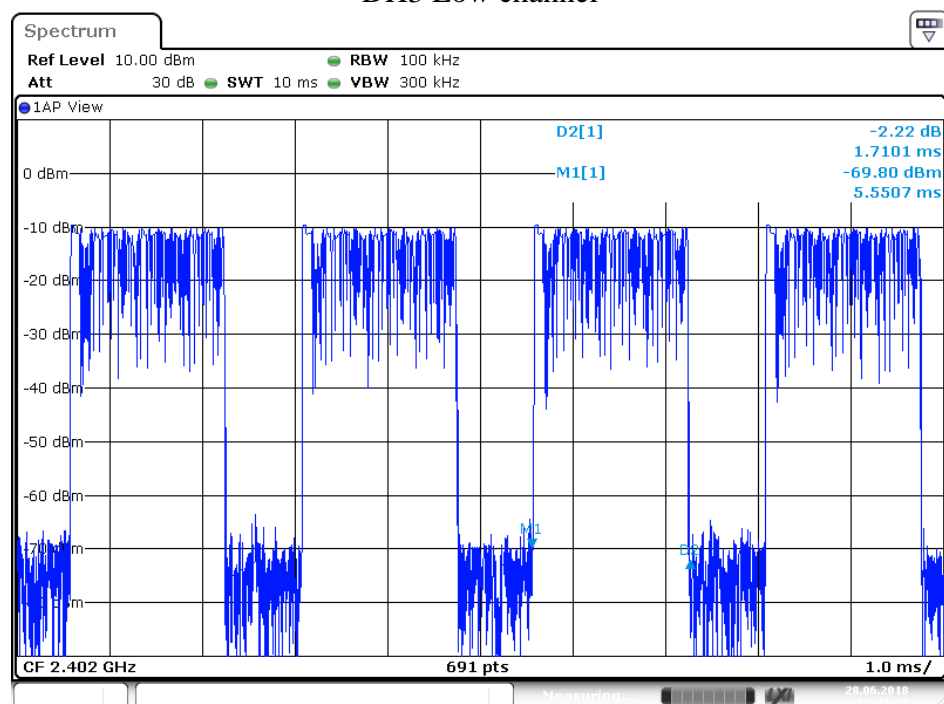


Date: 28.JUN.2018 14:33:11

## DH3 Middle channel

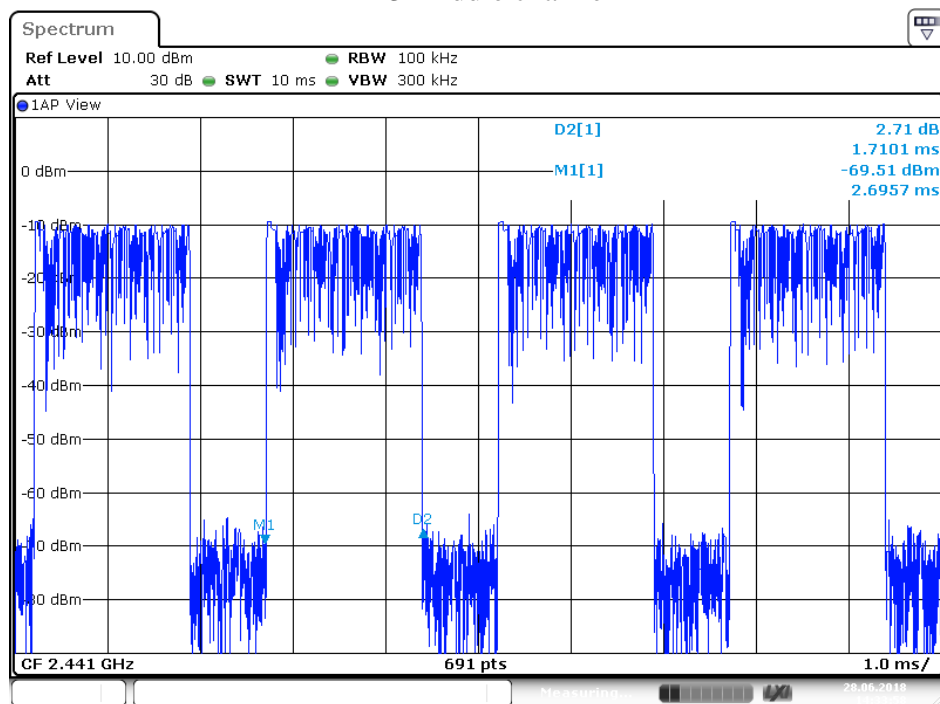

Date: 28.JUN.2018 14:33:59

## DH3 High channel

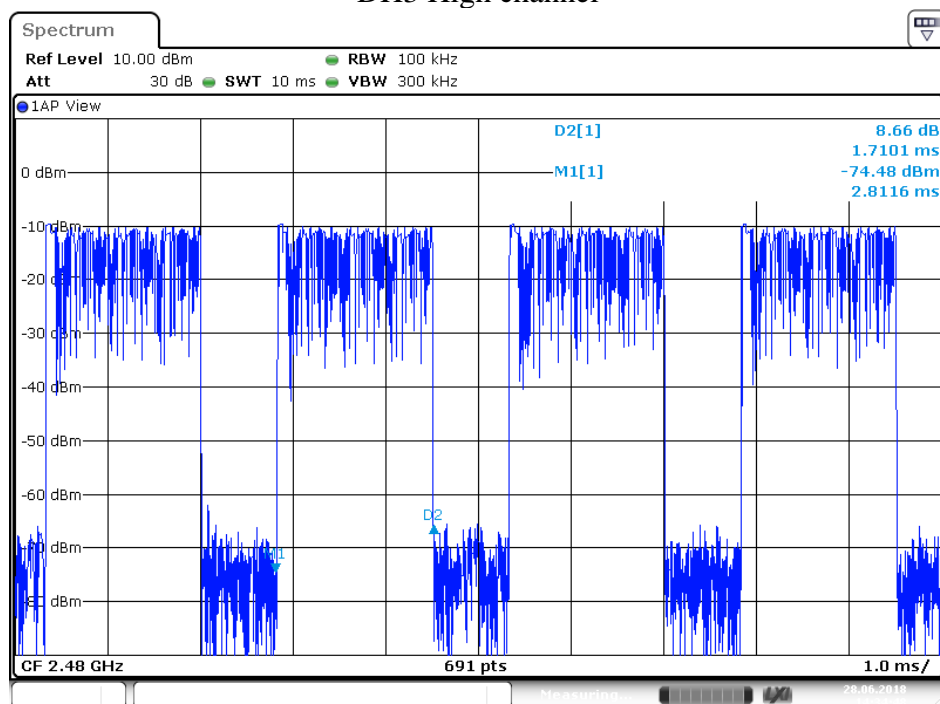

Date: 28.JUN.2018 14:34:48

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com


Http://www.atc-lab.com

## DH5 Low channel

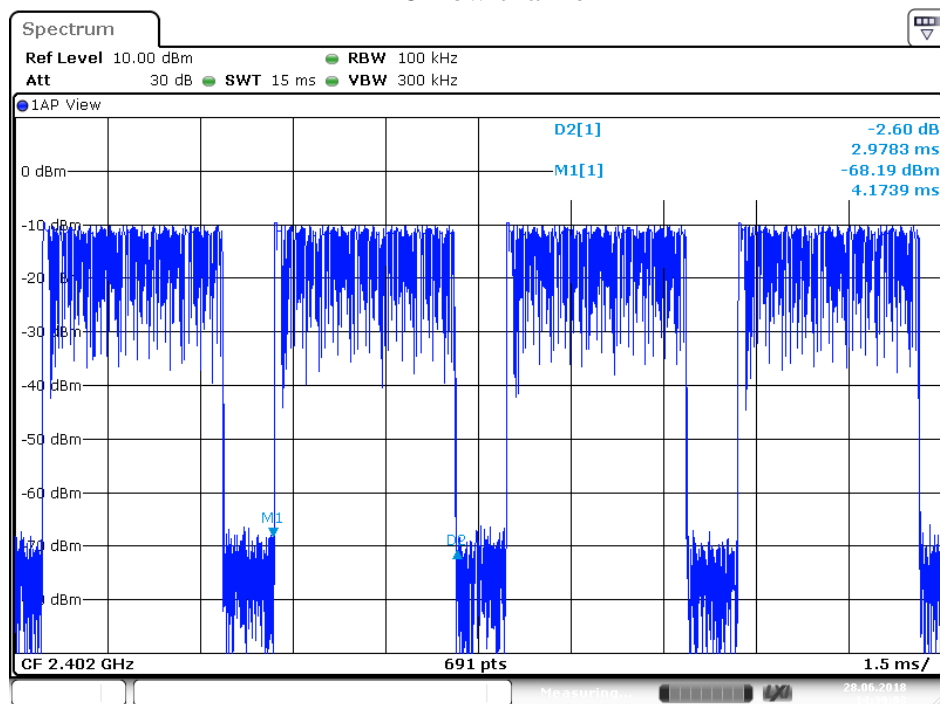


Date: 28.JUN.2018 14:39:03

## DH5 Middle channel

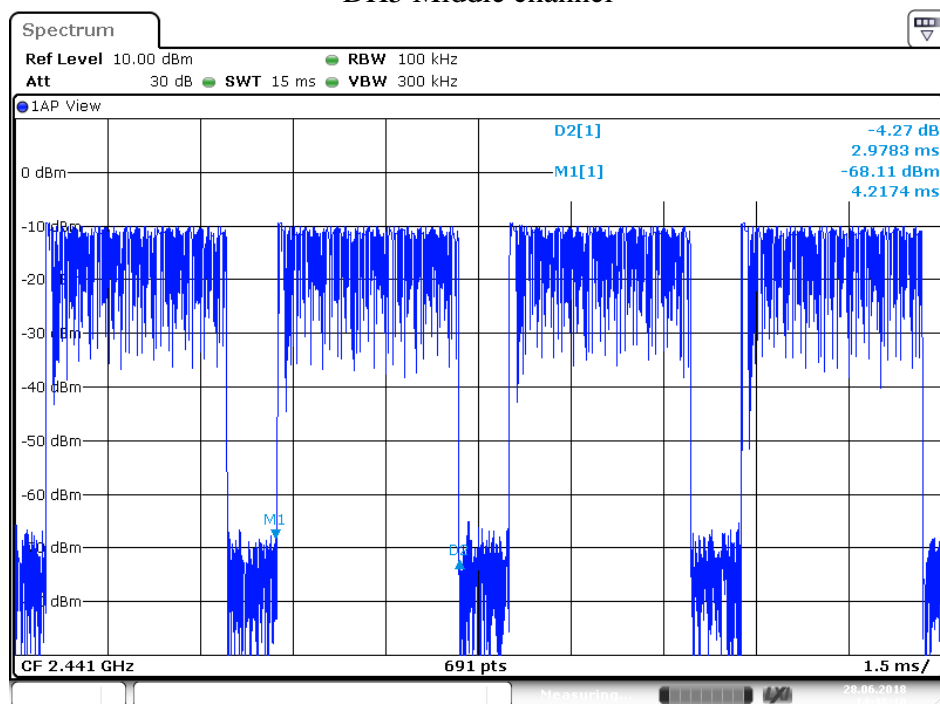


Date: 28.JUN.2018 14:38:10

## DH5 High channel

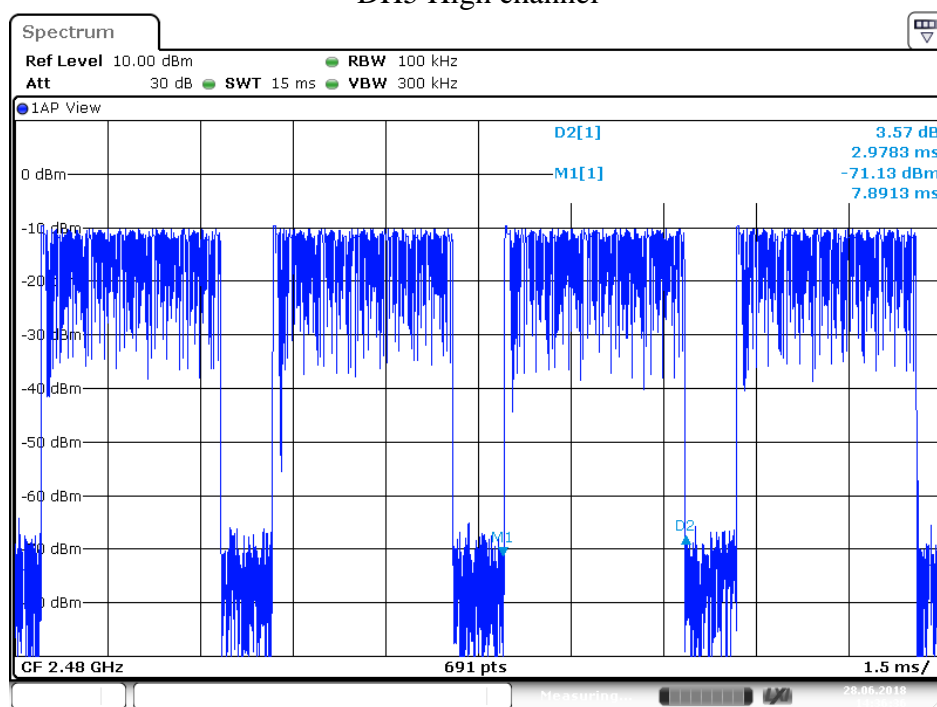


## II/4-DQPSK Mode

## 2DH1 Low channel

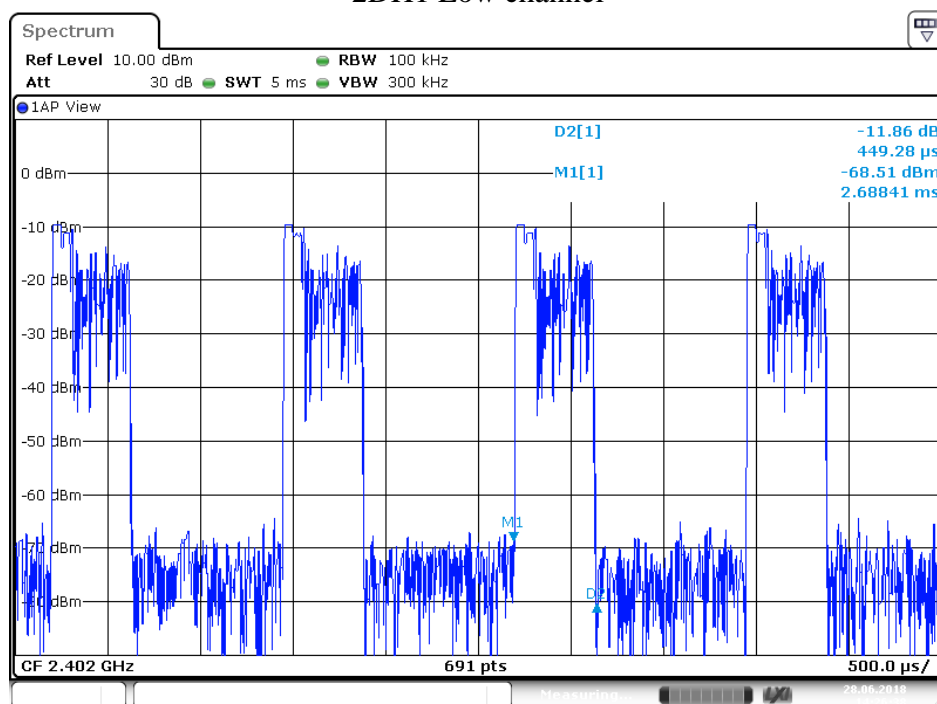


## 2DH1 Middle channel

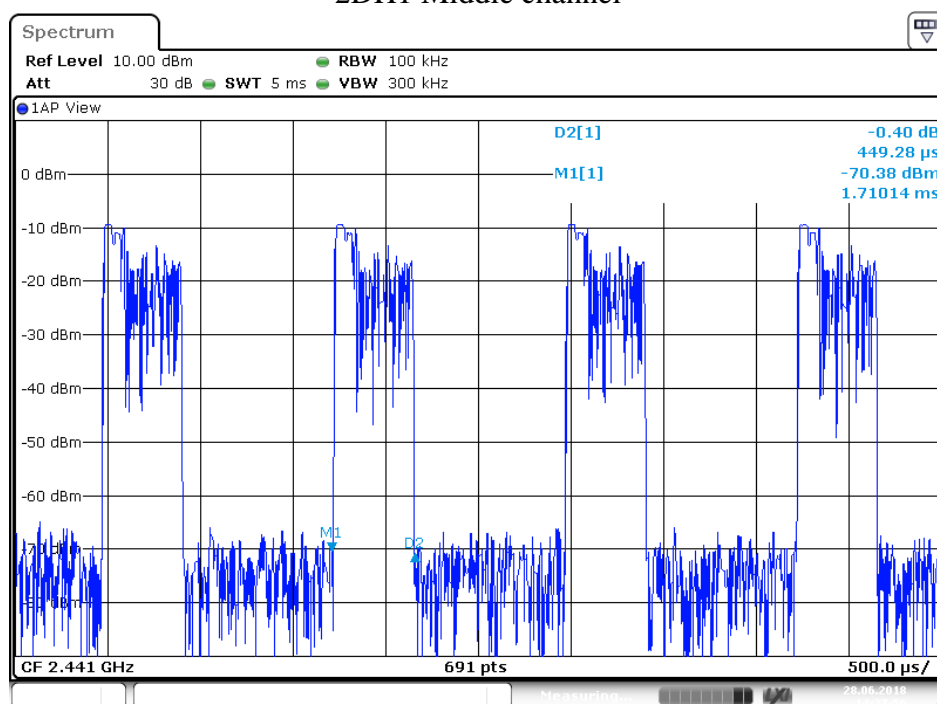

Date: 28.JUN.2018 14:27:57

## 2DH1 High channel

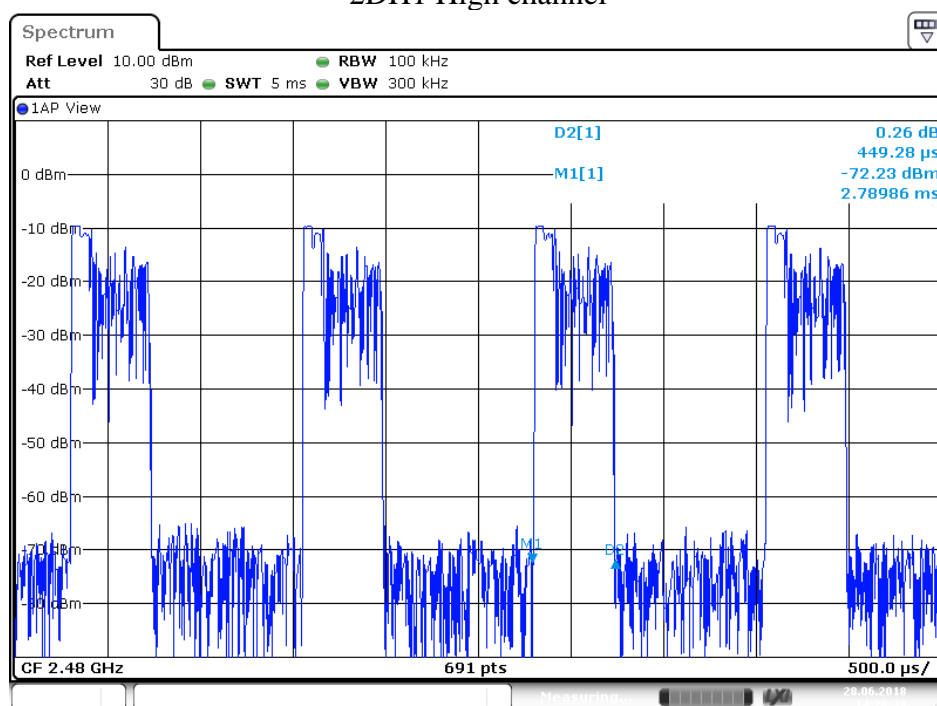

Date: 28.JUN.2018 14:28:39

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396


E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com


## 2DH3 Low channel

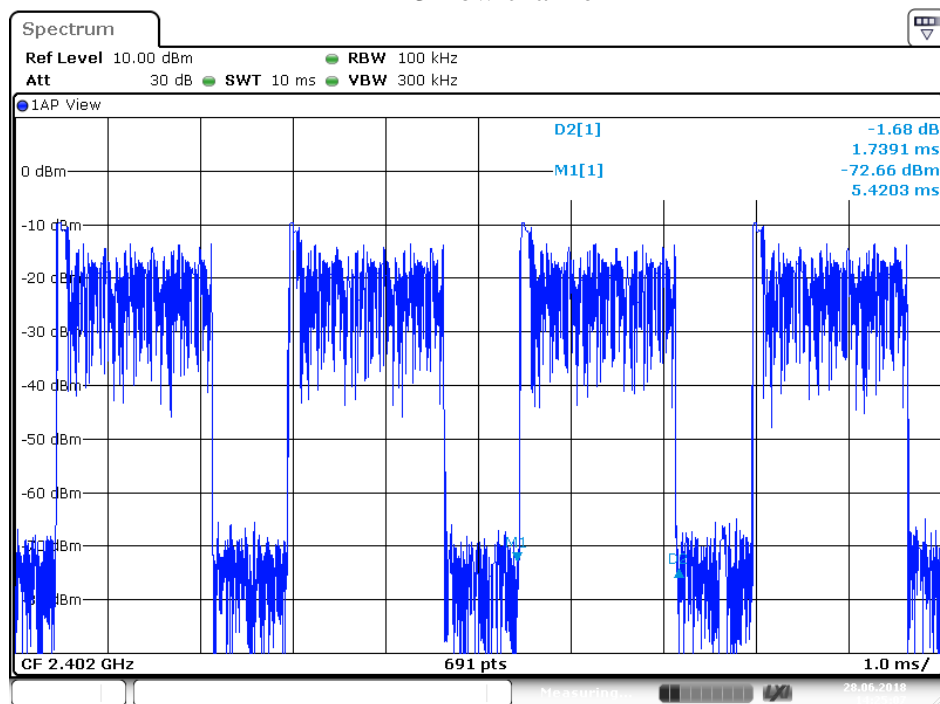

## 2DH3 Middle channel

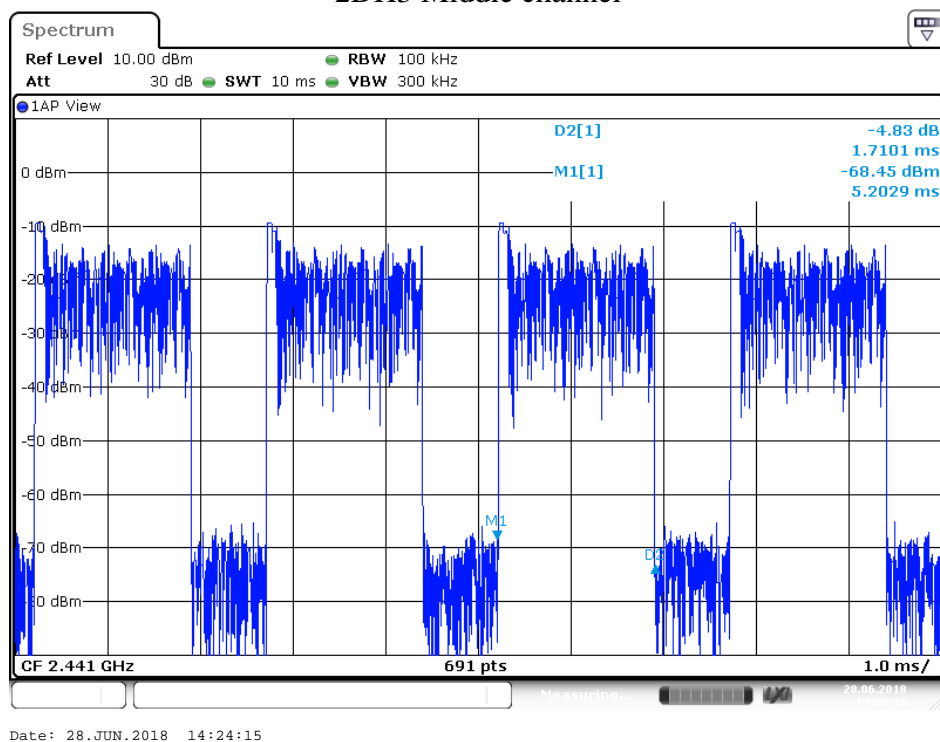


## 2DH3 High channel

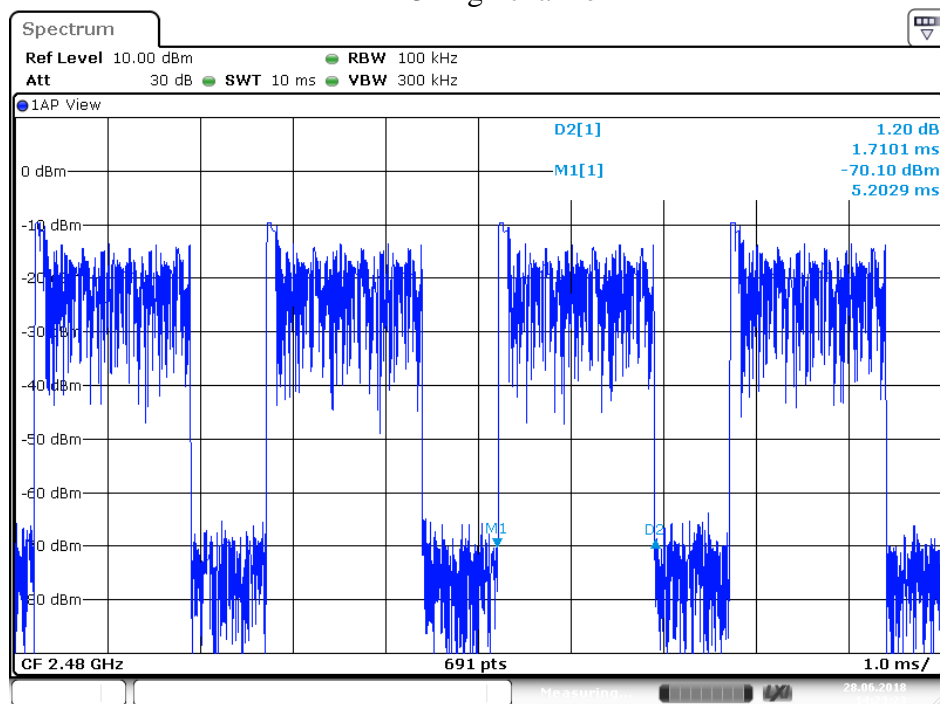

Date: 28.JUN.2018 14:23:24

## 2DH5 Low channel

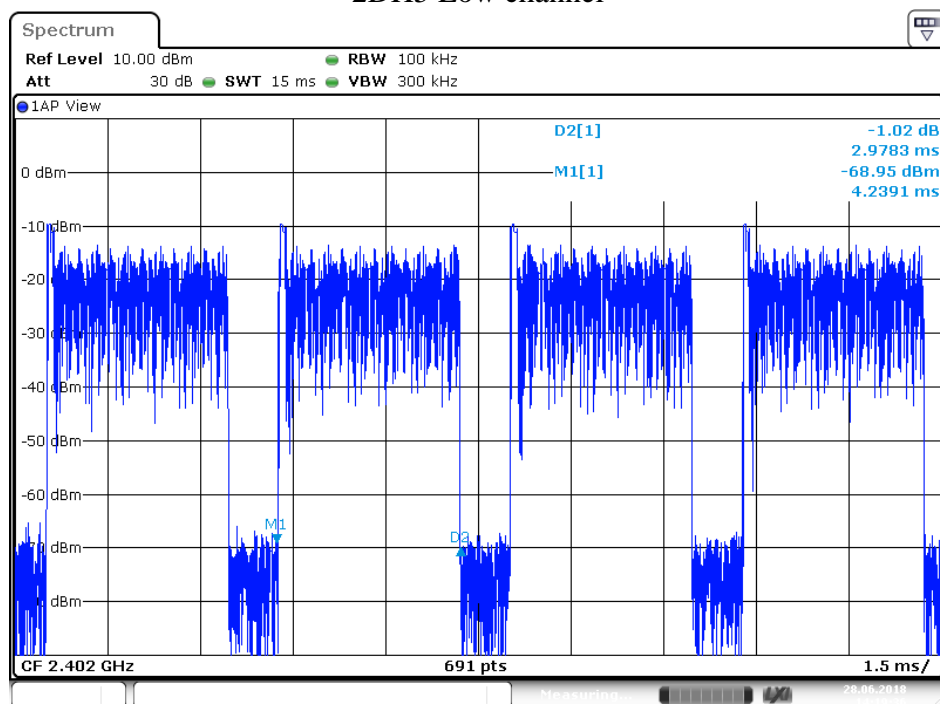

Date: 28.JUN.2018 14:19:36

**Shenzhen Accurate Technology Co., Ltd.**

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com


Http://www.atc-lab.com

## 2DH5 Middle channel

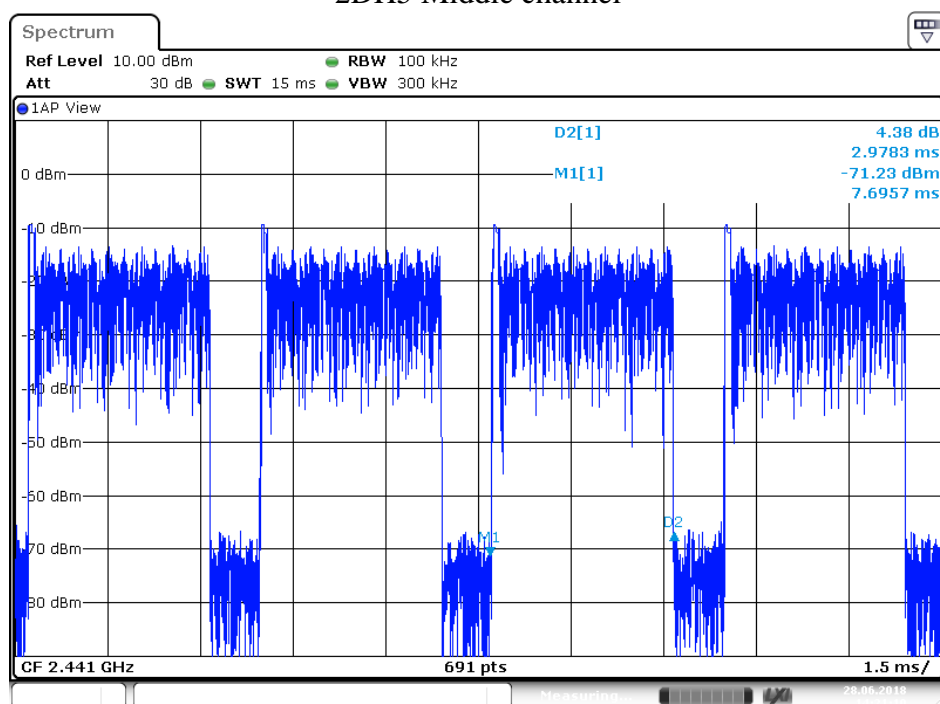

Date: 28.JUN.2018 14:21:10

## 2DH5 High channel

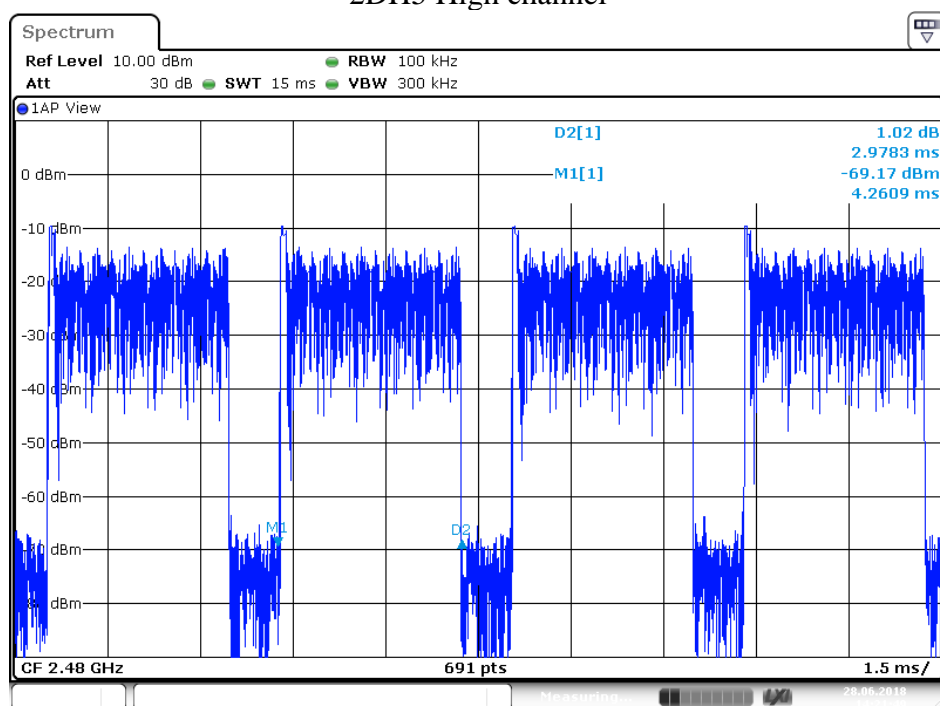


Date: 28.JUN.2018 14:21:49



## 9. MAXIMUM PEAK OUTPUT POWER TEST

### 9.1. Block Diagram of Test Setup

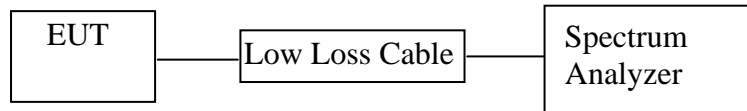

(EUT: Stereo Bluetooth Headphones)

### 9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

## 9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz for GFSK mode

9.5.3. Set RBW of spectrum analyzer to 3MHz and VBW to 10MHz for  $\Pi/4$ -DQPSK mode

9.5.4. Measurement the maximum peak output power.

## 9.6. Test Result

### GFSK Mode

Frequency (MHz)	Maximum peak conducted output power (dBm/W)	e.i.r.p. (dBm/W)	Limits dBm / W	Result
2402	-8.41/0.0001	-8.41/0.0001	30 / 1.000	PASS
2441	-8.21/0.0002	-8.21/0.0002	30 / 1.000	PASS
2480	-8.44/0.0001	-8.44/0.0001	30 / 1.000	PASS

### $\Pi/4$ -DQPSK Mode


Frequency (MHz)	Maximum peak conducted output power (dBm/W)	e.i.r.p. (dBm/W)	Limits dBm / W	Result
2402	-1.95/0.0006	-1.95/0.0006	21 / 0.125	PASS
2441	-1.72/0.0007	-1.72/0.0007	21 / 0.125	PASS
2480	-1.93/0.0006	-1.93/0.0006	21 / 0.125	PASS

Note: e.i.r.p= Maximum peak conducted output power+Antenna gain(0 dBi)


The spectrum analyzer plots are attached as below.

## GFSK Mode


### Low channel

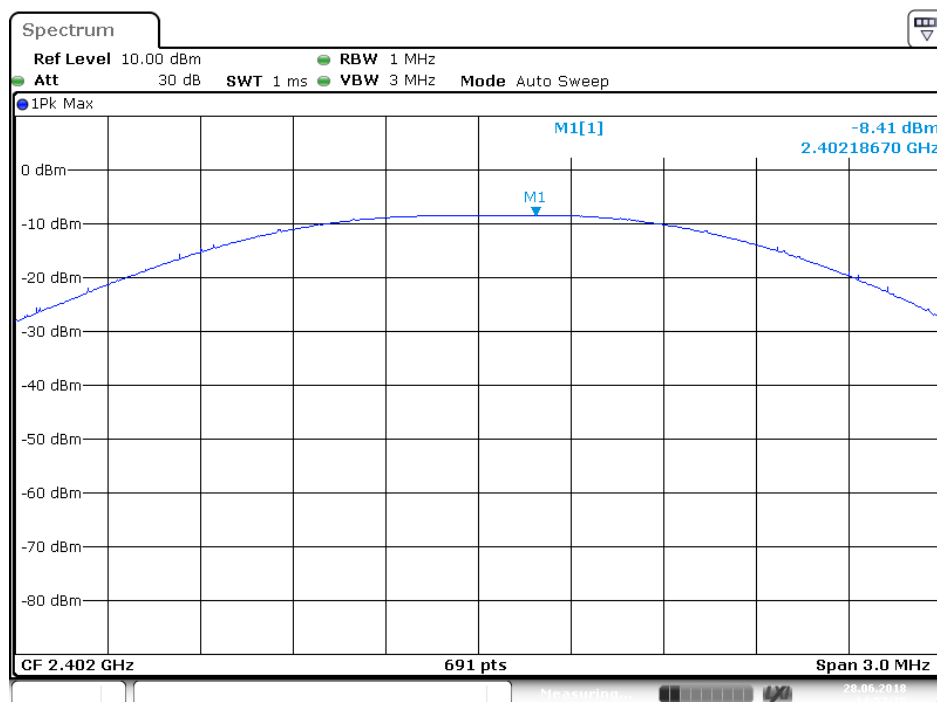

### Middle channel

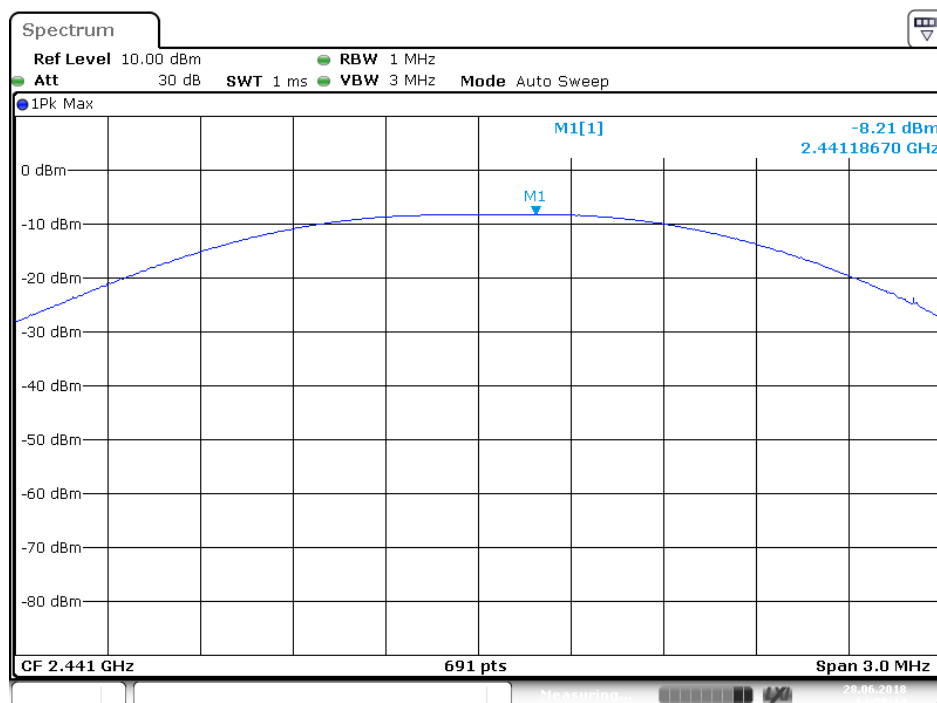


## High channel

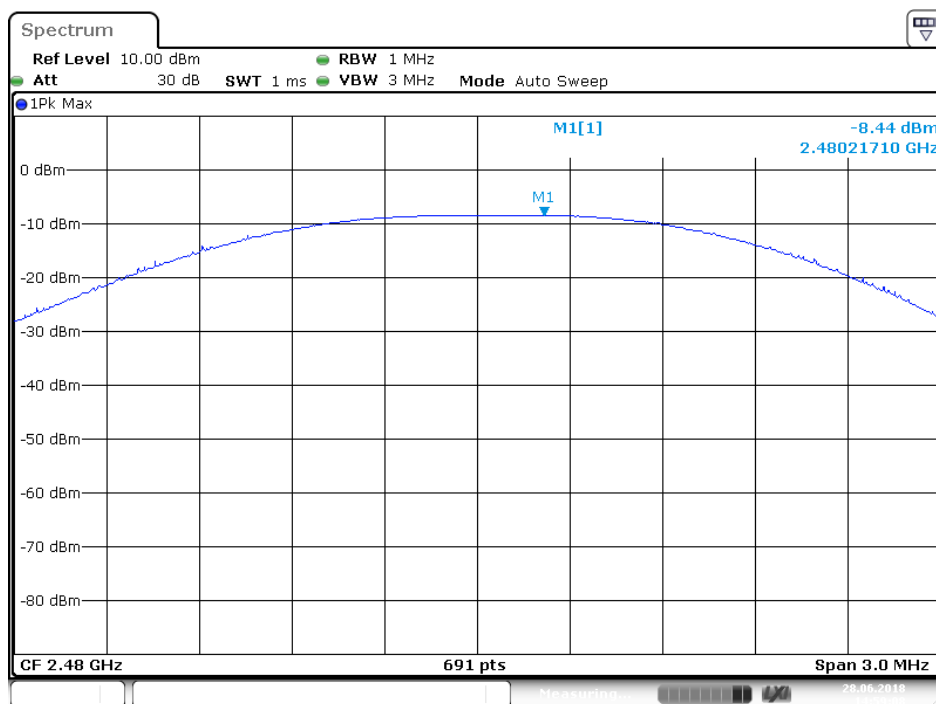

Date: 28.JUN.2018 14:59:09


## Π/4-DQPSK Mode

## Low channel

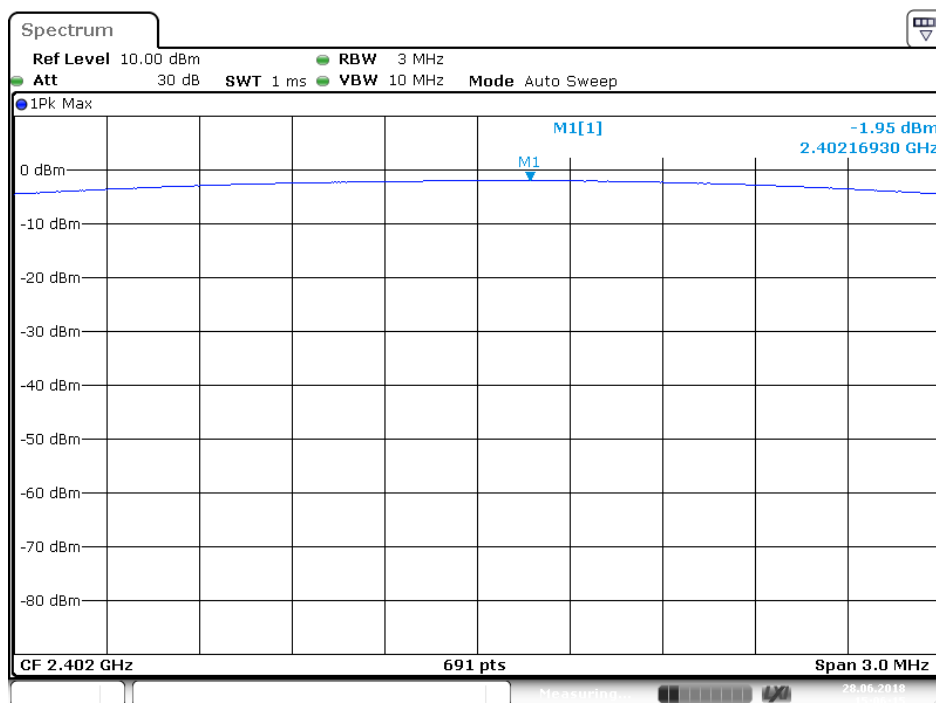


Date: 28.JUN.2018 15:06:15

## Middle channel

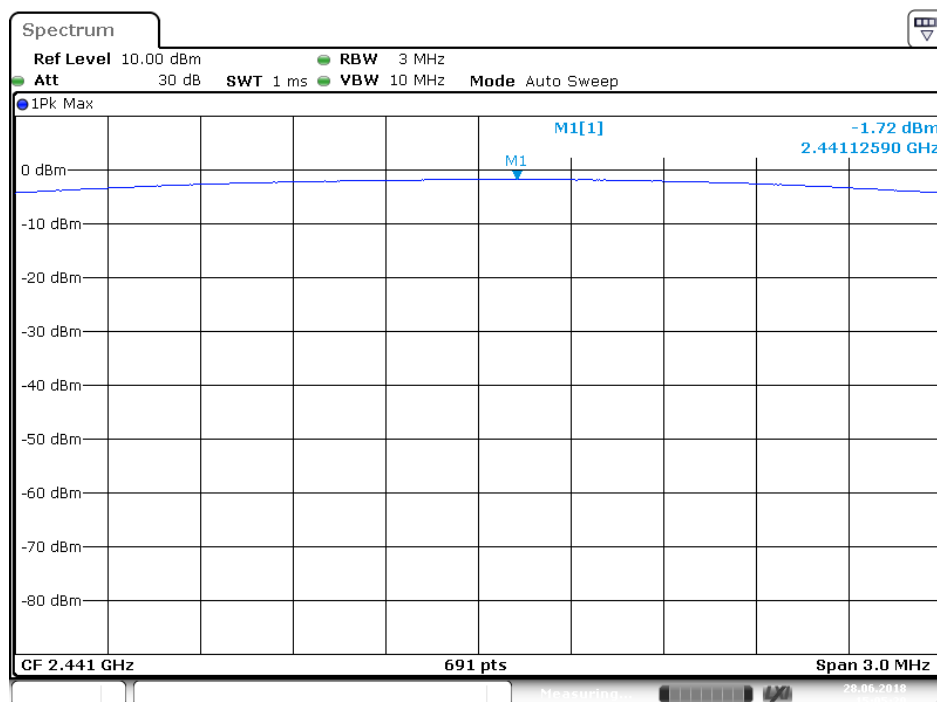

Date: 28.JUN.2018 15:05:30

## High channel

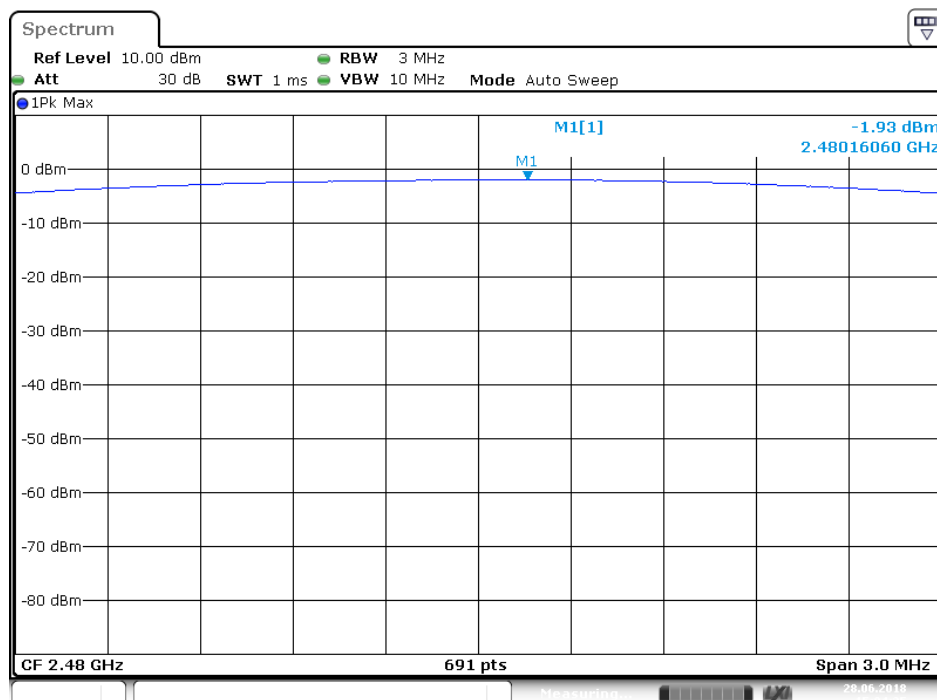


Date: 28.JUN.2018 15:04:36


## 10.RADIATED EMISSION TEST

### 10.1.Block Diagram of Test Setup


#### 10.1.1.Block diagram of connection between the EUT and peripherals

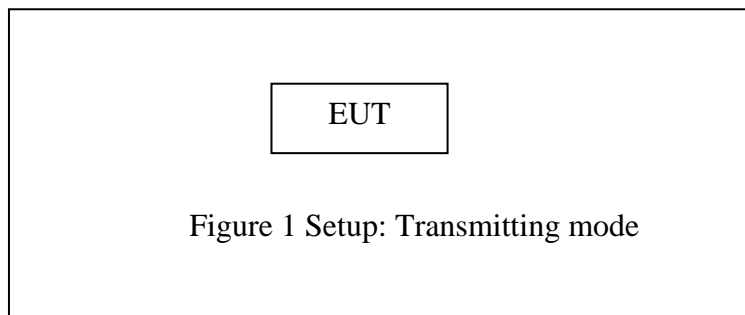

#### 10.1.2.Semi-Anechoic Chamber Test Setup Diagram

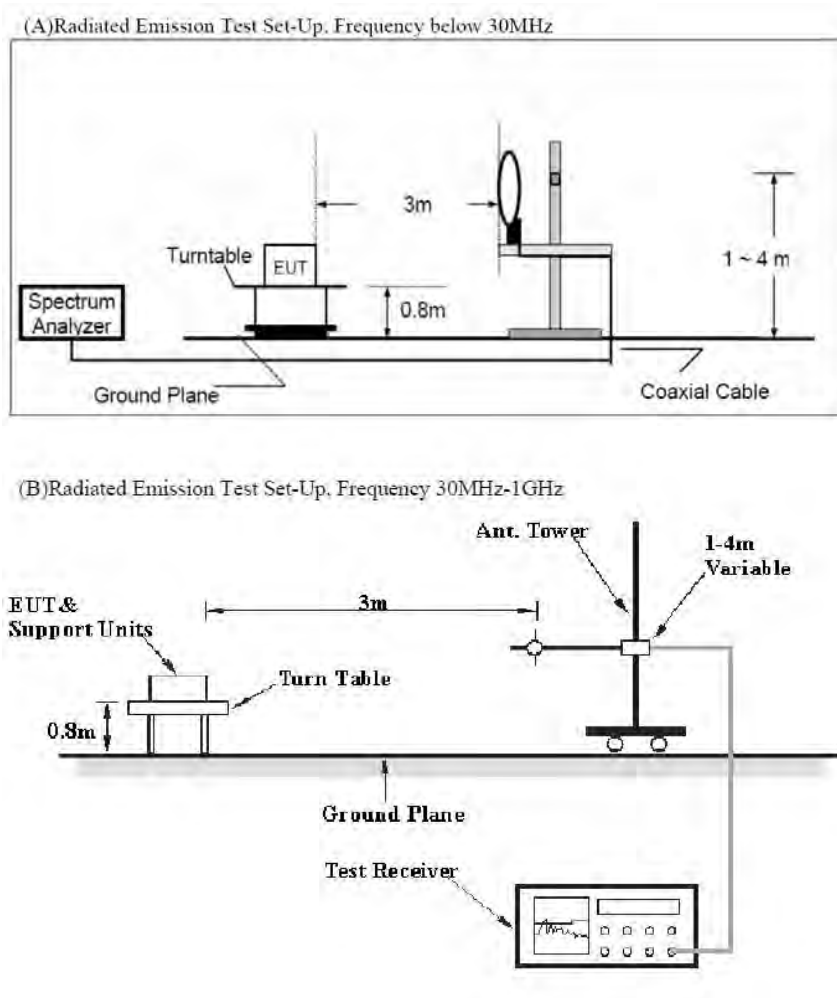

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

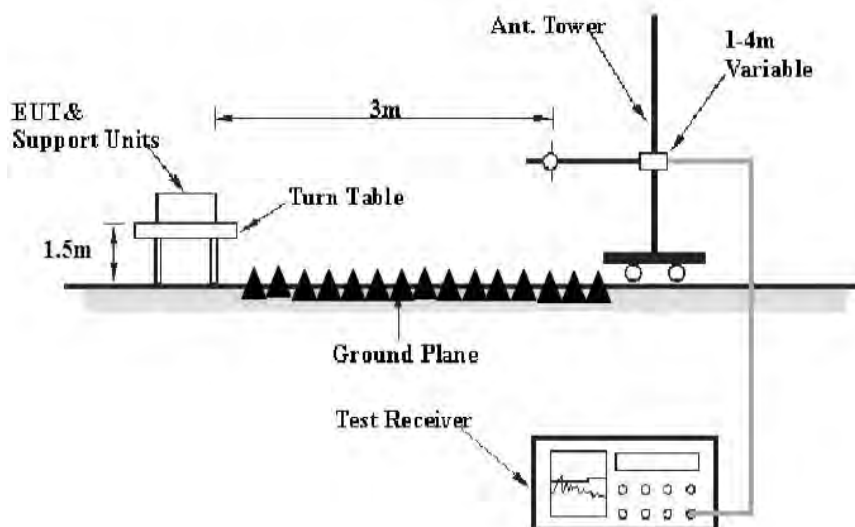

## 10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. Transmitter Emission Limit

Radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu\text{A/m}$ )	Measurement distance (m)
9 - 490 kHz <sup>1</sup>	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



## 10.4.Restricted bands of operation

### 10.4.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 10.5.Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 10.7.Data Sample

Frequency (MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	48.69	-13.35	35.34	46	-10.66	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading(dB $\mu$ v) + Factor(dB/m)

Limit (dB $\mu$ v/m) = Limit stated in standard

Margin (dB) = Result(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB $\mu$ V/m)–Limit(dB $\mu$ V/m)

Result(dB $\mu$ V/m)= Reading(dB $\mu$ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 10.8.The Field Strength of Radiation Emission Measurement Results

**PASS.**

Note: 1.We tested GFSK mode,  $\Pi/4$ -DQPSK Mode and recorded the worst case data ( $\Pi/4$ -DQPSK mode) for all test mode.

The spectrum analyzer plots are attached as below.

## 9kHz-30MHz test data


ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: X

### SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

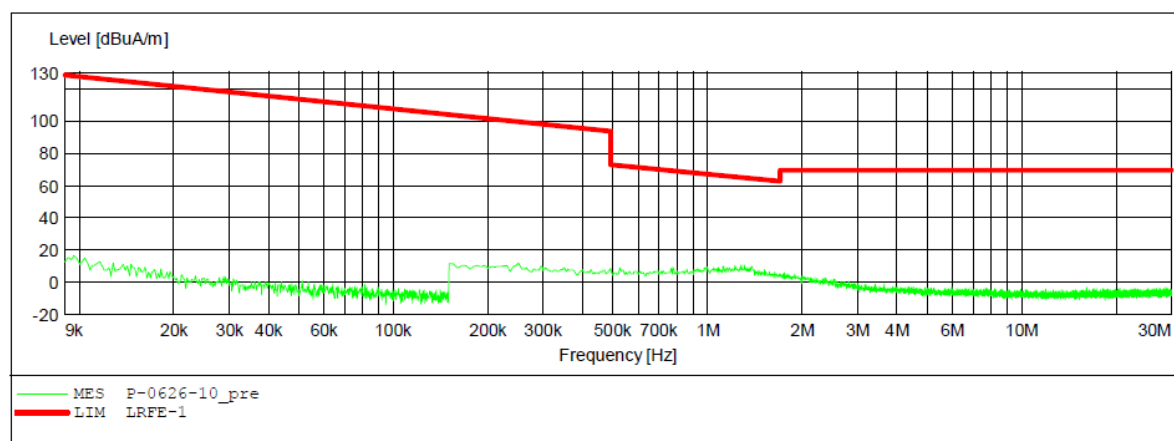


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESSONIC INT'L (HK) LTD.  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Y

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

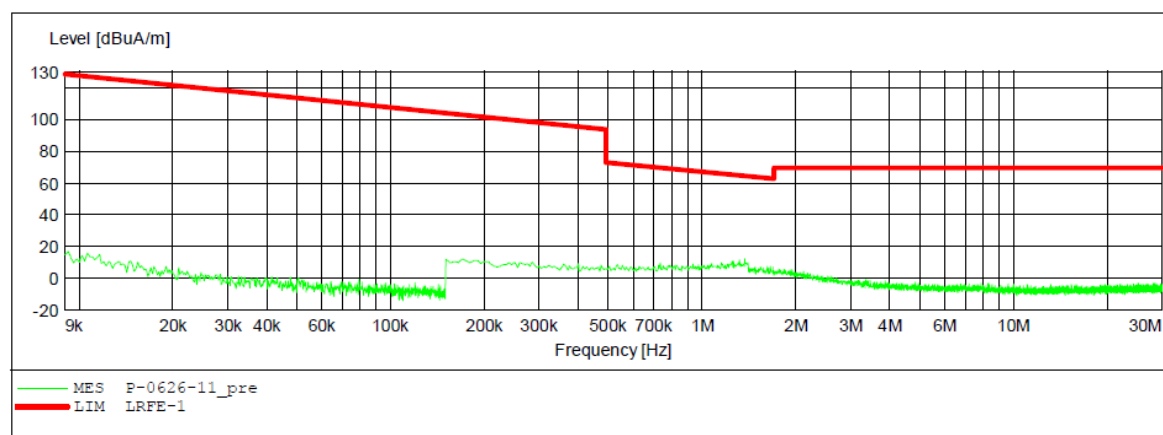


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Z

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

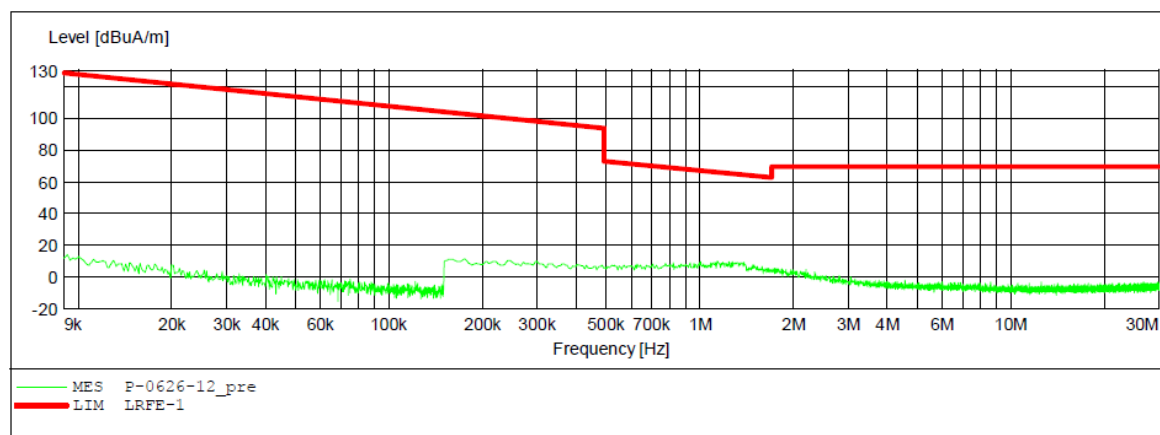


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2441MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: X

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

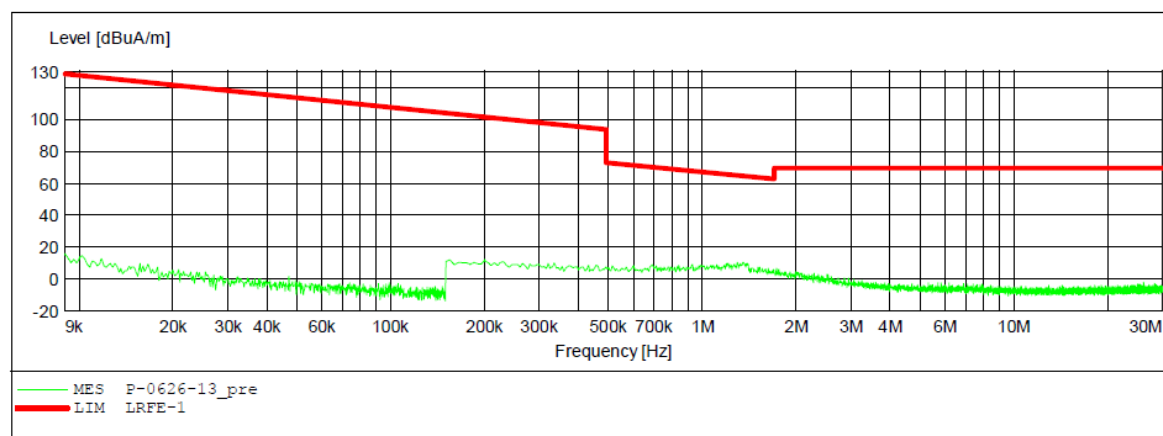


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2441MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Y

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

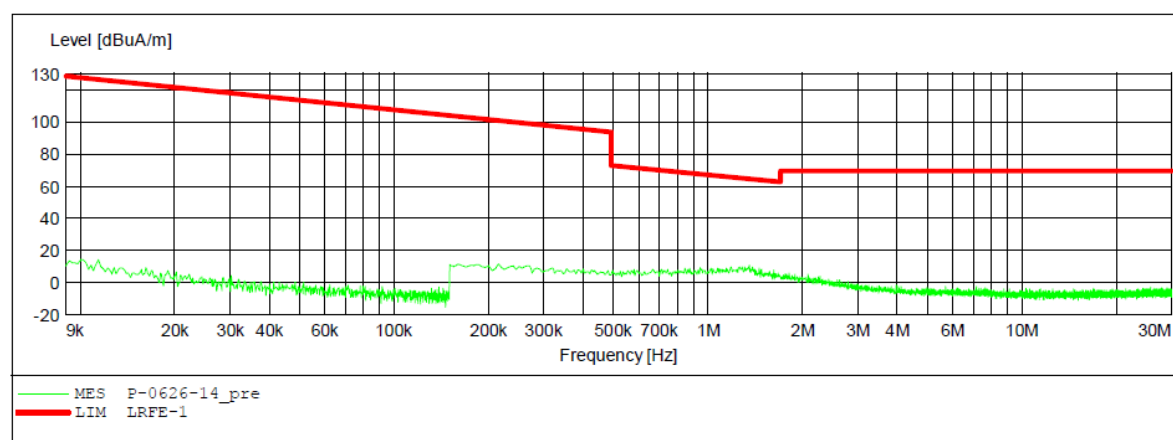




## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2441MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Z

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

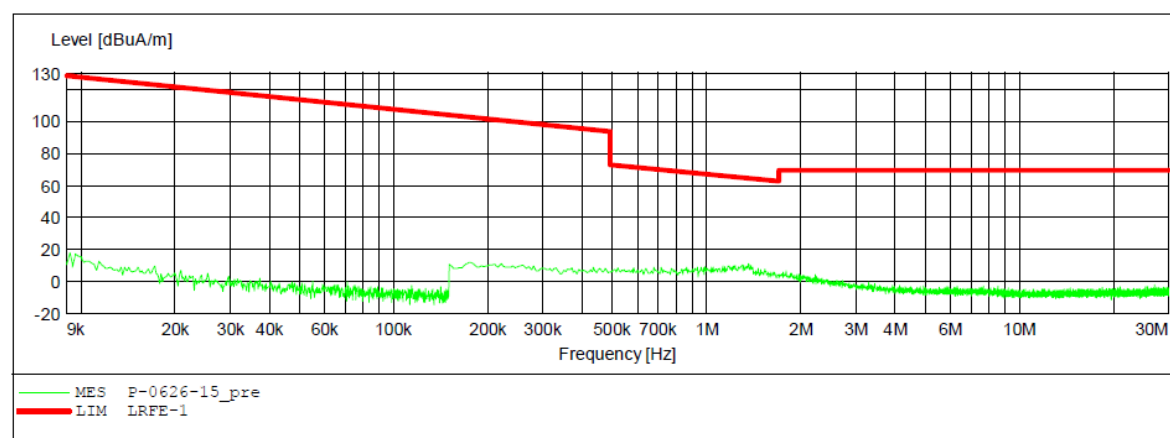


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: X

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

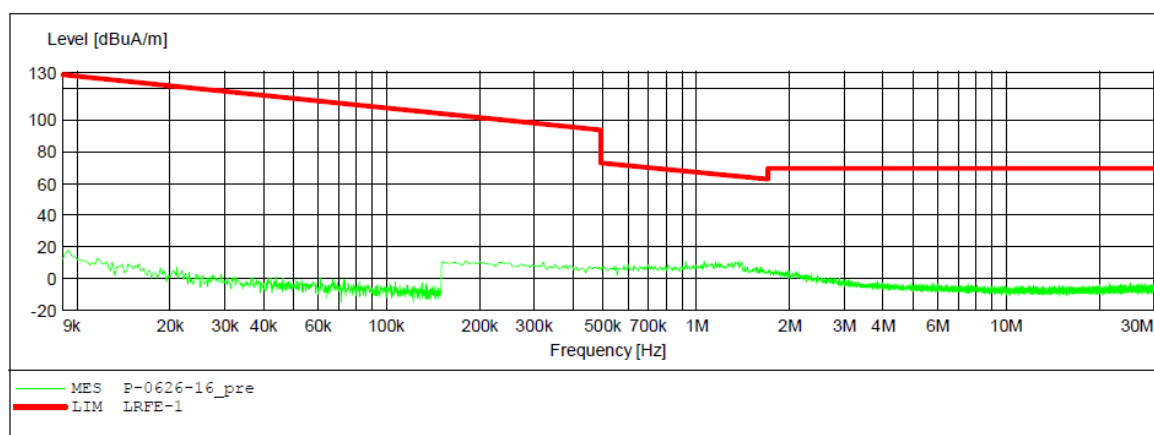


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Y

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

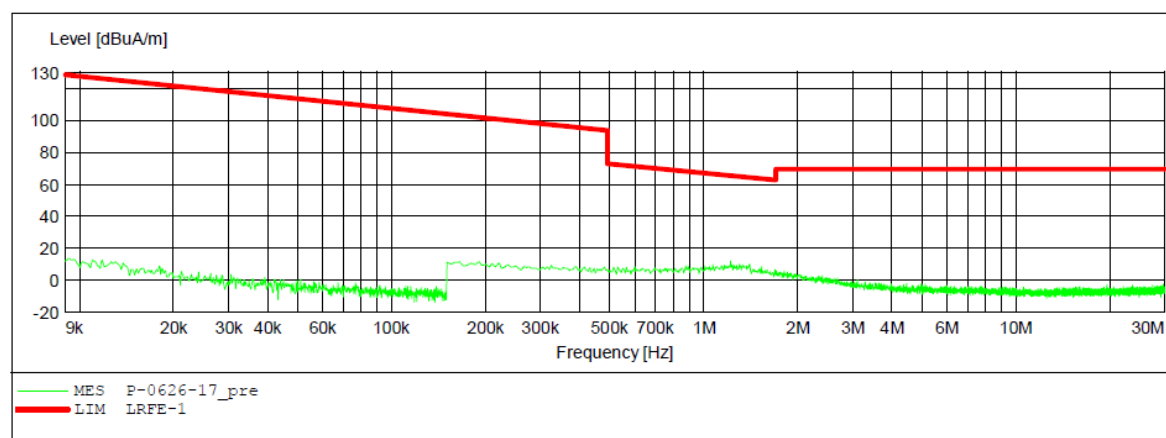


## ACCURATE TECHNOLOGY CO., LTD

### FCC PART 15C 3m Radiated

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESSONIC INT'L (HK) LTD.  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: WADE  
 Test Specification: DC 3.7V  
 Comment: Z

### SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

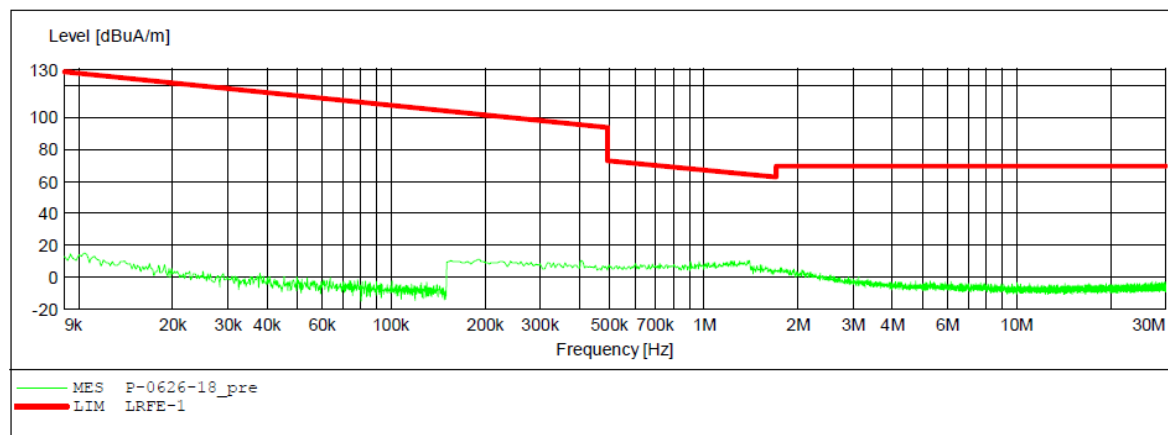

## 30MHz-1000MHz test data



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1498

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

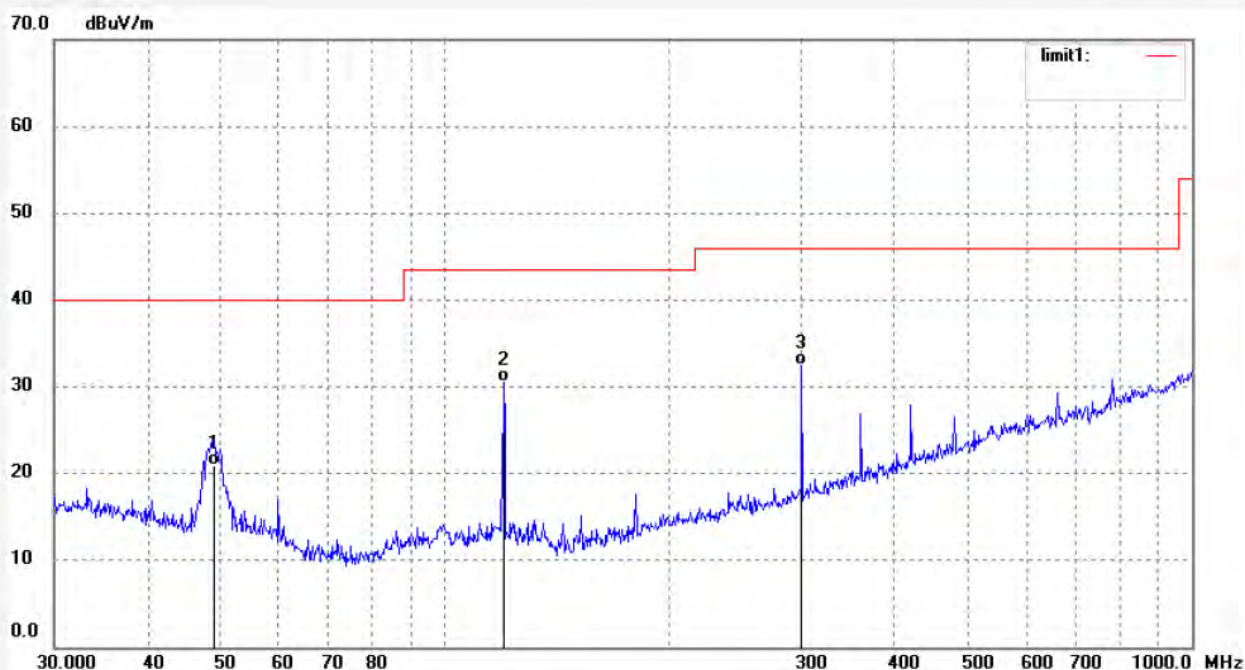

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.1865	33.44	-12.58	20.86	40.00	-19.14	QP			
2	119.8555	43.54	-13.06	30.48	43.50	-13.02	QP			
3	300.3672	41.50	-9.01	32.49	46.00	-13.51	QP			

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com



Job No.: LGW2018 #1499

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

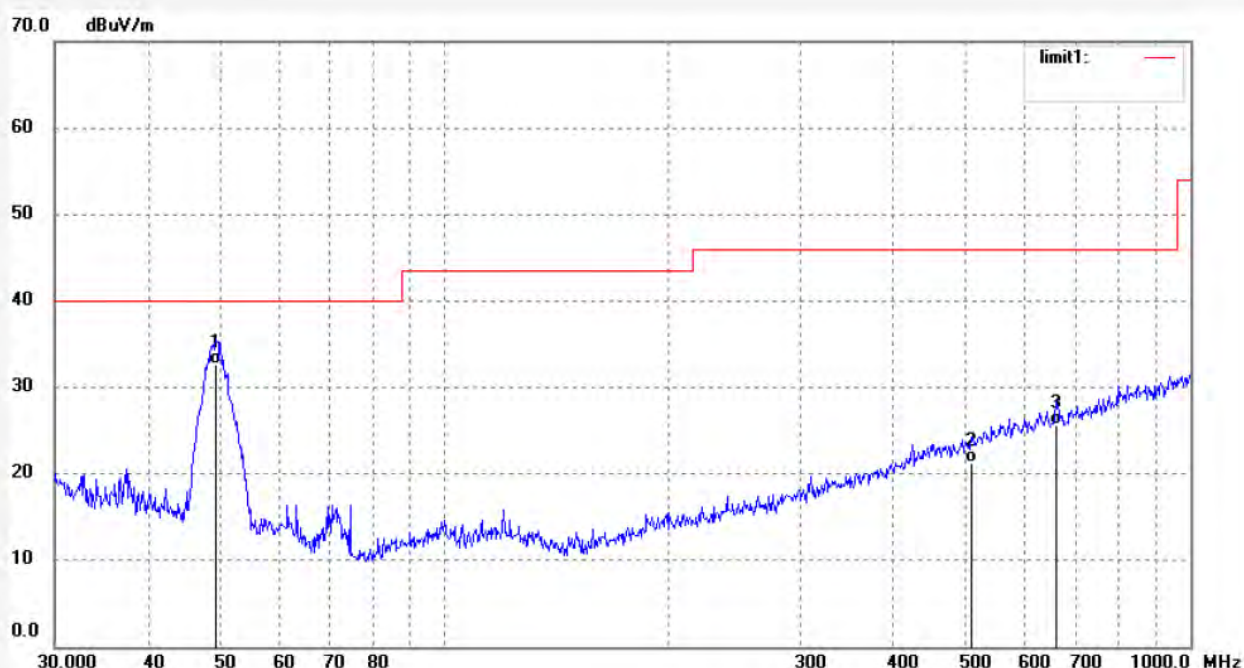

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.3594	45.20	-12.58	32.62	40.00	-7.38	QP			
2	508.2581	25.39	-4.09	21.30	46.00	-24.70	QP			
3	661.1504	27.19	-1.59	25.60	46.00	-20.40	QP			



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1501

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

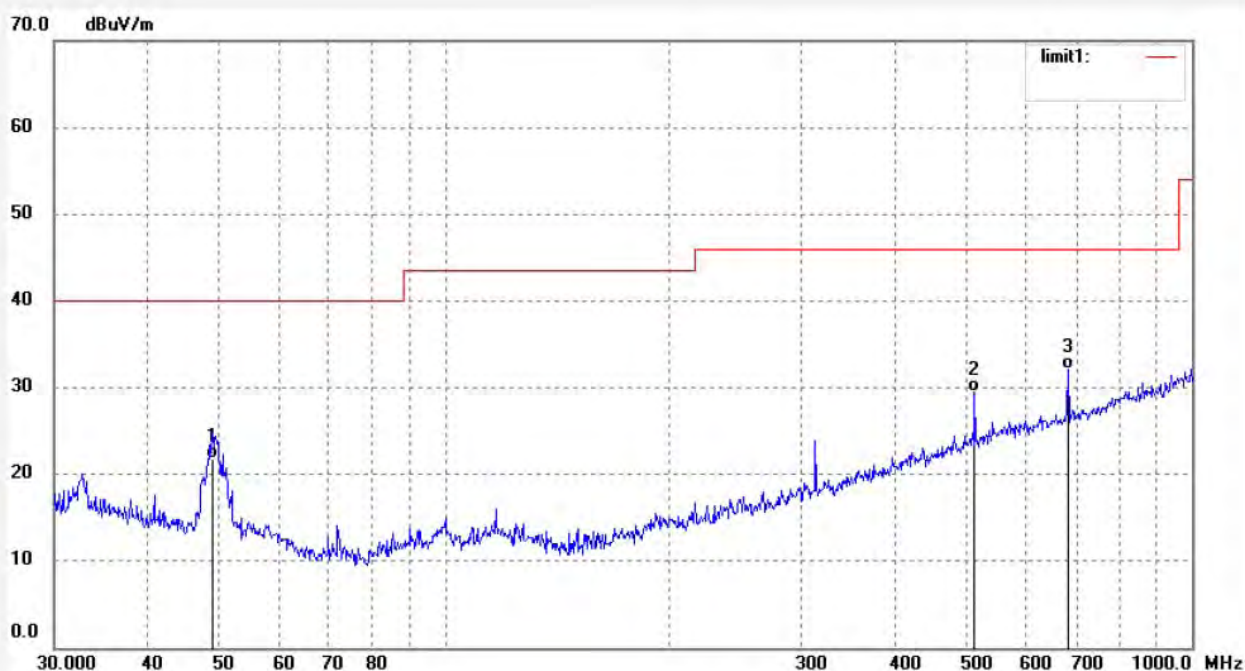

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	48.8429	34.34	-12.58	21.76	40.00	-18.24	QP			
2	511.8351	33.48	-4.03	29.45	46.00	-16.55	QP			
3	682.3484	33.50	-1.33	32.17	46.00	-13.83	QP			

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com



Job No.: LGW2018 #1500

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

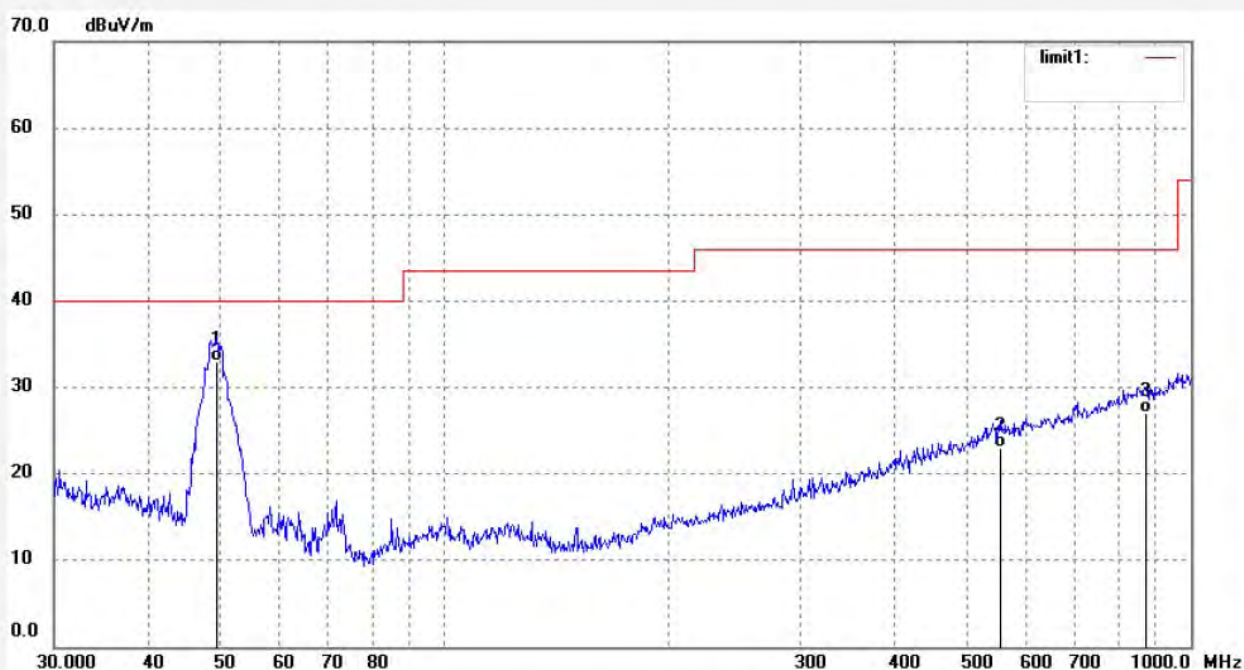

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.5328	45.60	-12.58	33.02	40.00	-6.98	QP			
2	556.7744	26.04	-2.94	23.10	46.00	-22.90	QP			
3	869.1301	25.12	1.90	27.02	46.00	-18.98	QP			



Job No.: LGW2018 #1502

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

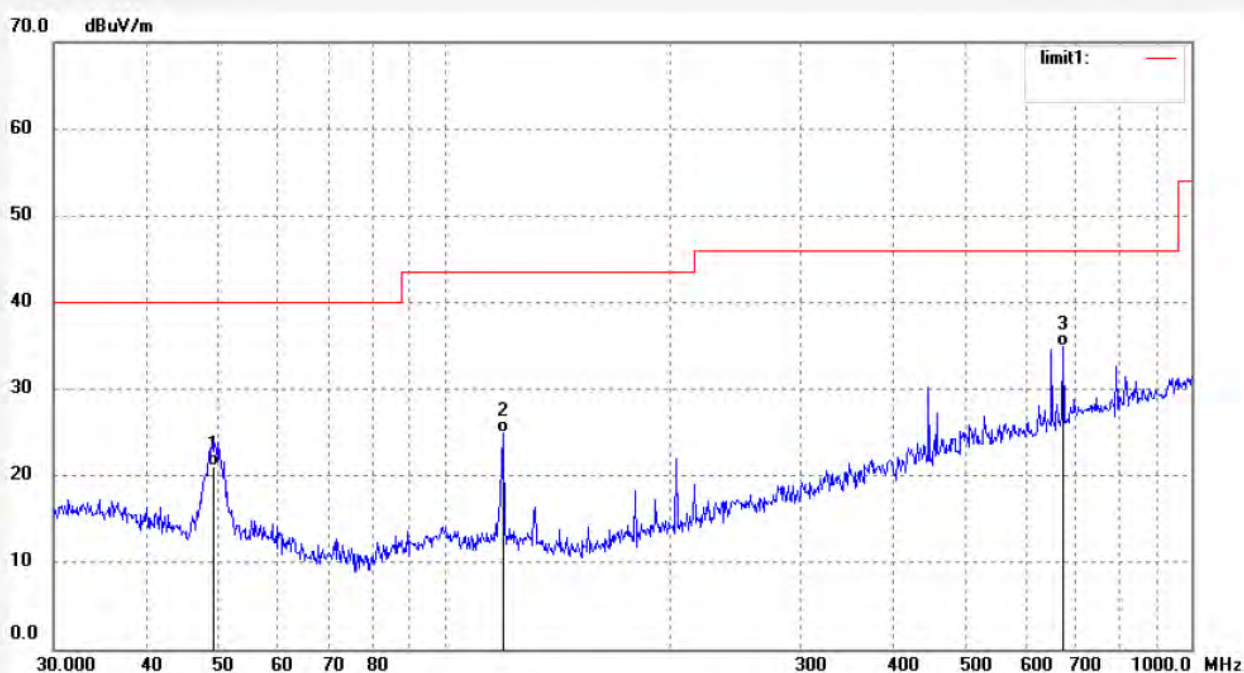

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.1865	33.66	-12.58	21.08	40.00	-18.92	QP			
2	119.8555	38.08	-13.06	25.02	43.50	-18.48	QP			
3	672.8444	36.43	-1.44	34.99	46.00	-11.01	QP			



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1503

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/24/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

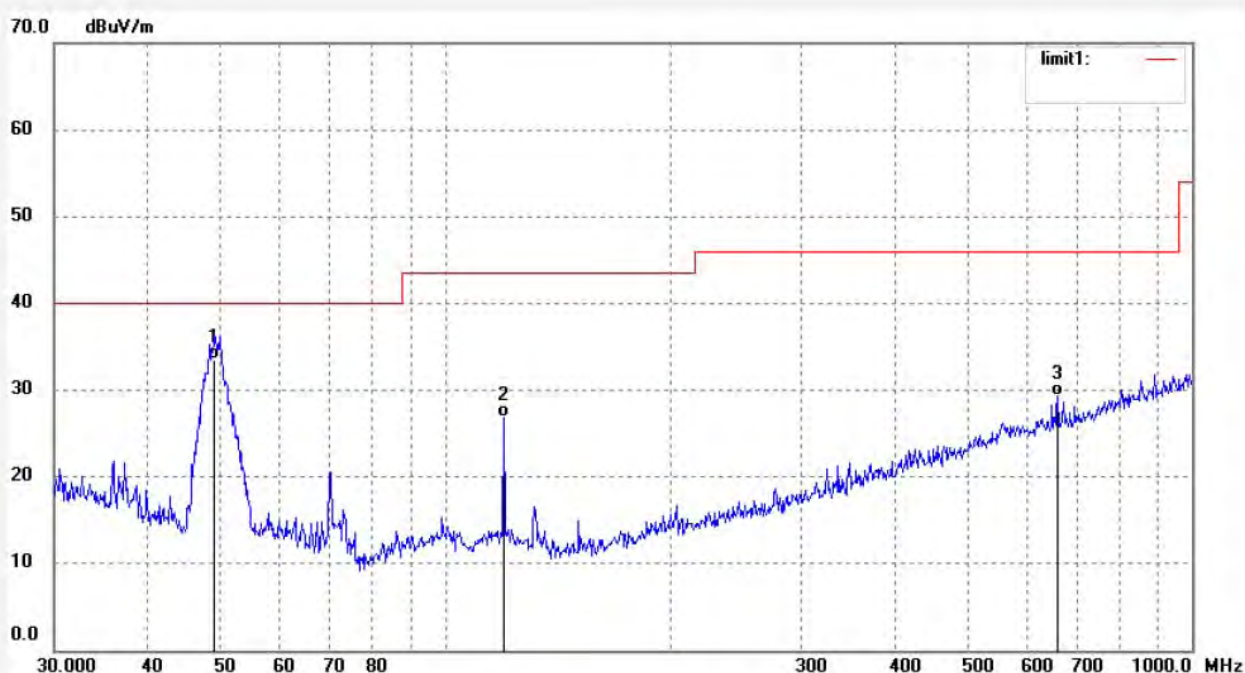

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	49.1865	46.07	-12.58	33.49	40.00	-6.51	QP			
2	119.8555	39.85	-13.06	26.79	43.50	-16.71	QP			
3	661.1504	30.92	-1.59	29.33	46.00	-16.67	QP			

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com



## 1GHz-18GHz test data



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1474

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

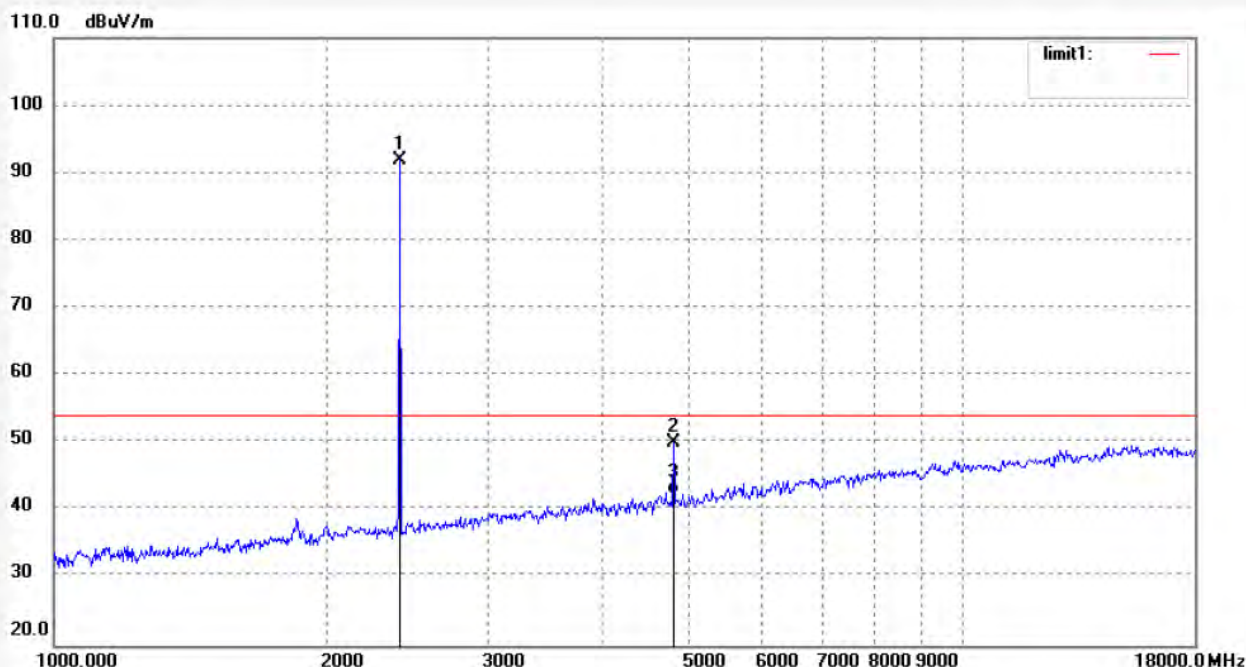

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	90.91	0.89	91.80	/	/	peak			
2	4804.026	42.73	7.40	50.13	74.00	-23.87	peak			
3	4804.026	34.95	7.40	42.35	54.00	-11.65	AVG			

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2018 #1475

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

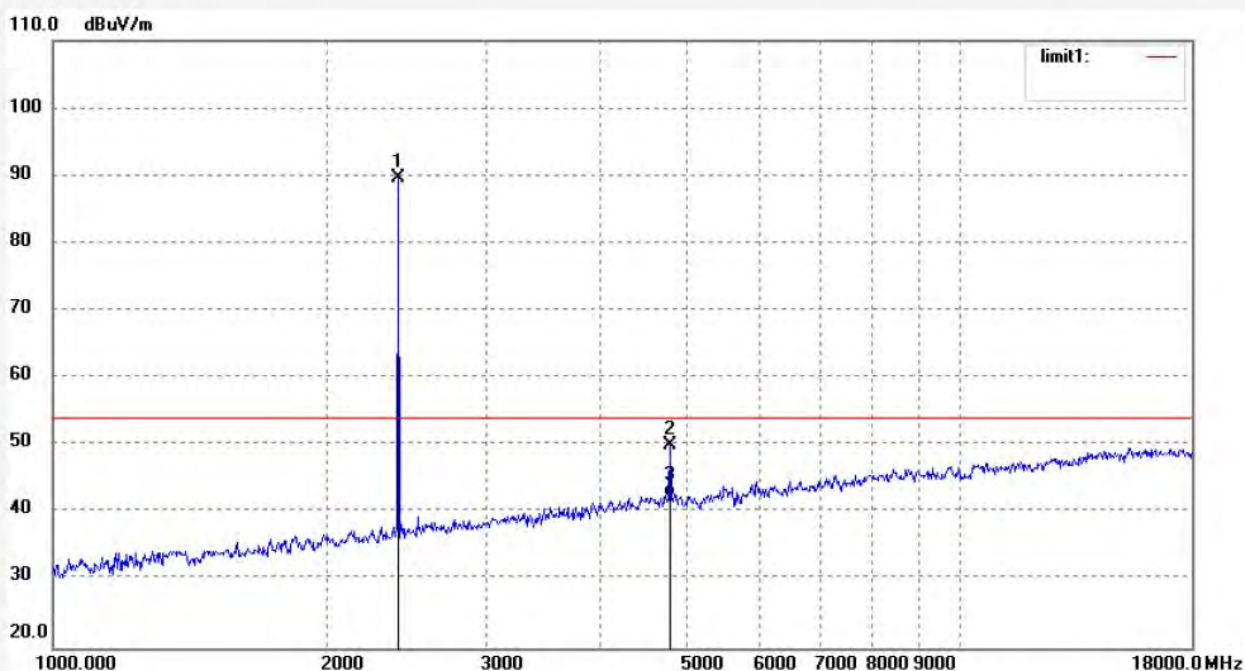

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	88.83	0.89	89.72	/	/	peak			
2	4804.025	42.71	7.40	50.11	74.00	-23.89	peak			
3	4804.025	34.95	7.40	42.35	54.00	-11.65	AVG			



Job No.: LGW2018 #1478

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

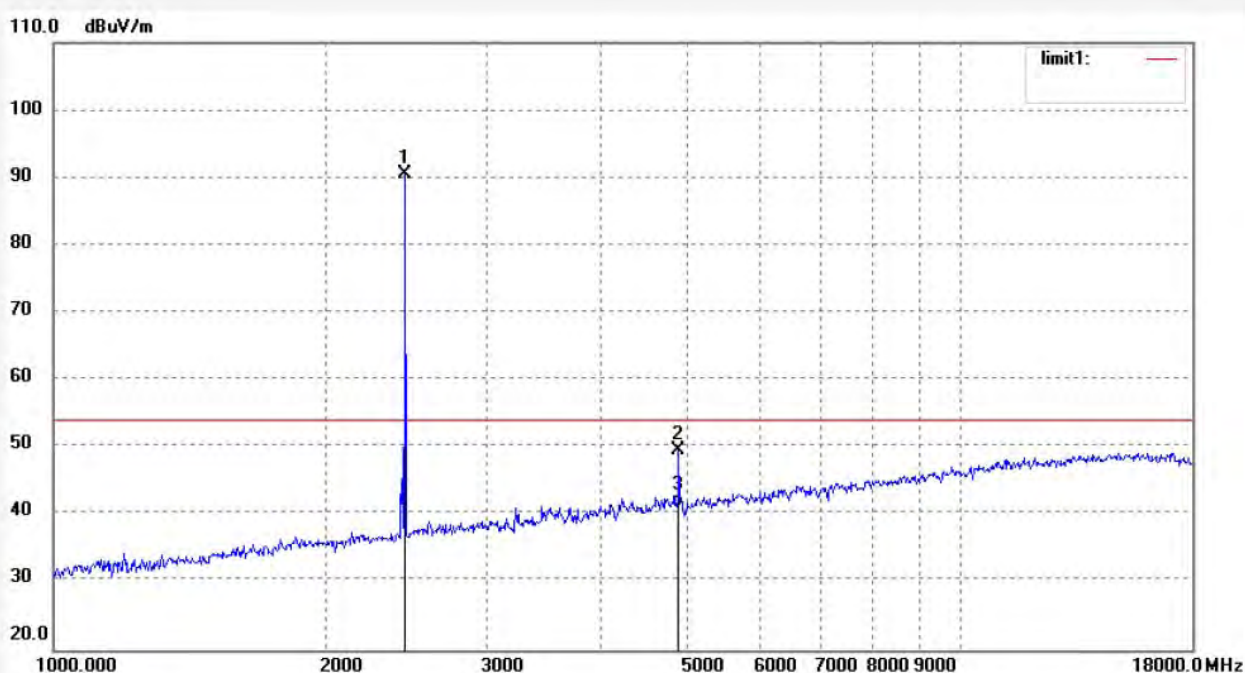

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	89.45	1.06	90.51	/	/	peak			
2	4882.027	41.45	8.11	49.56	74.00	-24.44	peak			
3	4882.027	33.12	8.11	41.23	54.00	-12.77	AVG			

Job No.: LGW2018 #1479

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

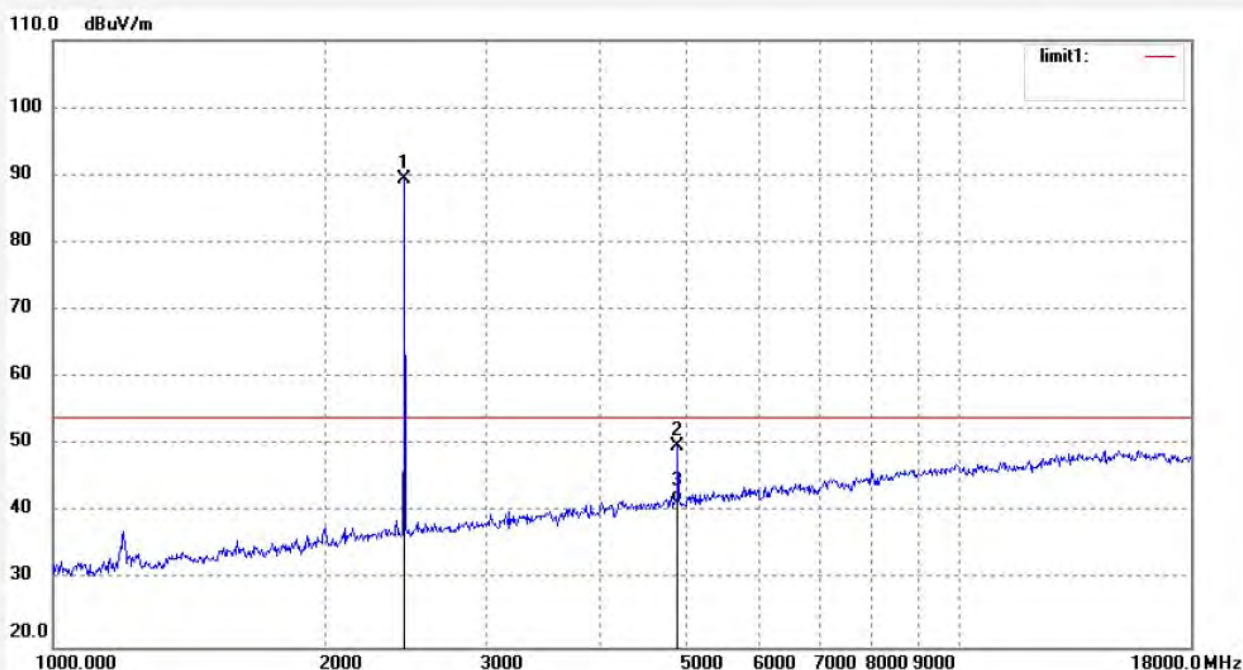

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	88.43	1.06	89.49	/	/	peak			
2	4882.026	41.61	8.11	49.72	74.00	-24.28	peak			
3	4882.026	33.42	8.11	41.53	54.00	-12.47	AVG			



Job No.: LGW2018 #1481

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

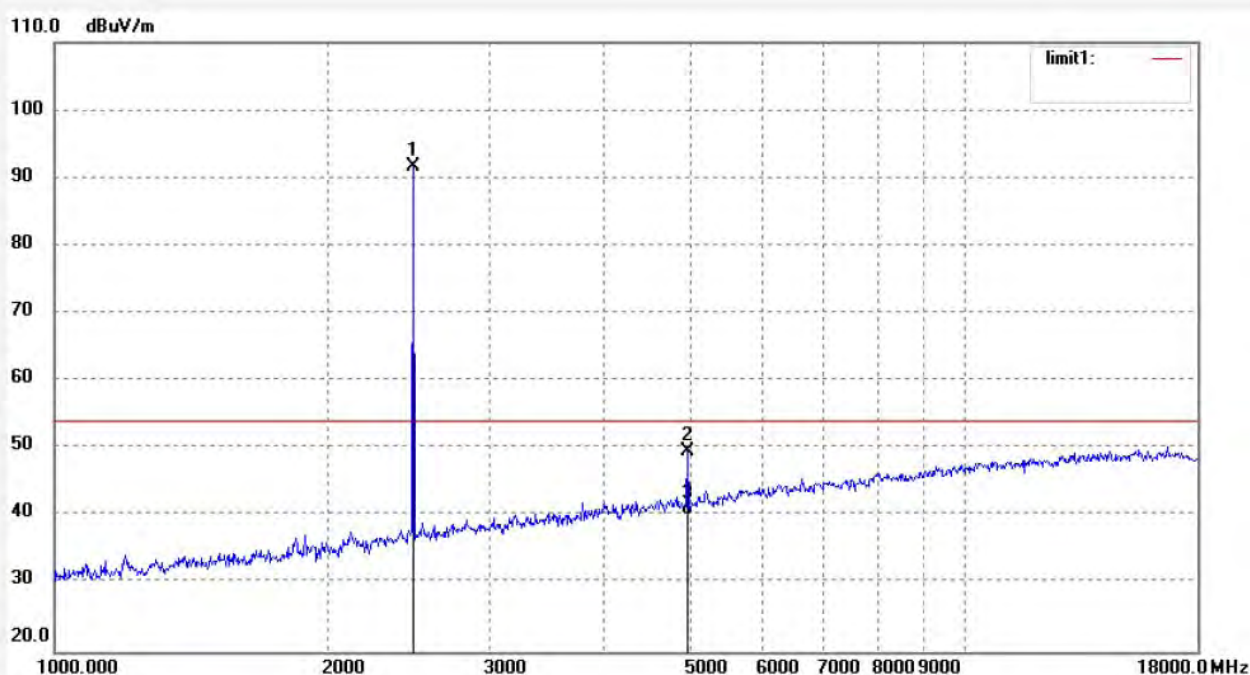

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	90.53	1.10	91.63	/	/	peak			
2	4960.028	41.03	8.60	49.63	74.00	-24.37	peak			
3	4960.028	31.65	8.60	40.25	54.00	-13.75	AVG			

Job No.: LGW2018 #1480

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

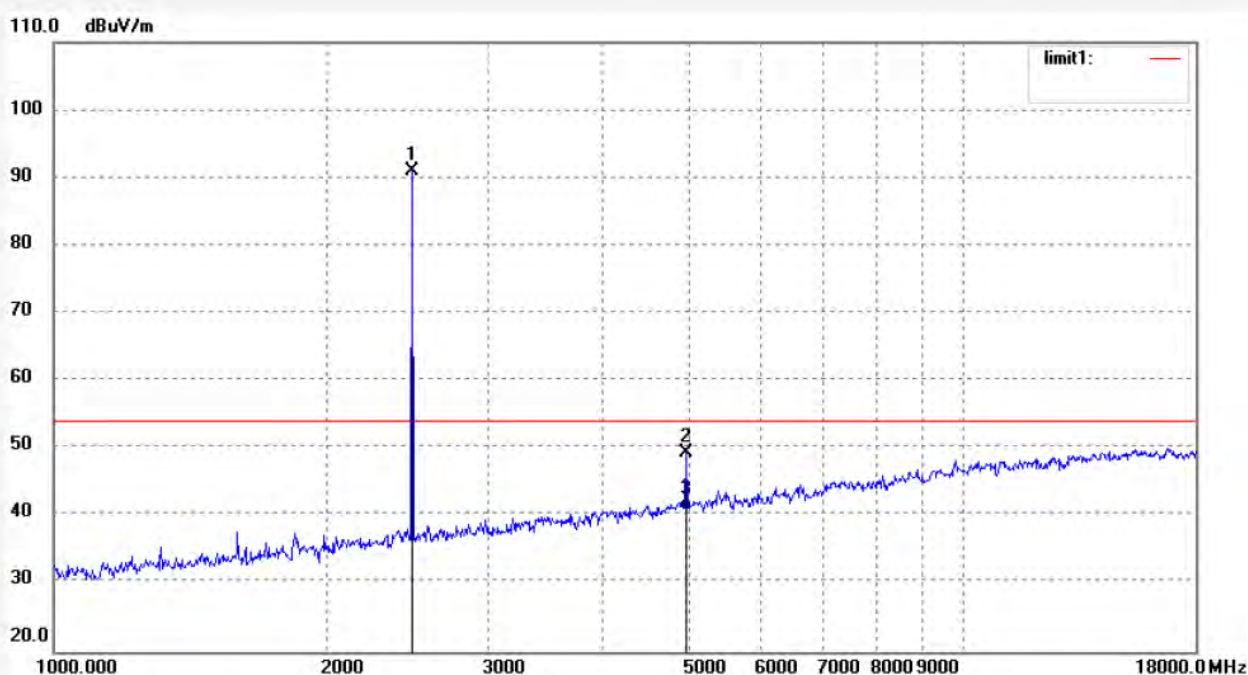

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	89.86	1.10	90.96	/	/	peak			
2	4960.028	40.78	8.60	49.38	74.00	-24.62	peak			
3	4960.028	32.26	8.60	40.86	54.00	-13.14	AVG			



## 18GHz-26.5GHz test data



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1485

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

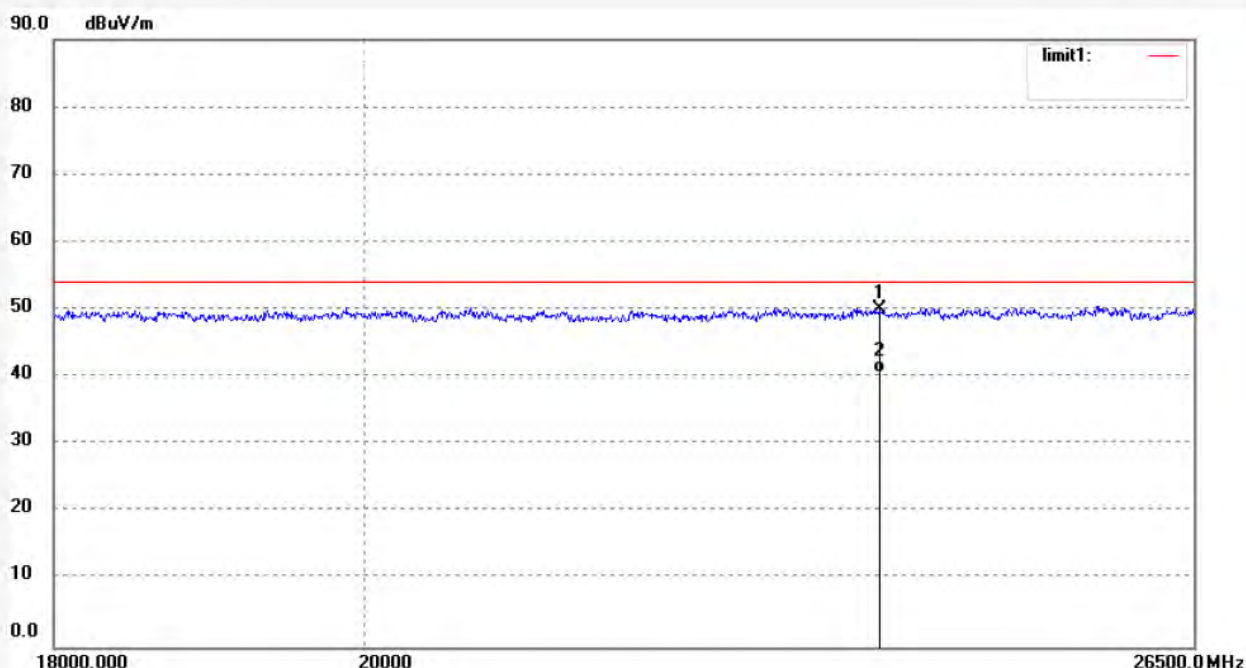

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23816.899	9.77	40.28	50.05	74.00	-23.95	peak			
2	23816.899	0.29	40.28	40.57	54.00	-13.43	AVG			

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

Job No.: LGW2018 #1484

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

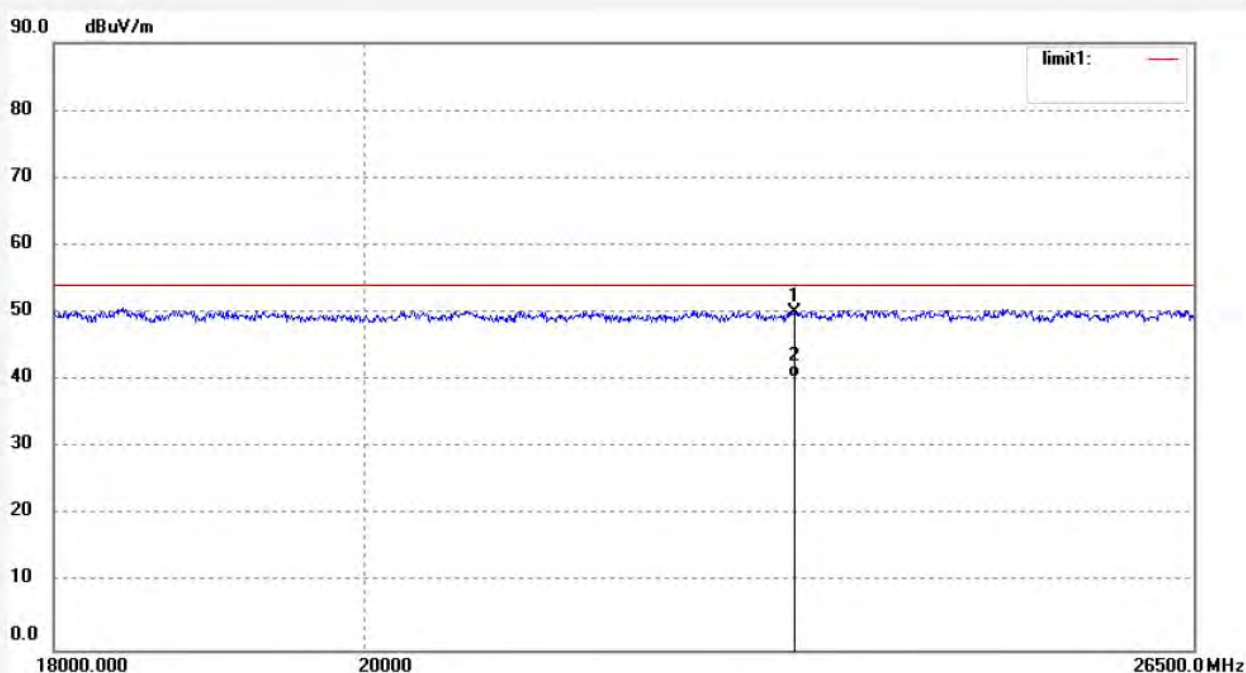

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	23144.894	10.38	39.78	50.16	74.00	-23.84	peak			
2	23144.894	0.57	39.78	40.35	54.00	-13.65	AVG			

Job No.: LGW2018 #1486

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

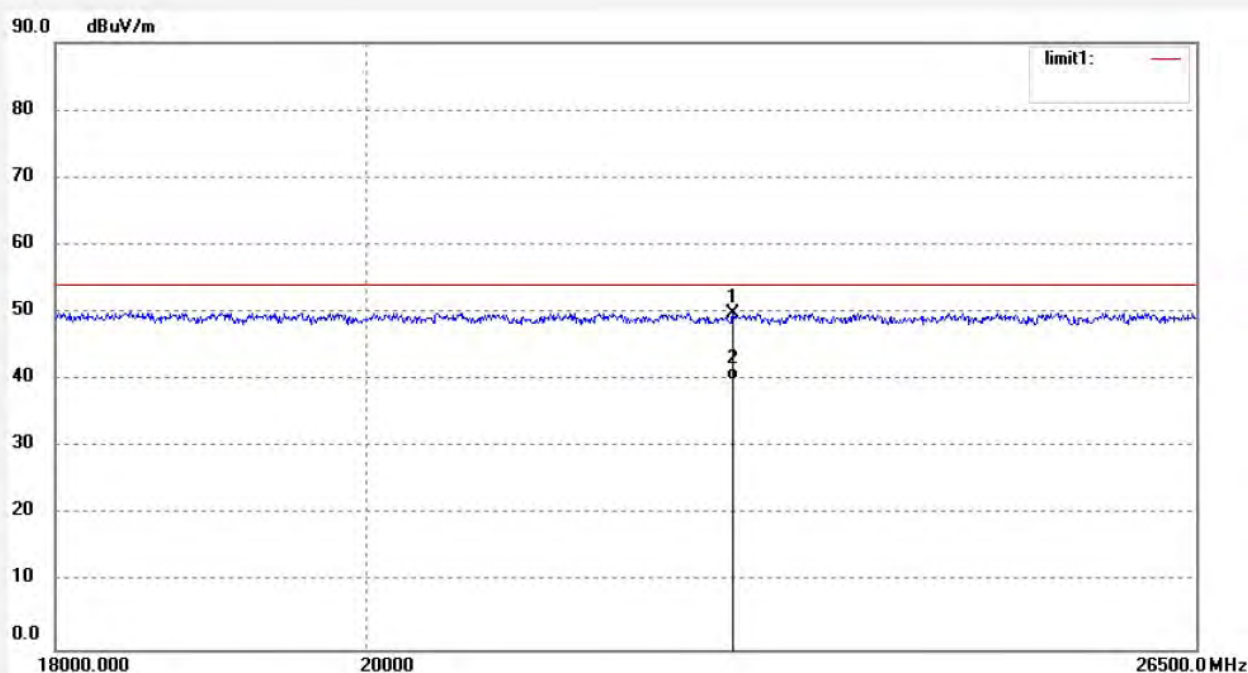

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22648.982	10.08	39.76	49.84	74.00	-24.16	peak			
2	22648.982	0.11	39.76	39.87	54.00	-14.13	AVG			



Job No.: LGW2018 #1487

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2441MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

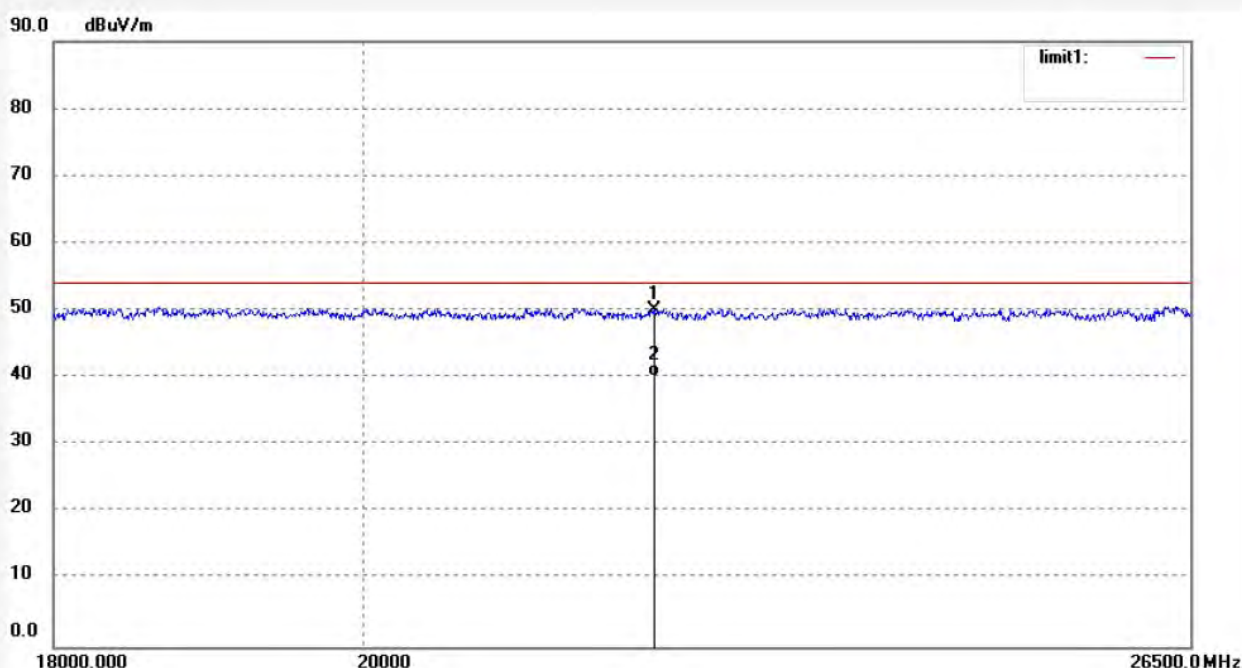

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22078.138	10.86	39.24	50.10	74.00	-23.90	peak			
2	22078.138	0.97	39.24	40.21	54.00	-13.79	AVG			

Job No.: LGW2018 #1489

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

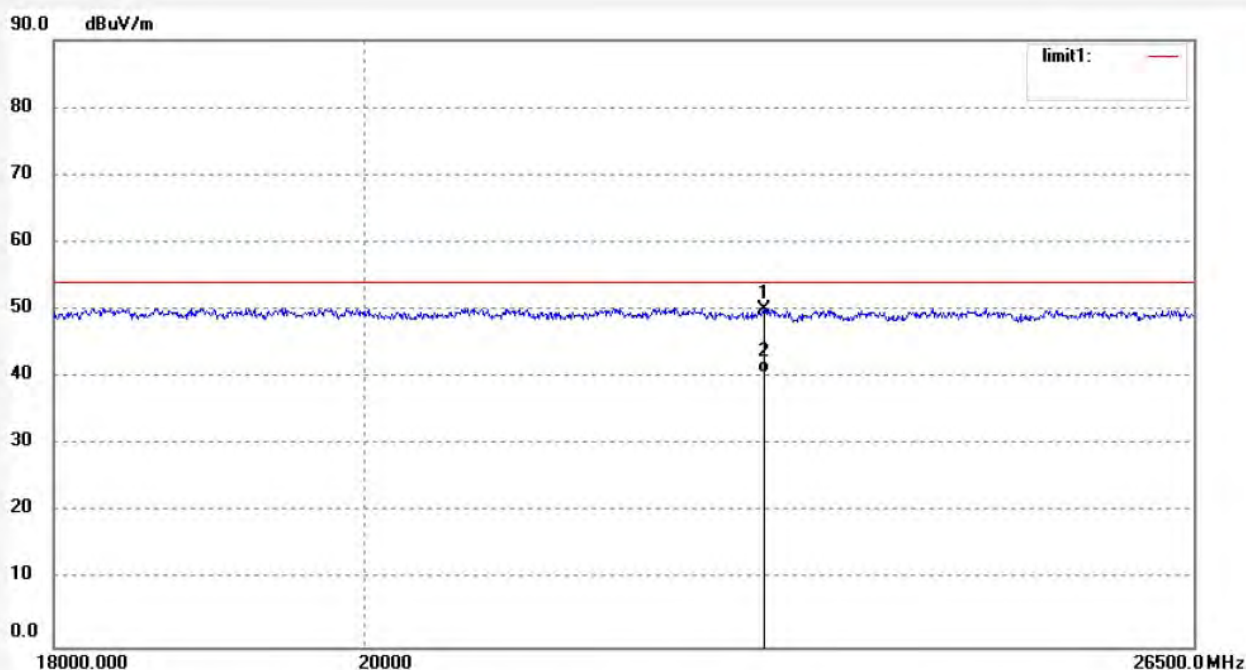

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22904.452	10.50	39.63	50.13	74.00	-23.87	peak			
2	22904.452	1.00	39.63	40.63	54.00	-13.37	AVG			

Job No.: LGW2018 #1488

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2480MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

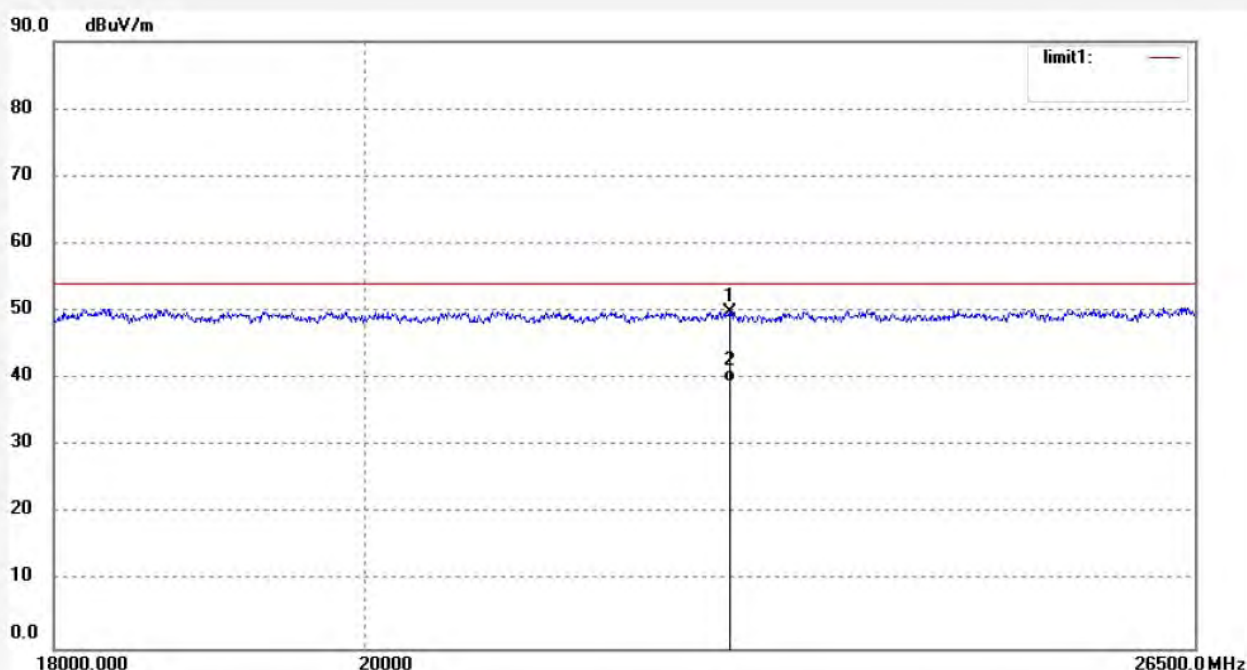


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	22631.469	10.31	39.49	49.80	74.00	-24.20	peak			
2	22631.469	0.05	39.49	39.54	54.00	-14.46	AVG			



## 11.BAND EDGE COMPLIANCE TEST

### 11.1.Block Diagram of Test Setup

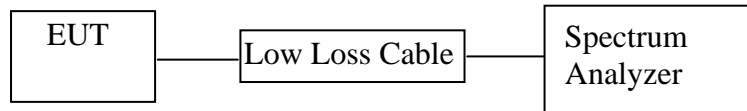

(EUT: Stereo Bluetooth Headphones)

### 11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 11.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.

11.5.3. The band edges was measured and recorded.

## 11.6. Test Result

### Non-hopping mode

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)	Result
GFSK mode			
2400.00	32.76	> 20dBc	PASS
2483.50	46.56	> 20dBc	PASS
Π/4-DQPSK mode			
2400.00	32.79	> 20dBc	PASS
2484.03	46.44	> 20dBc	PASS


### Hopping mode

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)	Result
GFSK mode			
2400.00	30.84	> 20dBc	PASS
2484.04	47.22	> 20dBc	PASS
Π/4-DQPSK mode			
2400.00	30.69	> 20dBc	PASS
2483.50	46.35	> 20dBc	PASS


The spectrum analyzer plots are attached as below.



## Non-hopping mode (GFSK)

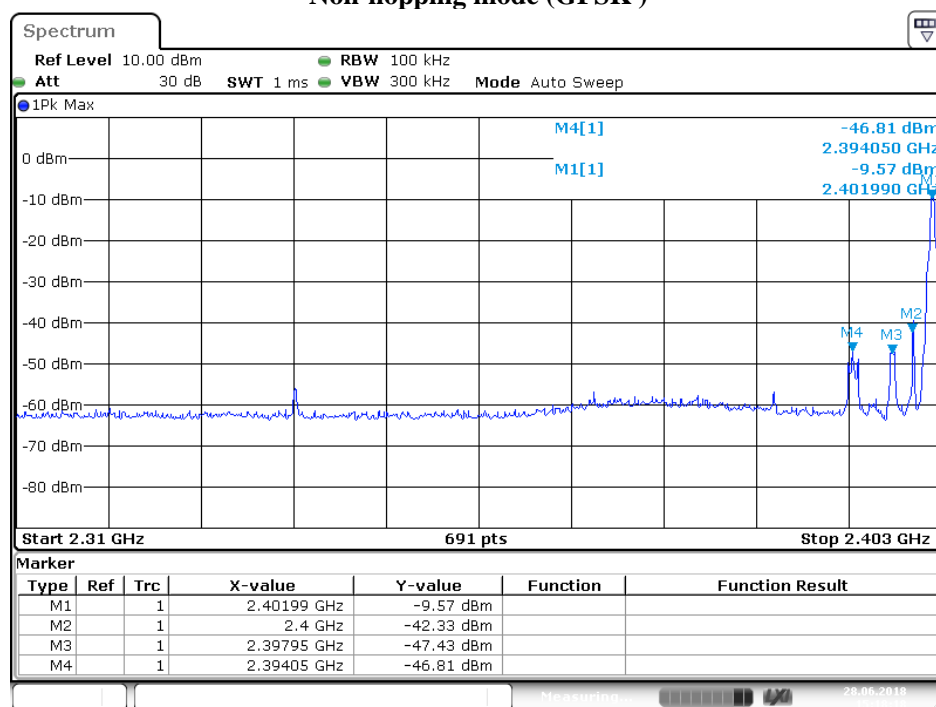

Date: 28.JUN.2018 15:18:18

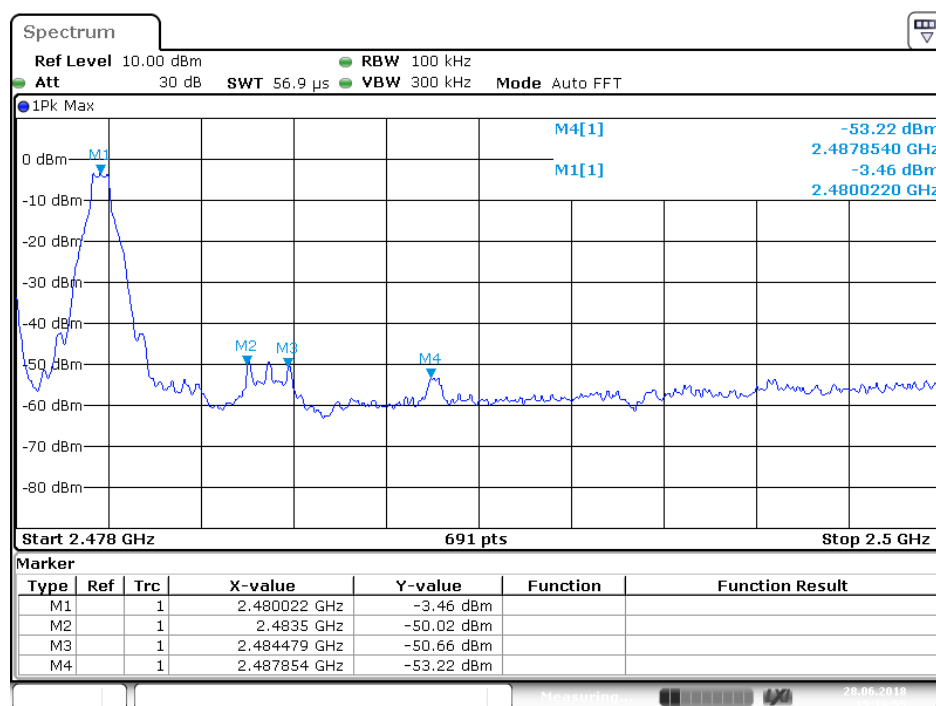

Date: 28.JUN.2018 15:19:55

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China


Tel: +86-755-26503290

Fax: +86-755-26503396


E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## Non-hopping mode ( $\Pi/4$ -DQPSK )

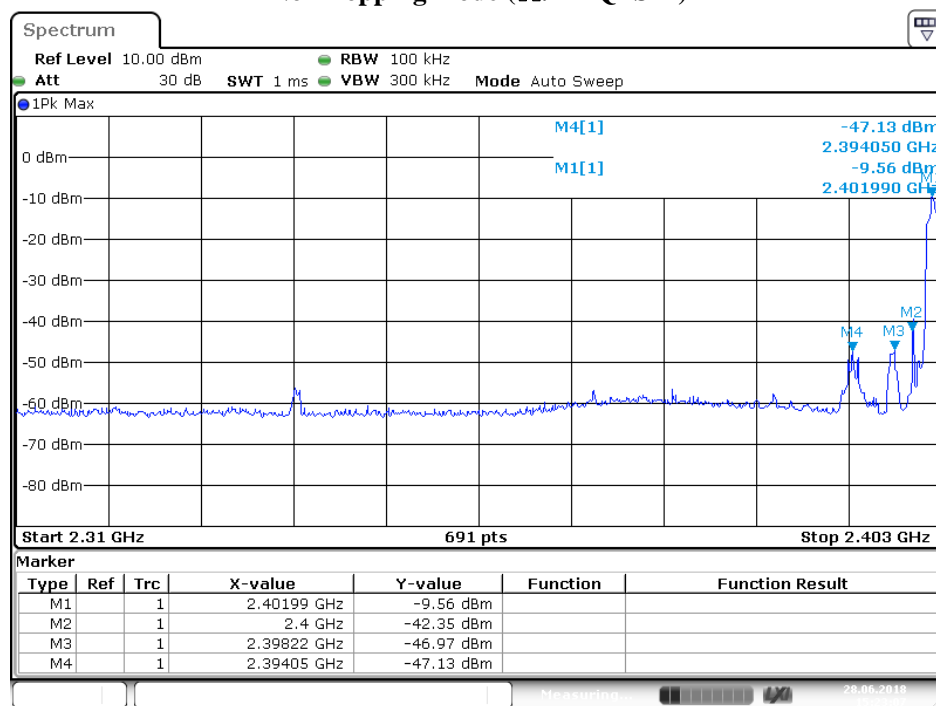


Date: 28.JUN.2018 15:23:07

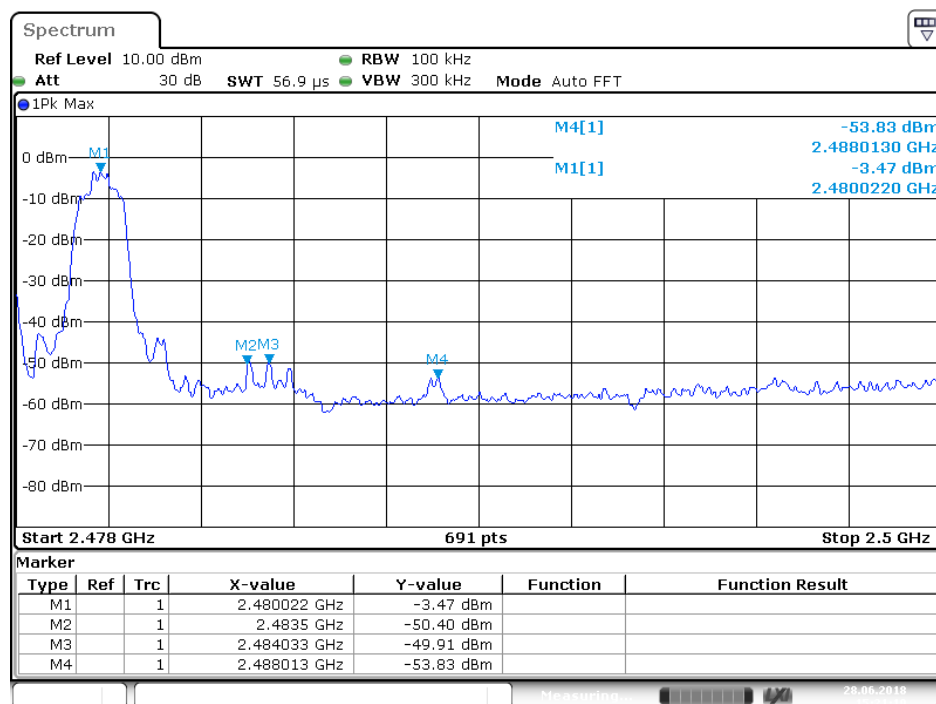


Date: 28.JUN.2018 15:21:20

## Hopping mode (GFSK )

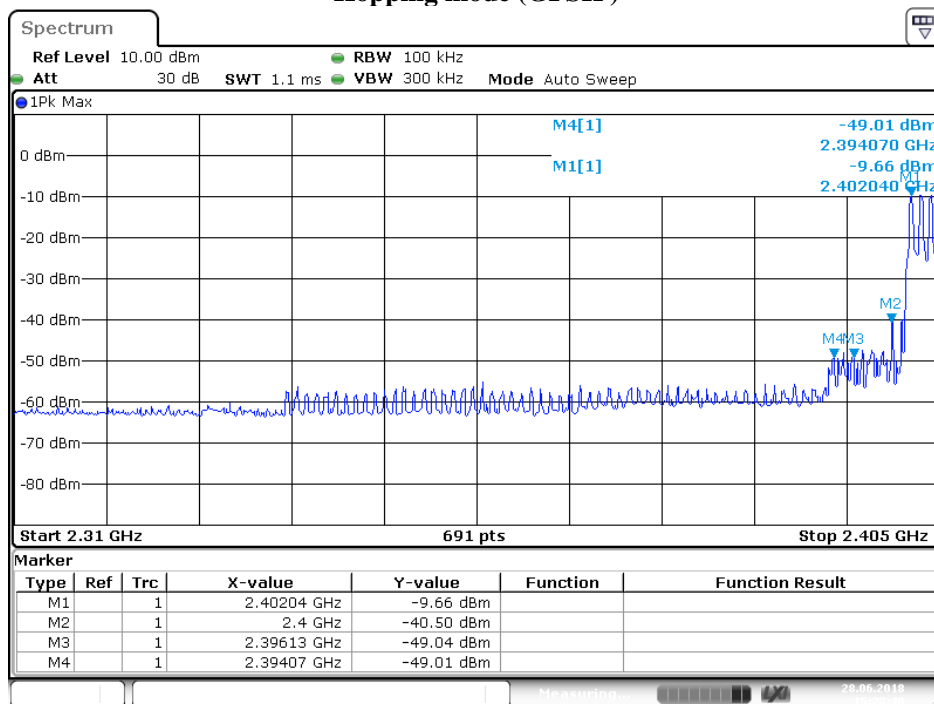


Date: 28.JUN.2018 15:28:40

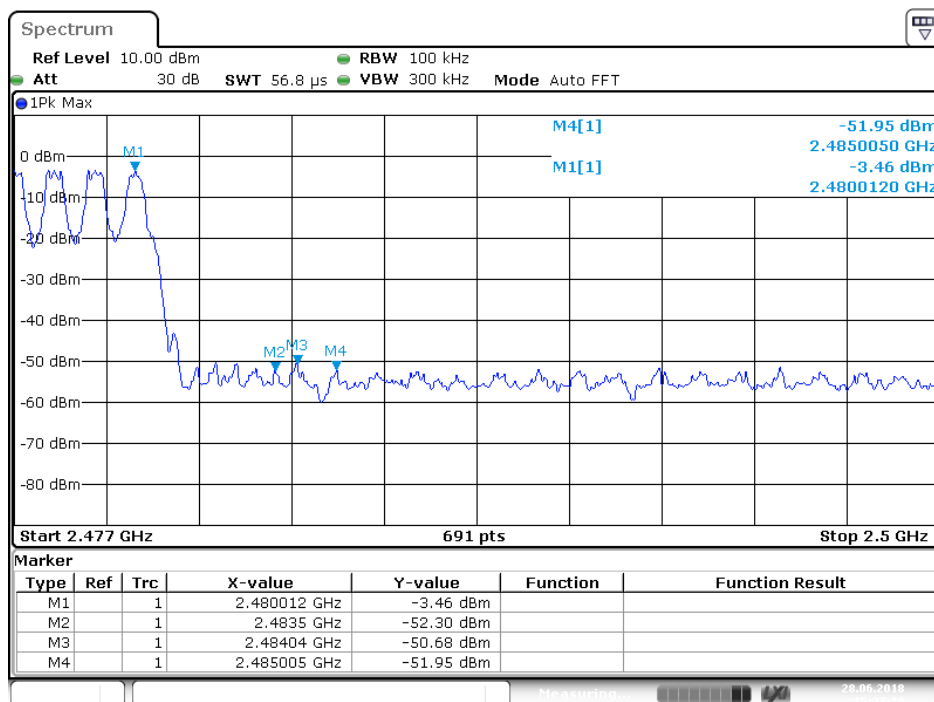


Date: 28.JUN.2018 15:27:19

## Hopping mode ( $\Pi/4$ -DQPSK )

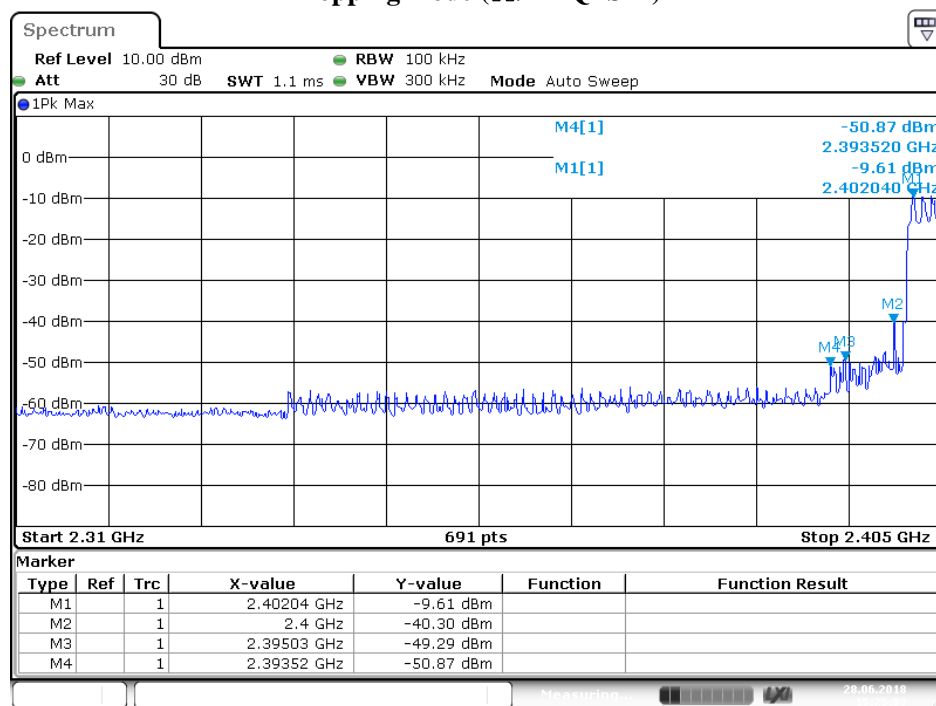

Date: 28.JUN.2018 15:25:03

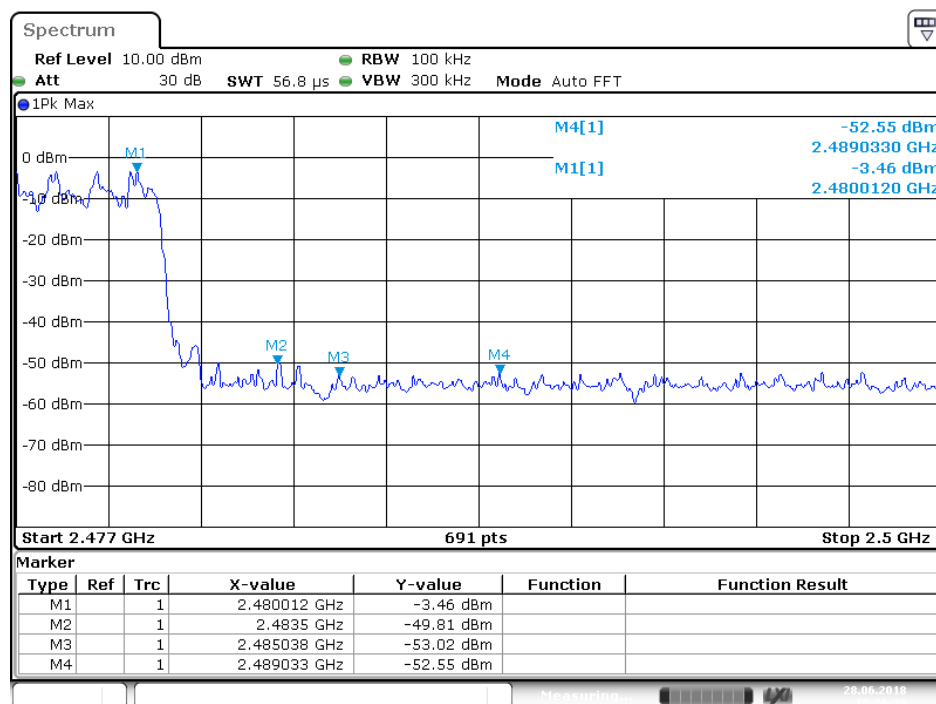

Date: 28.JUN.2018 15:26:28

### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com

## Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:  
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Let the EUT work in TX (Hopping off, Hopping on) modes measure it.  
We select 2402MHz, 2480MHz TX frequency to transmit(Hopping off mode).  
We select 2402-2480MHz TX frequency to transmit(Hopping on mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case( $\Pi/4$ -DQPSK) emissions are reported.

## Non-hopping mode



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2018 #1477	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/06/19/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Stereo Bluetooth Headphones	Engineer Signature: WADE
Mode: TX 2402MHz	Distance: 3m
Model: EE3072	
Manufacturer: TESONIC INT'L (HK) LTD.	

Note:

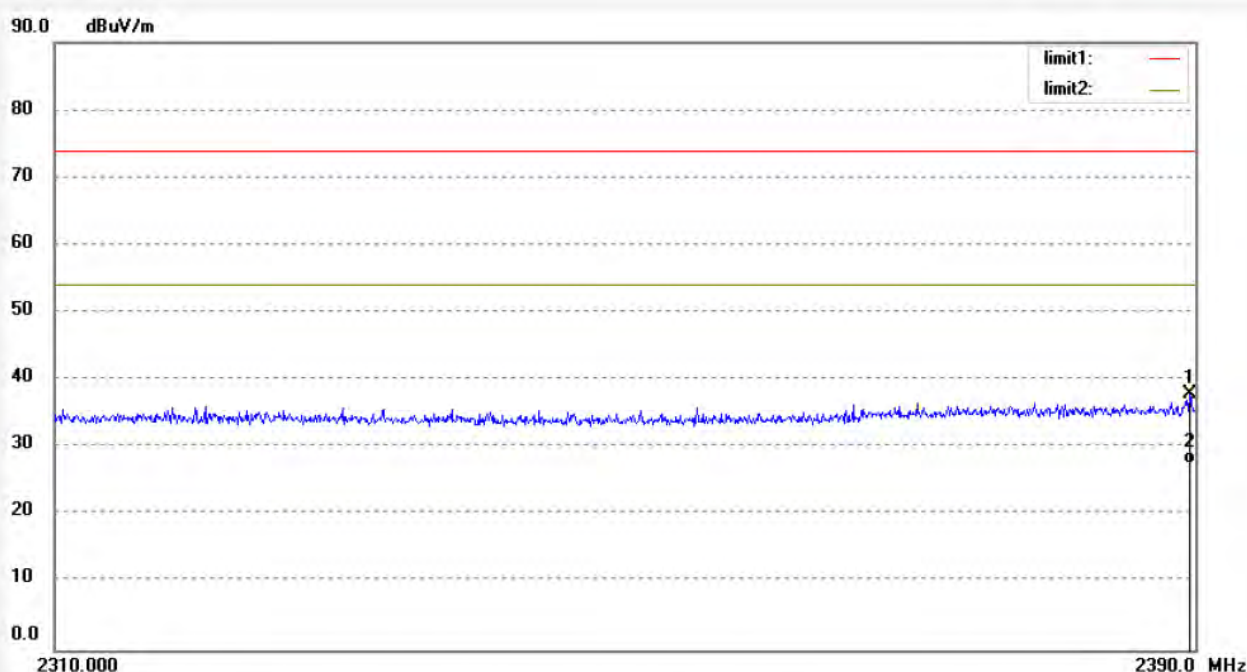

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.600	37.02	0.79	37.81	74.00	-36.19	peak			
2	2389.600	26.78	0.79	27.57	54.00	-26.43	AVG			

#### Shenzhen Accurate Technology Co., Ltd.

Address: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86-755-26503290

Fax: +86-755-26503396

E-mail: webmaster@atc-lab.com

Http://www.atc-lab.com



Job No.: LGW2018 #1476

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Stereo Bluetooth Headphones

Mode: TX 2402MHz

Model: EE3072

Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/06/19/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

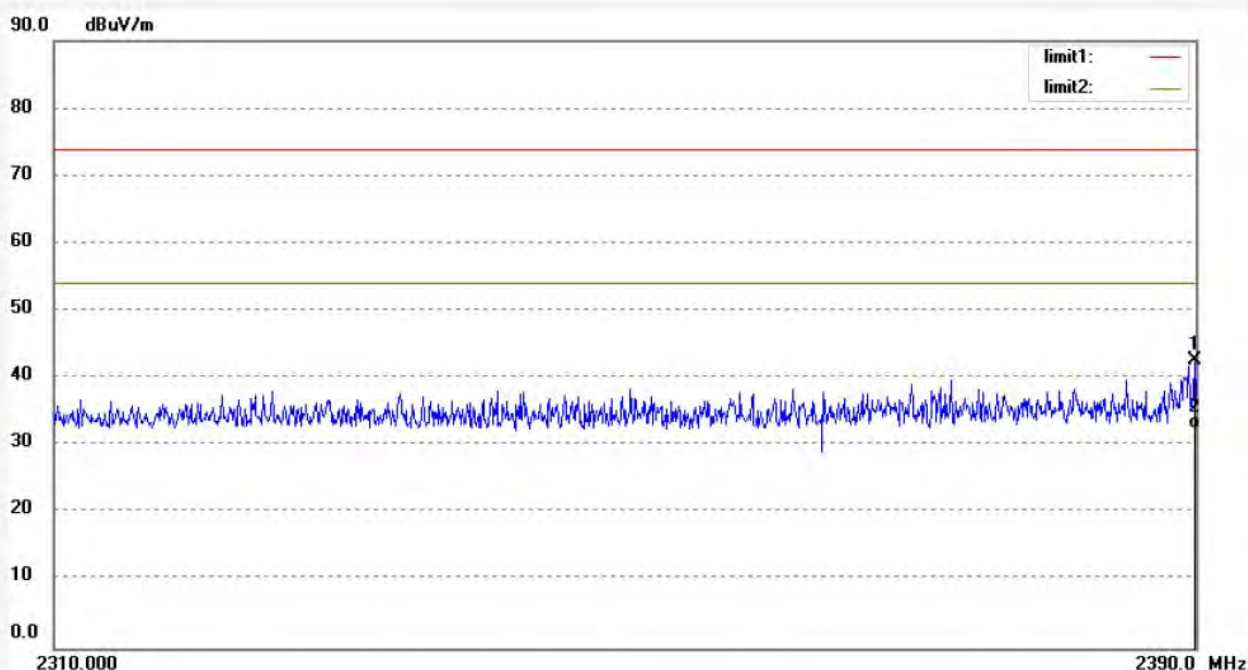


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.920	41.74	0.79	42.53	74.00	-31.47	peak			
2	2389.920	31.78	0.79	32.57	54.00	-21.43	AVG			

Job No.: LGW2018 #1482  
Standard: FCC (Band Edge)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Stereo Bluetooth Headphones  
Mode: TX 2480MHz  
Model: EE3072  
Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Horizontal  
Power Source: DC 3.7V  
Date: 18/06/19/  
Time:  
Engineer Signature: WADE  
Distance: 3m

Note:

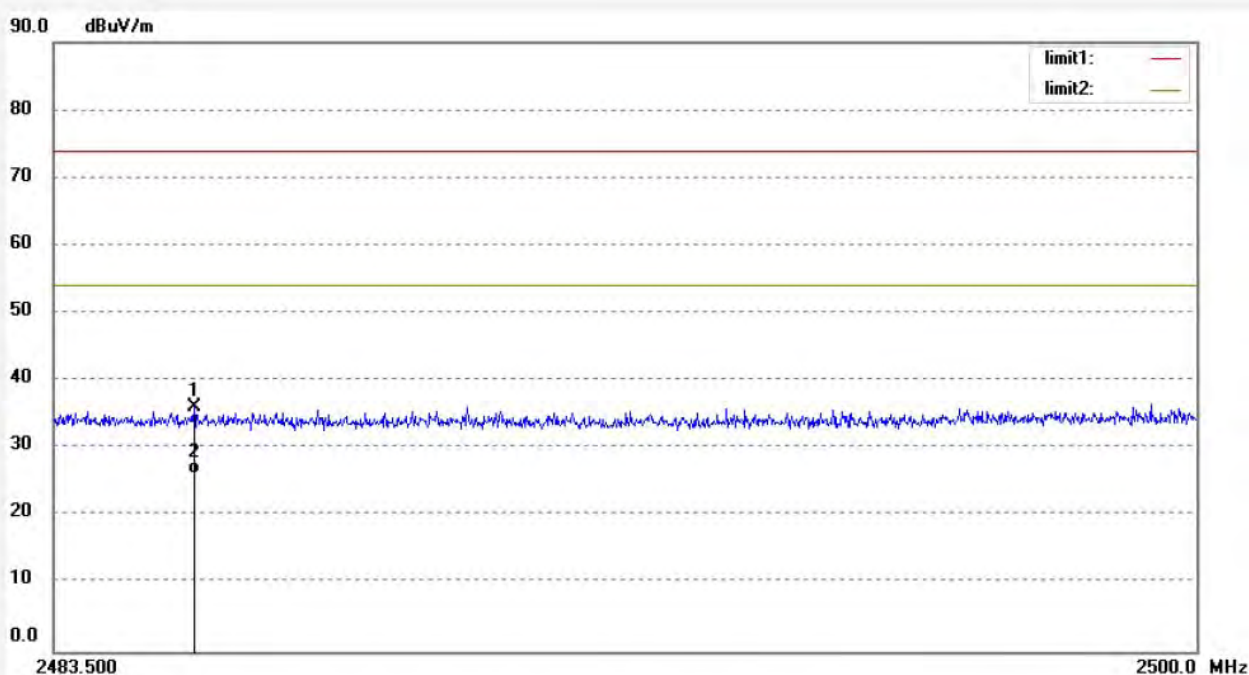


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2485.530	35.08	1.10	36.18	74.00	-37.82	peak			
2	2485.530	25.05	1.10	26.15	54.00	-27.85	AVG			



Job No.: LGW2018 #1483  
Standard: FCC (Band Edge)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Stereo Bluetooth Headphones  
Mode: TX 2480MHz  
Model: EE3072  
Manufacturer: TESONIC INT'L (HK) LTD.

Polarization: Vertical  
Power Source: DC 3.7V  
Date: 18/06/19/  
Time:  
Engineer Signature: WADE  
Distance: 3m

Note:

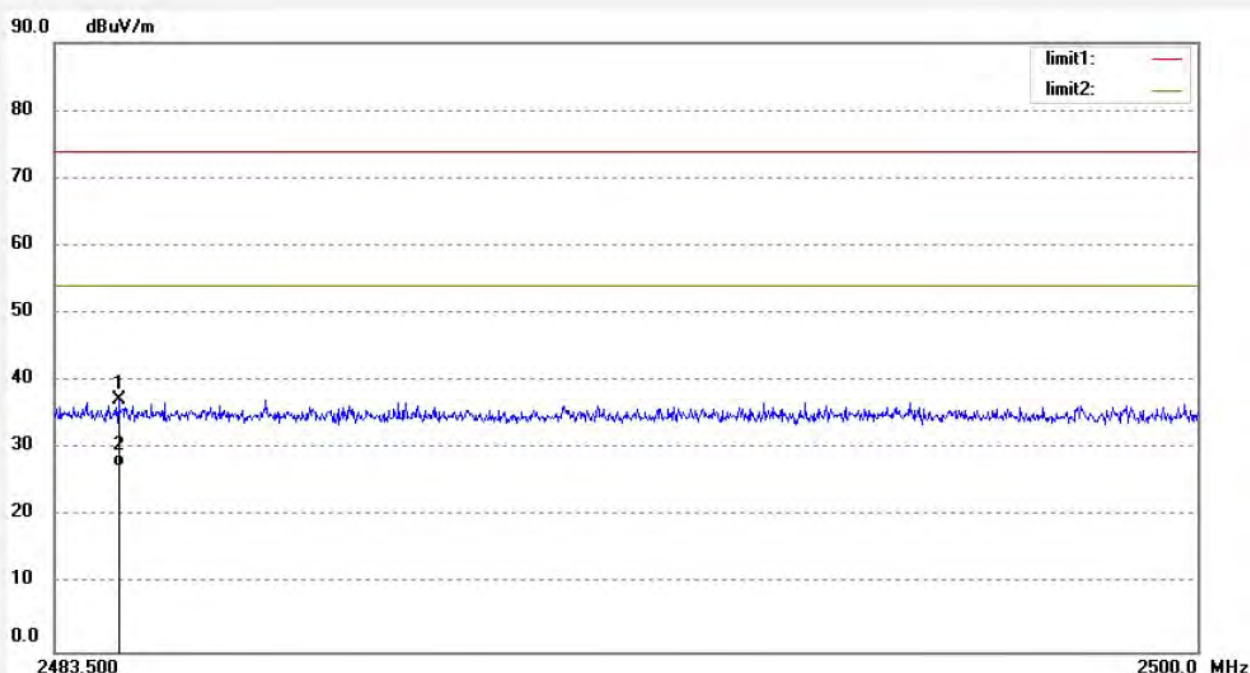


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.424	36.13	1.09	37.22	74.00	-36.78	peak			
2	2484.424	26.26	1.09	27.35	54.00	-26.65	AVG			

## 12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


### 15 SECTION 15.207(A)

#### 12.1.Block Diagram of Test Setup

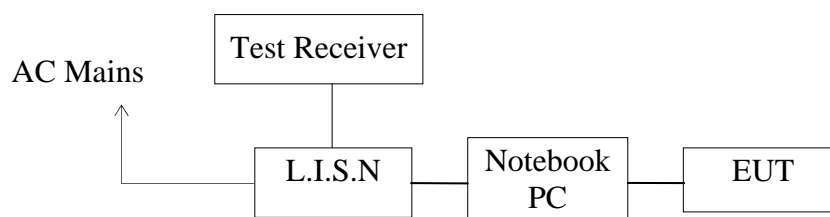

(EUT: Stereo Bluetooth Headphones)

#### 12.2.Test System Setup

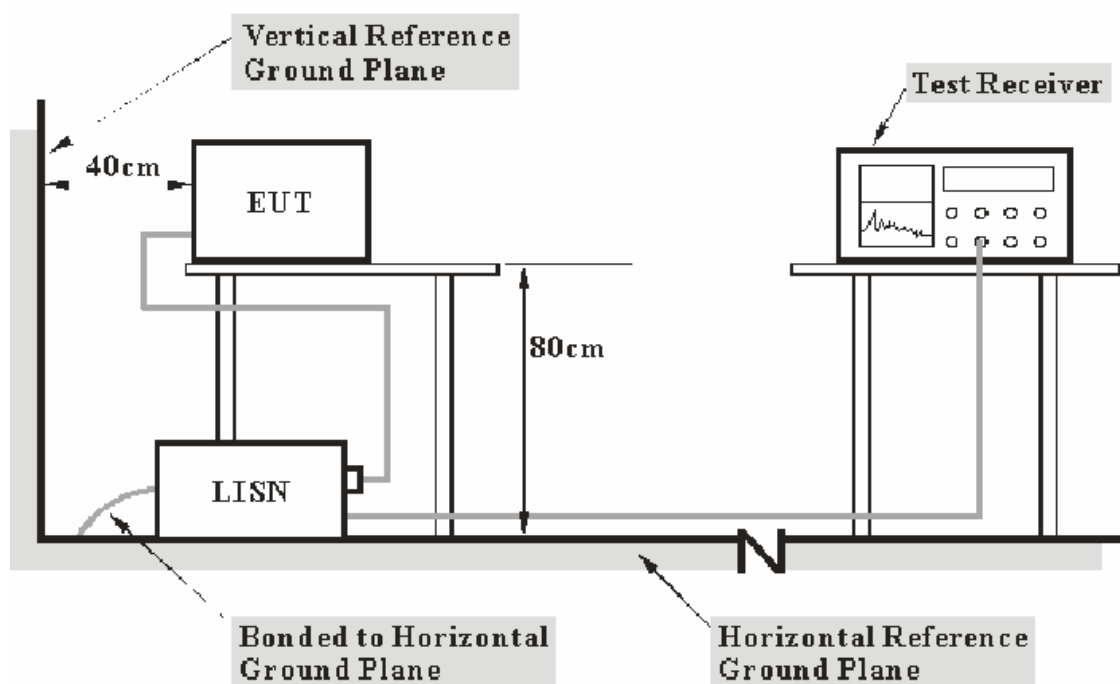

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

### 12.3.Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies.		
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

### 12.4.Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

### 12.5.Operating Condition of EUT

12.5.1.Setup the EUT and simulator as shown as Section 12.1.

12.5.2.Turn on the power of all equipment.

12.5.3.Let the EUT work in test mode and measure it.

### 12.6.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 12.7.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dB $\mu$ V)	Average Level (dB $\mu$ V)	QuasiPeak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.5	51.1	34.2	56.0	46.0	4.9	11.8	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dB $\mu$ V) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dB $\mu$ V) = Limit stated in standard

Calculation Formula:

Margin = Limit (dB $\mu$ V) - Level (dB $\mu$ V)

### 12.8.Power Line Conducted Emission Measurement Results

#### **PASS.**

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESONIC INT'L (HK) LTD.  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: L 120V/60Hz  
 Comment:  
 Start of Test: 6/24/2018 /

### SCAN TABLE: "V 9K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008  
 Average  
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

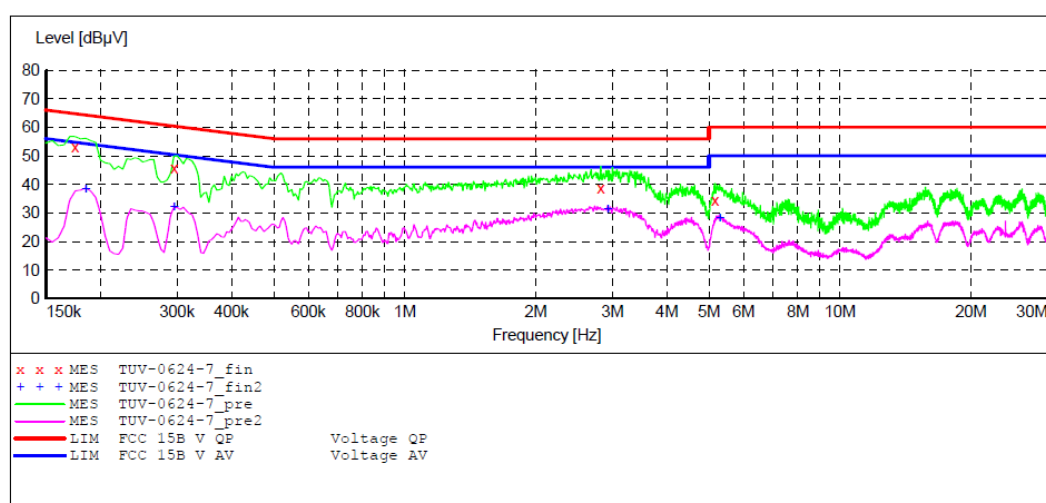

### MEASUREMENT RESULT: "TUV-0624-7\_fin"

6/24/2018

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.175000	53.10	10.5	65	11.6	QP	L1	GND
0.295000	45.60	10.6	60	14.8	QP	L1	GND
2.820000	38.50	11.0	56	17.5	QP	L1	GND
5.160000	34.40	11.2	60	25.6	QP	L1	GND

### MEASUREMENT RESULT: "TUV-0624-7\_fin2"

6/24/2018

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.185000	38.30	10.5	54	16.0	AV	L1	GND
0.295000	31.90	10.6	50	18.5	AV	L1	GND
2.930000	31.30	11.1	46	14.7	AV	L1	GND
5.300000	28.30	11.2	50	21.7	AV	L1	GND


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15 C

EUT: Stereo Bluetooth Headphones M/N:EE3072  
 Manufacturer: TESSONIC INT'L (HK) LTD.  
 Operating Condition: BT Communication  
 Test Site: 1#Shielding Room  
 Operator: WADE  
 Test Specification: N 120V/60Hz  
 Comment:  
 Start of Test: 6/24/2018 /

### SCAN TABLE: "V 9K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008  
 Average  
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

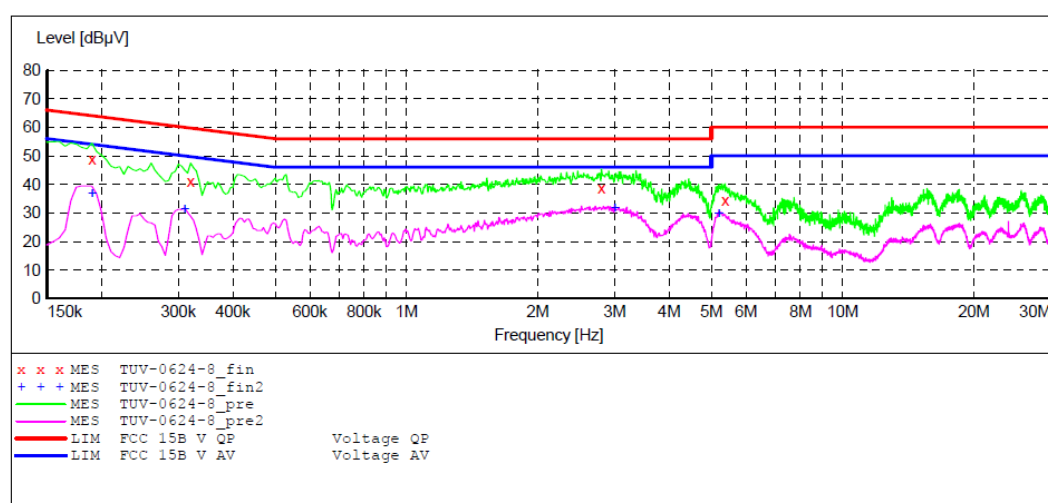

### MEASUREMENT RESULT: "TUV-0624-8\_fin"

6/24/2018

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	48.70	10.5	64	15.3	QP	N	GND
0.320000	40.90	10.6	60	18.8	QP	N	GND
2.800000	38.50	11.0	56	17.5	QP	N	GND
5.380000	34.40	11.2	60	25.6	QP	N	GND

### MEASUREMENT RESULT: "TUV-0624-8\_fin2"

6/24/2018

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190000	36.70	10.5	54	17.3	AV	N	GND
0.310000	31.40	10.6	50	18.6	AV	N	GND
3.000000	31.50	11.1	46	14.5	AV	N	GND
5.200000	29.70	11.2	50	20.3	AV	N	GND

## 13.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

### 13.1.Block Diagram of Test Setup



(EUT: Stereo Bluetooth Headphones)

### 13.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 13.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 13.4.Operating Condition of EUT

13.4.1.Setup the EUT and simulator as shown as Section 14.1.

13.4.2.Turn on the power of all equipment.

13.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 13.5.Test Procedure

13.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

13.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz

13.5.3.The Conducted Spurious Emission was measured and recorded.

### 13.6.Test Result


**PASS.**

The spectrum analyzer plots are attached as below.




## GFSK mode

### Low Channel

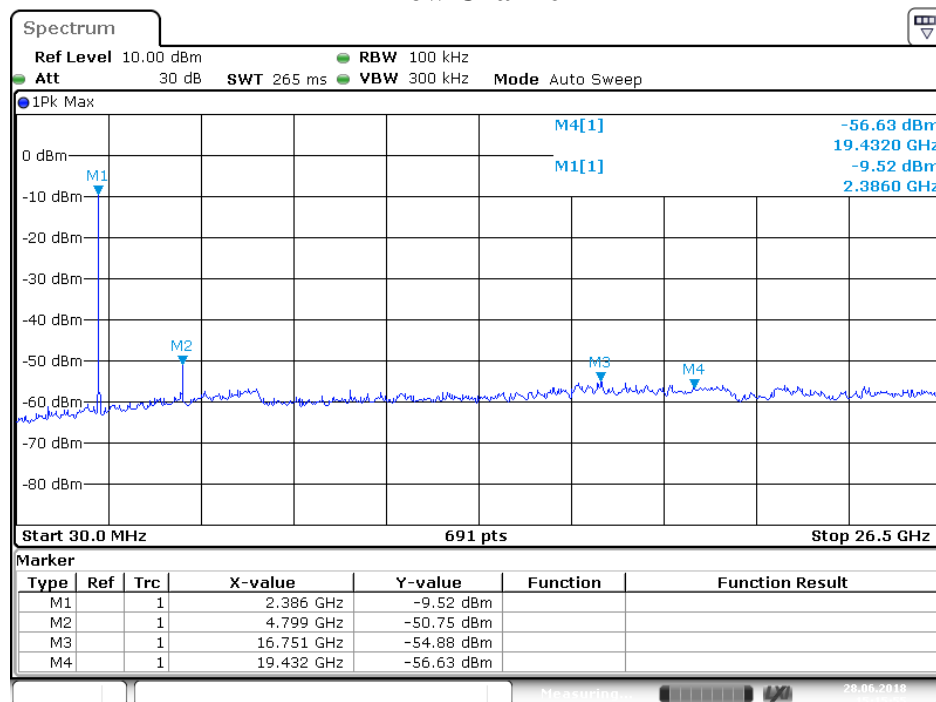


Date: 28.JUN.2018 15:15:55

### Middle Channel

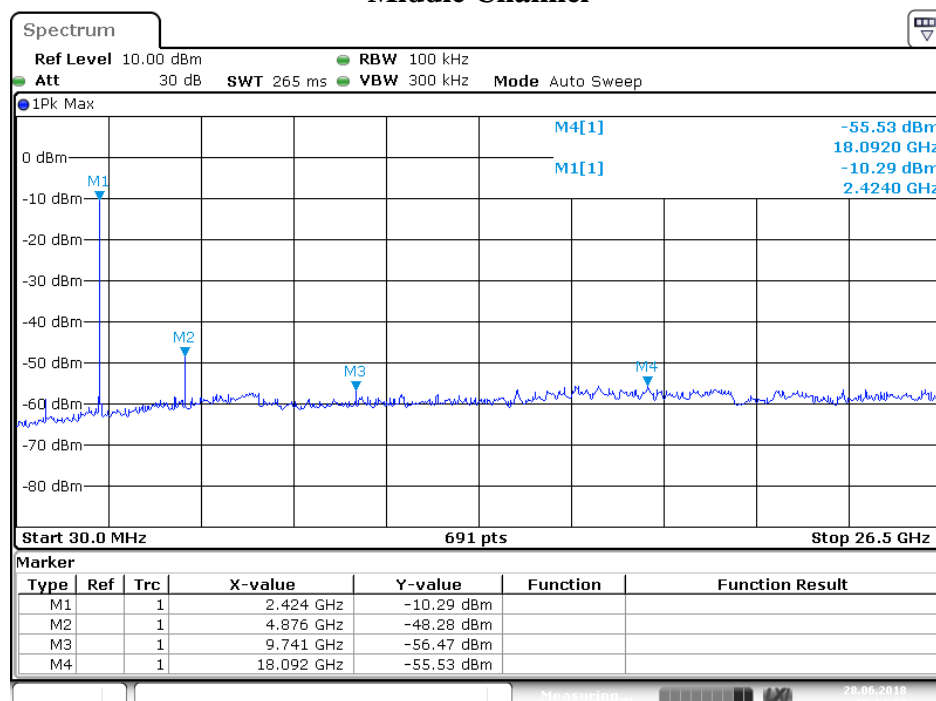

Date: 28.JUN.2018 15:14:07


## High Channel

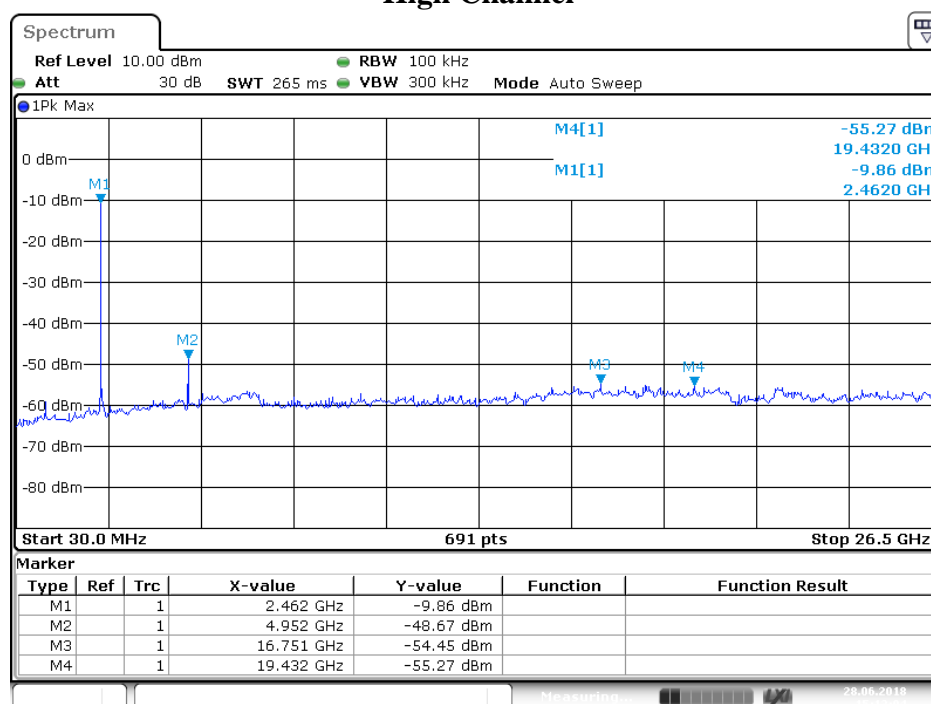

Date: 28.JUN.2018 15:13:04


## Π/4DQPSK mode

## Low Channel

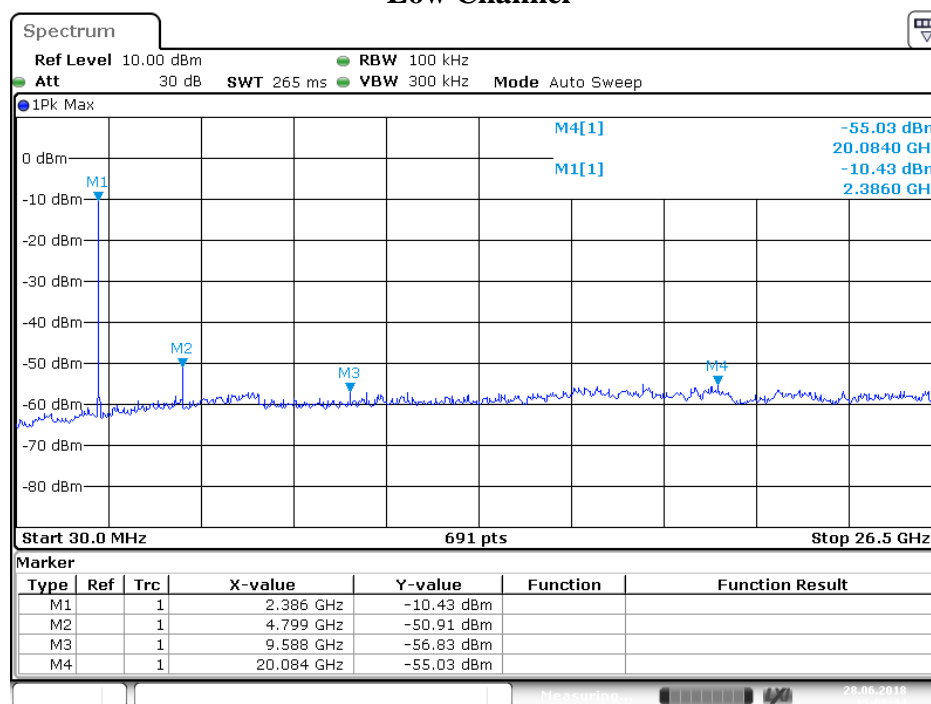


Date: 28.JUN.2018 15:08:45

## Middle Channel

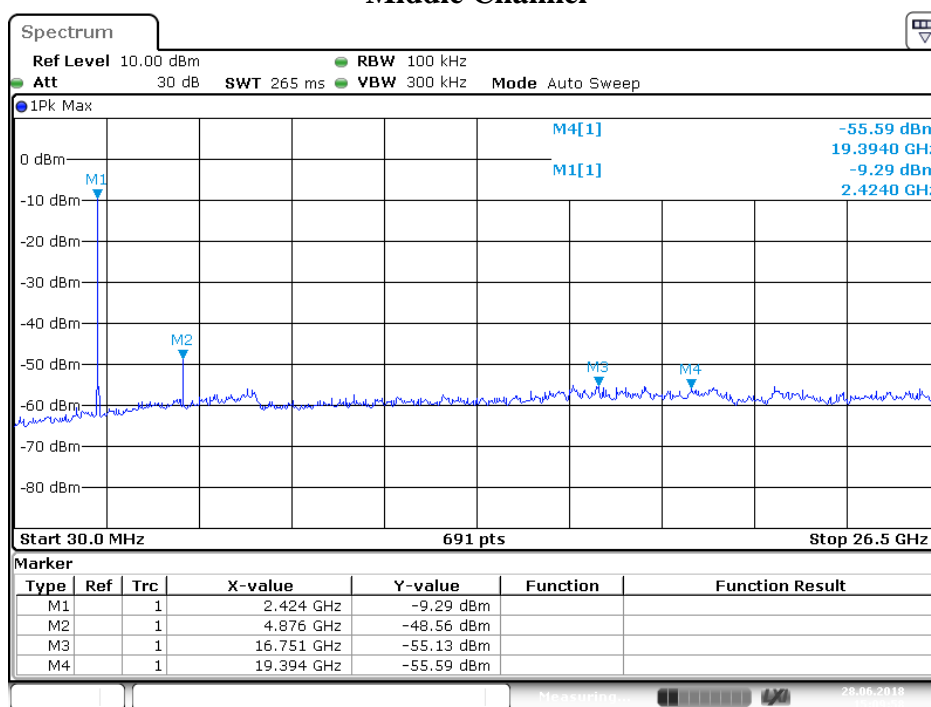

Date: 28.JUN.2018 15:09:58

## High Channel

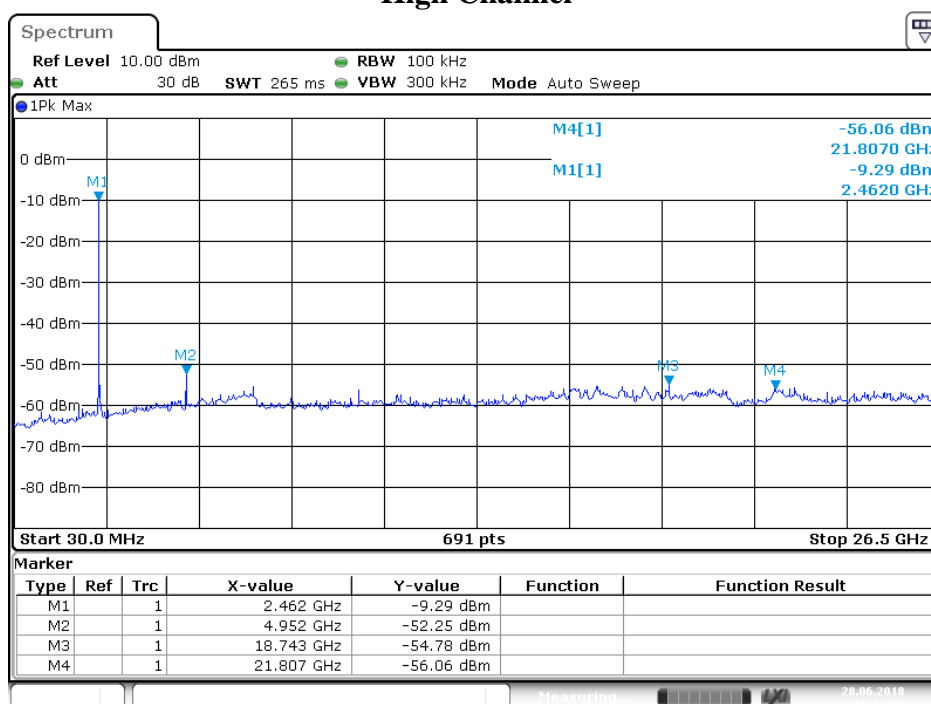

Date: 28.JUN.2018 15:11:24

## 14.ANTENNA REQUIREMENT

### 14.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 14.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Max Antenna gain of EUT is 0 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**\*\*\*\*\* End of Test Report \*\*\*\*\***