# RF TEST REPORT

Report No.: Q191022S003-FCC-R

Supersede Report No.: N/A

| | |
|---|---|
| Applicant | Medtrum Technologies Inc. |
| Product Name | Transmitter |
| Model No. | MD1027 |
| Serial No. | N/A |
| Test Standard | FCC Part 15.247, ANSI C63.10: 2013 |
| Test Date | Nov. 20 to Dec. 26, 2019 |
| Issue Date | Feb. 18, 2020 |
| Test Result | ☑ Pass ☐ Fail |
| Equipment complied with the specification | ☑ |
| Equipment did not comply with the specification | ☐ |
| Aaron Liang | David Huang |
| Aaron Liang<br>Test Engineer | David Huang<br>Checked By |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only | |

Issued by:

BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICE CO., LTD

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

# Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.


In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

## Accreditations for Conformity Assessment

| Country/Region | Scope |
| --- | --- |
| USA | EMC, RF/Wireless, SAR, Telecom |
| Canada | EMC, RF/Wireless, SAR, Telecom |
| Taiwan | EMC, RF, Telecom, SAR, Safety |
| Hong Kong | RF/Wireless, SAR, Telecom |
| Australia | EMC, RF, Telecom, SAR, Safety |
| Korea | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan | EMI, RF/Wireless, SAR, Telecom |
| Singapore | EMC, RF, SAR, Telecom |
| Europe | EMC, RF, SAR, Telecom, Safety |

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY ..... 5

2. CUSTOMER INFORMATION ..... 5

3. TEST SITE INFORMATION ..... 5

4. EQUIPMENT UNDER TEST (EUT) INFORMATION ..... 6

5. TEST SUMMARY ..... 7

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS ..... 8

6.1 ANTENNA REQUIREMENT ..... 8

6.2 DTS (6 DB) CHANNEL BANDWIDTH ..... 9

6.3 MAXIMUM OUTPUT POWER ..... 11

6.4 POWER SPECTRAL DENSITY ..... 13

6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS ..... 15

6.6 AC POWER LINE CONDUCTED EMISSIONS ..... 18

6.7 RADIATED EMISSIONS & RESTRICTED BAND ..... 20

ANNEX A. TEST INSTRUMENT ..... 27

ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT ..... 29

ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY ..... 32

# 1. Report Revision History

| Report No. | Report Version | Description | Issue Date |
| --- | --- | --- | --- |
| Q191022S003-FCC-R | NONE | Original | Feb. 18, 2020 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

# 2. Customer information

| | |
| --- | --- |
| Applicant Name | Medtrum Technologies Inc. |
| Applicant Add | 7F， Building 8, No.200 Niudun Road, Shanghai 201203, China |
| Manufacturer | Medtrum Technologies Inc. |
| Manufacturer Add | 7F， Building 8, No.200 Niudun Road, Shanghai 201203, China |

# 3. Test site information

Test Lab A:

| | |
| --- | --- |
| Lab performing tests | BUREAU VERITAS (SHENZHEN) CONSUMER PRODUCTS SERVICE CO., LTD |
| Lab Address | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park<br>South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108 |
| FCC Test Site No. | 535293 |
| IC Test Site No. | 4842E-1 |
| Test Software | EZ-EMC(ver.Icp-03A1) |

Test Lab B:

| | |
| --- | --- |
| Lab performing tests | Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories |
| Lab Address | No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China |
| FCC Test Site No. | 749762 |
| IC Test Site No. | 5936A-1 |
| Test Software | ADT_Radiated_V7.6.15.9.2 |

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

# 4. Equipment under Test (EUT) Information

| | |
| --- | --- |
| Description of EUT: | Transmitter |
| Main Model: | MD1027 |
| Serial Model: | N/A |
| Date EUT received: | Nov. 19, 2019 |
| Test Date(s): | Nov. 20 to Dec. 26, 2019 |
| Equipment Category : | DTS |
| Antenna Gain: | BLE: 1.6dBi |
| Antenna Type: | Ceramic antenna |
| Type of Modulation: | BLE: GFSK |
| RF Operating Frequency (ies): | BLE: 2402-2480 MHz |
| Max. Output Power: | -6.46dBm |
| Number of Channels: | BLE: 40CH |
| Port: | Please refer to user's manual |
| Trade Name : | Medtrum |
| Input Power: | Battery: 3.7V |
| FCC ID: | 2AARU-MD1027 |

# 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules | Description of Test | Result |
|---|---|---|
| §15.203 | Antenna Requirement | Compliance |
| §15.247 (a)(2) | DTS (6 dB) CHANNEL BANDWIDTH | Compliance |
| §15.247(b)(3) | Conducted Maximum Output Power | Compliance |
| §15.247(e) | Power Spectral Density | Compliance |
| §15.247(d) | Band-Edge & Unwanted Emissions into Restricted Frequency Bands | Compliance |
| §15.207 (a), | AC Power Line Conducted Emissions | N/A |
| §15.205, §15.209, §15.247(d) | Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands | Compliance |

**Measurement Uncertainty**

| Emissions | | |
|---|---|---|
| **Test Item** | **Description** | **Uncertainty** |
| Band-Edge & Unwanted Emissions into Restricted Frequency Bands and Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| - | - | - |

# 6. Measurements, Examination And Derived Results

## 6.1 Antenna Requirement

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.
The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

a. Antenna must be permanently attached to the unit.

b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.
And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has 1 antenna:
A permanently attached Ceramic antenna for BLE, the gain is 1.6dBi for BLE.

### The antenna meets up with the ANTENNA REQUIREMENT.

**Result:** Compliance.

## 6.2 DTS (6 dB) Channel Bandwidth

| | |
|---|---|
| Temperature | 23℃ |
| Relative Humidity | 58% |
| Atmospheric Pressure | 1020mbar |
| Test date : | Dec. 02, 2019 |
| Tested By : | Aaron Liang |

| Spec | Item | Requirement | Applicable |
|---|---|---|---|
| § 15.247(a)(2) | a) | 6dB BW≥ 500kHz; | ☑ |
| RSS Gen(4.6.1) | b) | 99% BW: For FCC reference only; required by IC. | ☑ |
| Test Setup |  Spectrum Analyzer EUT | | |
| Test Procedure | KDB 558074 D01 DTS MEAS Guidance v05r02, 8.1 DTS bandwidth<br>6dB Emission bandwidth measurement procedure<br>- Set RBW = 100 kHz.<br>- Set the video bandwidth (VBW) ≥ 3 RBW.<br>- Detector = Peak.<br>- Trace mode = max hold.<br>- Sweep = auto couple.<br>- Allow the trace to stabilize.<br>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. | | |
| Remark | | | |
| Result | ☑ Pass ☐ Fail | | |

**Test Data** ☑ Yes ☐ N/A

**Test Plot** ☑ Yes (See below) ☐ N/A

## 6dB Bandwidth measurement result

### Test Data

| CH | Frequency (MHz) | 6dB Bandwidth (kHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|---|---|---|---|---|
| Low | 2402 | 0.684 | 0.5 | PASS |
| Mid | 2440 | 0.696 | 0.5 | PASS |
| High | 2480 | 0.680 | 0.5 | PASS |

### Test Plots


6dB Bandwidth - Low CH 2402


6dB Bandwidth - Mid CH 2440


6dB Bandwidth - High CH 2480

## 6.3 Maximum Output Power

| | |
| --- | --- |
| Temperature | 23℃ |
| Relative Humidity | 58% |
| Atmospheric Pressure | 1020mbar |
| Test date : | Dec. 02, 2019 |
| Tested By : | Aaron Liang |

**Requirement(s):**

| Spec | Item | Requirement | Applicable |
| --- | --- | --- | --- |
| §15.247(b)(3),RSS210(A8.4) | a) | FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt | ☐ |
| | b) | FHSS in 5725-5850MHz: ≤ 1 Watt | ☐ |
| | c) | For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt. | ☐ |
| | d) | FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt | ☐ |
| | e) | FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25 Watt | ☐ |
| | f) | DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt | ☑ |
| Test Setup |  Spectrum Analyzer EUT | | |
| Test Procedure | KDB 558074 D01 DTS MEAS Guidance v05r02, 9.1.2 Integrated band power method<br>Maximum output power measurement procedure<br>a) Set the RBW ≥ DTS bandwidth.<br>b) Set VBW ≥ 3 × RBW.<br>c) Set span ≥ 3 x RBW<br>d) Sweep time = auto couple.<br>e) Detector = peak.<br>f) Trace mode = max hold.<br>g) Allow trace to fully stabilize.<br>h) Use peak marker function to determine the peak amplitude level. | | |
| Remark | | | |
| Result | ☑ Pass ☐ Fail | | |

**Test Data** ☑ Yes ☐ N/A

**Test Plot** ☑ Yes (See below) ☐ N/A

**Output Power measurement result**

**Test Data**

| CH | Frequency (MHz) | Peak Power (dBm) | Peak Power (mW) | Peak Power Limit (W) | Average Power (dBm) | Result |
| --- | --- | --- | --- | --- | --- | --- |
| Low | 2402 | -6.70 | 0.214 | 1 | -6.94 | Pass |
| Mid | 2440 | -6.45 | 0.226 | 1 | -6.67 | Pass |
| High | 2480 | -6.65 | 0.216 | 1 | -6.88 | Pass |

**Test Plots**

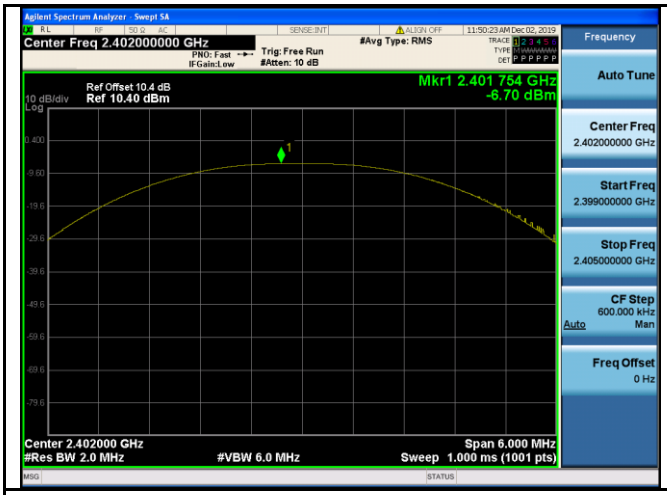


PK Output power - Low CH 2402

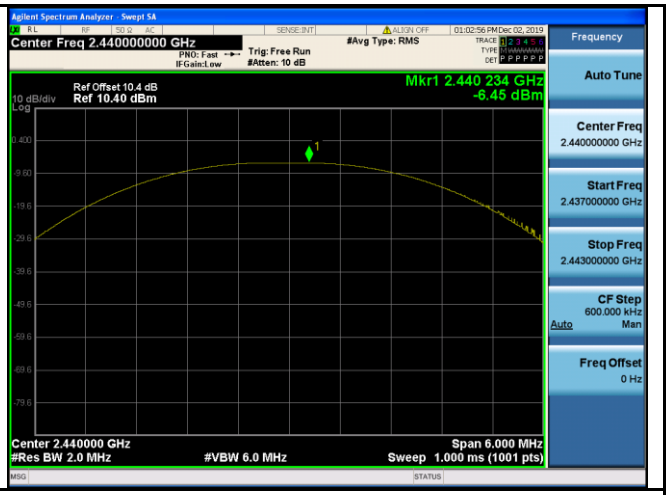


PK Output power - Mid CH 2440

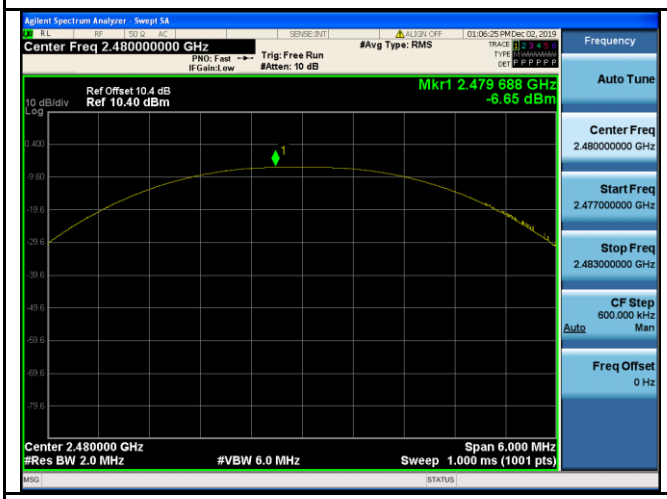


PK Output power - High CH 2480

## 6.4 Power Spectral Density

| | |
| --- | --- |
| Temperature | 23℃ |
| Relative Humidity | 58% |
| Atmospheric Pressure | 1020mbar |
| Test date : | Dec. 02, 2019 |
| Tested By : | Aaron Liang |

| Spec | Item | Requirement | Applicable |
| --- | --- | --- | --- |
| §15.247(e) | a) | The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. | ☑ |
| Test Setup |  | | |
| Test Procedure | KDB 558074 D01 DTS MEAS Guidance v05r02, 10.2 power spectral density method power spectral density measurement procedure<br>- a) Set analyzer center frequency to DTS channel center frequency.<br>- b) Set the span to 1.5 times the DTS bandwidth.<br>- c) Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.<br>- d) Set the VBW ≥ 3 × RBW.<br>- e) Detector = peak.<br>- f) Sweep time = auto couple.<br>- g) Trace mode = max hold.<br>- h) Allow trace to fully stabilize.<br>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.<br>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. | | |
| Remark | | | |
| Result | ☑ Pass ☐ Fail | | |

**Test Data** ☑ Yes ☐ N/A

**Test Plot** ☑ Yes (See below) ☐ N/A

## Power Spectral Density measurement result

### Test Data

| Type | CH | Freq (MHz) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|---|---|---|---|---|---|
| PSD | Low | 2402 | -20.492 | 8 | Pass |
| | Mid | 2440 | -19.750 | 8 | Pass |
| | High | 2480 | -19.825 | 8 | Pass |

### Test Plots


PSD - Low CH 2402


PSD - Mid CH 2440


PSD - High CH 2480

## 6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

| | |
| --- | --- |
| Temperature | 24℃ |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1021mbar |
| Test date : | Dec. 24, 2019 |
| Tested By : | Aaron Liang |

**Requirement(s):**

| Spec | Item | Requirement | Applicable |
| --- | --- | --- | --- |
| §15.247(d) | a) | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. | ☑ |
| Test Setup | 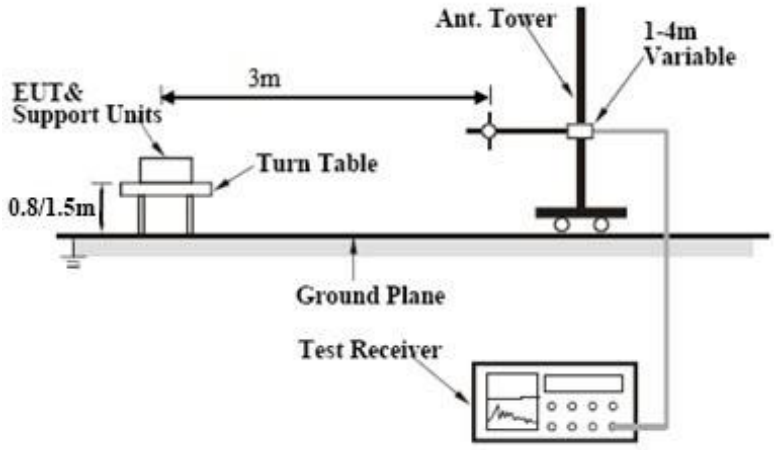 | | |
| Test Procedure | Radiated Method Only<br>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.<br>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. | | |

| | |
| --- | --- |
| | - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:<br>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.<br>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.<br>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.<br>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.<br>- 5. Repeat above procedures until all measured frequencies were complete. |
| Remark | |
| Result | ☑ Pass ☐ Fail |

**Test Data** ☐ Yes ☑ N/A

**Test Plot** ☑ Yes (See below) ☐ N/A

## Test Plots

### Band Edge measurement result

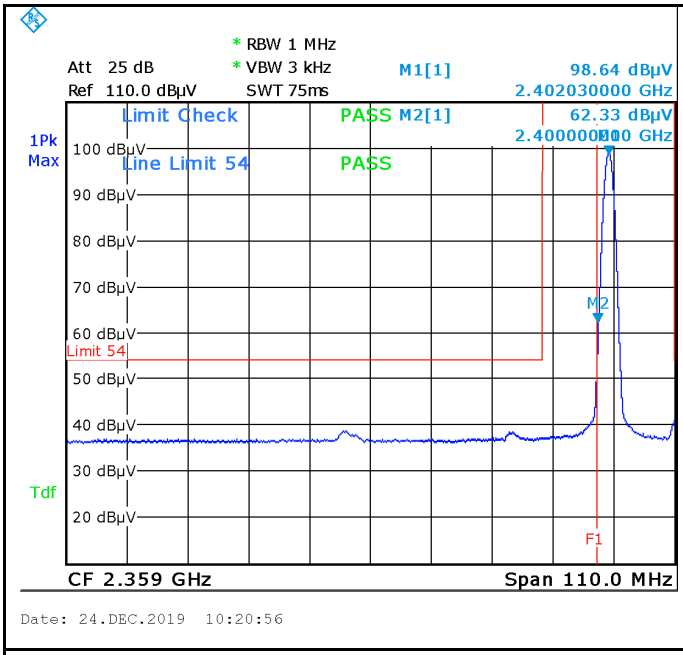


Band Edge, Left Side (Peak)

**Note: F1 is frequency 2483.5MHz**

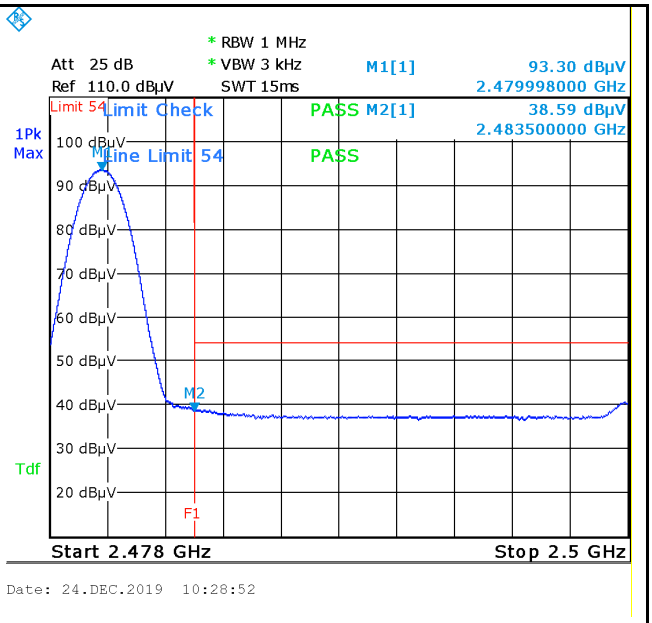


Band Edge, Right Side (Peak)

**Note: F1 is frequency 2483.5MHz**

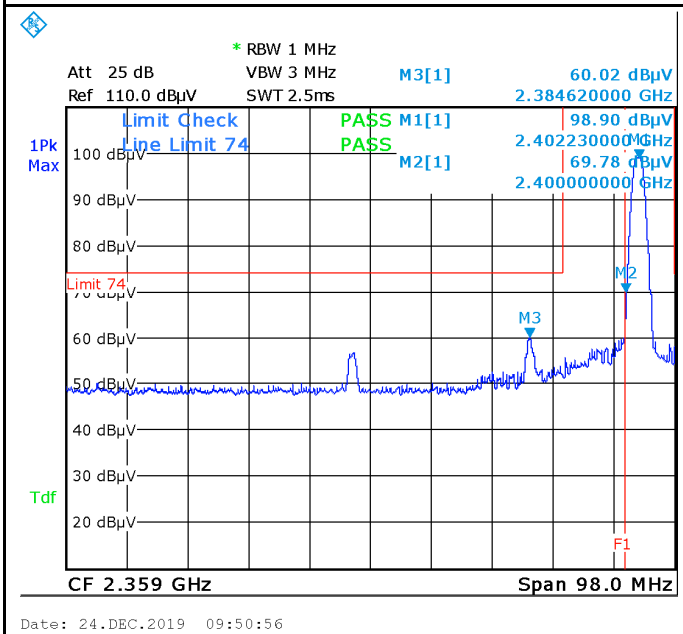


Band Edge, Left Side-AV

**Note: F1 is frequency 2483.5MHz**

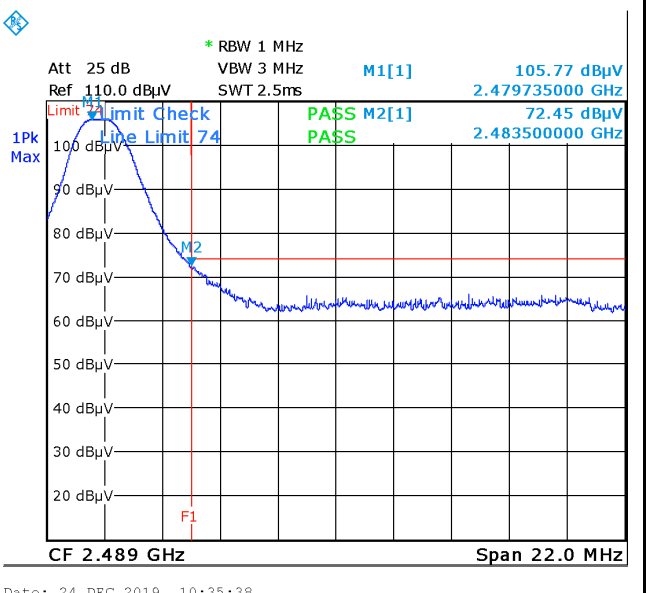


Band Edge, Right Side-AV

**Note: F1 is frequency 2483.5MHz**

Note: Both Horizontal and vertical polarities were investigated.

## 6.6 AC Power Line Conducted Emissions

| | |
|---|---|
| Temperature | -- |
| Relative Humidity | -- |
| Atmospheric Pressure | -- |
| Test date : | -- |
| Tested By : | -- |

**Requirement(s):**

<table>
<tr><th>Spec</th><th>Item</th><th>Requirement</th><th>Applicable</th></tr>
<tr><td>47CFR§15.207, RSS210 (A8.1)</td><td>a)</td><td>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.
<table>
<tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr>
<tr><th>QP</th><th>Average</th></tr>
<tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr>
<tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr>
<tr><td>5 ~ 30</td><td>60</td><td>50</td></tr>
</table></td><td>☐</td></tr>
<tr><td>Test Setup</td><td colspan="3"> 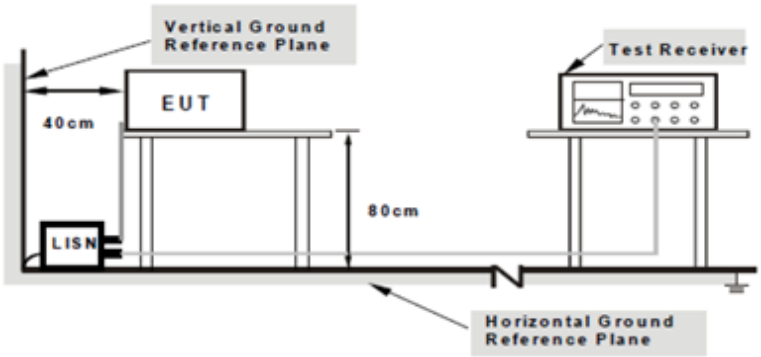

Note: 1.Support units were connected to second LISN.<br>2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</td></tr>
<tr><td>Procedure</td><td colspan="3">1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.<br>2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.<br>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</td></tr>
</table>

| | |
| --- | --- |
| | coaxial cable.<br>4. All other supporting equipment were powered separately from another main supply.<br>5. The EUT was switched on and allowed to warm up to its normal operating condition.<br>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.<br>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.<br>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power). |
| Remark | **The EUT was powered by battery** |
| Result | ☐ Pass ☐ Fail ☑ N/A |

**Test Data** ☐ Yes ☑ N/A

**Test Plot** ☐ Yes (See below) ☑ N/A

## 6.7 Radiated Emissions & Restricted Band

| | |
|---|---|
| Temperature | 24℃ |
| Relative Humidity | 57% |
| Atmospheric Pressure | 1021mbar |
| Test date : | Dec. 24, 2019 |
| Tested By : | Aaron Liang |

**Requirement(s):**

<table>
<tr><th>Spec</th><th>Item</th><th>Requirement</th><th>Applicable</th></tr>
<tr><td rowspan="3">47CFR§15.247(d), RSS210 (A8.5)</td><td>a)</td><td>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges
<table>
<tr><th>Frequency range (MHz)</th><th>Field Strength (μV/m)</th></tr>
<tr><td>0.009~0.490</td><td>2400/F(KHz)</td></tr>
<tr><td>0.490~1.705</td><td>24000/F(KHz)</td></tr>
<tr><td>1.705~30.0</td><td>30</td></tr>
<tr><td>30 – 88</td><td>100</td></tr>
<tr><td>88 – 216</td><td>150</td></tr>
<tr><td>216 960</td><td>200</td></tr>
<tr><td>Above 960</td><td>500</td></tr>
</table></td><td>☑</td></tr>
<tr><td>b)</td><td>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required<br>☒ 20 dB down ☐ 30 dB down</td><td>☑</td></tr>
<tr><td>c)</td><td>or restricted band, emission must also comply with the radiated emission limits specified in 15.209</td><td>☑</td></tr>
</table>

| | |
|---|---|
| Test Setup | 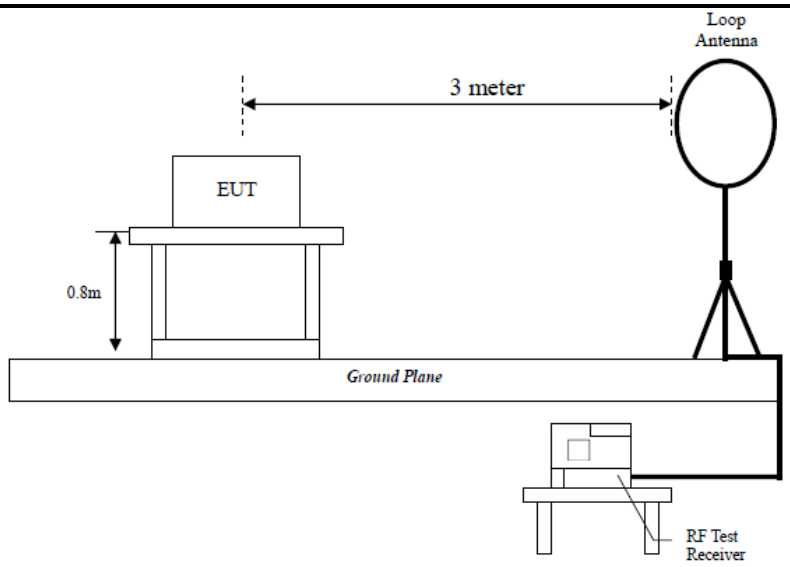 <br> 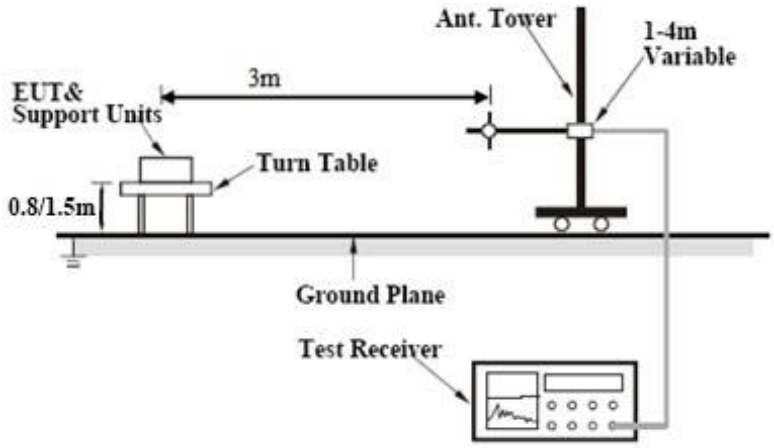 |
| Procedure | 1. The EUT was switched on and allowed to warm up to its normal operating condition.<br>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:<br>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.<br>b. The EUT was then rotated to the direction that gave the maximum emission.<br>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.<br>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.<br>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. |

| | |
|---|---|
| | The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.<br>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. |
| Remark | |
| Result | ☑ Pass ☐ Fail |

**Test Data** ☑ Yes ☐ N/A

**Test Plot** ☑ Yes (See below) ☐ N/A

## Test Result:

| Test Mode: | Transmitting Mode |
|---|---|

Frequency range: 9KHz - 30MHz

| Freq. (MHz) | Detection value | Factor (dB/m) | Reading (dBuV/m) | Result (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) |
|---|---|---|---|---|---|---|
| -- | -- | -- | -- | -- | -- | >20 |
| -- | -- | -- | -- | -- | -- | >20 |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance) (dB);

Limit line = specific limits (dBuv) + distance extrapolation factor.

| Test Mode: | Transmitting Mode |
|---|---|

30MHz -1GHz

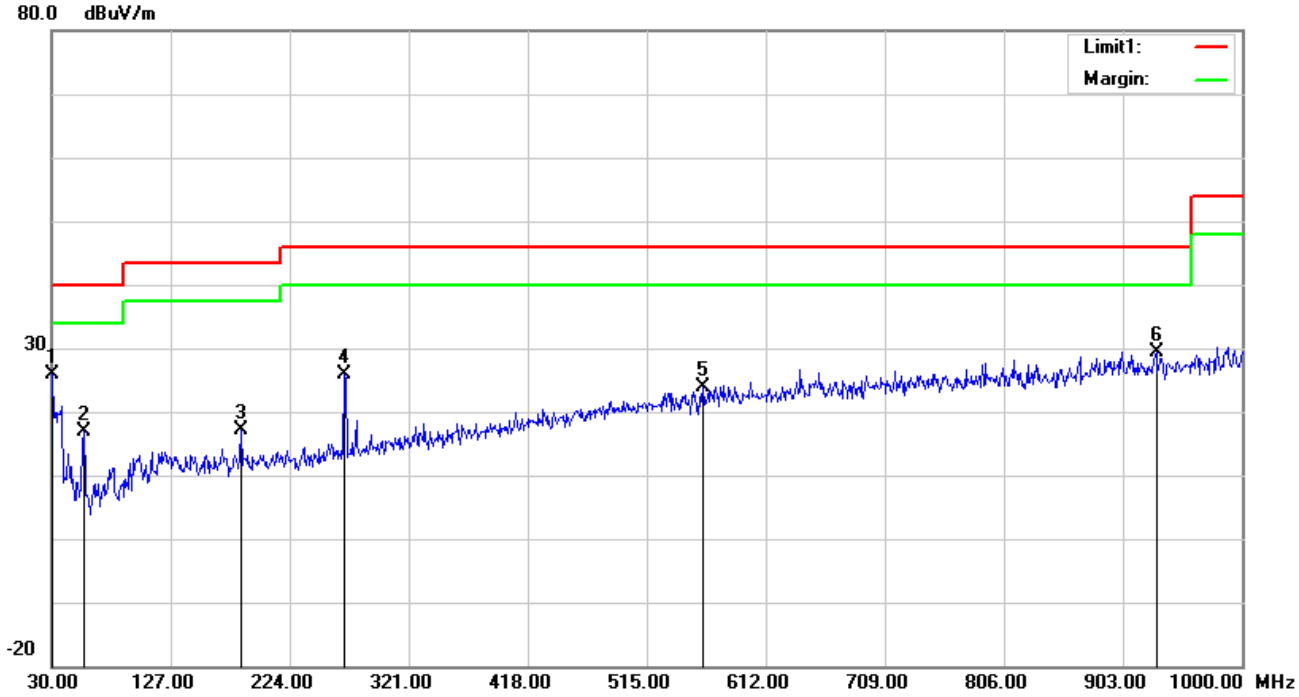


*Test Data*

Horizontal Polarity Plot @3m

| No. | P/L | Frequency | Reading | Ant_F | PA_G | Cab_L | Result | Limit | Margin | Height | Degree |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | (MHz) | (dBuV/m) | (dB/m) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | (cm) | ( ° ) |
| 1 | H | 30.9700 | 28.58 | 19.48 | 22.27 | 0.13 | 25.92 | 40.00 | -14.08 | 100 | 301 |
| 2 | H | 56.1900 | 31.65 | 7.33 | 22.40 | 0.25 | 16.83 | 40.00 | -23.17 | 100 | 206 |
| 3 | H | 184.2300 | 26.53 | 11.31 | 22.28 | 1.48 | 17.04 | 43.50 | -26.46 | 100 | 124 |
| 4 | H | 268.6200 | 33.80 | 12.79 | 22.29 | 1.65 | 25.95 | 46.00 | -20.05 | 100 | 95 |
| 5 | H | 560.5900 | 23.74 | 19.64 | 21.67 | 2.28 | 23.99 | 46.00 | -22.01 | 100 | 104 |
| 6 | H | 930.1600 | 24.14 | 23.46 | 20.82 | 2.68 | 29.46 | 46.00 | -16.54 | 100 | 41 |

## 30MHz -1GHz

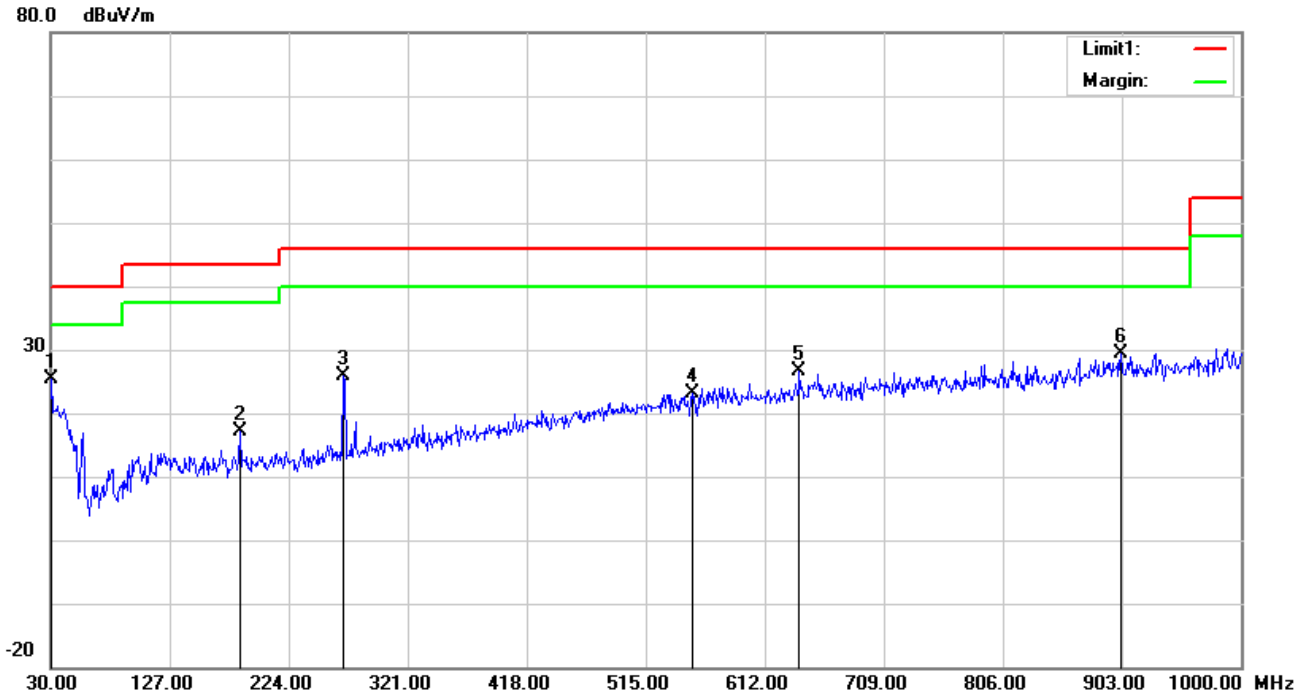


*Test Data*

### Vertical Polarity Plot @3m

| No. | P/L | Frequency | Reading | Ant_F | PA_G | Cab_L | Result | Limit | Margin | Height | Degree |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| | | (MHz) | (dBuV/m) | (dB/m) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | (cm) | ( ° ) |
| 1 | V | 30.9700 | 28.08 | 19.48 | 22.27 | 0.13 | 25.42 | 40.00 | -14.58 | 100 | 177 |
| 2 | V | 184.2300 | 26.53 | 11.31 | 22.28 | 1.48 | 17.04 | 43.50 | -26.46 | 100 | 164 |
| 3 | V | 268.6200 | 33.80 | 12.79 | 22.29 | 1.65 | 25.95 | 46.00 | -20.05 | 100 | 261 |
| 4 | V | 552.8300 | 23.21 | 19.39 | 21.69 | 2.27 | 23.18 | 46.00 | -22.82 | 100 | 126 |
| 5 | V | 640.1300 | 25.16 | 20.60 | 21.49 | 2.35 | 26.62 | 46.00 | -19.38 | 100 | 126 |
| 6 | V | 902.0300 | 23.63 | 23.86 | 20.88 | 2.65 | 29.26 | 46.00 | -16.74 | 100 | 147 |

## Above 1GHz

| Test Mode: | Transmitting Mode |
|---|---|

### Low Channel (2402 MHz)

Vertical

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|---|---|---|---|---|---|---|---|---|
| 4804 | 63.19 | PK | 74 | -10.81 | 151 | 329 | 66.94 | -3.75 |
| 4804 | 47.40 | AV | 54 | -6.60 | 151 | 329 | 51.15 | -3.75 |

Horizontal

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|---|---|---|---|---|---|---|---|---|
| 4804 | 58.56 | PK | 74 | -15.44 | 151 | 311 | 62.31 | -3.75 |
| 4804 | 48.17 | AV | 54 | -5.83 | 151 | 311 | 51.92 | -3.75 |

### Middle Channel (2440 MHz)

Vertical

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|---|---|---|---|---|---|---|---|---|
| 4880 | 58.62 | PK | 74 | -15.38 | 143 | 258 | 62.58 | -3.96 |
| 4880 | 47.65 | AV | 54 | -6.35 | 143 | 258 | 51.61 | -3.96 |
| 7320 | 59.43 | PK | 74 | -14.57 | 162 | 250 | 63.39 | -3.96 |
| 7320 | 48.81 | AV | 54 | -5.19 | 162 | 250 | 52.77 | -3.96 |

Horizontal

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|---|---|---|---|---|---|---|---|---|
| 4880 | 59.52 | PK | 74 | -14.48 | 153 | 78 | 63.48 | -3.96 |
| 4880 | 47.20 | AV | 54 | -6.80 | 153 | 78 | 51.16 | -3.96 |
| 7320 | 58.05 | PK | 74 | -15.95 | 158 | 53 | 62.01 | -3.96 |
| 7320 | 44.39 | AV | 54 | -9.61 | 158 | 53 | 48.35 | -3.96 |

High Channel (2480 MHz)

Vertical

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 4960 | 55.85 | PK | 74 | -18.15 | 147 | 267 | 59.60 | -3.75 |
| 4960 | 47.20 | AV | 54 | -6.80 | 147 | 267 | 50.95 | -3.75 |

Horizontal

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | DETECTOR (PK/AV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (MM) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 4960 | 60.10 | PK | 74 | -13.90 | 141 | 274 | 63.85 | -3.75 |
| 4960 | 46.40 | AV | 54 | -7.60 | 141 | 274 | 50.15 | -3.75 |

Note:

*1, The testing has been conformed to 10*2480MHz=24,800MHz*
*2, All other emissions more than 30 dB below the limit*
*3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.*

# Annex A. TEST INSTRUMENT

| Instrument | Manufacturer | Model | Serial # | Cal Date | Cal Due |
|---|---|---|---|---|---|
| **AC Line** | | | | | |
| EMI Test Receiver | Rohde&Schwarz | ESCS30 | 8471241027 | Apr. 04, 19 | Apr. 03, 20 |
| Artificial Mains Network | SCHWARZBECK | 8127 | 8127713 | Mar. 28, 19 | Mar. 27, 20 |
| ISN | Com-Power | ISN T800 | 34373 | Mar. 28, 19 | Mar. 27, 20 |
| Test software | EZ-EMC | ICP-03A1 | N/A | N/A | N/A |
| **RF conducted** | | | | | |
| Wireless | R&S | CMW270 | 1201.0002K7 | Dec. 18, 19 | Dec. 17, 20 |
| MXA VEXTOR | Agilent | n5182a | MY50140530 | Mar. 28, 19 | Mar. 27, 20 |
| MXA signal | Agilent | n9020a | MY49100060 | Mar. 28, 19 | Mar. 27, 20 |
| RF Control Unit | Tonscend | JS0806-2 | 188060112 | Mar. 28, 19 | Mar. 27, 20 |
| Signal Generation | Agilent | E4421B | US40051152 | Dec. 18, 19 | Dec. 17, 20 |
| DC Power Supply | Agilent | E3640A | MY40004013 | Mar. 28, 19 | Mar. 27, 20 |
| Programmable | Hongjin | HYC-TH- | DG-180746 | Mar. 28, 19 | Mar. 27, 20 |
| Test System | Tonscend | JS 1120-3 | N/A | N/A | N/A |
| Power Splitter | Weinschel | 1580-1 | TL177 | Mar. 20, 19 | Mar. 19, 20 |
| **Radiated** | | | | | |
| EMI Test Receiver | Rohde&Schwarz | ESL6 | 1300.5001K0 | Apr. 04, 19 | Apr. 03, 20 |
| Bilog Antenna | Sunol Sciences | JB6 | A110712 | Apr. 08, 19 | Apr. 07, 20 |
| Active Antenna | CMO-POWER | AL-130 | 121031 | Mar. 27, 19 | Mar. 26, 20 |
| Signal Amplifier | HP | 8447E | 443008 | Mar. 28, 19 | Mar. 27, 20 |
| 3m Semi-anechoic Chamber | SAEMC | 9m*6m*6m | N/A | Oct. 18, 18 | Oct. 17, 21 |
| Test Software | EZ-EMC | ICP-03A1 | N/A | N/A | N/A |
| Spectrum | Agilent | E4446A | MY46180622 | May 08, 19 | May 07, 20 |
| MXA signal analyzer | Agilent | N9020A | MY49100060 | Mar. 28, 19 | Mar. 27, 20 |
| Horn Antenna | COM-POWER | HAH-118 | 71259 | Mar. 22, 19 | Mar. 21, 20 |
| Horn Antenna | COM-POWER | HAH-118 | 71283 | Mar. 20, 19 | Mar. 19, 20 |
| SHF-EHF Horn | Schwarzbeck | BBHA9170 | BBHA9170147 | Jun. 30, 19 | Jun. 29, 20 |

| | | | | | |
| --- | --- | --- | --- | --- | --- |
| SHF-EHF Horn | Schwarzbeck | BBHA9170 | BBHA917024 | Jun. 30, 19 | Jun. 29, 20 |
| AMPLIFIER | EM Electornic Corporation | EM01G26G | 60613 | Mar. 28, 19 | Mar. 27, 20 |
| AMPLIFIER | Emc Instruments Corporation | Emc012645 | 980077 | Jan. 04, 19 | Jan. 03, 20 |

# Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

## Annex B.i. TEST SET UP BLOCK

**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

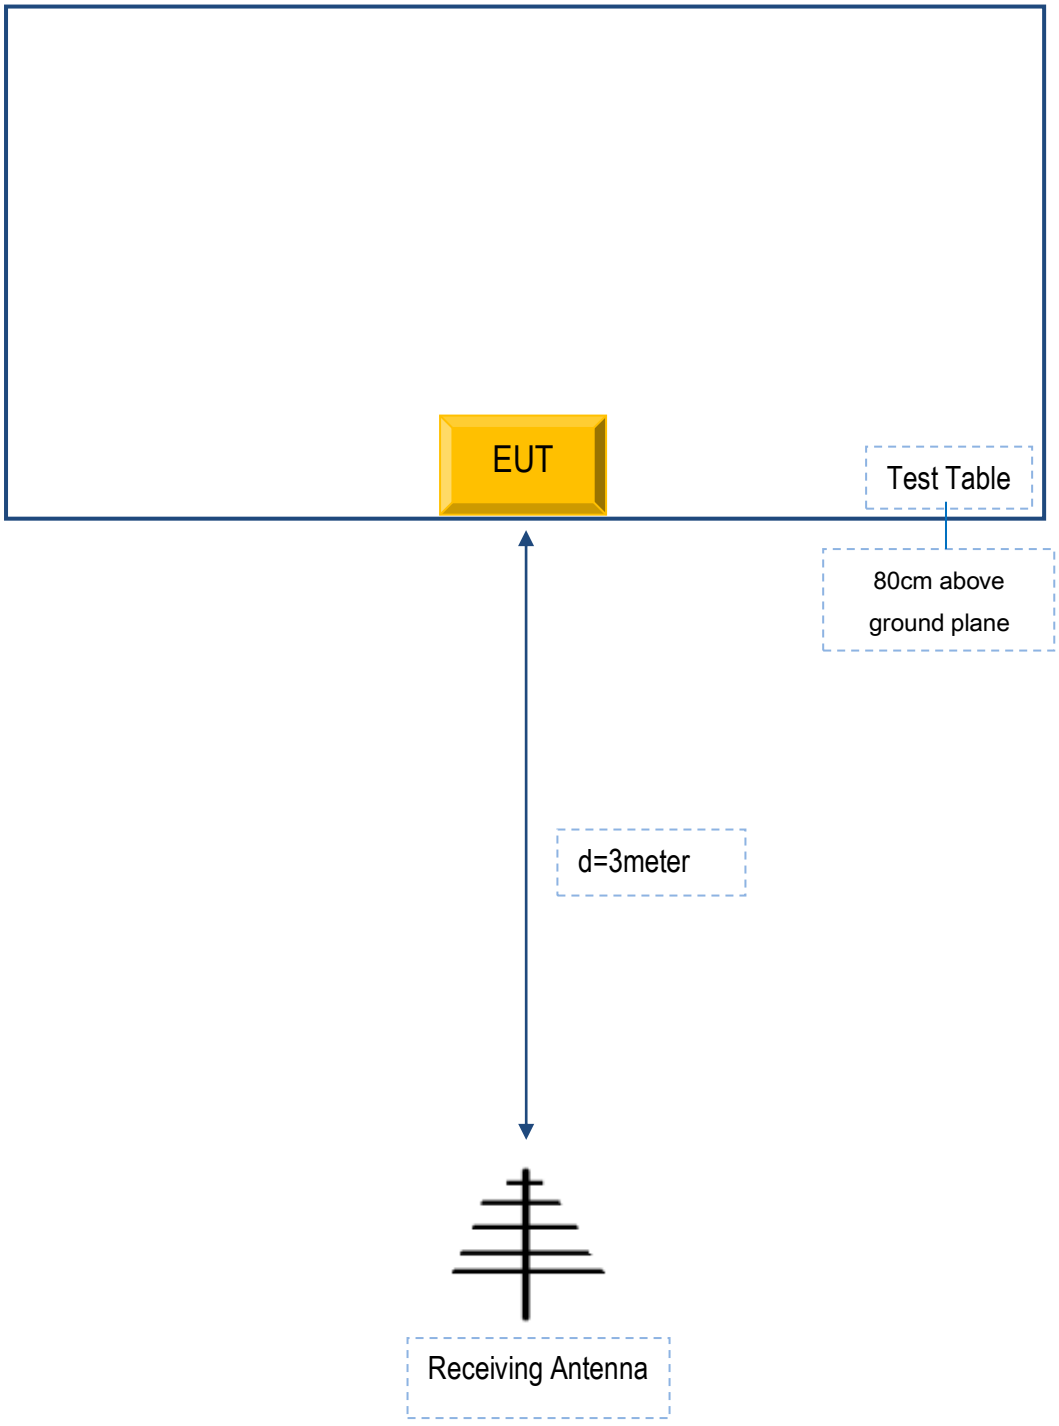

## Block Configuration Diagram for Radiated Emissions （Above 1GHz）.

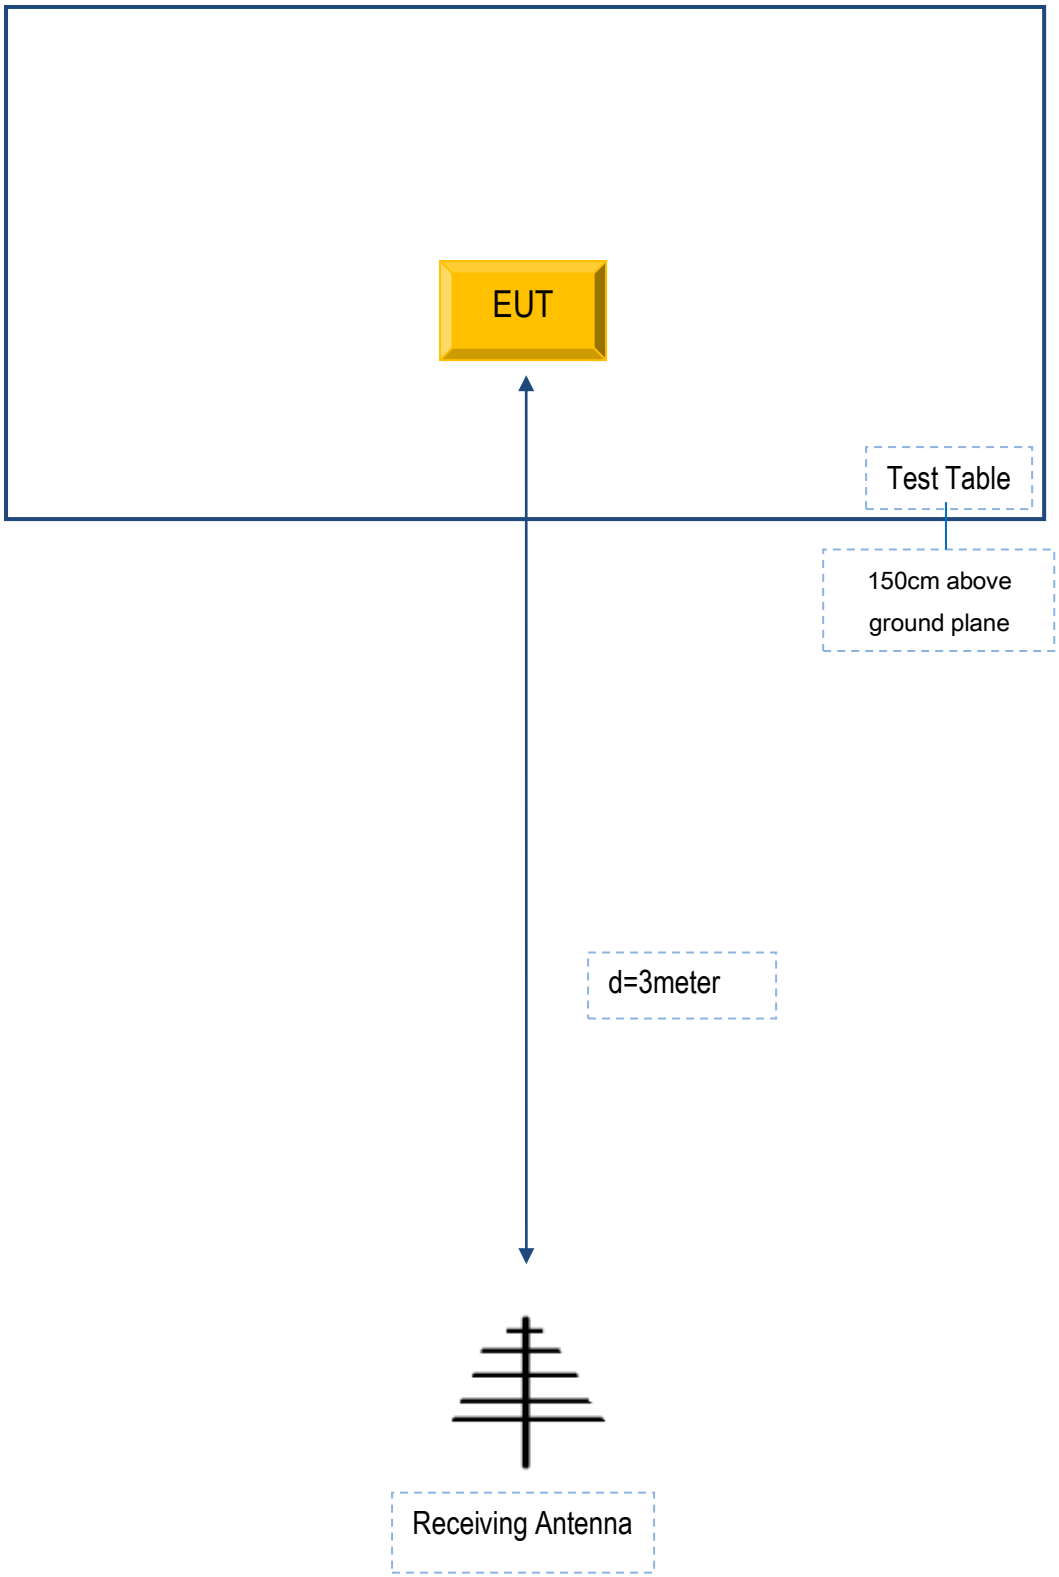

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

**Supporting Equipment:**

| Manufacturer | Equipment Description | Model | Serial No |
| --- | --- | --- | --- |
| - | - | - | - |
| - | - | - | - |

**Supporting Cable:**

| Cable type | Shield Type | Ferrite Core | Length | Serial No |
| --- | --- | --- | --- | --- |
| - | - | - | - | - |

# Annex C. User Manual / Block Diagram / Schematics / Partlist/ DECLARATION OF SIMILARITY

Please see the attachment