

1 Maximum Permissible Exposure

1.1 Maximum Permissible Exposure

1.1.1 Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6
Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30
Note 1: f = frequency in MHz ; *Plane-wave equivalent power density				
Note 2: For the applicable limit, see FCC 1.1310				

RF Field Strength Limits for Controlled Use Devices (Controlled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m²)	Averaging Time (minutes)
0.003-1	600	4.9	-	6
1-10	600/ <i>f</i>	4.9/ <i>f</i>	-	6
10-30	60	4.9/ <i>f</i>	-	6
30-300	60	0.163	10*	6
300-1500	3.54 <i>f</i> ^{0.5}	0.0094 <i>f</i> ^{0.5}	<i>f</i> /30	6
1500-15000	137	0.364	50	6
15000-150000	137	0.364	50	616000/ <i>f</i> ^{1.2}
150000-300000	0.354 <i>f</i> ^{0.5}	9.4 x 10 ⁻⁴ <i>f</i> ^{0.5}	3.33 x 10 ⁻⁴ <i>f</i>	616000/ <i>f</i> ^{1.2}
RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m²)	Averaging Time (minutes)
0.003-1	280	2.19	-	6
1-10	280/ <i>f</i>	2.19/ <i>f</i>	-	6
10-30	28	2.19/ <i>f</i>	-	6
30-300	28	0.073	2*	6
300-1500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1500-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i> ^{1.2}
Note 1: <i>f</i> is frequency in MHz.				
Note 2: For the applicable limit, see IC RSS-102				

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v02 - Part 2 Section 2.109

1.3 Ancillary Equipment

Ancillary Equipment			
No.	Equipment	Brand Name	Model Name
1	Test Fixture	--	--

Note: The test fixture provide by customer.

1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer
RF Conducted		TH01-HY	Howard
		Test Environment	
		24.8°C / 61%	

1.5 The Worst Charging Condition


Ancillary Equipment	Charging Condition	Worst Charging Condition
Test Fixture	< 1% Battery Status	< 1% Battery Status
Test Fixture	50% Battery Status	

Note 1: For Wireless Power Consortium Qi specification, a lower operating frequency or high duty cycle result in the transfer of a higher amount of power and charging current.

1.5.1 Test Method

Test Method
<input checked="" type="checkbox"/> Performed aggregate both leakage E-field and H-field at surrounding the device from all simultaneous transmitting coils.
<input checked="" type="checkbox"/> During testing, the EUT was placed on a non-conductive table top and the ancillary equipment (e.g., mobile phone) was placed on the EUT for charging. Maximum E-field and H-field measurements were tested 10cm from each side of the EUT. Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.

1.5.2 Test Setup

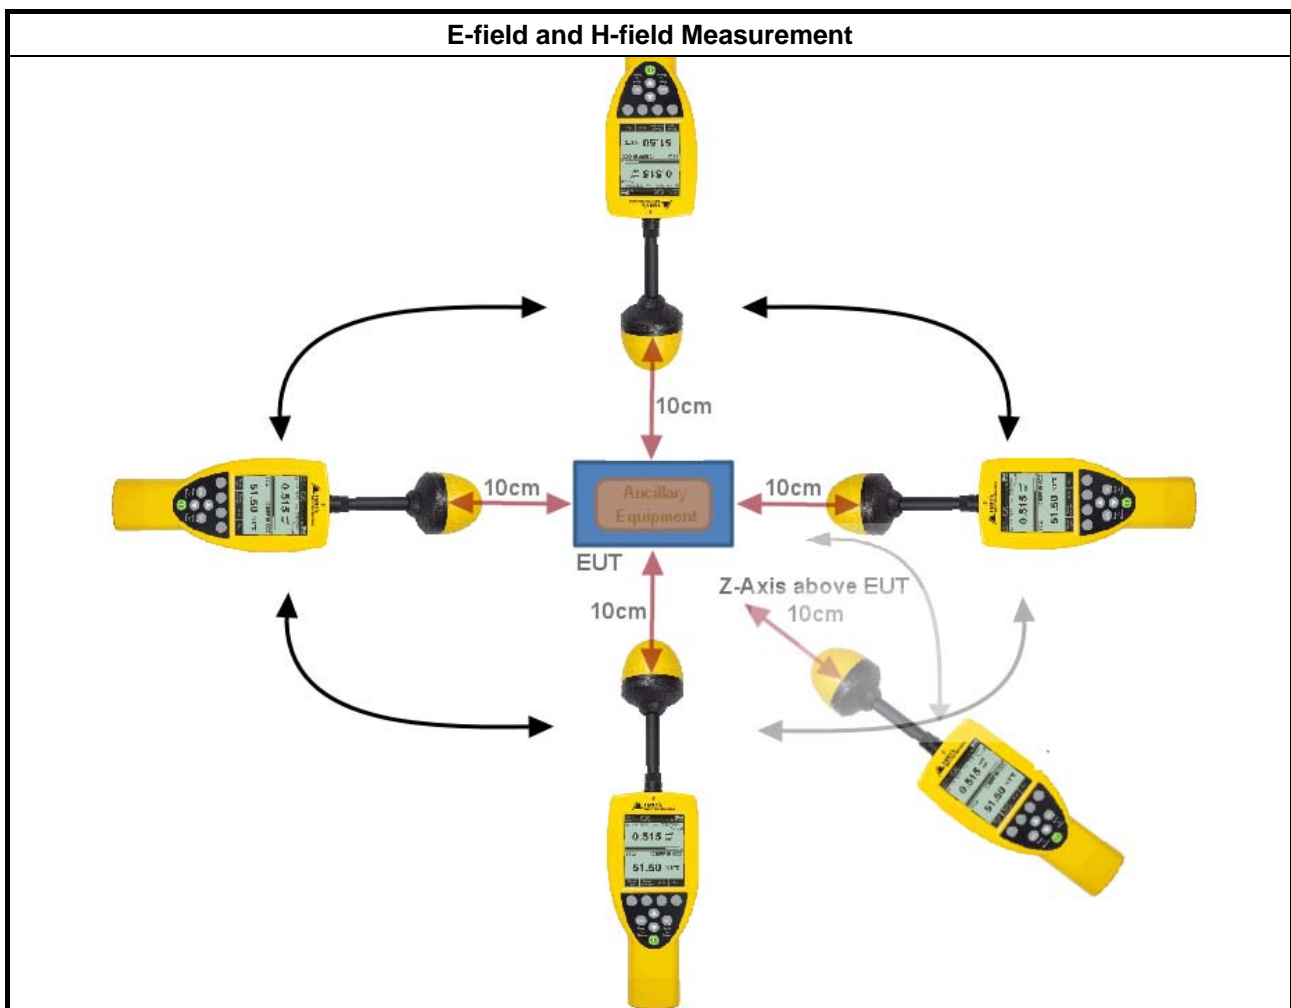

1.5.3 Result of Maximum Permissible Exposure

Maximum Permissible Exposure				
Charging Condition	Separation	Probe from EUT Side	E-field (V/m)	H-field Limit (A/m)
< 1% Battery Status	10cm	Left	0.43	0.315
< 1% Battery Status	10cm	Right	0.92	0.333
< 1% Battery Status	10cm	Top	0.27	0.332
< 1% Battery Status	10cm	Bottom	0.39	0.328
< 1% Battery Status	10cm	Z-axis above EUT	0.82	0.357
Limit			614	1.63
Margin Limit (%)			0.15%	21.89%



2 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
B-Field Probe	Narda Safety Test Solutions GmbH	B-Field Probe 100 cm ²	M-0652	50Hz~400KHz	Jun. 17, 2013	Conducted (TH01-HY)
Exposure Level Teste	Narda Safety Test Solutions GmbH	ELT-400	N-0210	100KHz~3MHz	Jun. 26, 2013	Conducted (TH01-HY)
Probe EF	Narda Safety Test Solutions GmbH	0391 E-Field	D-0667	0.1MHz ~ 3GHz	Jun. 24, 2013	Conducted (TH01-HY)
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-550	E-0847	0.1MHz ~ 3GHz	Jun. 07, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.