

FCC TEST REPORT

REPORT NO.: RF130809E04

MODEL NO.: OVO-101

FCC ID: 2AAUL-OVO-101

RECEIVED: Aug. 09, 2013

TESTED: Sep. 13 to 18, 2013

ISSUED: Oct. 15, 2013

APPLICANT: OVOMEDIA CREATIVE INC.

ADDRESS: 3F., No. 151, Ziqiang 5th Rd., Zhubei City, Hsinchu County, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL.....	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS.....	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES.....	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS.....	19
4.1.7 TEST RESULTS.....	20
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES.....	25
4.2.4 DEVIATION FROM TEST STANDARD	25
4.2.5 TEST SETUP	26
4.2.6 EUT OPERATING CONDITIONS.....	26
4.2.7 TEST RESULTS.....	27
4.3 6dB BANDWIDTH MEASUREMENT	40
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	40
4.3.2 TEST INSTRUMENTS	40
4.3.3 TEST PROCEDURE	40
4.3.4 DEVIATION FROM TEST STANDARD	40
4.3.5 TEST SETUP	40
4.3.6 EUT OPERATING CONDITIONS.....	40
4.3.7 TEST RESULTS.....	41



A D T

4.4	CONDUCTED OUTPUT POWER MEASUREMENT	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	INSTRUMENTS	43
4.4.3	TEST PROCEDURES	43
4.4.4	DEVIATION FROM TEST STANDARD	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS	45
4.5	AVERAGE OUTPUT POWER	46
4.5.1	FOR REFERENCE	46
4.5.2	TEST INSTRUMENTS	46
4.5.3	TEST PROCEDURES	46
4.5.4	TEST SETUP	46
4.5.5	EUT OPERATING CONDITIONS	46
4.5.6	TEST RESULTS	47
4.6	POWER SPECTRAL DENSITY MEASUREMENT	48
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.6.2	TEST INSTRUMENTS	48
4.6.3	TEST PROCEDURE	48
4.6.4	DEVIATION FROM TEST STANDARD	48
4.6.5	TEST SETUP	48
4.6.6	EUT OPERATING CONDITION	48
4.6.7	TEST RESULTS	49
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT	51
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	51
4.7.2	TEST INSTRUMENTS	51
4.7.3	TEST PROCEDURE	51
4.7.4	DEVIATION FROM TEST STANDARD	52
4.7.5	TEST SETUP	52
4.7.6	EUT OPERATING CONDITION	52
4.7.7	TEST RESULTS	52
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	65
6.	INFORMATION ON THE TESTING LABORATORIES	66
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	67



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130809E04	Original release	Oct. 15, 2013



A D T

1. CERTIFICATION

PRODUCT: OVO video beaming device
BRAND NAME: OVO
MODEL NO.: OVO-101
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: OVOMEDIA CREATIVE INC.
TESTED: Sep. 13 to 18, 2013
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (Model: OVO-101) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Oct. 15, 2013
(Midoli Peng, Specialist)

APPROVED BY : May Chen , **DATE:** Oct. 15, 2013
(May Chen, Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.09dB at 0.150MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.3dB at 4924.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.46 dB
Radiated emissions (1GHz -6GHz)	3.73 dB
Radiated emissions (6GHz -18GHz)	3.90 dB
Radiated emissions (18GHz -40GHz)	4.11 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	OVO video beaming device
MODEL NO.	OVO-101
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	802.11b: 162.555mW 802.11g: 394.457mW 802.11n (HT20): 679.020mW 802.11n (HT40): 565.508mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x1

NOTE:

- The EUT's appearance has two different colors (red and white).
- The EUT must be supplied with a power adapter as below table:

Brand	Model No.	Spec.
SHENZHEN FRECOM	F05W-050100SPAU	Input: 100-240V, 190mA, 50/60Hz Output: 5V, 1A DC output cable (unshielded, 1.2m)

3. The antennas provided to this EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Gain(dBi) Include cable loss	Antenna Type	Frequency range (MHz to MHz)	Connector Type
Chain (0)	Realtek	NA	-1.14	PCB	2400~2500	NA
Chain (1)	Realtek	NA	-1.54	PCB	2400~2500	NA

4. The EUT incorporates a MIMO function without beam forming.

MODULATION MODE	Tx/Rx FUNCTION
802.11b	1Tx/2Rx
802.11g	1Tx/2Rx
802.11n (HT20)	1Tx/2Rx or 2Tx/2Rx
802.11n (HT40)	1Tx2Rx or 2Tx/2Rx

For 1Tx mode will fix transmission on Chain (0).

5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	11	OFDM	BPSK	13

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	11	OFDM	BPSK	13

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	13
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	27

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25deg. C, 60%RH	120Vac, 60Hz	Scott Chen
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
RE ³ 1G	23deg. C, 69%RH	120Vac, 60Hz	Tim Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
OB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v01 r02


ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.

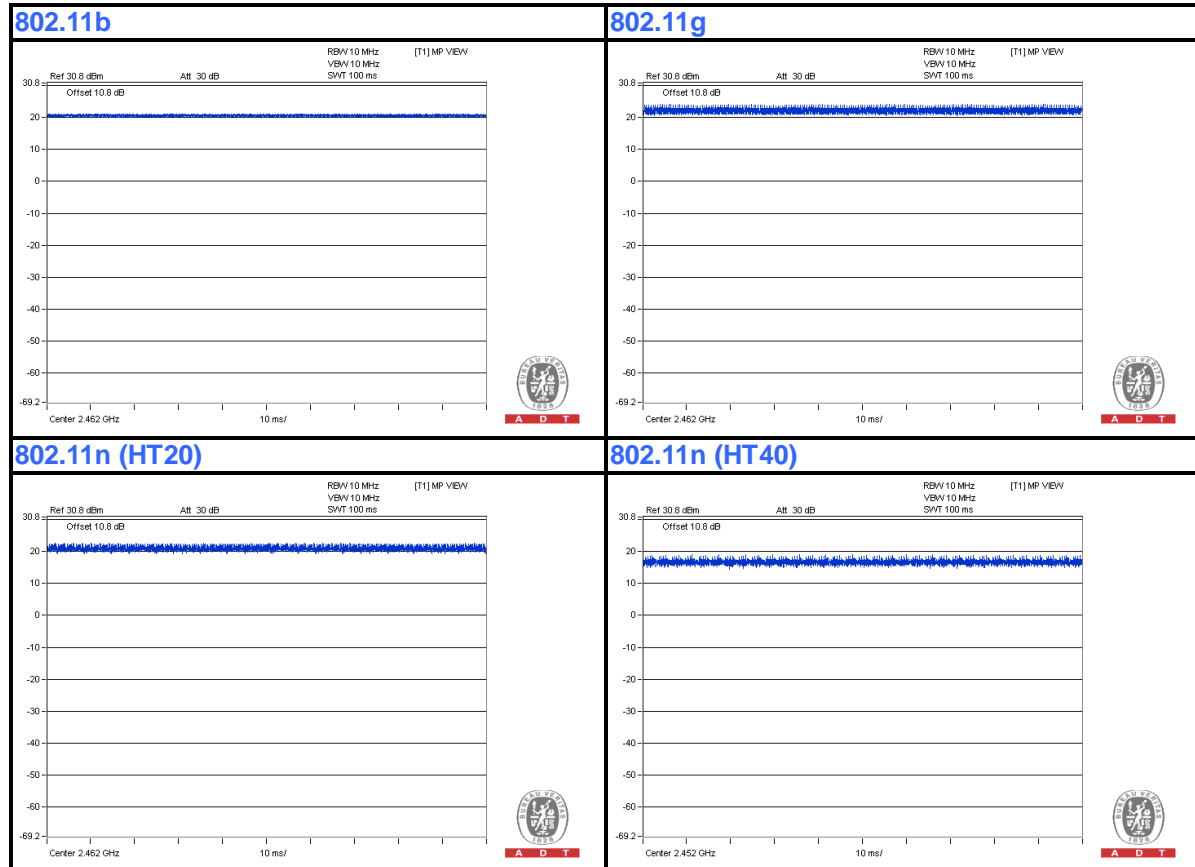

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	MONITOR	SONY	KDL-32CX520	3676813	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	HDMI cable, 1.5m

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

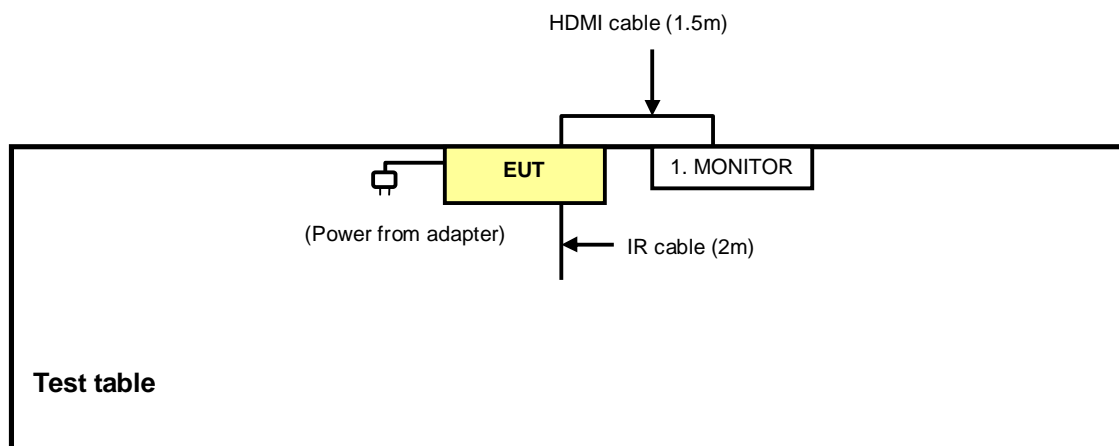

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Mar. 08, 2013	Mar. 07, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 05, 2013	Sep. 04, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 06, 2013	June 05, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 11, 2013	Mar. 10, 2014
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Sep. 13, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

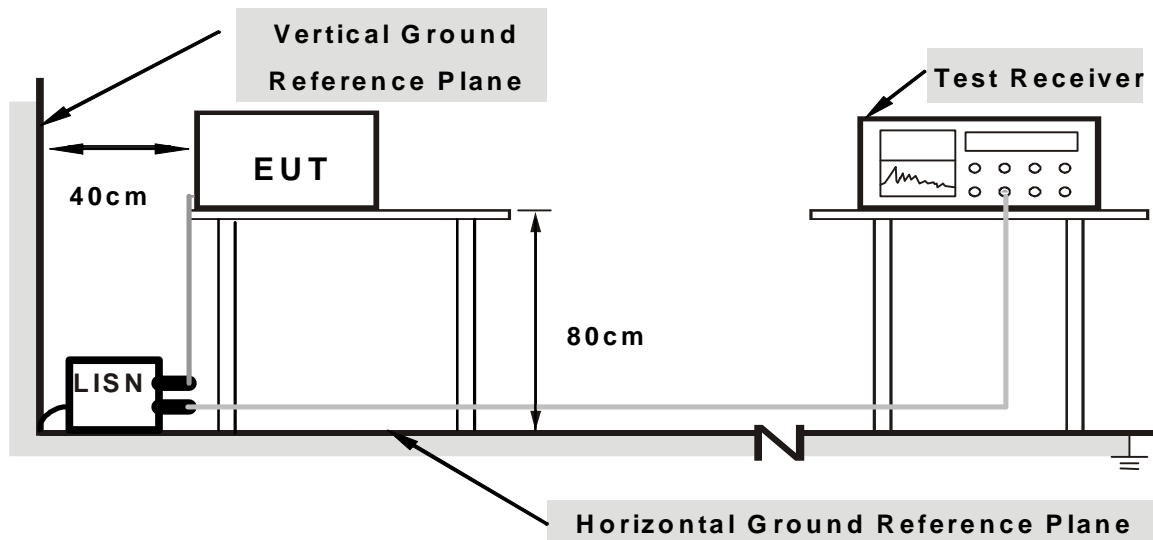

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “wl command” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9kHz
-------	----------	-------------------------------------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.13	51.71	45.78	51.84	45.91	66.00	56.00	-14.16	-10.09
2	0.40781	0.20	43.07	33.58	43.27	33.78	57.69	47.69	-14.42	-13.91
3	0.92344	0.24	34.21	25.85	34.45	26.09	56.00	46.00	-21.55	-19.91
4	1.92969	0.33	30.46	22.12	30.79	22.45	56.00	46.00	-25.21	-23.55
5	4.05469	0.47	27.65	20.26	28.12	20.73	56.00	46.00	-27.88	-25.27
6	13.55859	1.12	16.19	9.85	17.31	10.97	60.00	50.00	-42.69	-39.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

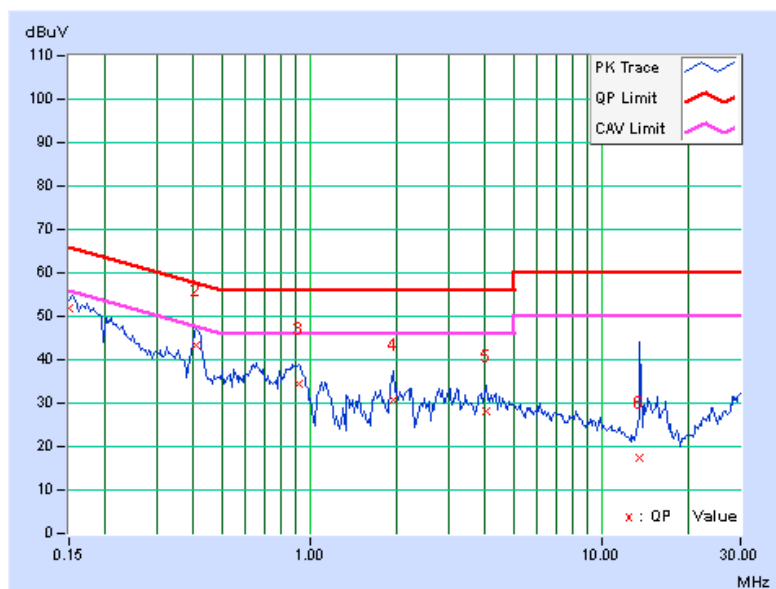


PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9kHz
-------	-------------	-------------------------------------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.11	51.71	45.74	51.82	45.85	66.00	56.00	-14.18	-10.15
2	0.23203	0.14	40.41	27.66	40.55	27.80	62.38	52.38	-21.83	-24.58
3	0.41563	0.19	37.88	30.27	38.07	30.46	57.54	47.54	-19.46	-17.07
4	0.91172	0.22	26.54	17.97	26.76	18.19	56.00	46.00	-29.24	-27.81
5	1.17188	0.23	24.78	16.89	25.01	17.12	56.00	46.00	-30.99	-28.88
6	4.17188	0.44	19.36	11.97	19.80	12.41	56.00	46.00	-36.20	-33.59

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

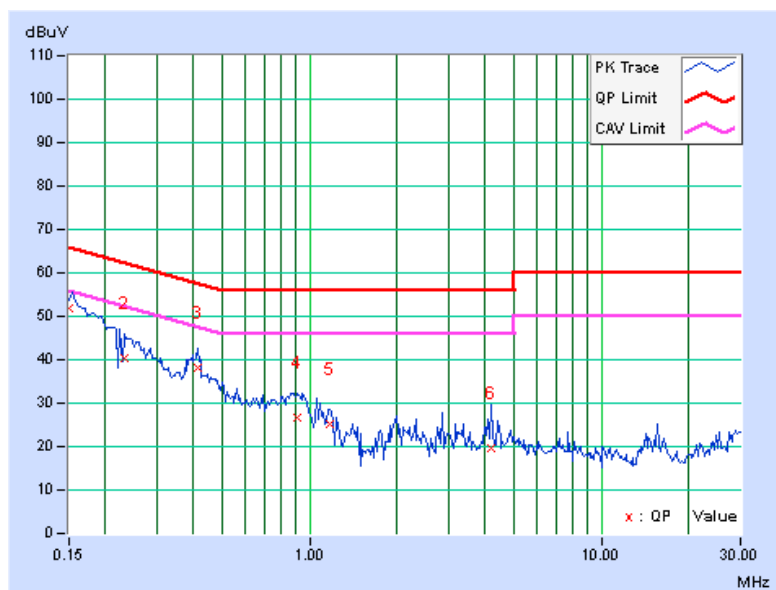

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.

4.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
Loop Antenna ^(*) R&S	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Sep. 18, 2013

**A D T****For above 1GHz test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29, 2013	Jan. 28, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Sep. 17, 2013

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

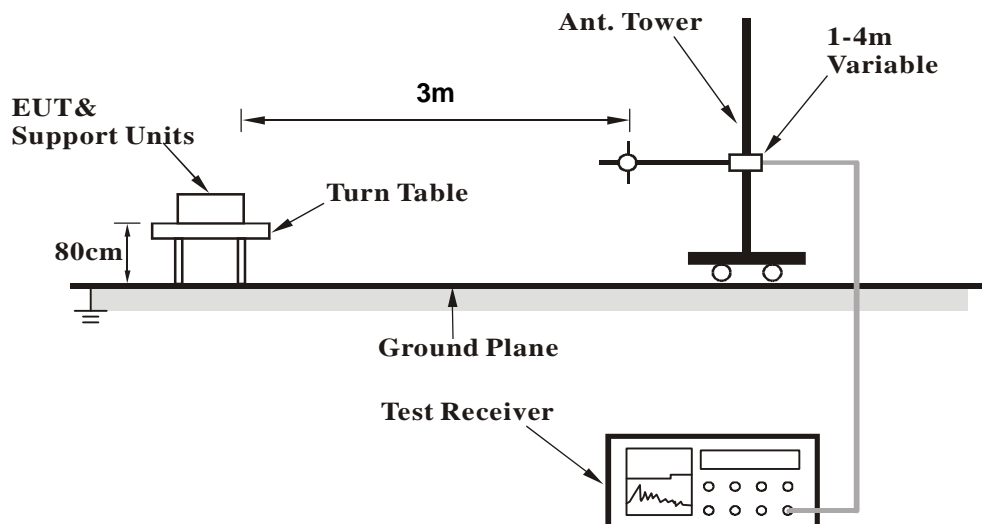

<Frequency Range above 1GHz>

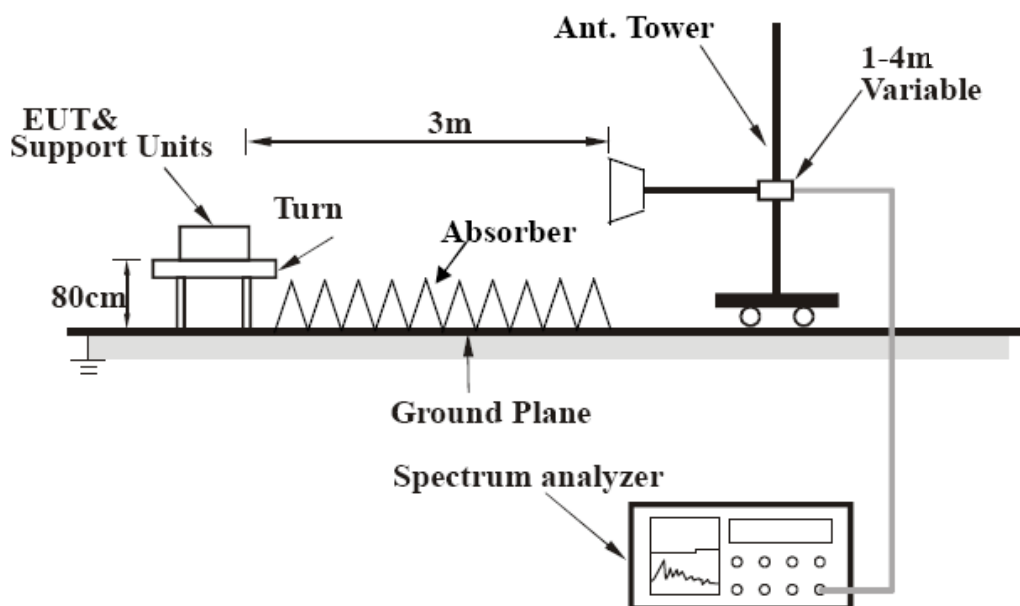

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.70	23.9 QP	40.0	-16.1	2.00 H	310	38.90	-15.04
2	93.00	31.3 QP	43.5	-12.2	2.00 H	308	50.03	-18.77
3	151.20	27.8 QP	43.5	-15.7	1.75 H	83	40.84	-13.02
4	532.46	38.7 QP	46.0	-7.3	1.50 H	24	45.93	-7.19
5	958.77	35.3 QP	46.0	-10.7	1.50 H	318	34.31	1.02
6	999.03	37.6 QP	54.0	-16.4	1.25 H	329	36.06	1.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.74	27.6 QP	40.0	-12.5	1.00 V	0	41.07	-13.52
2	64.87	33.4 QP	40.0	-6.6	1.00 V	206	47.91	-14.54
3	119.72	28.5 QP	43.5	-15.0	1.25 V	47	43.67	-15.14
4	530.91	39.1 QP	46.0	-6.9	2.00 V	360	46.23	-7.16
5	961.20	35.3 QP	54.0	-18.7	1.25 V	324	34.33	0.97
6	999.03	38.3 QP	54.0	-15.8	1.00 V	313	36.73	1.52

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.6 PK	74.0	-21.4	1.07 H	146	53.79	-1.19
2	2390.00	39.6 AV	54.0	-14.4	1.07 H	146	40.79	-1.19
3	*2412.00	93.7 PK			1.07 H	146	94.79	-1.09
4	*2412.00	90.5 AV			1.07 H	146	91.59	-1.09
5	4824.00	54.6 PK	74.0	-19.4	1.03 H	84	47.01	7.59
6	4824.00	50.2 AV	54.0	-3.8	1.03 H	84	42.61	7.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	45.8 PK	74.0	-28.2	1.00 V	164	47.01	-1.21
2	2386.00	35.0 AV	54.0	-19.0	1.00 V	164	36.21	-1.21
3	*2412.00	93.7 PK			1.00 V	164	94.79	-1.09
4	*2412.00	90.4 AV			1.00 V	164	91.49	-1.09
5	4824.00	56.5 PK	74.0	-17.5	1.00 V	314	48.91	7.59
6	4824.00	53.3 AV	54.0	-0.7	1.00 V	314	45.71	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	1.06 H	144	57.89	-1.19
2	2390.00	43.3 AV	54.0	-10.7	1.06 H	144	44.49	-1.19
3	*2437.00	97.7 PK			1.06 H	144	98.69	-0.99
4	*2437.00	95.0 AV			1.06 H	144	95.99	-0.99
5	2483.50	54.2 PK	74.0	-19.8	1.06 H	144	55.00	-0.80
6	2483.50	40.2 AV	54.0	-13.8	1.06 H	144	41.00	-0.80
7	4874.00	54.6 PK	74.0	-19.4	1.07 H	90	46.83	7.77
8	4874.00	50.1 AV	54.0	-3.9	1.07 H	90	42.33	7.77
9	7311.00	59.4 PK	74.0	-14.6	1.27 H	53	43.91	15.49
10	7311.00	50.9 AV	54.0	-3.1	1.27 H	53	35.41	15.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.5 PK	74.0	-21.5	1.19 V	127	53.69	-1.19
2	2390.00	39.6 AV	54.0	-14.4	1.19 V	127	40.79	-1.19
3	*2437.00	98.1 PK			1.19 V	127	99.09	-0.99
4	*2437.00	94.5 AV			1.19 V	127	95.49	-0.99
5	2483.50	54.0 PK	74.0	-20.0	1.19 V	127	54.80	-0.80
6	2483.50	40.4 AV	54.0	-13.6	1.19 V	127	41.20	-0.80
7	4874.00	56.8 PK	74.0	-17.2	1.37 V	310	49.03	7.77
8	4874.00	53.6 AV	54.0	-0.4	1.37 V	310	45.83	7.77
9	7311.00	60.0 PK	74.0	-14.0	1.00 V	37	44.51	15.49
10	7311.00	52.1 AV	54.0	-1.9	1.00 V	37	36.61	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1534.00	54.5 PK	74.0	-19.5	1.02 H	360	59.91	-5.41
2	1534.00	46.8 AV	54.0	-7.2	1.02 H	360	52.21	-5.41
3	*2462.00	100.4 PK			1.04 H	145	101.29	-0.89
4	*2462.00	97.7 AV			1.04 H	145	98.59	-0.89
5	2483.50	53.8 PK	74.0	-20.2	1.04 H	145	54.60	-0.80
6	2483.50	42.8 AV	54.0	-11.2	1.04 H	145	43.60	-0.80
7	4924.00	54.3 PK	74.0	-19.7	1.04 H	76	46.36	7.94
8	4924.00	49.8 AV	54.0	-4.2	1.04 H	76	41.86	7.94
9	7386.00	59.5 PK	74.0	-14.5	1.66 H	295	43.99	15.51
10	7386.00	51.5 AV	54.0	-2.5	1.66 H	295	35.99	15.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1534.00	54.4 PK	74.0	-19.6	1.35 V	262	59.81	-5.41
2	1534.00	45.0 AV	54.0	-9.0	1.35 V	262	50.41	-5.41
3	*2462.00	99.3 PK			1.40 V	87	100.19	-0.89
4	*2462.00	96.5 AV			1.40 V	87	97.39	-0.89
5	2483.50	57.8 PK	74.0	-16.2	1.40 V	87	58.60	-0.80
6	2483.50	44.9 AV	54.0	-9.1	1.40 V	87	45.70	-0.80
7	4924.00	57.2 PK	74.0	-16.8	1.00 V	6	49.26	7.94
8	4924.00	53.7 AV	54.0	-0.3	1.00 V	6	45.76	7.94
9	7386.00	59.4 PK	74.0	-14.6	1.00 V	36	43.89	15.51
10	7386.00	50.7 AV	54.0	-3.3	1.00 V	36	35.19	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.07 H	145	62.99	-1.19
2	2390.00	44.6 AV	54.0	-9.4	1.07 H	145	45.79	-1.19
3	*2412.00	100.1 PK			1.07 H	145	101.19	-1.09
4	*2412.00	90.5 AV			1.07 H	145	91.59	-1.09
5	4824.00	51.6 PK	74.0	-22.4	1.18 H	223	44.01	7.59
6	4824.00	39.0 AV	54.0	-15.0	1.18 H	223	31.41	7.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.44 V	87	62.39	-1.19
2	2390.00	44.5 AV	54.0	-9.5	1.44 V	87	45.69	-1.19
3	*2412.00	98.8 PK			1.44 V	87	99.89	-1.09
4	*2412.00	89.9 AV			1.44 V	87	90.99	-1.09
5	4824.00	54.9 PK	74.0	-19.1	1.16 V	143	47.31	7.59
6	4824.00	41.3 AV	54.0	-12.7	1.16 V	143	33.71	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.8 PK	74.0	-26.2	1.06 H	144	48.99	-1.19
2	2390.00	34.5 AV	54.0	-19.5	1.06 H	144	35.69	-1.19
3	*2437.00	102.3 PK			1.06 H	144	103.29	-0.99
4	*2437.00	92.4 AV			1.06 H	144	93.39	-0.99
5	2483.50	51.8 PK	74.0	-22.2	1.06 H	144	52.60	-0.80
6	2483.50	38.0 AV	54.0	-16.0	1.06 H	144	38.80	-0.80
7	4874.00	51.9 PK	74.0	-22.1	1.18 H	236	44.13	7.77
8	4874.00	38.9 AV	54.0	-15.1	1.18 H	236	31.13	7.77
9	7311.00	61.3 PK	74.0	-12.7	1.13 H	248	45.81	15.49
10	7311.00	47.8 AV	54.0	-6.2	1.13 H	248	32.31	15.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.0 PK	74.0	-27.0	1.42 V	72	48.19	-1.19
2	2390.00	34.1 AV	54.0	-19.9	1.42 V	72	35.29	-1.19
3	*2437.00	101.4 PK			1.42 V	72	102.39	-0.99
4	*2437.00	92.0 AV			1.42 V	72	92.99	-0.99
5	2483.50	51.0 PK	74.0	-23.0	1.42 V	72	51.80	-0.80
6	2483.50	37.8 AV	54.0	-16.2	1.42 V	72	38.60	-0.80
7	4874.00	55.5 PK	74.0	-18.5	1.18 V	147	47.73	7.77
8	4874.00	42.1 AV	54.0	-11.9	1.18 V	147	34.33	7.77
9	7311.00	60.9 PK	74.0	-13.1	1.11 V	253	45.41	15.49
10	7311.00	48.0 AV	54.0	-6.0	1.11 V	253	32.51	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.9 PK			1.04 H	144	103.79	-0.89
2	*2462.00	93.5 AV			1.04 H	144	94.39	-0.89
3	2483.50	70.7 PK	74.0	-3.3	1.04 H	144	71.50	-0.80
4	2483.50	53.3 AV	54.0	-0.7	1.04 H	144	54.10	-0.80
5	4924.00	51.9 PK	74.0	-22.1	1.18 H	215	43.96	7.94
6	4924.00	39.2 AV	54.0	-14.8	1.18 H	215	31.26	7.94
7	7386.00	60.7 PK	74.0	-13.3	1.15 H	230	45.19	15.51
8	7386.00	47.4 AV	54.0	-6.6	1.15 H	230	31.89	15.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.6 PK			1.39 V	76	103.49	-0.89
2	*2462.00	93.4 AV			1.39 V	76	94.29	-0.89
3	2483.50	69.3 PK	74.0	-4.7	1.39 V	76	70.10	-0.80
4	2483.50	52.5 AV	54.0	-1.5	1.39 V	76	53.30	-0.80
5	4924.00	54.5 PK	74.0	-19.5	1.24 V	135	46.56	7.94
6	4924.00	41.2 AV	54.0	-12.8	1.24 V	135	33.26	7.94
7	7386.00	60.8 PK	74.0	-13.2	1.11 V	234	45.29	15.51
8	7386.00	48.0 AV	54.0	-6.0	1.11 V	234	32.49	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	1.10 H	146	61.39	-1.19
2	2390.00	43.6 AV	54.0	-10.4	1.10 H	146	44.79	-1.19
3	*2412.00	100.3 PK			1.10 H	146	101.39	-1.09
4	*2412.00	90.5 AV			1.10 H	146	91.59	-1.09
5	4824.00	51.2 PK	74.0	-22.8	1.13 H	244	43.61	7.59
6	4824.00	38.4 AV	54.0	-15.6	1.13 H	244	30.81	7.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.41 V	65	59.79	-1.19
2	2390.00	42.7 AV	54.0	-11.3	1.41 V	65	43.89	-1.19
3	*2412.00	99.1 PK			1.41 V	65	100.19	-1.09
4	*2412.00	89.8 AV			1.41 V	65	90.89	-1.09
5	4824.00	54.8 PK	74.0	-19.2	1.24 V	151	47.21	7.59
6	4824.00	41.7 AV	54.0	-12.3	1.24 V	151	34.11	7.59

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.07 H	324	58.09	-1.19
2	2390.00	43.9 AV	54.0	-10.1	1.07 H	324	45.09	-1.19
3	*2437.00	102.5 PK			1.07 H	324	103.49	-0.99
4	*2437.00	93.0 AV			1.07 H	324	93.99	-0.99
5	2483.50	56.7 PK	74.0	-17.3	1.07 H	324	57.50	-0.80
6	2483.50	44.6 AV	54.0	-9.4	1.07 H	324	45.40	-0.80
7	4874.00	51.4 PK	74.0	-22.6	1.15 H	228	43.63	7.77
8	4874.00	38.7 AV	54.0	-15.3	1.15 H	228	30.93	7.77
9	7311.00	61.1 PK	74.0	-12.9	1.11 H	245	45.61	15.49
10	7311.00	47.5 AV	54.0	-6.5	1.11 H	245	32.01	15.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.40 V	55	56.99	-1.19
2	2390.00	43.0 AV	54.0	-11.0	1.40 V	55	44.19	-1.19
3	*2437.00	101.8 PK			1.40 V	55	102.79	-0.99
4	*2437.00	92.7 AV			1.40 V	55	93.69	-0.99
5	2483.50	55.8 PK	74.0	-18.2	1.40 V	55	56.60	-0.80
6	2483.50	44.4 AV	54.0	-9.6	1.40 V	55	45.20	-0.80
7	4874.00	55.1 PK	74.0	-18.9	1.22 V	138	47.33	7.77
8	4874.00	41.7 AV	54.0	-12.3	1.22 V	138	33.93	7.77
9	7311.00	61.3 PK	74.0	-12.7	1.11 V	245	45.81	15.49
10	7311.00	48.4 AV	54.0	-5.6	1.11 V	245	32.91	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK			1.07 H	323	105.09	-0.89
2	*2462.00	94.7 AV			1.07 H	323	95.59	-0.89
3	2483.50	62.6 PK	74.0	-11.4	1.07 H	323	63.40	-0.80
4	2483.50	47.4 AV	54.0	-6.6	1.07 H	323	48.20	-0.80
5	4924.00	51.7 PK	74.0	-22.3	1.13 H	243	43.76	7.94
6	4924.00	39.2 AV	54.0	-14.8	1.13 H	243	31.26	7.94
7	7386.00	61.2 PK	74.0	-12.8	1.16 H	247	45.69	15.51
8	7386.00	47.8 AV	54.0	-6.2	1.16 H	247	32.29	15.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.3 PK			1.39 V	53	104.19	-0.89
2	*2462.00	94.4 AV			1.39 V	53	95.29	-0.89
3	2483.50	61.3 PK	74.0	-12.7	1.39 V	53	62.10	-0.80
4	2483.50	46.7 AV	54.0	-7.3	1.39 V	53	47.50	-0.80
5	4924.00	54.7 PK	74.0	-19.3	1.27 V	139	46.76	7.94
6	4924.00	41.6 AV	54.0	-12.4	1.27 V	139	33.66	7.94
7	7386.00	61.0 PK	74.0	-13.0	1.05 V	232	45.49	15.51
8	7386.00	48.1 AV	54.0	-5.9	1.05 V	232	32.59	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.2 PK	74.0	-20.8	1.07 H	327	54.39	-1.19
2	2390.00	41.5 AV	54.0	-12.5	1.07 H	327	42.69	-1.19
3	*2422.00	97.2 PK			1.07 H	327	98.25	-1.05
4	*2422.00	88.2 AV			1.07 H	327	89.25	-1.05
5	4844.00	51.2 PK	74.0	-22.8	1.12 H	228	43.54	7.66
6	4844.00	38.4 AV	54.0	-15.6	1.12 H	228	30.74	7.66
7	7266.00	60.9 PK	74.0	-13.1	1.14 H	244	45.39	15.51
8	7266.00	47.1 AV	54.0	-6.9	1.14 H	244	31.59	15.51
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.4 PK	74.0	-21.6	1.45 V	67	53.59	-1.19
2	2390.00	41.3 AV	54.0	-12.7	1.45 V	67	42.49	-1.19
3	*2422.00	96.4 PK			1.45 V	67	97.45	-1.05
4	*2422.00	88.1 AV			1.45 V	67	89.15	-1.05
5	4844.00	54.9 PK	74.0	-19.1	1.18 V	131	47.24	7.66
6	4844.00	41.8 AV	54.0	-12.2	1.18 V	131	34.14	7.66
7	7266.00	61.8 PK	74.0	-12.2	1.07 V	259	46.29	15.51
8	7266.00	48.8 AV	54.0	-5.2	1.07 V	259	33.29	15.51

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.08 H	327	58.09	-1.19
2	2390.00	43.8 AV	54.0	-10.2	1.08 H	327	44.99	-1.19
3	*2437.00	98.1 PK			1.08 H	327	99.09	-0.99
4	*2437.00	88.8 AV			1.08 H	327	89.79	-0.99
5	2483.50	61.0 PK	74.0	-13.0	1.08 H	327	61.80	-0.80
6	2483.50	46.7 AV	54.0	-7.3	1.08 H	327	47.50	-0.80
7	4874.00	52.0 PK	74.0	-22.0	1.14 H	230	44.23	7.77
8	4874.00	39.2 AV	54.0	-14.8	1.14 H	230	31.43	7.77
9	7311.00	61.4 PK	74.0	-12.6	1.16 H	229	45.91	15.49
10	7311.00	47.5 AV	54.0	-6.5	1.16 H	229	32.01	15.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.47 V	74	56.99	-1.19
2	2390.00	43.0 AV	54.0	-11.0	1.47 V	74	44.19	-1.19
3	*2437.00	96.9 PK			1.47 V	74	97.89	-0.99
4	*2437.00	88.0 AV			1.47 V	74	88.99	-0.99
5	2483.50	60.5 PK	74.0	-13.5	1.47 V	74	61.30	-0.80
6	2483.50	46.6 AV	54.0	-7.4	1.47 V	74	47.40	-0.80
7	4874.00	55.0 PK	74.0	-19.0	1.20 V	143	47.23	7.77
8	4874.00	41.7 AV	54.0	-12.3	1.20 V	143	33.93	7.77
9	7311.00	61.0 PK	74.0	-13.0	1.06 V	235	45.51	15.49
10	7311.00	48.3 AV	54.0	-5.7	1.06 V	235	32.81	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.1 PK			1.08 H	327	100.02	-0.92
2	*2452.00	89.5 AV			1.08 H	327	90.42	-0.92
3	2483.50	62.1 PK	74.0	-11.9	1.08 H	327	62.90	-0.80
4	2483.50	47.2 AV	54.0	-6.8	1.08 H	327	48.00	-0.80
5	4904.00	51.5 PK	74.0	-22.5	1.12 H	224	43.62	7.88
6	4904.00	39.0 AV	54.0	-15.0	1.12 H	224	31.12	7.88
7	7356.00	60.5 PK	74.0	-13.5	1.10 H	232	45.01	15.49
8	7356.00	47.1 AV	54.0	-6.9	1.10 H	232	31.61	15.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.1 PK			1.49 V	64	99.02	-0.92
2	*2452.00	89.0 AV			1.49 V	64	89.92	-0.92
3	2483.50	61.3 PK	74.0	-12.7	1.49 V	64	62.10	-0.80
4	2483.50	46.6 AV	54.0	-7.4	1.49 V	64	47.40	-0.80
5	4904.00	55.1 PK	74.0	-18.9	1.20 V	127	47.22	7.88
6	4904.00	41.5 AV	54.0	-12.5	1.20 V	127	33.62	7.88
7	7356.00	61.0 PK	74.0	-13.0	1.08 V	250	45.51	15.49
8	7356.00	48.2 AV	54.0	-5.8	1.08 V	250	32.71	15.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 16, 2013


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.23	0.5	PASS
6	2437	10.22	0.5	PASS
11	2462	10.23	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.62	0.5	PASS
6	2437	16.59	0.5	PASS
11	2462	16.58	0.5	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.82	17.82	0.5	PASS
6	2437	17.82	17.82	0.5	PASS
11	2462	17.81	17.80	0.5	PASS

802.11n (HT40)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.53	36.50	0.5	PASS
6	2437	36.59	36.57	0.5	PASS
9	2452	36.55	36.54	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH6

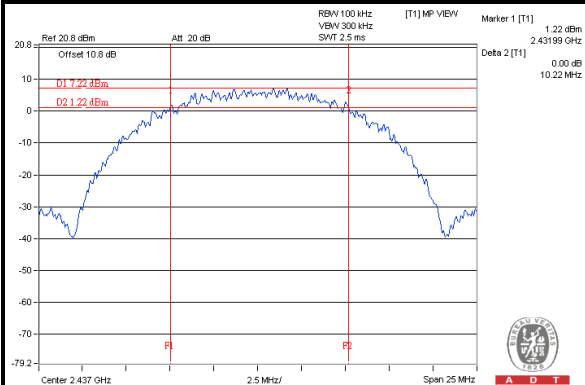


802.11g / CH1

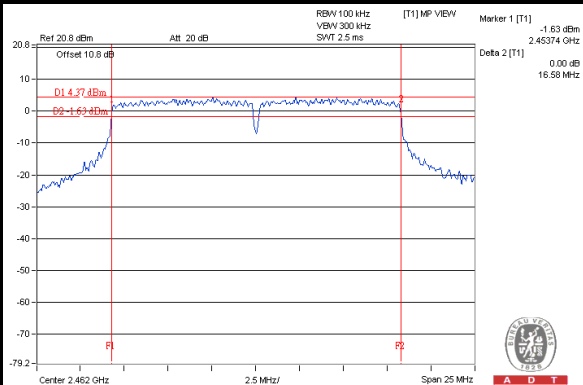

802.11n (HT20) / CH11 <chain 1>

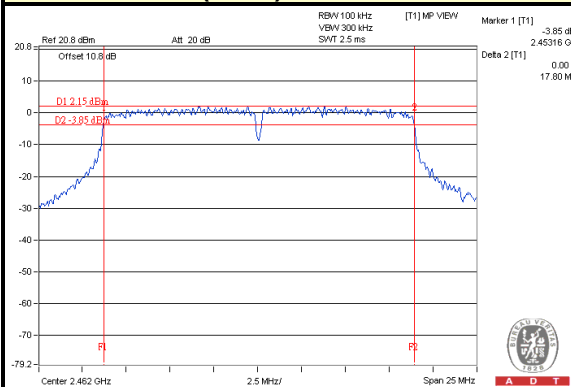

802.11n (HT40) / CH3 <chain 1>

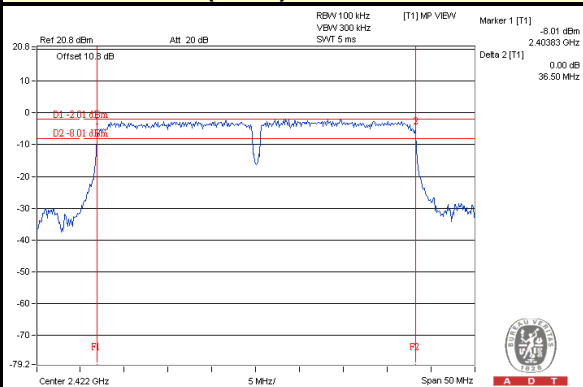

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter Anritsu	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor Anritsu	MA2411B	0738172	May 20, 2013	May 19, 2014

- Note:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested date : Sep. 16, 2013


4.4.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

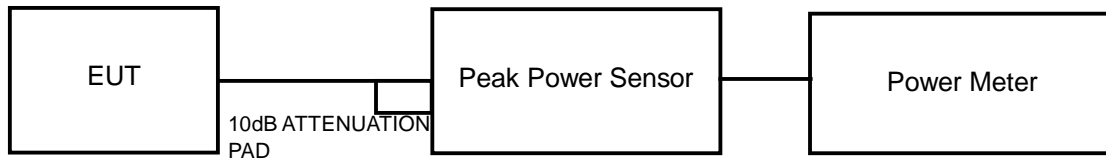

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	70.146	18.46	30	PASS
6	2437	121.339	20.84	30	PASS
11	2462	162.555	22.11	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	338.844	25.30	30	PASS
6	2437	371.535	25.70	30	PASS
11	2462	394.457	25.96	30	PASS

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	25.38	24.83	649.233	28.12	30	PASS
6	2437	24.76	24.67	592.315	27.73	30	PASS
11	2462	25.48	25.13	679.020	28.32	30	PASS

802.11n (HT40)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	24.15	24.85	565.508	27.52	30	PASS
6	2437	24.28	24.22	532.158	27.26	30	PASS
9	2452	24.05	24.63	544.499	27.36	30	PASS

4.5 AVERAGE OUTPUT POWER

4.5.1 FOR REFERENCE.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor	MA2411B	0738172	May 20, 2013	May 19, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 16, 2013

4.5.3 TEST PROCEDURES

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.4 TEST SETUP

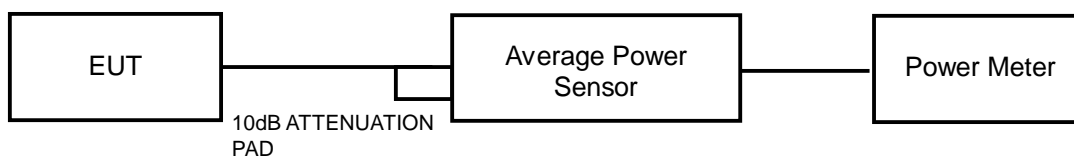

4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.5.6 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	42.658	16.30
6	2437	75.162	18.76
11	2462	101.625	20.07

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	74.645	18.73
6	2437	82.794	19.18
11	2462	87.297	19.41

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	18.01	17.85	124.195	20.94
6	2437	18.76	18.46	145.308	21.62
11	2462	18.81	17.77	135.874	21.33

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	17.33	17.46	109.794	20.41
6	2437	17.37	17.01	104.810	20.20
9	2452	17.61	17.08	108.727	20.36

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 16, 2013


4.6.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS /FAIL
1	2412	-8.96	8	PASS
6	2437	-6.20	8	PASS
11	2462	-4.96	8	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	LIMIT (dBm/3kHz)	PASS /FAIL
1	2412	-10.94	8	PASS
6	2437	-10.64	8	PASS
11	2462	-10.42	8	PASS

802.11n (HT20)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-12.41	3.01	-9.40	8	PASS
	6	2437	-12.29	3.01	-9.28	8	PASS
	11	2462	-11.61	3.01	-8.60	8	PASS
1	1	2412	-13.02	3.01	-10.01	8	PASS
	6	2437	-11.65	3.01	-8.64	8	PASS
	11	2462	-12.02	3.01	-9.01	8	PASS

802.11n (HT40)


TX chain	Channel	FREQ. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-15.63	3.01	-12.62	8	PASS
	6	2437	-15.03	3.01	-12.02	8	PASS
	9	2452	-13.97	3.01	-10.96	8	PASS
1	3	2422	-14.23	3.01	-11.22	8	PASS
	6	2437	-15.67	3.01	-12.66	8	PASS
	9	2452	-15.12	3.01	-12.11	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH11

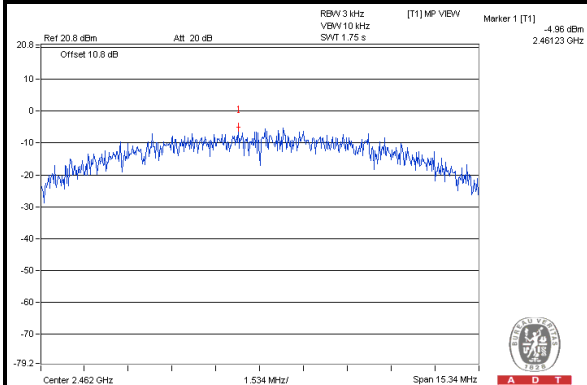


802.11g / CH11

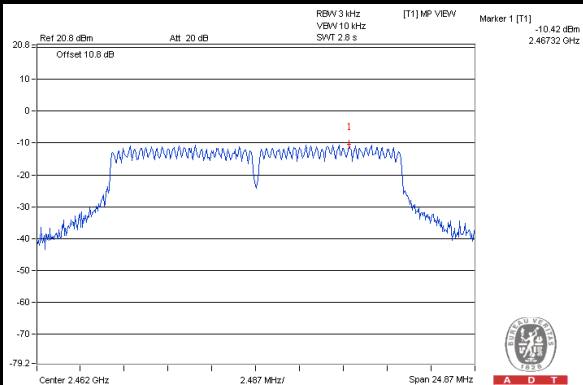

802.11n (HT20) / CH11 <chain 0>

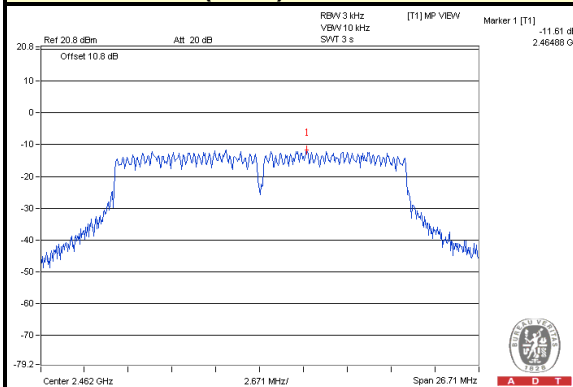

802.11n (HT40) / CH9 <chain 0>

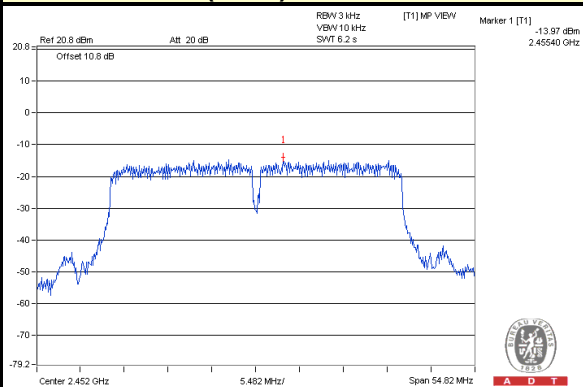



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 16, 2013

4.7.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement




A D T

802.11b:


CH 1

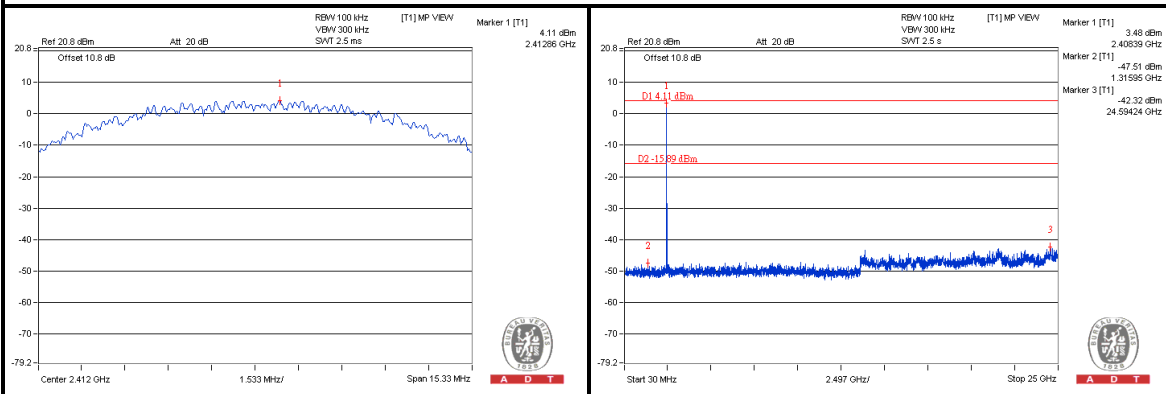

CH 6

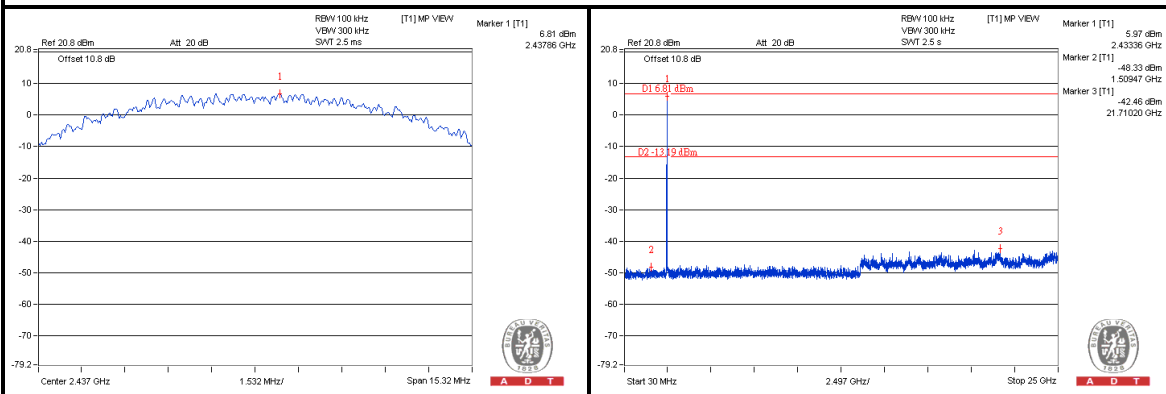


CH 11

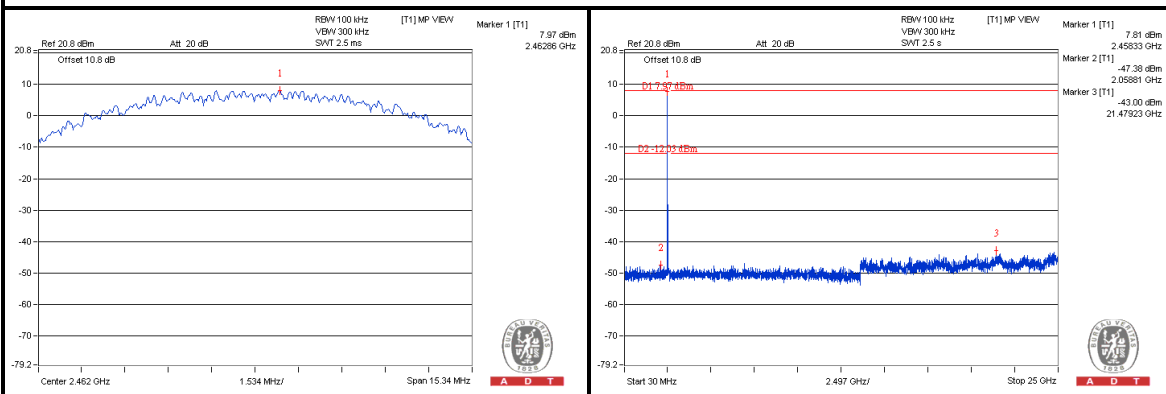


802.11b:

CH 1 Band edge

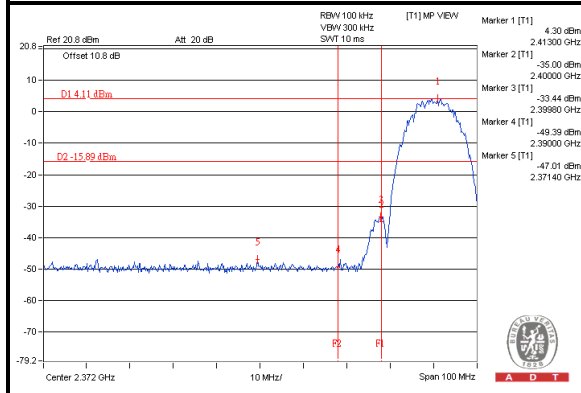

CH 11 Band edge


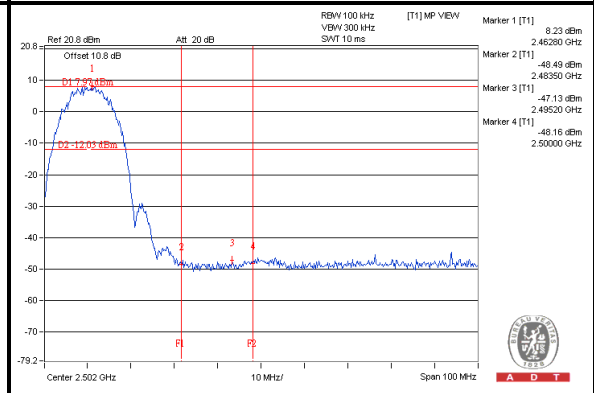






A D T

802.11g:



CH 1

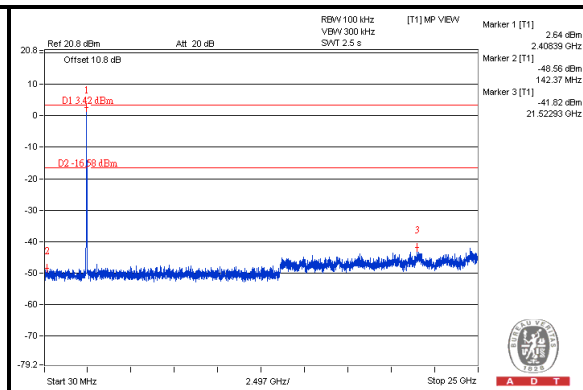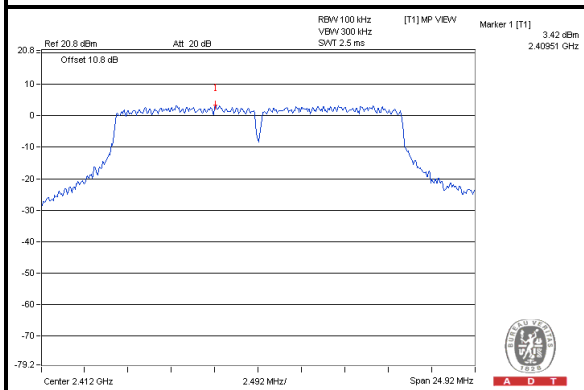

CH 6

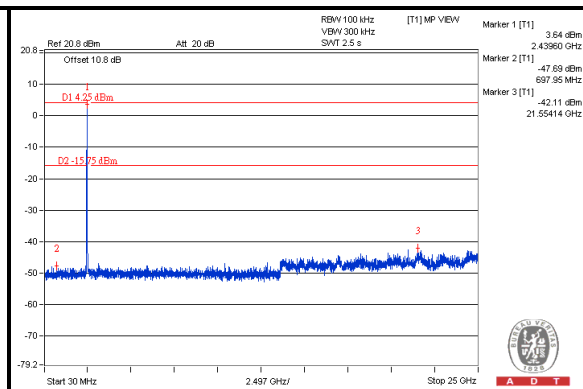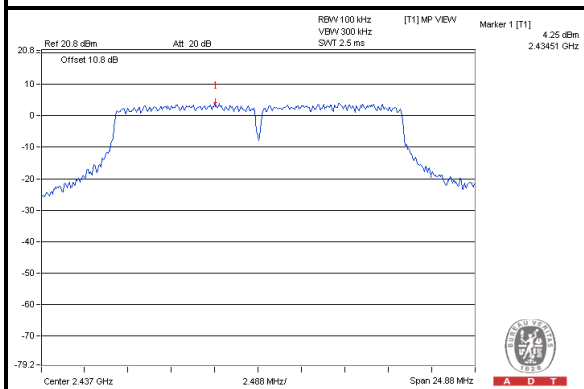


CH 11

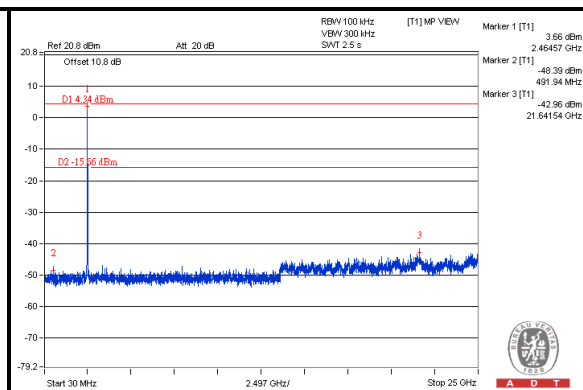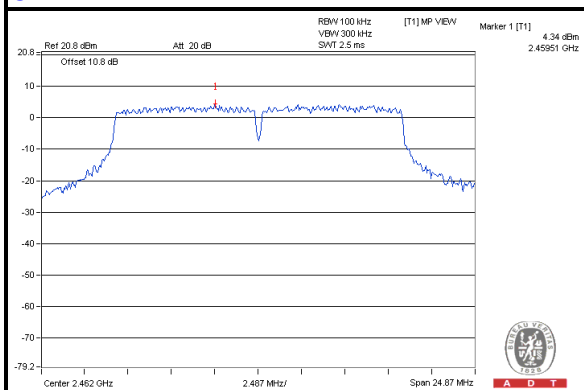


802.11g:

CH 1 Band edge

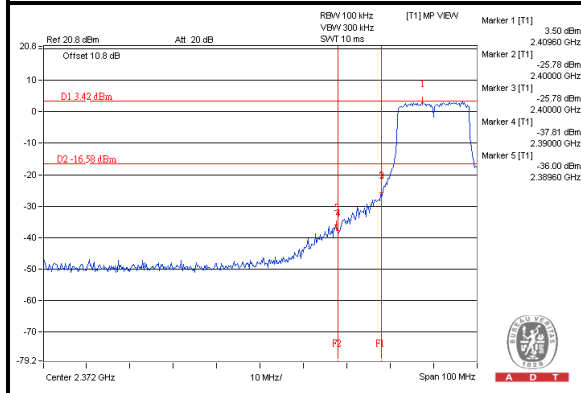

CH 11 Band edge

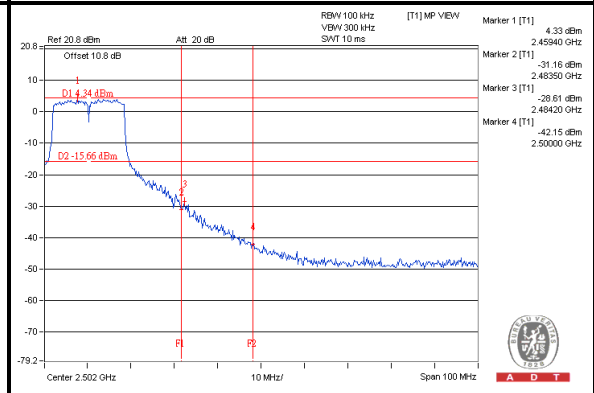




A D T


802.11n (HT20):

CHAIN (0)


CH 1

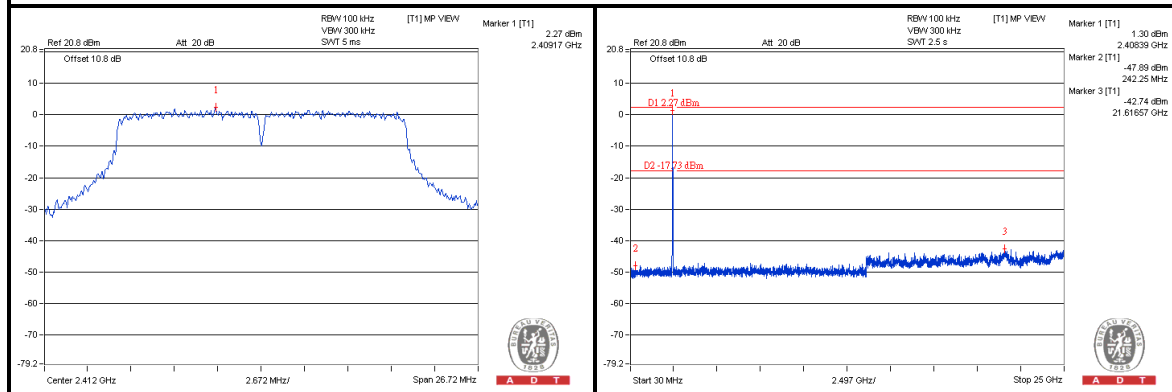

CH 6

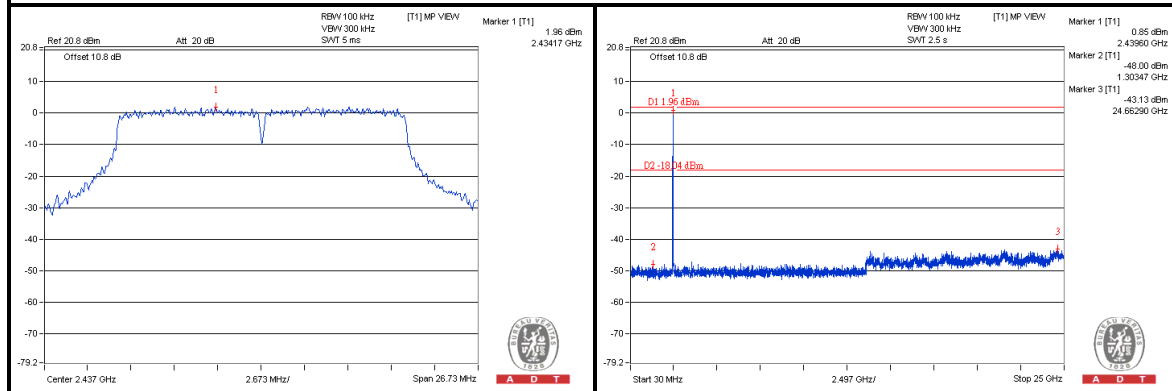


CH 11

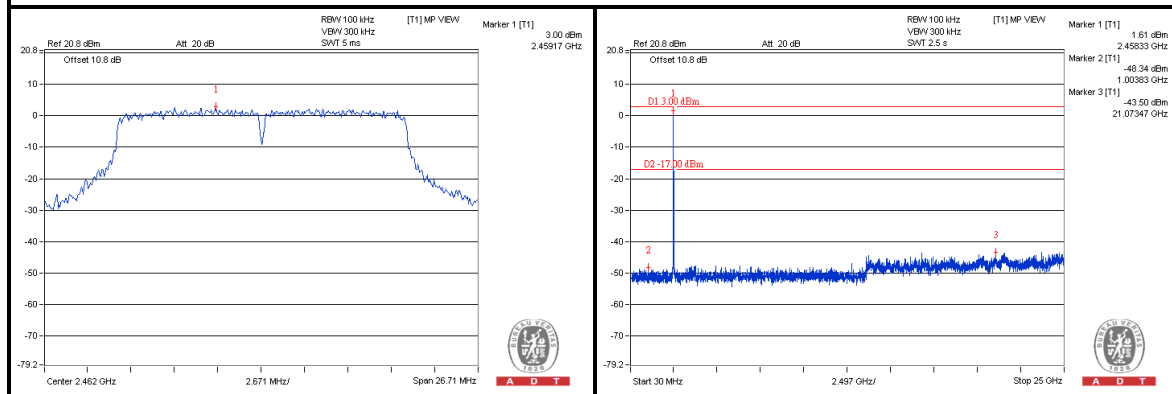


802.11n (HT20):

CHAIN (0)

CH 1 Band edge

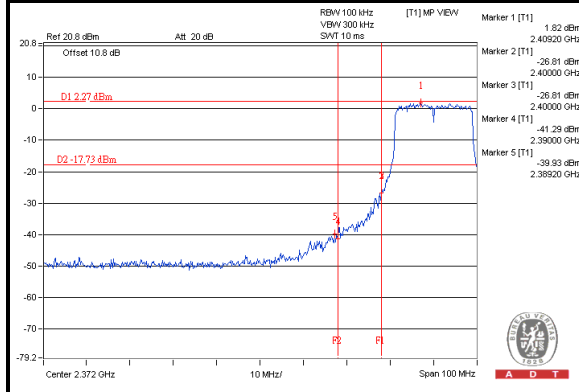

CH 11 Band edge

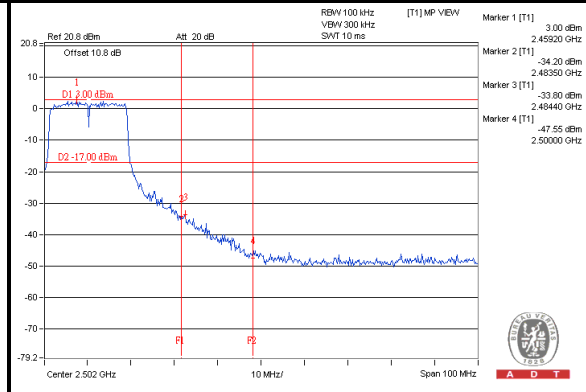





A D T

CHAIN (1)


CH 1

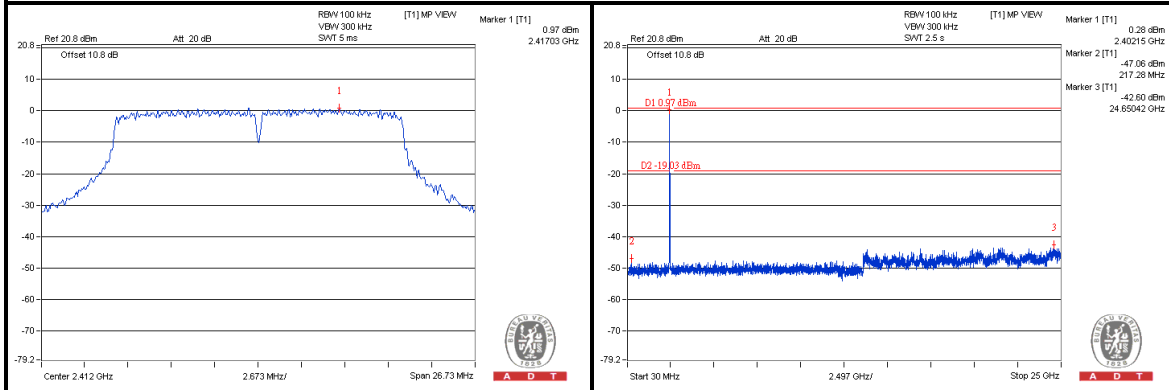

CH 6

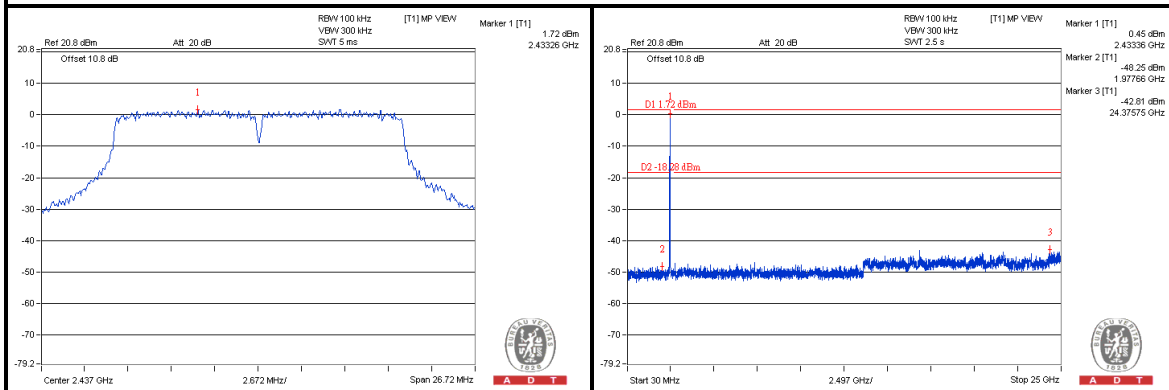


CH 11

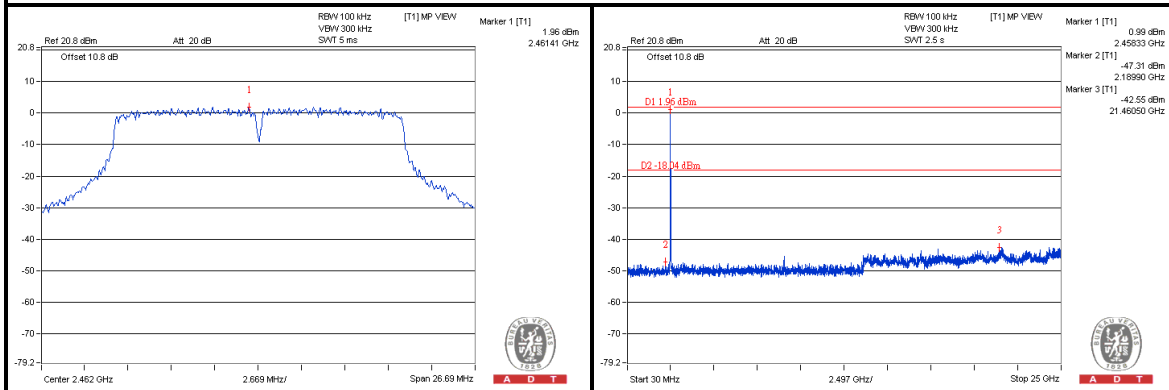


802.11n (HT20):

CHAIN (1)

CH 1 Band edge

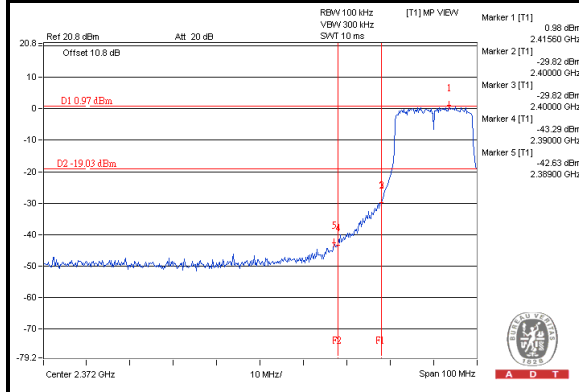


CH 11 Band edge

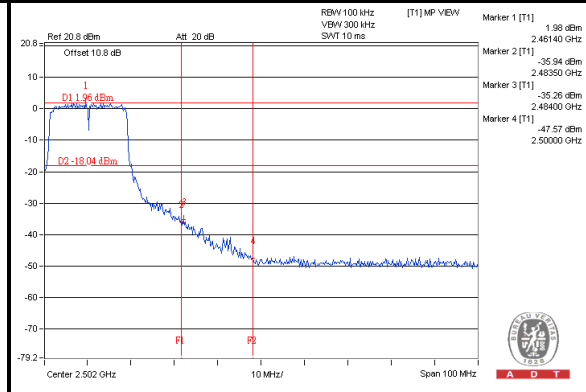


802.11n (HT40):

CHAIN (0)


CH 3

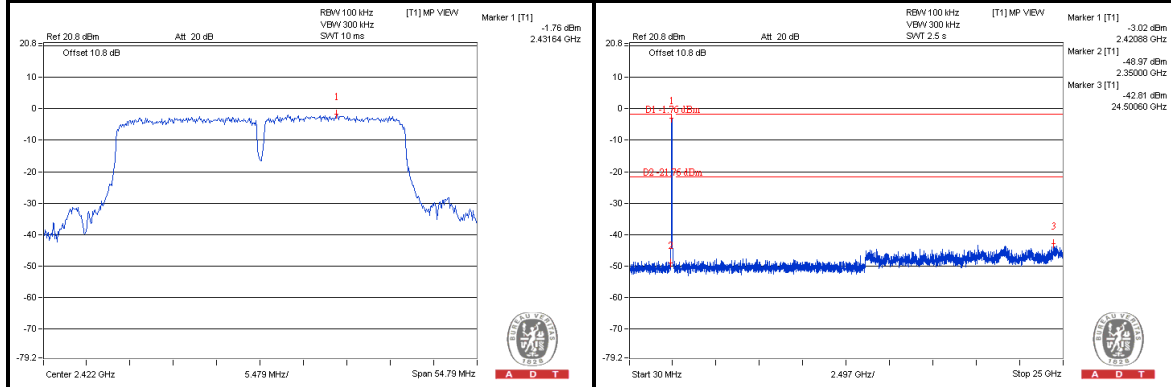

CH 6

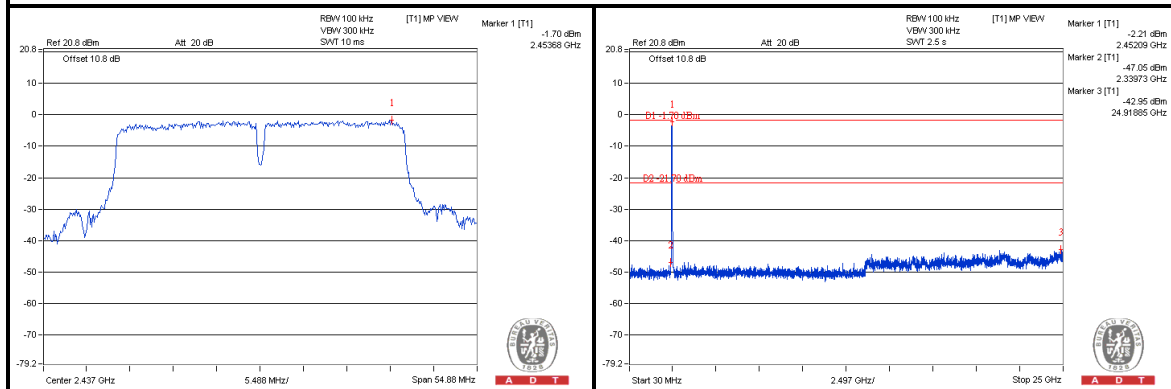


CH 9

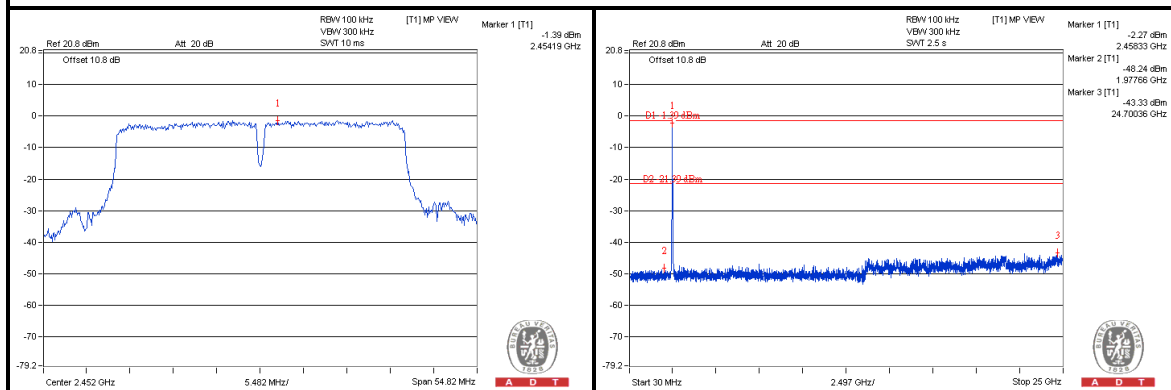


802.11n (HT40):

CHAIN (0)

CH 3 Band edge

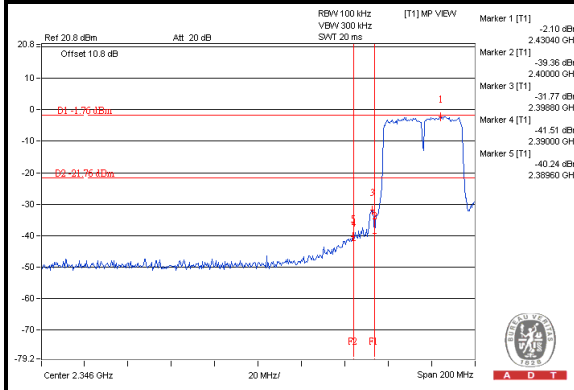

CH 9 Band edge


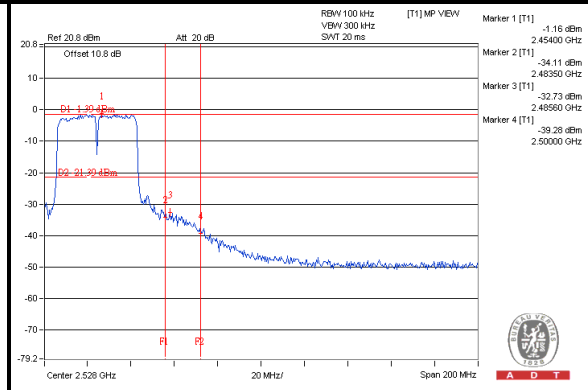






A D T

CHAIN (1)



CH 3

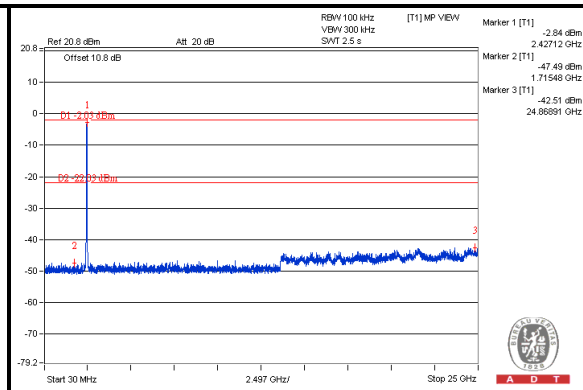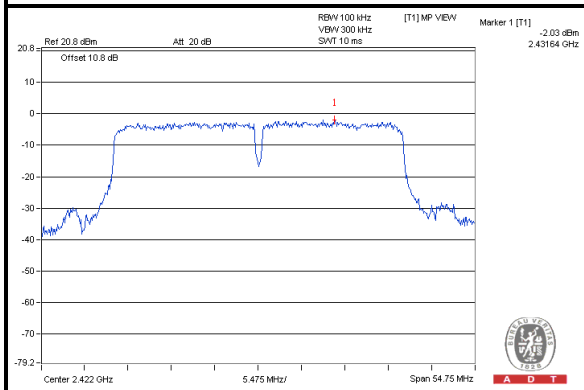

CH 6

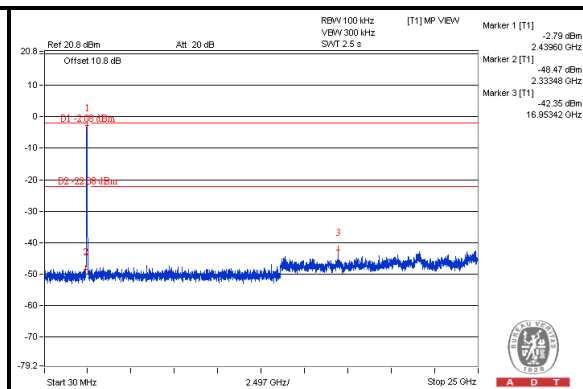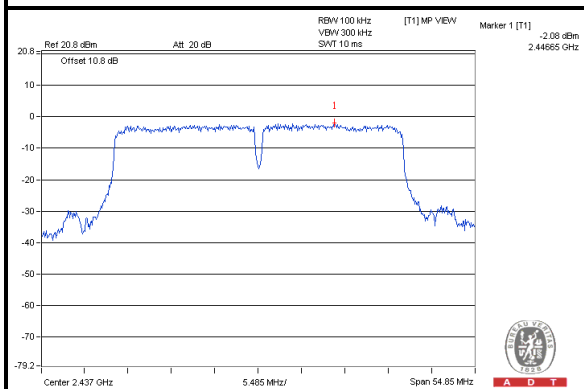


CH 9

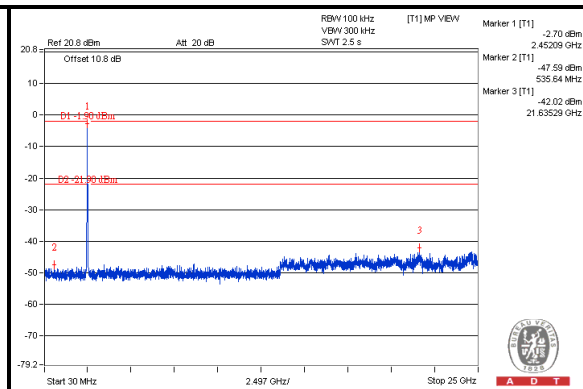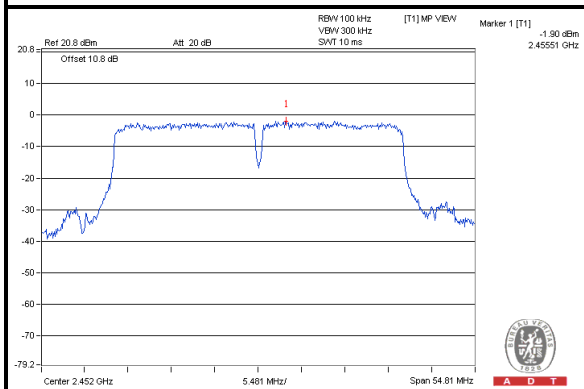


802.11n (HT40):

CHAIN (1)

CH 3 Band edge

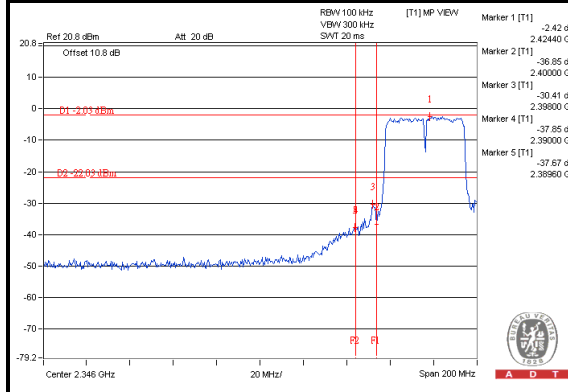

CH 9 Band edge

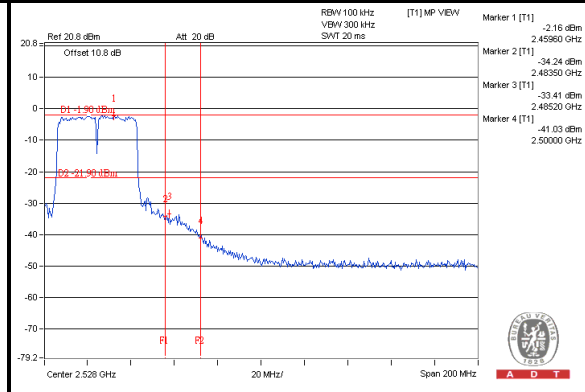

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---