





**FCC ID: 2AAVGHMG1616A**  
**IC: 11349A-HMG1616A**

# Label





**FCC ID: 2AAVGHMG1616A**  
**IC: 11349A-HMG1616A**

**Silkscreened on the EUT**

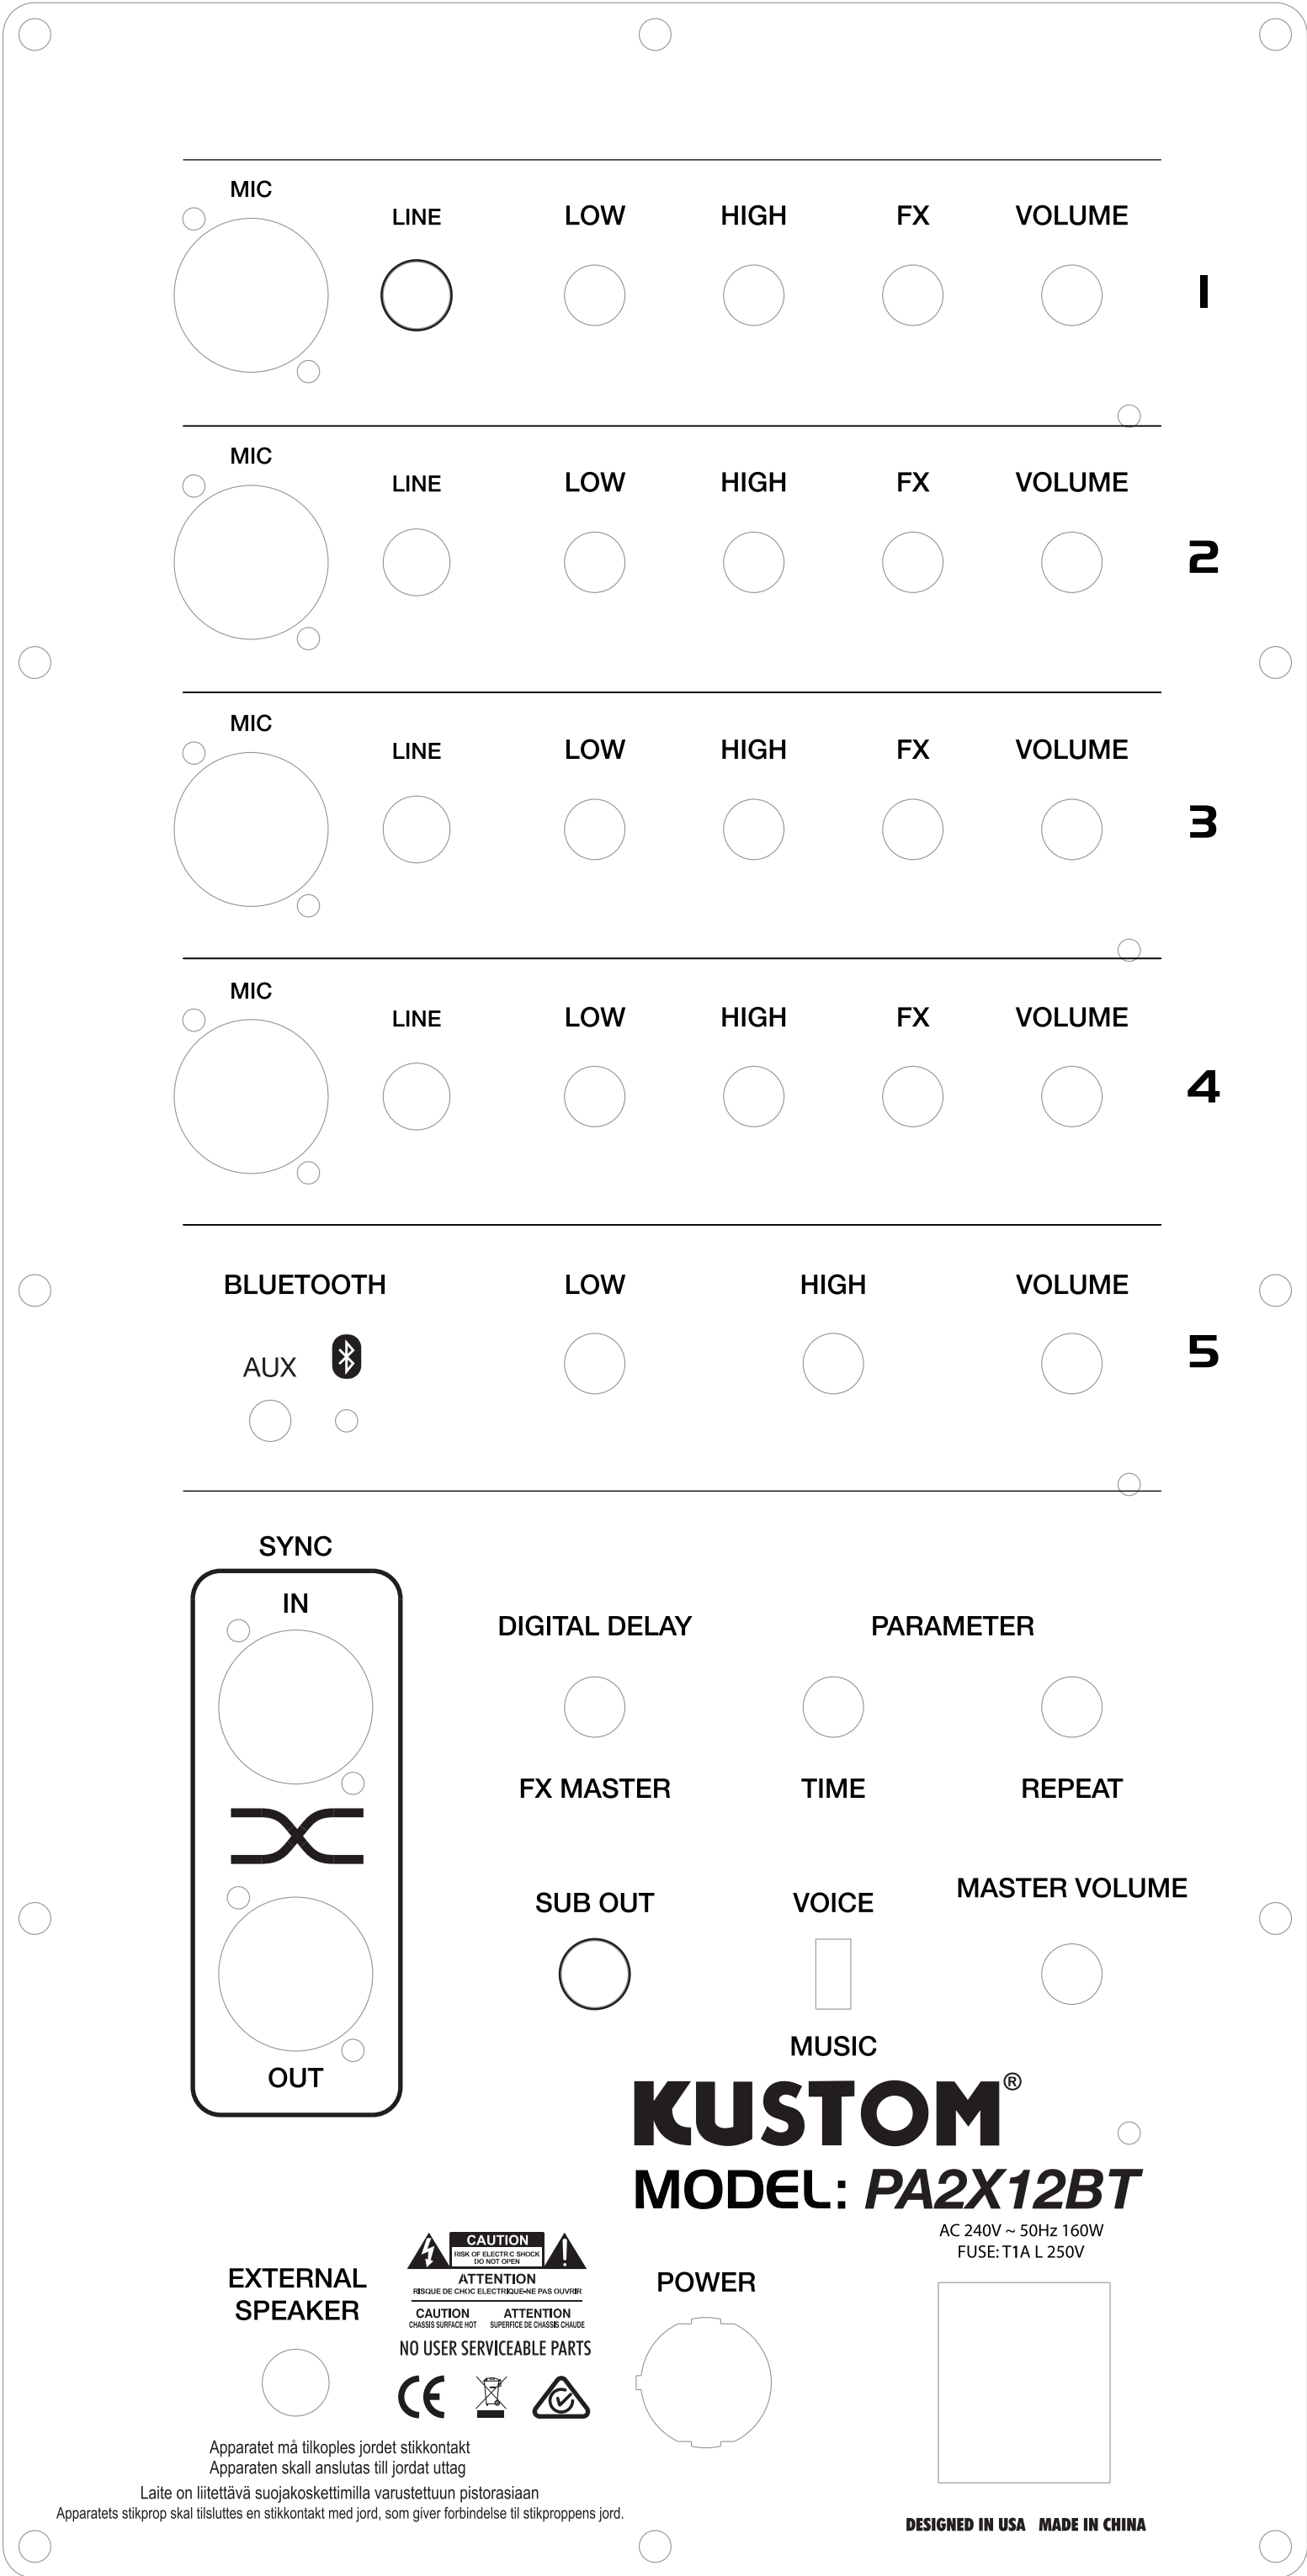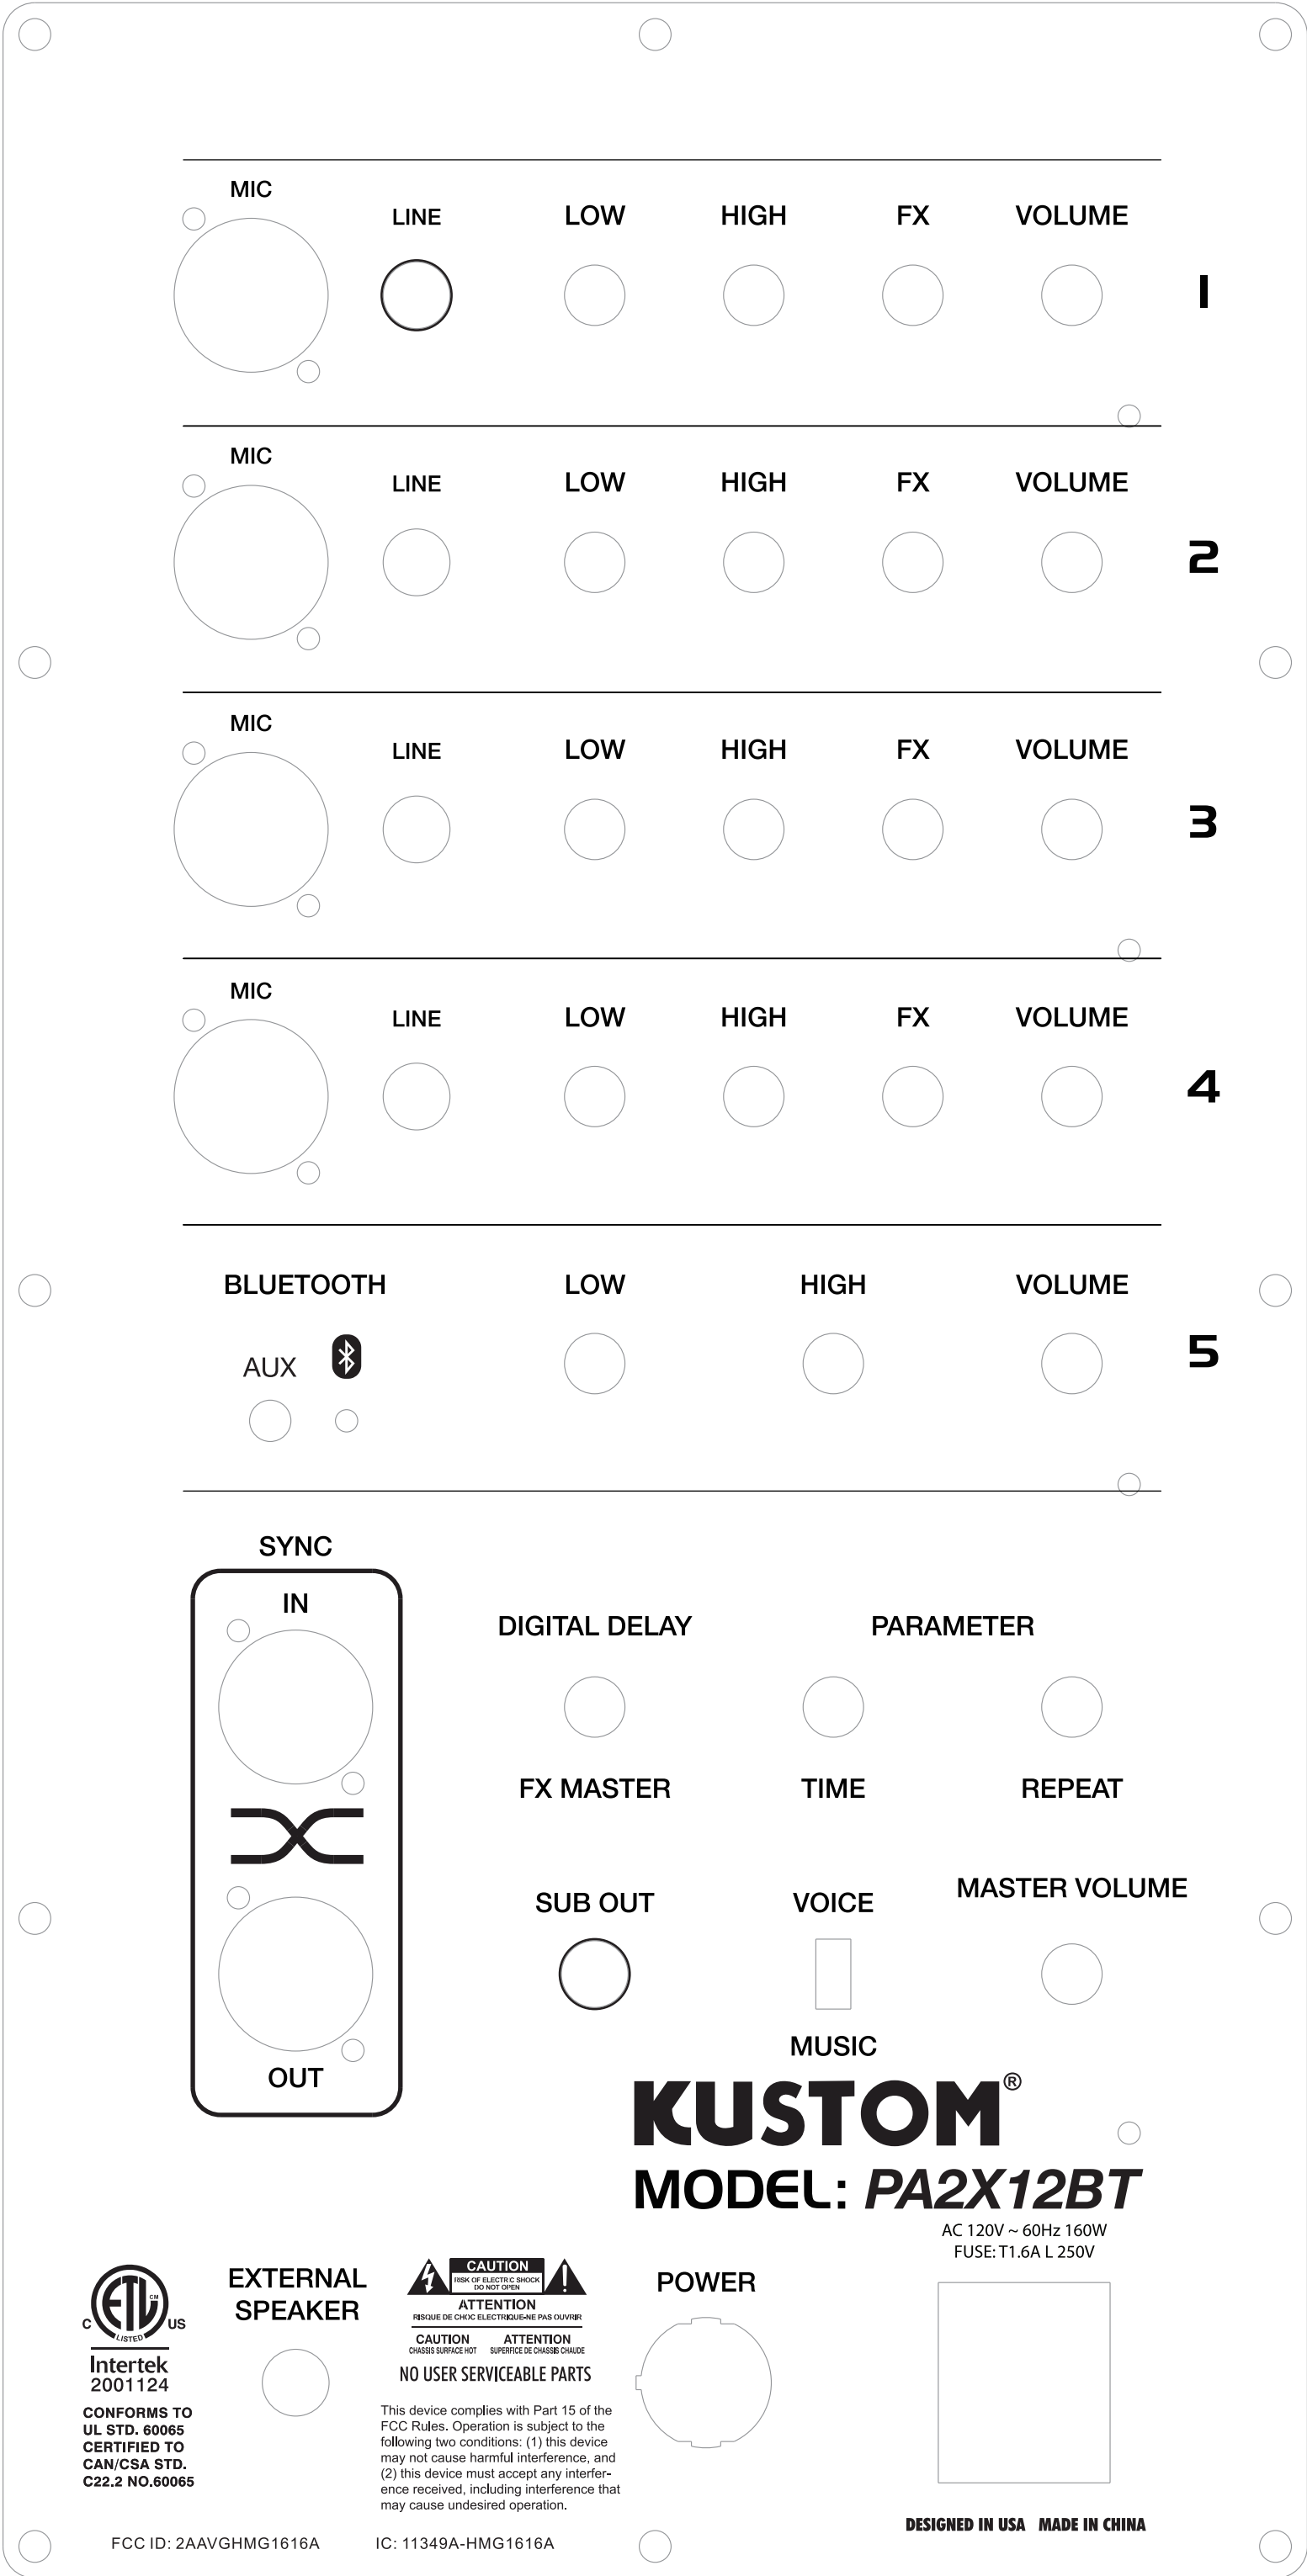

图号：  
名称：PA2X12BT输入面板丝印  
尺寸：同PA2X10BT输入面板  
表面处理：喷塑,黑色；  
丝印颜色：白色。

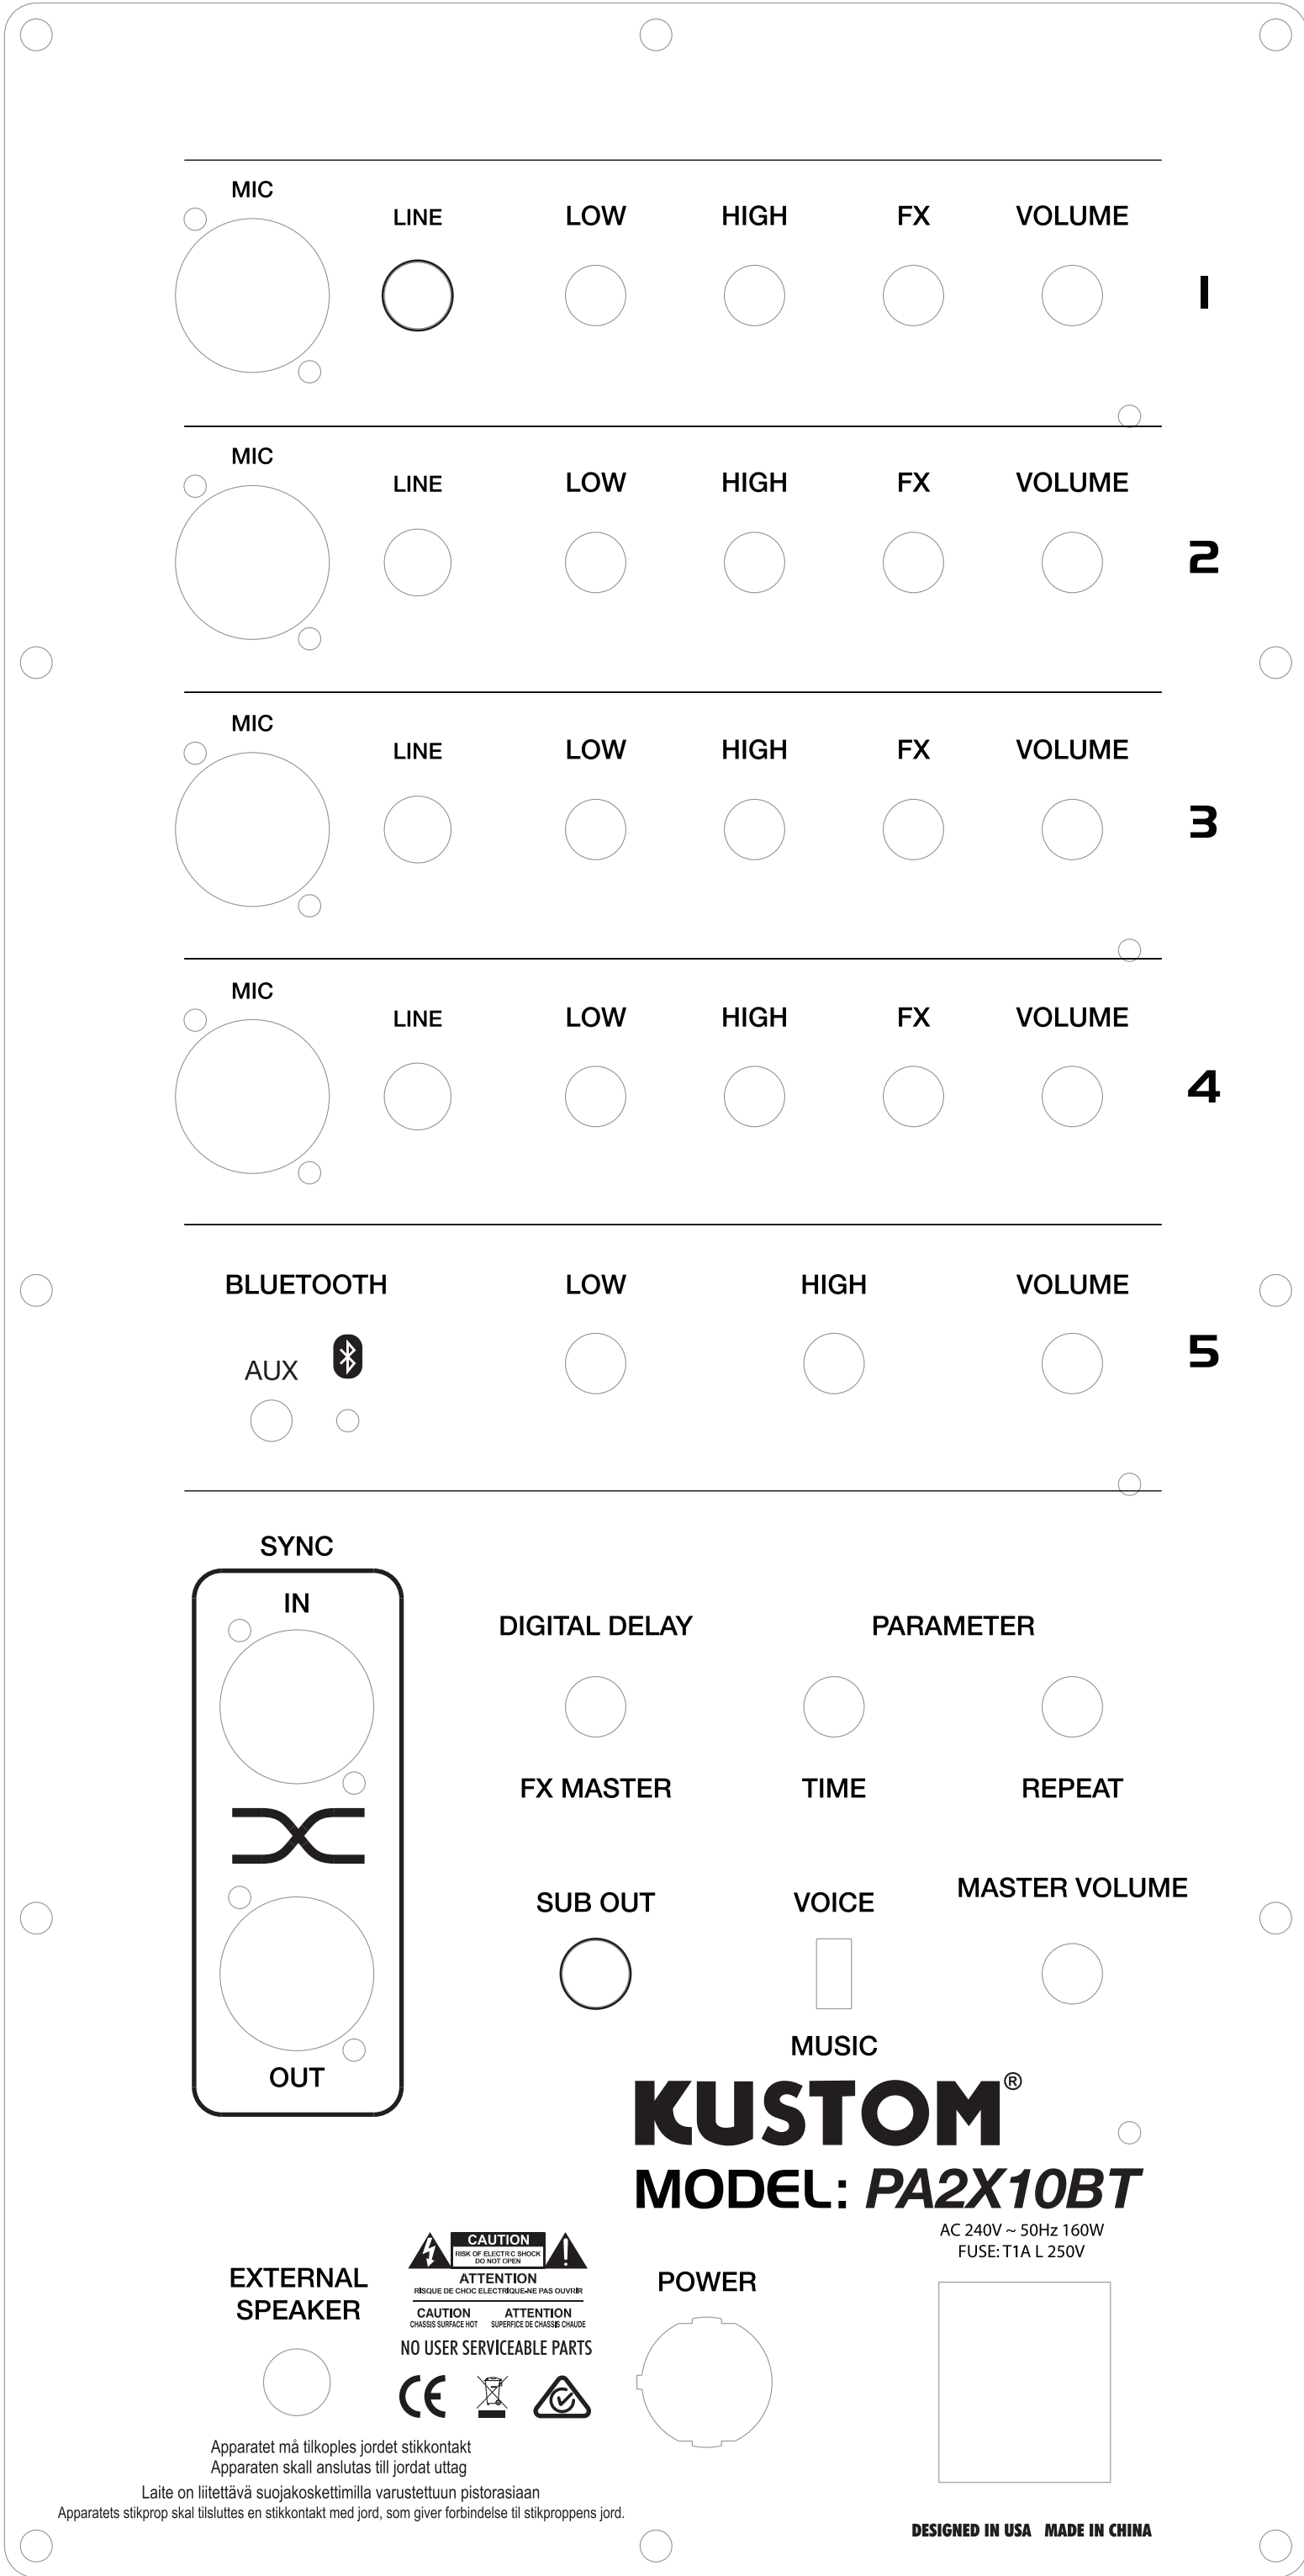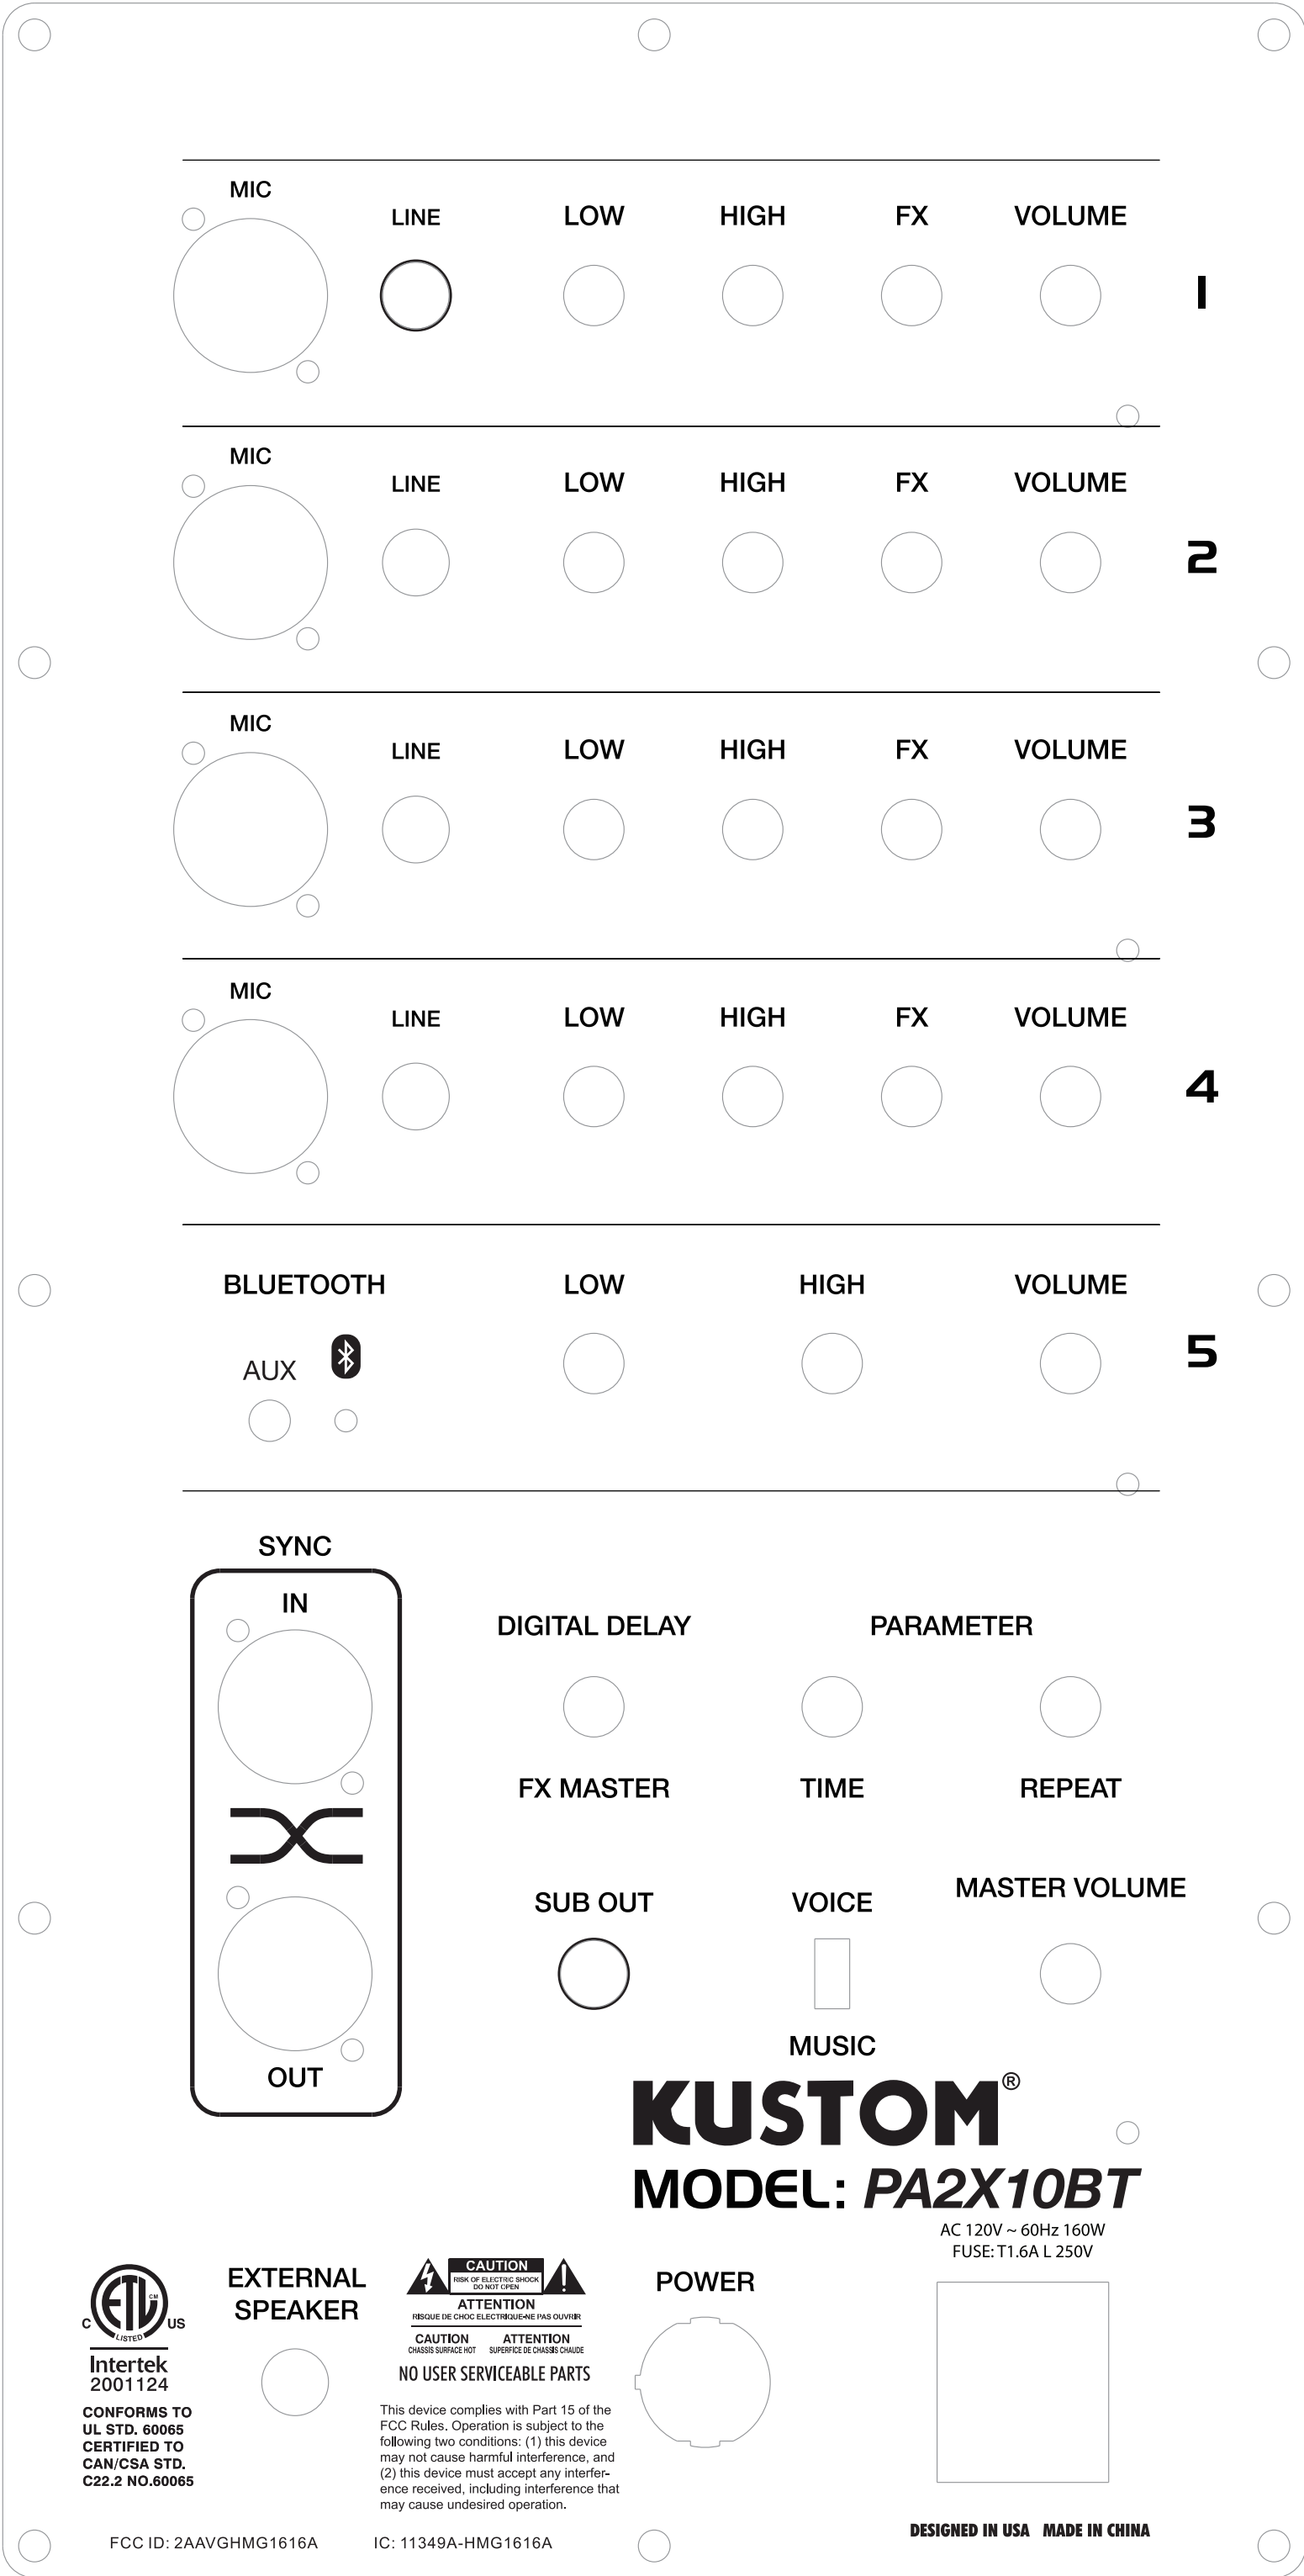

图号：  
名称：PA2X10BT输入面板丝印  
表面处理：喷塑，黑色；  
丝印颜色：白色。



CONFORMS TO  
UL STD. 60065  
CERTIFIED TO  
CAN/CSA STD.  
C22.2 NO.60065

FCC ID: 2AAVGHMG1616A




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC: 11349A-HMG1616A

Powerwerks™

MODEL : PW4X8BT

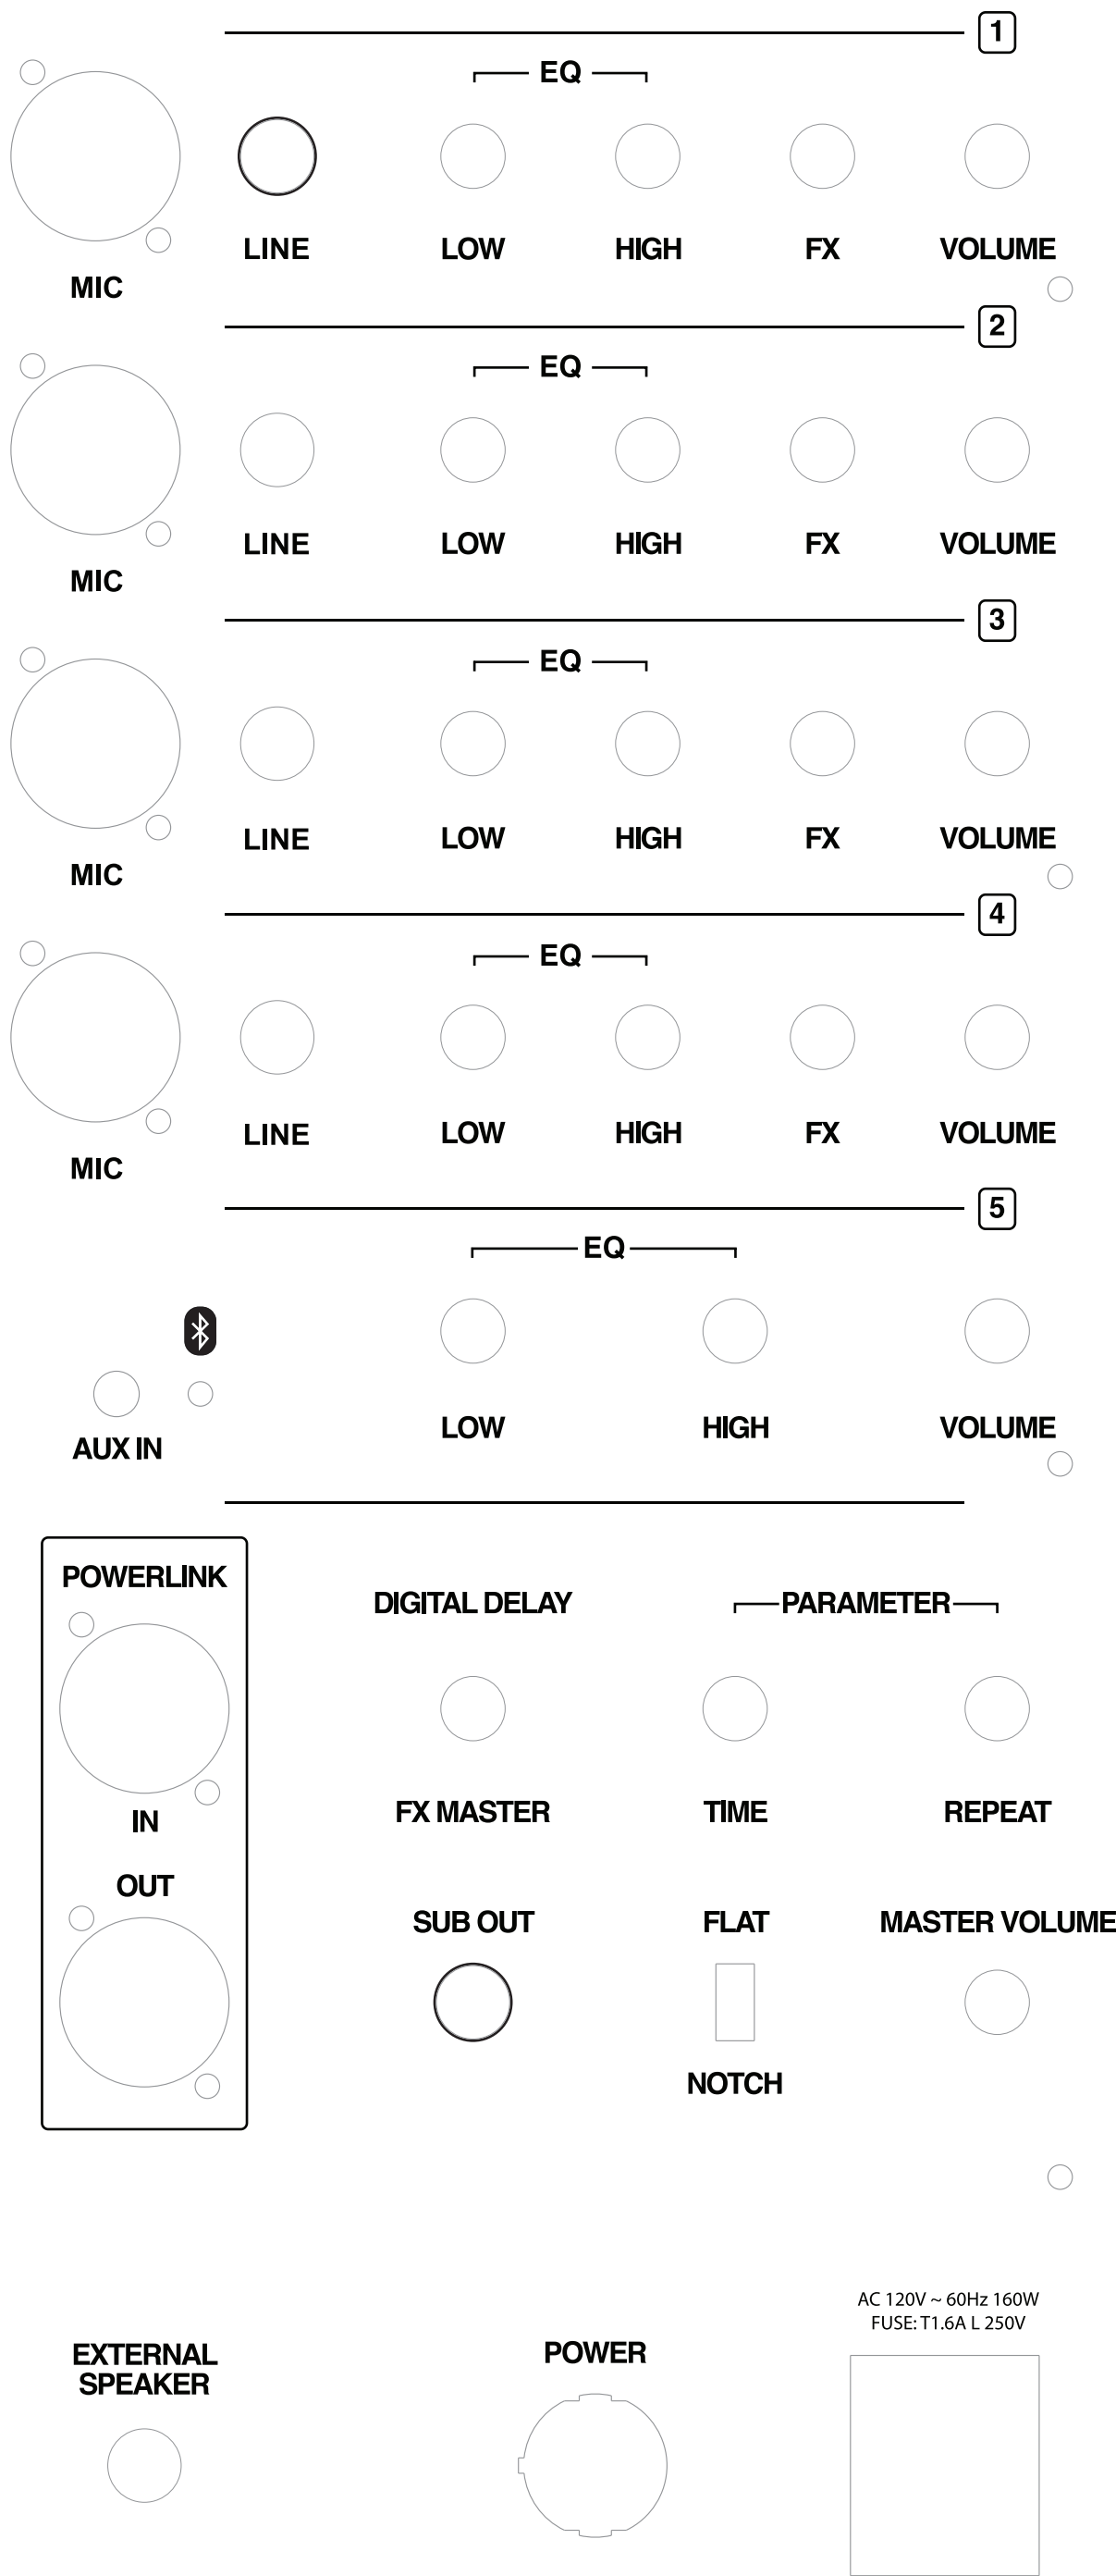

AC 120V ~ 60Hz 160W  
FUSE: T1.6A L 250V


Designed in USA  
Made In China



Apparatet må tilkoples jordat stikkontakt  
Apparaten skall anslutas till jordat uttag  
Laitte on liitettävä suojakosketinilla varustettuun pistorasiaan  
Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

Powerwerks™

MODEL : PW4X8BT

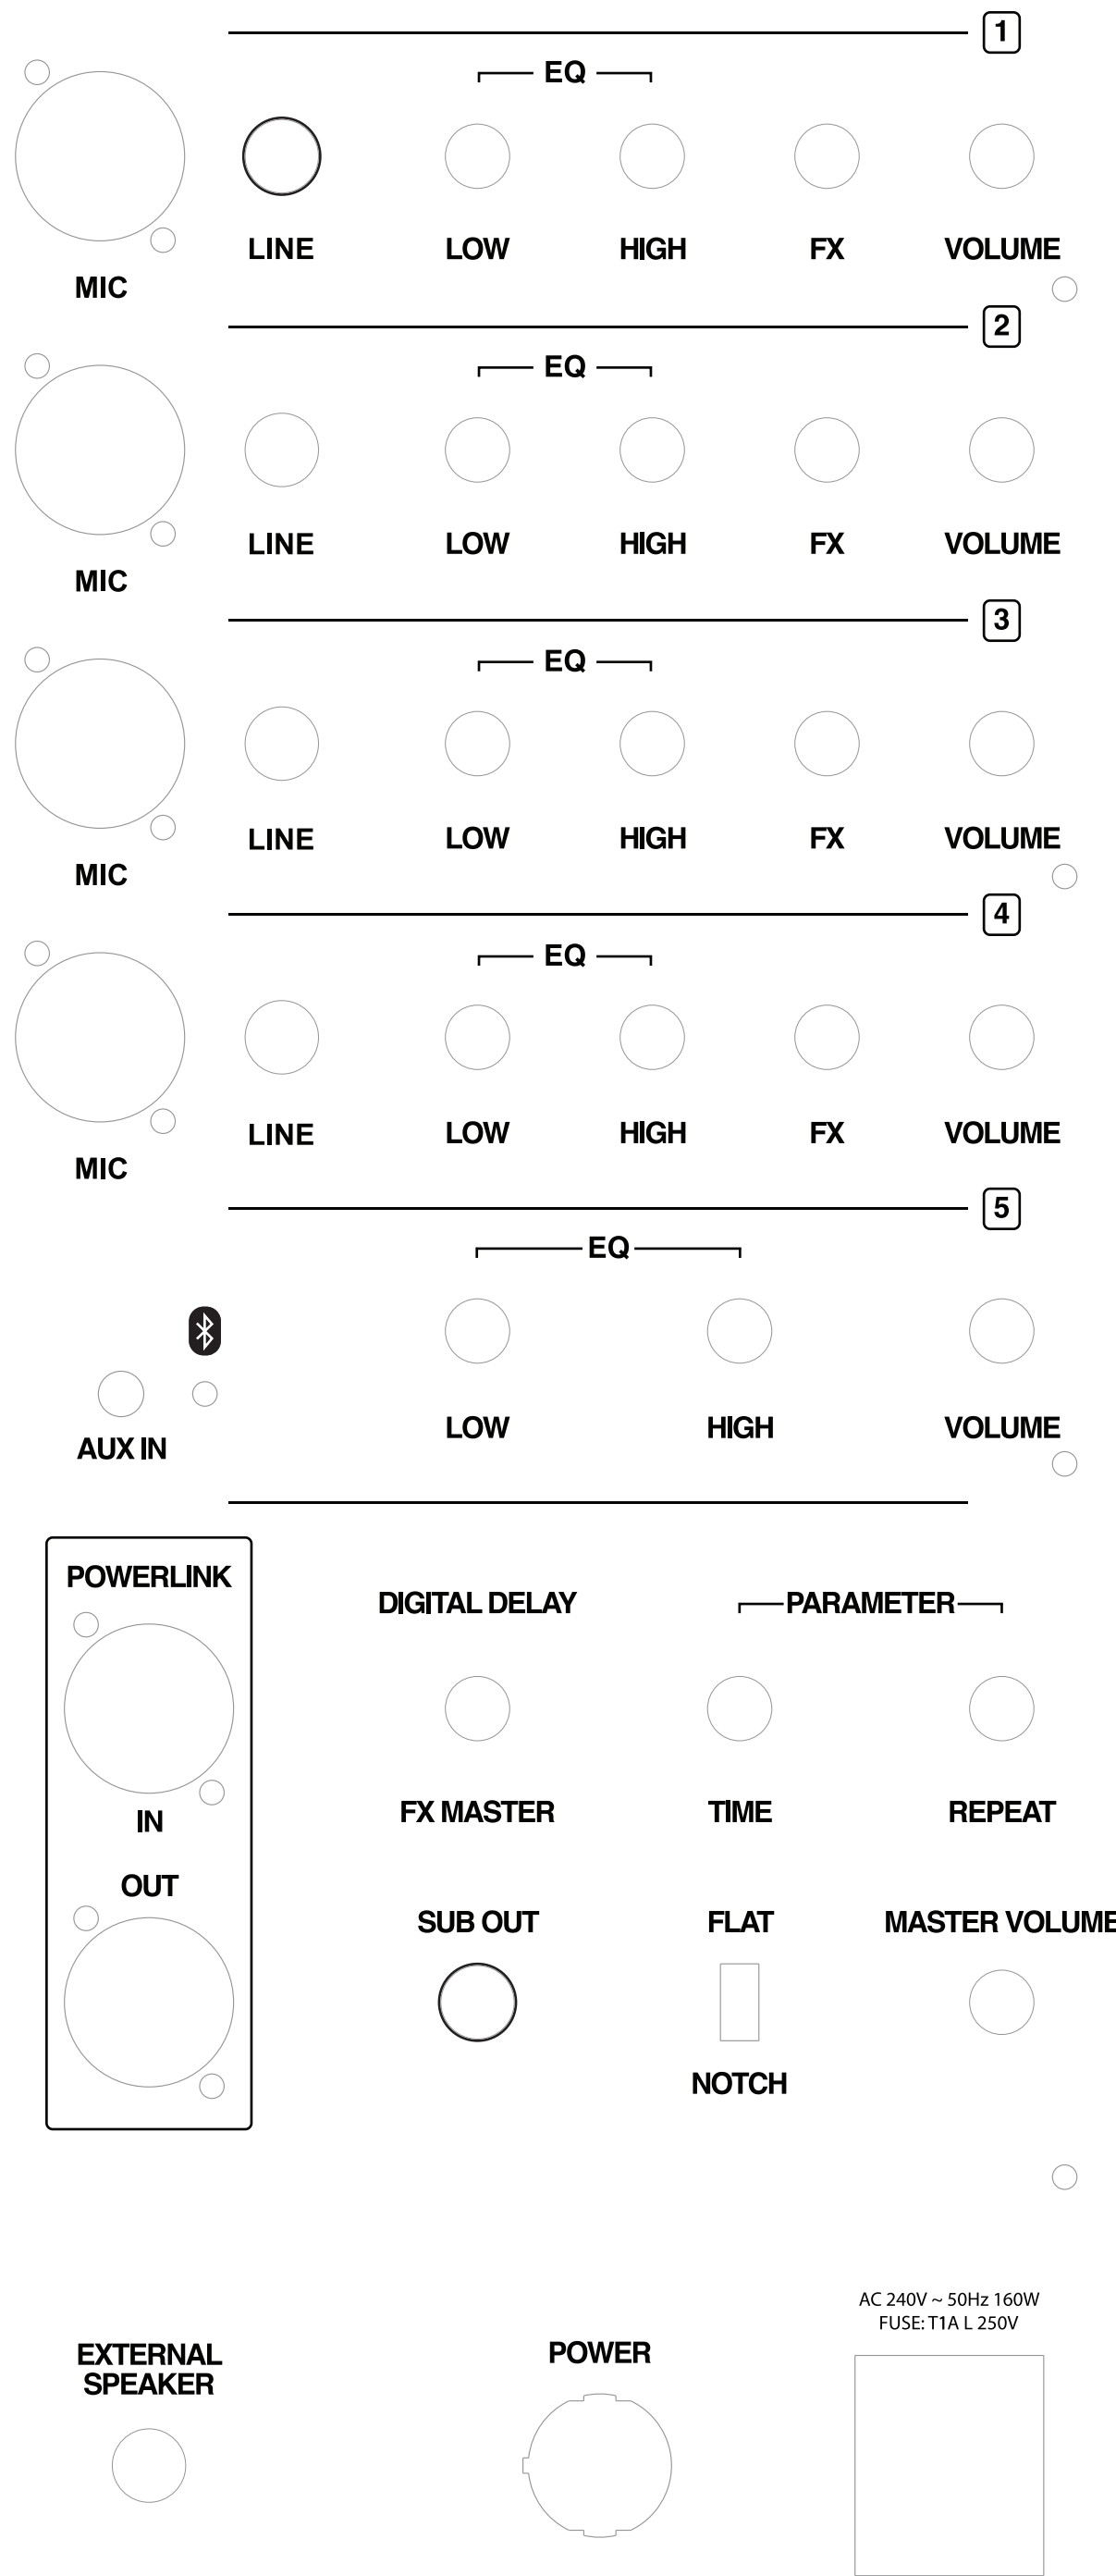

AC 240V ~ 50Hz 160W  
FUSE: T1A L 250V

Designed in USA  
Made In China

名称：PW4X8BT后面板丝印  
丝印颜色：白色  
底色：黑色(喷塑)



CONFORMS TO  
UL STD. 60065  
CERTIFIED TO  
CAN/CSA STD.  
C22.2 NO.60065

FCC ID: 2AAVGHMG1616A





This device complies with Part 15 of the  
FCC Rules. Operation is subject to the  
following two conditions: (1) this device  
may not cause harmful interference, and  
(2) this device must accept any interfer-  
ence received, including interference that  
may cause undesired operation.

IC: 11349A-HMG1616A

Powerwerks™

MODEL : PW4X6BT

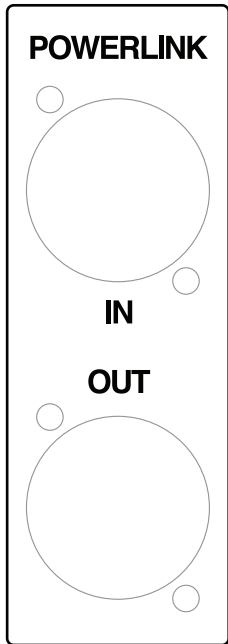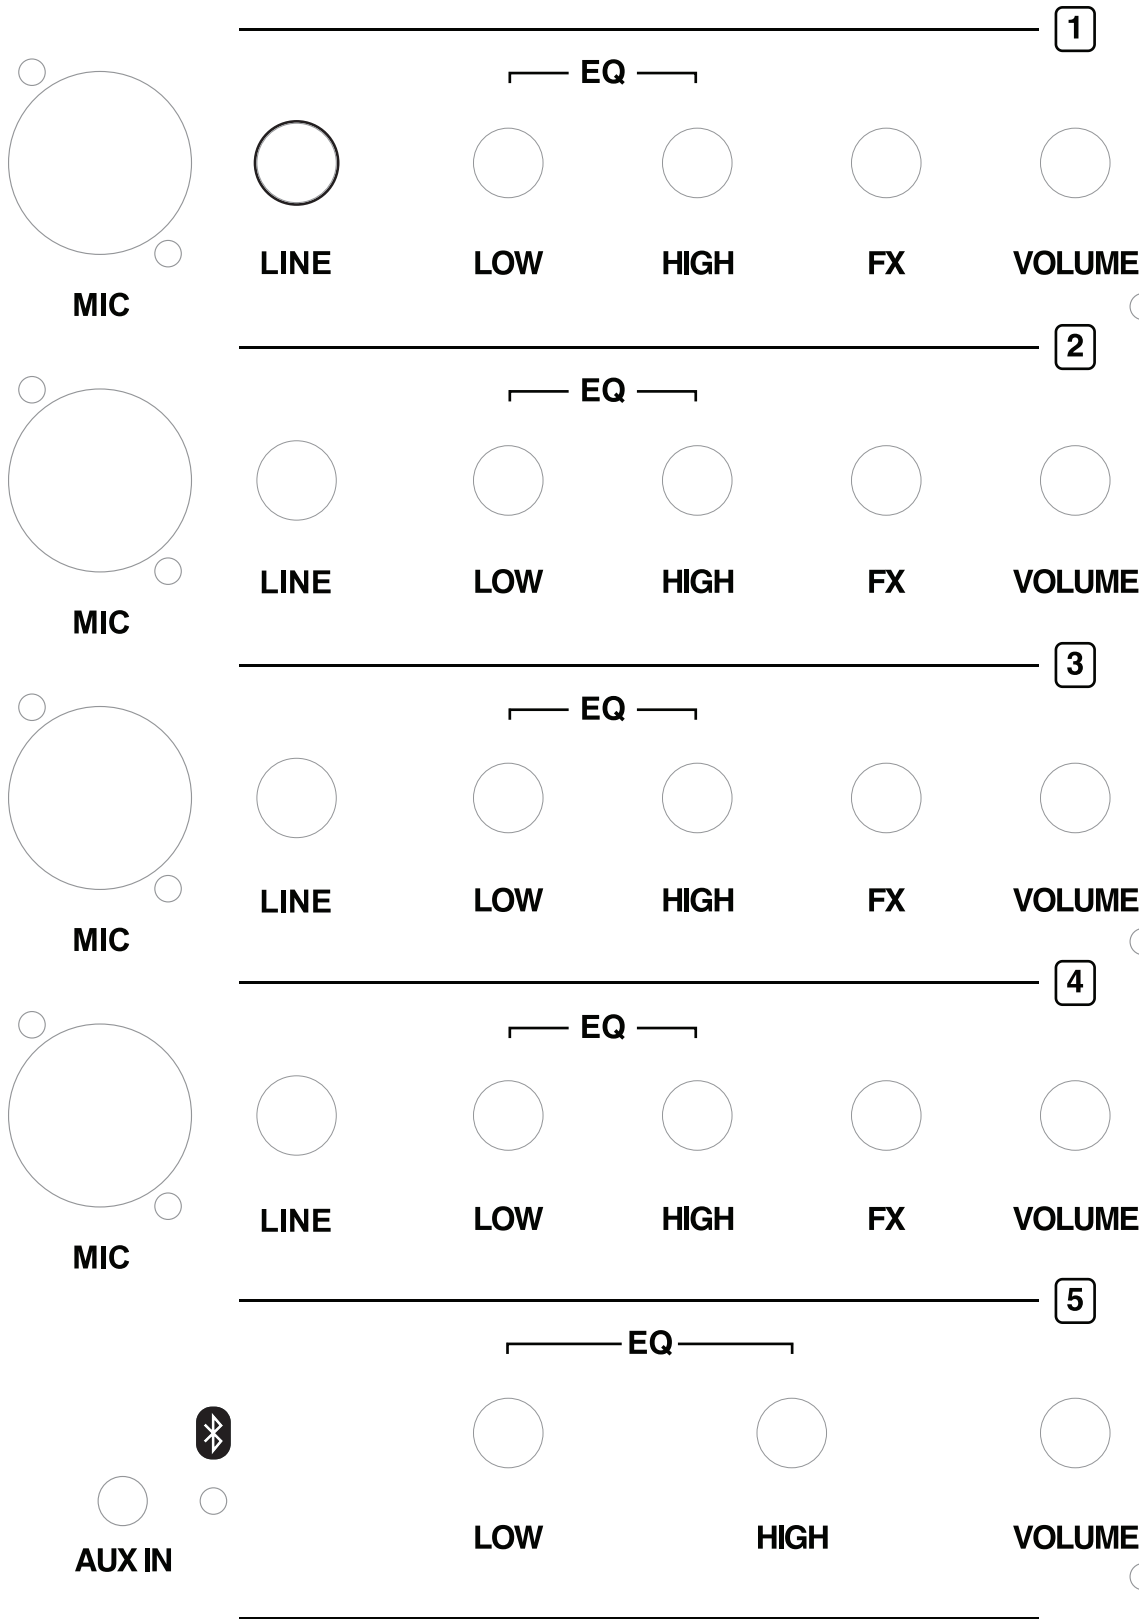

DIGITAL DELAY

PARAMETER

FX MASTER

TIME

REPEAT

SUB OUT

FLAT

MASTER VOLUME

NOTCH

EXTERNAL  
SPEAKER

POWER

AC 120V ~ 60Hz 160W  
FUSE: T1.6A L 250V



Designed in USA  
Made In China





NO USER SERVICEABLE PARTS



Apparatet må tilkoples jordnet stikkontakt  
Apparaten skall anslutas till jordat uttag  
Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan  
Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

Powerwerks™

MODEL : PW4X6BT

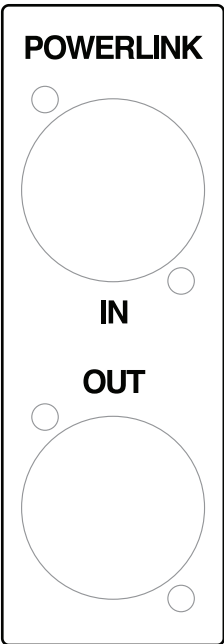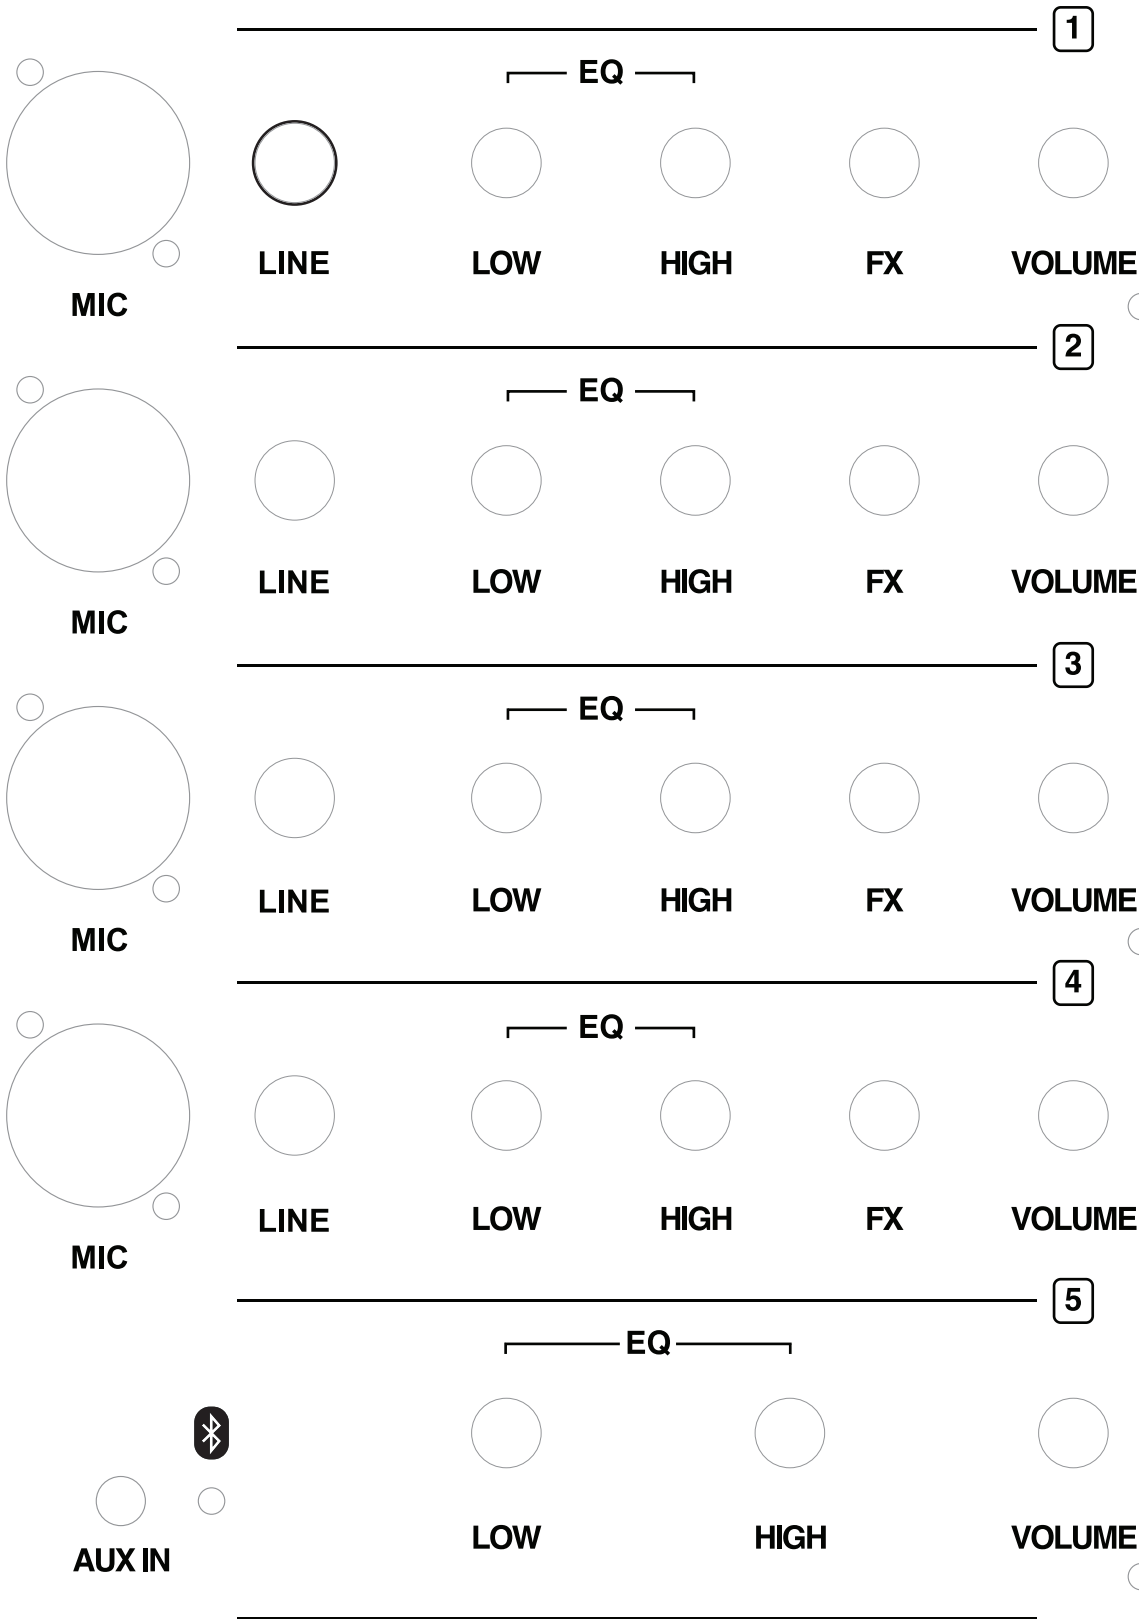

DIGITAL DELAY

PARAMETER

FX MASTER

TIME

REPEAT

SUB OUT

FLAT

MASTER VOLUME

NOTCH

EXTERNAL  
SPEAKER

POWER

AC 240V ~ 50Hz 160W  
FUSE: T1A L 250V



Designed in USA  
Made In China

名称：PW4X6BT后面板丝印  
丝印颜色：白色  
底色：黑色(喷塑)





FCC ID: 2AAVGHMG1616A  
IC: 11349A-HMG1616A

## FCC & IC Label Location

PA2X12BT



PA2X10BT





FCC ID: 2AAVGHMG1616A  
IC: 11349A-HMG1616A

PW4X8BT



PW4X6BT

