

Date: 2017-07-07 Page 1 of 78 No.: DM17050191

Applicant: The Singing Machine Company Inc.

6301 NW 5th Way, Suite 2900 Fort Lauderdale, FL, 33309, U.S.A.

Supplier / Manufacturer: Zhuhai Fullwing Electronic Co., Ltd. Zhongshan Branch

4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Zhongshan,

Guangdong, China

Description of Sample(s): Submitted sample(s) said to be

Product: Pedestal Karaoke System

Brand Name: Singing Machine Model No.: iSM1060BT

FCC ID: 2AAXO-ISM1060BT

Date Samples Received : 2017-05-09

Date Tested : 2017-05-13 to 2017-07-06

Investigation Requested : Perform ElectroMagnetic Interference measurement in accordance

with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and

ANSI C63.10:2013 for FCC Certification.

Conclusions: The submitted product <u>COMPLIED</u> with the requirements of Federal

Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described

above and on Section 2.2 in this Test Report.

Remarks : Bluetooth FHSS (GFSK/ π /4-DQPSK)

For additional model(s) details, see page 3.

Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited

LONG Yun Jian Alon



Date: 2017-07-07 **Page 2 of 78** No. : DM17050191 **CONTENT:** Cover Page 1 of 78 Content Page 2 of 78 <u>1.0</u> **General Details** 1.1 **Test Laboratory** Page 3 of 78 1.2 Equipment Under Test [EUT] Page 3 of 78 Description of EUT operation 1.3 Date of Order Page 3 of 78 Page 3 of 78 1.4 Submitted Sample(s) Page 3 of 78 1.5 **Test Duration** 1.6 Country of Origin Page 3 of 78 Page 4 of 78 1.7 RF Module Details 1.8 Antenna Details Page 4 of 78 <u>2.0</u> **Technical Details** 2.1 Investigations Requested Page 5 of 78 2.2 Page 5 of 78 Test Standards and Results Summary 2.3 Table for Test Modes Page 6 of 78 3.0 **Test Results Emission** 3.1 Page 7-72 of 78 Appendix A List of Measurement Equipment Page 73 of 78 Appendix B Photograph(s) of Product Page 74-78 of 78



Date : 2017-07-07 Page 3 of 78

No. : DM17050191

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product: Pedestal Karaoke System

Additional Product: HI-DEF KARAOKE PEDESTAL

Manufacturer: Zhuhai Fullwing Electronic Co., Ltd. Zhongshan Branch

4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Zhongshan,

Guangdong, China

Brand Name: Singing Machine Model Number: iSM1060BT

Additional Model Number: iSM1061BT, iSM1062BT

Rating: Input: 100-240Va.c. 50/60Hz 1.2A;

Output: 10.0Vd.c 4.0A

The AC/DC adaptor was provided by the applicant with following details:

Brand name: KPTEC; Model no.: K48V100400U

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Pedestal Karaoke System. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2017-05-09

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2017-05-13 to 2017-07-06

1.6 Country of Origin

China



Date : 2017-07-07 Page 4 of 78

No. : DM17050191

1.7 RF Module Details

Module Model Number: AC6905 Module FCC ID: N/A

Module Transmission Type: Bluetooth V2.1+EDR

Modulation: FHSS (GFSK / π /4-DQPSK)

Data Rates: 1MBps: GFSK

2 MBps: $\pi/4$ -DQPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB antenna Antenna Gain: -0.76dBi



Date: 2017-07-07 Page 5 of 78

No. : DM17050191

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013for FCC Certification. According FCC KDB 558074 D01 DTS Meas Guidance v04, Duty cycle ≥98%. The device was realized by test software.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method						
			Severity	Pass	Failed	N/A		
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	ANSI C63.10: 2013	N/A					
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	\boxtimes				
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.10: 2013	N/A	\boxtimes				
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	ANSI C63.10: 2013	N/A					
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	ANSI C63.10: 2013	N/A					
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	ANSI C63.10: 2013	N/A					
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	ANSI C63.10: 2013	N/A					
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A					
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	ANSI C63.10: 2013	N/A					
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes				

Note: N/A - Not Applicable



Date : 2017-07-07 Page 6 of 78 No. : DM17050191

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK	1MBps / 2MBps
Hopping Channel Separation	GFSK / π/4-DQPSK	1MBps / 2MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK	1MBps / 2MBps
Time of Occupancy(Dwell Time)	π/4-DQPSK (DH1 / DH3 / DH5)	2MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK	1MBps / 2MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK	1MBps / 2MBps



Date : 2017-07-07 Page 7 of 78

No. : DM17050191

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b) (1)
Test Method: ANSI C63.10: 2013

Test Date: 2017-05-26 Mode of Operation: Tx mode


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth Detector = Peak, Trace = Max. hold

Test Setup:

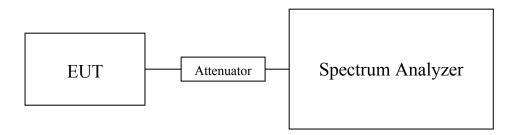

Note: a temporary antenna connector was soldered to the RF output.



Date : 2017-07-07 Page 8 of 78

No. : DM17050191

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000388

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000363

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000284

The maximum peak output power shall not exceeded the following limits: For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts Results of Bluetooth Communication mode ($\pi/4$ -DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000470

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000415

Transmitter Frequency (MHz)		Maximum conducted output power (Watt)
	2480	0.000332

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:


- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.



Date : 2017-07-07 Page 9 of 78 No. : DM17050191

Test plot of Maximum Peak Conducted Output Power:


Bluetooth Communication mode (GFSK, 2402MHz)

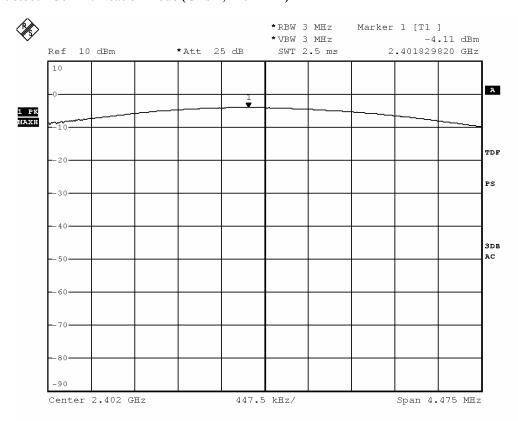



Date : 2017-07-07 Page 10 of 78 No. : DM17050191


Bluetooth Communication mode (GFSK, 2441MHz)

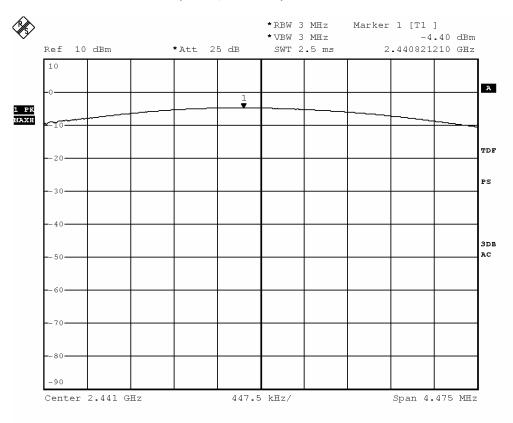



Date : 2017-07-07 Page 11 of 78 No. : DM17050191


Bluetooth Communication mode (GFSK, 2480MHz)

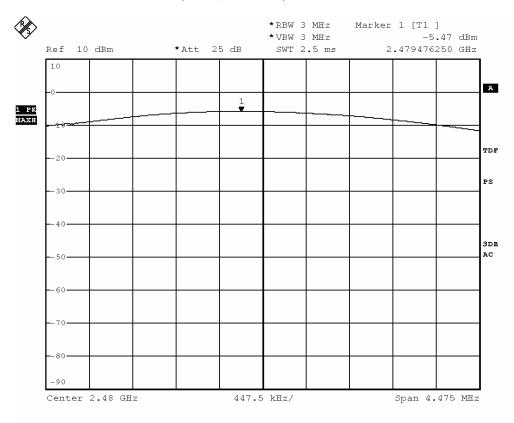



Date : 2017-07-07 Page 12 of 78 No. : DM17050191


Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

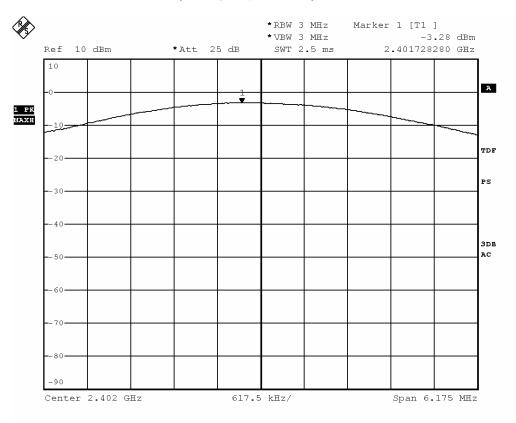



Date : 2017-07-07 Page 13 of 78 No. : DM17050191


Bluetooth Communication mode (π/4 DQPSK, 2441MHz)

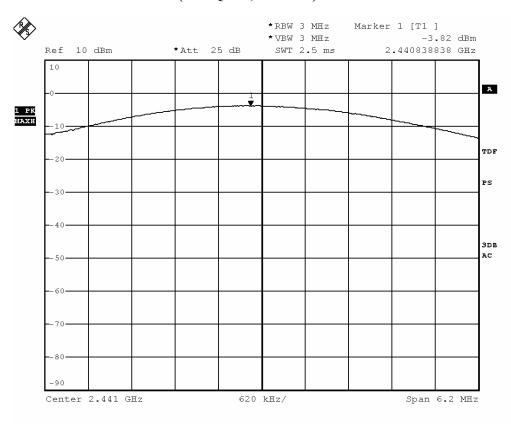



Date : 2017-07-07 Page 14 of 78 No. : DM17050191

Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

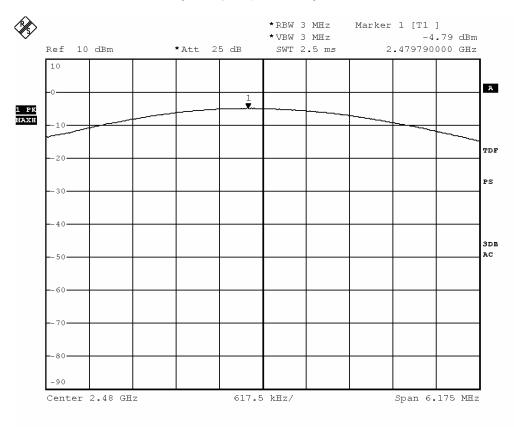



Date : 2017-07-07 Page 15 of 78 No. : DM17050191

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10:2013

Test Date: 2017-05-26 to 2017-07-06

Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

Test Method:

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.



Date: 2017-07-07 Page 16 of 78 : DM17050191

Spectrum Analyzer Setting:

9KHz - 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz - 1GHz (QP) RBW: 120kHz

> VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Above 1GHz (Pk) RBW: 1MHz

> VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Av) RBW: 1MHz

VBW: 10Hz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

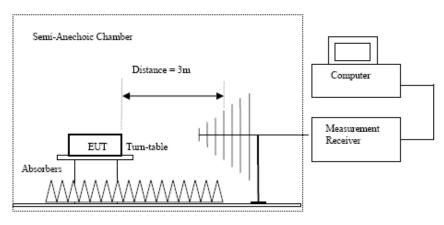

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
 Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.

STC (Dongguan) Company Limited



Date : 2017-07-07 Page 17 of 78

No. : DM17050191

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	_
	Emissions detected are more than 20 dB below the FCC Limits					

Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB			
4804.0	15.9	41.5	57.4	74.0	16.6	Vertical		
4804.0	14.6	42.4	57.0	74.0	17.0	Horizontal		
7206.0	11.7	45.1	56.8	74.0	17.2	Vertical		
7206.0	10.4	46.2	56.6	74.0	17.4	Horizontal		
9608.0	7.2	48.0	55.2	74.0	18.8	Vertical		
9608.0	6.9	48.8	55.7	74.0	18.3	Horizontal		
12010.0	4.3	51.5	55.8	74.0	18.2	Vertical		
12010.0	3.8	52.4	56.2	74.0	17.8	Horizontal		



Date : 2017-07-07 Page 18 of 78

No. : DM17050191

	Field Strength of Spurious Emissions Average Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
4804.0	0.6	41.5	42.1	54.0	11.9	Vertical		
4804.0	-0.6	42.4	41.8	54.0	12.2	Horizontal		
7206.0	-2.7	45.1	42.4	54.0	11.6	Vertical		
7206.0	-4.5	46.2	41.7	54.0	12.3	Horizontal		
9608.0	-7.4	48.0	40.6	54.0	13.4	Vertical		
9608.0	-7.5	48.8	41.3	54.0	12.7	Horizontal		
12010.0	-10.6	51.8	41.2	54.0	12.8	Vertical		
12010.0	-10.3	52.4	42.1	54.0	11.9	Horizontal		

Result of Tx mode (2441.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (GFSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	16.3	41.6	57.9	74.0	16.1	Vertical			
4882.0	15.1	42.5	57.6	74.0	16.4	Horizontal			
7323.0	11.6	53.2	64.8	74.0	9.2	Vertical			
7323.0	10.2	46.3	56.5	74.0	17.5	Horizontal			
9764.0	7.5	48.1	55.6	74.0	18.4	Vertical			
9764.0	6.9	48.9	55.8	74.0	18.2	Horizontal			
12205.0	4.4	51.6	56.0	74.0	18.0	Vertical			
12205.0	3.8	52.5	56.3	74.0	17.7	Horizontal			



Date: 2017-07-07 Page 19 of 78

No. : DM17050191

	Field Strength of Spurious Emissions									
Frequency	Frequency Measured Correction Field Limit Margin E-Field									
11040.0109	Level @3m	Factor	Strength	@3m	111111111111111111111111111111111111111	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	1.2	41.6	42.8	54.0	11.2	Vertical				
4882.0	-0.1	42.5	42.4	54.0	11.6	Horizontal				
7323.0	-4.1	45.2	41.1	54.0	12.9	Vertical				
7323.0	-4.4	46.3	41.9	54.0	12.1	Horizontal				
9764.0	-6.7	48.1	41.4	54.0	12.6	Vertical				
9764.0	-8.9	48.9	40.0	54.0	14.0	Horizontal				
12205.0	-9.6	51.6	42.0	54.0	12.0	Vertical				
12205.0	-10.7	52.5	41.8	54.0	12.2	Horizontal				

Result of Tx mode (2480.0 MHz) (GFSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
	Emissions	detected are i	nore than 20	dB below the	FCC Limits		

Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	16.5	41.4	57.9	74.0	16.1	Vertical				
4960.0	14.6	42.7	57.3	74.0	16.7	Horizontal				
7440.0	11.2	45.6	56.8	74.0	17.2	Vertical				
7440.0	10.6	46.5	57.1	74.0	16.9	Horizontal				
9920.0	6.6	48.6	55.2	74.0	18.8	Vertical				
9920.0	5.8	49.7	55.5	74.0	18.5	Horizontal				
12400.0	4.4	51.7	56.1	74.0	17.9	Vertical				
12400.0	3.1	52.7	55.8	74.0	18.2	Horizontal				



Date : 2017-07-07 Page 20 of 78 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4960.0	1.0	41.4	42.4	54.0	11.6	Vertical				
4960.0	-0.8	42.7	41.9	54.0	12.1	Horizontal				
7440.0	-3.4	45.6	42.2	54.0	11.8	Vertical				
7440.0	-4.8	46.5	41.7	54.0	12.3	Horizontal				
9920.0	-8.3	48.6	40.3	54.0	13.7	Vertical				
9920.0	-9.8	49.7	39.9	54.0	14.1	Horizontal				
12400.0	-9.9	51.7	41.8	54.0	12.2	Vertical				
12400.0	-12.5	52.7	40.2	54.0	13.8	Horizontal				

Result of Tx mode (2402.0 MHz) ($\pi/4$ -DOPSK) (9kHz – 30MHz): Pass

ICSUIT OF TA IIIC	Result of 1x mode (2402.0 MHZ) (W4-DQ1 SIX) (XHZ S0MHZ). 1 ass								
Field Strength of Spurious Emissions									
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dB					
4804.0	16.4	41.5	57.9	74.0	16.1	Vertical				
4804.0	15.6	42.4	58.0	74.0	16.0	Horizontal				
7206.0	12.6	45.1	57.7	74.0	16.3	Vertical				
7206.0	11.2	46.2	57.4	74.0	16.6	Horizontal				
9608.0	7.5	48.0	55.5	74.0	18.5	Vertical				
9608.0	6.5	48.8	55.3	74.0	18.7	Horizontal				
12010.0	4.4	51.5	55.9	74.0	18.1	Vertical				
12010.0	3.7	52.4	56.1	74.0	17.9	Horizontal				



Date : 2017-07-07 Page 21 of 78 No. : DM17050191

	Field Strength of Spurious Emissions Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4804.0	0.8	41.5	42.3	54.0	11.7	Vertical			
4804.0	0.7	42.4	43.1	54.0	10.9	Horizontal			
7206.0	-3.5	45.1	41.6	54.0	12.4	Vertical			
7206.0	-3.3	46.2	42.9	54.0	11.1	Horizontal			
9608.0	-6.3	48.0	41.7	54.0	12.3	Vertical			
9608.0	-7.7	48.8	41.1	54.0	12.9	Horizontal			
12010.0	-9.3	51.5	42.2	54.0	11.8	Vertical			
12010.0	-10.7	52.4	41.7	54.0	12.3	Horizontal			

Result of Tx mode (2441.0 MHz) (π /4-DQPSK) (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions							
Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field	
	Level	Factor	Strength	Strength		Polarity	
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m		
Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
4882.0	16.6	41.6	58.2	74.0	15.8	Vertical			
4882.0	15.1	42.5	57.6	74.0	16.4	Horizontal			
7323.0	12.7	45.2	57.9	74.0	16.1	Vertical			
7323.0	11.2	46.3	57.5	74.0	16.5	Horizontal			
9764.0	6.8	48.1	54.9	74.0	19.1	Vertical			
9764.0	5.7	48.9	54.6	74.0	19.4	Horizontal			
12205.0	4.7	51.6	56.3	74.0	17.7	Vertical			
12205.0	3.5	52.5	56.0	74.0	18.0	Horizontal			



Date : 2017-07-07 Page 22 of 78 No. : DM17050191

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB					
4882.0	1.4	41.6	43.0	54.0	11.0	Vertical				
4882.0	-0.4	42.5	42.1	54.0	11.9	Horizontal				
7323.0	-2.6	45.2	42.6	54.0	11.4	Vertical				
7323.0	-4.2	46.3	42.1	54.0	11.9	Horizontal				
9764.0	-7.3	48.1	40.8	54.0	13.2	Vertical				
9764.0	-8.8	48.9	40.1	54.0	13.9	Horizontal				
12205.0	-9.7	51.6	41.9	54.0	12.1	Vertical				
12205.0	-11.3	52.5	41.2	54.0	12.8	Horizontal				

Result of Tx mode (2480.0 MHz) (π /4-DQPSK) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions					
			Peak Value			
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m					
	Emissions detected are more than 20 dB below the FCC Limits					

Result of Tx mode (2480.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions						
			Peak Value			_	
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
4960.0	15.9	41.4	57.3	74.0	16.7	Vertical	
4960.0	14.9	42.7	57.6	74.0	16.4	Horizontal	
7440.0	11.4	45.6	57.0	74.0	17.0	Vertical	
7440.0	10.3	46.5	56.8	74.0	17.2	Horizontal	
9920.0	7.1	48.6	55.7	74.0	18.3	Vertical	
9920.0	5.3	49.7	55.0	74.0	19.0	Horizontal	
12400.0	4.5	51.7	56.2	74.0	17.8	Vertical	
12400.0	3.3	52.7	56.0	74.0	18.0	Horizontal	



Date: 2017-07-07 Page 23 of 78

No. : DM17050191

	Field Strength of Spurious Emissions						
	1 1		verage Valu		37 :	E E: 11	
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
4960.0	1.1	41.4	42.5	54.0	11.5	Vertical	
4960.0	-0.5	42.7	42.2	54.0	11.8	Horizontal	
7440.0	-3.4	45.6	42.2	54.0	11.8	Vertical	
7440.0	-5.1	46.5	41.4	54.0	12.6	Horizontal	
9920.0	-7.0	48.6	41.6	54.0	12.4	Vertical	
9920.0	-8.9	49.7	40.8	54.0	13.2	Horizontal	
12400.0	-9.4	51.7	42.3	54.0	11.7	Vertical	
12400.0	-11.0	52.7	41.7	54.0	12.3	Horizontal	

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits.

Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB

30MHz -1GHz 4.6dB 1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-07-07 Page 24 of 78

No. : DM17050191

Radiated Emissions Measurement:

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)-GFSK

Field Strength of Band-edge Compliance						
	Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz $dB\mu V$ dB/m $dB\mu V/m$ dB						
2390.0	18.3	36.8	55.1	74.0	18.9	Vertical

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ dB					
2390.0	4.4	36.8	41.2	54.0	12.8	Vertical

Result: RF Radiated Emissions (Highest) -GFSK

result. Iti iti	tesuit. Iti Itadiatea Emissions (ingless) of Six					
Field Strength of Band-edge Compliance						
	Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz $dB\mu V$ dB/m $dB\mu V/m$ dB						
2483.5	23.9	36.4	60.3	74.0	13.7	Horizontal

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ dB					
2483.5	7.5	36.4	43.9	54.0	10.1	Horizontal



Date : 2017-07-07 Page 25 of 78 No. : DM17050191

Radiated Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)- π/4-DQPSK

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz $dB\mu V$ dB/m $dB\mu V/m$ dB						
2390.0	18.3	36.8	55.1	74.0	18.9	Vertical

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ dB					
2390.0	5.1	36.8	41.9	54.0	12.1	Vertical

Result: RF Radiated Emissions (Highest) -π/4-DOPSK

resuit. Iti iti	Result: It Ituatived Emissions (Highest) 70 1 DQ1 513					
Field Strength of Band-edge Compliance						
	Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz $dB\mu V$ dB/m $dB\mu V/m$ dB						
2483.5	24.9	36.4	61.3	74.0	12.7	Horizontal

Field Strength of Band-edge Compliance						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	MHz $dB\mu V$ dB/m $dB\mu V/m$ dB					
2483.5	7.0	36.4	43.4	54.0	10.6	Horizontal



Date : 2017-07-07 Page 26 of 78 No. : DM17050191

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:


Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal

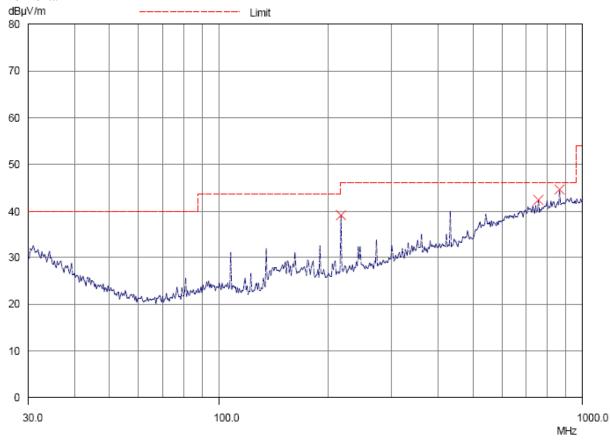



Date : 2017-07-07 Page 27 of 78 No. : DM17050191

Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass

Result of Diactooth play mode (GI Six 2402.0 Mills) (30Mills 1 Gils). I ass								
Radiated Emissions								
Quasi-Peak								
Emission	Emission E-Field Level Limit Level Limit							
Frequency	Polarity	@3m	@3m	@3m	@3m			
MHz		dBμV/m	dBμV/m	μV/m	μV/m			
216.0	Horizontal	37.1	46.0	71.6	150			
756.1	Horizontal	40.4	46.0	104.7	200			
864.1	Horizontal	44.5	46.0	167.9	200			



Date : 2017-07-07 Page 28 of 78 No. : DM17050191

Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	$[\mu V/m]$
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)



Date : 2017-07-07 Page 29 of 78 No. : DM17050191

Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Result of Diactooth play mode (OTSIX 2402.0 WILL) (SOMILE 10112). 1 ass						
Radiated Emissions						
	Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBμV/m	dBμV/m	μV/m	μV/m	
50.1	Vertical	33.6	40.0	47.9	100	
216.0	Vertical	37.1	46.0	71.6	150	
864.1	Vertical	45.4	46.0	186.2	200	

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-07-07 Page 30 of 78

No. : DM17050191

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.10:2013

Test Date: 2017-05-13

Mode of Operation: Bluetooth Communication mode

Test Voltage: 120Va.c. 60Hz


Test Method:

The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Receiver Setting:

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz Detector = MaxPeak and CISPR AV

Test Setup:

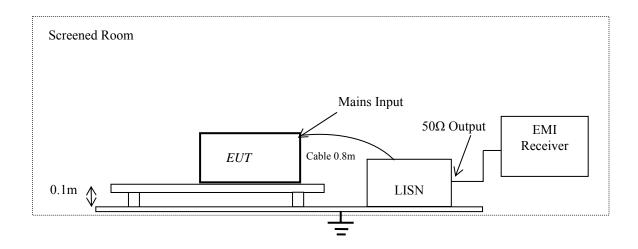



Date : 2017-07-07 Page 31 of 78

No. : DM17050191

Limits for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average	
[MHz]	[dBµV]	[dBµV]	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5.0	56	46	
5.0-30.0	60	50	

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (L): PASS

Please refer to the following diagram for individual results.

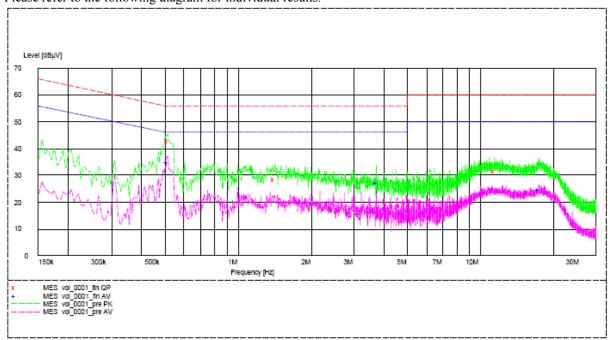

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.515	42.9	56.0	_*_	_*_
Live	1.415	28.7	56.0	_*_	_*_
Live	11.430	31.6	60.0	_*_	_*_
Live	0.510	_*_	_*_	34.8	46.0
Live	3.720	_*_	_*_	27.1	46.0
Live	17.390	_*_	_*_	24.7	50.0



Date : 2017-07-07 Page 32 of 78 No. : DM17050191


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

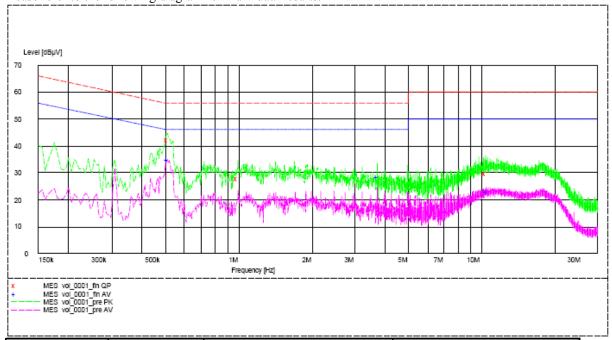

		Quasi-peak		Average	
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.510	42.1	56.0	_*_	_*_
Neutral	0.990	27.8	56.0	_*_	_*_
Neutral	10.385	29.8	60.0	_*_	_*_
Neutral	0.510	_*_	_*_	34.8	46.0
Neutral	3.720	_*_	_*_	28.6	46.0
Neutral	10.480	_*_	_*_	23.0	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

^{-*-} Emission(s) that is far below the corresponding limit line.



Date : 2017-07-07 Page 33 of 78 No. : DM17050191

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 300kHz, VBW \geq RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

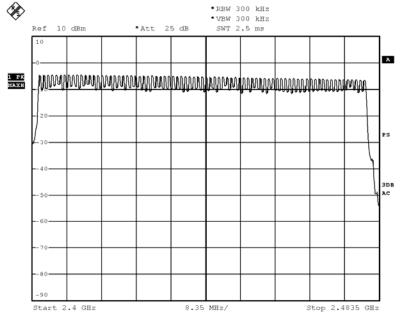




Date : 2017-07-07 Page 34 of 78

No. : DM17050191

π/4-DQPSK: 79 of 79 Channel

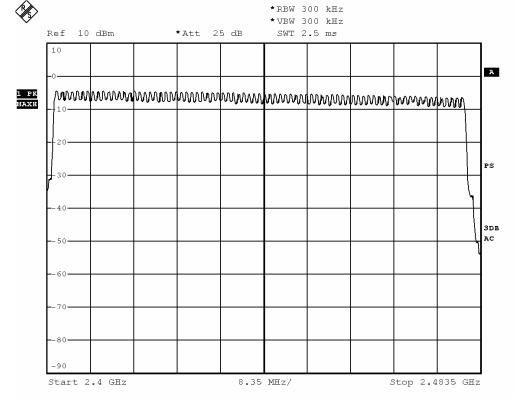



Date : 2017-07-07 Page 35 of 78 No. : DM17050191

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10:2013

Test Date: 2017-05-26 Mode of Operation: Tx mode

Remark

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Spectrum Analyzer Setting:

RBW = 30kHz, VBW \geq RBW, Sweep = Auto, Span = two times and five times the OBW Detector = Peak, Trace = Max. hold


Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date: 2017-07-07 Page 36 of 78 No. : DM17050191

Fundame	ental Frequency	20dB Bandwidth	FCC Limits
	[MHz]	[KHz]	[MHz]
	2402	850.0	Within 2400-2483 5

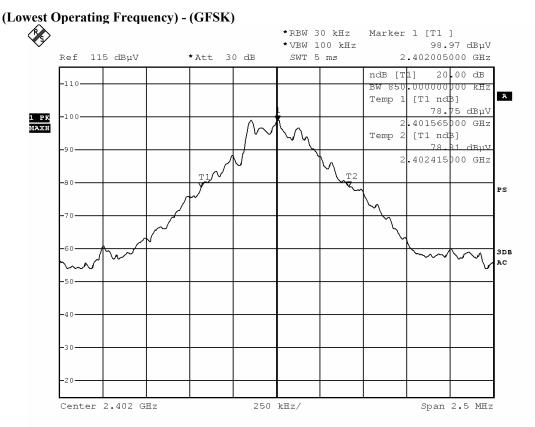




Date : 2017-07-07 Page 37 of 78
No. : DM17050191

 Fundamental Frequency
 20dB Bandwidth
 FCC Limits

 [MHz]
 [KHz]
 [MHz]

 2441
 845.0
 Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

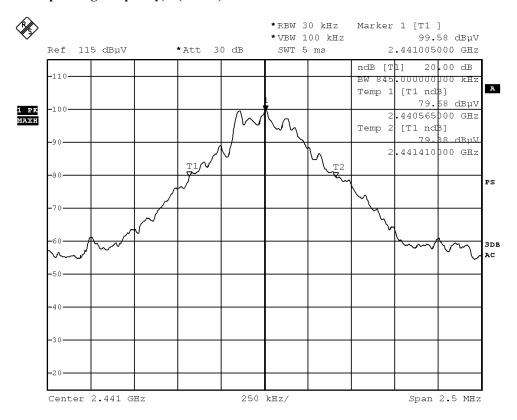




Date : 2017-07-07 Page 38 of 78
No. : DM17050191

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
2480	845.0	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

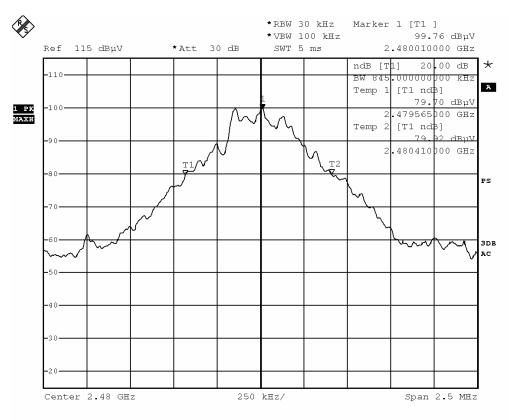




Date : 2017-07-07 Page 39 of 78 No. : DM17050191

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.215	Within 2400-2483.5

(Lowest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

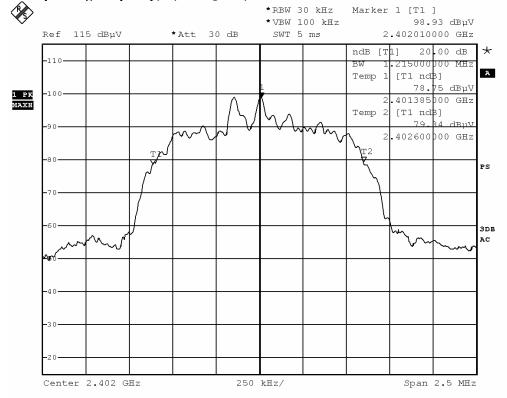




Date : 2017-07-07 Page 40 of 78 No. : DM17050191

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.215	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 \text{ DQPSK})$

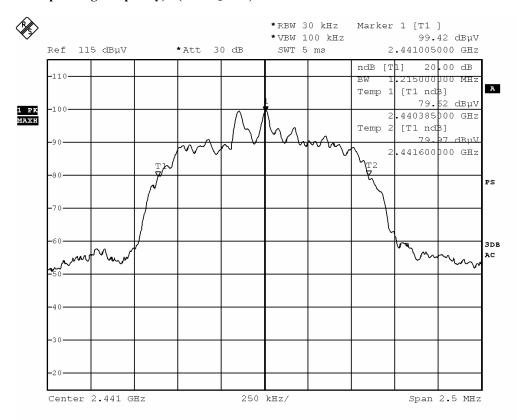




Date : 2017-07-07 Page 41 of 78 No. : DM17050191

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1 215	Within 2400-2483 5

(Highest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

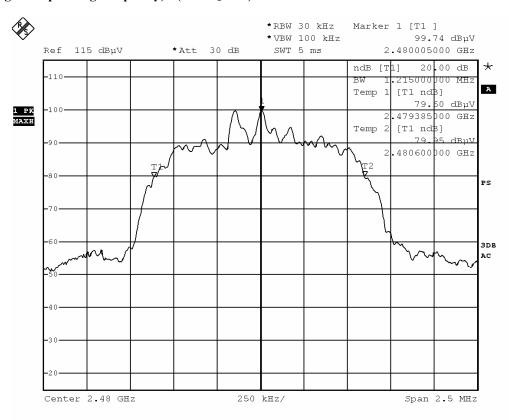



Date : 2017-07-07 Page 42 of 78 No. : DM17050191

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Analyzer Setting:

RBW = 300kHz, VBW ≥ RBW, Sweep = Auto, Span = Wide enough to captur the peaks of two adjacent channels Detector = Peak, Trace = Max. hold

Limit:


The measured maximum bandwidth=850kHz(GFSK)

The measured maximum bandwidth * 2/3 = 1.215MHz * 2/3 = 810kHz($\pi/4$ DQPSK)



Date : 2017-07-07 Page 43 of 78 No. : DM17050191


Channel separation = 1MHz (>850kHz) (Lowest) (GFSK)

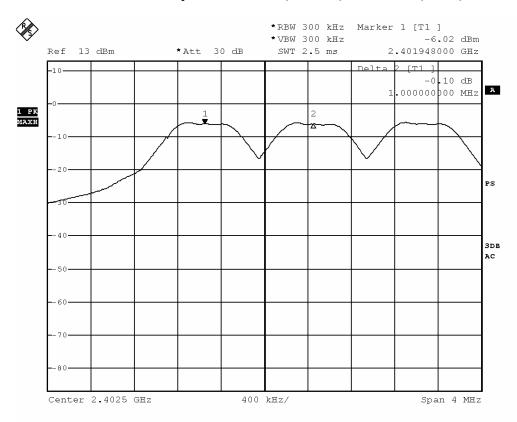



Date : 2017-07-07 Page 44 of 78 No. : DM17050191


Channel separation = 1MHz (>850kHz) (Mid) (GFSK)

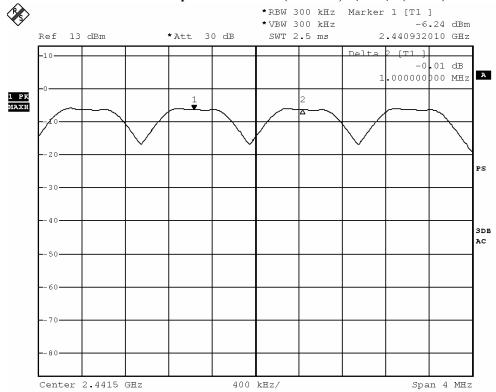



Date : 2017-07-07 Page 45 of 78 No. : DM17050191


Channel separation = 1MHz (>850kHz) (Highest) (GFSK)

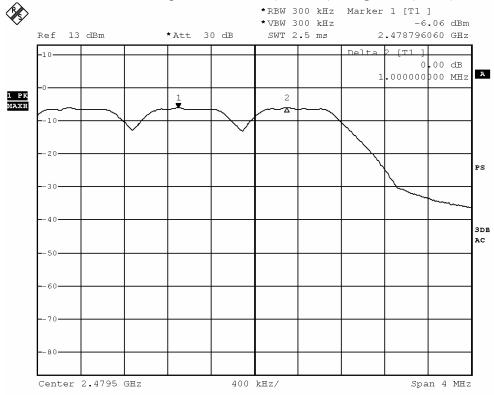



Date : 2017-07-07 Page 46 of 78 No. : DM17050191


Channel separation = 1MHz (>810kHz) (Lowest) ($\pi/4$ DQPSK)

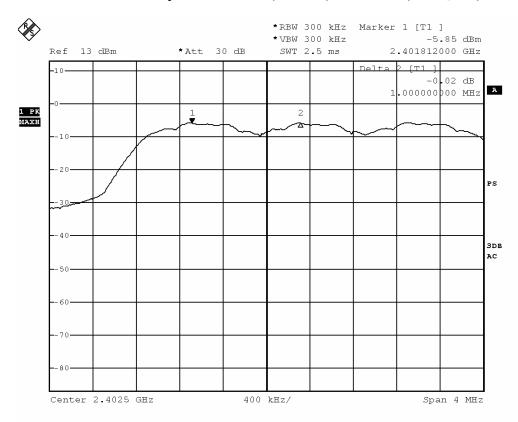



Date : 2017-07-07 Page 47 of 78 No. : DM17050191


Channel separation = 1MHz (>810kHz) (Mid) ($\pi/4$ DQPSK)

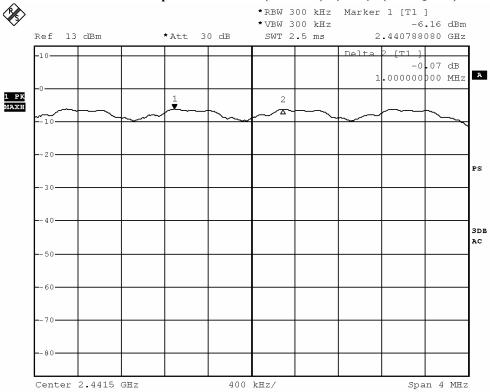



Date : 2017-07-07 Page 48 of 78 No. : DM17050191

Channel separation = 1MHz (>810kHz) (Highest) ($\pi/4$ DQPSK)

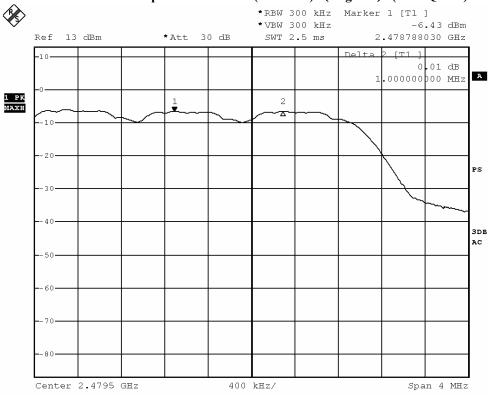



Date : 2017-07-07 Page 49 of 78 No. : DM17050191

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

According to the test method DA 00-705.

Spectrum Analyzer Setting:

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled,

Span = Wide enough to captur the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report




Date : 2017-07-07 Page 50 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	33.03

Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping on)

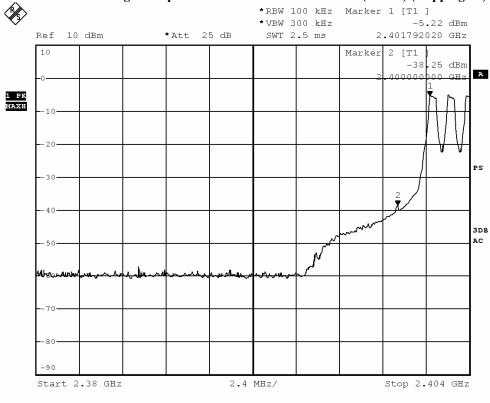




Date : 2017-07-07 Page 51 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	33.34

Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping off)

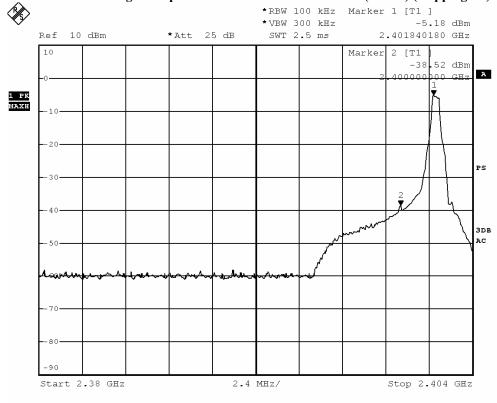




Date : 2017-07-07 Page 52 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	53.88

Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping on)

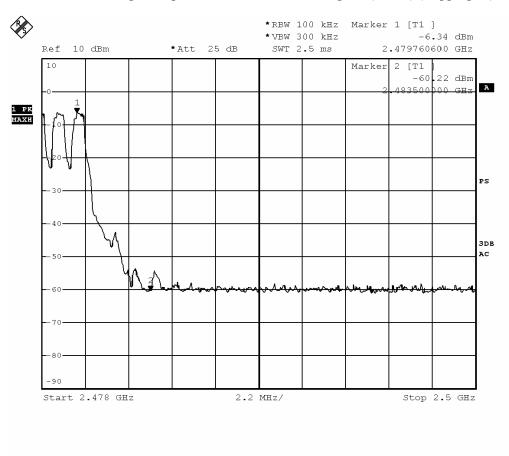




Date : 2017-07-07 Page 53 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	52.99

Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping off)

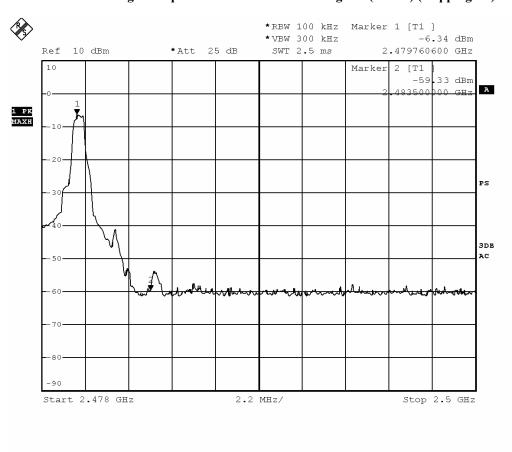




Date : 2017-07-07 Page 54 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	35.67

Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping on)

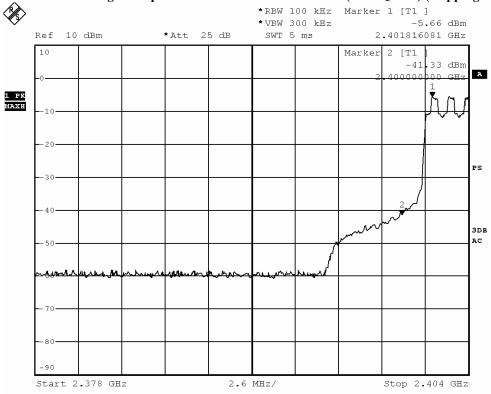




Date : 2017-07-07 Page 55 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	35.82

Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping off)

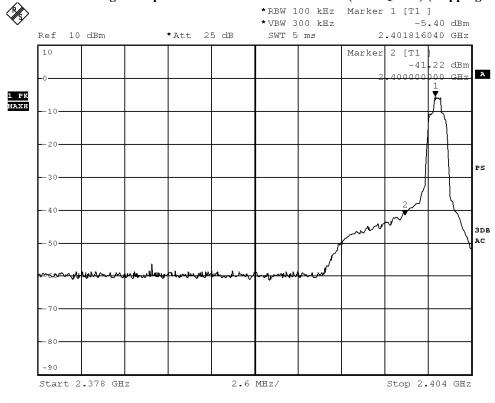




Date : 2017-07-07 Page 56 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	53.88

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping on)

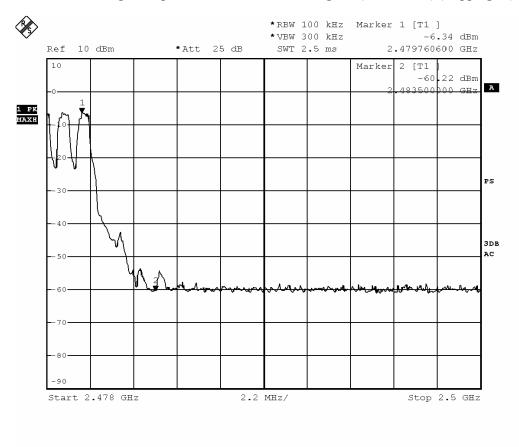




Date : 2017-07-07 Page 57 of 78 No. : DM17050191

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the Fundamental
[MHz]	[dB]
2483.5 - Highest Fundamental (2480)	52.99

Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping off)

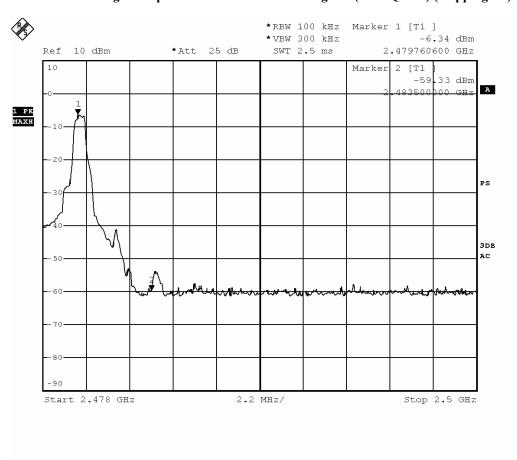




Date : 2017-07-07 Page 58 of 78 No. : DM17050191

Out of Band emissions of RF Conducted Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.


Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

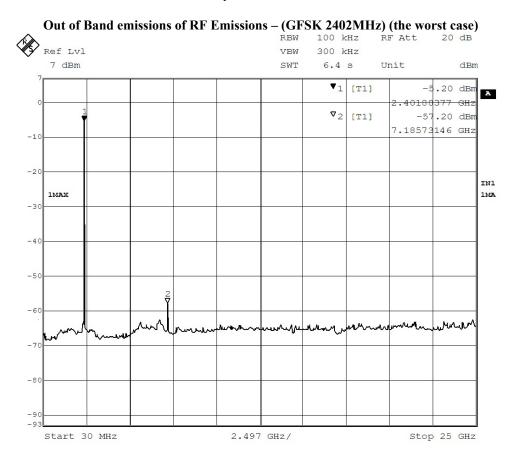



Date : 2017-07-07 Page 59 of 78 No. : DM17050191

Out of Band emissions of RF Emissions – (π/4-DQPSK 2402MHz) (the worst case)

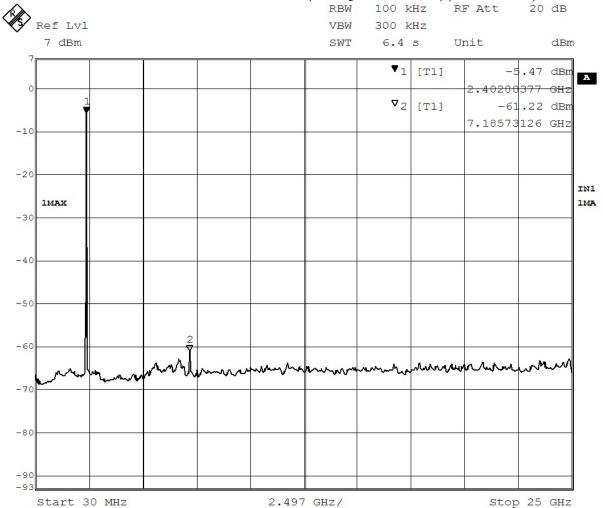



Date : 2017-07-07 Page 60 of 78

No. : DM17050191

3.1.8 Time of Occupancy (Dwell Time)

Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.

No requirements for Digital Transmission System.

Spectrum Analyzer Setting:

 $RBW = 300kHz, VBW \ge RBW,$

Sweep = A longer sweep time to show two successive hops on a channel,


Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in $\pi/4$ -DQPSK: 79 of 79 Channel

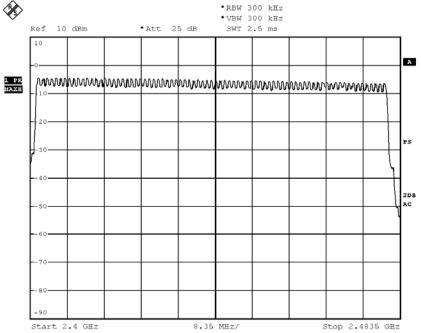




Date : 2017-07-07 Page 61 of 78 No. : DM17050191

π/4-DQPSK DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


Fig. A [Pulse duration of Lowest Channel]

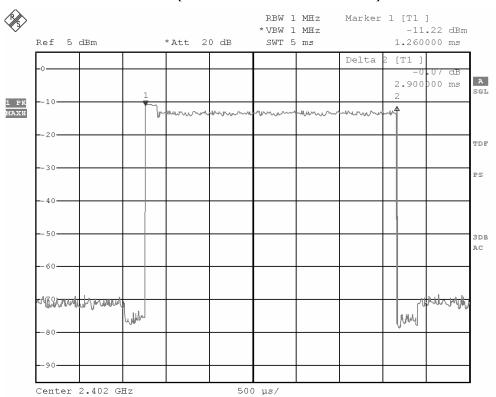



Date : 2017-07-07 Page 62 of 78 No. : DM17050191


Fig. B [Pulse duration of Middle Channel]

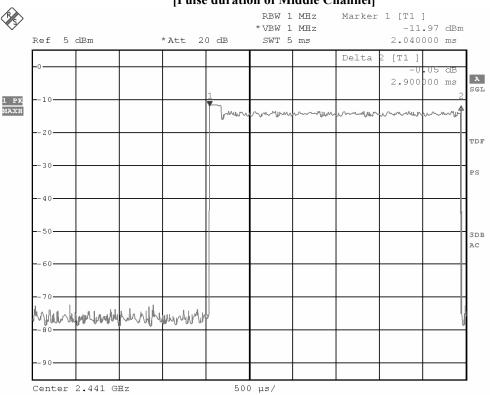



Date : 2017-07-07 Page 63 of 78 No. : DM17050191

Fig. C
[Pulse duration of Highest Channel]

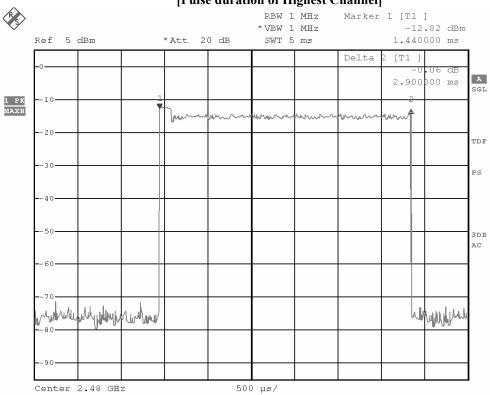




Date : 2017-07-07 Page 64 of 78 No. : DM17050191

π/4-DQPSK DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds


Fig. D
[Pulse duration of Lowest Channel]

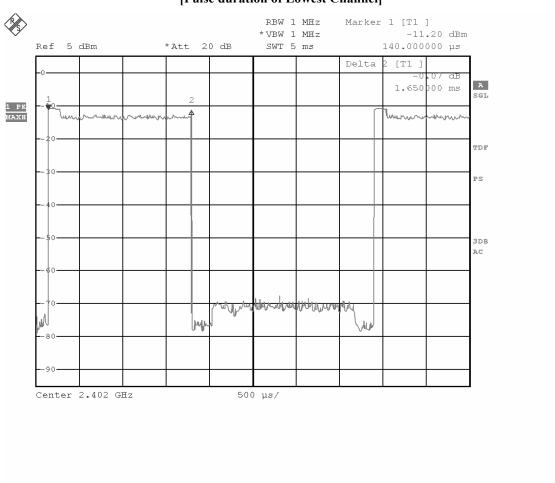



Date : 2017-07-07 Page 65 of 78 No. : DM17050191


Fig. E [Pulse duration of Middle Channel]

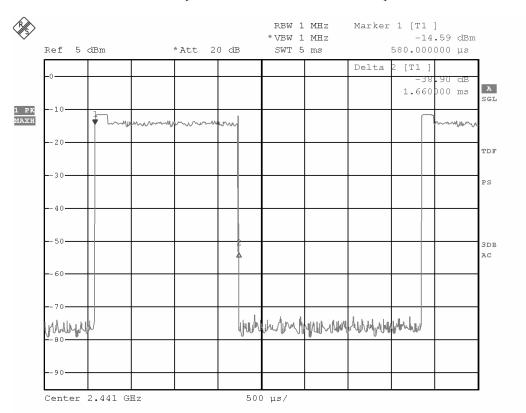



Date : 2017-07-07 Page 66 of 78 No. : DM17050191

Fig. F
[Pulse duration of Highest Channel]

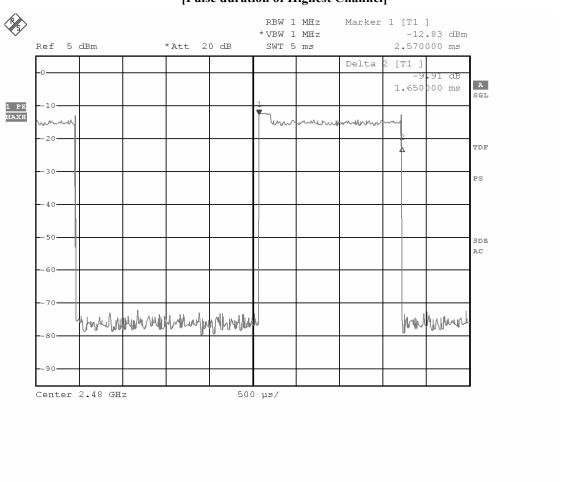




Date : 2017-07-07 Page 67 of 78

No. : DM17050191

π/4-DQPSK DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds


Fig. G
[Pulse duration of Lowest Channel]

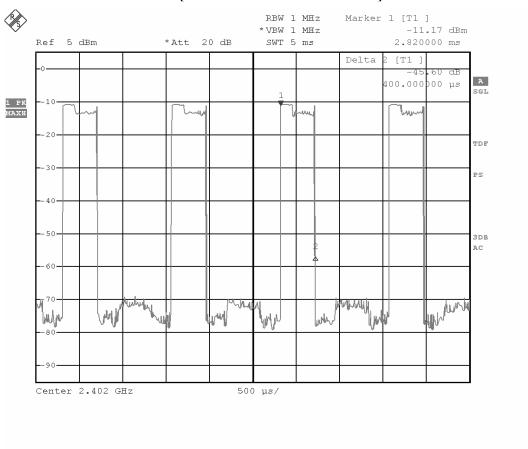



Date : 2017-07-07 Page 68 of 78 No. : DM17050191


Fig. H
[Pulse duration of Middle Channel]

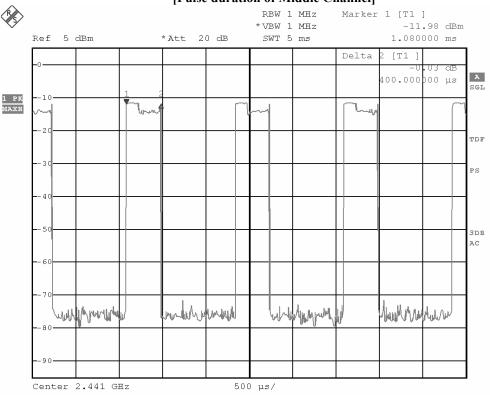



Date : 2017-07-07 Page 69 of 78 No. : DM17050191

Fig. I [Pulse duration of Highest Channel]

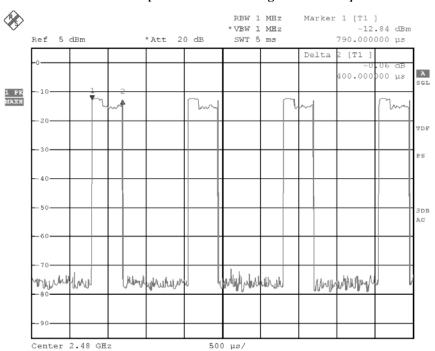

Time of occupancy (Dwell Time):

Time of occupancy (Dwei Time).									
Data Packet	Frequency	Pulse	Dwell Time	Limits	Test Results				
	(MHz)	Duration (ms)	(s)	(s)					
DH5	2402	2.900	0.309	0.400	Complies				
DH5	2441	2.900	0.309	0.400	Complies				
DH5	2480	2.900	0.309	0.400	Complies				
DH3	2402	1.650	0.264	0.400	Complies				
DH3	2441	1.660	0.265	0.400	Complies				
DH3	2480	1.650	0.264	0.400	Complies				
DH1	2402	0.400	0.128	0.400	Complies				
DH1	2441	0.400	0.128	0.400	Complies				
DH1	2480	0.400	0.128	0.400	Complies				



Date : 2017-07-07 Page 70 of 78 No. : DM17050191

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Date : 2017-07-07 Page 71 of 78 No. : DM17050191

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date : 2017-07-07 Page 72 of 78 No. : DM17050191

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB antenna. There is no external antenna, the antenna gain = -0.76dBi. User is unable to remove or changed the Antenna.



Date : 2017-07-07 Page 73 of 78 No. : DM17050191

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2017.04.14	2018.04.14
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2017.04.15	2018.04.15
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2017.04.14	2018.04.14
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2017.04.15	2018.04.15
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2017.04.14	2018.04.14
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2016.12.30	2018.12.30
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2017.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2017.04.14	2018.04.14
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2017.04.14	2018.04.14
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2017.04.14	2018.04.14
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2017.05.23	2018.05.23
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO lnc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.06.27	2017.06.27
RE01	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27
RE02	RF cable	N/A	N/A	N/A	2016-9-28	2018-9-27

Remarks:-

N/A Not Applicable or Not Available



Date : 2017-07-07 Page 74 of 78 No. : DM17050191


Appendix B

Photographs of EUT

Front View of the product



Inside View of the product




Inner Circuit Bottom View



Rear View of the product



Inner Circuit Top View



Inner Circuit Top View







Date : 2017-07-07 Page 75 of 78 No. : DM17050191

Photographs of EUT


Inner Circuit Bottom View



Inner Circuit Bottom View



Inner Circuit Bottom View




Inner Circuit Top View



Inner Circuit Top View



Inner Circuit Top View






Date : 2017-07-07 Page 76 of 78
No. : DM17050191

Photographs of EUT

Inner Circuit Bottom View



Inner Circuit Bottom View



Inner Circuit Bottom View



Inner Circuit Top View



Inner Circuit Top View







Date: 2017-07-07 Page 77 of 78 : DM17050191 No.

Photographs of EUT

Measurement of Radiated Emission Test Set Up

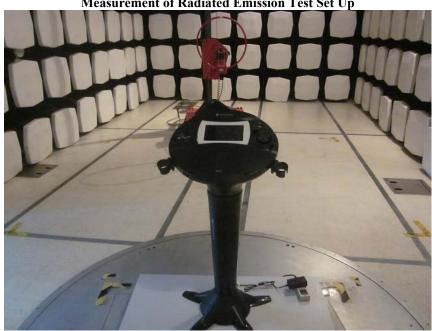



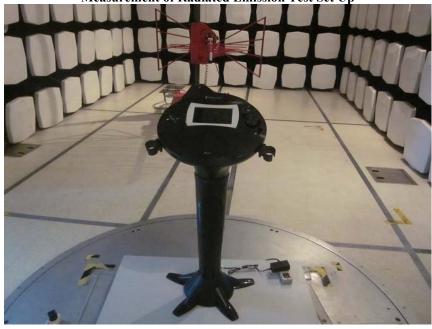



Date : 2017-07-07 Page 78 of 78 No. : DM17050191

Photographs of EUT

Measurement of Radiated Emission Test Set Up



Measurement of Conducted Emission Test Set Up



***** End of Test Report *****

STC (Dongguan) Company Limited

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.