

Date: 2017-06-19 Page 1 of 79 No. : DM17050526

**Applicant** The Singing Machine Company Inc.

6301 NW 5th Way, Suite 2900 Fort Lauderdale, FL, 33309, U.S.A.

Zhuhai Fullwing Electronic Co., Ltd. Zhongshan Branch **Supplier / Manufacturer:** 

4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Zhongshan,

Guangdong, China

**Description of Sample(s):** Submitted sample(s) said to be

> Product: Pedestal CDG Karaoke System

Brand Name: Singing Machine Model No.: iSM1020BT

FCC ID: 2AAXO-ISM1020BT

**Date Samples Received**: 2017-05-23

**Date Tested** 2017-05-26 to 2017-06-15

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in accordance

with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and

ANSI C63.10:2013 for FCC Certification.

**Conclusions** The submitted product **COMPLIED** with the requirements of Federal

> Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described

above and on Section 2.2 in this Test Report.

Bluetooth FHSS (GFSK/ $\pi$ /4-DQPSK) Remarks

For additional model(s) details, see page 3.

Authorized Signatory ElectroMagnetic Compatibility Department

For and on behalf of STC (Dongguan) Company Limited



| No.              | : 2017-06-19<br>: DM17050526                            | Page 2 of 79                 |
|------------------|---|------------------------------|
| CONT             | TENT:   |                              |
|                  | Cover<br>Content  | Page 1 of 79<br>Page 2 of 79 |
| <u>1.0</u>       | General Details   |                              |
| 1.1              | Test Laboratory   | Page 3 of 79                 |
| 1.2              | Equipment Under Test [EUT] Description of EUT operation | Page 3 of 79                 |
| 1.3              | Date of Order   | Page 3 of 79                 |
| 1.4              | Submitted Sample(s)                                     | Page 3 of 79                 |
| 1.5              | Test Duration   | Page 3 of 79                 |
| 1.6              | Country of Origin                                       | Page 3 of 79                 |
| 1.7              | RF Module Details                                       | Page 4 of 79                 |
| 1.8              | Antenna Details   | Page 4 of 79                 |
| <u>2.0</u>       | Technical Details                                       |                              |
| 2.1              | Investigations Requested                                | Page 5 of 79                 |
| 2.2              | Test Standards and Results Summary                      | Page 5 of 79                 |
| 2.3              | Table for Test Modes                                    | Page 6 of 79                 |
| <u>3.0</u>       | Test Results  |                              |
| 3.1              | Emission  | Page 7-72 of 79              |
| Appen<br>List of | Measurement Equipment                                   | Page 73 of 79                |
| Appen<br>Photog  | raph(s) of Product                                      | Page 74-79 of 79             |



Date : 2017-06-19 Page 3 of 79

No. : DM17050526

#### 1.0 General Details

#### 1.1 Test Laboratory

STC (Dongguan) Company Limited

**EMC** Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

## **1.2** Equipment Under Test [EUT]

**Description of Sample(s)** 

Product: Pedestal CDG Karaoke System

Manufacturer: Zhuhai Fullwing Electronic Co., Ltd. Zhongshan Branch

4/F & 5/F, No 10, Xingye Road, Xinxu, Sanxiang, Zhongshan,

Guangdong, China

Brand Name: Singing Machine Model Number: iSM1020BT

Additional Model Number: iSM1030BT, iSM1050BT, iSM1030BTXX(X is reserved for

future color change, it can be 0-9, A-Z or N/A)

Rating: Main Adapter: Input: 100-240Va.c. 50/60Hz 0.9A;

Output: 10.0Vd.c 3.0A

Deputy Adapter: Input: 100-240Va.c. 50/60Hz 1.2A;

Output: 10.0Vd.c 4.0A

The AC/DC adaptor was provided by the applicant with following details:

Main Adapter: Brand name: N/A; Model no.: K36V100300U Deputy Adapter: Brand name: N/A; Model no.: K48V100400U

#### 1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Pedestal CDG Karaoke System. The transmission signal is digital modulated with channel frequency range 2402-2480MHz. The R.F. signal was modulated by IC; the type of modulation used was frequency hopping spread spectrum Modulation.

#### 1.3 Date of Order

2017-05-23

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2017-05-26 to 2017-06-15

### 1.6 Country of Origin

China



Date : 2017-06-19 Page 4 of 79

No. : DM17050526

#### 1.7 RF Module Details

Module Model Number: AC6905 Module FCC ID: N/A

Module Transmission Type: Bluetooth V2.1+EDR

Modulation: FHSS (GFSK /  $\pi$ /4-DQPSK)

Data Rates: 1MBps: GFSK

2 MBps:  $\pi/4$ -DQPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

#### 1.8 Antenna Details

Antenna Type: PCB antenna Antenna Gain: -0.76dBi



Date: 2017-06-19 Page 5 of 79

No. : DM17050526

### **2.0** Technical Details

## 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10:2013 for FCC Certification. According FCC KDB 558074 D01 DTS Meas Guidance v04, Duty cycle ≥98%. The device was realized by test software.

## 2.2 Test Standards and Results Summary Tables

| EMISSION                               |                                |                   |          |             |        |     |  |  |
|--|--------------------------------|-------------------|----------|-------------|--------|-----|--|--|
| Results Summary                        |                                |                   |          |             |        |     |  |  |
| Test Condition                         | Test Requirement               | Test Method       | Class /  | Test Result |        |     |  |  |
|  |                                |                   | Severity | Pass        | Failed | N/A |  |  |
| Maximum Peak Conducted<br>Output Power | FCC 47CFR<br>15.247(b)(1)      | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| Radiated Spurious<br>Emissions         | FCC 47CFR 15.209               | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| AC Mains Conducted<br>Emissions        | FCC 47CFR 15.207               | ANSI C63.10: 2013 | N/A      | $\boxtimes$ |        |     |  |  |
| Number of Hopping<br>Frequency         | FCC 47CFR 15.247<br>(b)(1)     | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| 20dB Bandwidth                         | FCC 47CFR<br>15.247(a)(2)      | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| Hopping Channel<br>Separation          | FCC 47CFR<br>15.247(a)(1)      | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| Band-edge measurement (Radiated)       | FCC 47CFR 15.247(d)            | ANSI C63.10: 2013 | N/A      |             |        |     |  |  |
| Pseudorandom Hopping<br>Algorithm      | FCC 47CFR<br>15.247(a)(1)      | N/A               | N/A      |             |        |     |  |  |
| Time of Occupancy (Dwell Time)         | FCC 47CFR<br>15.247(a)(1)(iii) | ANSI C63.10: 2013 | N/A      | $\boxtimes$ |        |     |  |  |
| Antenna requirement                    | FCC 47CFR 15.203               | N/A               | N/A      | $\boxtimes$ |        |     |  |  |

Note: N/A - Not Applicable



Date : 2017-06-19 Page 6 of 79 No. : DM17050526

#### 2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The device was realized by test software.

The following table is a list of the test modes shown in this test report.

| Test Items                                 | Mode                        | Data Rate     |  |
|--|-----------------------------|---------------|--|
| Maximum Peak Conducted Output Power        | GFSK / π/4-DQPSK            | 1MBps / 2MBps |  |
| Hopping Channel Separation                 | GFSK / π/4-DQPSK            | 1MBps / 2MBps |  |
| Number of Hopping Frequency                | GFSK / π/4-DQPSK            | 1MBps / 2MBps |  |
| Time of Occupancy(Dwell Time)              | π/4-DQPSK (DH1 / DH3 / DH5) | 2MBps         |  |
| Radiated Spurious Emissions                | GFSK / π/4-DQPSK            | 1MBps / 2MBps |  |
| Band-edge compliance of Conducted Emission | GFSK / π/4-DQPSK            | 1MBps / 2MBps |  |



Date : 2017-06-19 Page 7 of 79

No. : DM17050526

3.0 Test Results

3.1 Emission

#### 3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b) (1)
Test Method: ANSI C63.10: 2013

Test Date: 2017-05-26 Mode of Operation: Tx mode


#### **Test Method:**

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in Watt.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span: Approximately five times the 20 dB bandwidth Detector = Peak, Trace = Max. hold

## **Test Setup:**

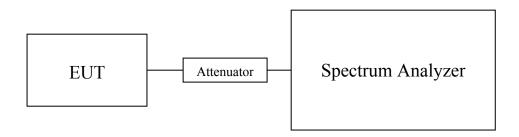

Note: a temporary antenna connector was soldered to the RF output.



Date : 2017-06-19 Page 8 of 79

No. : DM17050526

#### Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

| results of Bidecour Communication mode (GI 511) (I disdancement I 6 Well). I dos |                                       |  |  |  |  |
|--|---------------------------------------|--|--|--|--|
| Transmitter Frequency (MHz)  | Maximum conducted output power (Watt) |  |  |  |  |
| 2402   | 0.000388                              |  |  |  |  |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441                        | 0.000363                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |  |  |
|-----------------------------|---------------------------------------|--|--|
| 2480                        | 0.000284                              |  |  |

The maximum peak output power shall not exceeded the following limits: For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts Results of Bluetooth Communication mode ( $\pi/4$ -DQPSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402                        | 0.000470                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441                        | 0.000415                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |  |  |
|-----------------------------|---------------------------------------|--|--|
| 2480                        | 0.000332                              |  |  |

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB

1GHz to 18GHz 1.7dB

#### Remark:


- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.



Date : 2017-06-19 Page 9 of 79 No. : DM17050526

Test plot of Maximum Peak Conducted Output Power:


## Bluetooth Communication mode (GFSK, 2402MHz)

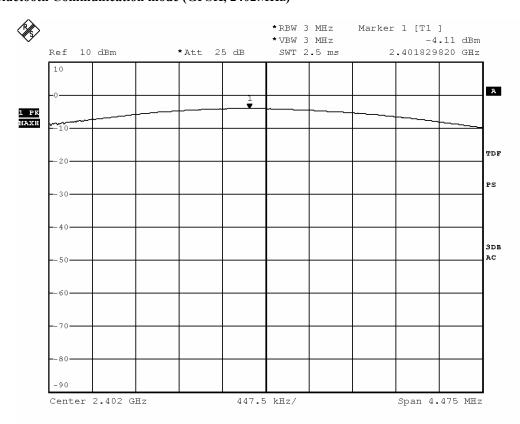



Date : 2017-06-19 Page 10 of 79 No. : DM17050526


#### **Bluetooth Communication mode (GFSK, 2441MHz)**

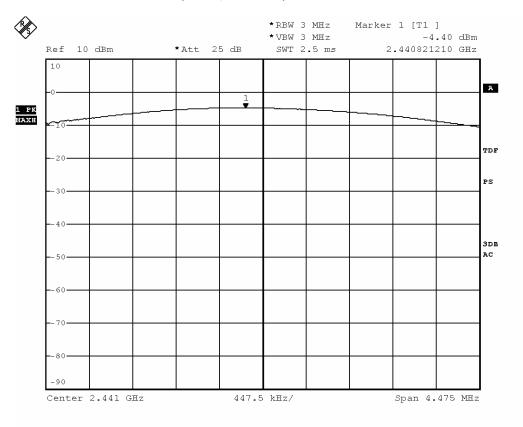



Date : 2017-06-19 Page 11 of 79 No. : DM17050526


### Bluetooth Communication mode (GFSK, 2480MHz)

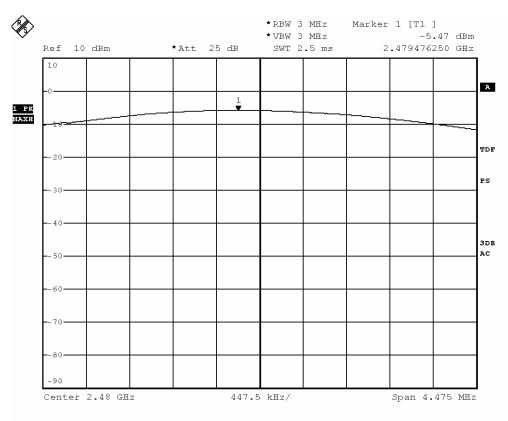



Date : 2017-06-19 Page 12 of 79 No. : DM17050526


### Bluetooth Communication mode (π/4 DQPSK, 2402MHz)

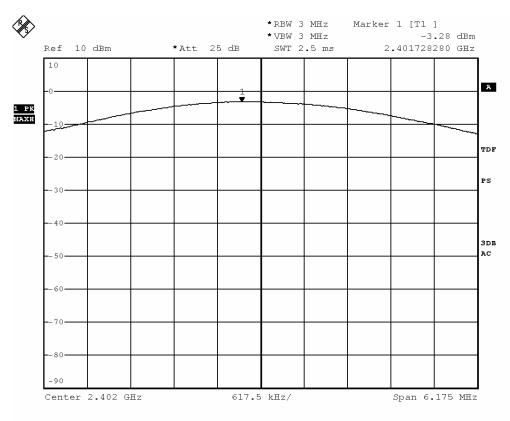



Date : 2017-06-19 Page 13 of 79 No. : DM17050526


#### Bluetooth Communication mode ( $\pi/4$ DQPSK, 2441MHz)

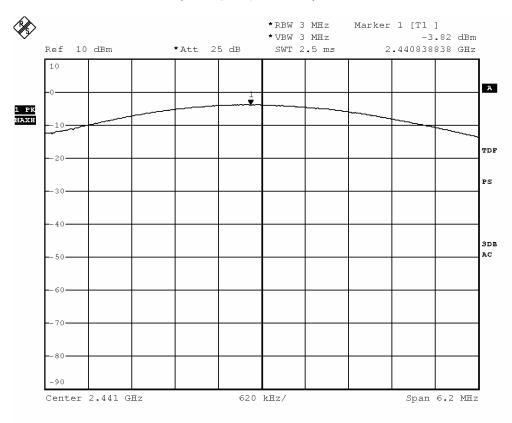



Date : 2017-06-19 Page 14 of 79 No. : DM17050526

### Bluetooth Communication mode (π/4 DQPSK, 2480MHz)

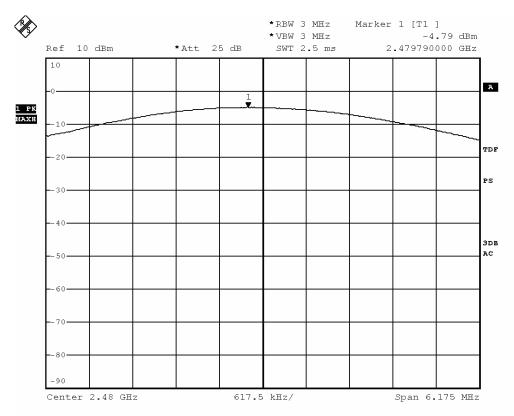



Date: 2017-06-19 Page 15 of 79

No. : DM17050526

#### 3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.10:2013

Test Date: 2017-05-26

Mode of Operation: Tx mode / Bluetooth Communication mode (GFSK)

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-anechoic chamber located on the G/F of "STC (Dongguan) Company Limited" with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2017-06-19 Page 16 of 79 : DM17050526

#### **Spectrum Analyzer Setting:**

9KHz - 30MHz (Pk & Av) RBW: 10kHz

> VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz - 1GHz (QP) RBW: 120kHz

> VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Above 1GHz (Pk) RBW: 1MHz

> VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Av) RBW: 1MHz

VBW: 10Hz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

## **Test Setup:**

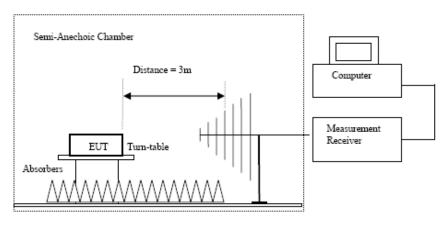

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
   Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz hom antennas are used, 9kHz to 30MHz loop antennas are used.

### STC (Dongguan) Company Limited



Date : 2017-06-19 Page 17 of 79

No. : DM17050526

#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

| Frequency Range | Quasi-Peak Limits |
|-----------------|-------------------|
| [MHz]           | $[\mu V/m]$       |
| 0.009-0.490     | 2400/F (kHz)      |
| 0.490-1.705     | 24000/F (kHz)     |
| 1.705-30        | 30                |
| 30-88           | 100               |
| 88-216          | 150               |
| 216-960         | 200               |
| Above960        | 500               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK) (9kHz – 30MHz): Pass

| Result of 14 mode (2 102:0 Mille) (GI SIX) (7 Kile 20 Mille): 1 dis |   |        |          |          |      |          |  |  |
|---|---|--------|----------|----------|------|----------|--|--|
|   | Field Strength of Spurious Emissions                        |        |          |          |      |          |  |  |
|   | Peak Value  |        |          |          |      |          |  |  |
| Frequency   | Frequency Measured Correction Field Field Limit E-Field     |        |          |          |      |          |  |  |
|   | Level   | Factor | Strength | Strength |      | Polarity |  |  |
| MHz   | dBuV  | dB/m   | dBuV/m   | uV/m     | uV/m |          |  |  |
|   | Emissions detected are more than 20 dB below the FCC Limits |        |          |          |      |          |  |  |

### Result of Tx mode (2402.0 MHz) (GFSK) (Above 1GHz): Pass

|           | Field Strength of Spurious Emissions<br>Peak Value |            |             |             |        |            |  |  |
|-----------|--|------------|-------------|-------------|--------|------------|--|--|
| Frequency | Measured   | Correction | Field       | Limit       | Margin | E-Field    |  |  |
|           | Level @3m  | Factor     | Strength    | @3m         |        | Polarity   |  |  |
| MHz       | dΒμV   | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |  |
| 4804.0    | 15.9   | 41.5       | 57.4        | 74.0        | 16.6   | Vertical   |  |  |
| 4804.0    | 14.6   | 42.4       | 57.0        | 74.0        | 17.0   | Horizontal |  |  |
| 7206.0    | 11.7   | 45.1       | 56.8        | 74.0        | 17.2   | Vertical   |  |  |
| 7206.0    | 10.4   | 46.2       | 56.6        | 74.0        | 17.4   | Horizontal |  |  |
| 9608.0    | 7.2  | 48.0       | 55.2        | 74.0        | 18.8   | Vertical   |  |  |
| 9608.0    | 6.9  | 48.8       | 55.7        | 74.0        | 18.3   | Horizontal |  |  |
| 12010.0   | 4.3  | 51.5       | 55.8        | 74.0        | 18.2   | Vertical   |  |  |
| 12010.0   | 3.8  | 52.4       | 56.2        | 74.0        | 17.8   | Horizontal |  |  |



Date : 2017-06-19 Page 18 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions<br>Average Value |            |          |        |        |            |  |  |  |  |
|-----------|---|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured  | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m   | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV  | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4804.0    | 0.6   | 41.5       | 42.1     | 54.0   | 11.9   | Vertical   |  |  |  |  |
| 4804.0    | -0.6  | 42.4       | 41.8     | 54.0   | 12.2   | Horizontal |  |  |  |  |
| 7206.0    | -2.7  | 45.1       | 42.4     | 54.0   | 11.6   | Vertical   |  |  |  |  |
| 7206.0    | -4.5  | 46.2       | 41.7     | 54.0   | 12.3   | Horizontal |  |  |  |  |
| 9608.0    | -7.4  | 48.0       | 40.6     | 54.0   | 13.4   | Vertical   |  |  |  |  |
| 9608.0    | -7.5  | 48.8       | 41.3     | 54.0   | 12.7   | Horizontal |  |  |  |  |
| 12010.0   | -10.6   | 51.8       | 41.2     | 54.0   | 12.8   | Vertical   |  |  |  |  |
| 12010.0   | -10.3   | 52.4       | 42.1     | 54.0   | 11.9   | Horizontal |  |  |  |  |

### Result of Tx mode (2441.0 MHz) (GFSK) (9kHz - 30MHz): Pass

|            | Field Strength of Spurious Emissions                        |            |          |          |       |          |  |  |
|------------|---|------------|----------|----------|-------|----------|--|--|
| Peak Value |   |            |          |          |       |          |  |  |
| Frequency  | Measured  | Correction | Field    | Field    | Limit | E-Field  |  |  |
|            | Level   | Factor     | Strength | Strength |       | Polarity |  |  |
| MHz        | dBuV  | dB/m       | dBuV/m   | uV/m     | uV/m  |          |  |  |
|            | Emissions detected are more than 20 dB below the FCC Limits |            |          |          |       |          |  |  |

## Result of Tx mode (2441.0 MHz) (GFSK) (Above 1GHz): Pass

|           | Field Strength of Spurious Emissions<br>Peak Value |            |          |        |        |            |  |  |  |  |  |
|-----------|--|------------|----------|--------|--------|------------|--|--|--|--|--|
| Frequency | Measured   | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |  |
|           | Level @3m  | Factor     | Strength | @3m    | _      | Polarity   |  |  |  |  |  |
| MHz       | dBuV   | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |  |
| 4882.0    | 16.3   | 41.6       | 57.9     | 74.0   | 16.1   | Vertical   |  |  |  |  |  |
| 4882.0    | 15.1   | 42.5       | 57.6     | 74.0   | 16.4   | Horizontal |  |  |  |  |  |
| 7323.0    | 11.6   | 53.2       | 64.8     | 74.0   | 9.2    | Vertical   |  |  |  |  |  |
| 7323.0    | 10.2   | 46.3       | 56.5     | 74.0   | 17.5   | Horizontal |  |  |  |  |  |
| 9764.0    | 7.5  | 48.1       | 55.6     | 74.0   | 18.4   | Vertical   |  |  |  |  |  |
| 9764.0    | 6.9  | 48.9       | 55.8     | 74.0   | 18.2   | Horizontal |  |  |  |  |  |
| 12205.0   | 4.4  | 51.6       | 56.0     | 74.0   | 18.0   | Vertical   |  |  |  |  |  |
| 12205.0   | 3.8  | 52.5       | 56.3     | 74.0   | 17.7   | Horizontal |  |  |  |  |  |



Date : 2017-06-19 Page 19 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions<br>Average Value |            |          |        |        |            |  |  |  |  |
|-----------|---|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured  | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m   | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV  | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4882.0    | 1.2   | 41.6       | 42.8     | 54.0   | 11.2   | Vertical   |  |  |  |  |
| 4882.0    | -0.1  | 42.5       | 42.4     | 54.0   | 11.6   | Horizontal |  |  |  |  |
| 7323.0    | -4.1  | 45.2       | 41.1     | 54.0   | 12.9   | Vertical   |  |  |  |  |
| 7323.0    | -4.4  | 46.3       | 41.9     | 54.0   | 12.1   | Horizontal |  |  |  |  |
| 9764.0    | -6.7  | 48.1       | 41.4     | 54.0   | 12.6   | Vertical   |  |  |  |  |
| 9764.0    | -8.9  | 48.9       | 40.0     | 54.0   | 14.0   | Horizontal |  |  |  |  |
| 12205.0   | -9.6  | 51.6       | 42.0     | 54.0   | 12.0   | Vertical   |  |  |  |  |
| 12205.0   | -10.7   | 52.5       | 41.8     | 54.0   | 12.2   | Horizontal |  |  |  |  |

### Result of Tx mode (2480.0 MHz) (GFSK) (9kHz - 30MHz): Pass

|            | Field Strength of Spurious Emissions                        |            |          |          |       |          |  |  |
|------------|---|------------|----------|----------|-------|----------|--|--|
| Peak Value |   |            |          |          |       |          |  |  |
| Frequency  | Measured  | Correction | Field    | Field    | Limit | E-Field  |  |  |
|            | Level   | Factor     | Strength | Strength |       | Polarity |  |  |
| MHz        | dBuV  | dB/m       | dBuV/m   | uV/m     | uV/m  |          |  |  |
|            | Emissions detected are more than 20 dB below the FCC Limits |            |          |          |       |          |  |  |

## Result of Tx mode (2480.0 MHz) (GFSK) (Above 1GHz): Pass

|           | Field Strength of Spurious Emissions<br>Peak Value |            |          |        |        |            |  |  |  |  |
|-----------|--|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured   | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m  | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV   | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4960.0    | 16.5   | 41.4       | 57.9     | 74.0   | 16.1   | Vertical   |  |  |  |  |
| 4960.0    | 14.6   | 42.7       | 57.3     | 74.0   | 16.7   | Horizontal |  |  |  |  |
| 7440.0    | 11.2   | 45.6       | 56.8     | 74.0   | 17.2   | Vertical   |  |  |  |  |
| 7440.0    | 10.6   | 46.5       | 57.1     | 74.0   | 16.9   | Horizontal |  |  |  |  |
| 9920.0    | 6.6  | 48.6       | 55.2     | 74.0   | 18.8   | Vertical   |  |  |  |  |
| 9920.0    | 5.8  | 49.7       | 55.5     | 74.0   | 18.5   | Horizontal |  |  |  |  |
| 12400.0   | 4.4  | 51.7       | 56.1     | 74.0   | 17.9   | Vertical   |  |  |  |  |
| 12400.0   | 3.1  | 52.7       | 55.8     | 74.0   | 18.2   | Horizontal |  |  |  |  |



Date : 2017-06-19 Page 20 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions |            |          |        |        |            |  |  |  |  |
|-----------|--------------------------------------|------------|----------|--------|--------|------------|--|--|--|--|
|           | Average Value                        |            |          |        |        |            |  |  |  |  |
| Frequency | Measured                             | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m                            | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV                                 | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4960.0    | 1.0                                  | 41.4       | 42.4     | 54.0   | 11.6   | Vertical   |  |  |  |  |
| 4960.0    | -0.8                                 | 42.7       | 41.9     | 54.0   | 12.1   | Horizontal |  |  |  |  |
| 7440.0    | -3.4                                 | 45.6       | 42.2     | 54.0   | 11.8   | Vertical   |  |  |  |  |
| 7440.0    | -4.8                                 | 46.5       | 41.7     | 54.0   | 12.3   | Horizontal |  |  |  |  |
| 9920.0    | -8.3                                 | 48.6       | 40.3     | 54.0   | 13.7   | Vertical   |  |  |  |  |
| 9920.0    | -9.8                                 | 49.7       | 39.9     | 54.0   | 14.1   | Horizontal |  |  |  |  |
| 12400.0   | -9.9                                 | 51.7       | 41.8     | 54.0   | 12.2   | Vertical   |  |  |  |  |
| 12400.0   | -12.5                                | 52.7       | 40.2     | 54.0   | 13.8   | Horizontal |  |  |  |  |

#### Result of Tx mode (2402.0 MHz) ( $\pi/4$ -DOPSK) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions                        |          |            |          |          |       |          |  |  |
|---|----------|------------|----------|----------|-------|----------|--|--|
| Peak Value  |          |            |          |          |       |          |  |  |
| Frequency   | Measured | Correction | Field    | Field    | Limit | E-Field  |  |  |
|   | Level    | Factor     | Strength | Strength |       | Polarity |  |  |
| MHz   | dBuV     | dB/m       | dBuV/m   | uV/m     | uV/m  |          |  |  |
| Emissions detected are more than 20 dB below the FCC Limits |          |            |          |          |       |          |  |  |

## Result of Tx mode (2402.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

|           | Field Strength of Spurious Emissions<br>Peak Value |            |             |             |        |            |  |  |  |  |  |
|-----------|--|------------|-------------|-------------|--------|------------|--|--|--|--|--|
| Frequency | Measured   | Correction | Field       | Limit       | Margin | E-Field    |  |  |  |  |  |
|           | Level @3m  | Factor     | Strength    | @3m         |        | Polarity   |  |  |  |  |  |
| MHz       | dΒμV   | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |  |  |  |  |
| 4804.0    | 16.4   | 41.5       | 57.9        | 74.0        | 16.1   | Vertical   |  |  |  |  |  |
| 4804.0    | 15.6   | 42.4       | 58.0        | 74.0        | 16.0   | Horizontal |  |  |  |  |  |
| 7206.0    | 12.6   | 45.1       | 57.7        | 74.0        | 16.3   | Vertical   |  |  |  |  |  |
| 7206.0    | 11.2   | 46.2       | 57.4        | 74.0        | 16.6   | Horizontal |  |  |  |  |  |
| 9608.0    | 7.5  | 48.0       | 55.5        | 74.0        | 18.5   | Vertical   |  |  |  |  |  |
| 9608.0    | 6.5  | 48.8       | 55.3        | 74.0        | 18.7   | Horizontal |  |  |  |  |  |
| 12010.0   | 4.4  | 51.5       | 55.9        | 74.0        | 18.1   | Vertical   |  |  |  |  |  |
| 12010.0   | 3.7  | 52.4       | 56.1        | 74.0        | 17.9   | Horizontal |  |  |  |  |  |



Date : 2017-06-19 Page 21 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions Average Value |            |          |        |        |            |  |  |  |  |
|-----------|--|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured   | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m  | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV   | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4804.0    | 0.8  | 41.5       | 42.3     | 54.0   | 11.7   | Vertical   |  |  |  |  |
| 4804.0    | 0.7  | 42.4       | 43.1     | 54.0   | 10.9   | Horizontal |  |  |  |  |
| 7206.0    | -3.5   | 45.1       | 41.6     | 54.0   | 12.4   | Vertical   |  |  |  |  |
| 7206.0    | -3.3   | 46.2       | 42.9     | 54.0   | 11.1   | Horizontal |  |  |  |  |
| 9608.0    | -6.3   | 48.0       | 41.7     | 54.0   | 12.3   | Vertical   |  |  |  |  |
| 9608.0    | -7.7   | 48.8       | 41.1     | 54.0   | 12.9   | Horizontal |  |  |  |  |
| 12010.0   | -9.3   | 51.5       | 42.2     | 54.0   | 11.8   | Vertical   |  |  |  |  |
| 12010.0   | -10.7  | 52.4       | 41.7     | 54.0   | 12.3   | Horizontal |  |  |  |  |

### Result of Tx mode (2441.0 MHz) ( $\pi$ /4-DQPSK) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions |   |            |          |          |       |          |  |
|--------------------------------------|---|------------|----------|----------|-------|----------|--|
| Peak Value                           |   |            |          |          |       |          |  |
| Frequency                            | Measured  | Correction | Field    | Field    | Limit | E-Field  |  |
|                                      | Level   | Factor     | Strength | Strength |       | Polarity |  |
| MHz                                  | dBuV  | dB/m       | dBuV/m   | uV/m     | uV/m  |          |  |
|                                      | Emissions detected are more than 20 dB below the FCC Limits |            |          |          |       |          |  |

### Result of Tx mode (2441.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

|            | Field Strength of Spurious Emissions |            |          |        |        |            |  |  |  |
|------------|--------------------------------------|------------|----------|--------|--------|------------|--|--|--|
| Peak Value |                                      |            |          |        |        |            |  |  |  |
| Frequency  | Measured                             | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |
|            | Level @3m                            | Factor     | Strength | @3m    |        | Polarity   |  |  |  |
| MHz        | dBuV                                 | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |
| 4882.0     | 16.6                                 | 41.6       | 58.2     | 74.0   | 15.8   | Vertical   |  |  |  |
| 4882.0     | 15.1                                 | 42.5       | 57.6     | 74.0   | 16.4   | Horizontal |  |  |  |
| 7323.0     | 12.7                                 | 45.2       | 57.9     | 74.0   | 16.1   | Vertical   |  |  |  |
| 7323.0     | 11.2                                 | 46.3       | 57.5     | 74.0   | 16.5   | Horizontal |  |  |  |
| 9764.0     | 6.8                                  | 48.1       | 54.9     | 74.0   | 19.1   | Vertical   |  |  |  |
| 9764.0     | 5.7                                  | 48.9       | 54.6     | 74.0   | 19.4   | Horizontal |  |  |  |
| 12205.0    | 4.7                                  | 51.6       | 56.3     | 74.0   | 17.7   | Vertical   |  |  |  |
| 12205.0    | 3.5                                  | 52.5       | 56.0     | 74.0   | 18.0   | Horizontal |  |  |  |



Date : 2017-06-19 Page 22 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions<br>Average Value |            |          |        |        |            |  |  |  |  |
|-----------|---|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured  | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m   | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV  | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4882.0    | 1.4   | 41.6       | 43.0     | 54.0   | 11.0   | Vertical   |  |  |  |  |
| 4882.0    | -0.4  | 42.5       | 42.1     | 54.0   | 11.9   | Horizontal |  |  |  |  |
| 7323.0    | -2.6  | 45.2       | 42.6     | 54.0   | 11.4   | Vertical   |  |  |  |  |
| 7323.0    | -4.2  | 46.3       | 42.1     | 54.0   | 11.9   | Horizontal |  |  |  |  |
| 9764.0    | -7.3  | 48.1       | 40.8     | 54.0   | 13.2   | Vertical   |  |  |  |  |
| 9764.0    | -8.8  | 48.9       | 40.1     | 54.0   | 13.9   | Horizontal |  |  |  |  |
| 12205.0   | -9.7  | 51.6       | 41.9     | 54.0   | 12.1   | Vertical   |  |  |  |  |
| 12205.0   | -11.3   | 52.5       | 41.2     | 54.0   | 12.8   | Horizontal |  |  |  |  |

### Result of Tx mode (2480.0 MHz) ( $\pi$ /4-DQPSK) (9kHz – 30MHz): Pass

|            | Field Strength of Spurious Emissions                        |            |          |          |       |          |  |  |
|------------|---|------------|----------|----------|-------|----------|--|--|
| Peak Value |   |            |          |          |       |          |  |  |
| Frequency  | Measured  | Correction | Field    | Field    | Limit | E-Field  |  |  |
|            | Level   | Factor     | Strength | Strength |       | Polarity |  |  |
| MHz        | dBuV  | dB/m       | dBuV/m   | uV/m     | uV/m  |          |  |  |
|            | Emissions detected are more than 20 dB below the FCC Limits |            |          |          |       |          |  |  |

### Result of Tx mode (2480.0 MHz) (π/4-DQPSK) (Above 1GHz): Pass

|           | Field Strength of Spurious Emissions |            |          |        |        |            |  |  |  |  |
|-----------|--------------------------------------|------------|----------|--------|--------|------------|--|--|--|--|
| F         | Peak Value                           |            |          |        |        |            |  |  |  |  |
| Frequency | Measured                             | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m                            | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV                                 | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4960.0    | 15.9                                 | 41.4       | 57.3     | 74.0   | 16.7   | Vertical   |  |  |  |  |
| 4960.0    | 14.9                                 | 42.7       | 57.6     | 74.0   | 16.4   | Horizontal |  |  |  |  |
| 7440.0    | 11.4                                 | 45.6       | 57.0     | 74.0   | 17.0   | Vertical   |  |  |  |  |
| 7440.0    | 10.3                                 | 46.5       | 56.8     | 74.0   | 17.2   | Horizontal |  |  |  |  |
| 9920.0    | 7.1                                  | 48.6       | 55.7     | 74.0   | 18.3   | Vertical   |  |  |  |  |
| 9920.0    | 5.3                                  | 49.7       | 55.0     | 74.0   | 19.0   | Horizontal |  |  |  |  |
| 12400.0   | 4.5                                  | 51.7       | 56.2     | 74.0   | 17.8   | Vertical   |  |  |  |  |
| 12400.0   | 3.3                                  | 52.7       | 56.0     | 74.0   | 18.0   | Horizontal |  |  |  |  |



Date : 2017-06-19 Page 23 of 79 No. : DM17050526

|           | Field Strength of Spurious Emissions<br>Average Value |            |          |        |        |            |  |  |  |  |
|-----------|---|------------|----------|--------|--------|------------|--|--|--|--|
| Frequency | Measured  | Correction | Field    | Limit  | Margin | E-Field    |  |  |  |  |
|           | Level @3m   | Factor     | Strength | @3m    |        | Polarity   |  |  |  |  |
| MHz       | dBuV  | dB/m       | dBuV/m   | dBuV/m | dB     |            |  |  |  |  |
| 4960.0    | 1.1   | 41.4       | 42.5     | 54.0   | 11.5   | Vertical   |  |  |  |  |
| 4960.0    | -0.5  | 42.7       | 42.2     | 54.0   | 11.8   | Horizontal |  |  |  |  |
| 7440.0    | -3.4  | 45.6       | 42.2     | 54.0   | 11.8   | Vertical   |  |  |  |  |
| 7440.0    | -5.1  | 46.5       | 41.4     | 54.0   | 12.6   | Horizontal |  |  |  |  |
| 9920.0    | -7.0  | 48.6       | 41.6     | 54.0   | 12.4   | Vertical   |  |  |  |  |
| 9920.0    | -8.9  | 49.7       | 40.8     | 54.0   | 13.2   | Horizontal |  |  |  |  |
| 12400.0   | -9.4  | 51.7       | 42.3     | 54.0   | 11.7   | Vertical   |  |  |  |  |
| 12400.0   | -11.0   | 52.7       | 41.7     | 54.0   | 12.3   | Horizontal |  |  |  |  |

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits.

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB

30MHz -1GHz 4.6dB 1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-06-19 Page 24 of 79

No. : DM17050526

#### **Radiated Emissions Measurement:**

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: RF Radiated Emissions (Lowest)-GFSK

| Field Strength of Band-edge Compliance |           |            |             |             |        |          |  |  |
|--|-----------|------------|-------------|-------------|--------|----------|--|--|
| Peak Value                             |           |            |             |             |        |          |  |  |
| Frequency                              | Measured  | Correction | Field       | Limit       | Margin | E-Field  |  |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity |  |  |
| MHz                                    | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |          |  |  |
| 2390.0                                 | 18.3      | 36.8       | 55.1        | 74.0        | 18.9   | Vertical |  |  |

|               | Field Strength of Band-edge Compliance |            |             |             |        |          |  |  |  |
|---------------|--|------------|-------------|-------------|--------|----------|--|--|--|
| Average Value |  |            |             |             |        |          |  |  |  |
| Frequency     | Measured                               | Correction | Field       | Limit       | Margin | E-Field  |  |  |  |
|               | Level @3m                              | Factor     | Strength    | @3m         |        | Polarity |  |  |  |
| MHz           | dΒμV                                   | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |          |  |  |  |
| 2390.0        | 4.4                                    | 36.8       | 41.2        | 54.0        | 12.8   | Vertical |  |  |  |

Result: RF Radiated Emissions (Highest) -GFSK

| Result. It Rudilled Emissions (Highest) GISR |           |            |             |             |        |            |  |  |
|--|-----------|------------|-------------|-------------|--------|------------|--|--|
| Field Strength of Band-edge Compliance       |           |            |             |             |        |            |  |  |
| Peak Value                                   |           |            |             |             |        |            |  |  |
| Frequency                                    | Measured  | Correction | Field       | Limit       | Margin | E-Field    |  |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity   |  |  |
| MHz  | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |  |
| 2483.5                                       | 23.9      | 36.4       | 60.3        | 74.0        | 13.7   | Horizontal |  |  |

| Field Strength of Band-edge Compliance |           |            |             |             |        |            |  |
|--|-----------|------------|-------------|-------------|--------|------------|--|
| Average Value                          |           |            |             |             |        |            |  |
| Frequency                              | Measured  | Correction | Field       | Limit       | Margin | E-Field    |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity   |  |
| MHz                                    | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |
| 2483.5                                 | 7.5       | 36.4       | 43.9        | 54.0        | 10.1   | Horizontal |  |



Date : 2017-06-19 Page 25 of 79 No. : DM17050526

#### **Radiated Emissions Measurement:**

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### Result: RF Radiated Emissions (Lowest)- π/4-DQPSK

| Field Strength of Band-edge Compliance |           |            |             |             |        |          |  |  |
|--|-----------|------------|-------------|-------------|--------|----------|--|--|
| Peak Value                             |           |            |             |             |        |          |  |  |
| Frequency                              | Measured  | Correction | Field       | Limit       | Margin | E-Field  |  |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity |  |  |
| MHz                                    | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |          |  |  |
| 2390.0                                 | 18.3      | 36.8       | 55.1        | 74.0        | 18.9   | Vertical |  |  |

| Field Strength of Band-edge Compliance |               |            |          |        |        |          |  |  |  |
|--|---------------|------------|----------|--------|--------|----------|--|--|--|
|  | Average Value |            |          |        |        |          |  |  |  |
| Frequency                              | Measured      | Correction | Field    | Limit  | Margin | E-Field  |  |  |  |
|  | Level @3m     | Factor     | Strength | @3m    |        | Polarity |  |  |  |
| MHz                                    | dΒμV          | dB/m       | dBμV/m   | dBμV/m | dB     |          |  |  |  |
| 2390.0                                 | 5.1           | 36.8       | 41.9     | 54.0   | 12.1   | Vertical |  |  |  |

#### Result: RF Radiated Emissions (Highest) -π/4-DOPSK

| Result: Ri Radiated Emissions (Highest) -1/4-DQ1 51x |           |            |             |             |        |            |  |  |
|--|-----------|------------|-------------|-------------|--------|------------|--|--|
| Field Strength of Band-edge Compliance               |           |            |             |             |        |            |  |  |
| Peak Value   |           |            |             |             |        |            |  |  |
| Frequency  | Measured  | Correction | Field       | Limit       | Margin | E-Field    |  |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity   |  |  |
| MHz  | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |  |
| 2483.5   | 24.9      | 36.4       | 61.3        | 74.0        | 12.7   | Horizontal |  |  |

| Field Strength of Band-edge Compliance |           |            |             |             |        |            |  |
|--|-----------|------------|-------------|-------------|--------|------------|--|
| Average Value                          |           |            |             |             |        |            |  |
| Frequency                              | Measured  | Correction | Field       | Limit       | Margin | E-Field    |  |
|  | Level @3m | Factor     | Strength    | @3m         |        | Polarity   |  |
| MHz                                    | dΒμV      | dB/m       | $dB\mu V/m$ | $dB\mu V/m$ | dB     |            |  |
| 2483.5                                 | 7.0       | 36.4       | 43.4        | 54.0        | 10.6   | Horizontal |  |



Date : 2017-06-19 Page 26 of 79 No. : DM17050526

#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:

| Frequency Range | Quasi-Peak Limits |
|-----------------|-------------------|
| [MHz]           | $[\mu V/m]$       |
| 0.009-0.490     | 2400/F (kHz)      |
| 0.490-1.705     | 24000/F (kHz)     |
| 1.705-30        | 30                |
| 30-88           | 100               |
| 88-216          | 150               |
| 216-960         | 200               |
| Above960        | 500               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal dBµ√/m Limit 80 70 60 50 wander the water was a second of the second 40 20 10 0 30.0 100.0 1000.0 MHz



Date : 2017-06-19 Page 27 of 79 No. : DM17050526

Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

| Result of Diuetoo | th play mode (G1   | DIX 2402.0 MIII | <i>E)</i> (30MIII2 – 1G. | 11 <i>L</i> ). 1 ass |       |
|-------------------|--------------------|-----------------|--------------------------|----------------------|-------|
|                   | Radiated Emissions |                 |                          |                      |       |
|                   | Quasi-Peak         |                 |                          |                      |       |
| Emission          | E-Field            | Level           | Limit                    | Level                | Limit |
| Frequency         | Polarity           | @3m             | @3m                      | @3m                  | @3m   |
| MHz               |                    | dBμV/m          | dBμV/m                   | μV/m                 | μV/m  |
| 240.0             | Horizontal         | 36.5            | 46.0                     | 66.8                 | 200   |
| 261.0             | Horizontal         | 36.7            | 46.0                     | 68.4                 | 200   |
| 347.1             | Horizontal         | 36.6            | 46.0                     | 67.6                 | 200   |



Date : 2017-06-19 Page 28 of 79

No. : DM17050526

#### Limits for Radiated Emissions FCC 47 CFR 15.247 Class B]:


| Frequency Range | Quasi-Peak Limits |
|-----------------|-------------------|
| [MHz]           | $[\mu V/m]$       |
| 0.009-0.490     | 2400/F (kHz)      |
| 0.490-1.705     | 24000/F (kHz)     |
| 1.705-30        | 30                |
| 30-88           | 100               |
| 88-216          | 150               |
| 216-960         | 200               |
| Above960        | 500               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Vertical

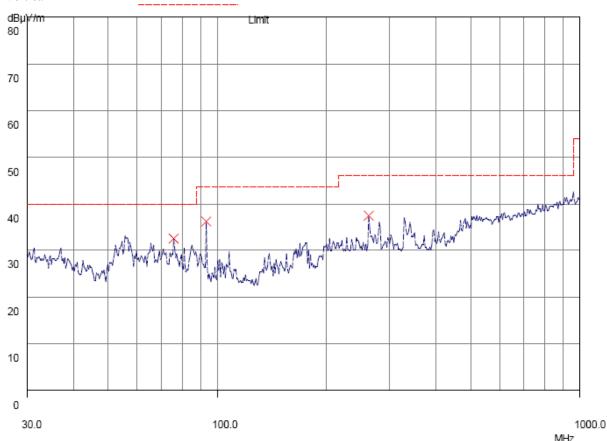



Date : 2017-06-19 Page 29 of 79 No. : DM17050526

Result of Bluetooth play mode (GFSK 2402.0 MHz) (30MHz – 1GHz): Pass

| Tresure of Braces | Radiated Emissions                              |       |       |       |       |
|-------------------|---|-------|-------|-------|-------|
|                   | Quasi-Peak                                      |       |       |       |       |
| Emission          | E-Field   | Level | Limit | Level | Limit |
| Frequency         | Polarity  | @3m   | @3m   | @3m   | @3m   |
| MHz               | MHz $dB\mu V/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$ |       |       |       |       |
| 75.8              | Vertical  | 30.2  | 40.0  | 32.4  | 100   |
| 93.4              | Vertical  | 34.1  | 43.5  | 50.7  | 150   |
| 260.9             | Vertical  | 35.5  | 46.0  | 59.6  | 200   |

#### Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date : 2017-06-19 Page 30 of 79

No. : DM17050526

#### 3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.10:2013
Test Date: 2017-05-26

Mode of Operation: Bluetooth Communication mode

Test Voltage: 120Va.c. 60Hz


#### **Test Method:**

The test was performed in accordance with ANSI ANSI C63.10:2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Receiver Setting:**

Bandw. = 9 kHz, Meas. Time= 10.0 ms, Step Width = 5.0kHz Detector = MaxPeak and CISPR AV

### **Test Setup:**

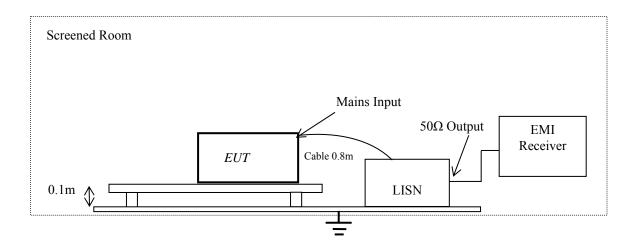



Date : 2017-06-19 Page 31 of 79

No. : DM17050526

#### Limits for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range | Quasi-Peak Limits | Average   |
|-----------------|-------------------|-----------|
| [MHz]           | [dBµV]            | [dBµV]    |
| 0.15-0.5        | 66 to 56*         | 56 to 46* |
| 0.5-5.0         | 56                | 46        |
| 5.0-30.0        | 60                | 50        |

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Results of Bluetooth Communication mode (L): PASS

Please refer to the following diagram for individual results.

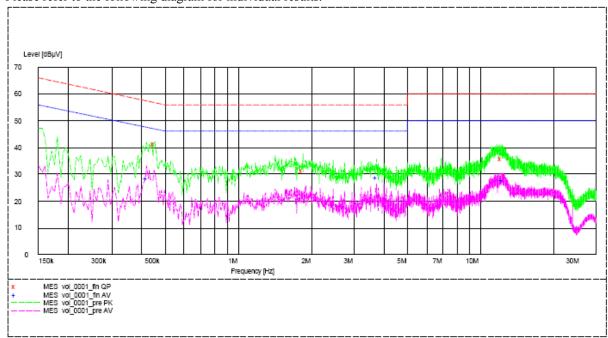

|                 |           | Quasi-peak |       | Ave   | rage  |
|-----------------|-----------|------------|-------|-------|-------|
| Conductor       | Frequency | Level      | Limit | Level | Limit |
| Live or Neutral | MHz       | dΒμV       | dΒμV  | dΒμV  | dΒμV  |
| Live            | 0.450     | 41.3       | 57.0  | _*_   | _*_   |
| Live            | 1.850     | 31.5       | 56.0  | _*_   | _*_   |
| Live            | 12.185    | 36.1       | 60.0  | _*_   | _*_   |
| Live            | 0.420     | _*_        | _*_   | 28.7  | 47.0  |
| Live            | 3.720     | _*_        | _*_   | 29.0  | 56.0  |
| Live            | 12.305    | _*_        | _*_   | 28.0  | 50.0  |



Date : 2017-06-19 Page 32 of 79 No. : DM17050526


| Frequency Range | Quasi-Peak Limits | Average   |
|-----------------|-------------------|-----------|
| [MHz]           | [dBµV]            | [dBµV]    |
| 0.15-0.5        | 66 to 56*         | 56 to 46* |
| 0.5-5.0         | 56                | 46        |
| 5.0-30.0        | 60                | 50        |

<sup>\*</sup> Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

#### Results of Bluetooth Communication mode (N): PASS

Please refer to the following diagram for individual results.

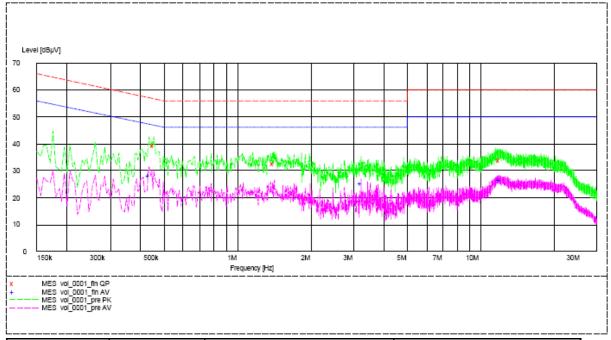

|                 |           | Quasi-peak |       | Ave   | rage  |
|-----------------|-----------|------------|-------|-------|-------|
| Conductor       | Frequency | Level      | Limit | Level | Limit |
| Live or Neutral | MHz       | dΒμV       | dΒμV  | dΒμV  | dΒμV  |
| Neutral         | 0.455     | 39.6       | 57.0  | _*_   | _*_   |
| Neutral         | 1.415     | 33.0       | 56.0  | _*_   | _*_   |
| Neutral         | 11.930    | 33.9       | 60.0  | _*_   | _*_   |
| Neutral         | 0.435     | _*_        | _*_   | 28.3  | 47.0  |
| Neutral         | 3.230     | _*_        | _*_   | 25.2  | 46.0  |
| Neutral         | 11.930    | _*_        | _*_   | 26.5  | 50.0  |

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-\*- Emission(s) that is far below the corresponding limit line.



Date : 2017-06-19 Page 33 of 79 No. : DM17050526

#### 3.1.4 Number of Hopping Frequency

#### **Limit of Number of Hopping Frequency**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.


#### **Spectrum Analyzer Setting:**


RBW = 300kHz, VBW  $\geq$  RBW, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

## Measurement Data:



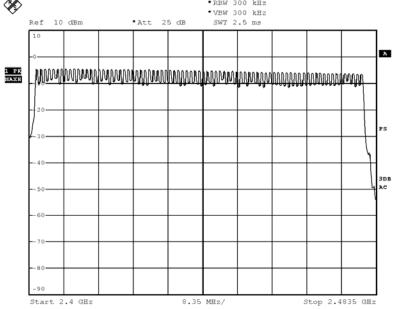




Date : 2017-06-19 Page 34 of 79

No. : DM17050526

## π/4-DQPSK: 79 of 79 Channel

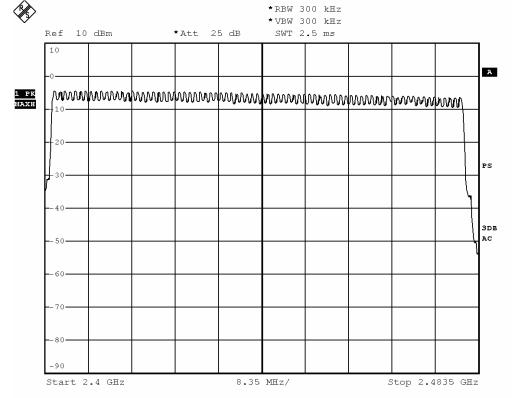



Date : 2017-06-19 Page 35 of 79 No. : DM17050526

#### 3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)
Test Method: ANSI C63.10:2013

Test Date: 2017-05-26 Mode of Operation: Tx mode

#### Remark

The result has been done on all the possible configurations for searching the worst cases.

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Spectrum Analyzer Setting:**

RBW = 30kHz, VBW  $\geq$  RBW, Sweep = Auto, Span = two times and five times the OBW Detector = Peak, Trace = Max. hold

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date : 2017-06-19 Page 36 of 79

No. : DM17050526

| Fundamental Frequency | 20dB Bandwidth | FCC Limits         |
|-----------------------|----------------|--------------------|
| [MHz]                 | [KHz]          | [MHz]              |
| 2402                  | 850.0          | Within 2400-2483.5 |

### (Lowest Operating Frequency) - (GFSK)

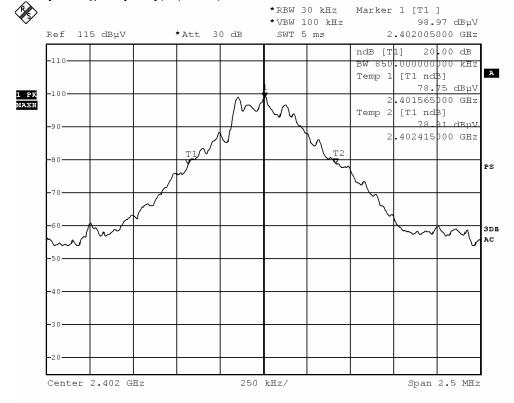




Date : 2017-06-19 Page 37 of 79 No. : DM17050526

| Fundamental Frequency | 20dB Bandwidth | FCC Limits         |
|-----------------------|----------------|--------------------|
| [MHz]                 | [KHz]          | [MHz]              |
| 2441                  | 845.0          | Within 2400-2483.5 |

### (Middle Operating Frequency) - (GFSK)

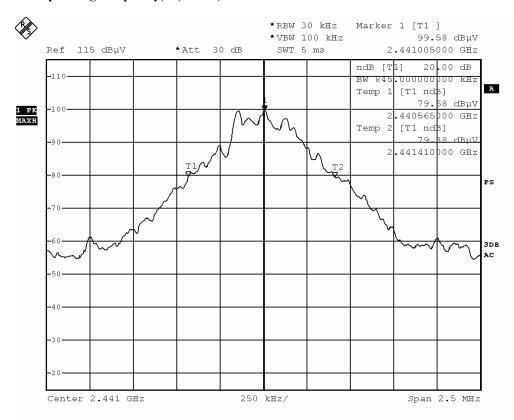




Date : 2017-06-19 Page 38 of 79 No. : DM17050526

| Fundamental Frequency | 20dB Bandwidth | FCC Limits         |
|-----------------------|----------------|--------------------|
| [MHz]                 | [KHz]          | [MHz]              |
| 2480                  | 845.0          | Within 2400-2483.5 |

### (Highest Operating Frequency) - (GFSK)

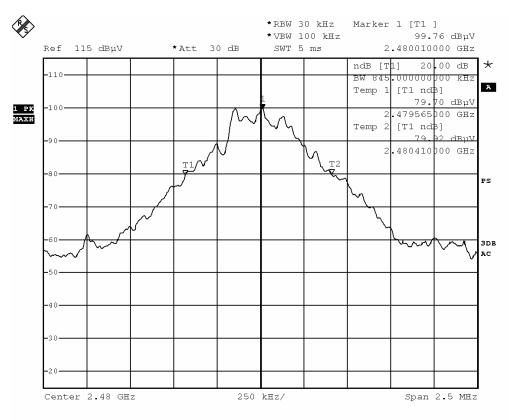




Date : 2017-06-19 Page 39 of 79 No. : DM17050526

| Fun | damental Frequency | 20dB Bandwidth | FCC Limits         |
|-----|--------------------|----------------|--------------------|
|     | [MHz]              | [MHz]          | [MHz]              |
|     | 2402               | 1 215          | Within 2400-2483 5 |

### (Lowest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

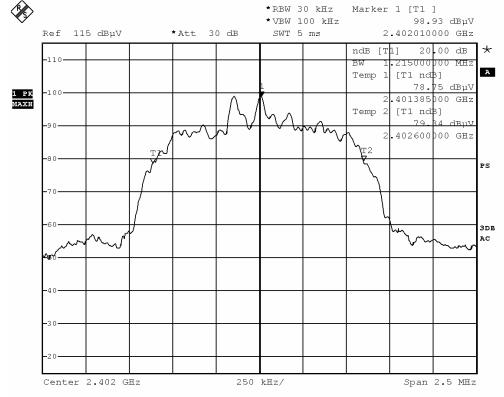




Date : 2017-06-19 Page 40 of 79 No. : DM17050526

| Fundamental Frequency | 20dB Bandwidth | FCC Limits         |
|-----------------------|----------------|--------------------|
| [MHz]                 | [MHz]          | [MHz]              |
| 2441                  | 1.215          | Within 2400-2483.5 |

### (Middle Operating Frequency) - $(\pi/4 \text{ DQPSK})$

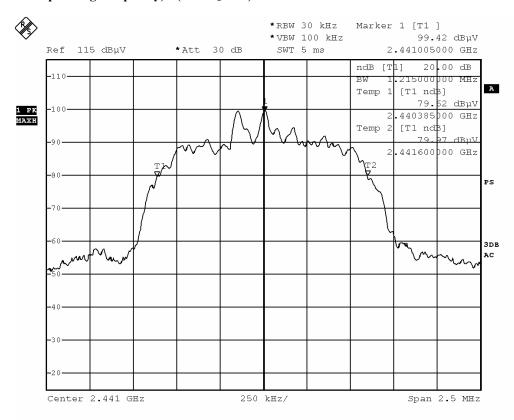




Date : 2017-06-19 Page 41 of 79

No. : DM17050526

| Fundamental Frequency | 20dB Bandwidth | FCC Limits         |
|-----------------------|----------------|--------------------|
| [MHz]                 | [MHz]          | [MHz]              |
| 2480                  | 1.215          | Within 2400-2483.5 |

### (Highest Operating Frequency) - $(\pi/4 \text{ DQPSK})$

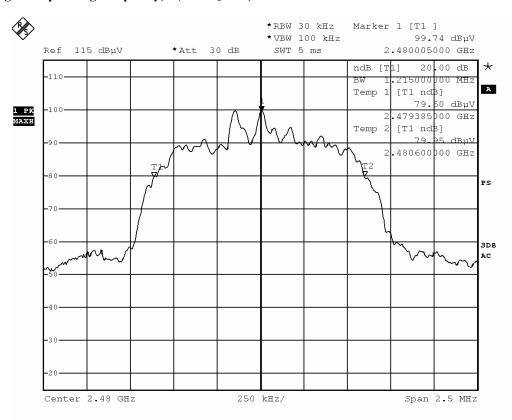



Date : 2017-06-19 Page 42 of 79 No. : DM17050526

#### 3.1.6 Hopping Channel Separation

#### **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **Spectrum Analyzer Setting:**

RBW = 300kHz, VBW ≥ RBW, Sweep = Auto, Span = Wide enough to captur the peaks of two adjacent channels Detector = Peak, Trace = Max. hold

#### Limit:


The measured maximum bandwidth=850kHz(GFSK)

The measured maximum bandwidth \* 2/3 = 1.215MHz \* 2/3 = 810kHz( $\pi/4$  DQPSK)



Date : 2017-06-19 Page 43 of 79 No. : DM17050526


### Channel separation = 1MHz (>850kHz) (Lowest) (GFSK)

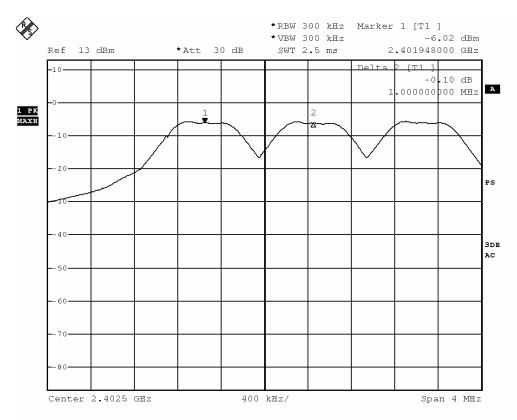



Date : 2017-06-19 Page 44 of 79 No. : DM17050526


### Channel separation = 1MHz (>850kHz) (Mid) (GFSK)

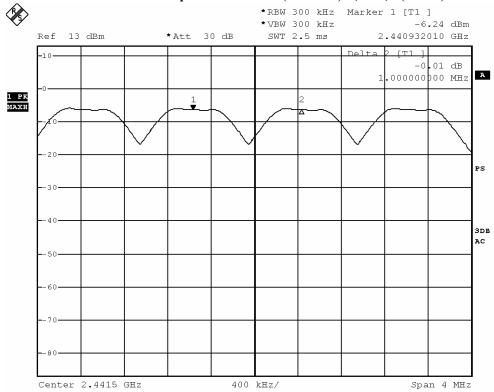



Date : 2017-06-19 Page 45 of 79 No. : DM17050526

### Channel separation = 1MHz (>850kHz) (Highest) (GFSK)

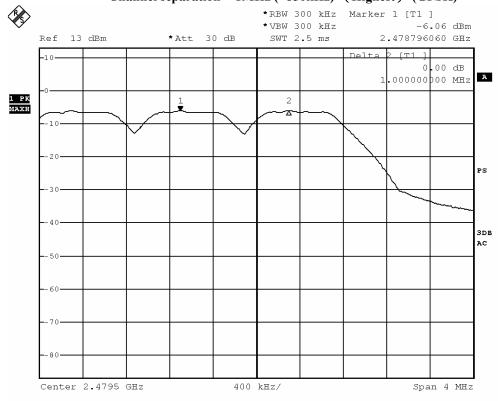




Date : 2017-06-19 Page 46 of 79

No. : DM17050526


### Channel separation = 1MHz (>810kHz) (Lowest) ( $\pi/4$ DQPSK)

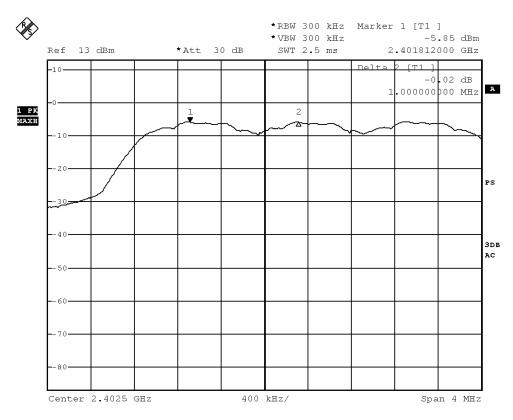



Date : 2017-06-19 Page 47 of 79 No. : DM17050526

### Channel separation = 1 MHz (>810kHz) (Mid) ( $\pi/4$ DQPSK)

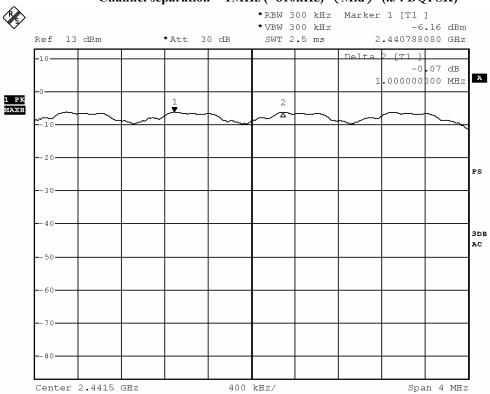




Date : 2017-06-19 Page 48 of 79

No. : DM17050526

### Channel separation = 1MHz (>810kHz) (Highest) ( $\pi/4$ DQPSK)

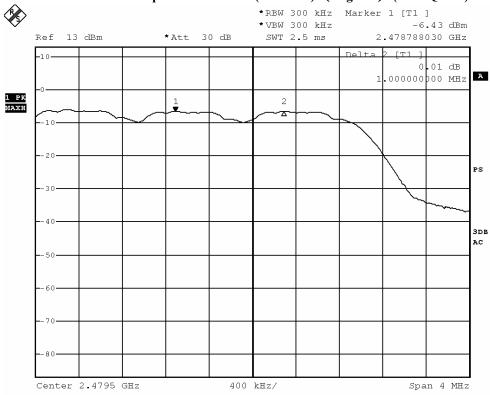



Date : 2017-06-19 Page 49 of 79 No. : DM17050526

### 3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

According to the test method DA 00-705.

#### **Spectrum Analyzer Setting:**

RBW = 100kHz, VBW= 300kHz, Sweep = Coupled,

Span = Wide enough to captur the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Detector = Peak, Trace = Max. hold

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report




Date : 2017-06-19 Page 50 of 79 No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                  | Radiated Emission Attenuated below the Fundamental |
|----------------------------------|--|
| [MHz]                            | [dB]   |
| 2400 – Lowest Fundamental (2402) | 33.03  |

### Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping on)

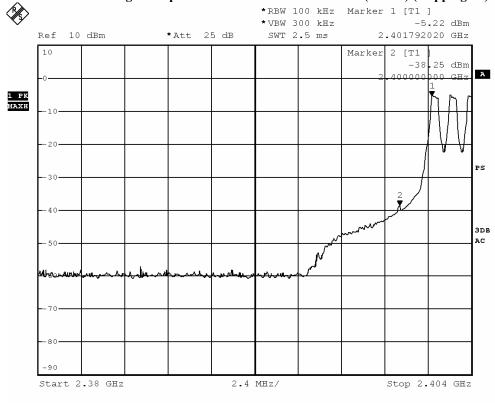




Date : 2017-06-19 Page 51 of 79 No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                  | Radiated Emission Attenuated below the Fundamental |
|----------------------------------|--|
| [MHz]                            | [dB]   |
| 2400 – Lowest Fundamental (2402) | 33.34  |

### Band-edge Compliance of RF Emissions - Lowest (GFSK) (Hopping off)

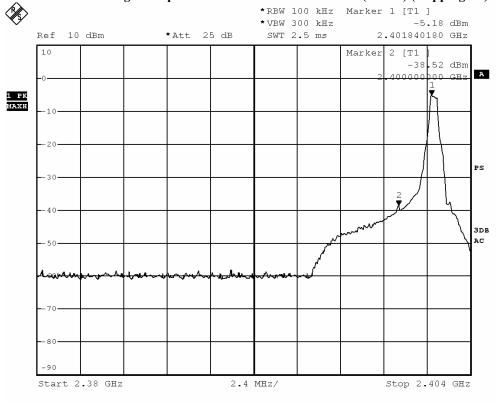




Date : 2017-06-19 Page 52 of 79 No. : DM17050526

#### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                     | Radiated Emission Attenuated below the Fundamental |
|-------------------------------------|--|
| [MHz]                               | [dB]   |
| 2483.5 - Highest Fundamental (2480) | 53.88  |

### Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping on)

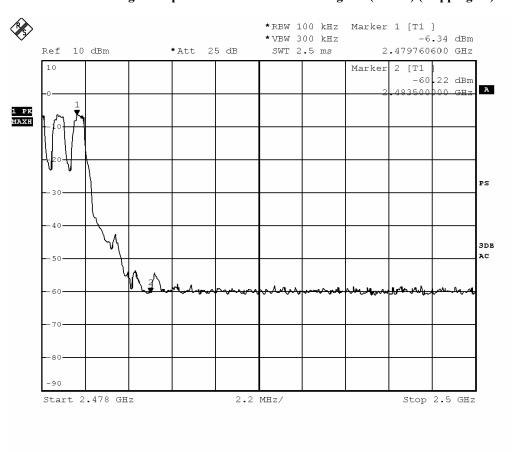




Date : 2017-06-19 Page 53 of 79 No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                     | Radiated Emission Attenuated below the Fundamental |
|-------------------------------------|--|
| [MHz]                               | [dB]   |
| 2483.5 - Highest Fundamental (2480) | 52.99  |

### Band-edge Compliance of RF Emissions - Highest (GFSK) (Hopping off)

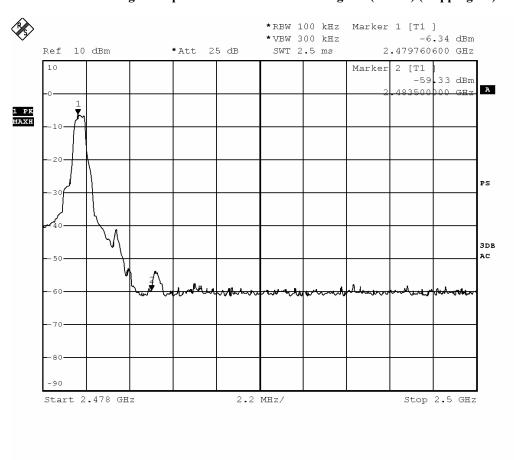




Date : 2017-06-19 Page 54 of 79 No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                  | Radiated Emission Attenuated below the Fundamental |
|----------------------------------|--|
| [MHz]                            | [dB]   |
| 2400 – Lowest Fundamental (2402) | 35.67  |

### Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping on)

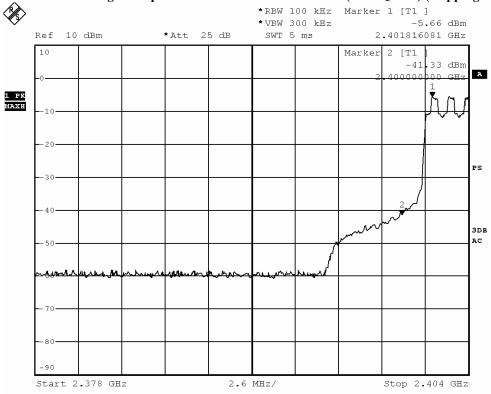




Date : 2017-06-19 Page 55 of 79 No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                  | Radiated Emission Attenuated below the Fundamental |
|----------------------------------|--|
| [MHz]                            | [dB]   |
| 2400 – Lowest Fundamental (2402) | 35.82  |

### Band-edge Compliance of RF Emissions – Lowest (π/4 DQPSK) (Hopping off)

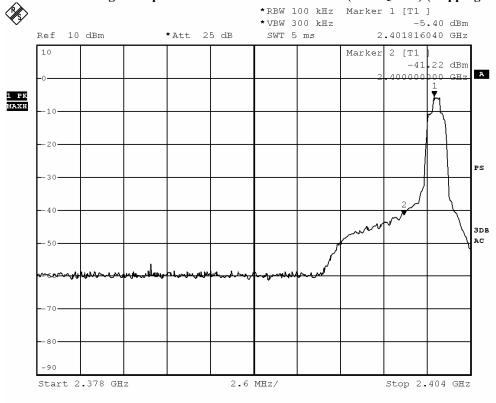




Date : 2017-06-19 Page 56 of 79

No. : DM17050526

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                     | Radiated Emission Attenuated below the Fundamental |
|-------------------------------------|--|
| [MHz]                               | [dB]   |
| 2483.5 - Highest Fundamental (2480) | 53.88  |

### Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping on)

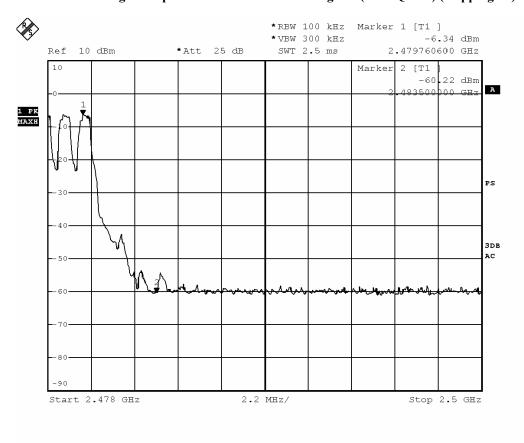




Date : 2017-06-19 Page 57 of 79 No. : DM17050526

#### **Band-edge Compliance of RF Conducted Emissions Measurement:**

| Frequency Range                     | Radiated Emission Attenuated below the Fundamental |
|-------------------------------------|--|
| [MHz]                               | [dB]   |
| 2483.5 - Highest Fundamental (2480) | 52.99  |

### Band-edge Compliance of RF Emissions – Highest (π/4 DQPSK) (Hopping off)

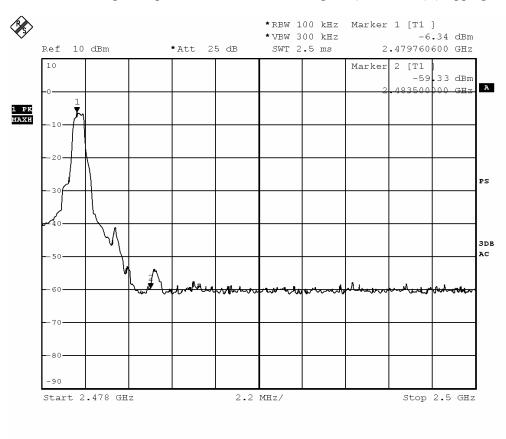




Date : 2017-06-19 Page 58 of 79 No. : DM17050526

Out of Band emissions of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.


Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

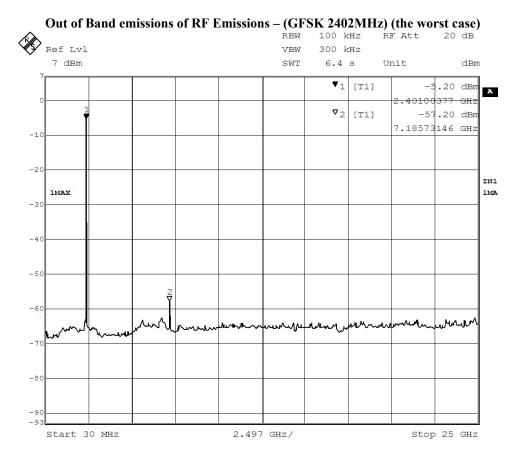



Date : 2017-06-19 Page 59 of 79 No. : DM17050526

# Out of Band emissions of RF Emissions – ( $\pi/4$ -DQPSK 2402MHz) (the worst case)

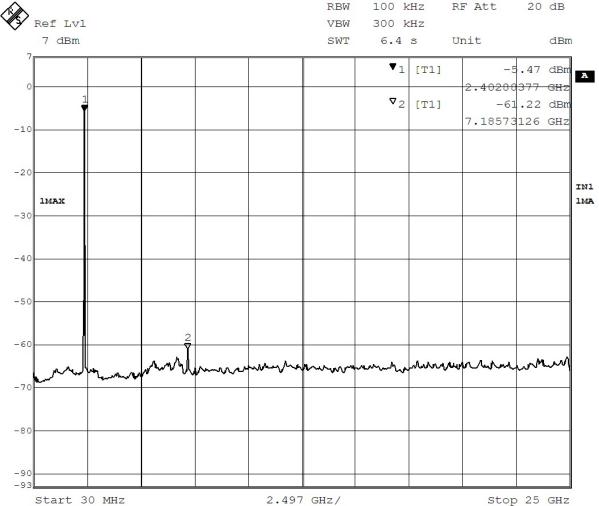



Date : 2017-06-19 Page 60 of 79 No. : DM17050526

### 3.1.8 Time of Occupancy (Dwell Time)

#### **Requirements:**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.

No requirements for Digital Transmission System.

#### **Spectrum Analyzer Setting:**

 $RBW = 300kHz, VBW \ge RBW,$ 

Sweep = A longer sweep time to show two successive hops on a channel,


Span = Zero, Detector = Peak, Trace = Max. hold

Dwell Time = Pulse Duration \* hop rate / number of channel \* observation duration

Observed duration:  $0.4s \times 79 = 31.6s$ 

#### **Measurement Data**:

### Channel Occupied in $\pi/4$ -DQPSK: 79 of 79 Channel

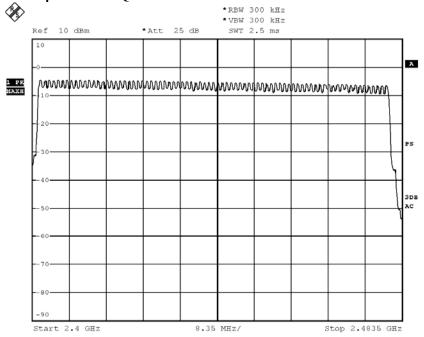




Date : 2017-06-19 Page 61 of 79 No. : DM17050526

#### **8DPSK DH5 Packet:**

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

Fig. A
[Pulse duration of Lowest Channel]

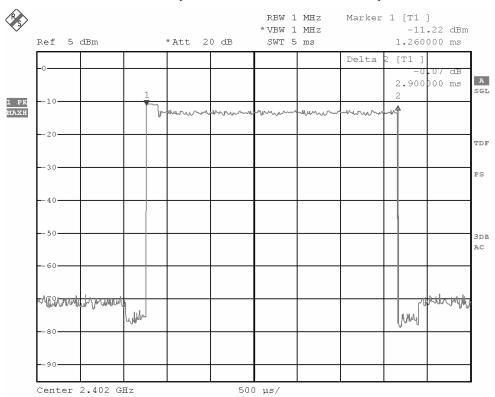


STC (Dongguan) Company Limited



Date : 2017-06-19 Page 62 of 79
No. : DM17050526


Fig. B [Pulse duration of Middle Channel]

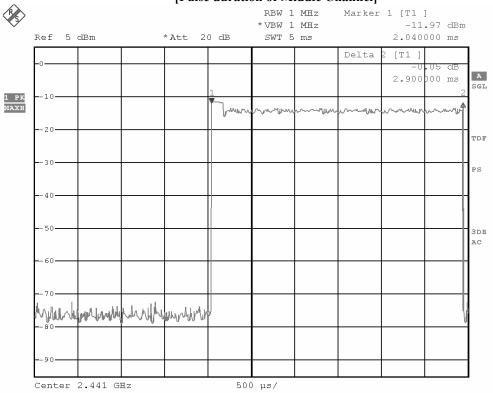



Date : 2017-06-19 Page 63 of 79 No. : DM17050526

Fig. C
[Pulse duration of Highest Channel]

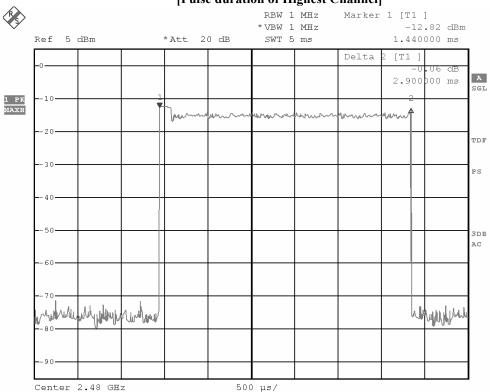




Date : 2017-06-19 Page 64 of 79 No. : DM17050526

### 8DPSK DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds


Fig. D
[Pulse duration of Lowest Channel]

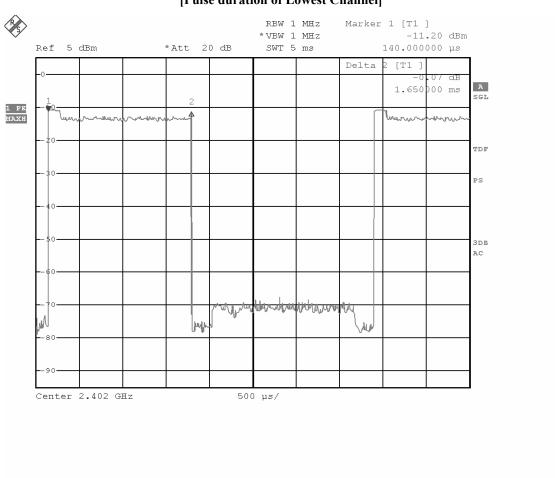



Date : 2017-06-19 Page 65 of 79
No. : DM17050526


Fig. E [Pulse duration of Middle Channel]

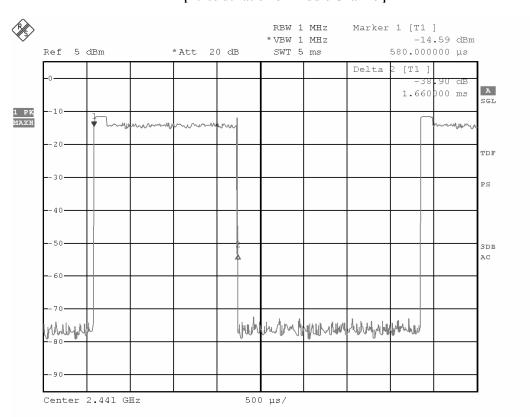



Date : 2017-06-19 Page 66 of 79
No. : DM17050526

Fig. F
[Pulse duration of Highest Channel]

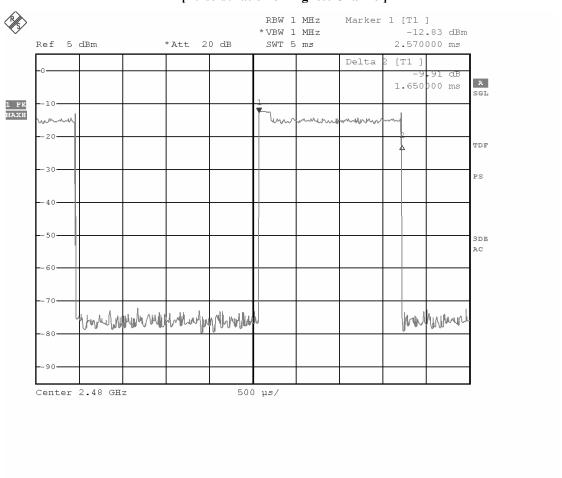




Date : 2017-06-19 Page 67 of 79 No. : DM17050526

### 8DPSK DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds


Fig. G
[Pulse duration of Lowest Channel]

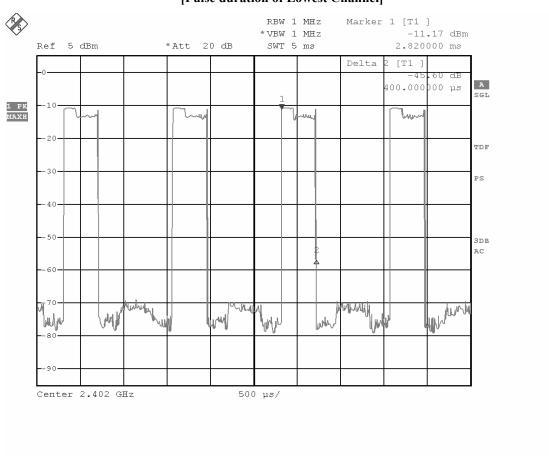



Date : 2017-06-19 Page 68 of 79
No. : DM17050526


Fig. H
[Pulse duration of Middle Channel]

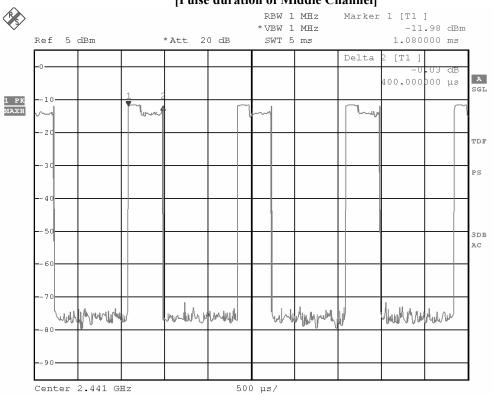



Date : 2017-06-19 Page 69 of 79 No. : DM17050526

Fig. I [Pulse duration of Highest Channel]

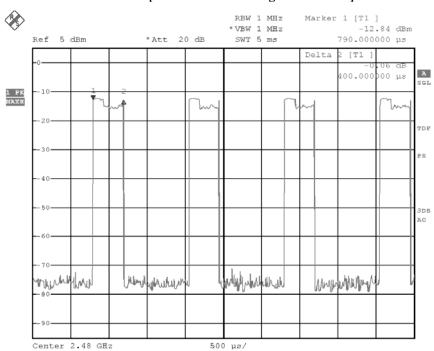

Time of occupancy (Dwell Time):

| Data Packet | Frequency<br>(MHz) | Pulse Duration (ms) | Dwell Time   | Limits       | Test Results |
|-------------|--------------------|---------------------|--------------|--------------|--------------|
| DH5         | 2402               | 2.900               | (s)<br>0.309 | (s)<br>0.400 | Complies     |
| DH5         | 2441               | 2.900               | 0.309        | 0.400        | Complies     |
| DH5         | 2480               | 2.900               | 0.309        | 0.400        | Complies     |
| DH3         | 2402               | 1.650               | 0.264        | 0.400        | Complies     |
| DH3         | 2441               | 1.660               | 0.265        | 0.400        | Complies     |
| DH3         | 2480               | 1.650               | 0.264        | 0.400        | Complies     |
| DH1         | 2402               | 0.400               | 0.128        | 0.400        | Complies     |
| DH1         | 2441               | 0.400               | 0.128        | 0.400        | Complies     |
| DH1         | 2480               | 0.400               | 0.128        | 0.400        | Complies     |



Date : 2017-06-19 Page 70 of 79 No. : DM17050526

#### 3.1.9 Channel Centre Frequency

#### **Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)



Date : 2017-06-19 Page 71 of 79 No. : DM17050526

### 3.1.10 Pseudorandom Hopping Algorithm

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

#### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date : 2017-06-19 Page 72 of 79 No. : DM17050526

#### 3.1.11 Antenna Requirement

**Test Requirements: § 15.203** 

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is PCB antenna. There is no external antenna, the antenna gain = -0.76dBi. User is unable to remove or changed the Antenna.



Date : 2017-06-19 Page 73 of 79 No. : DM17050526

#### Appendix A

### List of Measurement Equipment

| EMD004         LISN         ROHDE & SCHWARZ         ESH3-Z5         100102         2017.04.14         2018.04.14           EMD022         EMT Test Receiver         ROHDE & SCHWARZ         ESCS30         100314         2017.04.15         2018.04.15           EMD035         EMI Test Receiver         ROHDE & SCHWARZ         ESCI         100441         2017.04.14         2018.04.15           EMD036         EMI Test Receiver         ROHDE & SCHWARZ         ESCI         100441         2017.04.14         2018.04.15           EMD041         TWO-LINE V-NETWORK         ROHDE & SCHWARZ         ENV216         100261         2017.04.14         2018.04.14           EMD061         Biconilog Antenna         ETS.LINDGREN         3142C         00060439         2016.12.30         2018.12.30           EMD062         Double-Ridged<br>Waveguide (1GHz-18GHz)         ETS.LINDGREN         3117         00075933         2014.11.15         2017.11.15           EMD084         MULT-LDVICE<br>CONTROLLER         ETS.LINDGREN         2990         00060107         N/A         N/A           EMD085         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD093         Monitor         ViewSonic         Y29036         Q8X06420   | EQP NO. | DESCRIPTION           | MANUFACTURER              | MODEL NO. | SERIAL NO.     | LAST CAL   | DUE CAL    |
|---|---------|-----------------------|---------------------------|-----------|----------------|------------|------------|
| EMD035         EMI Test Receiver         ROHDE & SCHWARZ         ESCI         100441         2017.04.14         2018.04.14           EMD036         EMI Test Receiver         ROHDE & SCHWARZ         ESIB 26         100388         2017.04.15         2018.04.15           EMD041         TWO-LINE V-NETWORK         ROHDE & SCHWARZ         ENV216         100261         2017.04.14         2018.04.14           EMD061         Biconilog Antenna         ETS.LINDGREN         3142C         00060439         2016.12.30         2018.12.30           EMD062         Double-Ridged Waveguide (1GHz – 18GHz)         ETS.LINDGREN         3117         00075933         2014.11.15         2017.11.15           EMD084         MULTI-DVICE CONTROLLER         ETS.LINDGREN         2090         00060107         N/A         N/A           EMD088         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN <td< td=""><td>EMD004</td><td>LISN</td><td>ROHDE &amp; SCHWARZ</td><td>ESH3-Z5</td><td>100102</td><td>2017.04.14</td><td>2018.04.14</td></td<> | EMD004  | LISN                  | ROHDE & SCHWARZ           | ESH3-Z5   | 100102         | 2017.04.14 | 2018.04.14 |
| EMD036         EMI Test Receiver         ROHDE & SCHWARZ         ESIB 26         100388         2017.04.15         2018.04.15           EMD041         TWO-LINE V-NETWORK         ROHDE & SCHWARZ         ENV216         100261         2017.04.14         2018.04.14           EMD061         Biconilog Antenna         ETS.LINDGREN         3142C         00060439         2016.12.30         2018.12.30           EMD062         Double-Ridged Waveguide (1GHz – 18GHz)         ETS.LINDGREN         3117         00075933         2014.11.15         2017.11.15           EMD084         MULTI-DVICE CONTROLLER         ETS.LINDGREN         2090         00060107         N/A         N/A           EMD088         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         <   | EMD022  | EMI Test Receiver     | ROHDE & SCHWARZ           | ESCS30    | 100314         | 2017.04.15 | 2018.04.15 |
| EMD041         TWO-LINE V-NETWORK         ROHDE & SCHWARZ         ENV216         100261         2017.04.14         2018.04.14           EMD061         Biconilog Antenna         ETS.LINDGREN         3142C         00060439         2016.12.30         2018.12.30           EMD062         Double-Ridged Waveguide (1GHz – 18GHz)         ETS.LINDGREN         3117         00075933         2014.11.15         2017.11.15           EMD084         MULTI-DVICE CONTROLLER         ETS.LINDGREN         2090         00060107         N/A         N/A           EMD088         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD093         Monitor         ViewSonic         VA9036         Q8X064201876         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14   | EMD035  | EMI Test Receiver     | ROHDE & SCHWARZ           | ESCI      | 100441         | 2017.04.14 | 2018.04.14 |
| NETWORK   | EMD036  | EMI Test Receiver     | ROHDE & SCHWARZ           | ESIB 26   | 100388         | 2017.04.15 | 2018.04.15 |
| EMD062         Double-Ridged Waveguide (1GHz – 18GHz)         ETS.LINDGREN         3117         00075933         2014.11.15         2017.11.15           EMD084         MULTI-DVICE CONTROLLER         ETS.LINDGREN         2090         00060107         N/A         N/A           EMD088         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD093         Monitor         ViewSonic         VA9036         Q8X064201876         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14   | EMD041  |                       | ROHDE & SCHWARZ           | ENV216    | 100261         | 2017.04.14 | 2018.04.14 |
| Waveguide (1GHz - 18GHz)  | EMD061  | Biconilog Antenna     | ETS.LINDGREN              | 3142C     | 00060439       | 2016.12.30 | 2018.12.30 |
| EMD088         Video Contol Unit         ETS.LINDGREN         Y21953A         2601073         N/A         N/A           EMD093         Monitor         ViewSonic         VA9036         Q8X064201876         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42-15-C-KF         J2021100721001 <td>EMD062</td> <td>Waveguide (1GHz –</td> <td>ETS.LINDGREN</td> <td>3117</td> <td>00075933</td> <td>2014.11.15</td> <td>2017.11.15</td>            | EMD062  | Waveguide (1GHz –     | ETS.LINDGREN              | 3117      | 00075933       | 2014.11.15 | 2017.11.15 |
| EMD093         Monitor         ViewSonic         VA9036         Q8X064201876         N/A         N/A           EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A <td< td=""><td>EMD084</td><td></td><td>ETS.LINDGREN</td><td>2090</td><td>00060107</td><td>N/A</td><td>N/A</td></td<>   | EMD084  |                       | ETS.LINDGREN              | 2090      | 00060107       | N/A        | N/A        |
| EMD102         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707454         N/A         N/A           EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         N/A         2016-9-28         2018-9-27   | EMD088  | Video Contol Unit     | ETS.LINDGREN              | Y21953A   | 2601073        | N/A        | N/A        |
| EMD103         Intelligent Frequency         Ainuo Instrument Co., Ltd         AN97005SS         79707455         N/A         N/A           EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           I 100V Insertion Unit         ROHDE & SCHWARZ         URV5-Z4         100464         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         N/A         2016-9-28         2018-9-27  | EMD093  | Monitor               | ViewSonic                 | VA9036    | Q8X064201876   | N/A        | N/A        |
| EMD105         FACT-3 EMC Chamber         ETS.LINDGREN         FACT-3         3803         N/A         N/A           EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           L00V Insertion Unit         ROHDE & SCHWARZ         URV5-Z4         100464         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42-15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         N/A         2016-9-28         2018-9-27   | EMD102  | Intelligent Frequency | Ainuo Instrument Co., Ltd | AN97005SS | 79707454       | N/A        | N/A        |
| EMD106         Shielding Room #1         ETS.LINDGREN         RFD-100         3802         N/A         N/A           EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           100V Insertion Unit         ROHDE & SCHWARZ         URV5-Z4         100464         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         N/A         2016-9-28         2018-9-27   | EMD103  | Intelligent Frequency | Ainuo Instrument Co., Ltd | AN97005SS | 79707455       | N/A        | N/A        |
| EMD111         Power meter         ROHDE & SCHWARZ         NRVD         102051         2017.04.14         2018.04.14           100V Insertion Unit         ROHDE & SCHWARZ         URV5-Z4         100464         2017.04.14         2018.04.14           EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         2016-9-28         2018-9-27  | EMD105  | FACT-3 EMC Chamber    | ETS.LINDGREN              | FACT-3    | 3803           | N/A        | N/A        |
| 100V Insertion Unit   ROHDE & SCHWARZ   URV5-Z4   100464   2017.04.14   2018.04.14  | EMD106  | Shielding Room #1     | ETS.LINDGREN              | RFD-100   | 3802           | N/A        | N/A        |
| EMD113         Pre-Amplifier         ROHDE & SCHWARZ         N/A         1129588         2017.04.14         2018.04.14           EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         2016-9-28         2018-9-27  | EMD111  | Power meter           | ROHDE & SCHWARZ           | NRVD      | 102051         | 2017.04.14 | 2018.04.14 |
| EMD124         Loop Antenna         ETS-Lindgren         6502         00104905         2017.05.23         2018.05.23           EMD131         Standard Gain Horn Antenna (18GHz – 26.5GHz)         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         2016-9-28         2018-9-27   |         | 100V Insertion Unit   | ROHDE & SCHWARZ           | URV5-Z4   | 100464         | 2017.04.14 | 2018.04.14 |
| EMD124         Loop Antenna         Chengdu AINFO Inc.         JXTXLB-42- 15-C-KF         J2021100721001         2015.06.27         2017.06.27           RE01         RF cable         N/A         N/A         N/A         N/A         2016-9-28         2018-9-27  | EMD113  | Pre-Amplifier         | ROHDE & SCHWARZ           | N/A       | 1129588        | 2017.04.14 | 2018.04.14 |
| Antenna (18GHz – 26.5GHz) 15-C-KF 2015.06.27 2017.06.27  RE01 RF cable N/A N/A N/A 2016-9-28 2018-9-27  | EMD124  | Loop Antenna          | ETS-Lindgren              | 6502      | 00104905       | 2017.05.23 | 2018.05.23 |
|   | EMD131  | Antenna (18GHz –      | Chengdu AINFO Inc.        | -         | J2021100721001 | 2015.06.27 | 2017.06.27 |
| RE02 RF cable N/A N/A N/A 2016-9-28 2018-9-27   | RE01    | RF cable              | N/A                       | N/A       | N/A            | 2016-9-28  | 2018-9-27  |
|   | RE02    | RF cable              | N/A                       | N/A       | N/A            | 2016-9-28  | 2018-9-27  |

Remarks:-

N/A Not Applicable or Not Available



Date : 2017-06-19 Page 74 of 79 No. : DM17050526

### Appendix B

### Photographs of EUT

Front View of the product



**Inside View of the product** 



**Inner Circuit Bottom View** 



Rear View of the product



**Inner Circuit Top View** 



**Inner Circuit Top View** 






Date : 2017-06-19 Page 75 of 79 No. : DM17050526

### Photographs of EUT


### **Inner Circuit Bottom View**




**Inner Circuit Bottom View** 



**Inner Circuit Bottom View** 



**Inner Circuit Top View** 



**Inner Circuit Top View** 



**Inner Circuit Top View** 





Date: 2017-06-19 Page 76 of 79 No. : DM17050526

### Photographs of EUT


### **Inner Circuit Bottom View**



**Inner Circuit Bottom View** 



**Inner Circuit Bottom View** 



**Inner Circuit Top View** 



**Inner Circuit Top View** 



**Inner Circuit Top View** 





Date : 2017-06-19 Page 77 of 79 No. : DM17050526

### Photographs of EUT


### **Inner Circuit Bottom View**



**Inner Circuit Bottom View** 




### **Inner Circuit Top View**






Date : 2017-06-19 Page 78 of 79 No. : DM17050526

Photographs of EUT

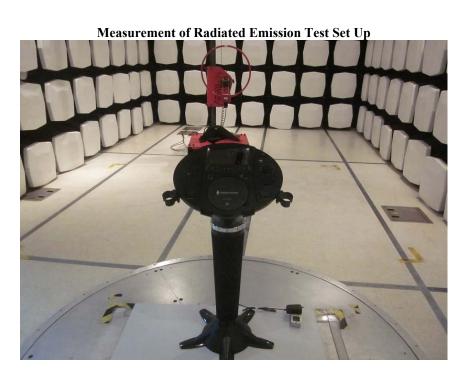

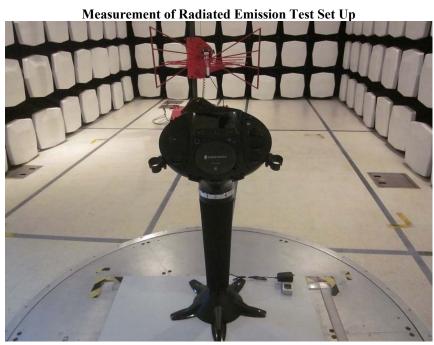


### STC (Dongguan) Company Limited



Date : 2017-06-19 Page 79 of 79 No. : DM17050526

### Photographs of EUT

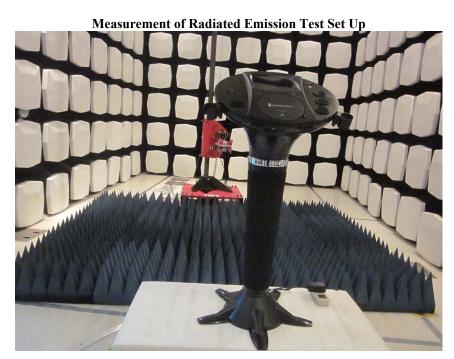

**Measurement of Conducted Emission Test Set Up** 



\*\*\*\*\* End of Test Report \*\*\*\*\*

STC (Dongguan) Company Limited

### **Conditions of Issuance of Test Reports**

- 1. All samples and goods are accepted by The STC (Dongguan) Company Limited (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The Company provides its services on the basis that such terms and conditions constitute express agreement between the Company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by the Company as a result of this application for testing service (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to his customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders
- 4. The Report refers only to the sample tested and does not apply to the bulk, unless the sampling has been carried out by the Company and is stated as such in the Report.
- 5. In the event of the improper use the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Sample submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage howsoever arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as to otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of this test report for a period of three years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after the retention period. Under no circumstances shall we be liable for damages of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.
- 10. Issuance records of the Report are available on the internet at dgstc@dgstc.org. Further enquiry of validity or verification of the Reports should be addressed to the Company.