

FCC TEST REPORT
for
VDO ELECTRONICS (HK) LTD
Car DVD player

Model No.: VDO-9200, BMWX-7.02B, ICBM-9707B, VDO-6951, VDO-6008,
VDO-2073, VDO-6030, VDO-6060, VDO-6070, VDO-6017, VDO-6090, VDO-6100,
VDO-6010, VDO-6007

Prepared for : VDO ELECTRONICS (HK) LTD
Address : UNIT 04, 7/F, BRIGHT WAY TOWER, NO. 33 MONG KOK
ROAD, KOWLOON, HK.

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, Chin
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201307762F
Date of Test : Jul. 11~ Aug. 05, 2013
Date of Report : Aug. 29, 2013

TABLE OF CONTENTS

Description

Test Report

Page

1. GENERAL INFORMATION	5
1.1 Description of Device (EUT).....	5
1.2 Auxiliary Equipment Used during Test	6
1.3 Description of Test Facility	6
1.4 Measurement Uncertainty.....	6
2. TEST PROCEDURE	7
3. RADIATION INTERFERENCE.....	8
3.1 Requirements (15.247, 15.209):	8
3.2 Test Procedure	8
3.3 Test Results.....	8
4. CHANNEL SEPARATION TEST	17
4.1 Measurement Procedure	17
4.2 Test SET-UP	17
4.3 Test Equipment.....	17
4.4 Test Results.....	17
5. 20DB BANDWIDTH TEST	21
5.1 Measurement Procedure	21
5.2 Test SET-UP	21
5.3 Test Equipment.....	21
5.4 Test Results.....	21
6. QUANTITY OF HOPPING CHANNEL TEST.....	25
6.1 Measurement Procedure	25
6.2 Test SET-UP	25
6.3 Test Equipment.....	25
6.4 Test Results.....	25
7. DWELL TIME TEST.....	27
7.1 Measurement Procedure	27
7.2 Test SET-UP	27
7.3 Test Equipment.....	27
7.4 Test Results.....	27
8. MAXIMUM PEAK OUTPUT POWER TEST	30
8.1 Measurement Procedure	30
8.2 Test SET-UP	30
8.3 Test Equipment.....	30
8.4 Test Results.....	31
9. BAND EDGE TEST.....	35
9.1 Measurement Procedure	35
9.2 Test SET-UP	35
9.3 Test Equipment.....	35

9.4 Test Results.....	35
10. ANTENNA APPLICATION.....	39
10.1 Antenna requirement	39
10.2 Result.....	39
11. PHOTOGRAPH.....	40
11.1 Photo of Radiation Emission Test	40

APPENDIX I (External Photos) (2 Pages)

APPENDIX II (Internal Photos) (4 Pages)

TEST REPORT

Applicant : VDO ELECTRONICS (HK) LTD
Manufacturer : Dongguan Litu Electronic Technology Co., Ltd.
EUT : Car DVD player
Model No. : VDO-9200, BMWX-7.02B, ICBM-9707B, VDO-6951, VDO-6008,
VDO-2073, VDO-6030, VDO-6060, VDO-6070, VDO-6017,
VDO-6090, VDO-6100, VDO-6010, VDO-6007
Serial No. : N/A
Trade Mark : N/A
Rating : DC 12V

Measurement Procedure Used:


FCC Part15 Subpart C, Paragraph 15.207, 15.247 & 15.209

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Jul. 11~ Aug. 05, 2013


Prepared by :


(Tested Engineer / Rock Zeng)

Reviewer :

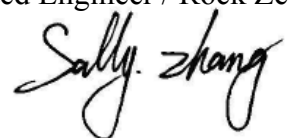
(Project Manager / Sally Zhang)

Approved & Authorized Signer :

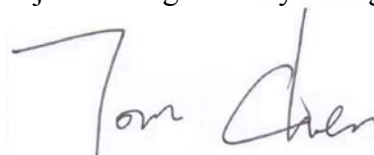
(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	: Car DVD player
Model Number	: VDO-9200, BMWX-7.02B, ICBM-9707B, VDO-6951, VDO-6008, VDO-2073, VDO-6030, VDO-6060, VDO-6070, VDO-6017, VDO-6090, VDO-6100, VDO-6010, VDO-6007 (Note: The above samples are same except the model number & appearance, so we prepare “VDO-9200” for EMC test only.)
Test Power Supply	: DC 12V
Frequency	: 2402~2480MHz
Antenna Specification	: Printed Antenna:0dBi
Modulation	: GFSK, $\pi/4$ DQPSK, 8DPSK
Applicant Address	: VDO ELECTRONICS (HK) LTD : UNIT 04, 7/F, BRIGHT WAY TOWER, NO. 33 MONG KOK ROAD, KOWLOON, HK.
Manufacturer Address	: Dongguan Litu Electronic Technology Co., Ltd. : Industrial Zone, Xiakeng Village, Changping Town, Dongguan City, Guangdong, China
Factory Address	: Dongguan Litu Electronic Technology Co., Ltd. : Industrial Zone, Xiakeng Village, Changping Town, Dongguan City, Guangdong, China
Date of receiver	: Jul. 11, 2013
Date of Test	: Jul. 11~ Aug. 05, 2013

1.2 Auxiliary Equipment Used during Test

N/A

1.3 Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, Jul. 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, Feb. 22, 2013.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, Chin

1.4 Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

2. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. Radiation Interference

3.1 Requirements (15.247, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dBμV/m @3m	FIELD STRENGTH of Harmonics 54 dBμV/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dBuV/m @3M 43.5 46 54dBuV/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

3.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 4.3.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year

Radiation Uncertainty : Ur = 4.3dB


3.3 Test Results

PASS.

Please refer the following pages.

Job No.: AT1307702F
Standard: (RE)FCC PART15 C _3m
Test item: Radiation Test
Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
EUT: Car DVD player
Model: VDO-9200
Mode: Bluetooth Mode
Note: 30-1000MHz


Polarization: Horizontal
Power Source: DC 12V
Date: 2013/07/15
Time: 11:19:34
Test By: Rock Zeng
Distance: 3m

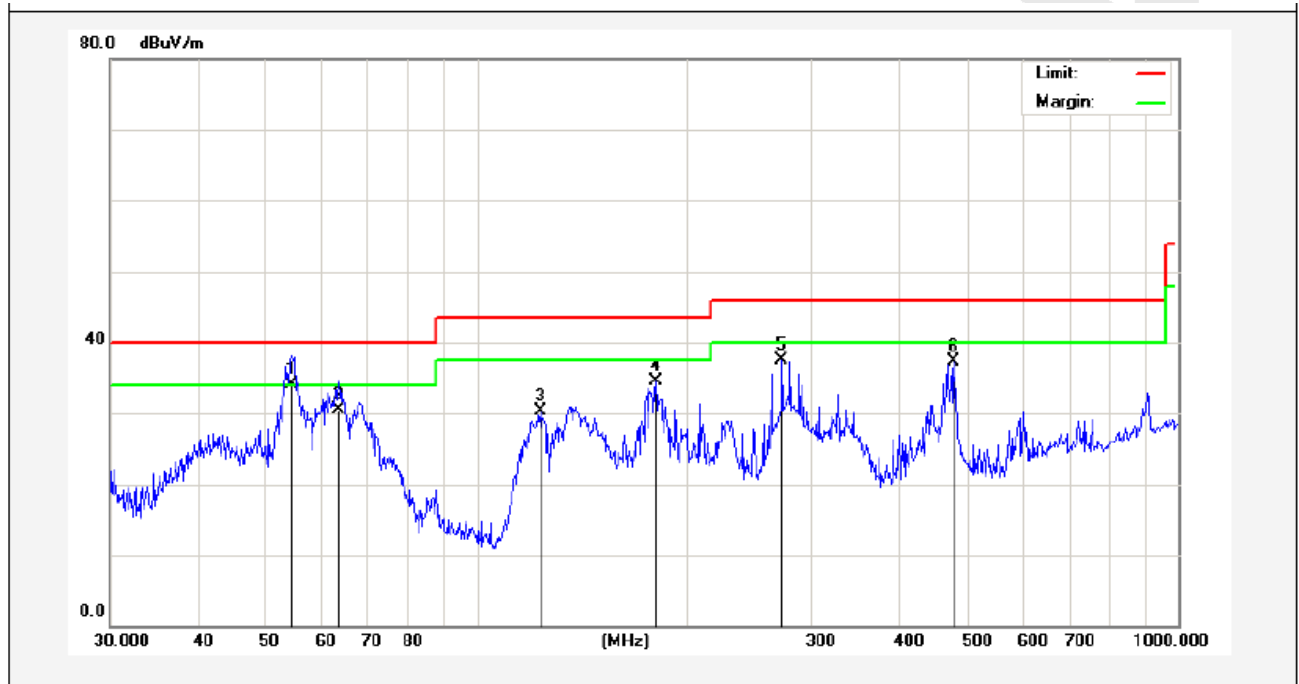

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	54.4515	48.96	-14.88	34.08	40.00	-5.92	QP	100	0	
2	63.5356	47.36	-16.86	30.50	40.00	-9.50	QP	100	360	
3	123.2655	52.11	-21.82	30.29	43.50	-13.21	peak			
4	180.0165	56.33	-21.85	34.48	43.50	-9.02	peak			
5	272.2776	55.97	-18.52	37.45	46.00	-8.55	peak			
6	478.8455	48.79	-11.57	37.22	46.00	-8.78	peak			

Job No.: AT1307702F
Standard: (RE)FCC PART15 C _3m
Test item: Radiation Test
Temp.(C)/Hum.(%RH): 24.3(C)/55%RH
EUT: Car DVD player
Model: VDO-9200
Mode: Bluetooth Mode
Note: 30-1000MHz

Polarization: Vertical
Power Source: DC 12V
Date: 2013/07/15
Time: 11:15:06
Test By: Rock Zeng
Distance: 3m

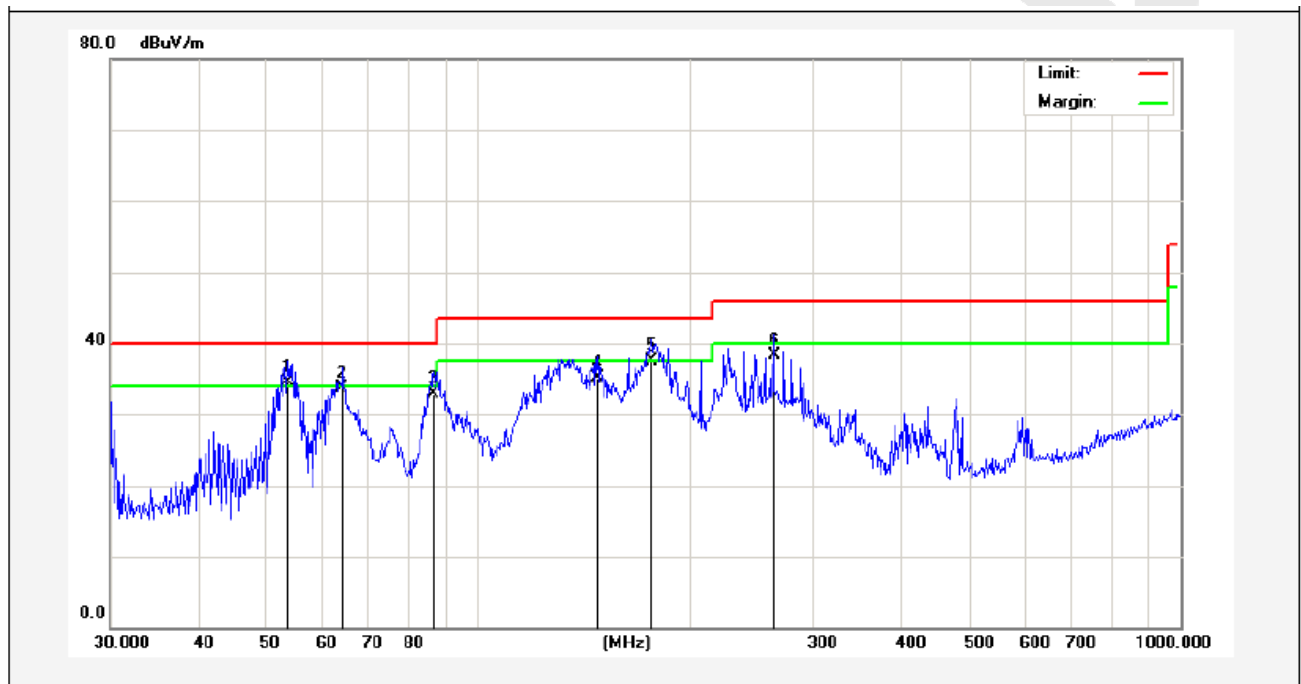

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	53.6931	49.35	-14.84	34.51	40.00	-5.49	QP	100	0	
2	64.2074	50.89	-17.15	33.74	40.00	-6.26	QP	100	360	
3	86.5027	51.15	-18.20	32.95	40.00	-7.05	QP	100	0	
4	147.9214	53.51	-18.37	35.14	43.50	-8.36	QP	100	360	
5	176.8876	54.53	-17.06	37.47	43.50	-6.03	QP	100	0	
6	263.8190	52.49	-14.22	38.27	46.00	-7.73	QP	100	360	

Above 1 GHz

Operation Mode: TX /CH Low


Temperature: 25°C

Humidity: 50 % RH

Test Date: Jul.24, 2013

Tested by: Rock Zeng


Polarity: Horizontal

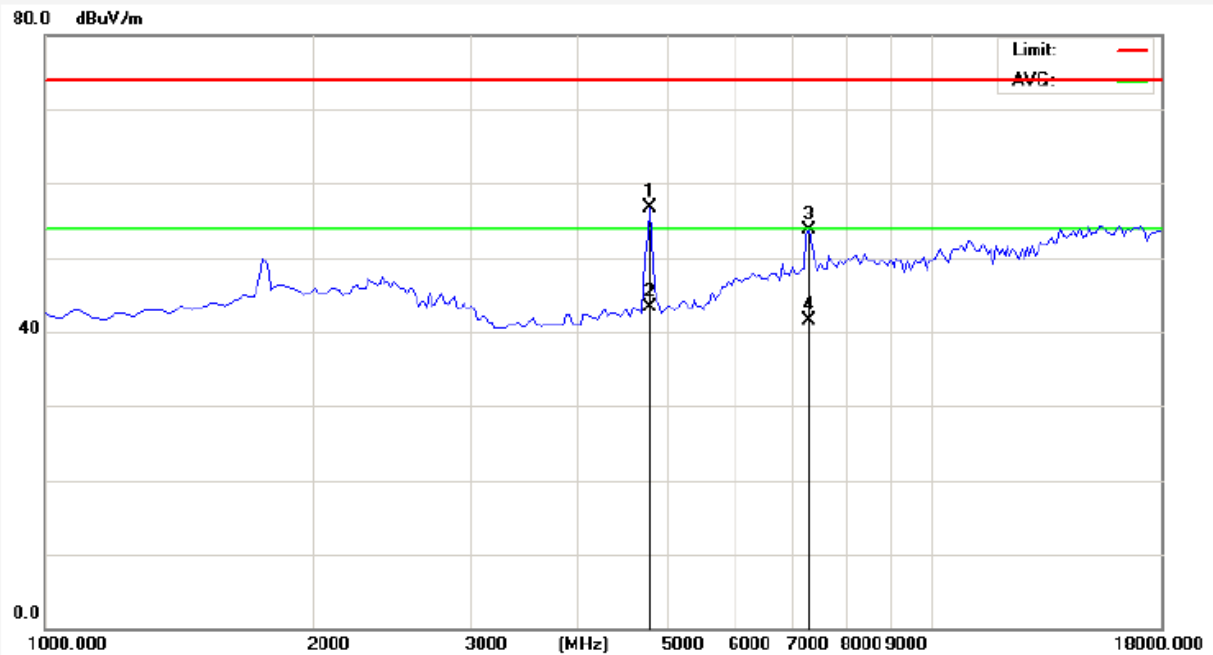

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4825.000	53.34	3.34	56.68	74.00	-17.32	peak			
2	4825.000	40.02	3.34	43.36	54.00	-10.64	AVG			
3	7290.000	45.16	8.53	53.69	74.00	-20.31	peak			
4	7290.000	32.92	8.53	41.45	54.00	-12.55	AVG			


Operation Mode: TX / CH Low
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

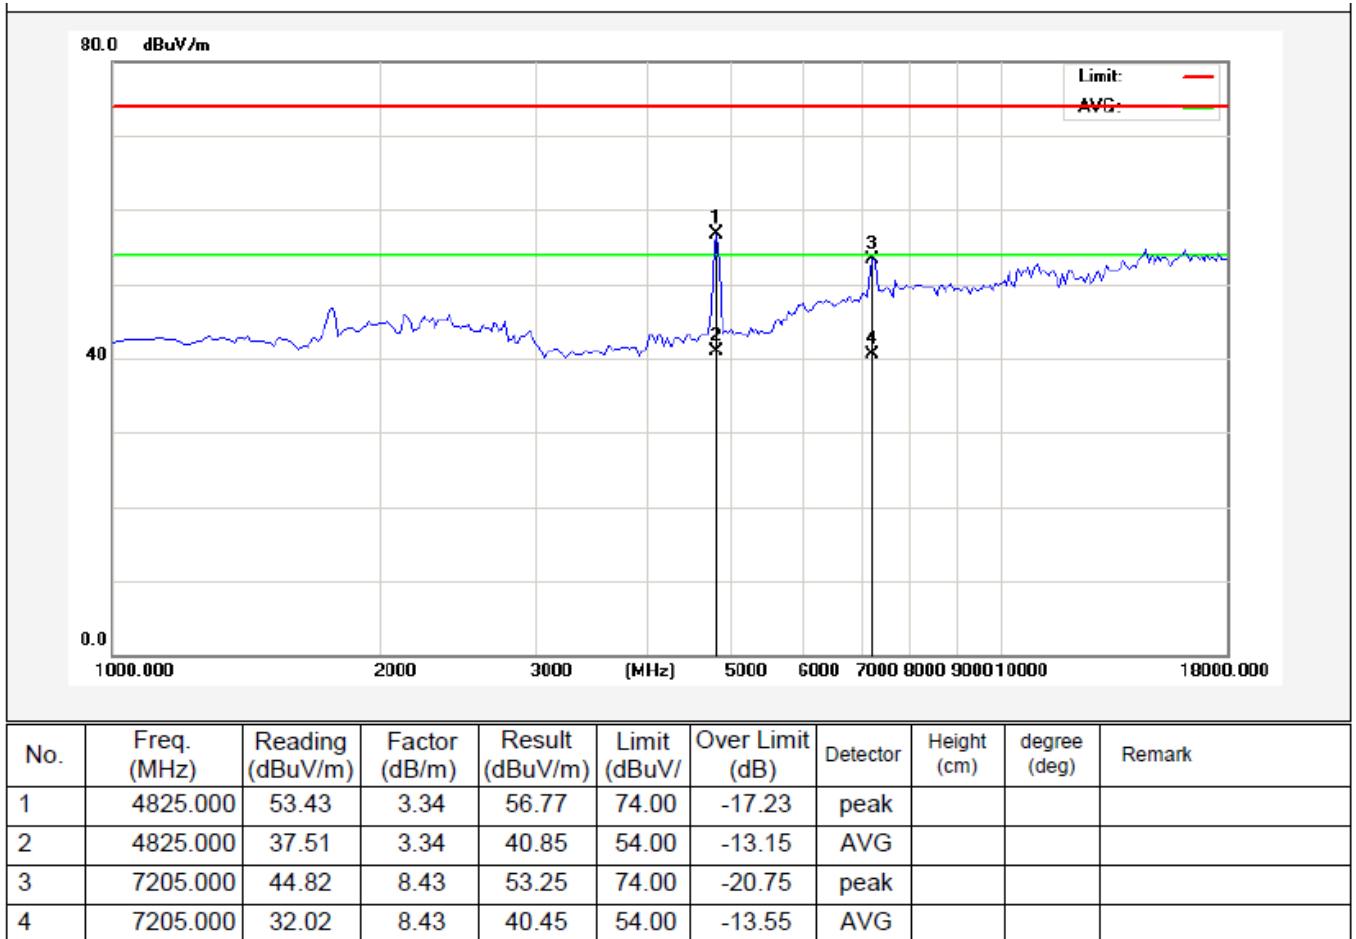


Operation Mode: TX / CH Mid
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Horizontal

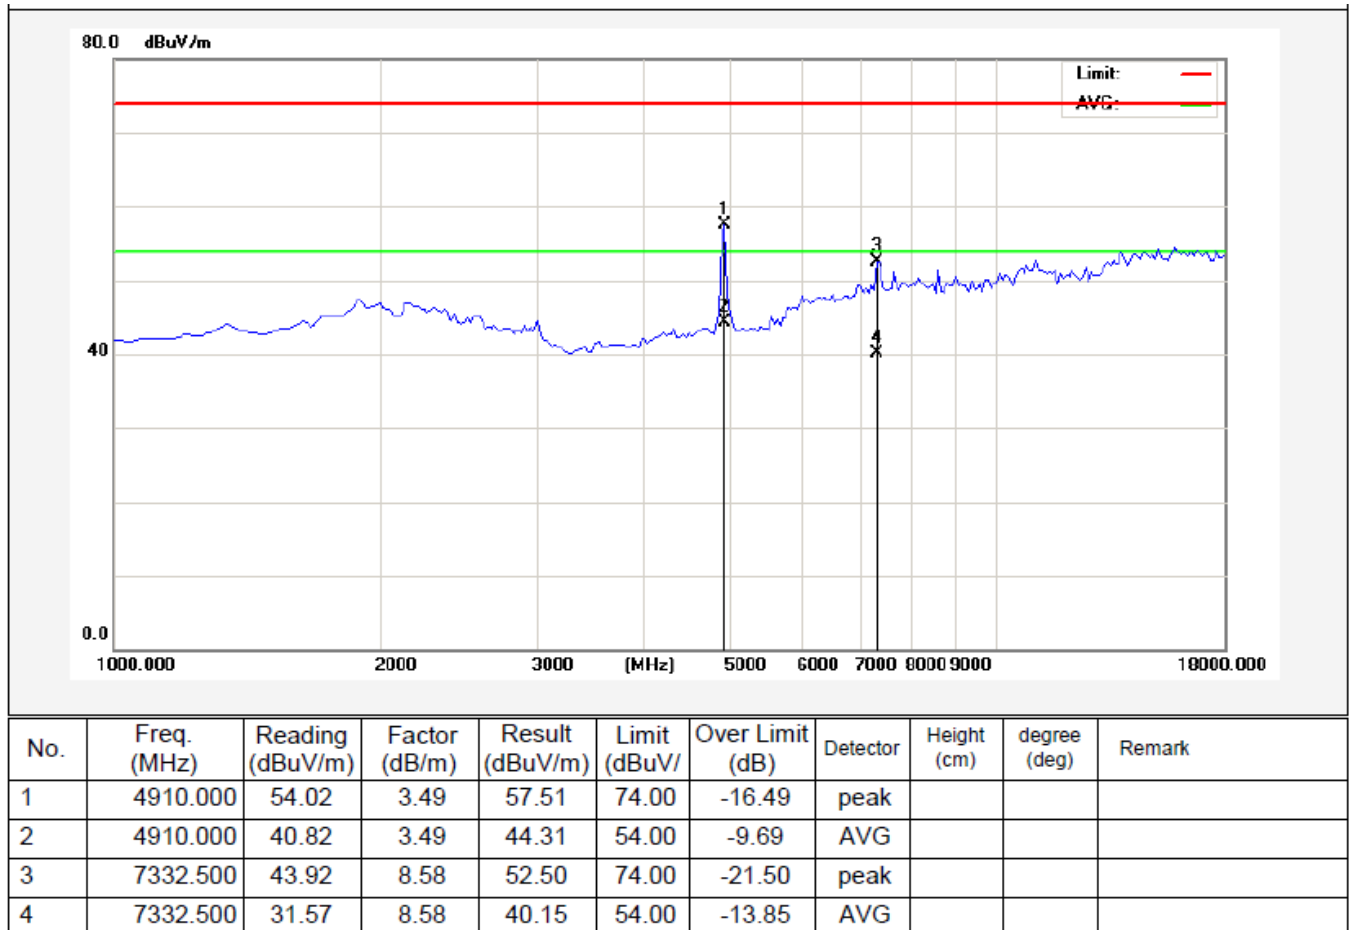

Operation Mode: TX / CH Mid
Temperature: 25°C
Humidity: 50 % RH


Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

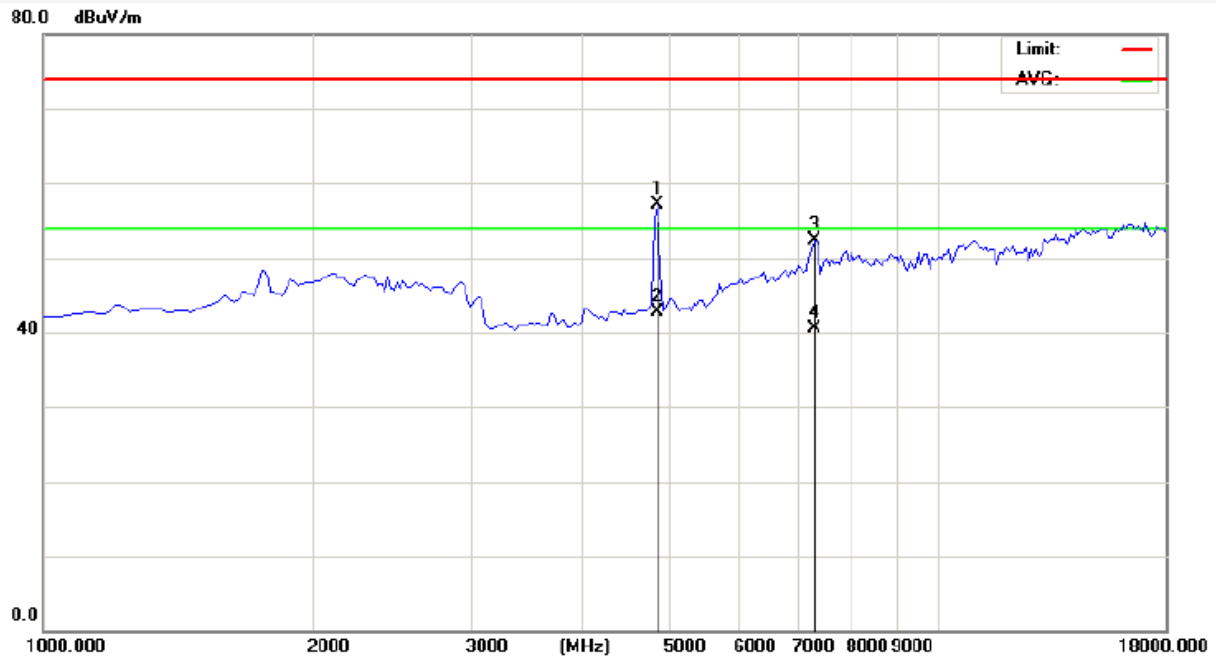

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4867.500	53.79	3.41	57.20	74.00	-16.80	peak			
2	4867.500	39.34	3.41	42.75	54.00	-11.25	AVG			
3	7332.500	43.70	8.58	52.28	74.00	-21.72	peak			
4	7332.500	32.00	8.58	40.58	54.00	-13.42	AVG			

Operation Mode: TX / CH High
Temperature: 25°C
Humidity: 50 % RH


Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Horizontal

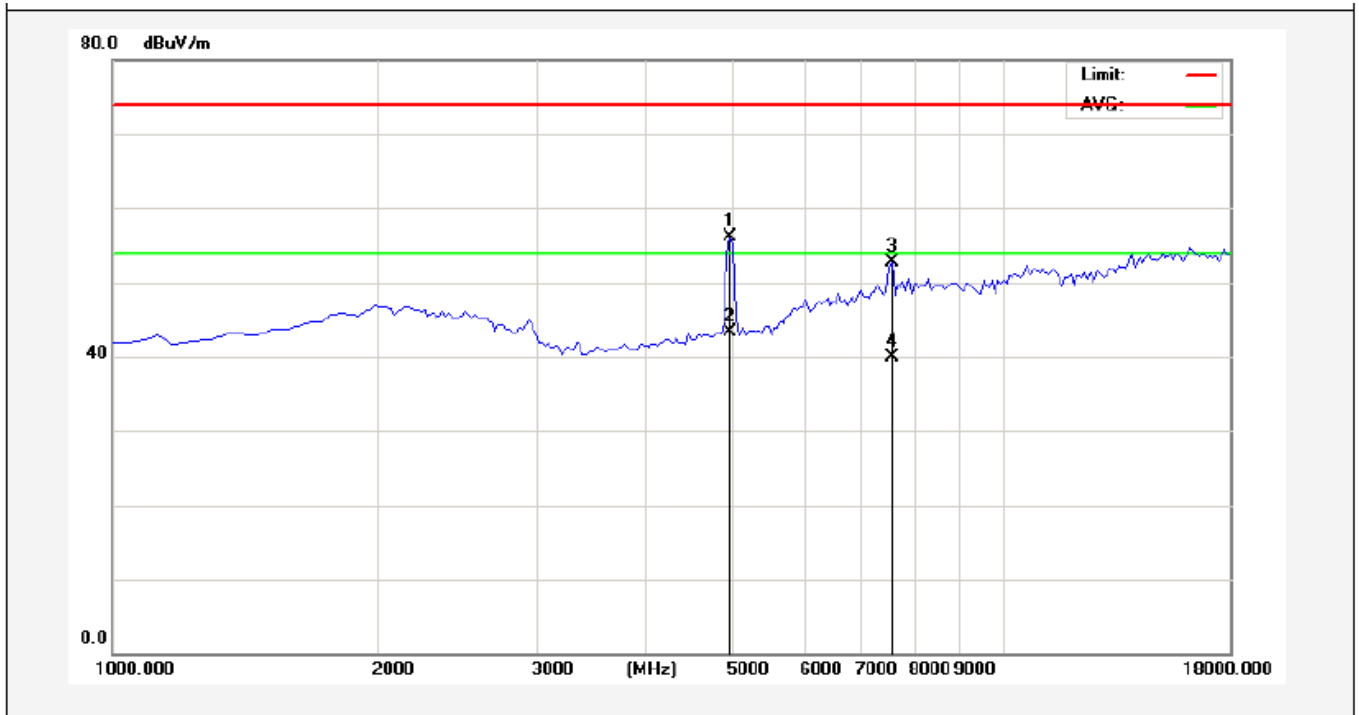

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4952.500	52.52	3.57	56.09	74.00	-17.91	peak			
2	4952.500	39.68	3.57	43.25	54.00	-10.75	AVG			
3	7545.000	43.92	8.86	52.78	74.00	-21.22	peak			
4	7545.000	31.02	8.86	39.88	54.00	-14.12	AVG			

Operation Mode: TX / CH High
Temperature: 25°C
Humidity: 50 % RH

Test Date: Jul.24, 2013
Tested by: Rock Zeng
Polarity: Vertical

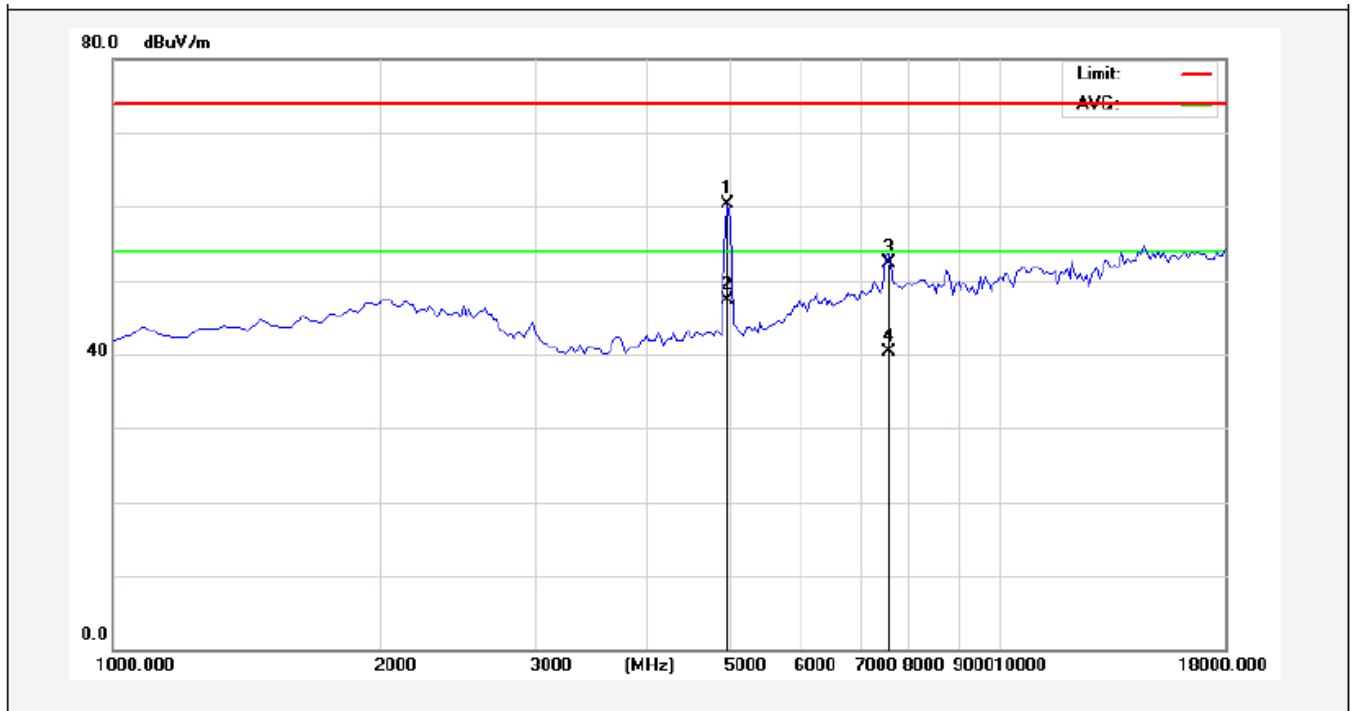


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4952.500	56.71	3.57	60.28	74.00	-13.72	peak			
2	4952.500	43.71	3.57	47.28	74.00	-26.72	peak			
3	7545.000	43.39	8.86	52.25	54.00	-1.75	AVG			
4	7545.000	31.47	8.86	40.33	54.00	-13.67	AVG			

4. CHANNEL SEPARATION TEST

4.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.2 Test SET-UP



4.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

4.4 Test Results

Product	: Car DVD player	Test Mode	: CH Low ~ CH High
Test Item	: Frequency Separation	Temperature	: 24°C
Test Voltage	: DC 12V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Modulation Mode
Low	2401	1002	678	GFSK
Mid	2441	1002	684	GFSK
High	2480	1002	678	GFSK
Low	2401	1014	844	π /4DQPSK
Mid	2441	1002	844	π /4DQPSK
High	2480	1008	844	π /4DQPSK
Low	2401	1014	844	8DPSK
Mid	2441	1002	844	8DPSK
High	2480	1008	844	8DPSK

Remark:


1. The limit of modulation (π /4DQPSK, 8DPSK) is 2/3 of 20dB BW;


Modulation Mode: GFSK

CH Low

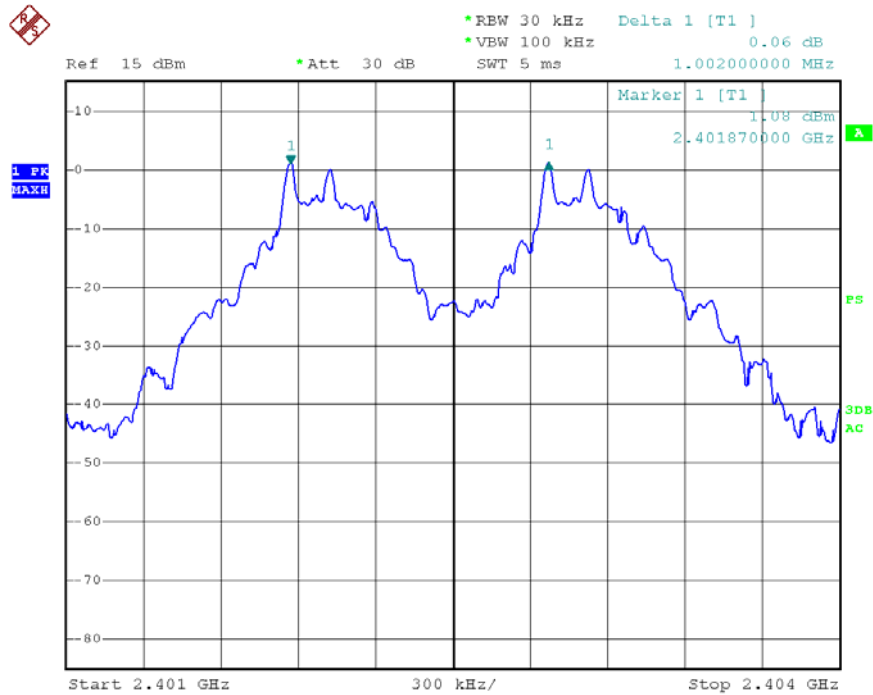


CH Mid

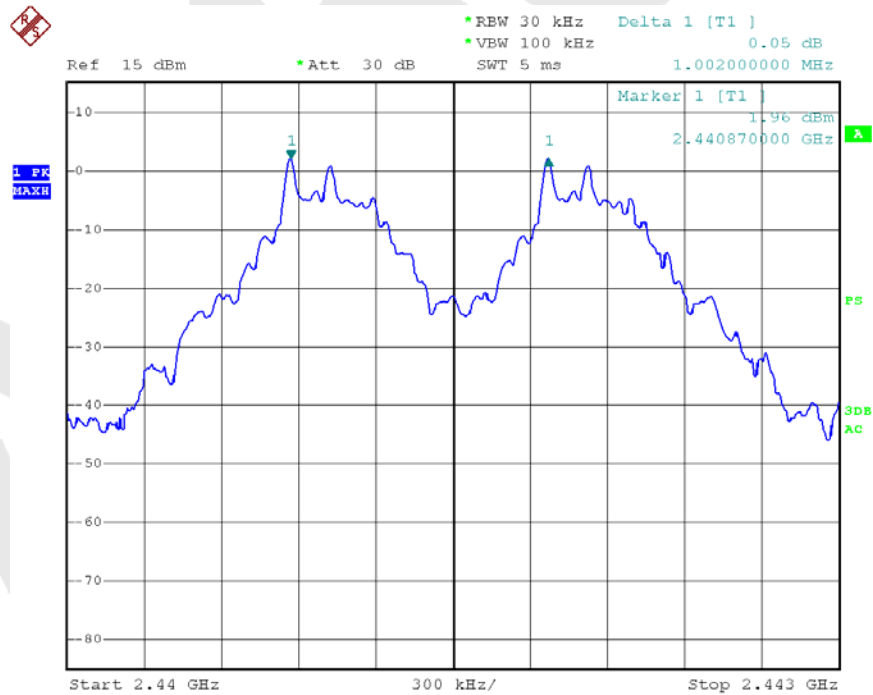


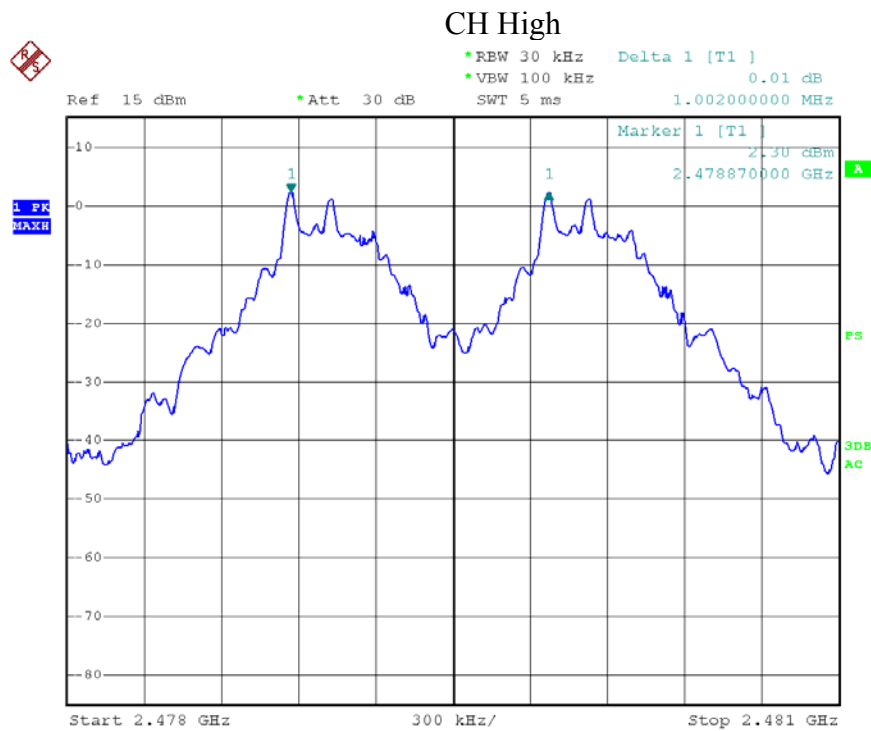


Modulation Mode: $\pi/4$ DQPSK & 8DPSK

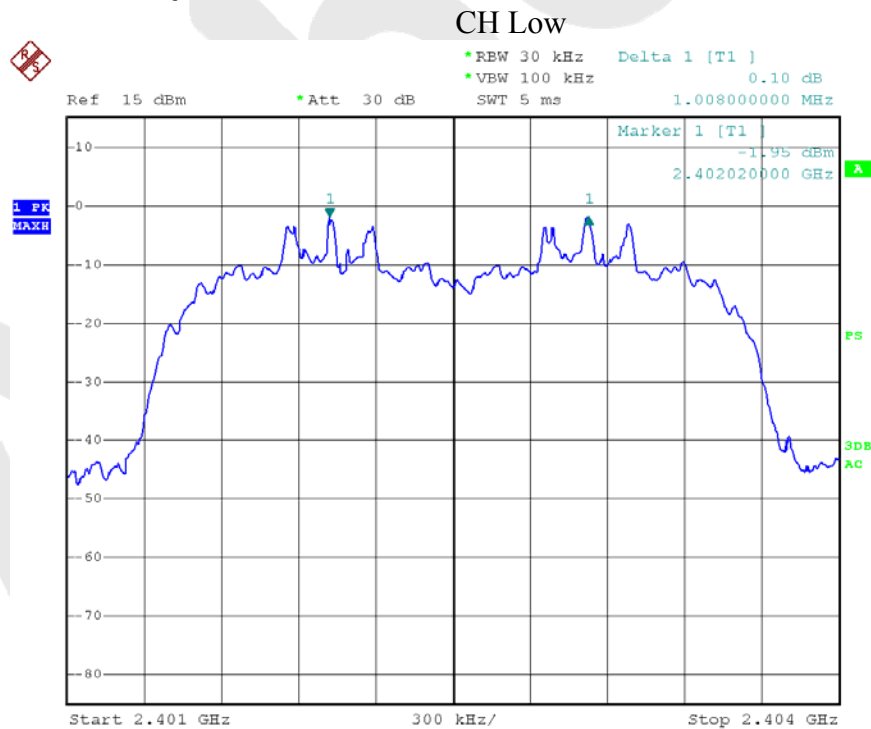

CH Mid

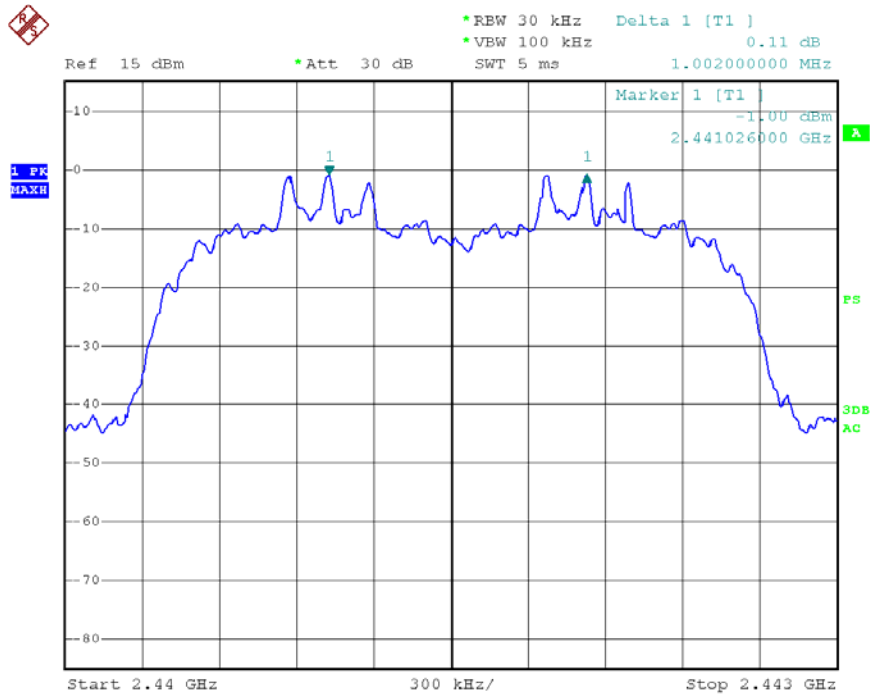

CH High

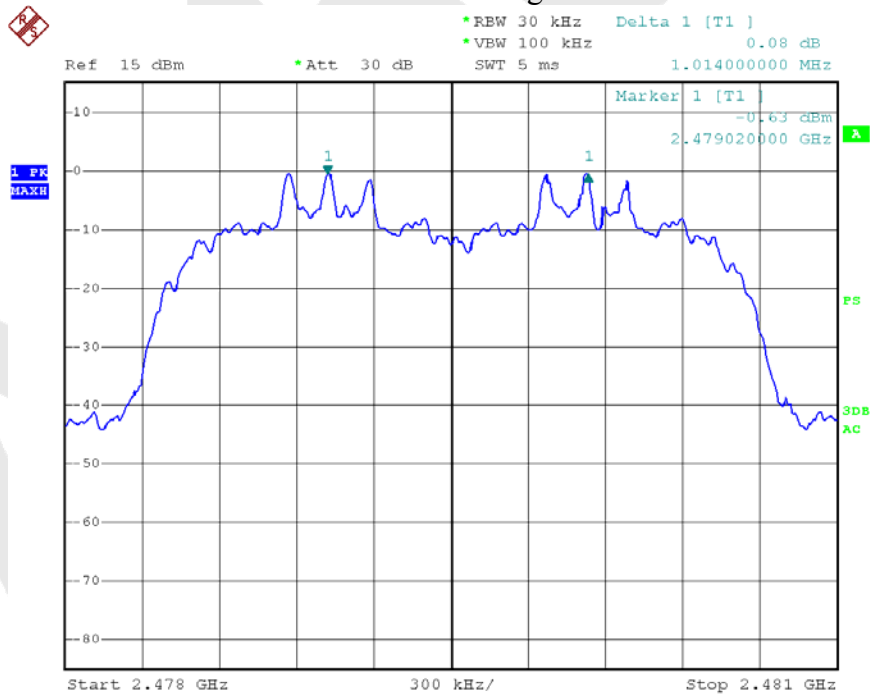


5. 20DB BANDWIDTH TEST

5.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

5.2 Test SET-UP



5.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.4 Test Results


Product	: Car DVD player	Test Mode	: CH Low ~ CH High
Test Item	: 20dB BW	Temperature	: 24°C
Test Voltage	: DC 12V Battery	Humidity	: 55%RH
Test Result	: PASS		

Channel	Frequency (MHz)	20dB Down BW(kHz)	Modulation Mode
Low	2401	678	GFSK
Mid	2441	684	GFSK
High	2480	678	GFSK
Low	2401	1266	π /4DQPSK
Mid	2441	1266	π /4DQPSK
High	2480	1266	π /4DQPSK
Low	2401	1266	8DPSK
Mid	2441	1266	8DPSK
High	2480	1266	8DPSK


Remark: The results of modulations π /4DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

CH Low

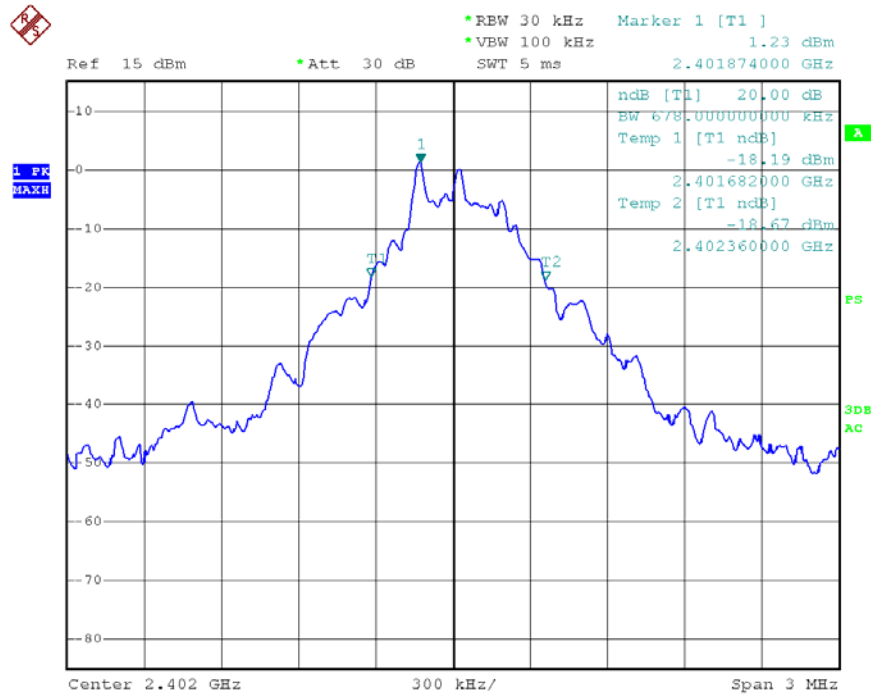


CH Mid

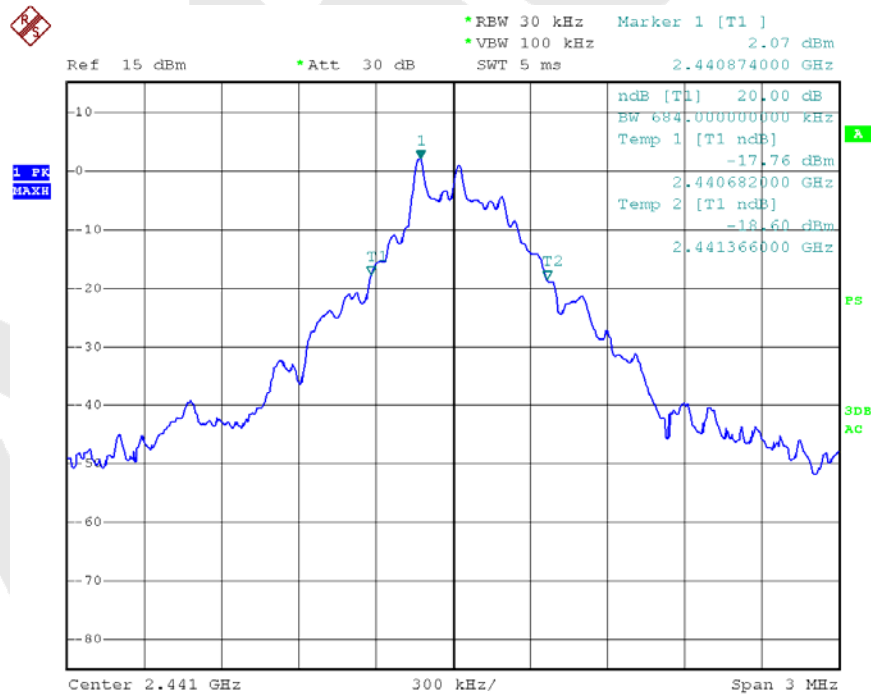


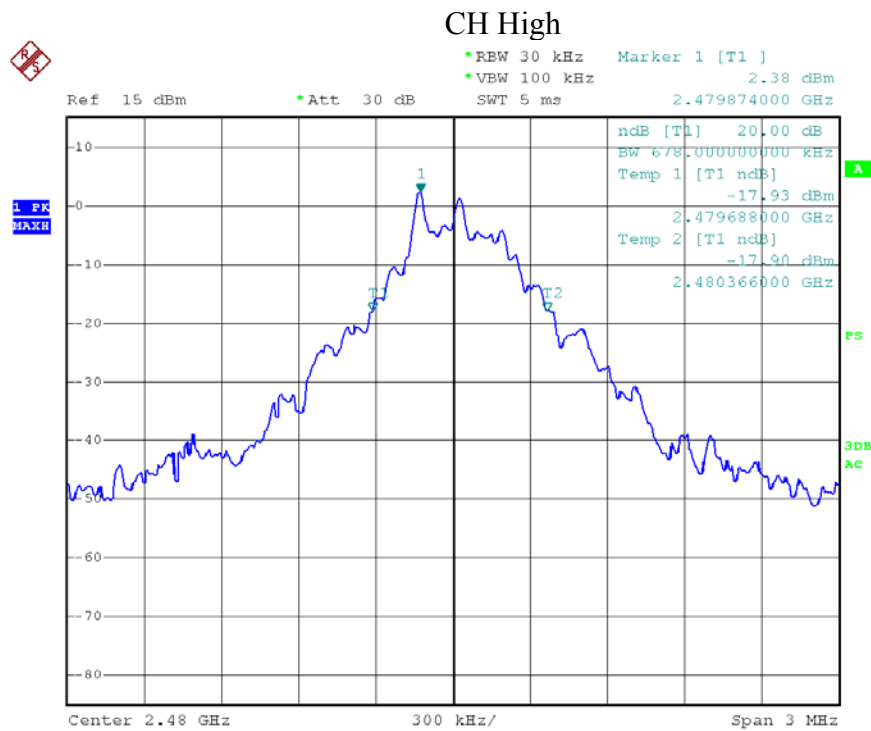


Modulation Mode: π /4DQPSK & 8DPSK

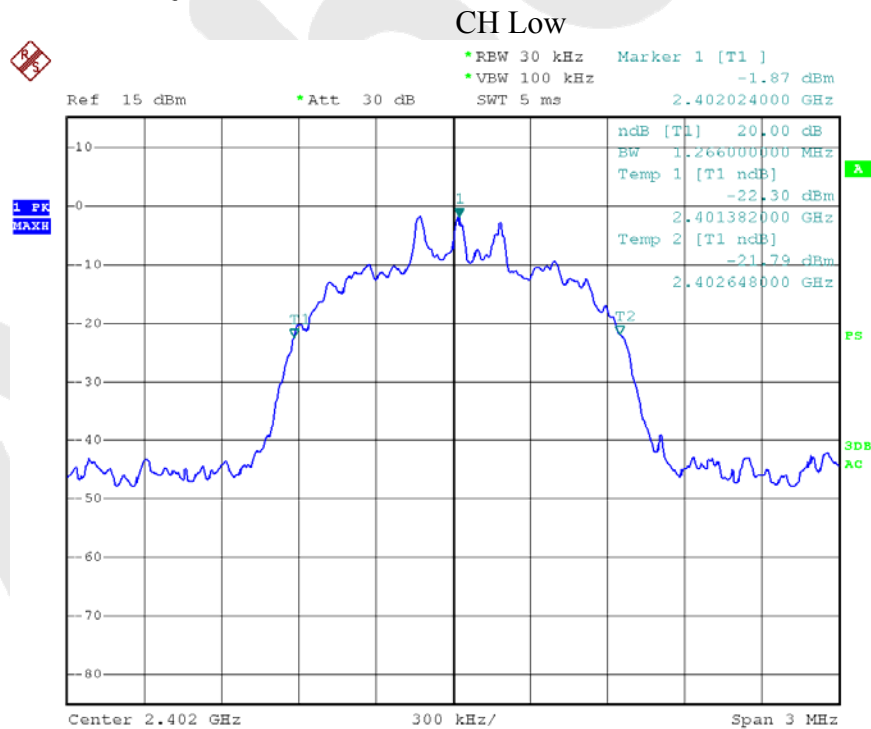

CH Mid

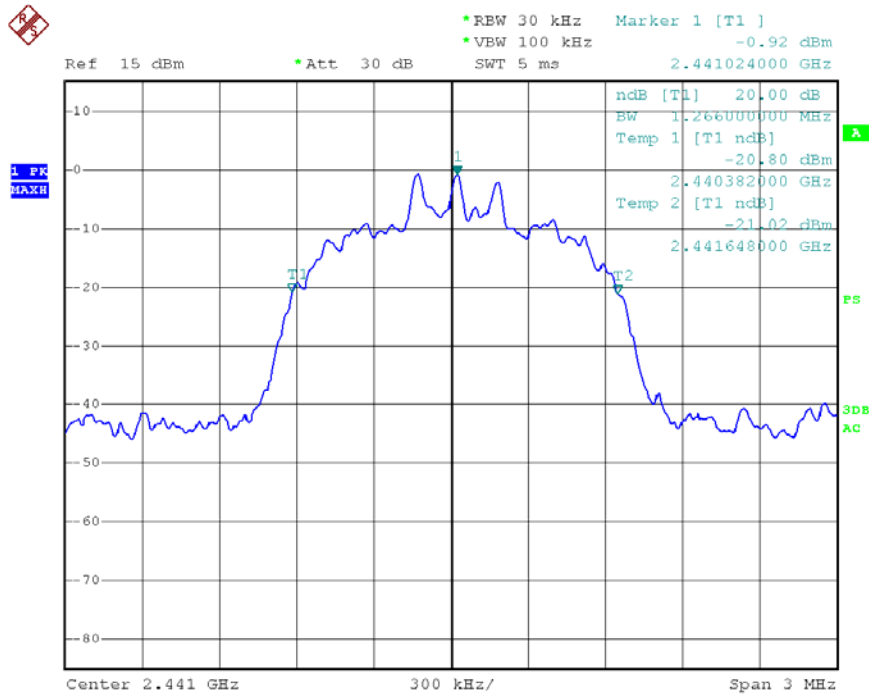

CH High

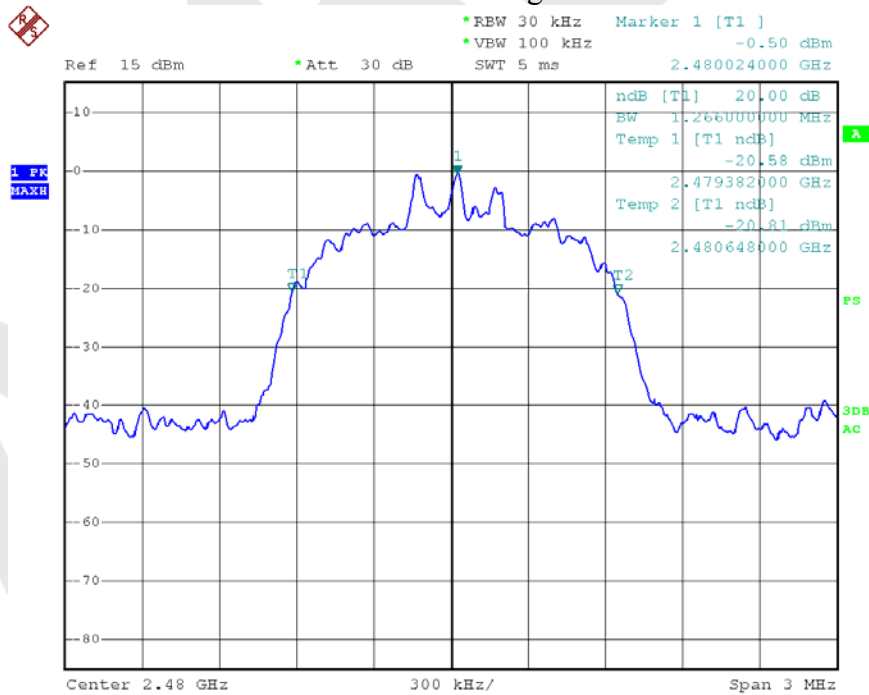


6. QUANTITY OF HOPPING CHANNEL TEST

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP





6.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

6.4 Test Results

Product	: Car DVD player	Test Mode	: CH Low ~ CH High
Test Item	: Number of Hopping Frequency	Temperature	: 24℃
Test Voltage	: DC 12V Battery	Humidity	: 55%RH
Test Result	: PASS		

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

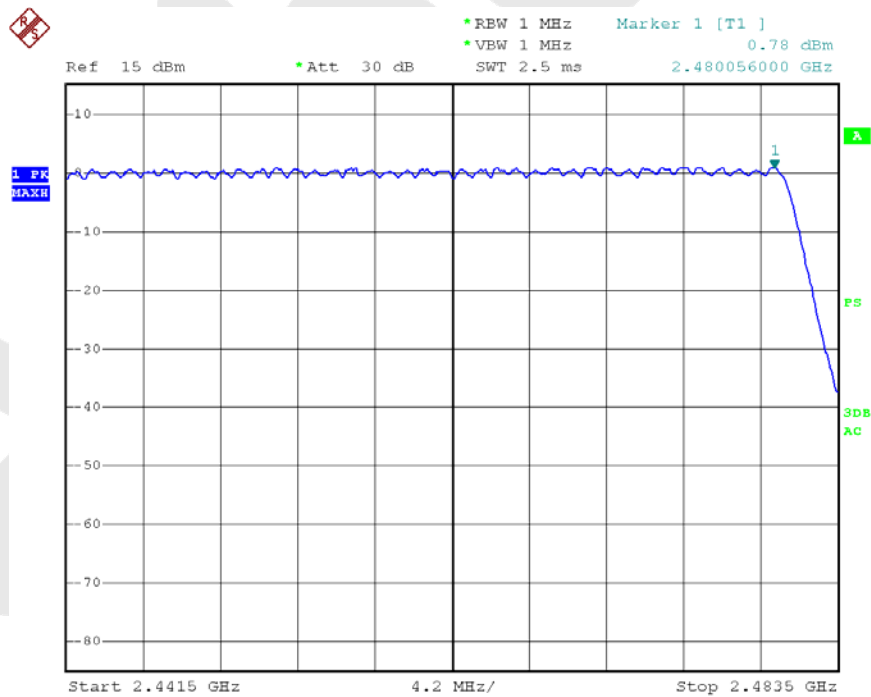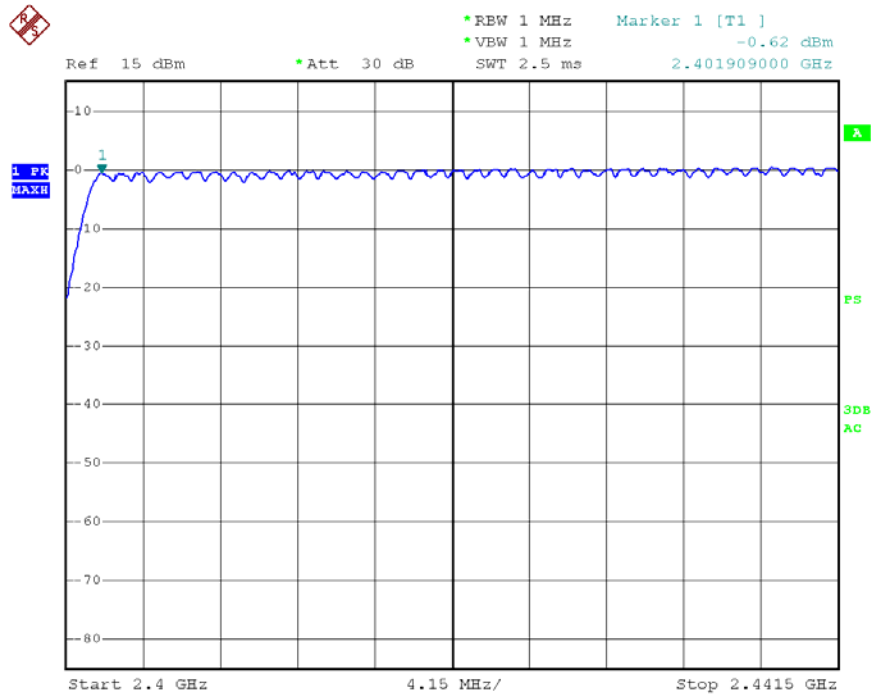


7. DWELL TIME TEST

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP



7.3 Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

7.4 Test Results


Product	: Car DVD player	Test Mode	: CH Low ~ CH High
Test Item	: Time of Occupancy	Temperature	: 24°C
Test Voltage	: DC 12V Battery	Humidity	: 55%RH
Test Result	: PASS		


Channel	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (ms)
DH1	0.415	time slot length *1600/2 /79 * 31.6	132.80	400
DH3	1.6942	time slot length *1600/4 /79 * 31.6	271.08	400
DH5	2.9556	time slot length *1600/6 /79 * 31.6	315.27	400

DH1

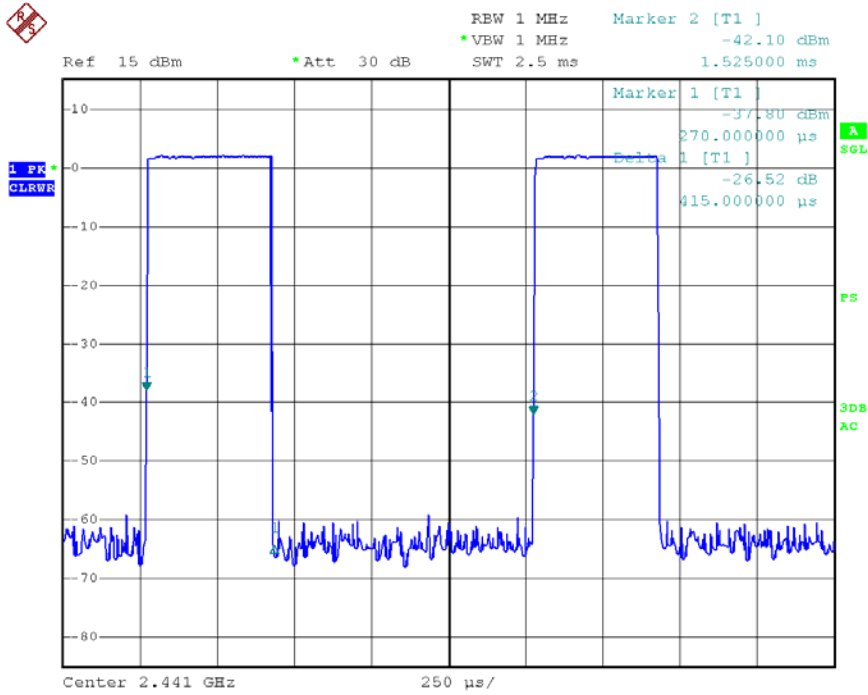

DH3

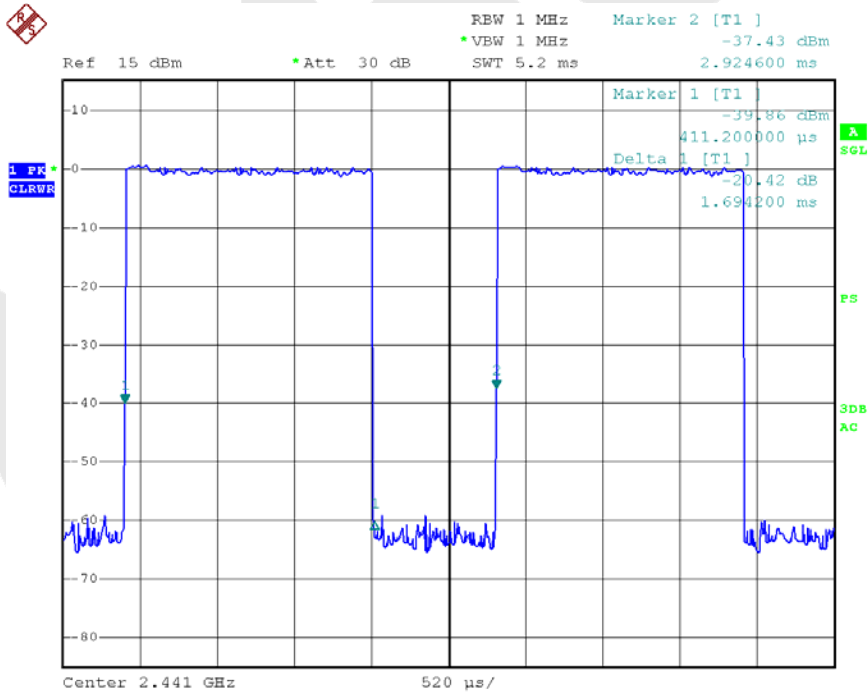

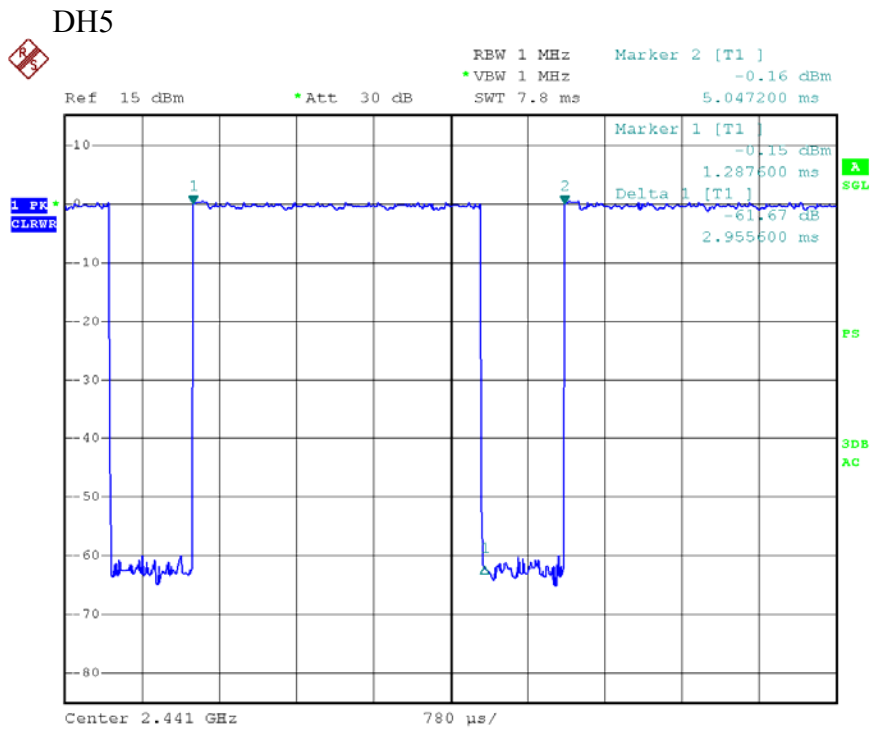


8. MAXIMUM PEAK OUTPUT POWER TEST

8.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

8.2 Test SET-UP



8.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


8.4 Test Results



Product : Car DVD player Test Mode : CH Low ~ CH High
Test Item : Max. peak output power Temperature : 24°C
Test Voltage : DC 12V Battery Humidity : 55%RH
Test Result : PASS

Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Results	Modulation
2402	1.46	1.63	125	PASS	GFSK
2441	1.75	2.44	125	PASS	GFSK
2480	1.88	2.72	125	PASS	GFSK
2402	1.05	0.19	125	PASS	$\pi/4$ DQPSK
2441	1.23	1.10	125	PASS	$\pi/4$ DQPSK
2480	1.40	1.45	125	PASS	$\pi/4$ DQPSK
2402	1.05	0.19	125	PASS	8DPSK
2441	1.23	1.10	125	PASS	8DPSK
2480	1.40	1.45	125	PASS	8DPSK

Remark: The results of modulations $\pi/4$ DQPSK and 8DPSK are the same.


Modulation Mode: GFSK

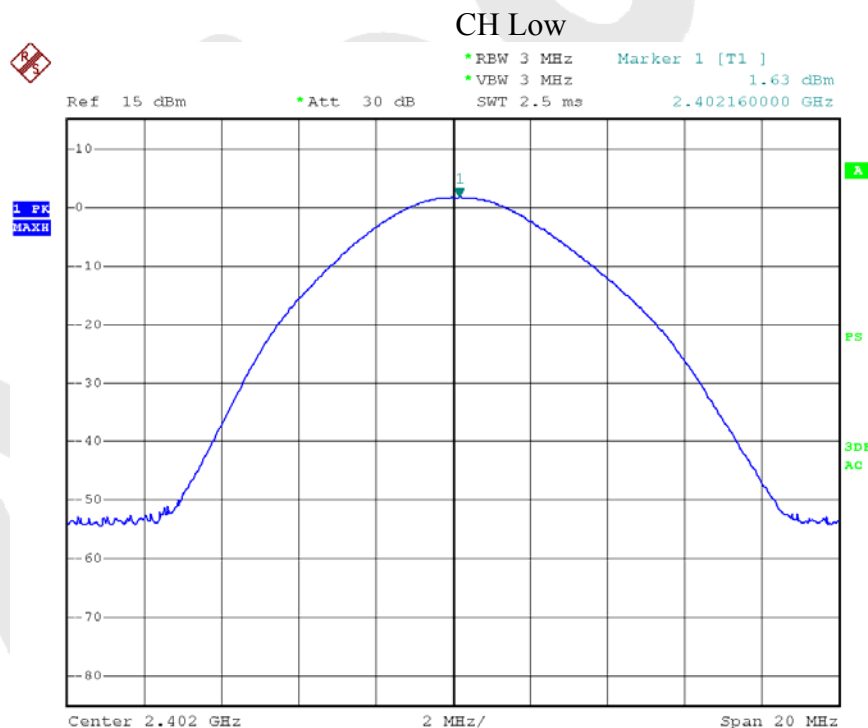

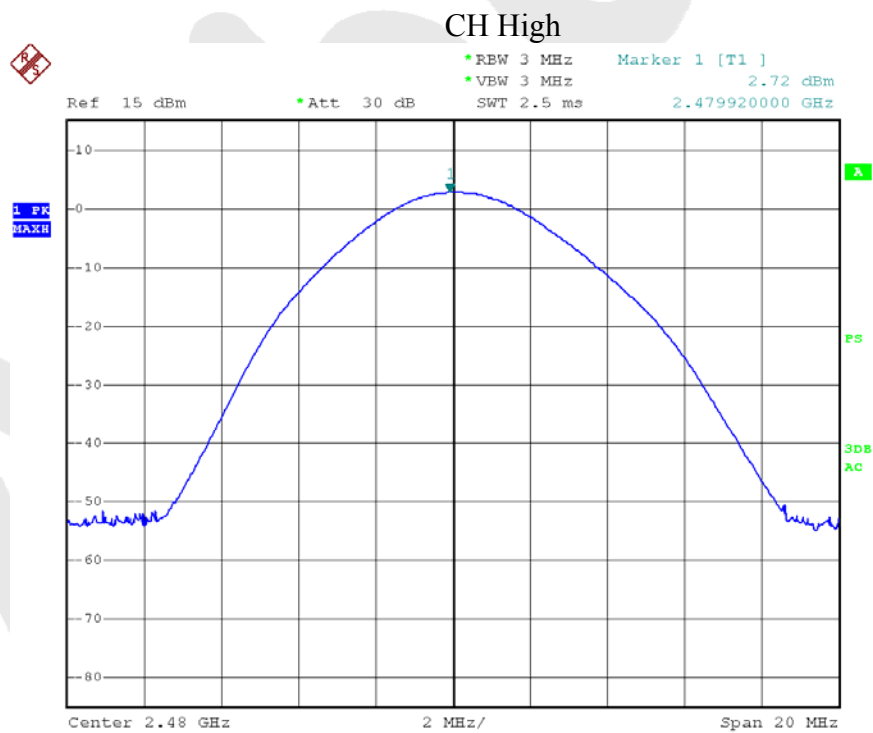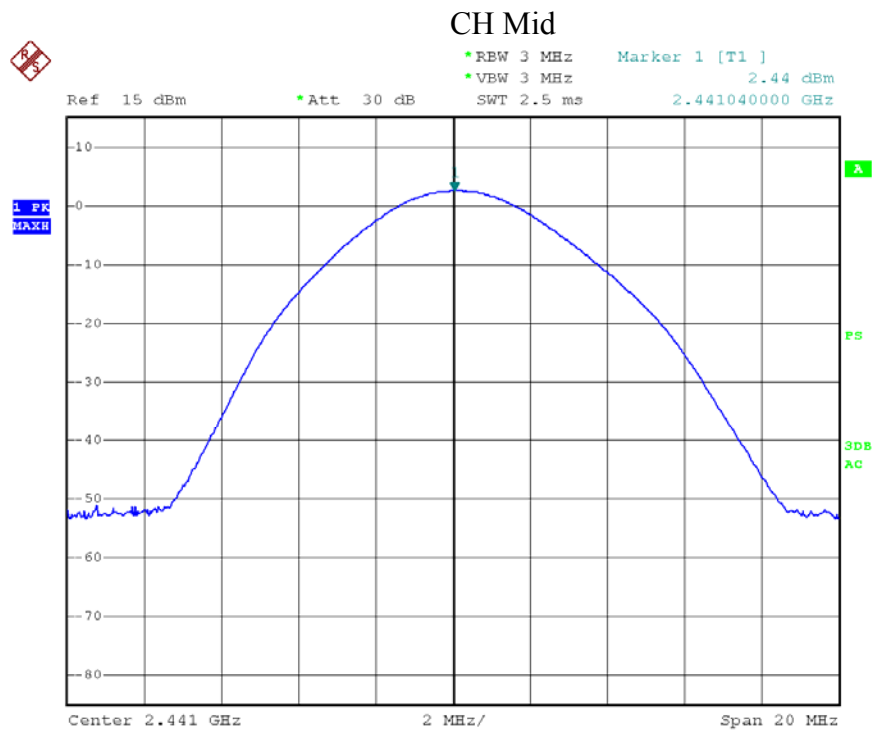



Modulation Mode: $\pi/4$ DQPSK & 8DPSK

CH Low

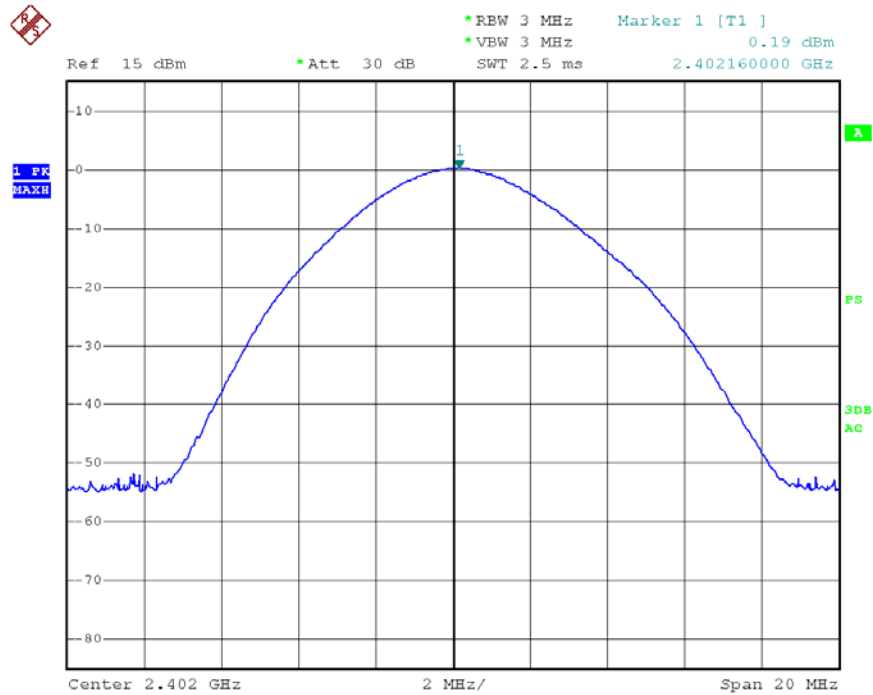

CH Mid

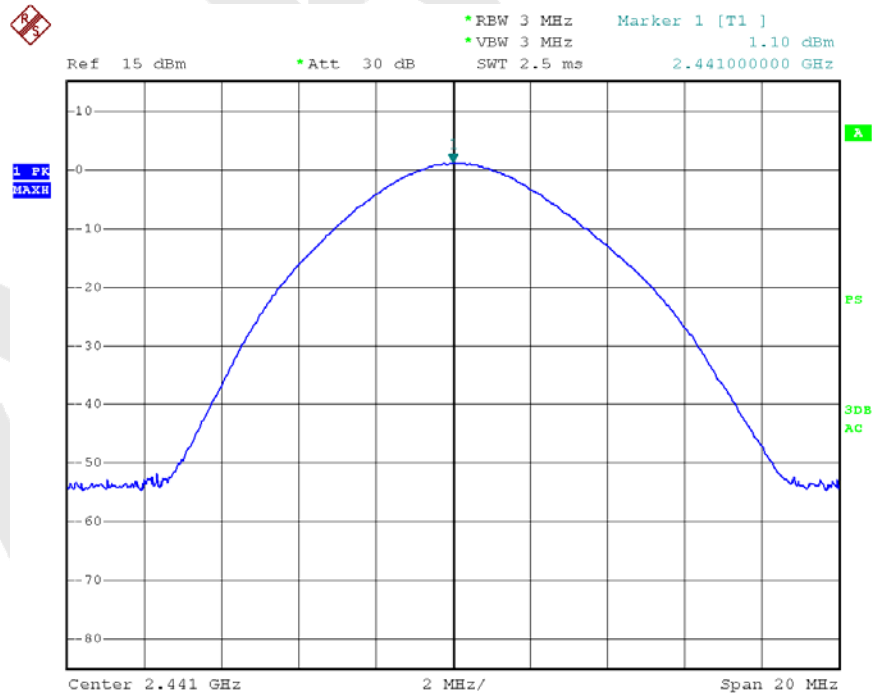

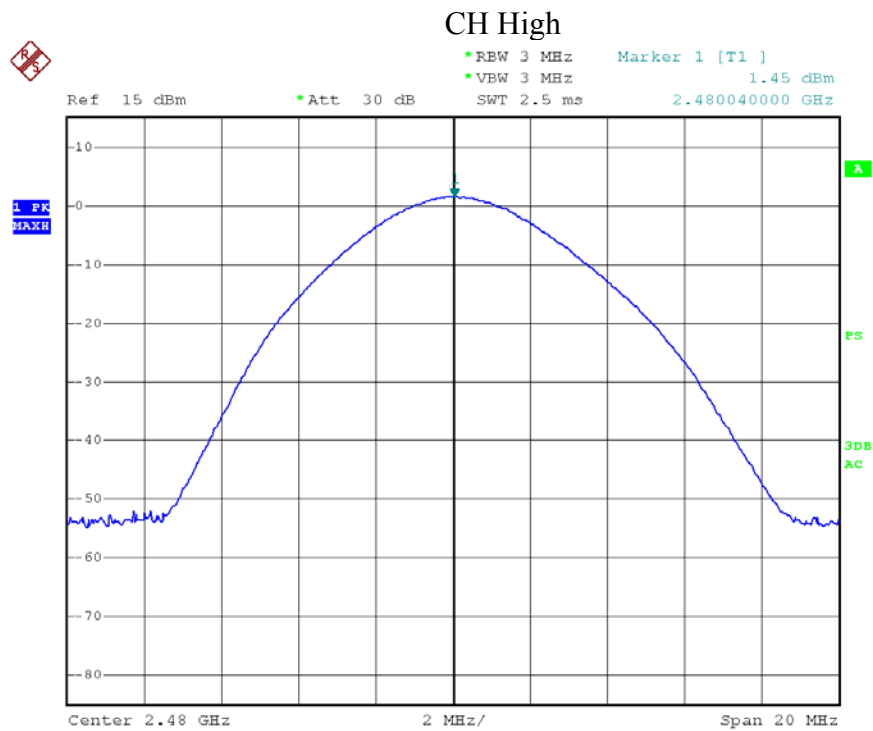

9. BAND EDGE TEST

9.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

9.2 Test SET-UP

Same as the radiated emission test.

9.3 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr. 23, 2013	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 23, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

9.4 Test Results

Pass.

Please refer the following data.

Product : Car DVD player	Test Mode : CH Low ~ CH High
Test Item : Band edge	Temperature : 24°C
Test Voltage : DC 12V Battery	Humidity : 55%RH
Test Result : PASS	



1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)	Modulation
<2400	1.14	-50.65	51.79	>20dBc	GFSK
	-0.82	-53.52	52.70	>20dBc	π /4DQPSK
	-0.82	-53.52	52.70	>20dBc	8DPSK
>2483.5	2.32	-54.73	57.05	>20dBc	GFSK
	0.48	-55.32	55.80	>20dBc	π /4DQPSK
	0.48	-55.32	55.80	>20dBc	8DPSK



2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Modulation
		PK	AV	PK	AV	
<2400	H	56.17	46.21	74.00	54.00	GFSK
	V	60.33	44.79	74.00	54.00	GFSK
	H	60.22	46.41	74.00	54.00	π /4DQPSK
	V	63.19	49.25	74.00	54.00	π /4DQPSK
	H	60.12	48.07	74.00	54.00	8DPSK
	V	58.46	49.17	74.00	54.00	8DPSK
>2483.5	H	47.25	37.65	74.00	54.00	GFSK
	V	47.03	37.57	74.00	54.00	GFSK
	H	44.22	38.36	74.00	54.00	π /4DQPSK
	V	48.67	40.94	74.00	54.00	π /4DQPSK
	H	44.36	38.81	74.00	54.00	8DPSK
	V	49.27	40.01	74.00	54.00	8DPSK

Modulation Mode: GFSK

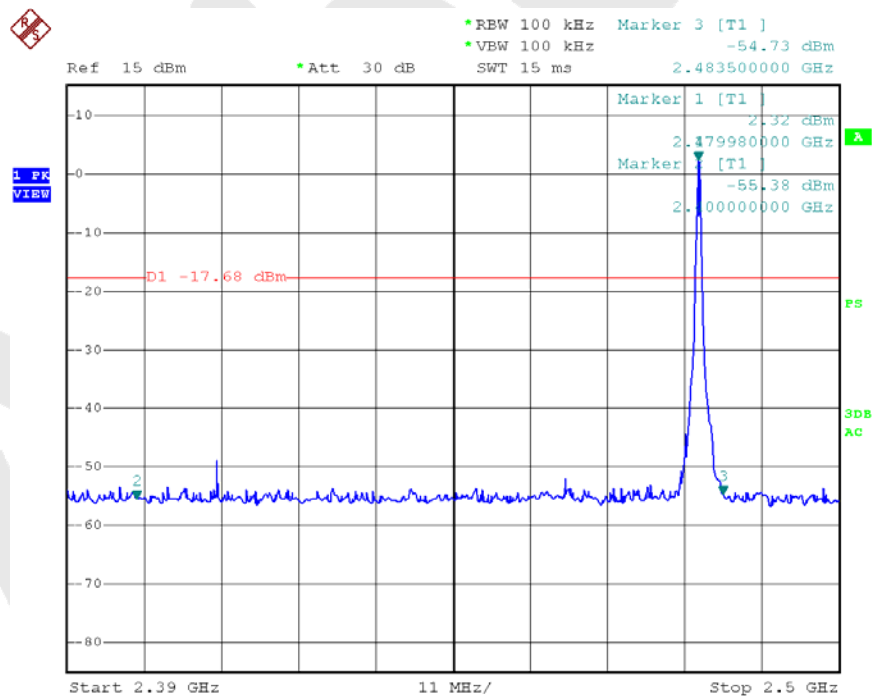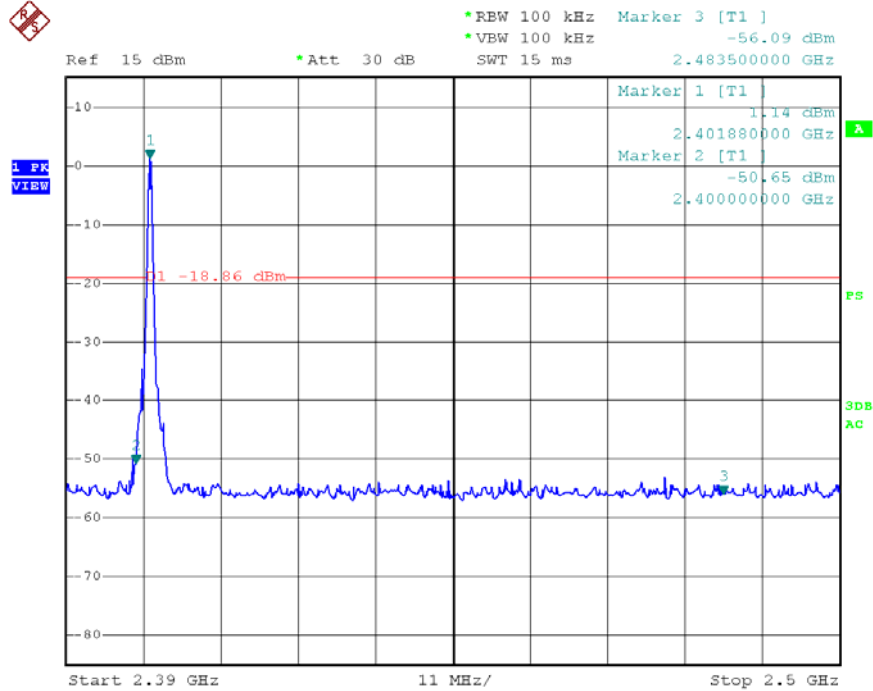

Modulation Mode: $\pi/4$ DQPSK & 8DPSK

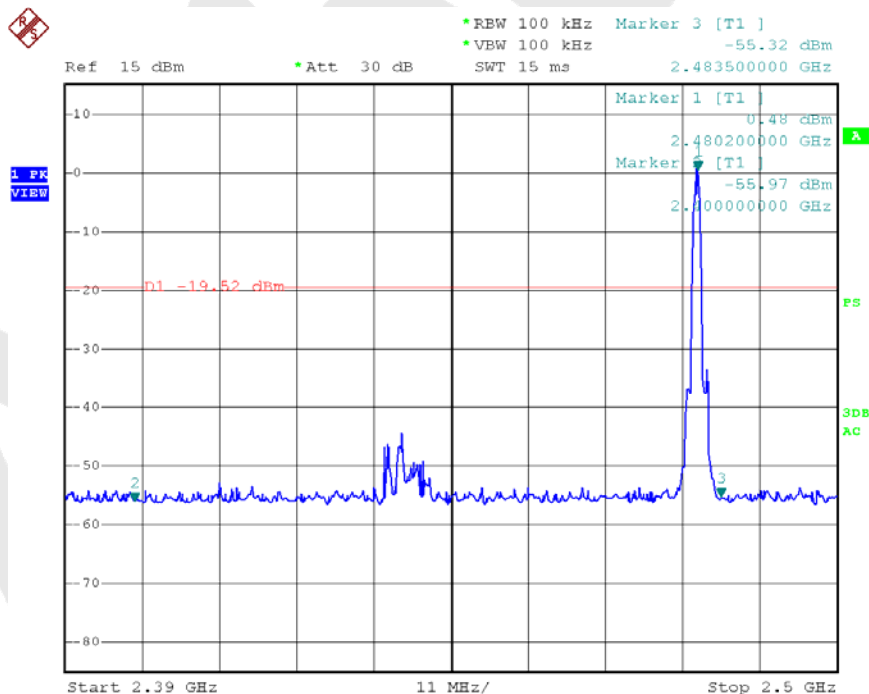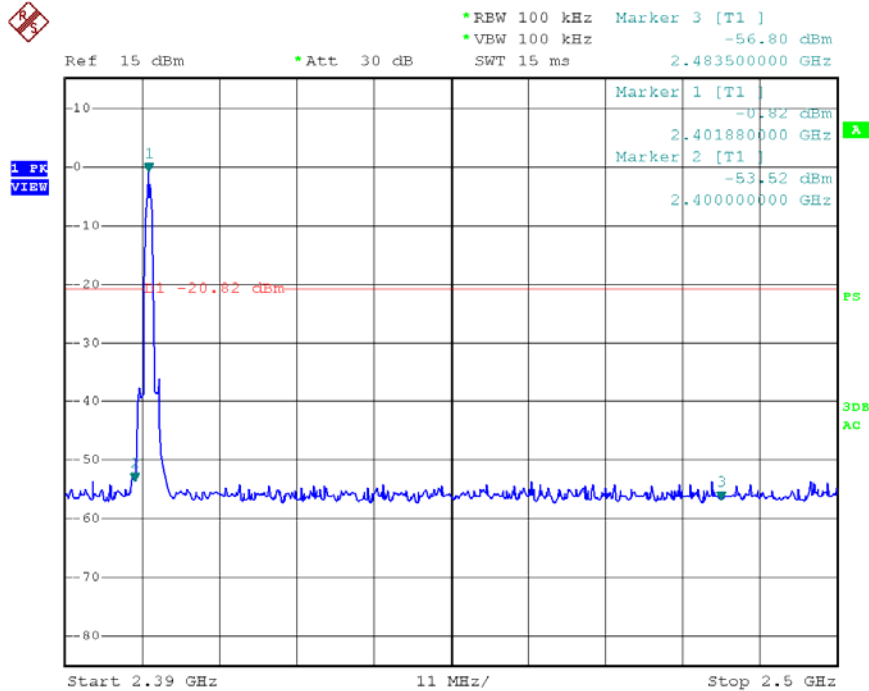

10. ANTENNA APPLICATION

10.1 Antenna requirement


The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


10.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.

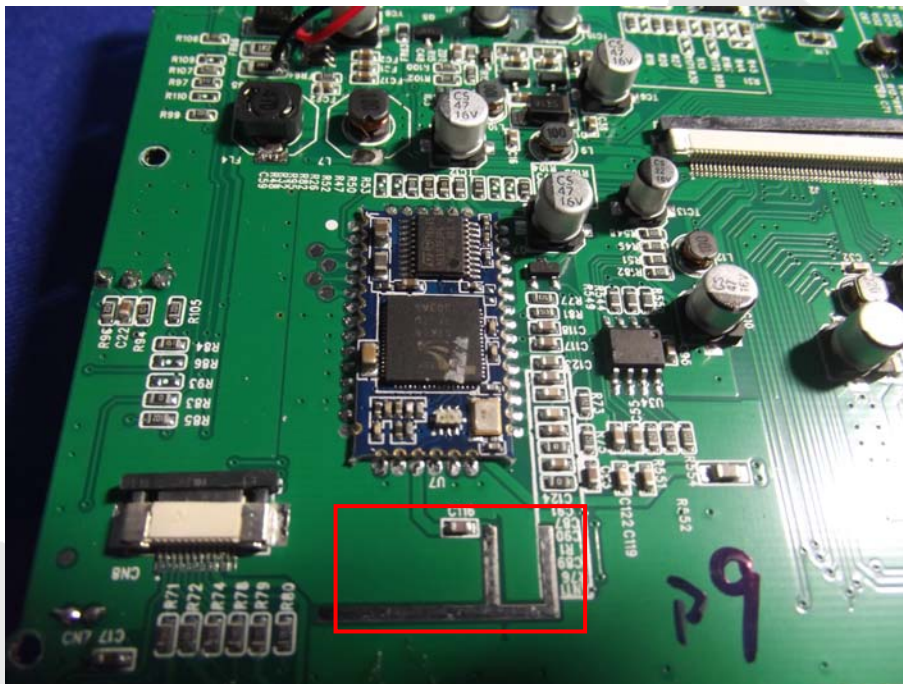

11. PHOTOGRAPH

11.1 Photo of Radiation Emission Test

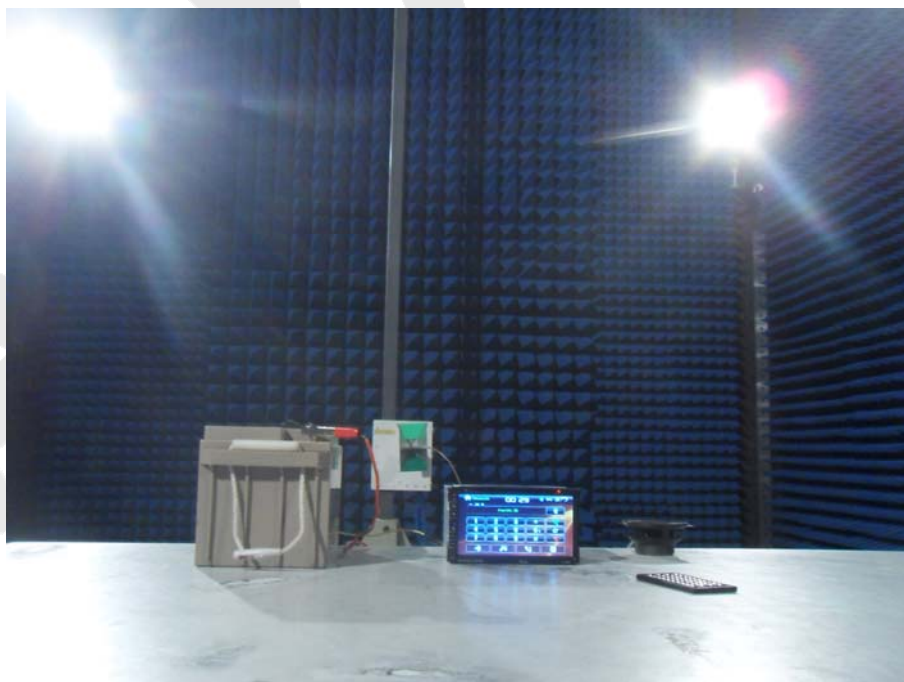

APPENDIX I (External Photos)

Figure 1

The EUT-Front View

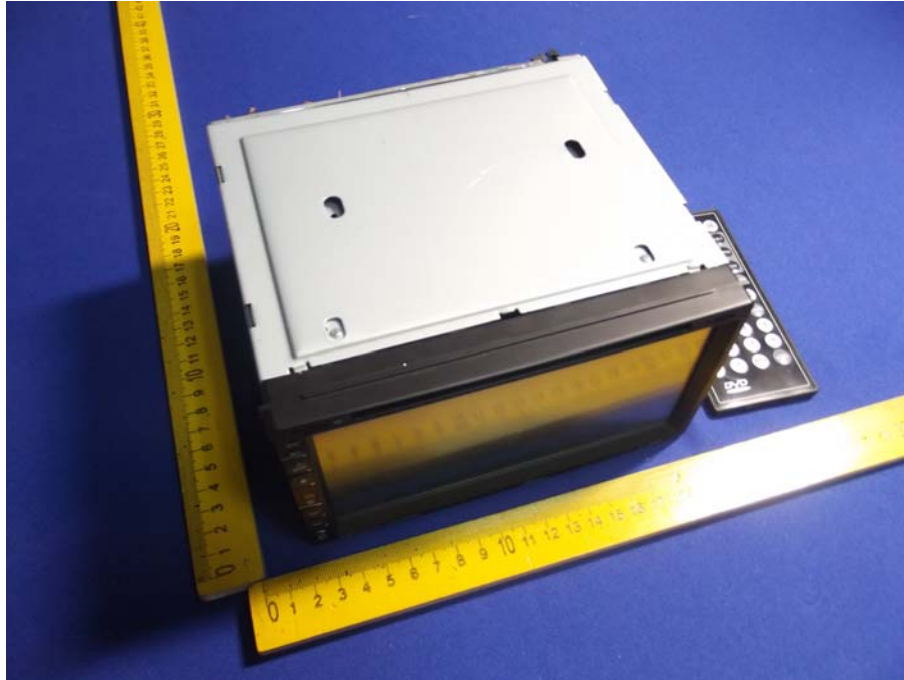


Figure 2

The EUT-Back View

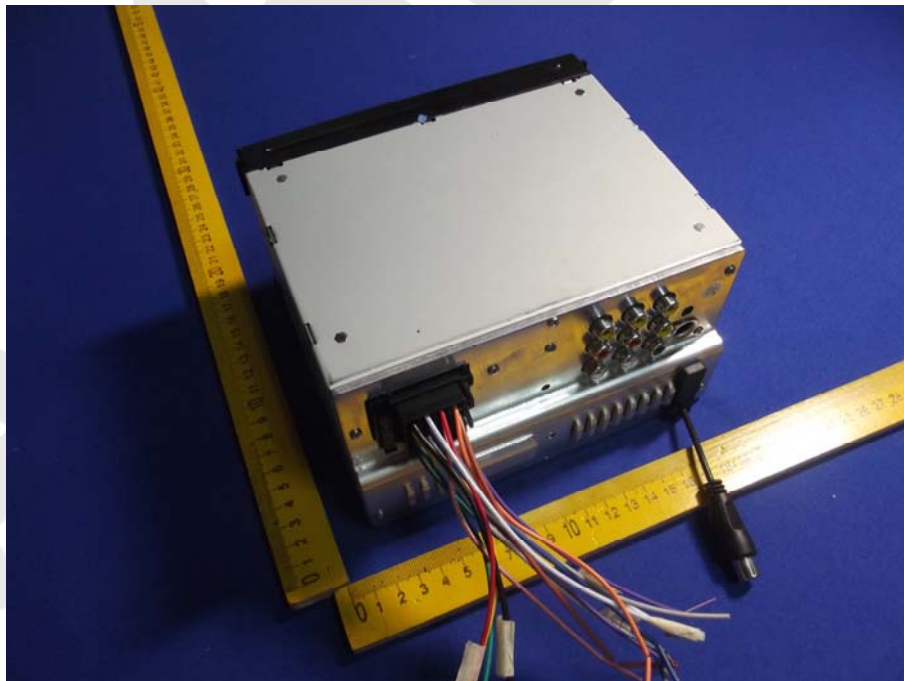


Figure 3
The EUT-Port View



Figure 4
The EUT-Button View



APPENDIX II (Internal Photos)

Figure 5

The EUT-Inside View

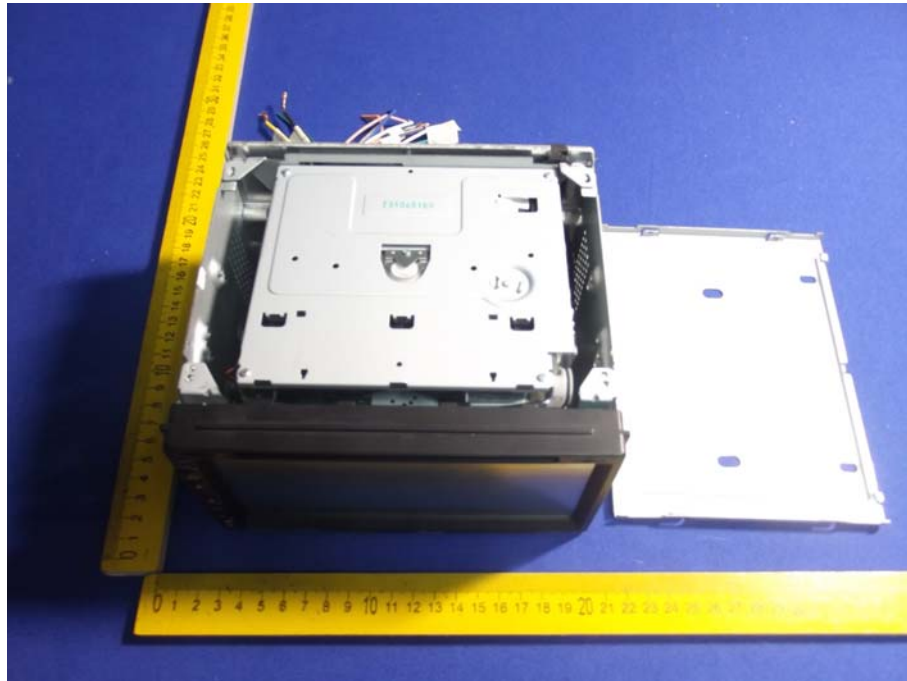


Figure 6

The EUT-Inside View



Figure 7
PCB of the EUT-Front View

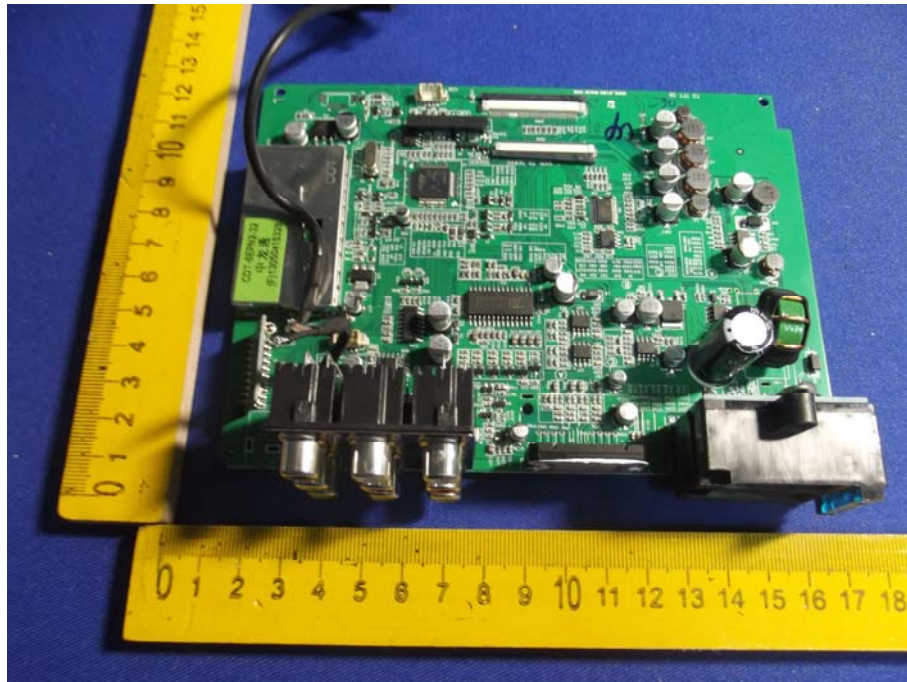


Figure 8
PCB of the EUT-Back View

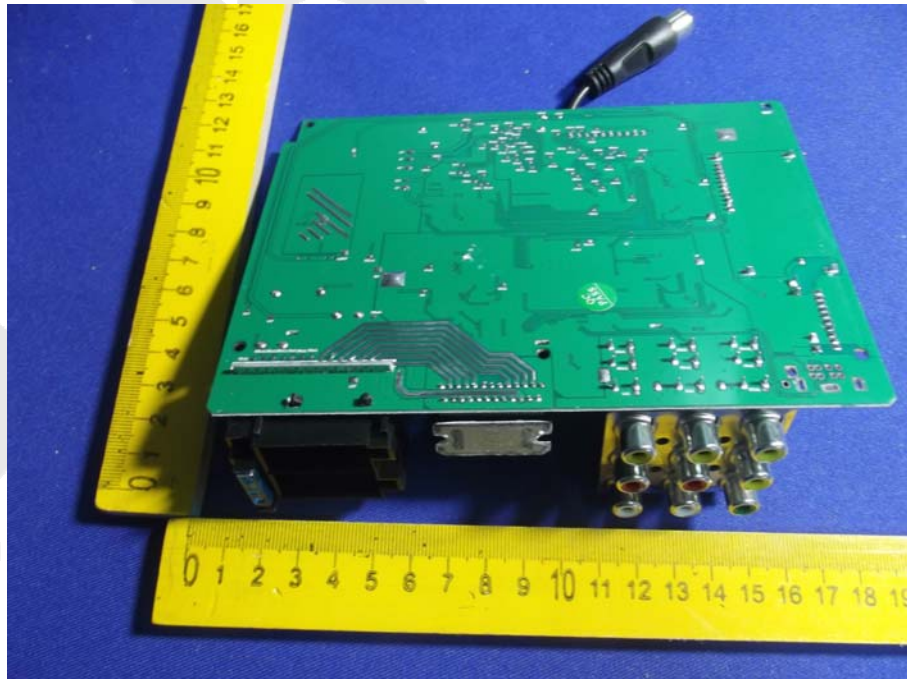


Figure 9
PCB of the EUT-Front View

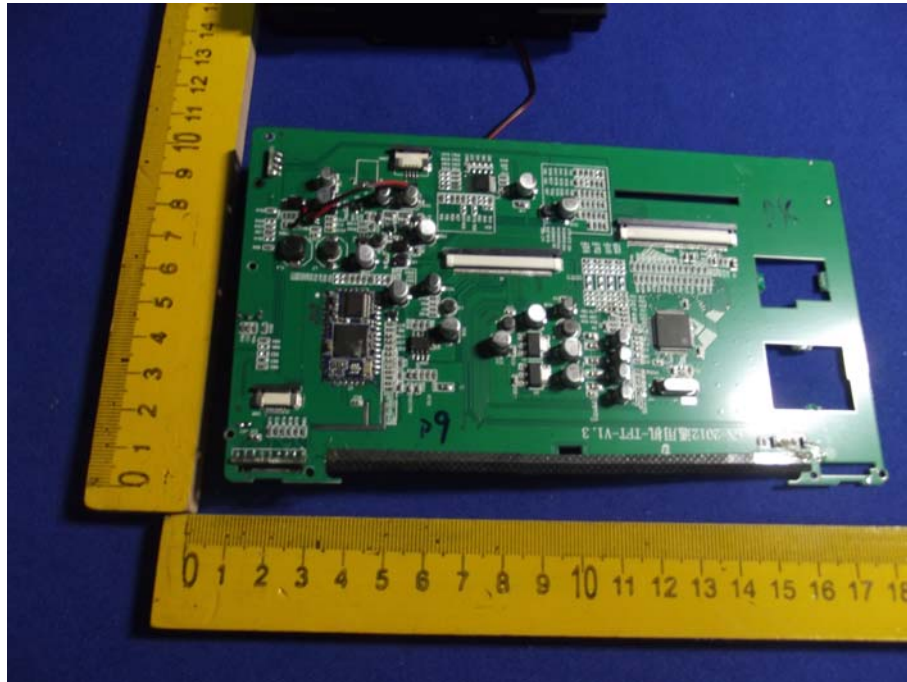


Figure 10
PCB of the EUT-Back View

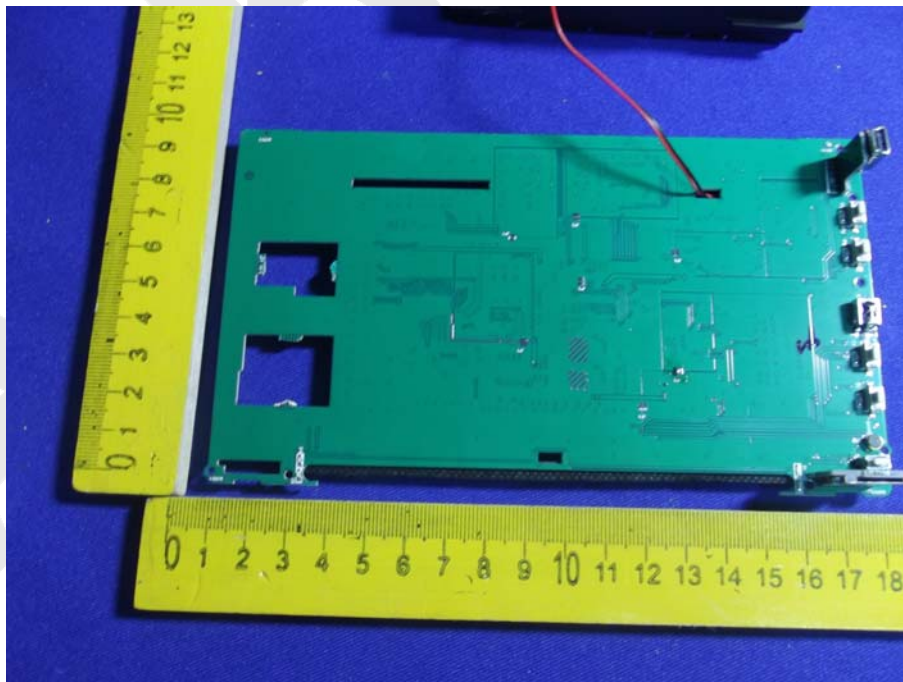


Figure 11
PCB of the BT Module View

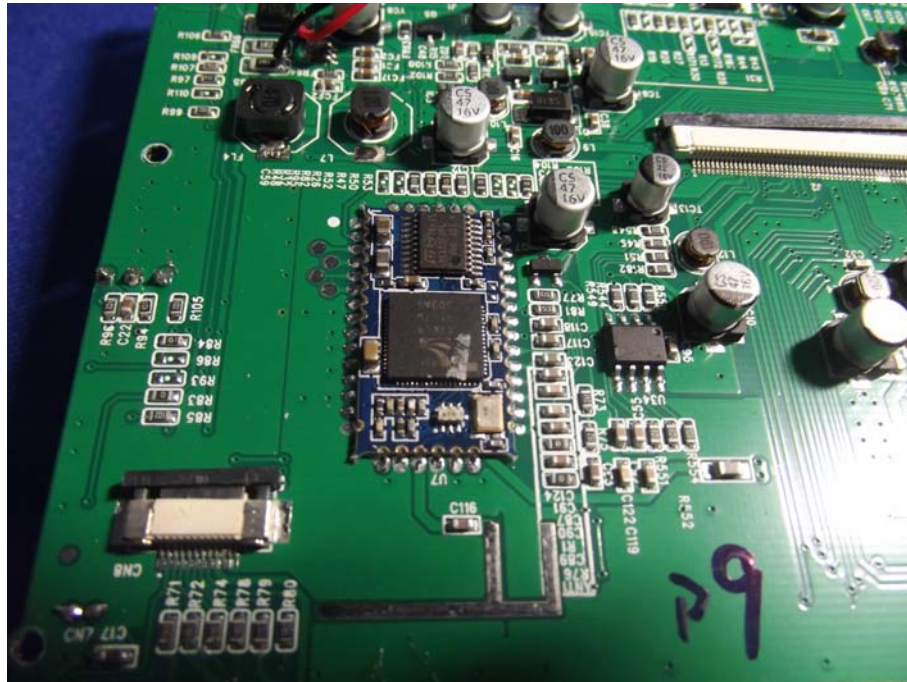


Figure 12
PCB of the EUT-Front View

