







### ISO/IEC17025Accredited Lab.

Report No: FCC 1309102-02 File reference No: 2013-10-10

Applicant: TD Semi,Inc.

Product: Torn Tab

Model No: T3157

Trademark: TD Semi

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4 and FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: October 10, 2013

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F, Block 4, Anhua Industrial Zone., No.8 TaiRan Rd.CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1309102-02 Page 2 of 85

Date: 2013-10-10



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

### IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 85

Report No: 1309102-02

Date: 2013-10-10



# Test Report Conclusion

### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	9
3.1	Summary of Test Results	9
3.2	Test Standards.	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test.	14
6.1	Test Method and Test Procedure.	14
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	15
7.0	6dB Bandwidth Measurement	34
8.0	Maximum Peak Output Power	50
9.0	Power Spectral Density Measurement.	53
10.0	Out of Band Measurement.	68
11.0	Antenna Requirement.	77
12.0	FCC ID Label.	78
13.0	Photo of Test Setup and EUT View.	79

Date: 2013-10-10



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

### 1.2 Applicant Details

Applicant: TD Semi, Inc.

Address: 3704 Marlborough Ct., Plano, TX 75075, USA

Telephone: 1.972.865.8671

Fax: N/A

### 1.3 Description of EUT

Product: Torn Tab

Manufacturer: Shenzhen Jizhao Information Technology Co., Ltd

Address: 4th Floor, Yuxing Sanwei Tech Park, HangKong Road, Xixiang Town,

Bao'an, Shenzhen, China.

Brand Name: TD Semi
Model Number: T3157
Additional Model Number: N/A
Additional Trade Name: N/A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz;

Channel Spacing IEEE 802.11b/g/n (HT20) : 5MHz
Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1309102-02 Page 5 of 85

Date: 2013-10-10

Integral Antenna with maximum gain 2.0dBi Antenna:

Power Supply: Model No.: DSA-20PFE-05 FCH 050300

Input: 100-240V, 50/60Hz, 0.7A; Output: DC5V, 3A

1.4 Submitted Sample: 2 Samples

1.5 **Test Duration** 

2013-09-23 to 2013-10-10

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 85

Report No: 1309102-02

Date: 2013-10-10



2.0		Test Equip	ments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22
3m OATS			N/A	2013-08-22	2014-08-21
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-21	2014-08-20
LISN	AFJ	LS16C	10010947251	2013-08-21	2014-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22

Report No: 1309102-02 Page 7 of 85



### **Auxiliary Equipment** 2.1

Date: 2013-10-10

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
TF Card			Kingston		
Passive Earphone					

Monitor Signal cable of FCC DOC P2450 **SAMSUNG** 1.5m length

Date: 2013-10-10



Page 8 of 85

### 3. DESCRIPTION OF TEST MODES

### IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Page 9 of 85

Report No: 1309102-02

Date: 2013-10-10



### 3.0 **Technical Details**

### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

### 4.0 **EUT Modification**

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 10 of 85

Report No: 1309102-02 Date: 2013-10-10



### 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test

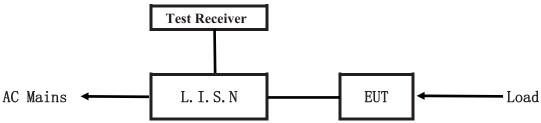


EUT: Equipment Under Test

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

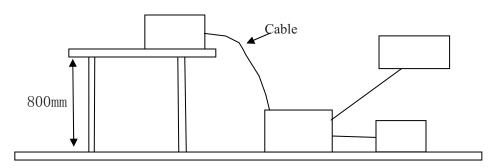

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model	FCC ID
Torn Tab	Shenzhen Jizhao Information Technology Co., Ltd.	T3157	2AAY2-T3157

### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1309102-02 Page 11 of 85

Date: 2013-10-10



# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

# 5.5 Power line conducted Emission Limit according to Paragraph 15.207.

Frequency	Class A Lim	its (dB µ V)	Class B	Limits (dB \mu V)
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1309102-02 Page 12 of 85

Date: 2013-10-10



### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Charging and Keep Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

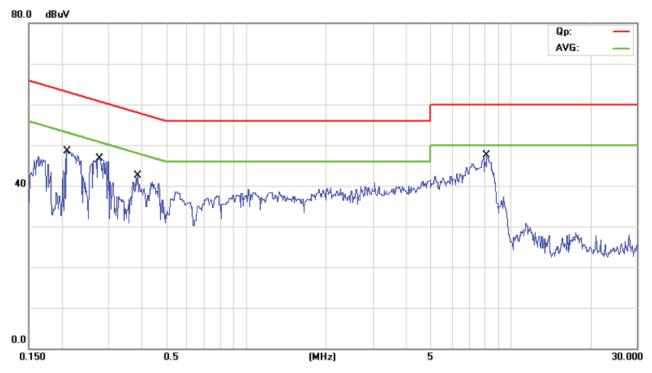

Frequency	Lina	Line Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.2100	Neutral	43.86	13.56	63.21	53.21
0.2770	Neutral	44.53	31.73	60.91	50.91
0.3863	Neutral	38.65	25.75	58.14	48.14
8.2103	Neutral	41.95	33.35	60.00	50.00

Report No: 1309102-02 Page 13 of 85

Date: 2013-10-10



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Charging and Keep Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

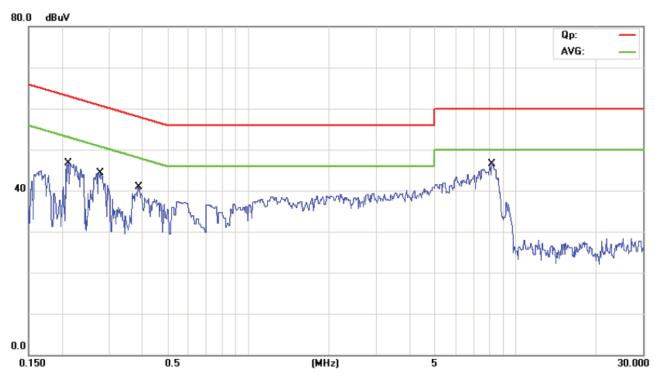

Frequency	Line Reading(dBμV)		Limit(	dBμV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.2115	Live	42.57	16.97	63.15	53.15
0.2770	Live	42.43	26.03	60.91	50.91
0.3865	Live	37.85	24.15	58.14	48.14
8.2443	Live	41.64	33.84	60.00	50.00

Report No: 1309102-02 Page 14 of 85

Date: 2013-10-10



### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

# Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Report No: 1309102-02 Page 15 of 85

Date: 2013-10-10



### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

### Frequencies in restricted band are complied to limit on Paragraph 15.209

		8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
A ove 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1309102-02 Page 16 of 85

Date: 2013-10-10



### Test result

### General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/ In Vertical (30MHz----1000MHz)

**EUT set Condition:** Keep WIFI Transmitting

**Results:** Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)	
148.480	37.57	Н	43.50	
445.160	445.160 32.58 H		46.00	
308.960	38.97	Н	46.00	
31.640	31.640 36.96 87.400 36.84		40.00 40.00	
87.400				
108.240	108.240 38.50		43.50	
136.160	136.160 37.74		43.50	

Report No: 1309102-02 Page 17 of 85

Date: 2013-10-10



### Test Figure:

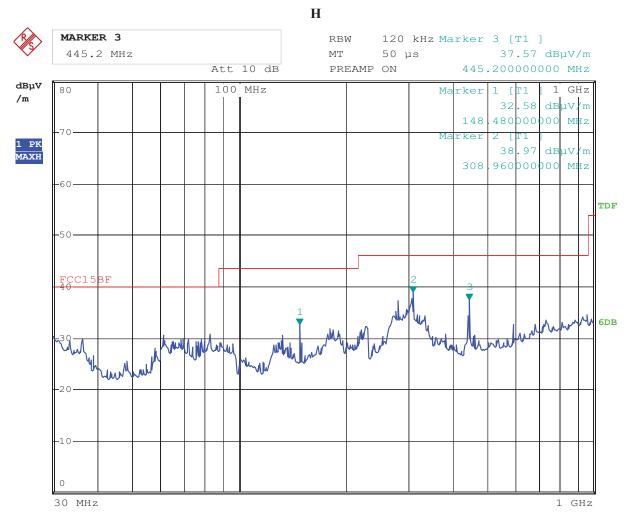

Date: 24.SEP.2013 15:50:11


Page 18 of 85

Report No: 1309102-02

Date: 2013-10-10



### Test Figure:

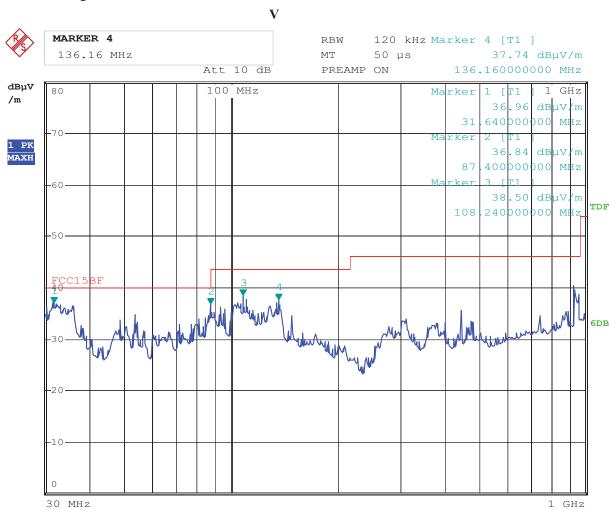

Date: 24.SEP.2013 15:52:43

Report No: 1309102-02 Page 19 of 85

Date: 2013-10-10



### Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
91.09 (PK)	Н	Even do monto 1 Eno aven ave
91.29 (PK)	V	Fundamental Frequency
	Н	74(Peak)/ 54(AV)
	V	74(Peak)/ 54(AV)
	H/V	74(Peak)/ 54(AV)
	91.09 (PK)	91.09 (PK) H 91.29 (PK) V H V H/V H/V H/V H/V H/V H/V H/V H/V

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2013-10-10



### Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	91.24 (PK)	Н	Fundamental Frequency
2437.00	91.37 (PK)	V	Fundamental Frequency
4874.00		Н	74(Peak)/ 54(AV)
4874.0		V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

### Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
2462.00	90.86 (PK)	Н	Fundamental Frequency
2462.00	90.93 (PK)	V	Fundamental Frequency
4924		Н	74(Peak)/ 54(AV)
4924		V	74(Peak)/ 54(AV)
7368	-	H/V	74(Peak)/ 54 AV)
9748.00		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234	-	H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2013-10-10




Please refer to the following test plots for details:

### CH01 for 11g at 54Mbps: Horizontal

### end for higher analysis no

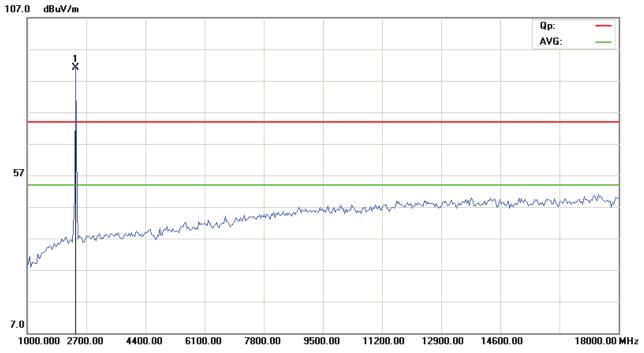

### CH01 for 11g at 54Mbps: Vertical

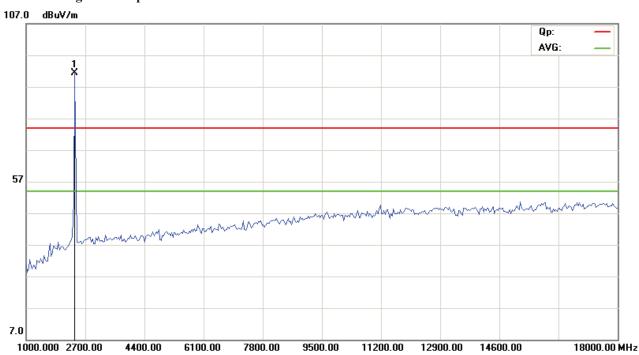

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 22 of 85

Report No: 1309102-02

Date: 2013-10-10



### CH06 for 11g at 54Mbps: Vertical

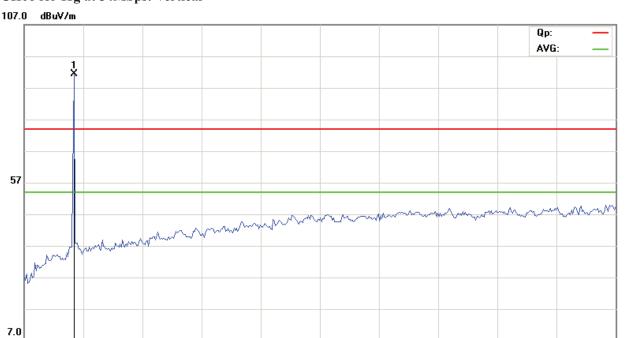

9500.00

12900.00

11200.00

14600.00

18000.00 MHz


## CH06 for 11g at 54Mbps: Horizontal

4400.00

6100.00

7800.00

1000.000 2700.00

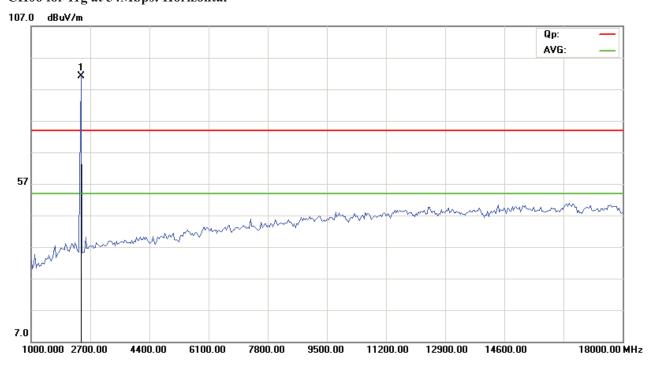


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2013-10-10



### CH11 for 11g at 54Mbps: Vertical

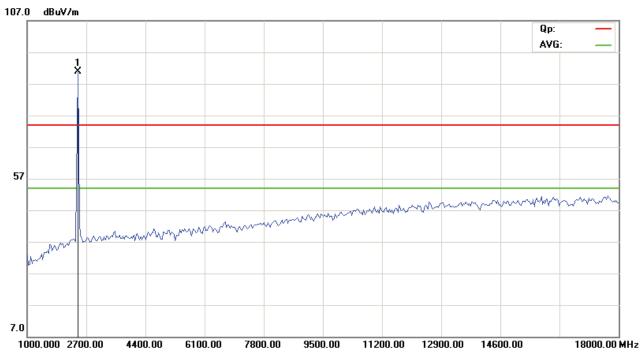

## CH11 for 11g at 54Mbps: Horizontal

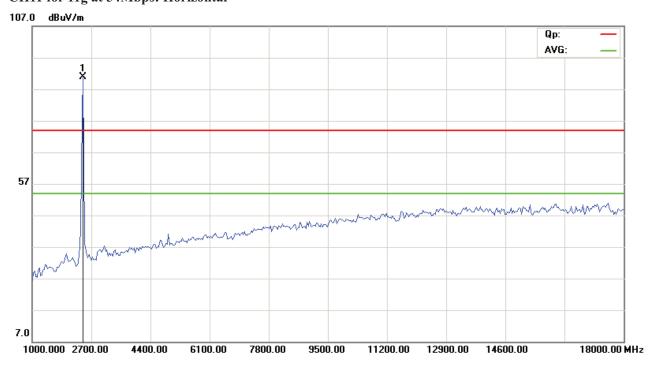

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2013-10-10



### Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	91.34 (PK)	Н	Fundamental Frequency
2412.00	91.59 (PK)	V	Fundamental Frequency
4824.00		Н	74(Peak)/ 54(AV)
4824.00		V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

### Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	91.37 (PK)	Н	Fundamental Frequency
2437.00	91.47 (PK)	V	Tundamental Frequency
4874.00		Н	74(Peak)/ 54(AV)
4874.00		V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1309102-02 Page 25 of 85

Date: 2013-10-10



### Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
2462.00	90.43 (PK)	Н	Fundamental Frequency
2462.00	90.86 (PK)	V	Fundamental Frequency
4924		Н	74(Peak)/ 54(AV)
4924		V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2013-10-10




Please refer to the following test plots for details:

### CH01 for 11b at 11Mbps: Horizontal

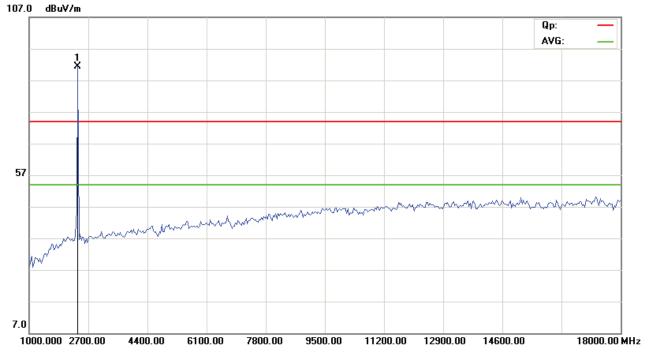

### CH01 for 11b at 11Mbps: Vertical

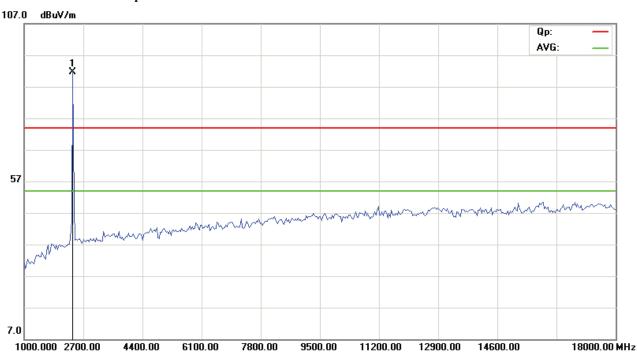


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co. Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2013-10-10



# CH06 for 11b at 11Mbps: Vertical

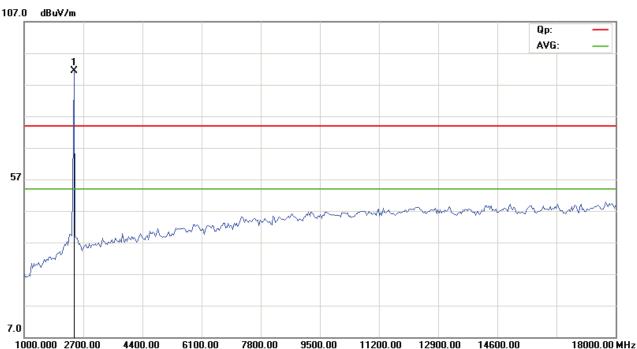

### CH06 for 11b at 11Mbps: Horizontal

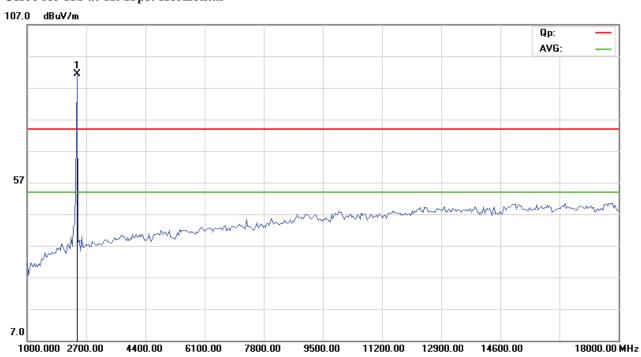


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2013-10-10



### CH11 for 11b at 11Mbps: Vertical

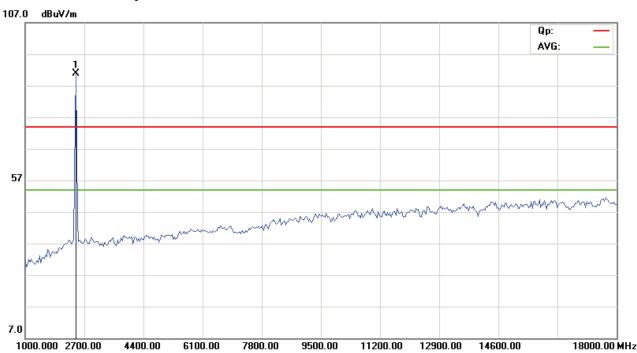

### CH11 for 11b at 11Mbps: Horizontal

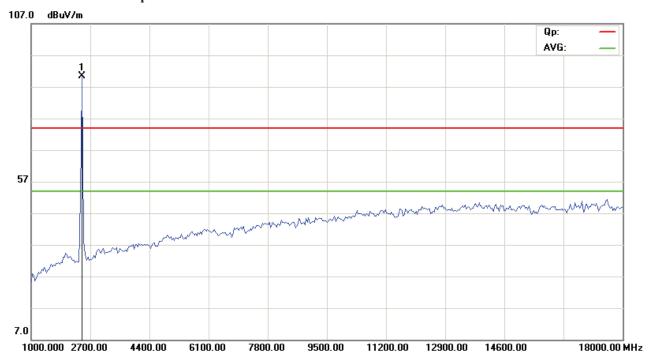

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2013-10-10



## Operation Mode: Transmitting under CH01 for 11n HT20 at 65Mbps

	0	-	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	90.39 (PK)	Н	Fundamental Frequency
2412.00	90.19 (PK)	V	Fundamental Frequency
4824.00		Н	74(Peak)/ 54(AV)
4824.00		V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

### Operation Mode: Transmitting under CH06 for 11n HT20 at 65Mbps

			I	
Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)	
2437.00	90.44 (PK)	Н	Fundamental Frequency	
2437.00	90.47 (PK)	V	Fundamental Frequency	
4874.00		Н	74(Peak)/ 54(AV)	
4874.00		V	74(Peak)/ 54(AV)	
7311.00		H/V	74(Peak)/ 54(AV)	
9748.00		H/V	74(Peak)/ 54(AV)	
12185		H/V	74(Peak)/ 54(AV)	
14622		H/V	74(Peak)/ 54(AV)	
17059		H/V	74(Peak)/ 54(AV)	
19496		H/V	74(Peak)/ 54(AV)	
21933		H/V	74(Peak)/ 54(AV)	
24370		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1309102-02 Page 30 of 85

Date: 2013-10-10



### Operation Mode: Transmitting under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2462.00	90.93 (PK)	Н	Fundamental Frequency
2462.00	90.86 (PK)	V	rundamentai riequency
4924		Н	74(Peak)/ 54(AV)
4924		V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Date: 2013-10-10




Please refer to the following test plots for details:

### CH01 for 11n HT20 at 65Mbps: Horizontal

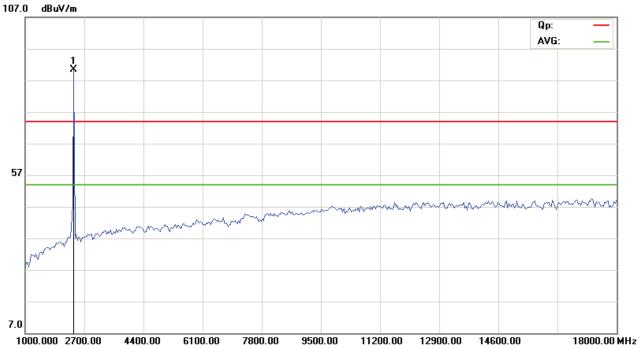

### CH01 for 11n HT20 at 65Mbps: Vertical

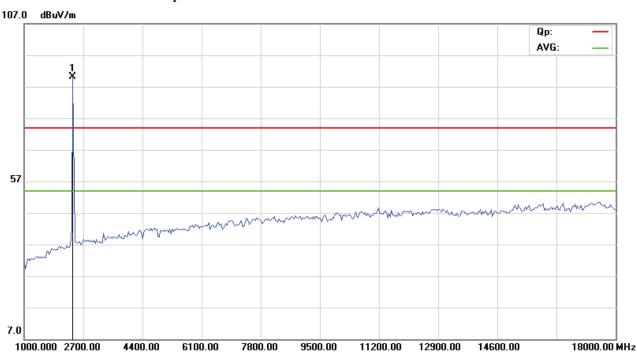


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co. Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2013-10-10



### CH06 for 11n HT20 at 65Mbps: Vertical

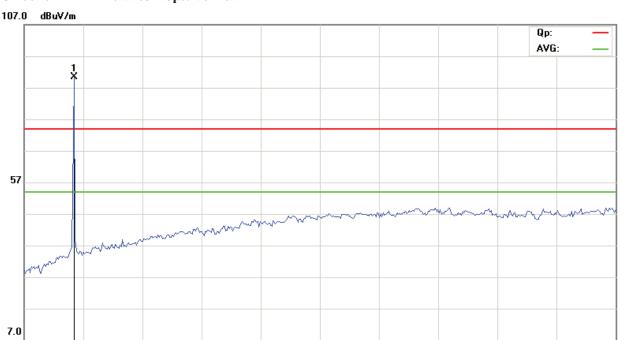

9500.00

11200.00

12900.00

14600.00

18000.00 MHz


### CH06 for 11n HT20 at 65Mbps: Horizontal

4400.00

6100.00

7800.00

1000.000 2700.00

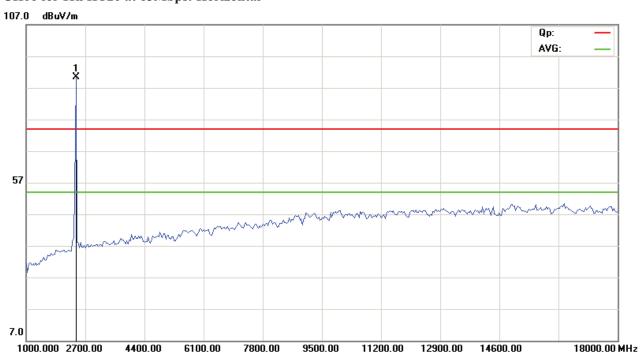


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2013-10-10



### CH11 for 11n HT20 at 65Mbps: Vertical

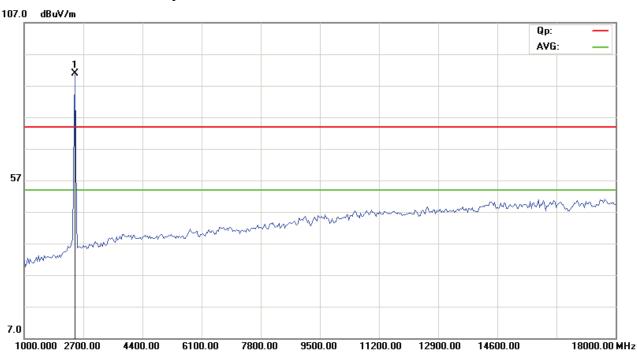

### CH11 for 11n HT20 at 65Mbps: Horizontal

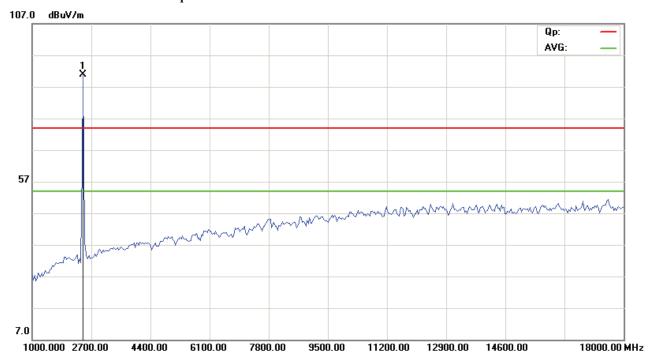

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: 1309102-02 Page 34 of 85

Date: 2013-10-10



### 7.0 6dB Bandwidth Measurement

## 7.1 Test Setup



### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Report No: 1309102-02 Page 35 of 85

Date: 2013-10-10



# 7.4 Test Result 6dB Occupied Bandwidth


EUT		Torn Tab Model		T3157			
Mode		802.111	)	Input Voltage		AC 120V	
Temperati	ure	24 deg. (	C,	Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)		mum Limit MHz)	Pass/ Fail
1		2412	1	10.08		0.5	Pass
6		2437	1	10.08		0.5	Pass
11		2462	1	10.08		0.5	Pass
1		2412	11	9.36		0.5	Pass
6		2437	11	8.64		0.5	Pass
11		2462	11	8.64		0.5	Pass

Report No: 1309102-02 Page 36 of 85

Date: 2013-10-10



### 1. 802.11b at 1Mbps of CH01

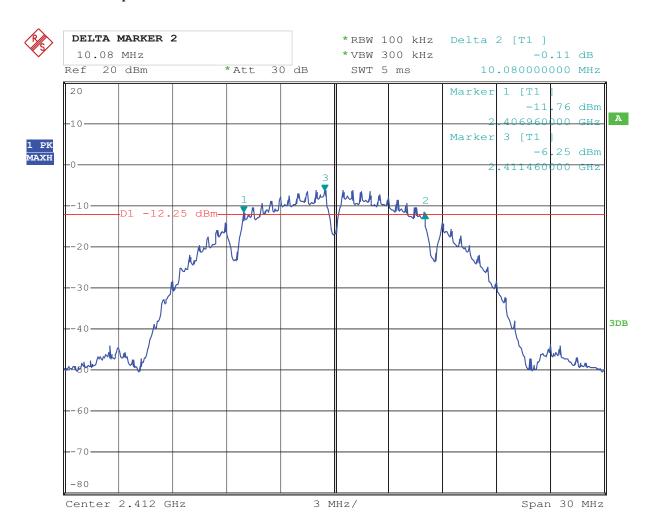


Date: 24.SEP.2013 10:27:35

Report No: 1309102-02 Page 37 of 85

Date: 2013-10-10



## 2. 802.11b at 1Mbps of CH06

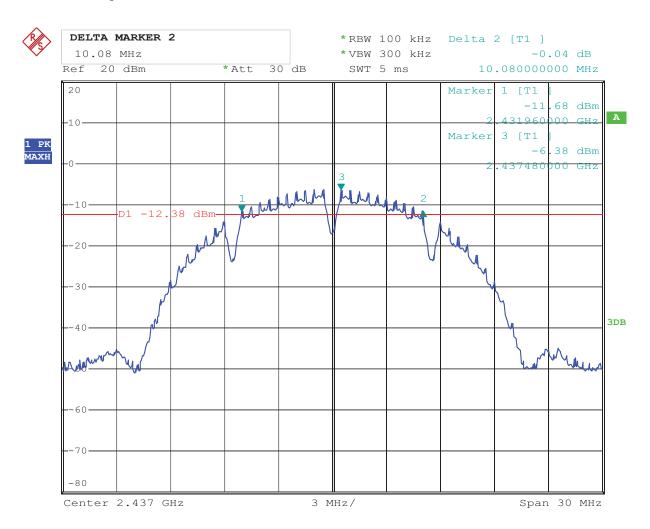

Date: 24.SEP.2013 10:28:56


Page 38 of 85

Report No: 1309102-02

Date: 2013-10-10



## 3. 802.11b at 1Mbps of CH11

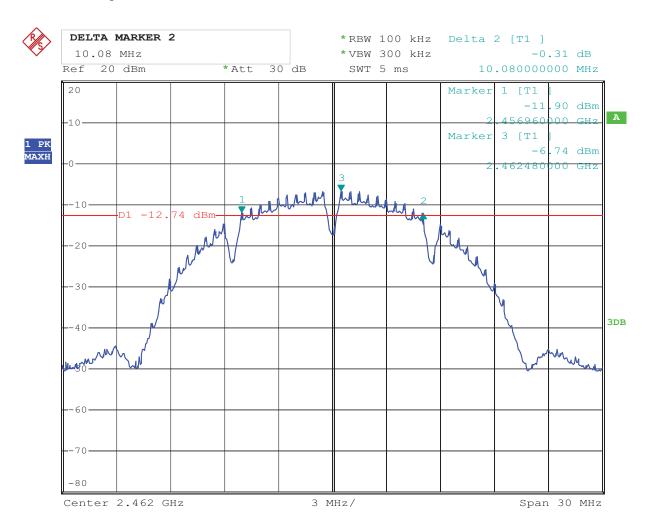

Date: 24.SEP.2013 10:29:48


Page 39 of 85

Date: 2013-10-10

Report No: 1309102-02



## 4. 802.11b at 11Mbps of CH01

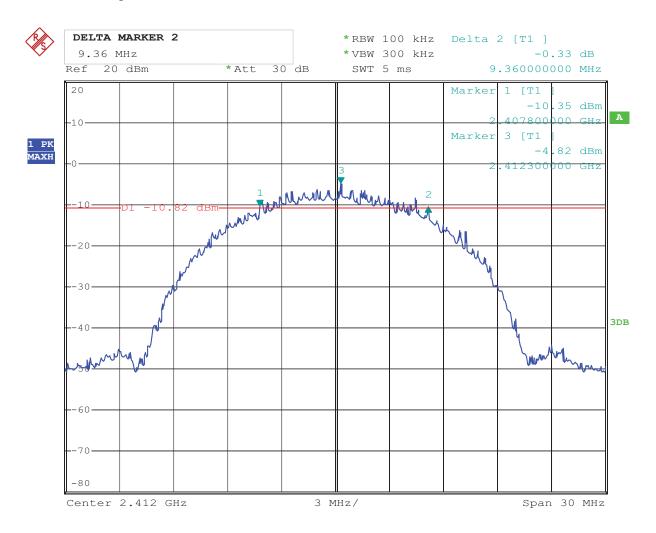


Date: 24.SEP.2013 10:33:46

Report No: 1309102-02 Page 40 of 85

Date: 2013-10-10



## 5. 802.11b at 11Mbps of CH06

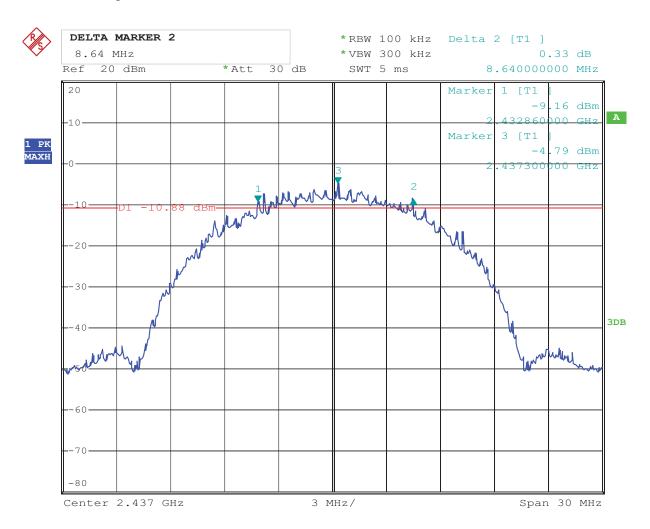


Date: 24.SEP.2013 10:35:25

Report No: 1309102-02 Page 41 of 85

Date: 2013-10-10



## 6. 802.11b at 11Mbps of CH11

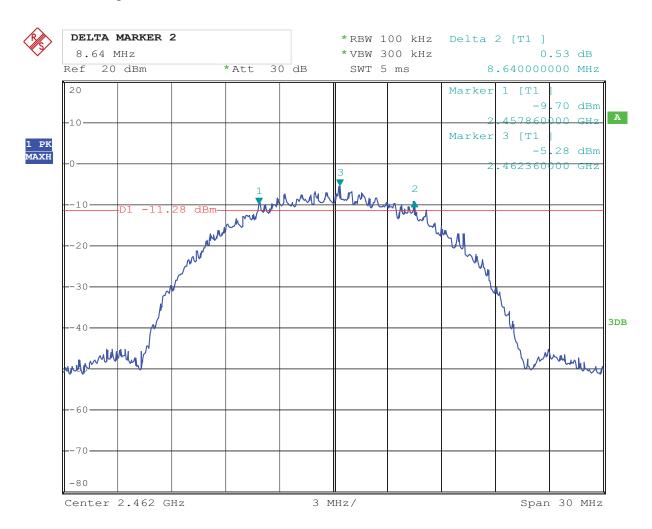

Date: 24.SEP.2013 10:36:48

Report No: 1309102-02 Page 42 of 85

Date: 2013-10-10



## 6dB Occupied Bandwidth

EUT		Torn Tab	Model	odel		T3157			
Mode		802.11g	Input Voltag	e		AC 120V			
Temperat	ure	24 deg. C,	Humidity			56% RH			
Channel		nel Frequency (MHz)	Data Transfer Rate (Mbps)	Baı	6 dB ndwidth MHz)	Minimum Limit (MHz)	Pass/ Fail		
1	2412		54		16.38	0.5	Pass		
6	2437		54	16.38		0.5	Pass		
11		2462	54	-	16.38	0.5	Pass		

Page 43 of 85


Report No: 1309102-02

Date: 2013-10-10



### **Test Plots:**

## 1. 802.11g at 54Mbps of CH01

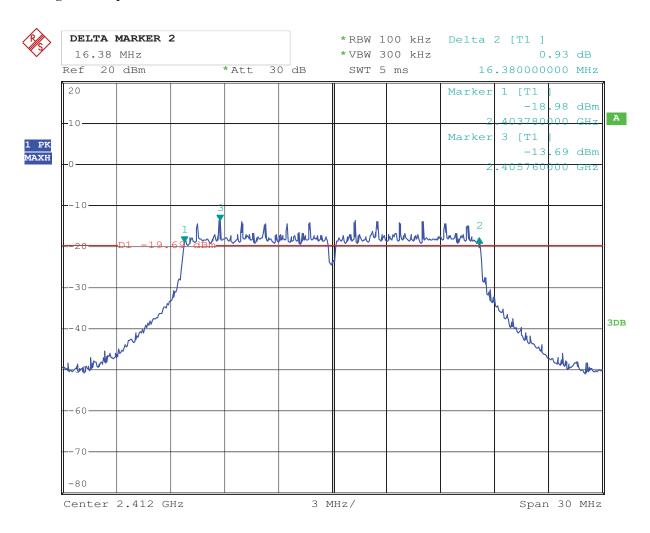


Date: 24.SEP.2013 10:32:37

Report No: 1309102-02 Page 44 of 85

Date: 2013-10-10



### 2. 802.11g at 54Mbps of CH06

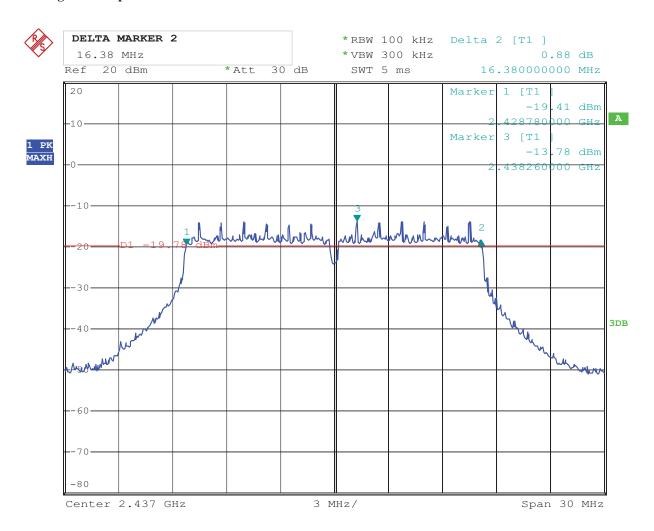


Date: 24.SEP.2013 10:31:33

Report No: 1309102-02 Page 45 of 85

Date: 2013-10-10



### 3. 802.11g at 54Mbps of CH11

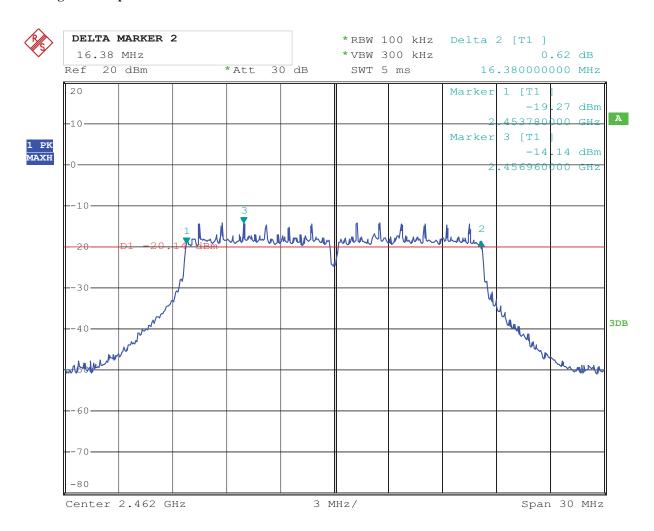

Date: 24.SEP.2013 10:30:40

Report No: 1309102-02 Page 46 of 85

Date: 2013-10-10



# 6dB Occupied Bandwidth

EU'	Γ	Torn Tab			Model		T3157	
Mod	le	8	02.11n HT20		Input Vo	oltage		AC 120V
Temper	ature		24 deg. C,		Humi	dity		56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)	Minimum Limit (MHz)		Pass/ Fail
1		2412	65	17.58			0.5	Pass
6	2437 65 17.58		.58	58 0.5		Pass		
11		2462 65 1		17	.52		0.5	Pass

Page 47 of 85


Report No: 1309102-02

Date: 2013-10-10



#### **Test Plots:**

### 1. 802.11n at HT20 of CH01

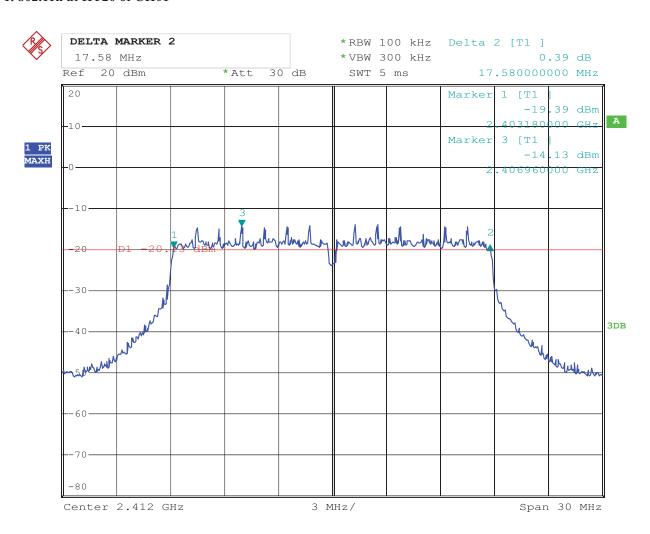


Date: 24.SEP.2013 10:39:29

Report No: 1309102-02 Page 48 of 85

Date: 2013-10-10



### 2. 802.11n at HT20 of CH06

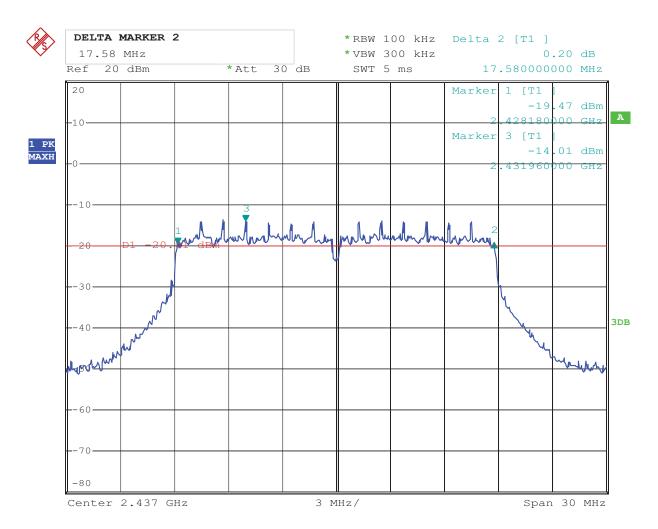


Date: 24.SEP.2013 10:38:37

Report No: 1309102-02 Page 49 of 85

Date: 2013-10-10



### 3. 802.11n at HT20 of CH11

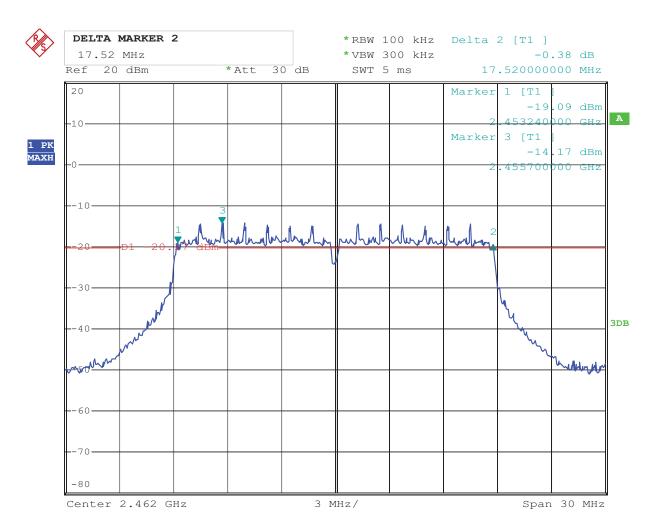

Date: 24.SEP.2013 10:37:41

Report No: 1309102-02


Date: 2013-10-10



Page 50 of 85

## 8. Maximum Peak Output Power

# 8.1 Test Setup



## 8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Page 51 of 85

Report No: 1309102-02

Date: 2013-10-10



#### **8.4Test Results**

EUT		Torn Tab	Model Model			T3157		
Mode	802.11b		Input Voltage		ge	AC 120V		
Temperat	ure	24 deg. C	· ,	Humidity	ty		56% RH	
Channel	Cha	annel Frequency (MHz)			]	Peak Power Limit (dBm)	Pass/ Fail	
1		2412		8.62		30	Pass	
6		2437		8.55		30	Pass	
11		2462		8.09		30	Pass	

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Torn Tab		Model		T3157		
Mode		802.11g		Input Voltage		AC 120V		
Temperati	ure	24 deg. C,		Humidity	56% RH			
Chamal	Cha	annel Frequenc	y	Peak Power Output	Peak Power Limit	Pass/ Fail		
Channel		(MHz)		(dBm)	(dBm)			
1		2412		5.52	30	Pass		
6		2437		2437 5.53		5.53	30	Pass
11		2462		2462 5.05		30	Pass	

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:
  - Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded

Report No: 1309102-02 Page 52 of 85

Date: 2013-10-10



EUT		Torn Tab		Model		T3157		
Mode		802.11n (HT20) Input Voltag		Input Voltage		AC 120V		
Temperati	ure	24 deg. C,		Humidity		56% RH		
Channel	Cha	annel Frequency (MHz)			Peak Power Limit (dBm)	Pass/ Fail		
1		2412	2412		30	Pass		
6		2437		5.65	30	Pass		
11		2462		5.14	30	Pass		

Note: 1. At finial test to get the worst-case emission at 11n HT20 65Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:

  Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded


Report No: 1309102-02 Page 53 of 85

Date: 2013-10-10



# 9. Power Spectral Density Measurement

## 9.1 Test Setup



## 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8$  dBm.

Report No: 1309102-02 Page 54 of 85

Date: 2013-10-10



### 9.4Test Result

EUT	T Torn Tab		o Model			T3157	
Mode	Mode 802.11b 11Mbps		bps	Input Voltage	e	AC 120V	
Temperate	ure	24 deg. C	,	Humidity		56% RH	
Channel	nel			RF Power	Maximum Limit (dBm)	Pass/ Fail	
				11Mbps			
1		2412 -		-14.83	8	Pass	
6		2437		-14.60	8	Pass	
11		2462		-15.62	8	Pass	

EUT	UT Torn Tab		Model			T3157	
Mode	Mode 802.11b 1Mbps		pps Input Voltage		e	AC 120V	
Temperati	ure	24 deg. C	,	Humidity		56% RH	
Channel	Channel Frequency (MHz)			Final RF Power Level (dBm)		Pass/ Fail	
				1Mbps			
1		2412		-16.13	8	Pass	
6		2437		-16.51	8	Pass	
11		2462		-17.57	8	Pass	

Report No: 1309102-02 Page 55 of 85

Date: 2013-10-10



EUT		Torn Tab Model			T3157	
Mode		802.11g	Input Voltage		AC 120V	
Temperature	;	24 deg. C,	Humidity		56% RH	
Channel	Ch	annel Frequency (MHz)	Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail	
			54Mbps			
1		2412	-24.71	8	Pass	
6		2437	-24.26	8	Pass	
11		2462	-23.52	8	Pass	

EUT	Torn Tab		Model		T3157		
Mode	Mode 802.11n HT20		Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel	Ch	annel Frequency (MHz)	Final RF Power Level (dBm)		(dBm)	Pass/ Fail	
			HT20 65Mt	ops			
1		2412	-23.54		8	Pass	
6		2437	-22.64	-22.64		Pass	
11		2462	-23.34		8	Pass	

Page 56 of 85


Report No: 1309102-02

Date: 2013-10-10



## 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

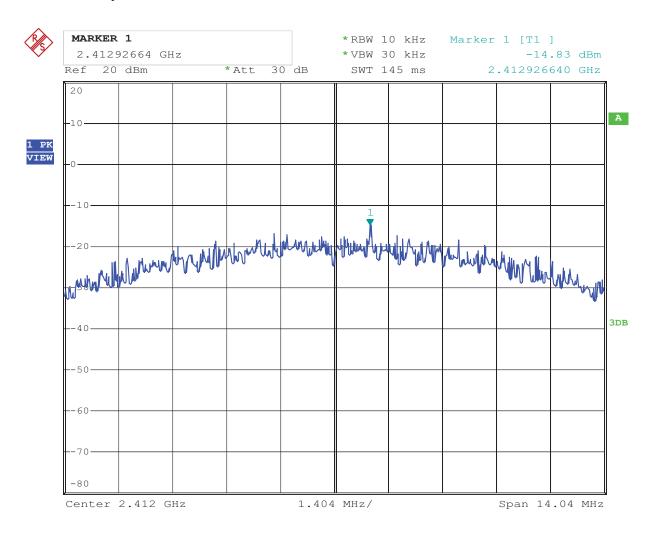


Date: 24.SEP.2013 11:01:15

Report No: 1309102-02 Page 57 of 85

Date: 2013-10-10



## 2. 802.11b at 11Mbps at CH06

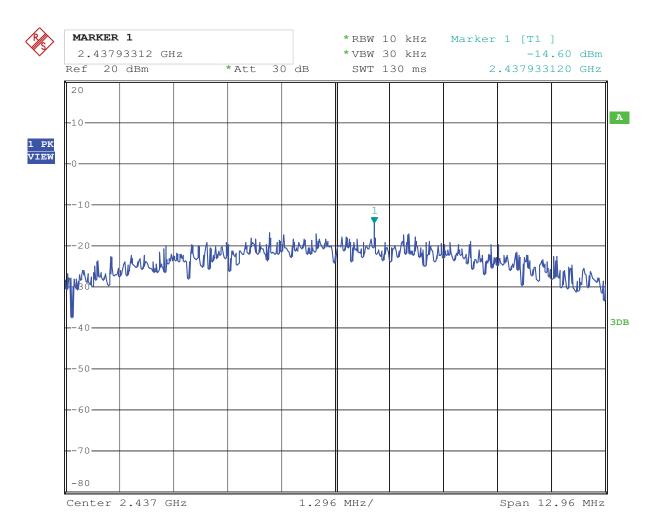

Date: 24.SEP.2013 11:00:05


Page 58 of 85

Report No: 1309102-02

Date: 2013-10-10



## 3. 802.11b at 11Mbps of CH11

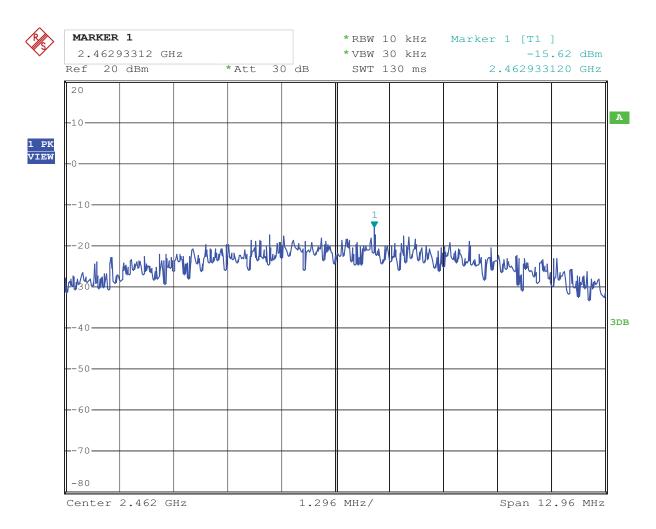

Date: 24.SEP.2013 10:59:41


Page 59 of 85

Report No: 1309102-02

Date: 2013-10-10



## 4. 802.11b at 1Mbps of CH1

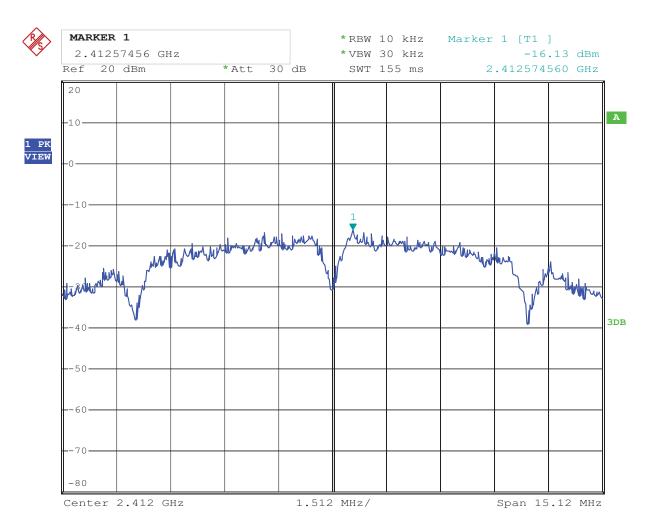

Date: 24.SEP.2013 11:06:00


Page 60 of 85

Report No: 1309102-02

Date: 2013-10-10



## 5. 802.11b at 1Mbps of CH6

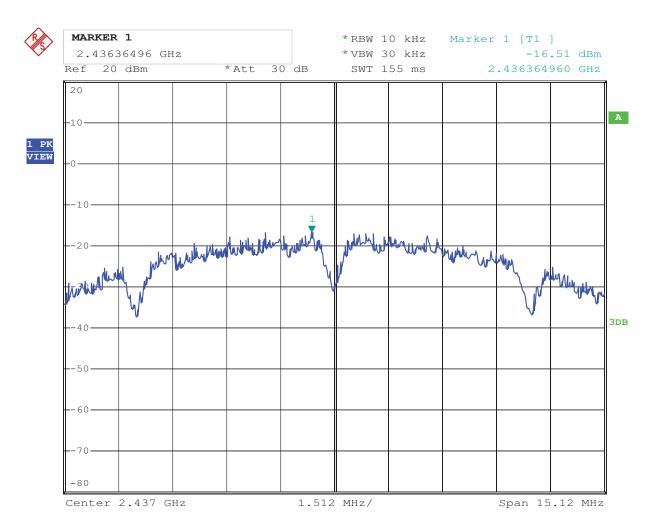

Date: 24.SEP.2013 11:05:20


Page 61 of 85

Report No: 1309102-02

Date: 2013-10-10



## 6. 802.11b at 1Mbps of CH11

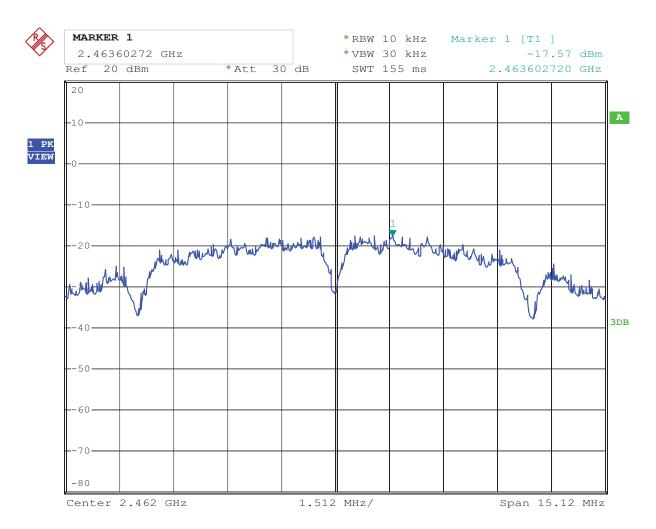

Date: 24.SEP.2013 11:04:52


Page 62 of 85

Report No: 1309102-02

Date: 2013-10-10



## 7. 802.11g at 54Mbps of CH1

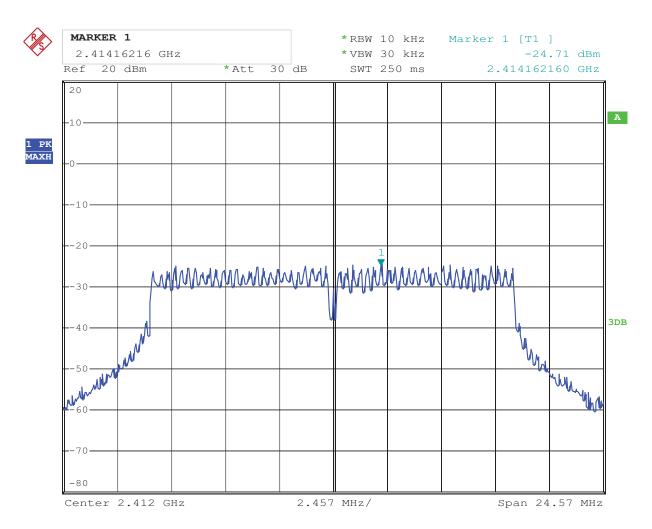

Date: 24.SEP.2013 11:01:55


Page 63 of 85

Report No: 1309102-02

Date: 2013-10-10



## 8. 802.11g at 54 Mbps of CH6

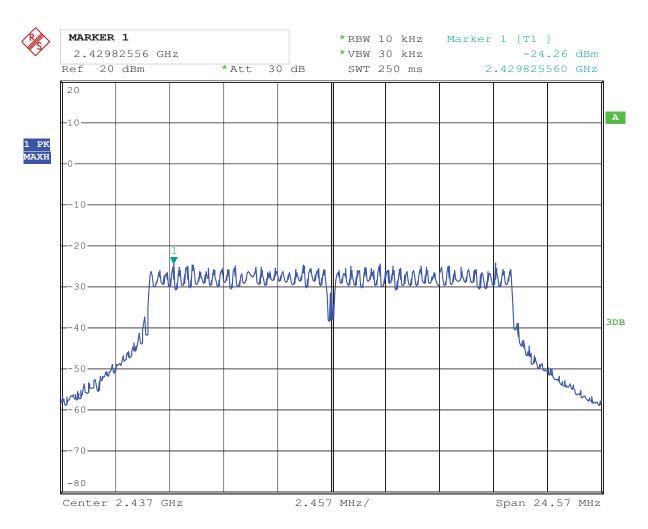

Date: 24.SEP.2013 11:02:34


Page 64 of 85

Report No: 1309102-02

Date: 2013-10-10



## 9. 802.11g at 54Mbps of CH11

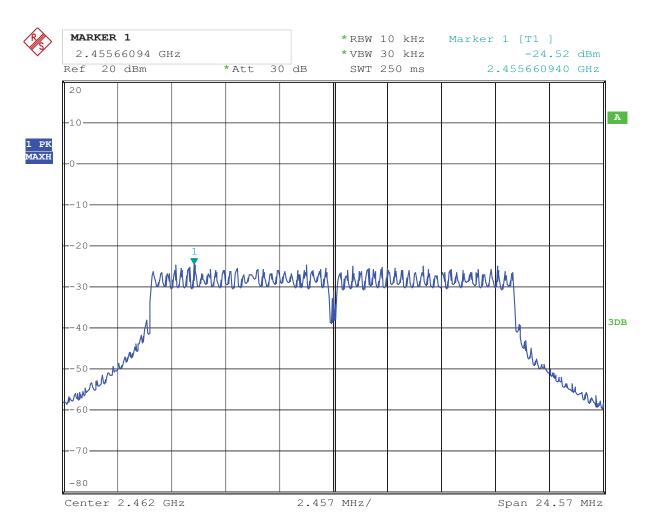

Date: 24.SEP.2013 11:03:37


Page 65 of 85

Report No: 1309102-02

Date: 2013-10-10



#### 10. 802.11n at HT20 of CH01

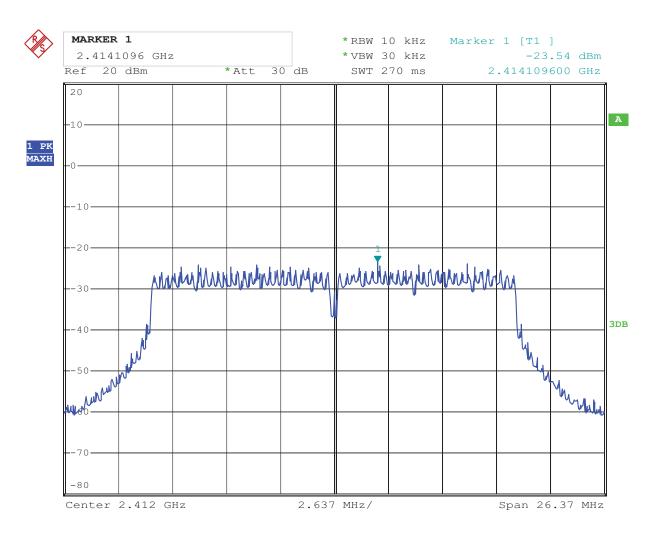

Date: 24.SEP.2013 10:56:19


Page 66 of 85

Report No: 1309102-02

Date: 2013-10-10



#### 11. 802.11n at HT20 of CH06

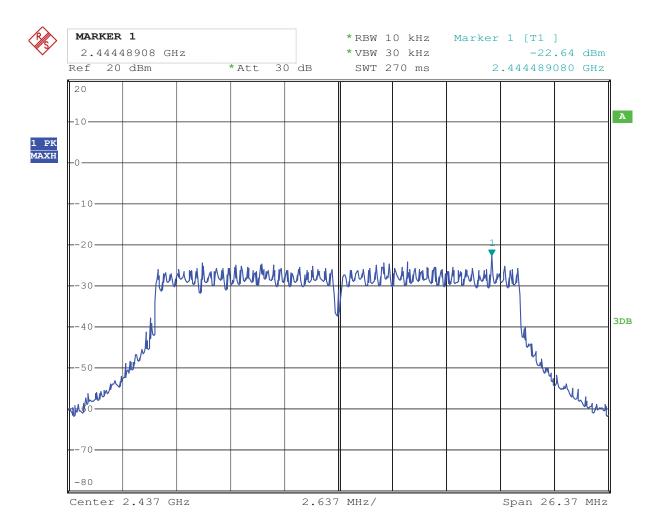

Date: 24.SEP.2013 10:57:08


Page 67 of 85

Report No: 1309102-02

Date: 2013-10-10



#### 12. 802.11n at HT20 of CH11

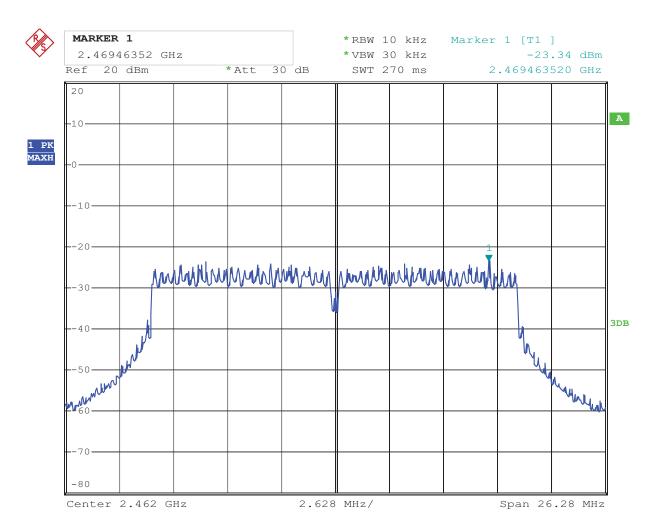

Date: 24.SEP.2013 10:58:28


Report No: 1309102-02 Page 68 of 85

Date: 2013-10-10



# **10 Out of Band Measurement**

# 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.( Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

## 10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No: 1309102-02

Date: 2013-10-10




## For 802.11b mode

## CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Т	orn Tab	Model	T3157				
Mode	Keeping	g Transmitting	Input Voltage	AC 120V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:	Pass		Detector	PK				
2400	PK (dBμV/m)	50.52	T ::4	$74(dB\mu V/m)$				
2400	AV (dBμV/m)		Limit	$54(dB\mu V/m)$				
2390	PK (dBμV/m)	37.83	Limit	74(dBμV/m)				
2390	AV (dBμV/m)		Limit	54(dBμV/m)				

### **Test Figure:**

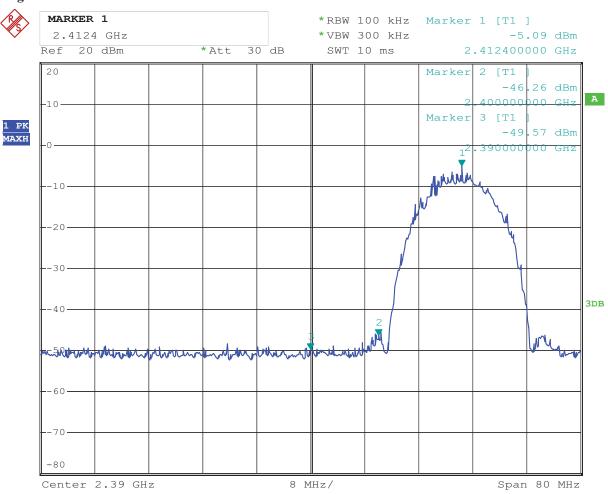

Date: 24.SEP.2013 10:49:29

Page 70 of 85

Report No: 1309102-02

Date: 2013-10-10




### CH11 at 11Mbps

#### **10.4** Band-edge and Restricted band Measurement

EUT	Т	orn Tab	Model	T3157
Mode	Keeping	g Transmitting	Input Voltage	AC 120V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
2492.5	PK (dBμV/m)	43.20	T,	$74(dB\mu V/m)$
2483.5	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

## **Test Figure:**

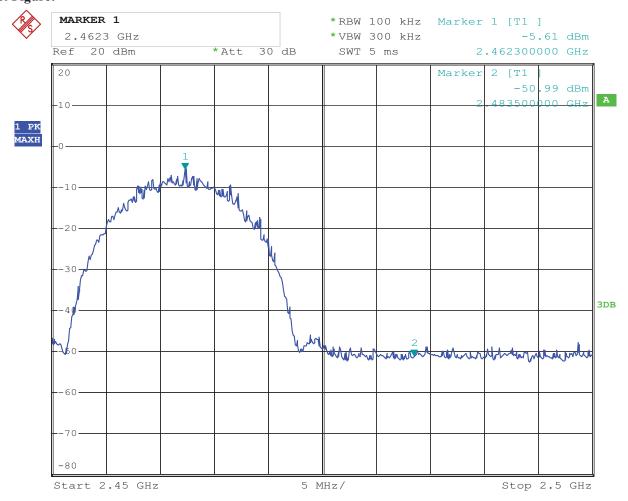

Date: 24.SEP.2013 10:46:47

Report No: 1309102-02

Date: 2013-10-10




### For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Т	orn Tab	Model	T3157				
Mode	Keeping	g Transmitting	Input Voltage	AC 120V				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
2400	PK (dBµV/m)	48.20	T ::4	$74(dB\mu V/m)$				
2400	AV (dBμV/m)		Limit	54(dBμV/m)				
2390	PK (dBμV/m)	36.74	Limit	74(dBμV/m)				
2390	AV (dBμV/m)		Limit	54(dBμV/m)				

### **Test Figure:**

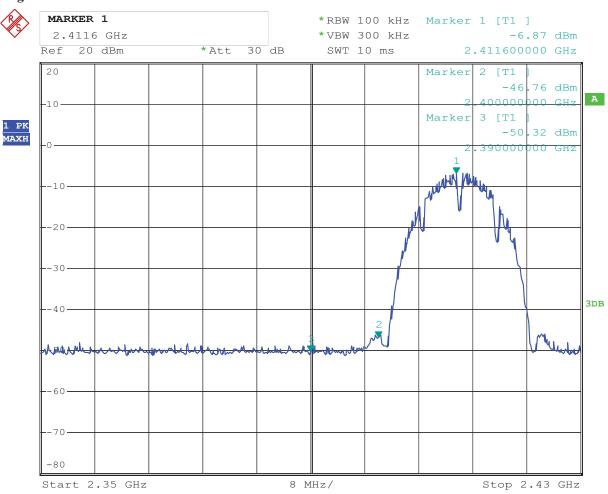

Date: 24.SEP.2013 10:47:56

Page 72 of 85

Report No: 1309102-02

Date: 2013-10-10




### CH11 at 1Mbps

#### **10.4** Band-edge and Restricted band Measurement

EUT	Torn Tab		Model	T3157
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	43.41	Limit	74(dBμV/m)
	AV (dBμV/m)			54(dBμV/m)

## **Test Figure:**

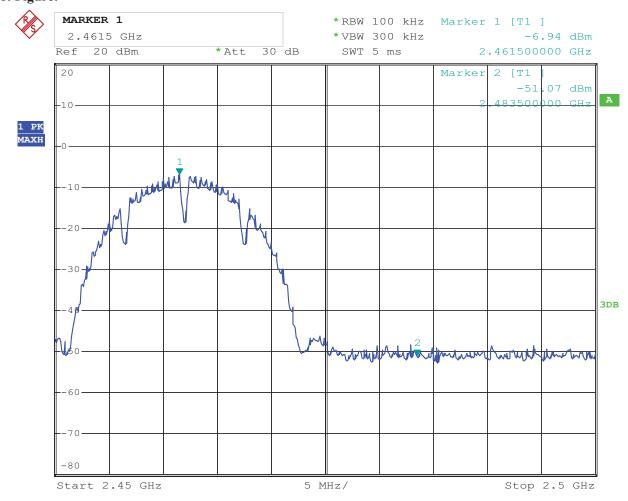

Date: 24.SEP.2013 10:45:38

Page 73 of 85

Report No: 1309102-02

Date: 2013-10-10




## For 802.11g mode

### CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Torn Tab		Model	T3157
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBμV/m)	46.10	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)			54(dBμV/m)
2390	PK (dBμV/m)	36.72	Limit	74(dBμV/m)
	AV (dBμV/m)			54(dBμV/m)

### **Test Figure:**

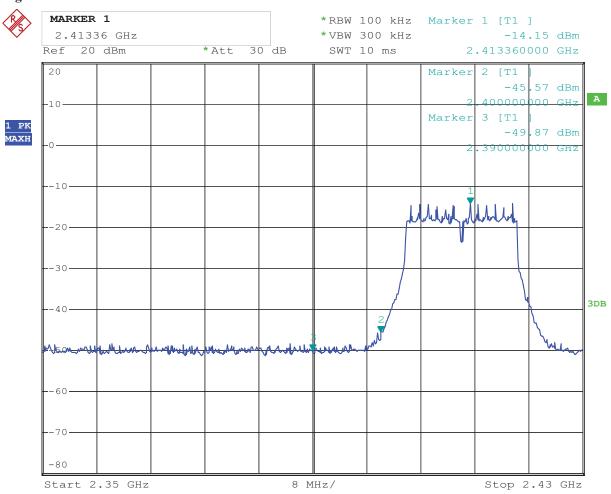

Date: 24.SEP.2013 10:48:56

Page 74 of 85

Report No: 1309102-02

Date: 2013-10-10




# CH11 at 54Mbps

### **10.4** Band-edge and Restricted band Measurement

EUT	Torn Tab		Model	T3157
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	43.26	Limit	74(dBμV/m)
	AV (dBμV/m)			54(dBµV/m)

### **Test Figure:**

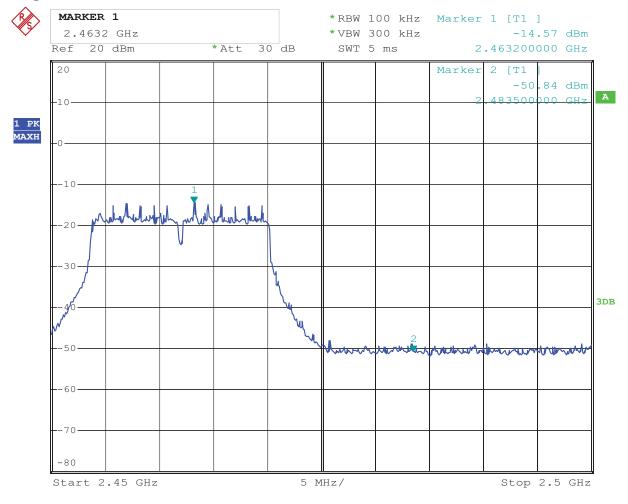

Date: 24.SEP.2013 10:46:21

Page 75 of 85

Report No: 1309102-02

Date: 2013-10-10




### For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

1001 Build 4050 and 1400 and 11000 a					
EUT	Torn Tab		Model	T3157	
Mode	Keeping Transmitting		Input Voltage	AC 120V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
2400	PK (dBμV/m)	45.50	Limit	$74(dB\mu V/m)$	
	AV (dBμV/m)			54(dBμV/m)	
2390	PK (dBμV/m)	36.82	Limit	74(dBμV/m)	
	AV (dBμV/m)			54(dBμV/m)	

### **Test Figure:**

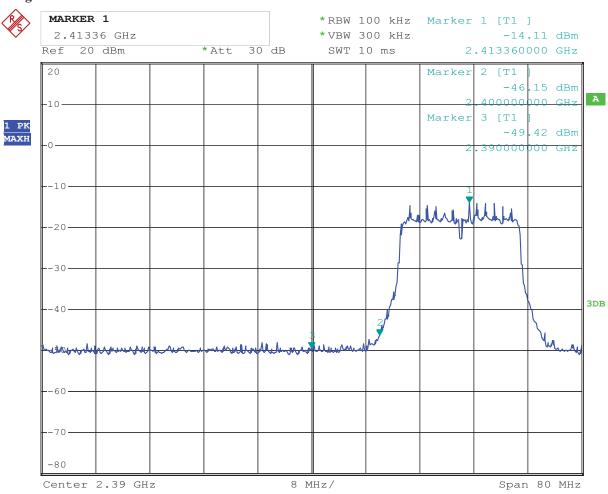

Date: 24.SEP.2013 10:50:33

Page 76 of 85

Report No: 1309102-02

Date: 2013-10-10




### CH11 at 65Mbps

### **10.4** Band-edge and Restricted band Measurement

EUT	Torn Tab		Model	T3157
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	42.73	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)			54(dBμV/m)

### **Test Figure:**

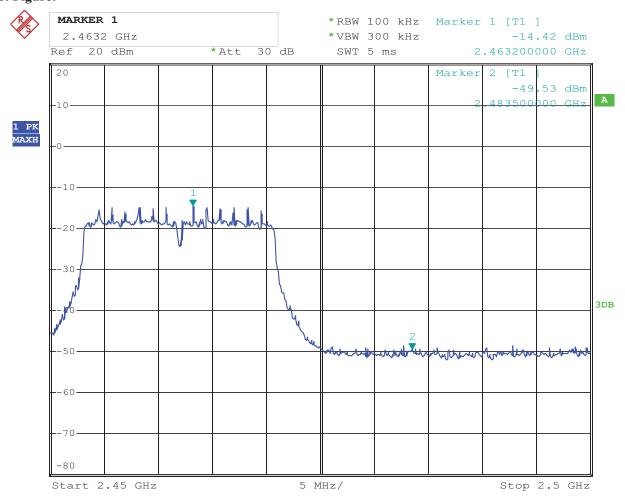

Date: 24.SEP.2013 10:45:05

Report No: 1309102-02

Date: 2013-10-10



Page 77 of 85

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

Integral Antenna used. The maximum Gain of the antennas is 2.0dBi.

Report No: 1309102-02 Page 78 of 85

Date: 2013-10-10




### 12.0 FCC ID Label

**FCC ID: 2AAY2-T3157** 

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

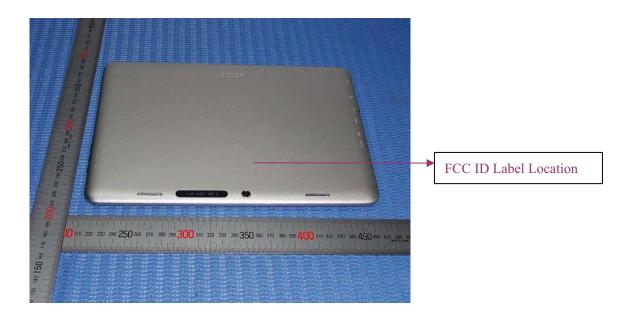

Report No: 1309102-02 Page 79 of 85

Date: 2013-10-10



# 13.0 Photo of testing

Conducted Emission Test Setup:



Page 80 of 85

Report No: 1309102-02

Date: 2013-10-10



# Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 81 of 85

Report No: 1309102-02

Date: 2013-10-10



### Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 82 of 85

Report No: 1309102-02

Date: 2013-10-10



### Photo for the EUT





### Photo for the EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Report No: 1309102-02

Date: 2013-10-10





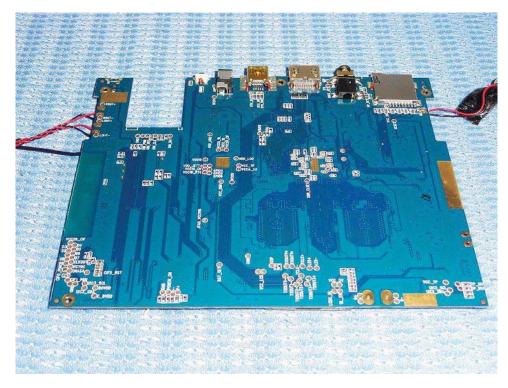

### Photo for the EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309102-02

Date: 2013-10-10



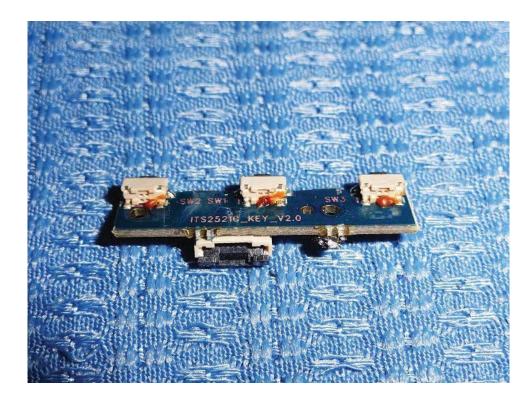

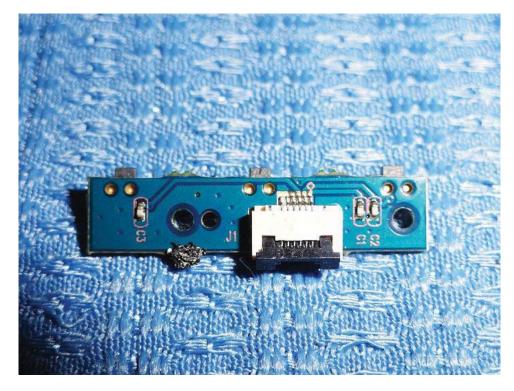

# Photo for the EUT

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1309102-02 Page 85 of 85

Date: 2013-10-10



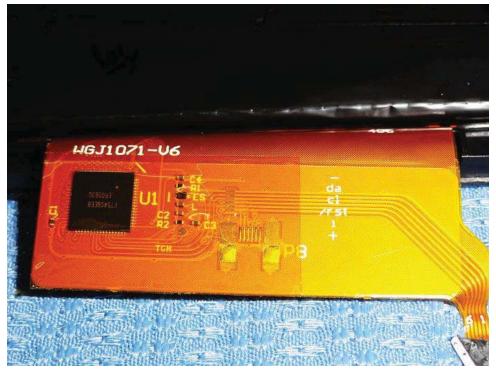

End of the report