

# FCC PART 15.247 TEST REPORT

For

# **NEG TECHNOLOGY CO., LIMITED**

Rm 1406, Block B, Jinsejiari, Jingtian south road, Futian district, Shenzhen, China

FCC ID: 2AAZ8-F1040D

Report Type: Product Type:

Original Report Mobile Phone

**Report Number:** RSZ170531001-00B

**Report Date:** 2017-12-25

Oscar Ye

**Reviewed By:** Engineer

**Prepared By:** Bay Area Compliance Laboratories Corp. (Kunshan)

No.248 Chenghu Road, Kunshan, Jiangsu province,

Oscar. Ye

China

Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S) TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	6
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	
APPLICABLE STANDARD	
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	23
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH	30
APPLICABLE STANDARD	30
Test Procedure	
TEST DATA	30

Test Data 62

Report No.: RSZ170531001-00B

# **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The NEG TECHNOLOGY CO., LIMITED's product, model number: F1040D (FCC ID: 2AAZ8-F1040D) in this report is a Mobile Phone, which was measured approximately: 12.5 cm (L) \* 5.5 cm (W) \*1.5 cm (H), rated with input voltage: DC 3.7V from Li-ion battery or DC 5.0V from adapter.

Report No.: RSZ170531001-00B

Adapter information Model: F1040D

Input: AC 100-240V, 50/60Hz, 0.15A

Output: 5.0V, 500 mA

\* All measurement and test data in this report was gathered from production sample serial number: 1701193 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-05-31.

#### **Objective**

This test report is prepared on behalf of *NEG TECHNOLOGY CO.*, *LIMITED* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

#### **Related Submittal(s)/Grant(s)**

FCC Part 22H & 24E & 27 PCE, FCC Part 15.247 DTS and Part 15B JBP submissions with FCC ID: 2AAZ8-F1040D.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 65

# **Measurement Uncertainty**

	Item	Uncertainty
AC Power Line	s Conducted Emissions	±3.26 dB
RF conducte	d test with spectrum	±0.9dB
RF Output Po	wer with Power meter	±0.5dB
D. Patellandinian	30MHz~1GHz	±5.91dB
Radiated emission	Above 1G	±4.92dB
Occupi	ed Bandwidth	±0.5kHz
Те	mperature	±1.0℃
H	Iumidity	±6%

Report No.: RSZ170531001-00B

# **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China

Bay Area Compliance Laboratories Corp. (Kunshan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L9963). And accredited to ISO/IEC 17025 by A2LA(Lab code: 4323.01), the FCC Designation No. CN1185 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Kunshan) was registered with ISED Canada under ISED Canada Registration Number 3062E.

FCC Part 15.247 Page 5 of 65

# SYSTEM TEST CONFIGURATION

# **Description of Test Configuration**

The system was configured for testing in engineering mode.

#### **EUT Exercise Software**

No exercise software was used

# **Special Accessories**

No special accessory.

# **Equipment Modifications**

No modification was made to the EUT tested.

# **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

Report No.: RSZ170531001-00B


#### **External I/O Cable**

Cable Description	Length (m)	From Port	То
Un-shielding Detachable USB Cable	1.5	EUT	Adapter
Un-shielding Detachable Earphone Cable	1.1	EUT	Earphone

FCC Part 15.247 Page 6 of 65

# **Block Diagram of Test Setup**

For conducted emission

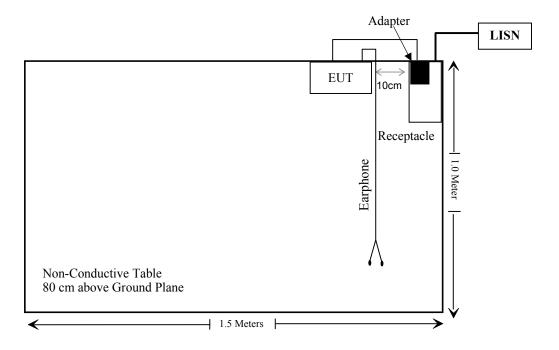

Report No.: RSZ170531001-00B

FCC Part 15.247 Page 7 of 65

# **SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ170531001-00B

FCC Part 15.247 Page 8 of 65

# TEST EQUIPMENT LIST

Manufacturer	Description Model Serial Number			Calibration Date	Calibration Due Date
	AC Li	ne Conducted te	st	•	
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2016-11-25	2017-11-25
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2016-10-10	2017-10-10
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2017-06-19	2018-06-18
MICRO-COAX	Coaxial line	UFB-293B-1- 0480-50X50	97F0173	2016-09-08	2017-09-08
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
	R	adiation test			
Sonoma Instrunent	Pre-Amplifier	330	171377	2017-12-12	2018-12-11
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-25	2018-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42- 00101800	2001270	2017-09-08	2018-09-08
EMCO	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2017-11-25	2018-11-25
ETS	Horn Antenna	3115	6229	2016-12-12	2019-12-12
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2017-12-12	2018-12-12
haojintech	Coaxial Cable	Cable-2	002	2017-12-12	2018-12-12
haojintech	Coaxial Cable	Cable-3	003	2017-12-12	2018-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2017-12-12	2018-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2017-12-12	2018-12-12
	RF	Conducted test			
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS- EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2016-12-15	2017-12-15
WEINSCHEL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
WEINSCHEL	3dB Attenuator	5326	N/A	2017-06-18	2018-06-18
Agilent	Power Meter	N1912A	MY5000492	2016-11-17	2017-11-16
Agilent	Power Sensor	N1921A	MY54210024	2016-11-17	2017-11-16
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-21

Report No.: RSZ170531001-00B

FCC Part 15.247 Page 9 of 65

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

# FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

# **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ170531001-00B

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### For worst case:

Frequency		ducted Tune-up wer	Calculated Distance	Calculated	Threshold	SAR Test
(MHz)	Power (dBm)	Power (mW)	(mm)	value	(1-g SAR)	Exclusion
2480	4.0	2.51	5	0.79	3.0	Yes

**Result: No SAR test is required** 

FCC Part 15.247 Page 10 of 65

# FCC §15.203 – ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ170531001-00B

#### **Antenna Connector Construction**

The EUT has one internal antenna arrangement for bluetooth which was permanently attached and the antenna gain is 0.85 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC Part 15.247 Page 11 of 65

# FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC §15.207(a)

#### **EUT Setup**



Report No.: RSZ170531001-00B

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 12 of 65

#### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Report No.: RSZ170531001-00B

Margin = Limit – Corrected Amplitude

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 ℃		
Relative Humidity:	55 %		
ATM Pressure:	101.0 kPa		

The testing was performed by Layne Li on 2017-06-27.

FCC Part 15.247 Page 13 of 65

EUT operation mode: Transmitting

# AC 120V/60 Hz, Line:

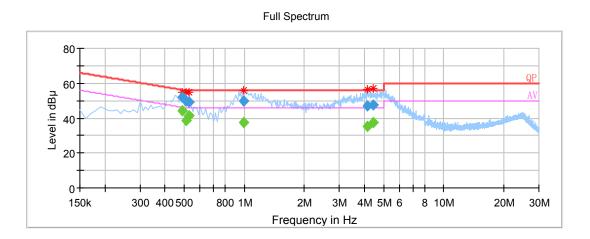

Report No.: RSZ170531001-00B


Frequency (MHz)	QuasiPeak (dBµV)	Average (dB \mu V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.490000		44.20	9.000	L1	10.0	1.97	46.17	Compliance
0.490000	52.04		9.000	L1	10.0	4.13	56.17	Compliance
0.510000		38.39	9.000	L1	9.5	7.61	46.00	Compliance
0.510000	49.77		9.000	L1	9.5	6.23	56.00	Compliance
0.530000		41.46	9.000	L1	9.7	4.54	46.00	Compliance
0.530000	49.50		9.000	L1	9.7	6.50	56.00	Compliance
0.990000		37.47	9.000	L1	10.1	8.53	46.00	Compliance
0.990000	49.73		9.000	L1	10.1	6.27	56.00	Compliance
4.120000		35.30	9.000	L1	9.9	10.70	46.00	Compliance
4.120000	46.91		9.000	L1	9.9	9.09	56.00	Compliance
4.430000		37.57	9.000	L1	10.2	8.43	46.00	Compliance
4.430000	47.75		9.000	L1	10.2	8.25	56.00	Compliance

FCC Part 15.247 Page 14 of 65

# AC 120V/60 Hz, Neutral



Report No.: RSZ170531001-00B

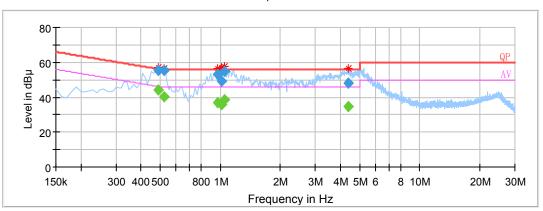

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB \mu V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.490000		44.09	9.000	N	9.000	N	10.0	Compliance
0.490000	55.66		9.000	N	9.000	N	10.0	Compliance
0.520000		40.31	9.000	N	9.000	N	9.9	Compliance
0.520000	55.17		9.000	N	9.000	N	9.9	Compliance
0.970000		37.09	9.000	N	9.000	N	9.8	Compliance
0.970000	53.15		9.000	N	9.000	N	9.8	Compliance
1.020000		35.91	9.000	N	9.000	N	10.1	Compliance
1.020000	49.46		9.000	N	9.000	N	10.1	Compliance
1.050000		38.50	9.000	N	9.000	N	10.3	Compliance
1.050000	54.55		9.000	N	9.000	N	10.3	Compliance
4.400000		34.53	9.000	N	9.000	N	10.2	Compliance
4.400000	48.19		9.000	N	9.000	N	10.2	Compliance

#### Note:

- Corrected Amplitude = Reading + Correction Factor
   Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 15 of 65

# FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

# **Applicable Standard**

FCC §15.205; §15.209; §15.247(d)


#### **EUT Setup**

#### **Below 1 GHz:**



Report No.: RSZ170531001-00B

#### **Above 1GHz:**

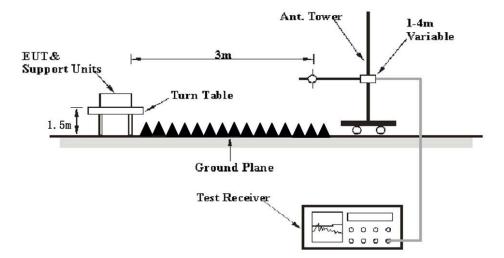

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI ANSI C63.10-2013. The specification used was the FCC 15.209, 205 and FCC 15.247 limits.

FCC Part 15.247 Page 16 of 65

# **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
Above I GHZ	1 MHz	10 Hz	/	Ave.

Report No.: RSZ170531001-00B

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C</u>, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \le L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than +  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

FCC Part 15.247 Page 17 of 65

# **Test Data**


#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2017-12-25. EUT operation mode: Transmitting(Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR(GFSK))

Report No.: RSZ170531001-00B

**30 MHz~1 GHz:** (the worst case is BDR(GFSK), Middle channel)

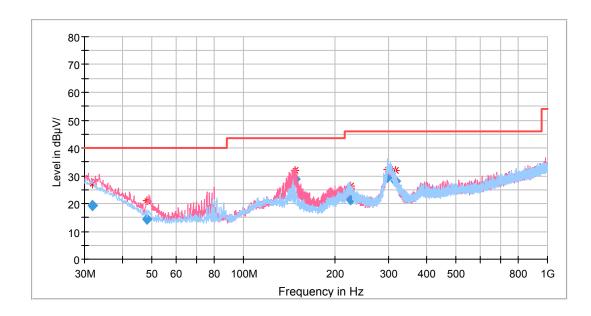


Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
31.840455	19.16	199.0	V	347.0	-5.6	40.00	20.84
48.272160	14.29	101.0	V	259.0	-16.8	40.00	25.71
147.337080	28.72	101.0	V	185.0	-12.7	43.50	14.78
224.977550	21.38	101.0	V	171.0	-12.7	46.00	24.62
297.537510	29.39	101.0	Н	310.0	-11.1	46.00	16.61

FCC Part 15.247 Page 18 of 65

**1 GHz - 18 GHz:** (Low channel:2402 MHz)



Report No.: RSZ170531001-00B

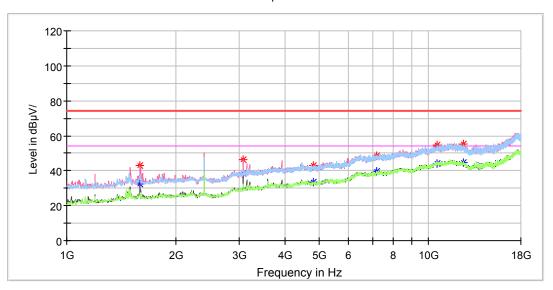

Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	$\begin{array}{c} \text{MaxPeak} \\ (dB\mu V/m) \end{array}$	Average (dBμV/m)	Height (cm)	Polar (H / V)	Degree	Factor (dB)	(dBuV)	(dB)
1591.600000		32.14	150.0	V	178.0	-7.6	54.00	21.86
1591.600000	43.07		200.0	V	165.0	-7.6	74.00	30.93
2382.950000		36.66	90.0	Н	90.0	-6.2	54.00	17.34
2382.950000	53.67		90.0	Н	90.0	-6.2	74.00	20.33
3070.600000		38.42	200.0	V	201.0	-1.9	54.00	15.58
3070.600000	46.28		200.0	V	201.0	-1.9	74.00	27.72
4808.000000		33.56	150.0	V	106.0	2.5	54.00	20.44
4808.000000	42.74		150.0	V	106.0	2.5	74.00	31.26
7205.000000		39.61	150.0	V	9.0	9.8	54.00	14.39
7205.000000	48.49		150.0	V	9.0	9.8	74.00	25.51
10543.800000		43.98	200.0	V	358.0	17.0	54.00	10.02
10543.800000	54.52		200.0	Н	51.0	17.0	74.00	19.48
12478.400000		44.48	150.0	V	0.0	17.2	54.00	9.52
12478.400000	55.24		150.0	V	0.0	17.2	74.00	18.76

#### Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude
The other spurious emission which is 20dB to the limit was not recorded.


And for the pre-scan is performed with the 2400-2483.5MHz band filter.

FCC Part 15.247 Page 19 of 65

1 GHz - 18 GHz: (Middle channel: 2441 MHz)

#### Full Spectrum

Report No.: RSZ170531001-00B

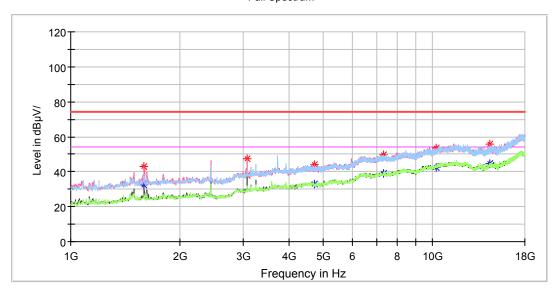

Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB)	(dBuV)	(dB)
1591.600000		32.17	150.0	V	158.0	-7.6	54.00	21.83
1591.600000	42.83		150.0	V	158.0	-7.6	74.00	31.17
3070.600000	47.49		200.0	V	202.0	-1.9	74.00	26.51
3074.000000	38.08		150.0	Н	355.0	-1.9	74.00	35.92
4886.200000	44.07		200.0	V	358.0	2.3	74.00	29.93
4886.200000		32.86	200.0	V	358.0	2.3	54.00	21.14
7344.400000		39.18	150.0	V	140.0	10.0	54.00	14.82
7344.400000	49.55		200.0	V	309.0	10.0	74.00	24.45
10231.000000		42.48	200.0	V	220.0	15.9	54.00	11.52
10231.000000	53.67		200.0	V	220.0	15.9	74.00	20.33
14372.200000		44.41	150.0	V	123.0	15.4	54.00	9.59
14372.200000	55.89		200.0	V	291.0	15.4	74.00	18.11

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded. And for the pre-scan is performed with the 2400-2483.5MHz band filter.

FCC Part 15.247 Page 20 of 65

1 GHz - 18 GHz: (High channel: 2480 MHz)

#### Full Spectrum

Report No.: RSZ170531001-00B

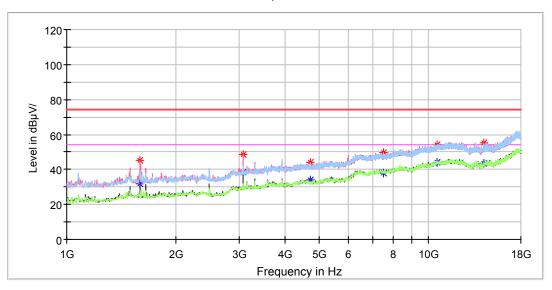

Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB)	(dBuV)	(dB)
1595.000000		31.61	200.0	V	136.0	-7.6	54.00	22.39
1595.000000	45.39		200.0	V	136.0	-7.6	74.00	28.61
2483.840000		35.39	110.0	Н	222.0	-6.0	54.00	18.61
2483.840000	53.16		110.0	Н	222.0	-6.0	74.00	20.84
3070.600000		38.24	200.0	V	200.0	-1.9	54.00	15.76
3070.600000	48.67		200.0	V	200.0	-1.9	74.00	25.33
4961.200000		33.84	150.0	V	230.0	2.3	54.00	20.16
4961.200000	43.95		150.0	V	230.0	2.3	74.00	30.05
7494.000000		38.20	150.0	Н	358.0	10.2	54.00	15.80
7494.000000	49.87		150.0	Н	358.0	10.2	74.00	24.13
10547.200000		44.29	150.0	V	5.0	17.0	54.00	9.71
10547.200000	54.34		200.0	V	307.0	17.0	74.00	19.66
14209.000000		43.43	150.0	V	249.0	15.0	54.00	10.57
14209.000000	55.16		150.0	V	249.0	15.0	74.00	18.84

#### Note:

 $\label{eq:corrected_factor} \begin{aligned} & \text{Corrected Factor} = \text{Antenna factor} \ (RX) + \text{Cable Loss} - \text{Amplifier Factor} \\ & \text{Corrected Amplitude} = \text{Corrected Factor} + \text{Reading} \end{aligned}$ 


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded. And for the pre-scan is performed with the 2400-2483.5MHz band filter.

FCC Part 15.247 Page 21 of 65


### 1 GHz - 18 GHz: Pre-scan with High channel Horizontal

Report No.: RSZ170531001-00B

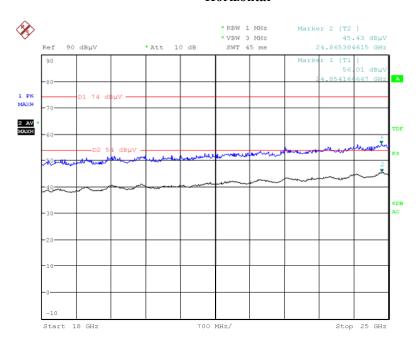

Date: 25.DEC.2017 16:08:06

### Vertical

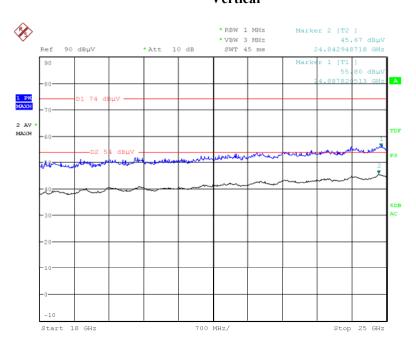

Date: 25.DEC.2017 16:32:58

FCC Part 15.247 Page 22 of 65

# FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

#### **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ170531001-00B

#### **Test Procedure**

- Set the EUT in transmitting mode, maxhold the channel. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-06-11.

FCC Part 15.247 Page 23 of 65 EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
	Low	2402	1.002	0.633	Pass
	Adjacent	2403	1.002	0.033	Pass
BDR	Middle	2441	1.002	0.628	Pass
(GFSK)	Adjacent	2442	1.002	0.028	Pass
	High	2480	1.002	0.620	D
	Adjacent	2479	1.002	0.628	Pass
	Low	2402	1.004	0.838	D
	Adjacent	2403	1.004		Pass
EDR	Middle	2441	1.004	0.842	D
(π/4-DQPSK)	Adjacent	2442	1.004		Pass
	High	2480	0.000	0.842	Pass
	Adjacent	2479	0.998		
	Low	2402	0.000	0.046	Dana
EDR (8DPSK)	Adjacent	2403	0.998	0.846	Pass
	Middle	2441	0.998	0.846	Pass
	Adjacent	2442	0.336	0.040	газз
	High	2480	1.004	0.046	Dogg
	Adjacent	2479	1.004	0.846	Pass


Report No.: RSZ170531001-00B

Note: Limit = 20 dB bandwidth \*2/3


FCC Part 15.247 Page 24 of 65

# BDR (GFSK): Low Channel

Report No.: RSZ170531001-00B

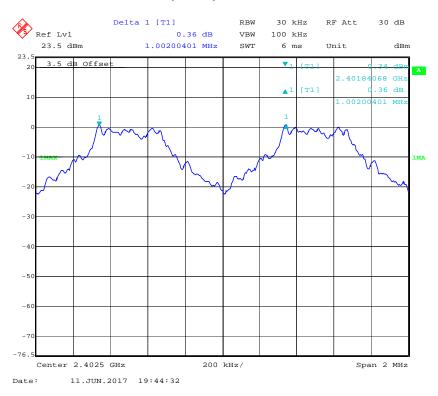


# BDR (GFSK): Middle Channel

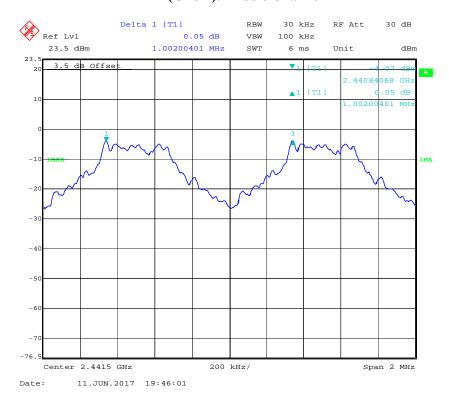


FCC Part 15.247 Page 25 of 65

# BDR (GFSK): High Channel

Report No.: RSZ170531001-00B

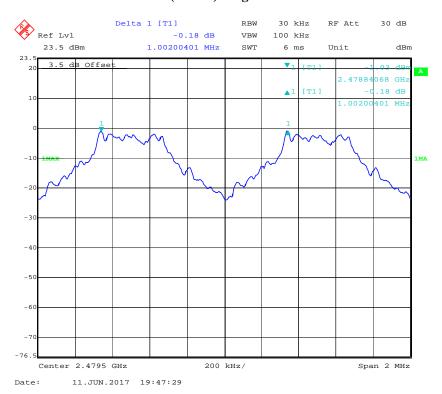

#### EDR ( $\pi/4$ -DQPSK): Low Channel

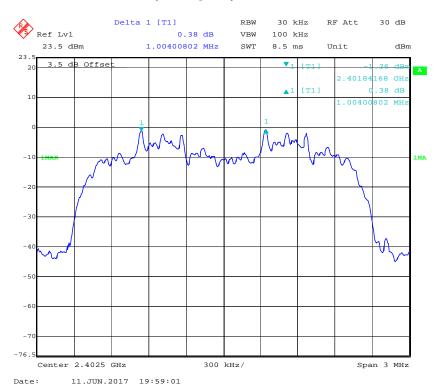


FCC Part 15.247 Page 26 of 65

# EDR ( $\pi$ /4-DQPSK): Middle Channel

Report No.: RSZ170531001-00B



# EDR ( $\pi/4$ -DQPSK): High Channel

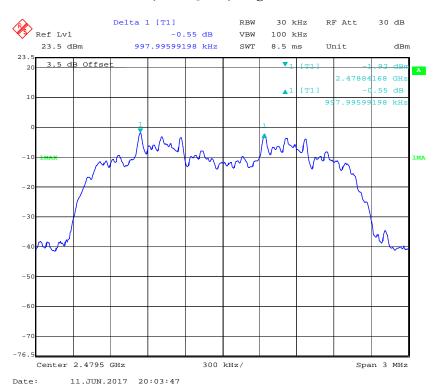


FCC Part 15.247 Page 27 of 65

# EDR (8DPSK): Low Channel

Report No.: RSZ170531001-00B



#### EDR (8DPSK): Middle Channel

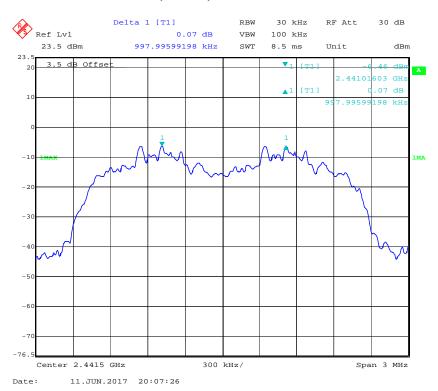

FCC Part 15.247 Page 28 of 65

# EDR (8DPSK): High Channel

Report No.: RSZ170531001-00B



FCC Part 15.247 Page 29 of 65

# FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ170531001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25~24 °C
Relative Humidity:	49~54 %
ATM Pressure:	100.0~103.0 kPa

The testing was performed by Echo Wu on 2017-06-11 and 2017-12-19.

FCC Part 15.247 Page 30 of 65

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
	Low	2402	0.950	0.856
BDR (GFSK)	Middle	2441	0.942	0.849
(GISIL)	High	2480	0.942	0.853
	Low	2402	1.257	1.157
EDR (π/4-DQPSK)	Middle	2441	1.263	1.163
(11/1 2 Q1 212)	High	2480	1.263	1.160
	Low	2402	1.269	1.160
EDR (8DPSK)	Middle	2441	1.269	1.170
	High	2480	1.269	1.163

Report No.: RSZ170531001-00B

# BDR (GFSK):


# 20dB Emission Bandwidth, Low Channel

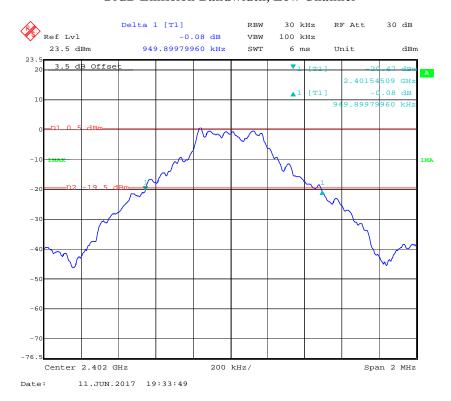


FCC Part 15.247 Page 31 of 65

#### 20dB Emission Bandwidth, Middle Channel

Report No.: RSZ170531001-00B

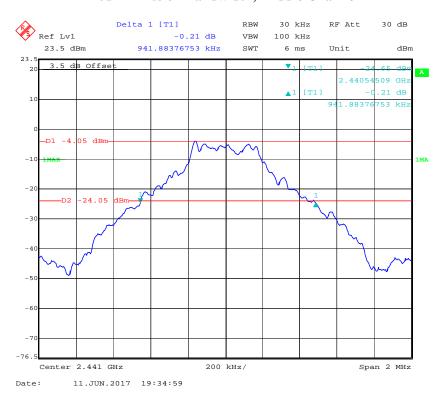

# 20dB Emission Bandwidth, High Channel

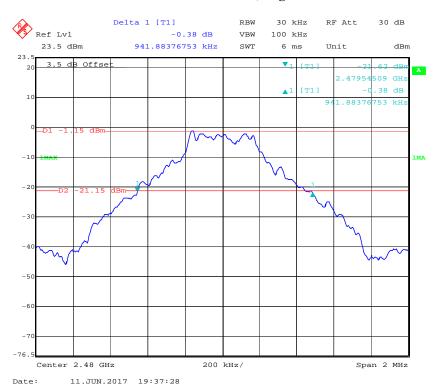

FCC Part 15.247 Page 32 of 65


# EDR ( $\pi/4$ -DQPSK):

# 20dB Emission Bandwidth, Low Channel

Report No.: RSZ170531001-00B




# 20dB Emission Bandwidth, Middle Channel

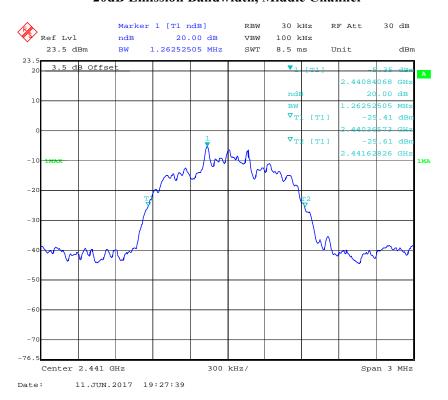

FCC Part 15.247 Page 33 of 65


# 20dB Emission Bandwidth, High Channel

Report No.: RSZ170531001-00B

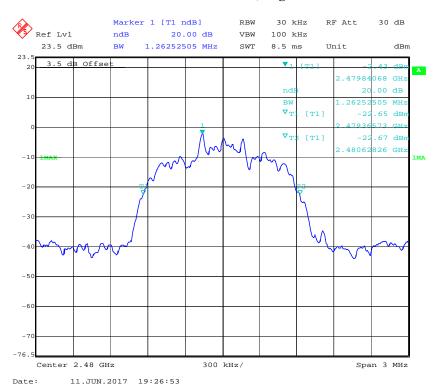

# EDR (8DPSK):


#### 20dB Emission Bandwidth, Low Channel

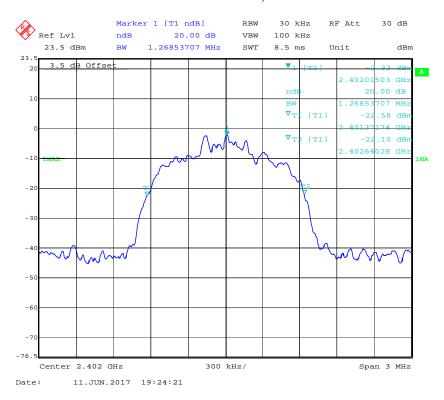


FCC Part 15.247 Page 34 of 65

#### 20dB Emission Bandwidth, Middle Channel

Report No.: RSZ170531001-00B

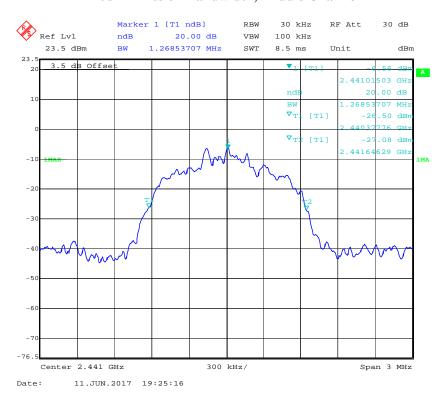

#### 20dB Emission Bandwidth, High Channel

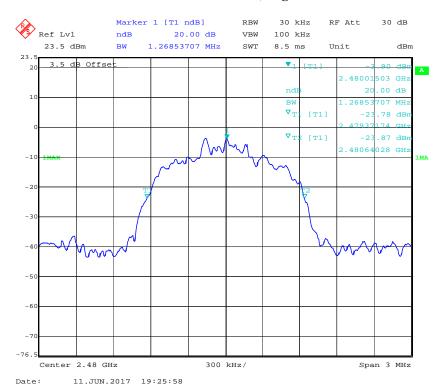


FCC Part 15.247 Page 35 of 65

# BDR (GFSK):


# 99% Occupied Bandwidth, Low Channel

Report No.: RSZ170531001-00B

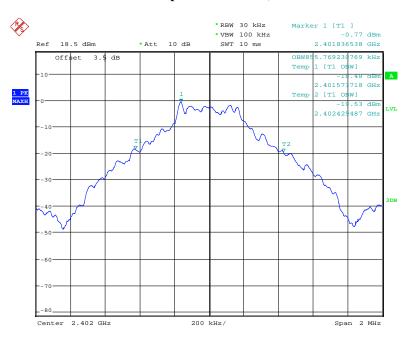

Date: 19.DEC.2017 19:31:14

# 99% Occupied Bandwidth, Middle Channel

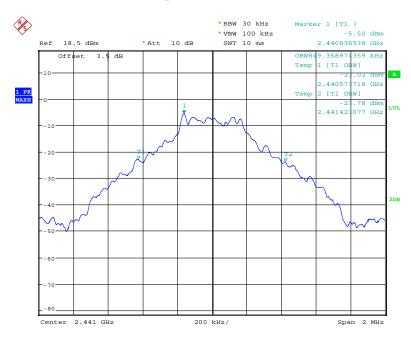


Date: 19.DEC.2017 19:32:23

FCC Part 15.247 Page 36 of 65

## 99% Occupied Bandwidth, High Channel

Report No.: RSZ170531001-00B

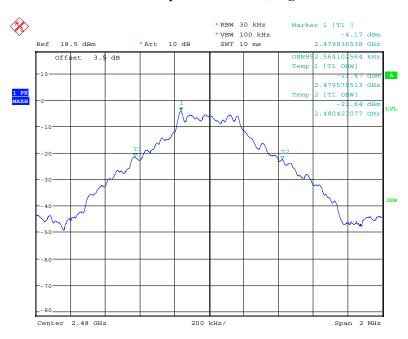

Date: 19.DEC.2017 19:33:06

## EDR ( $\pi/4$ -DQPSK):

## 99% Occupied Bandwidth, Low Channel




Date: 19.DEC.2017 19:30:01

FCC Part 15.247 Page 37 of 65


## 99% Occupied Bandwidth, Middle Channel

Report No.: RSZ170531001-00B

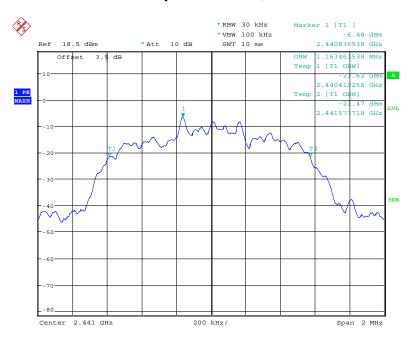

Date: 19.DEC.2017 19:29:03

## 99% Occupied Bandwidth, High Channel

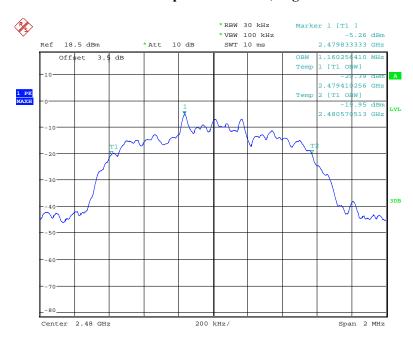


Date: 19.DEC.2017 19:28:27

FCC Part 15.247 Page 38 of 65

## EDR (8DPSK):


# 99% Occupied Bandwidth, Low Channel

Report No.: RSZ170531001-00B

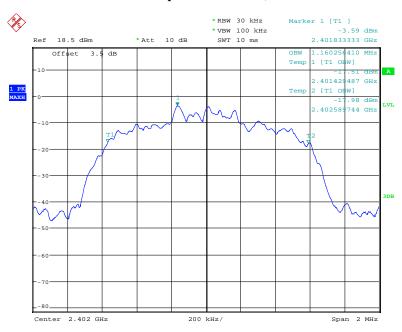

Date: 19.DEC.2017 19:26:00

# 99% Occupied Bandwidth, Middle Channel

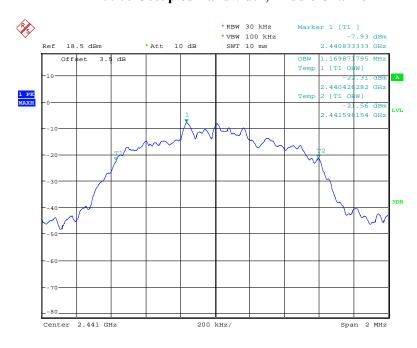


Date: 19.DEC.2017 19:26:58

FCC Part 15.247 Page 39 of 65

# 99% Occupied Bandwidth, High Channel

Report No.: RSZ170531001-00B

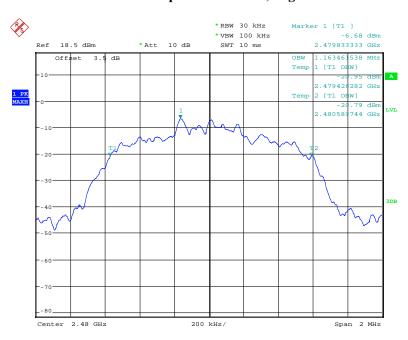

Date: 19.DEC.2017 19:27:37

FCC Part 15.247 Page 40 of 65

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

#### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ170531001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	54 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Echo Wu on 2017-06-11.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 41 of 65

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

Report No.: RSZ170531001-00B


## BDR (GFSK): Number of Hopping Channels

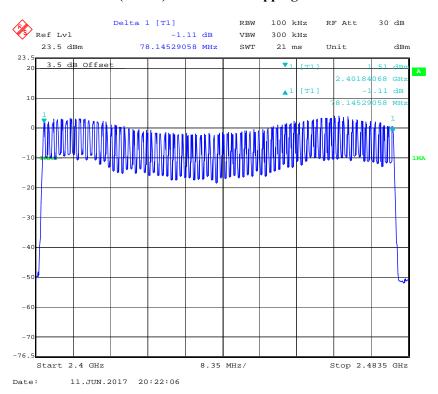


FCC Part 15.247 Page 42 of 65

#### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

Report No.: RSZ170531001-00B

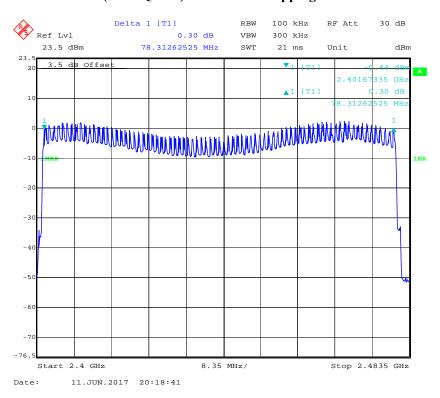

#### EDR (8DPSK): Number of Hopping Channels

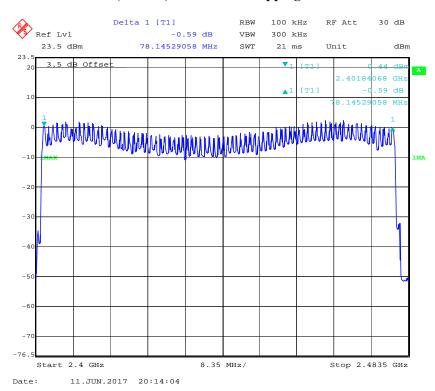

FCC Part 15.247 Page 43 of 65

## FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

#### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ170531001-00B

#### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-06-11.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

FCC Part 15.247 Page 44 of 65


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
		Low	0.381	0.122	0.4	Pass	
	DII 1	Middle	0.381	0.122	0.4	Pass	
	DH 1	High	0.381	0.122	0.4	Pass	
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
		Low	1.665	0.266	0.4	Pass	
BDR	DH 2	Middle	1.665	0.266	0.4	Pass	
(GFSK)	DH 3	High	1.665	0.266	0.4	Pass	
		Note:	DH3:Dwell time = F	Pulse time*(1600/	4/79)*31.6S		
		Low	2.890	0.308	0.4	Pass	
	DH.	Middle	2.890	0.308	0.4	Pass	
	DH 5	High	2.890	0.308	0.4	Pass	
		Note:	DH5:Dwell time = I	Pulse time*(1600/	6/79)*31.6S		
		Low	0.391	0.125	0.4	Pass	
	2DH 1	Middle	0.391	0.125	0.4	Pass	
	2DH 1	High	0.391	0.125	0.4	Pass	
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	2DH 3	Low	1.659	0.265	0.4	Pass	
EDR		Middle	1.659	0.265	0.4	Pass	
$(\pi/4\text{-DQPSK})$		High	1.659	0.265	0.4	Pass	
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	2DH 5	Low	2.890	0.308	0.4	Pass	
		Middle	2.890	0.308	0.4	Pass	
		High	2.890	0.308	0.4	Pass	
		Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
	3DH 1	Low	0.393	0.126	0.4	Pass	
		Middle	0.393	0.126	0.4	Pass	
		High	0.393	0.126	0.4	Pass	
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	3DH 3	Low	1.659	0.265	0.4	Pass	
EDR (8DPSK)		Middle	1.659	0.265	0.4	Pass	
		High	1.659	0.265	0.4	Pass	
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	3DH 5	Low	2.890	0.308	0.4	Pass	
		Middle	2.890	0.308	0.4	Pass	
		High	2.890	0.308	0.4	Pass	
		Note: 3	BDH5:Dwell time =	Pulse time*(1600)	/6/79)*31.6S		

Report No.: RSZ170531001-00B


FCC Part 15.247 Page 45 of 65

# BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RSZ170531001-00B

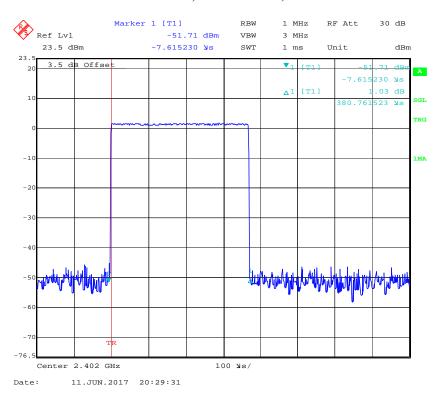


## Pulse time, Middle Channel, DH1

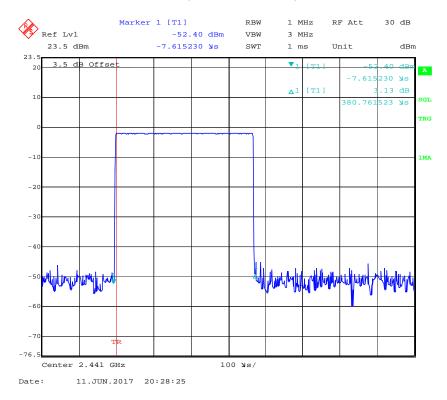


FCC Part 15.247 Page 46 of 65

## Pulse time, High Channel, DH1

Report No.: RSZ170531001-00B

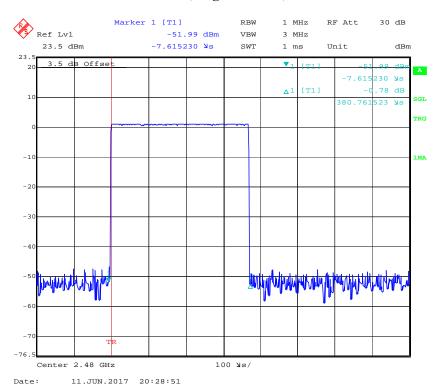


#### Pulse time, Low Channel, DH3

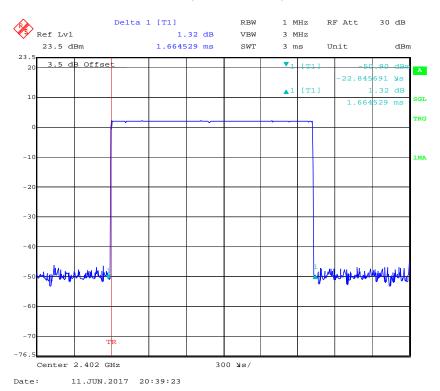


FCC Part 15.247 Page 47 of 65

## Pulse time, Middle Channel, DH3

Report No.: RSZ170531001-00B

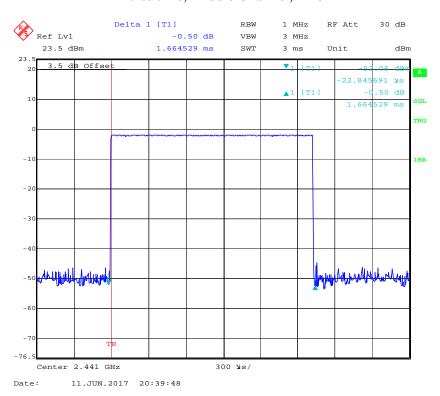


## Pulse time, High Channel, DH3

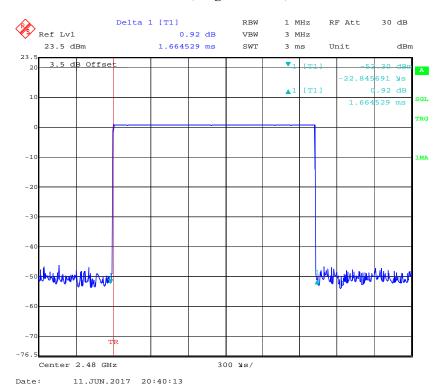


FCC Part 15.247 Page 48 of 65

#### Pulse time, Low Channel, DH5

Report No.: RSZ170531001-00B

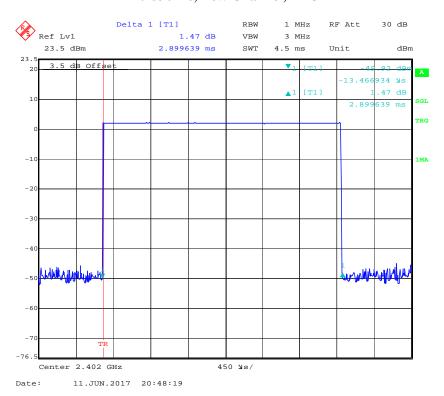


#### Pulse time, Middle Channel, DH5

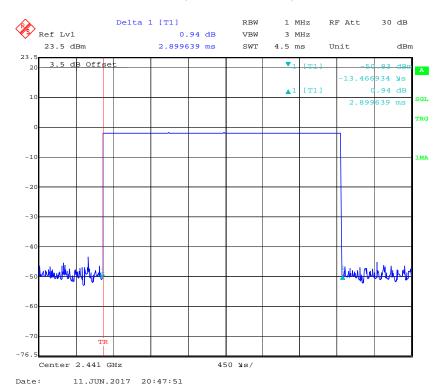


FCC Part 15.247 Page 49 of 65

## Pulse time, High Channel, DH5

Report No.: RSZ170531001-00B

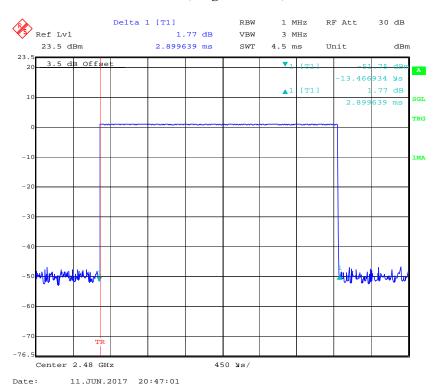


# EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

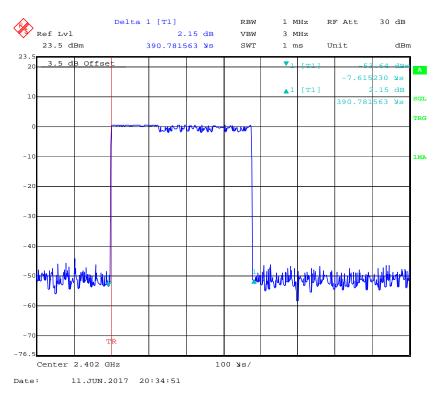


FCC Part 15.247 Page 50 of 65

#### Pulse time, Middle Channel, 2DH1

Report No.: RSZ170531001-00B

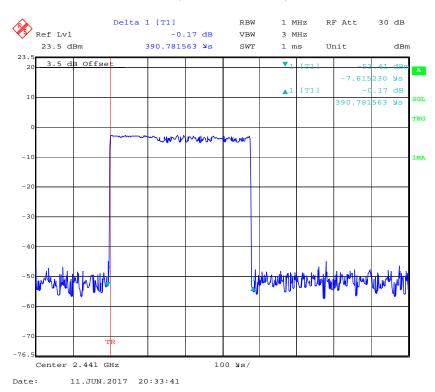


#### Pulse time, High Channel, 2DH1

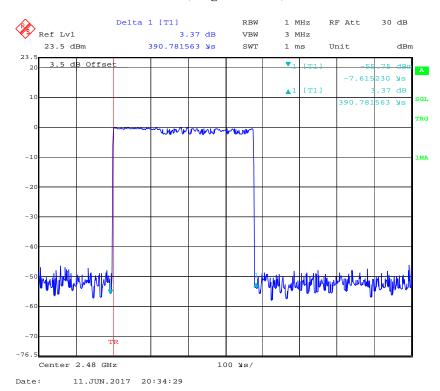


FCC Part 15.247 Page 51 of 65

#### Pulse time, Low Channel, 2DH3

Report No.: RSZ170531001-00B

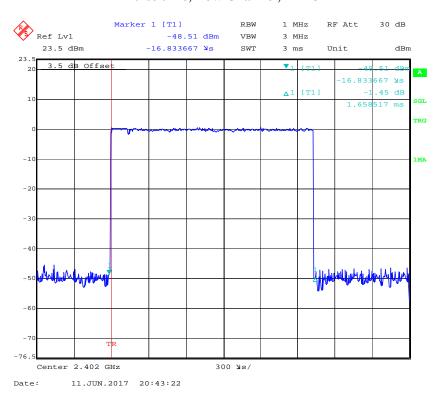


## Pulse time, Middle Channel, 2DH3

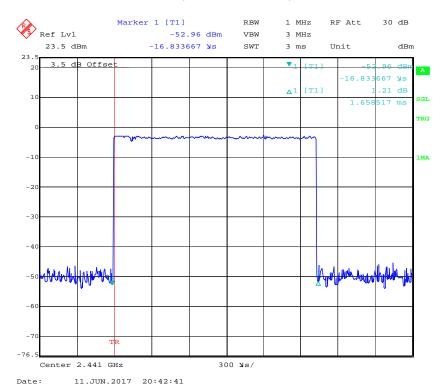


FCC Part 15.247 Page 52 of 65

## Pulse time, High Channel, 2DH3

Report No.: RSZ170531001-00B

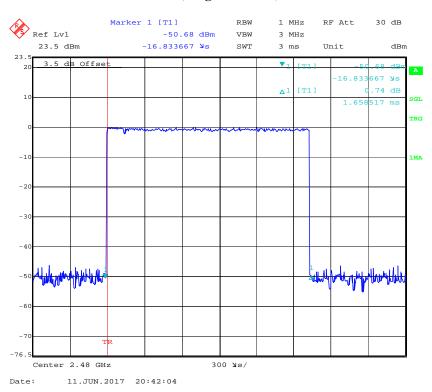


#### Pulse time, Low Channel, 2DH5

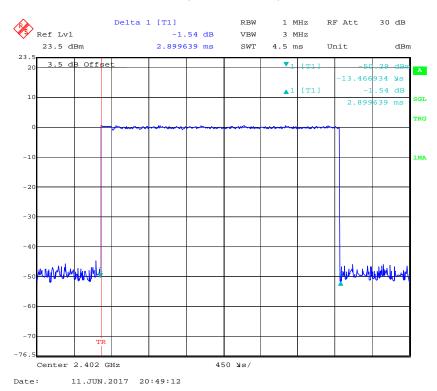


FCC Part 15.247 Page 53 of 65

## Pulse time, Middle Channel, 2DH5

Report No.: RSZ170531001-00B

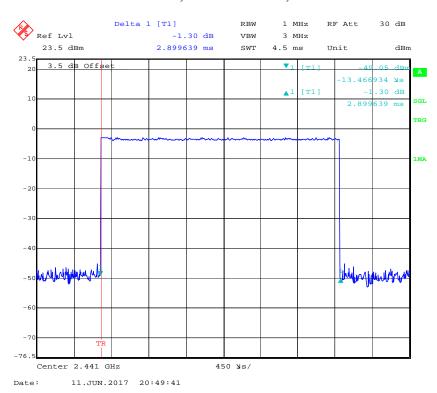


## Pulse time, High Channel, 2DH5

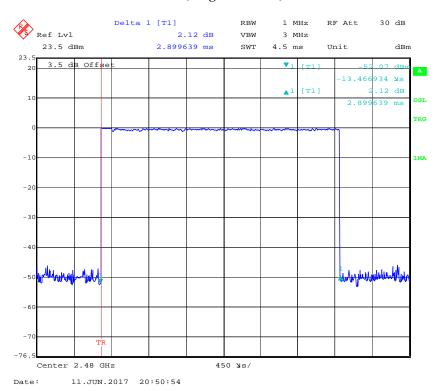


FCC Part 15.247 Page 54 of 65

# EDR (8DPSK): Pulse time, Low Channel, 3DH1

Report No.: RSZ170531001-00B

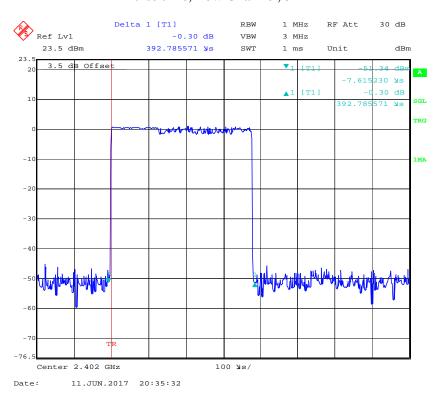


## Pulse time, Middle Channel, 3DH1

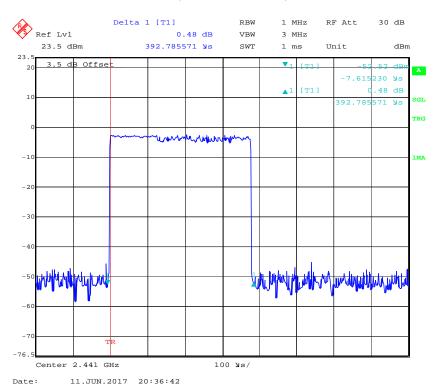


FCC Part 15.247 Page 55 of 65

## Pulse time, High Channel, 3DH1

Report No.: RSZ170531001-00B

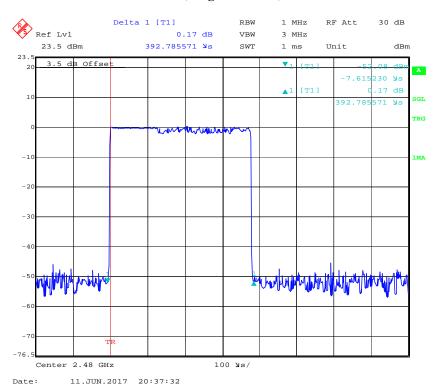


#### Pulse time, Low Channel, 3DH3

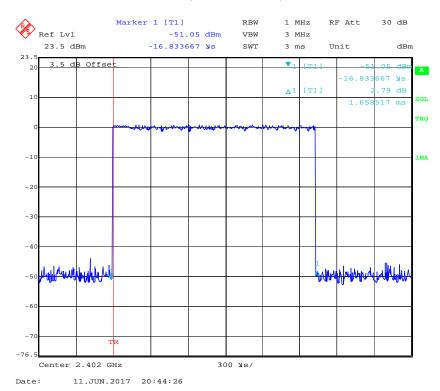


FCC Part 15.247 Page 56 of 65

## Pulse time, Middle Channel, 3DH3

Report No.: RSZ170531001-00B

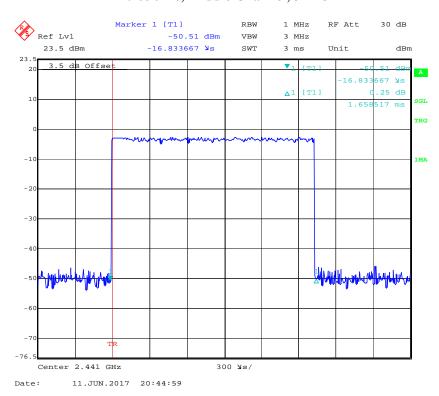


## Pulse time, High Channel, 3DH3

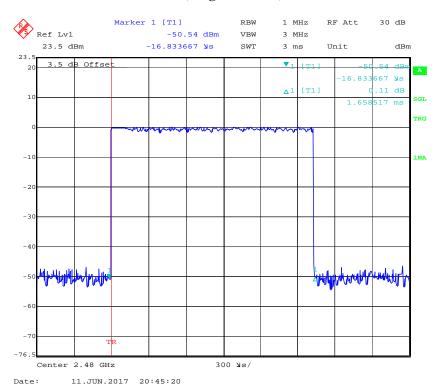


FCC Part 15.247 Page 57 of 65

#### Pulse time, Low Channel, 3DH5

Report No.: RSZ170531001-00B

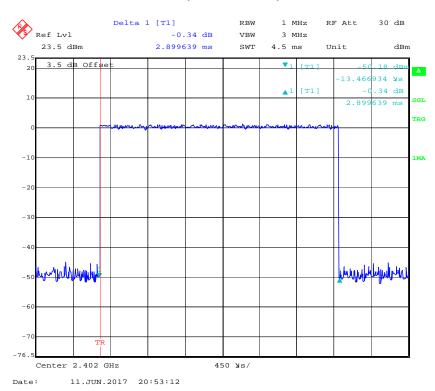


## Pulse time, Middle Channel, 3DH5

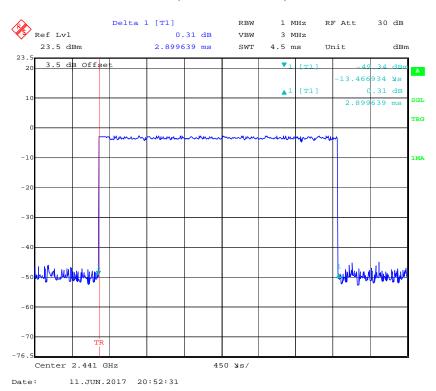

FCC Part 15.247 Page 58 of 65

## Pulse time, High Channel, 3DH5

Report No.: RSZ170531001-00B

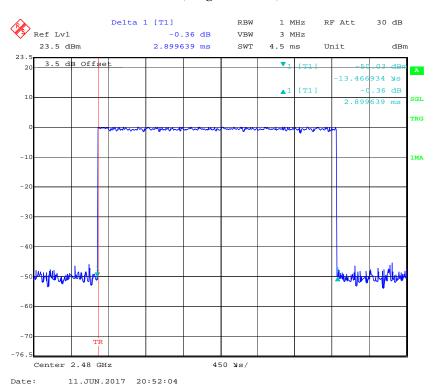

FCC Part 15.247 Page 59 of 65

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

## **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ170531001-00B

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-06-11.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

FCC Part 15.247 Page 60 of 65

Mode	Channel	Frequency (MHz)	Reading Power (dBm)	Peak Output Power (mW)	Limit (mW)
	Low	2402	2.430	1.750	1000
BDR (GFSK)	Middle	2432	3.590	2.286	1000
		2441	-2.270	0.593	1000
	High	2480	0.560	1.138	1000
EDR (π/4-DQPSK)	Low	2402	1.560	1.432	1000
	Middle	2432	2.280	1.690	1000
		2441	-2.800	0.525	1000
	High	2480	-0.060	0.986	1000
EDR (8DPSK)	Low	2402	1.690	1.476	1000
	Middle	2432	2.540	1.795	1000
		2441	-2.520	0.560	1000
	High	2480	0.190	1.045	1000

Report No.: RSZ170531001-00B

FCC Part 15.247 Page 61 of 65

## FCC §15.247(d) - BAND EDGES TESTING

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ170531001-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-06-11.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


FCC Part 15.247 Page 62 of 65

# BDR (GFSK): Band Edge-Left Side

Report No.: RSZ170531001-00B

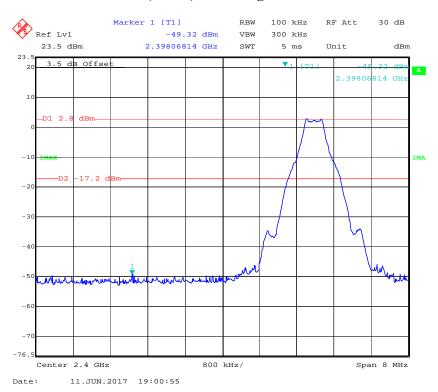


## BDR (GFSK): Band Edge-Right Side

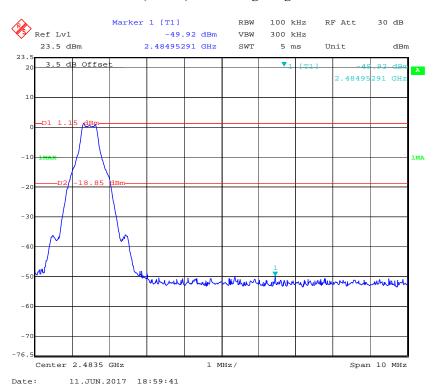


FCC Part 15.247 Page 63 of 65

## EDR (π/4-DQPSK): Band Edge-Left Side

Report No.: RSZ170531001-00B

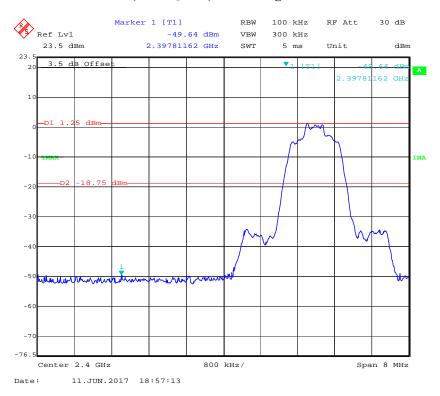


# EDR ( $\pi$ /4-DQPSK): Band Edge-Right Side

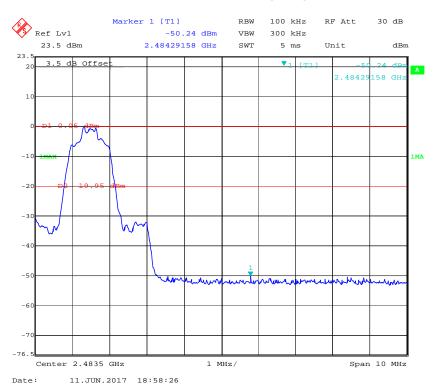


FCC Part 15.247 Page 64 of 65

## EDR (8DPSK): Band Edge-Left Side

Report No.: RSZ170531001-00B

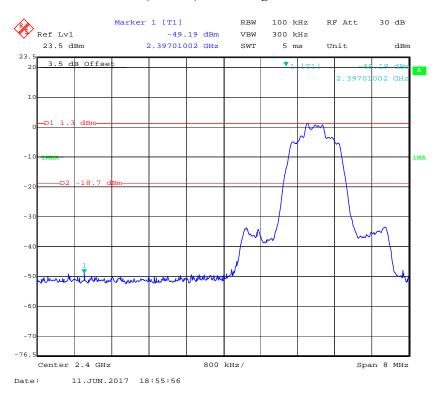

#### BDR (8DPSK): Band Edge-Right Side

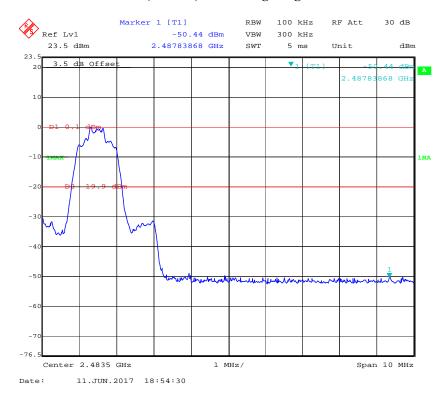

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 65 of 65