

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

GSM 850-Right Head Cheek Middle CH190	3
GSM 850-Right Head Tilted Middle CH190	5
GSM 850-Left Head Cheek Middle CH190	6
GSM 850-Left Head Tilted Middle CH190	7
PCS 1900-Right Head Cheek Low CH512	8
PCS 1900-Right Head Tilted Low CH512	9
PCS 1900-Left Head Cheek Low CH512	10
PCS 1900-Left Head Tilted Low CH512	12
WCDMA Band II-Right Head Cheek Low CH9262	13
WCDMA Band II-Right Head Tilted Low CH9262	14
WCDMA Band II-Left Head Cheek Low CH9262	15
WCDMA Band II-Left Head Tilted Low CH9262	17
WCDMA Band V-Right Head Cheek High CH4233	18
WCDMA Band V-Right Head Tilted High CH4233	19
WCDMA Band V-Left Head Cheek High CH4233	20
WCDMA Band V-Left Head Tilted High CH4233	22
WIFI-Right Head Cheek High CH11	23
WIFI-Right Head Tilted High CH11	24
WIFI-Left Head Cheek High CH11	25
WIFI-Left Head Tilted High CH11	27
GSM 850-Body Rear Middle CH190	28
GPRS 850-Body Front Middle CH190	29
GPRS 850-Body Rear Middle CH190	30
GPRS 850-Body-Right Middle CH190	32
GPRS 850-Body-Left Middle CH190	33
GPRS 850-Body-Bottom Middle CH190	34
PCS 1900-Body Rear Low CH512	35
GPRS 1900-Body Front Low CH512	36
GPRS 1900-Body Rear Low CH51	37
GPRS 1900-Body-Right Low CH512	39
GPRS 1900-Body-Left Low CH512	40
GPRS 1900-Body-Bottom Low CH512	41
WCDMA Band II-Body Front Low CH9262	42
WCDMA Band II-Body Rear Low CH9262	43
WCDMA Band II-Body Rear Middle CH9400	45
WCDMA Band II-Body Rear High CH9538	46
WCDMA Band II-Body Low CH9262 Repeat	47
WCDMA Band II-Body-Right Low CH9262	48
WCDMA Band II-Body-Left Low CH9262	49
WCDMA Band II-Body-Bottom Low CH9262	50

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

WCDMA Band V-Body Front High CH423.....	51
WCDMA Band V-Body Rear High CH4233.....	52
WCDMA Band V-Body-Right High CH4233	54
WCDMA Band V-Body-Left High CH4233	55
WCDMA Band V-Body-Bottom High CH4233	56
WIFI-Body Front High CH1	57
WIFI-Body Rear High CH11	58
WIFI-Body-Left High CH11.....	60
WIFI-Body-Top High CH11.....	61

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

GSM 850-Right Head Cheek Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.31764

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.104 W/kg


GSM850/Left Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.164 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

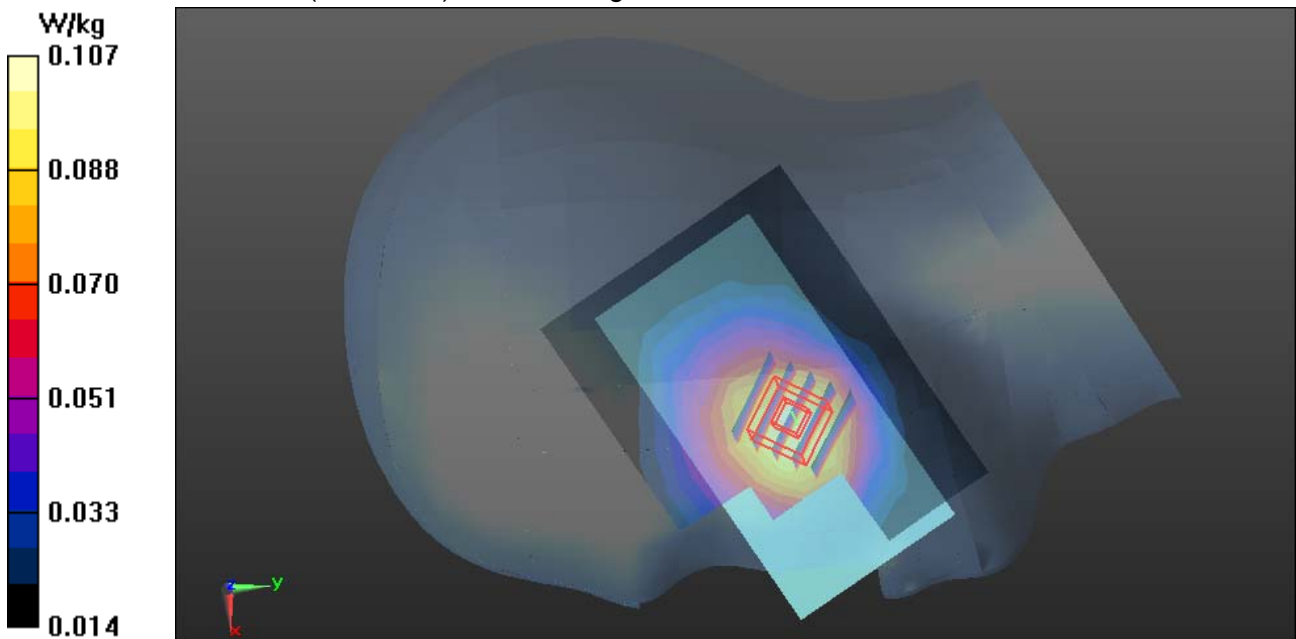


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

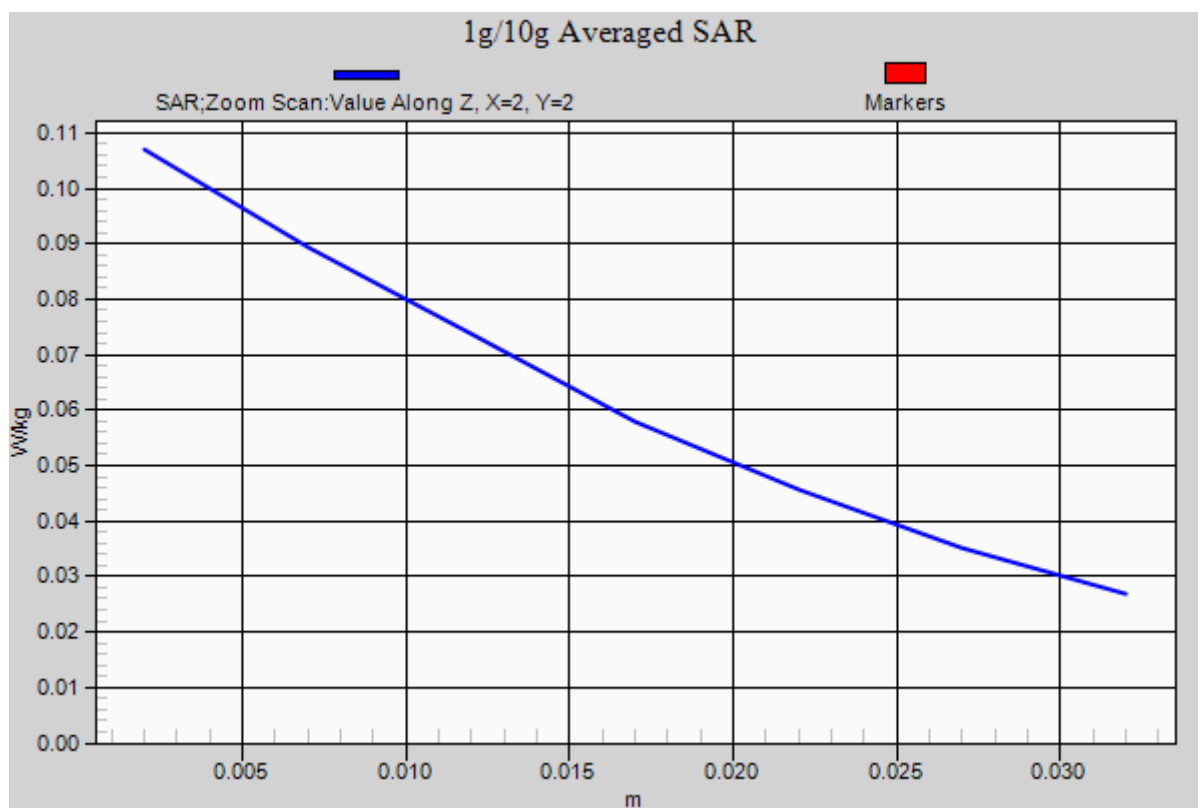

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

GSM 850-Right Head Tilted Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Tilted Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0752 W/kg


GSM850/Left Head Tilted Middle CH190/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.334 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0771 W/kg

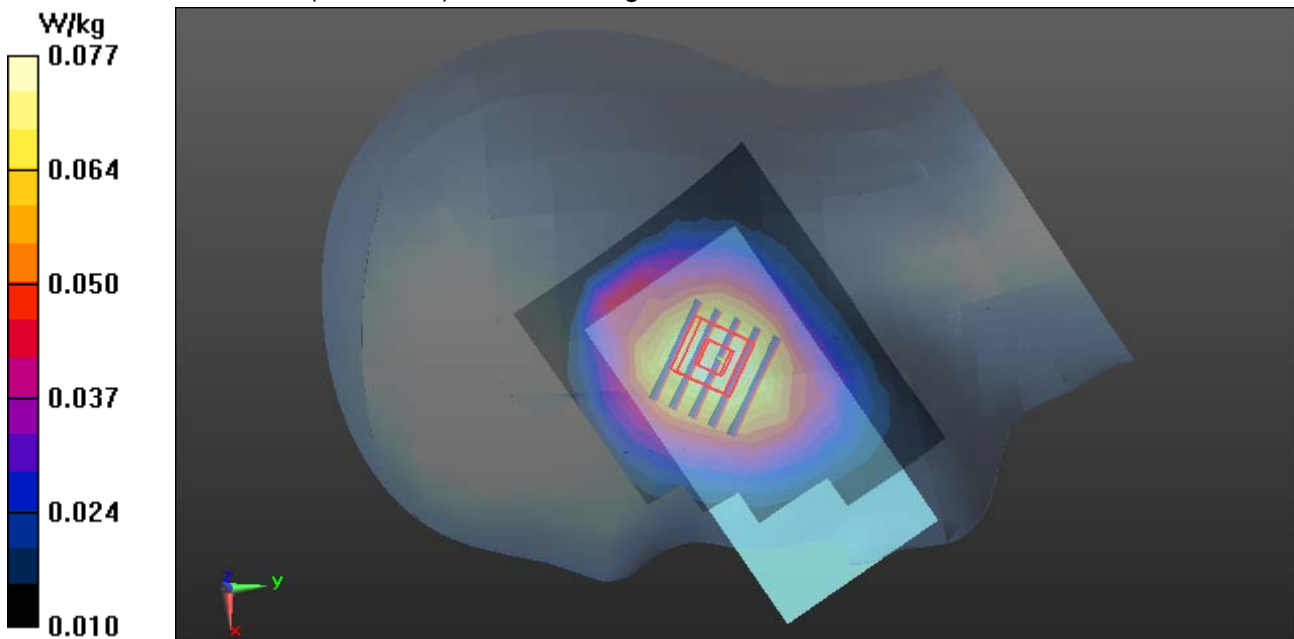

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

GSM 850-Left Head Cheek Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.31764

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg


GSM850/Left Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.116 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

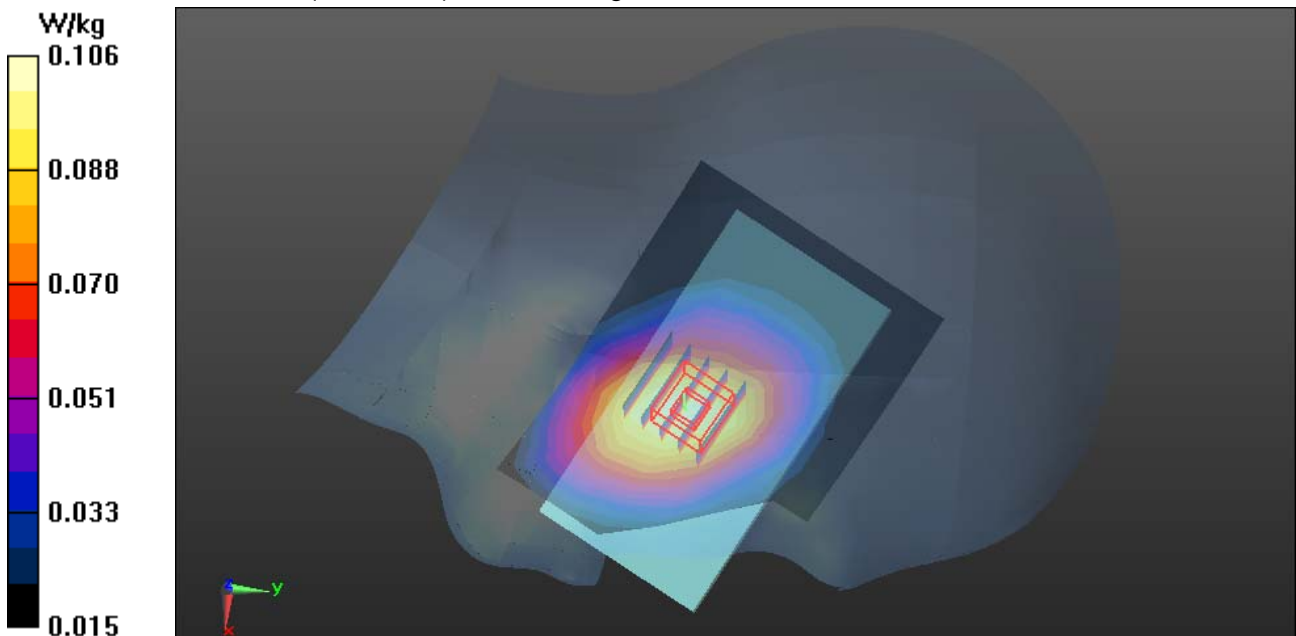

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

GSM 850-Left Head Tilted Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Tilted Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0844 W/kg


GSM850/Left Head Tilted Middle CH190/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.615 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0887 W/kg

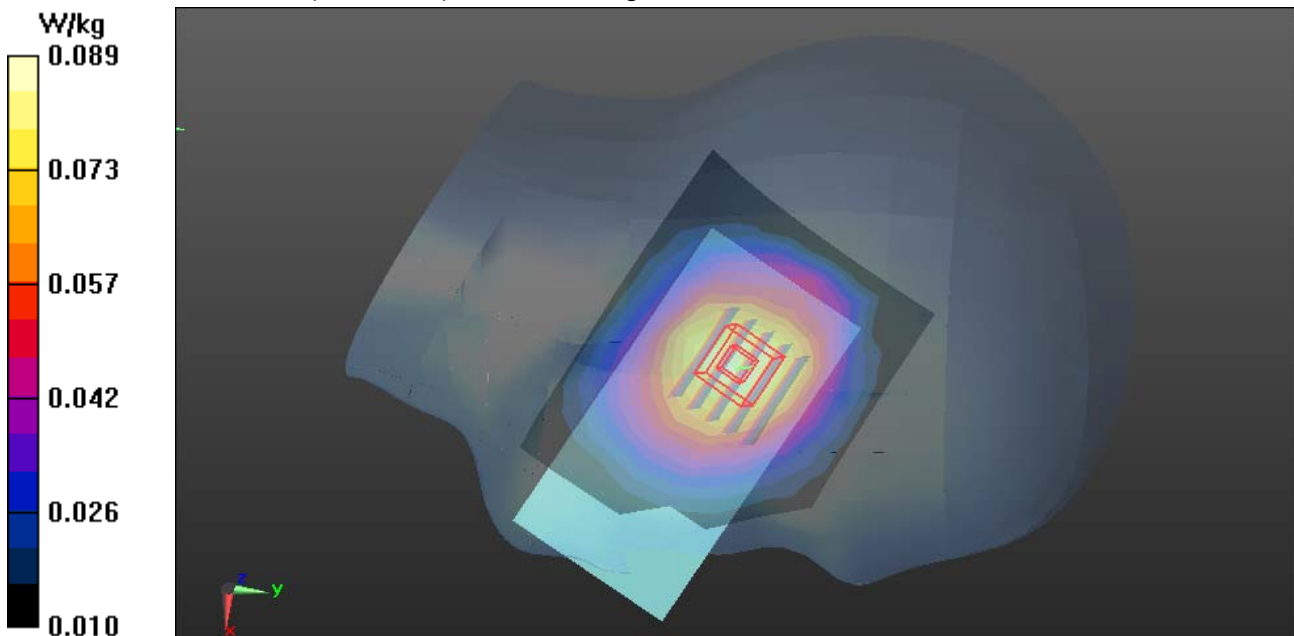

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

PCS 1900-Right Head Cheek Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Cheek Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0427 W/kg


PCS1900/Right Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0425 W/kg

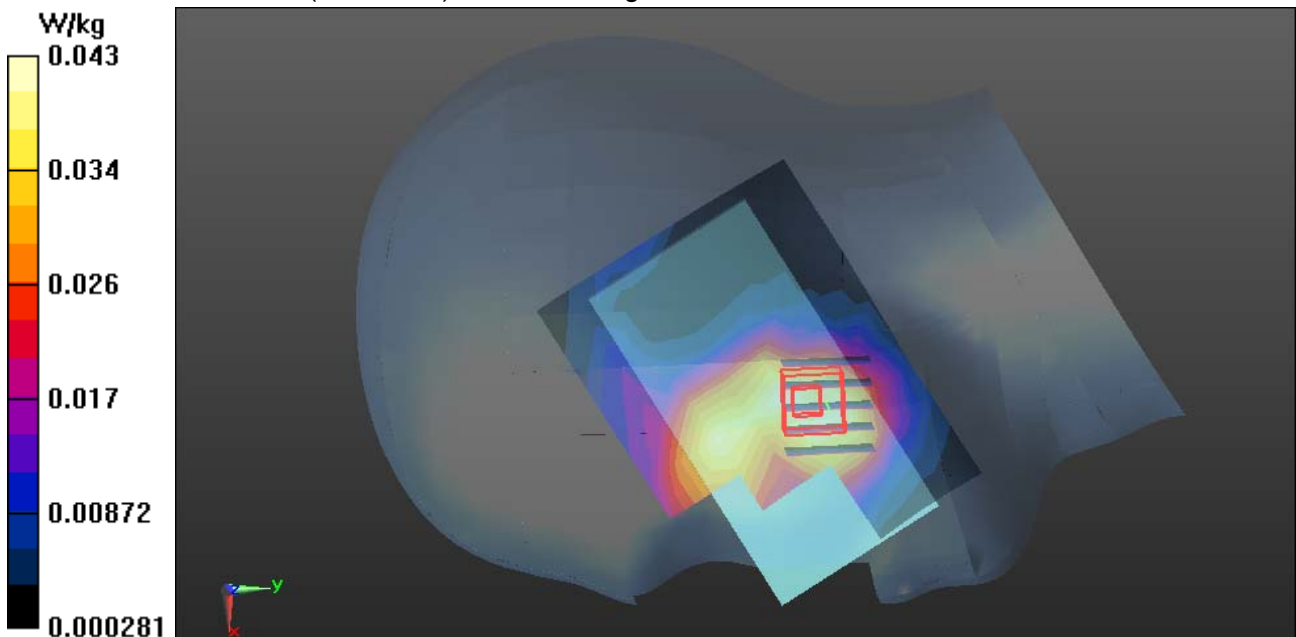

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

PCS 1900-Right Head Tilted Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Tilted Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0261 W/kg

PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.890 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00898 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0309 W/kg

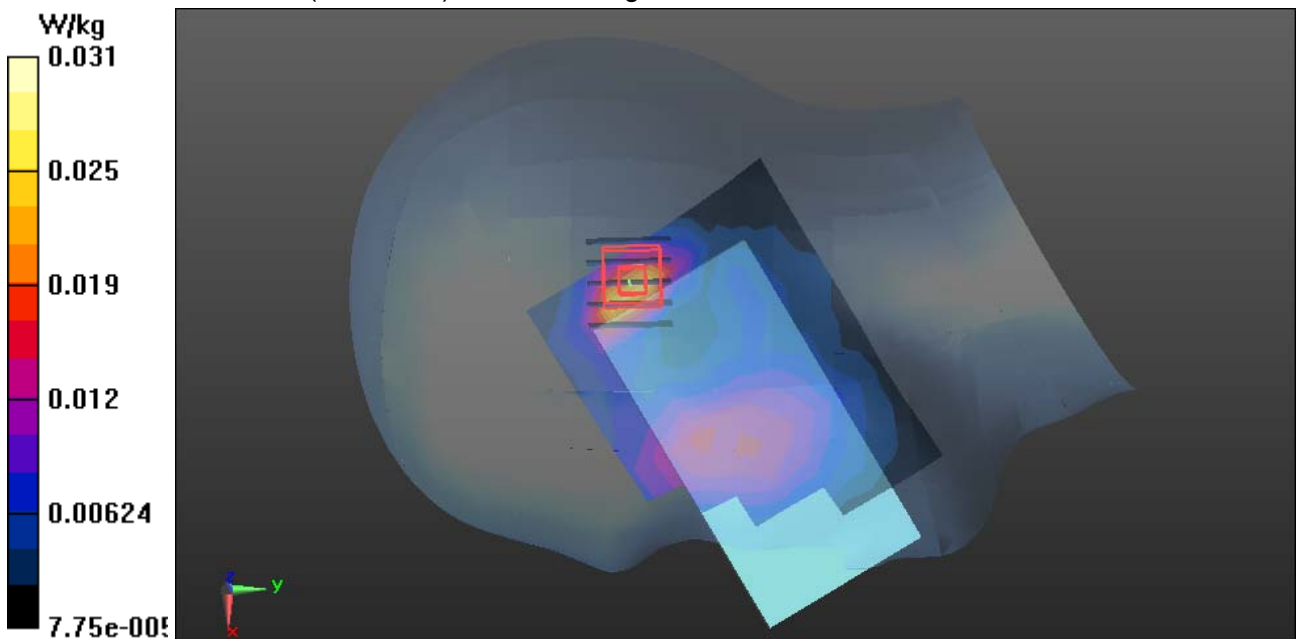

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

PCS 1900-Left Head Cheek Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Left Head Cheek Low CH512/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0697 W/kg

PCS1900/Left Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.934 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.027 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0722 W/kg

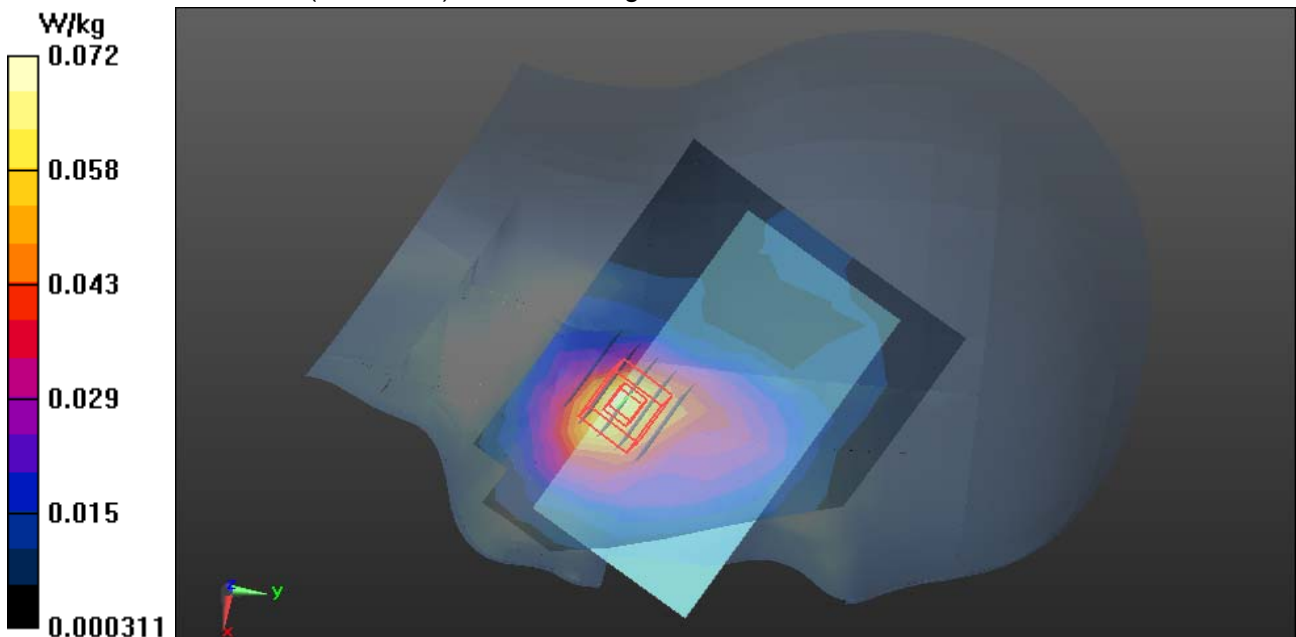


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

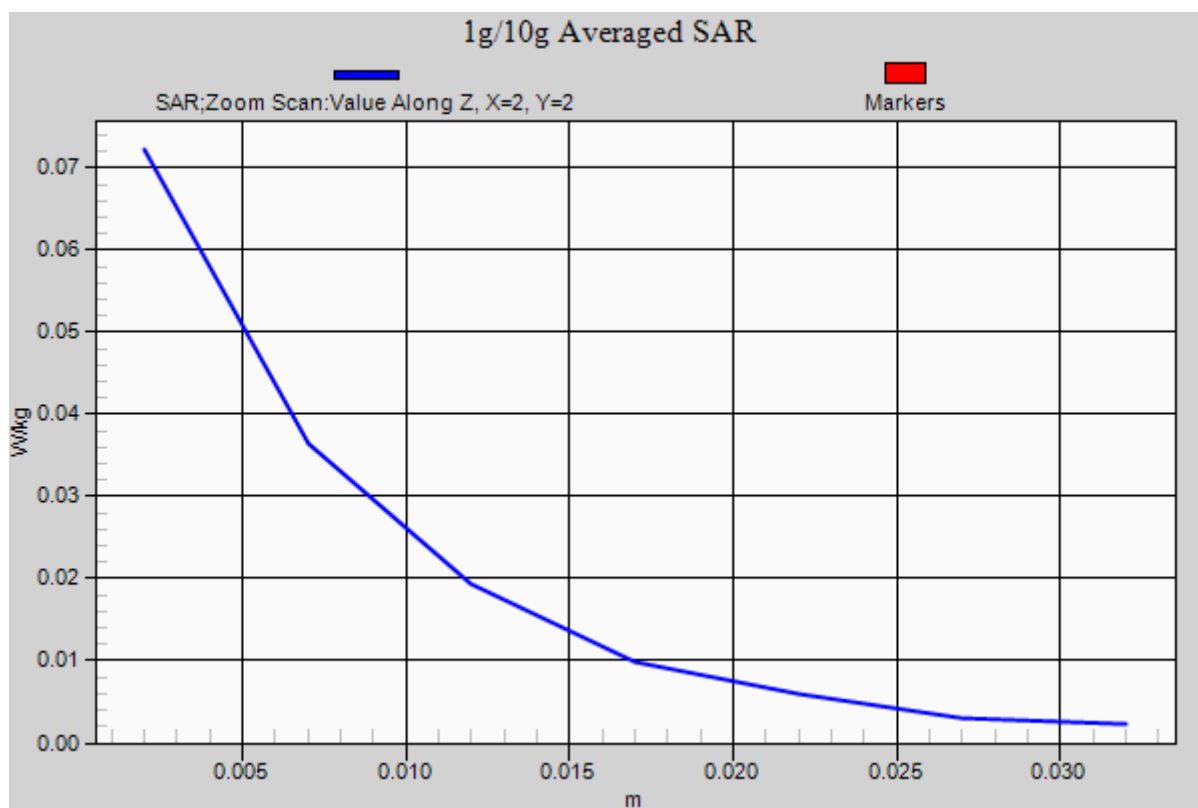

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

PCS 1900-Left Head Tilted Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Left Head Tilted Low CH512/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0193 W/kg

PCS1900/Left Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 1.357 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00644 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0214 W/kg

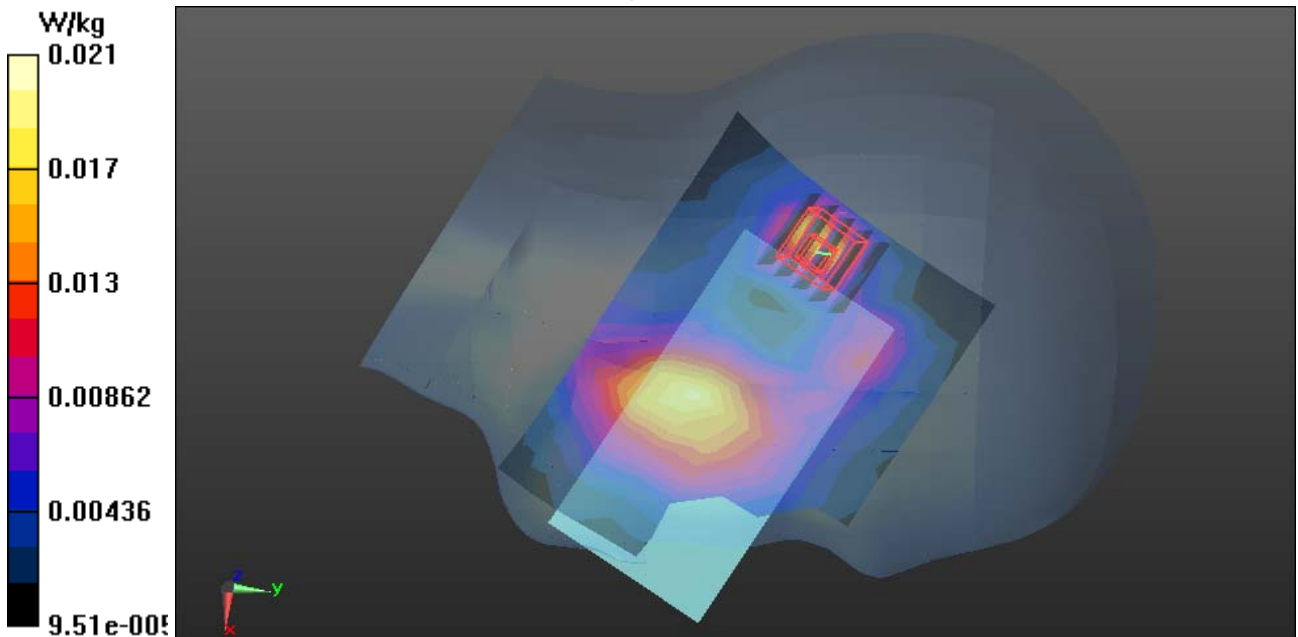

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Right Head Cheek Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 38.61$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Right Head Cheek Low CH9262/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0877 W/kg

WCDMA/Right Head Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.230 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.038 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0889 W/kg

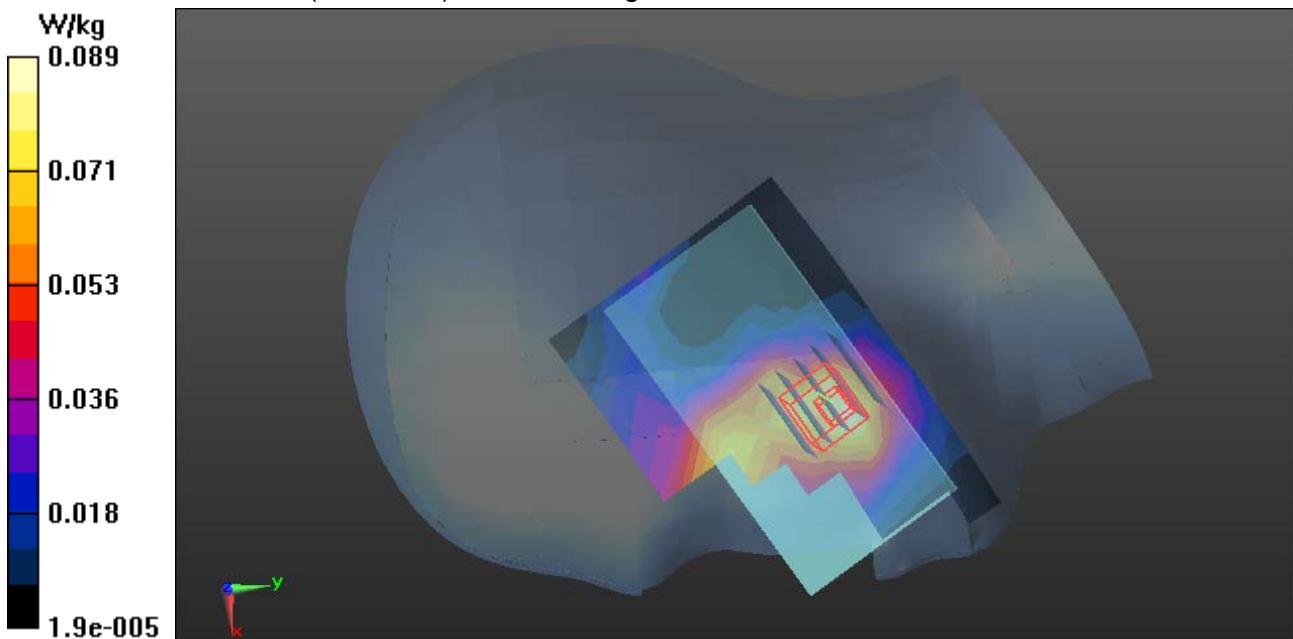

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Right Head Tilted Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 38.61$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Right Head Tilted Low CH9262/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0407 W/kg

WCDMA/Right Head Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.669 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.014 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0532 W/kg

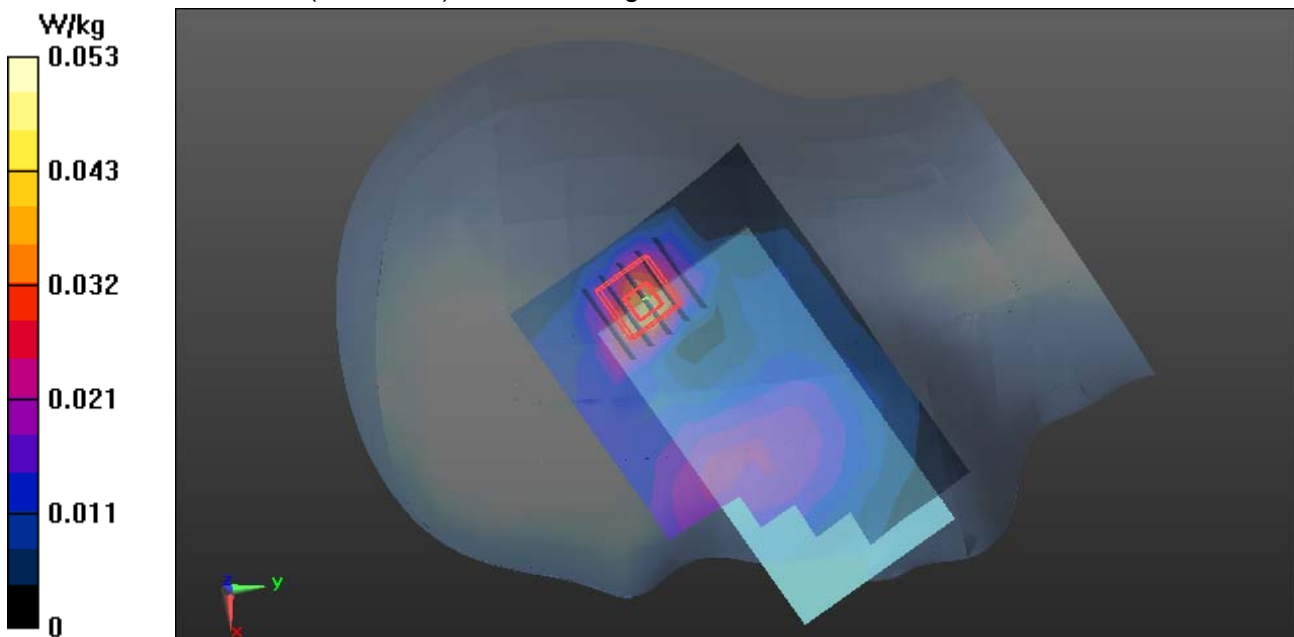

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Left Head Cheek Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 38.61$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Left Head Cheek Low CH9262/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.168 W/kg

WCDMA/Left Head Cheek Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.494 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.059 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.160 W/kg

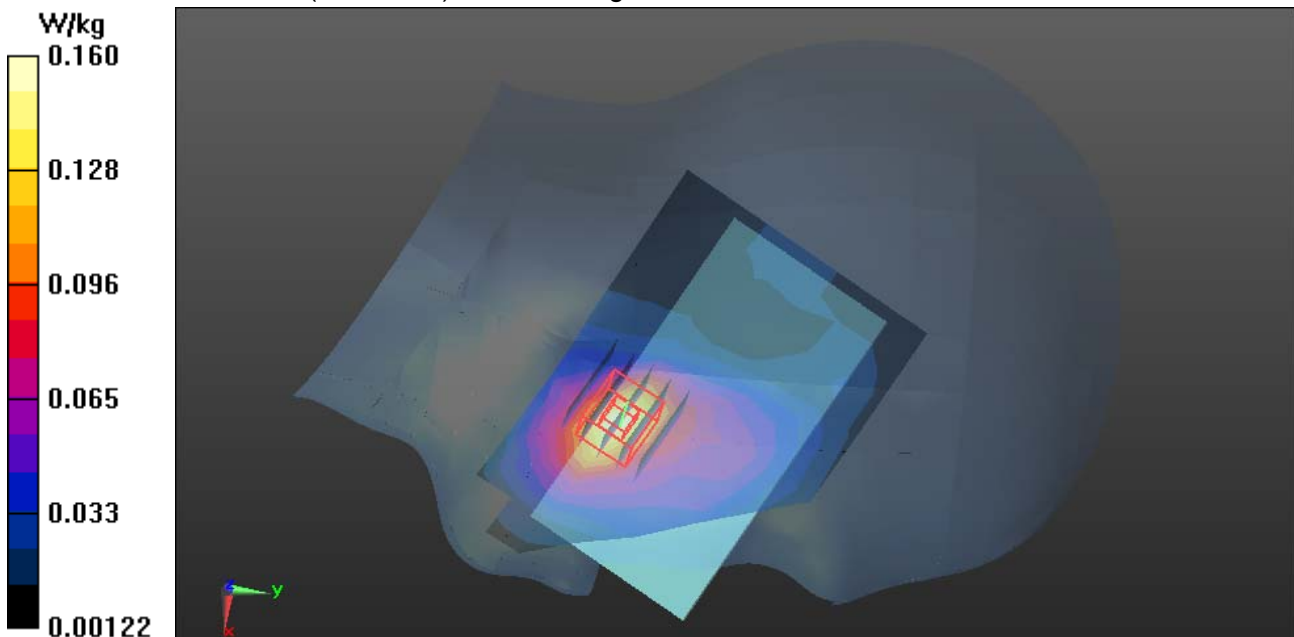


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

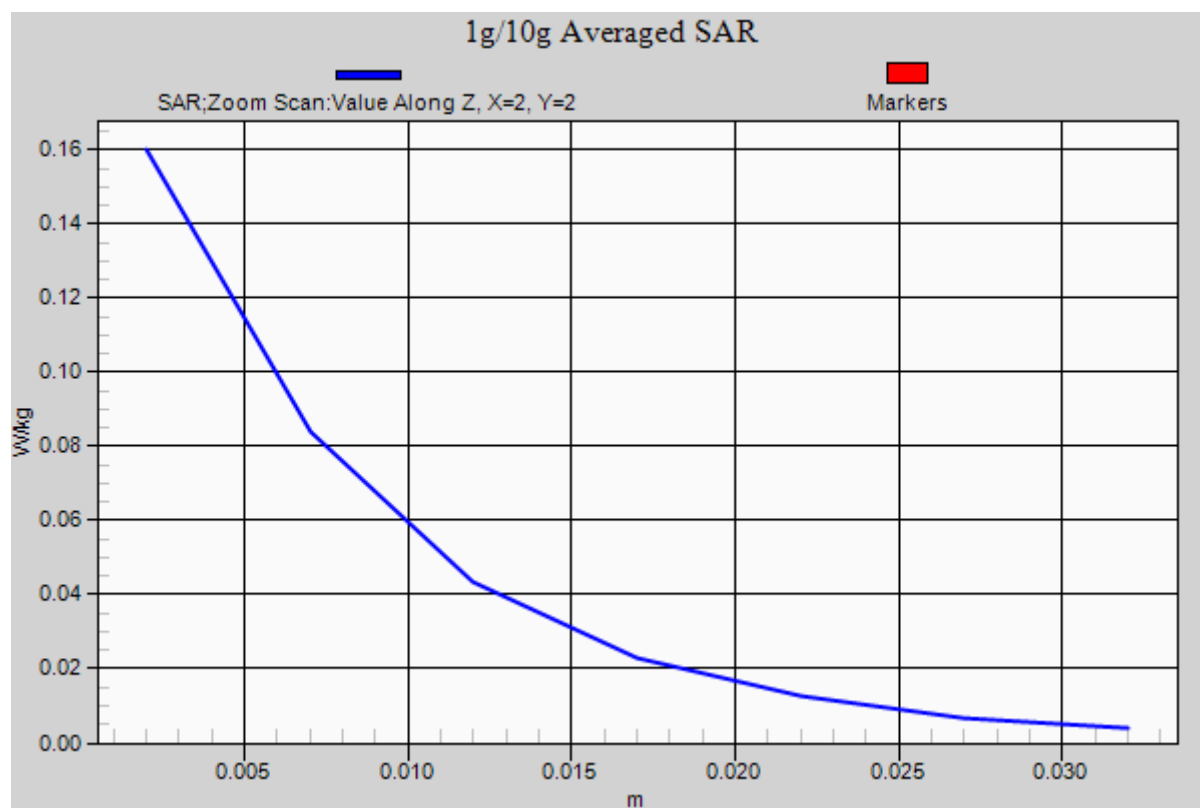

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Left Head Tilted Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 38.61$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Left Head Tilted Low CH9262/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0391 W/kg

WCDMA/Left Head Tilted Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.945 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.013 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0435 W/kg

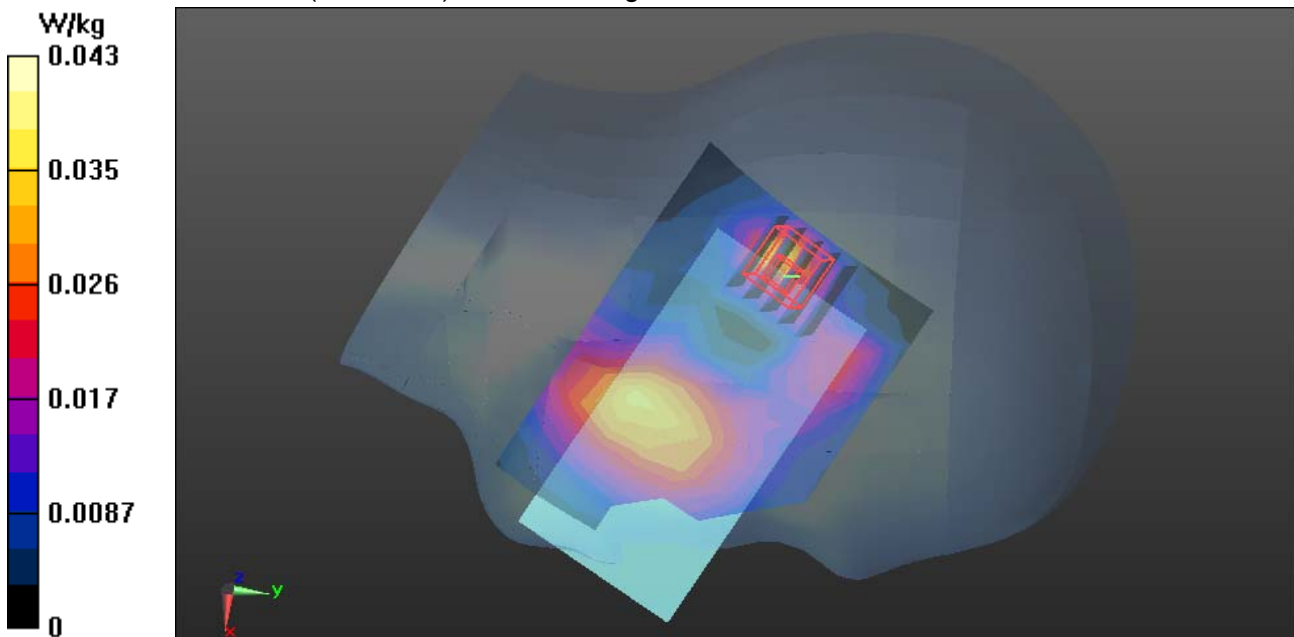

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

WCDMA Band V-Right Head Cheek High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.99$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Right Head Cheek High CH4233/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg


WCDMA/Right Head Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.279 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

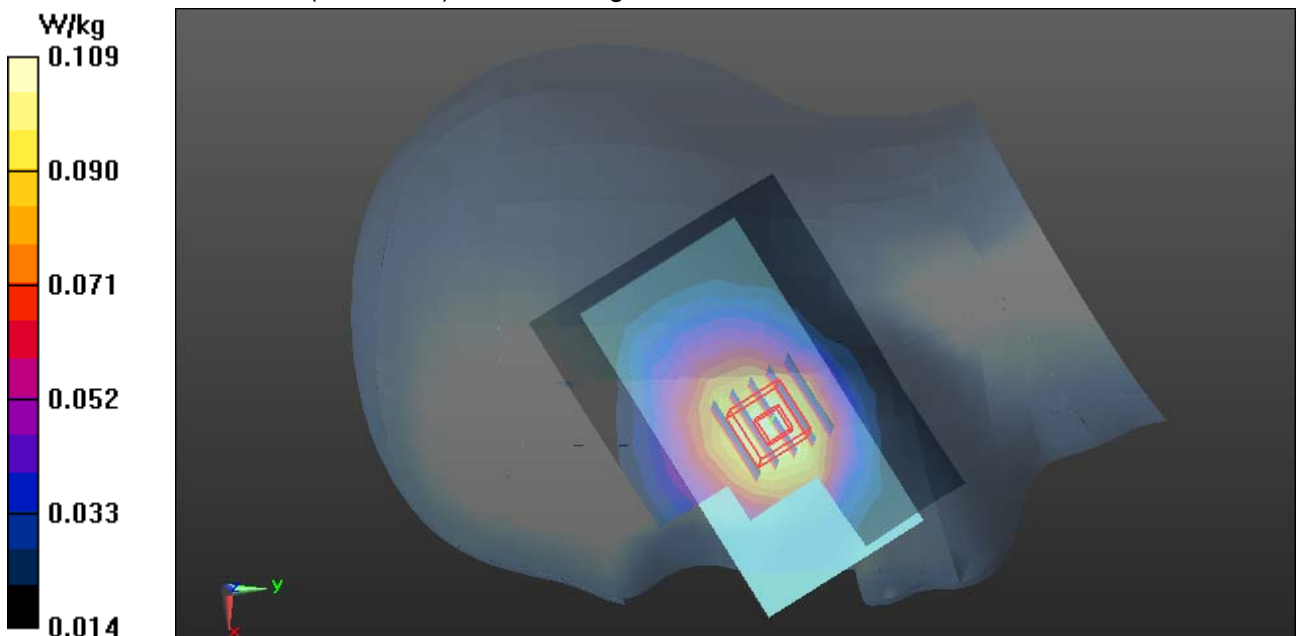

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

WCDMA Band V-Right Head Tilted High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.99$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Right Head Tilted High CH4233/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0850 W/kg


WCDMA/Right Head Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.948 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0853 W/kg

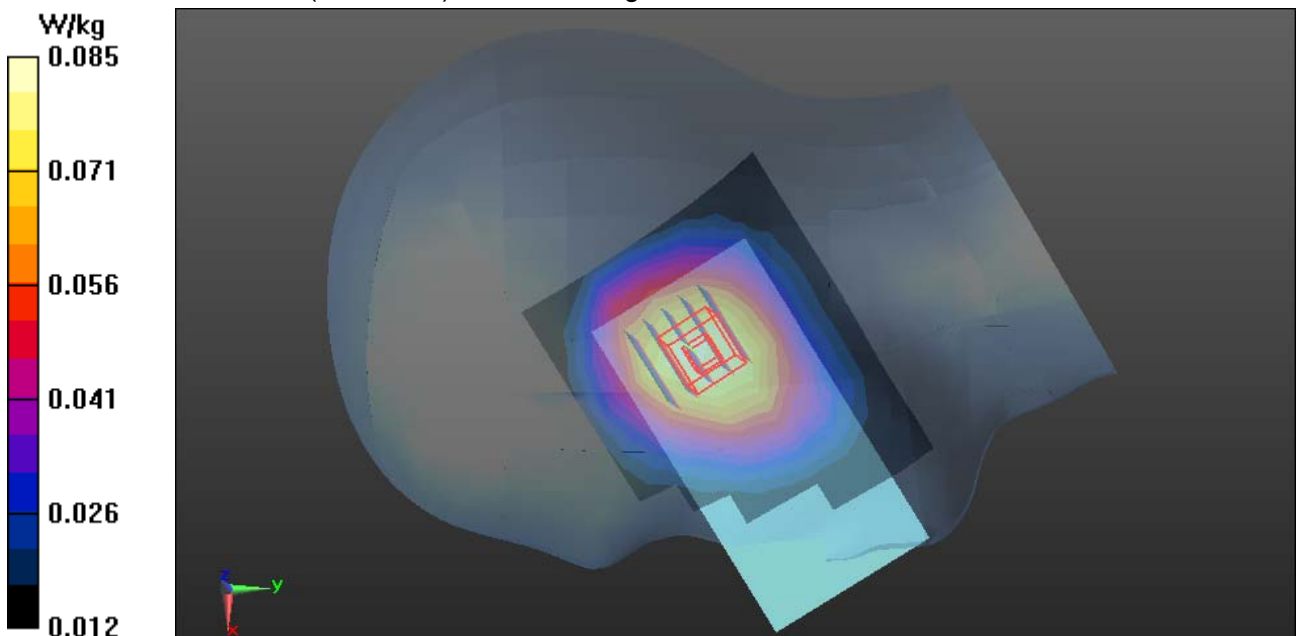

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

WCDMA Band V-Left Head Cheek High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.99$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Left Head Cheek High CH4233/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.119 W/kg

WCDMA/Left Head Cheek High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.795 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.082 W/kg

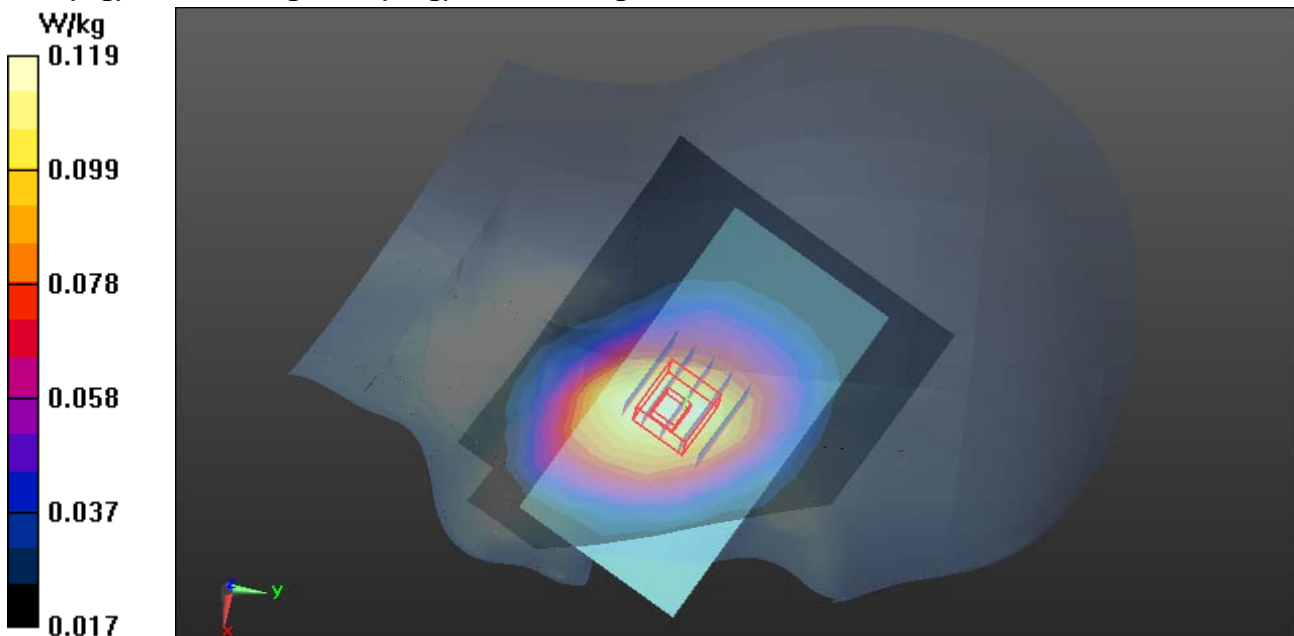


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

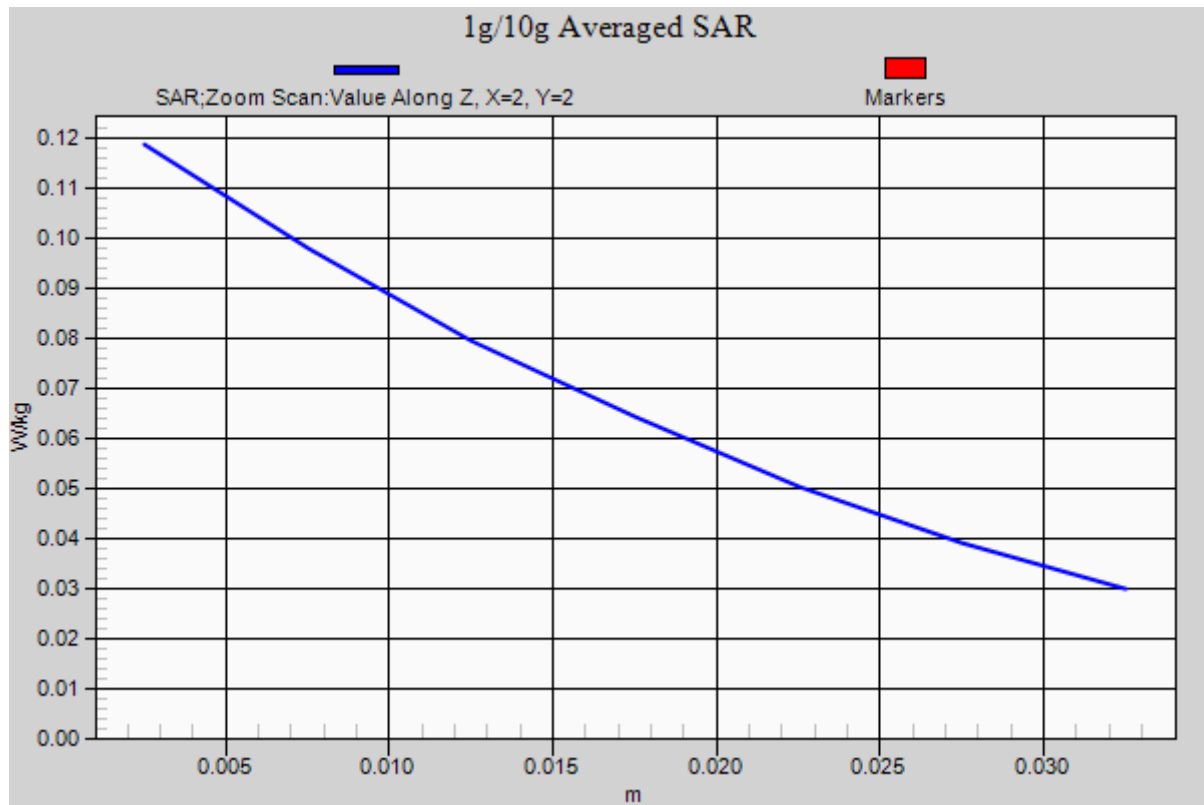

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/1/2014

WCDMA Band V-Left Head Tilted High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 40.99$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Left Head Tilted High CH4233/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0908 W/kg


WCDMA/Left Head Tilted High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.822 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.0936 W/kg

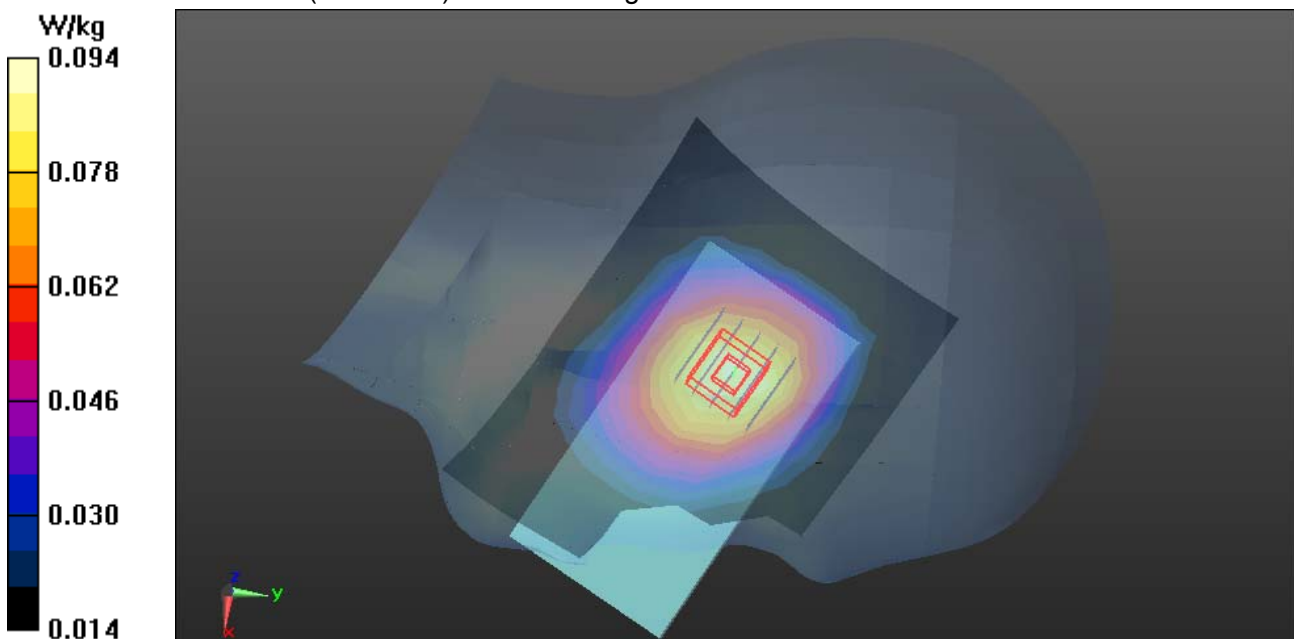

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Right Head Cheek High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 38.75$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Left Head Cheek High CH11/Area Scan (9x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0544 W/kg


WIFI/IEEE802.11b Left Head Cheek High CH11/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.564 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0529 W/kg

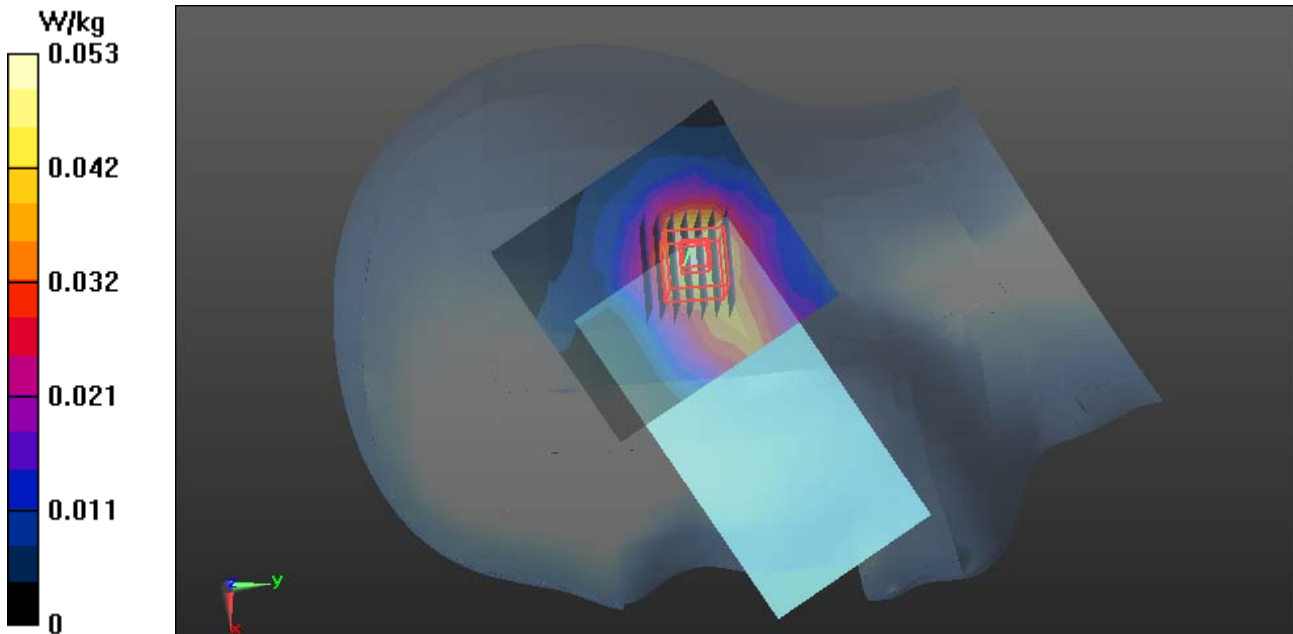

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Right Head Tilted High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 38.75$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Right Head Tilted High CH11/Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0511 W/kg


WIFI/IEEE802.11b Right Head Tilted High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.759 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0512 W/kg

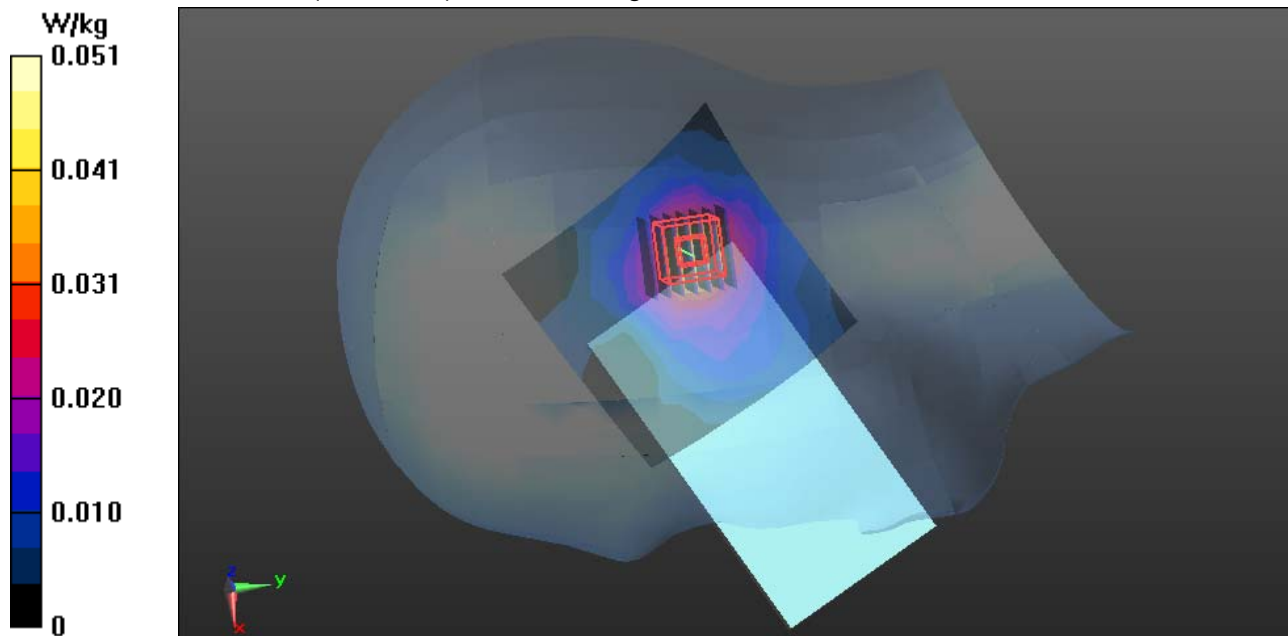

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Left Head Cheek High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 38.75$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Left Head Cheek High CH11/Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0840 W/kg


WIFI/IEEE802.11b Left Head Cheek High CH11/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.013 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0886 W/kg

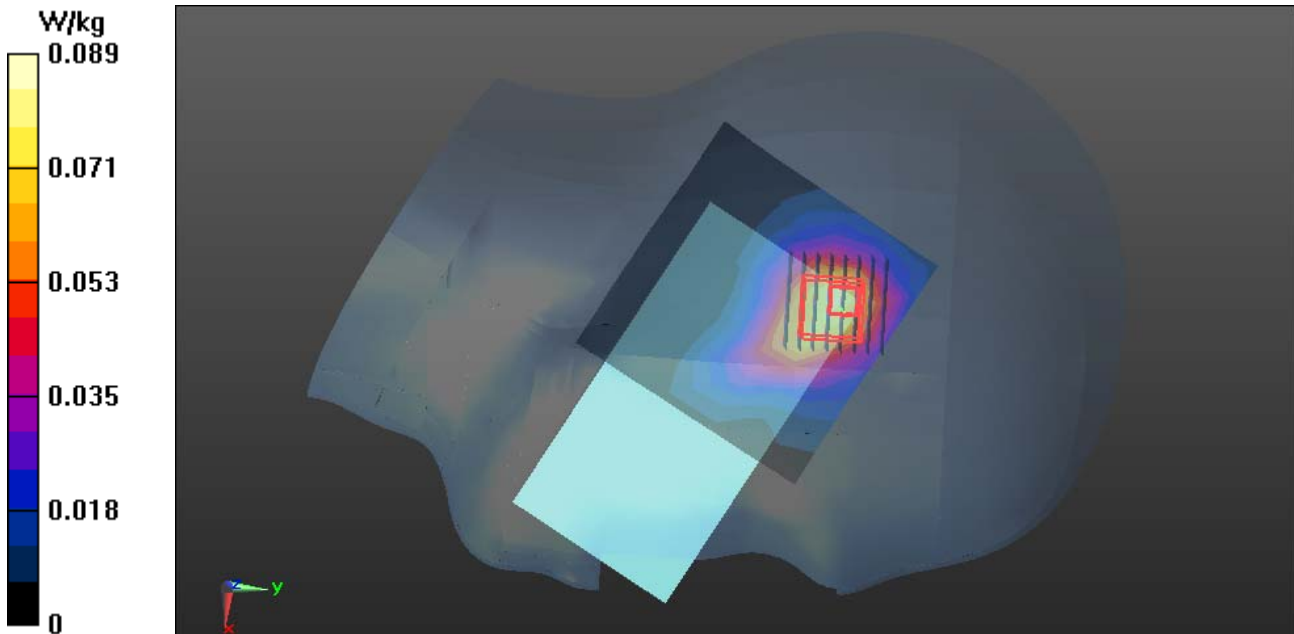


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

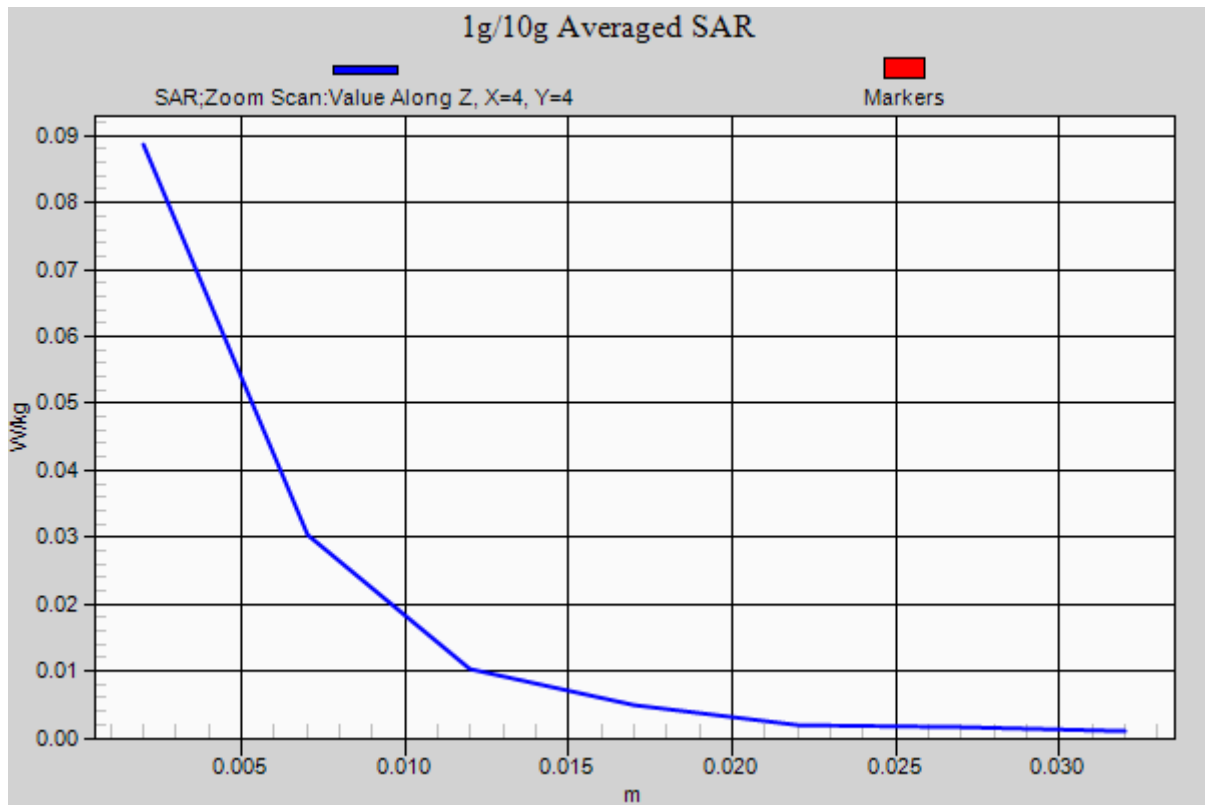

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Left Head Tilted High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 38.75$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Left Head Tilted High CH11/Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0832 W/kg


WIFI/IEEE802.11b Left Head Tilted High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.254 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0872 W/kg

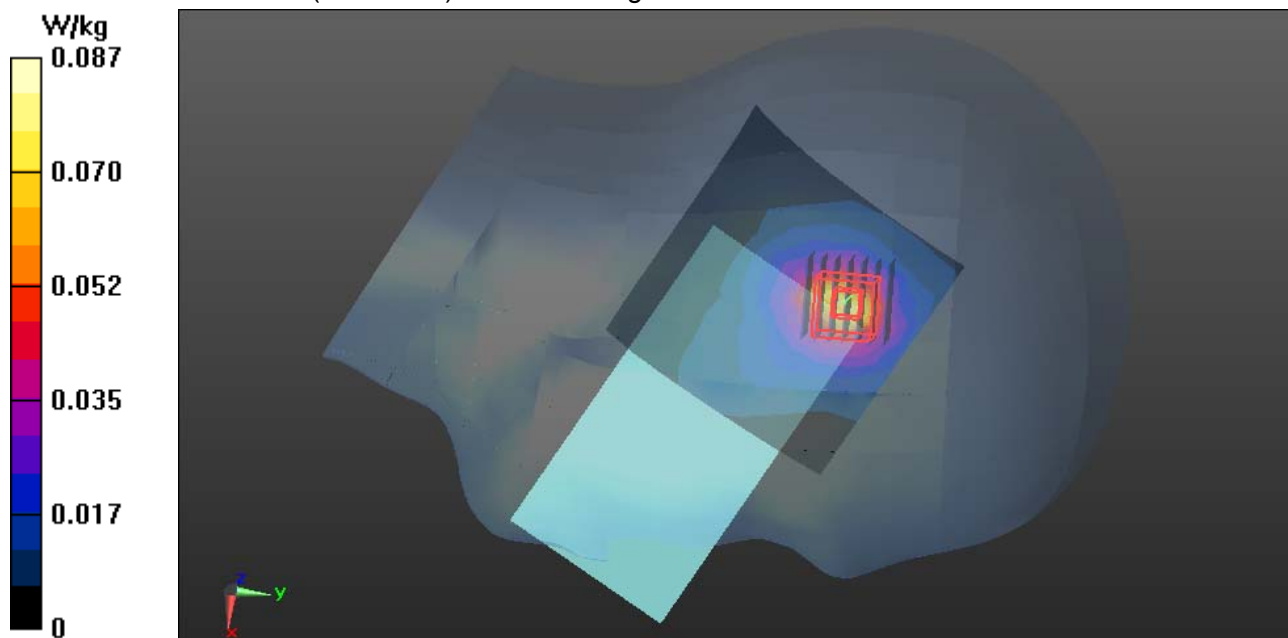

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GSM 850-Body Rear Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Rear Middle CH190/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.520 W/kg

GSM 850/GSM850 Body Rear Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.935 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.358 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

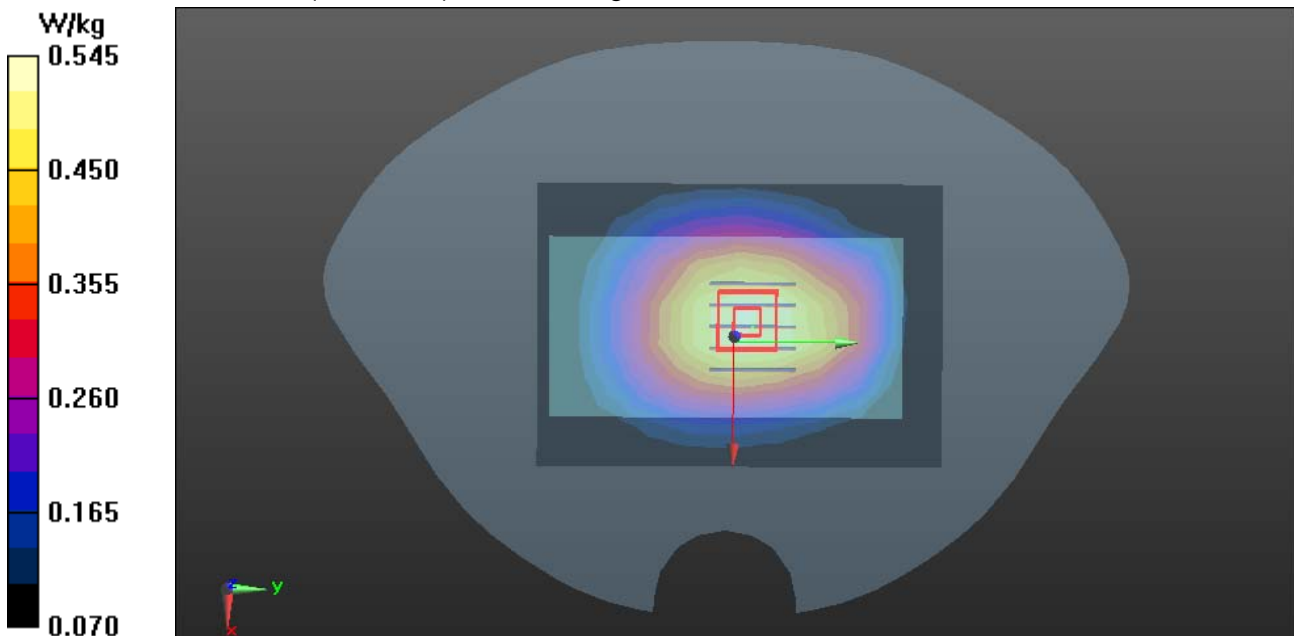

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GPRS 850-Body Front Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 850/GPRS850 Body Front Middle CH190/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.198 W/kg

GPRS 850/GPRS850 Body Front Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.725 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.131 W/kg

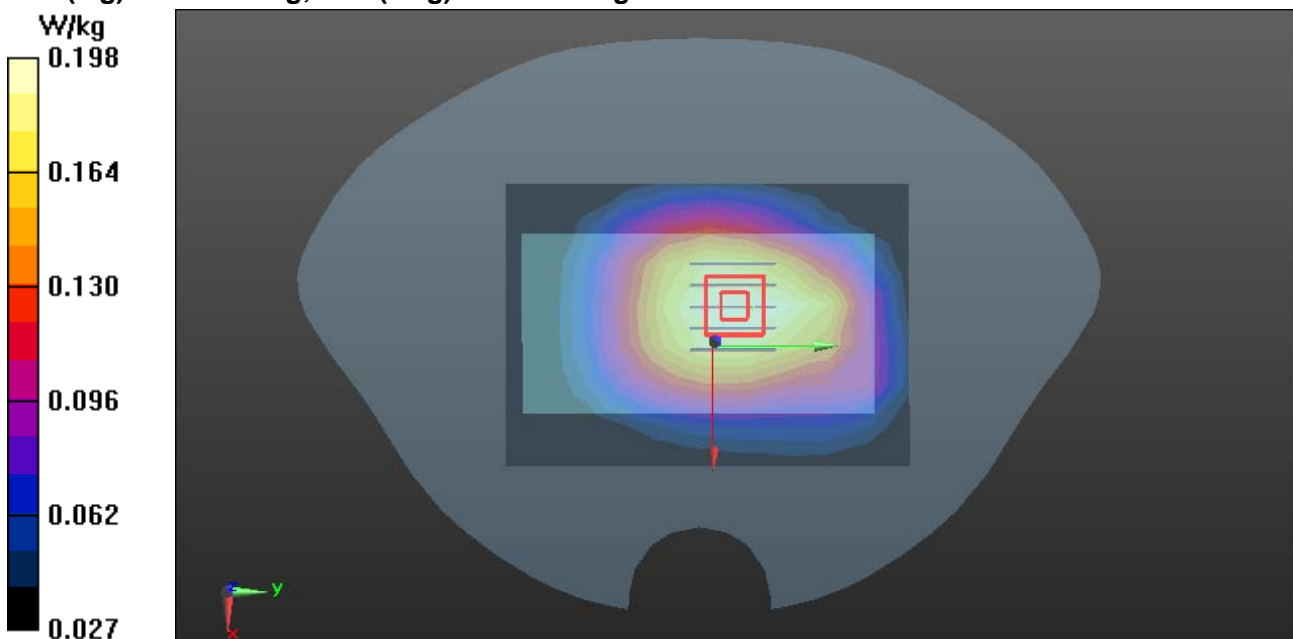

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GPRS 850-Body Rear Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 850/GPRS850 Body Rear Middle CH190/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.625 W/kg

GPRS 850/GPRS850 Body Rear Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.013 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 0.640 W/kg

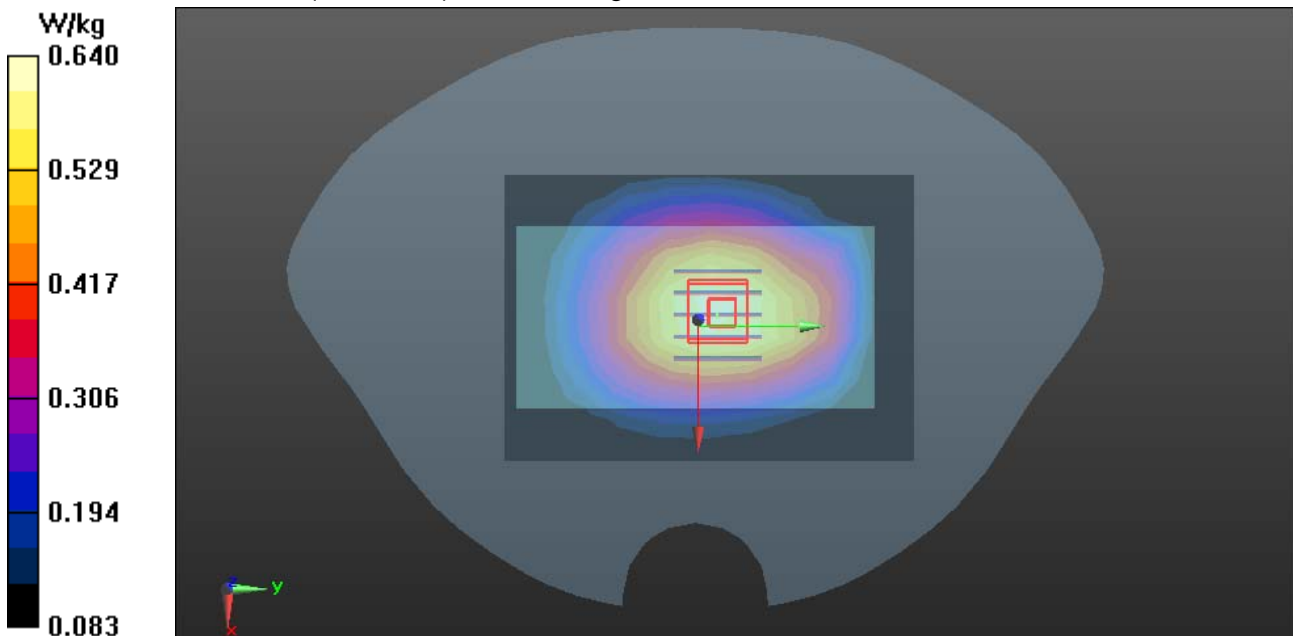


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

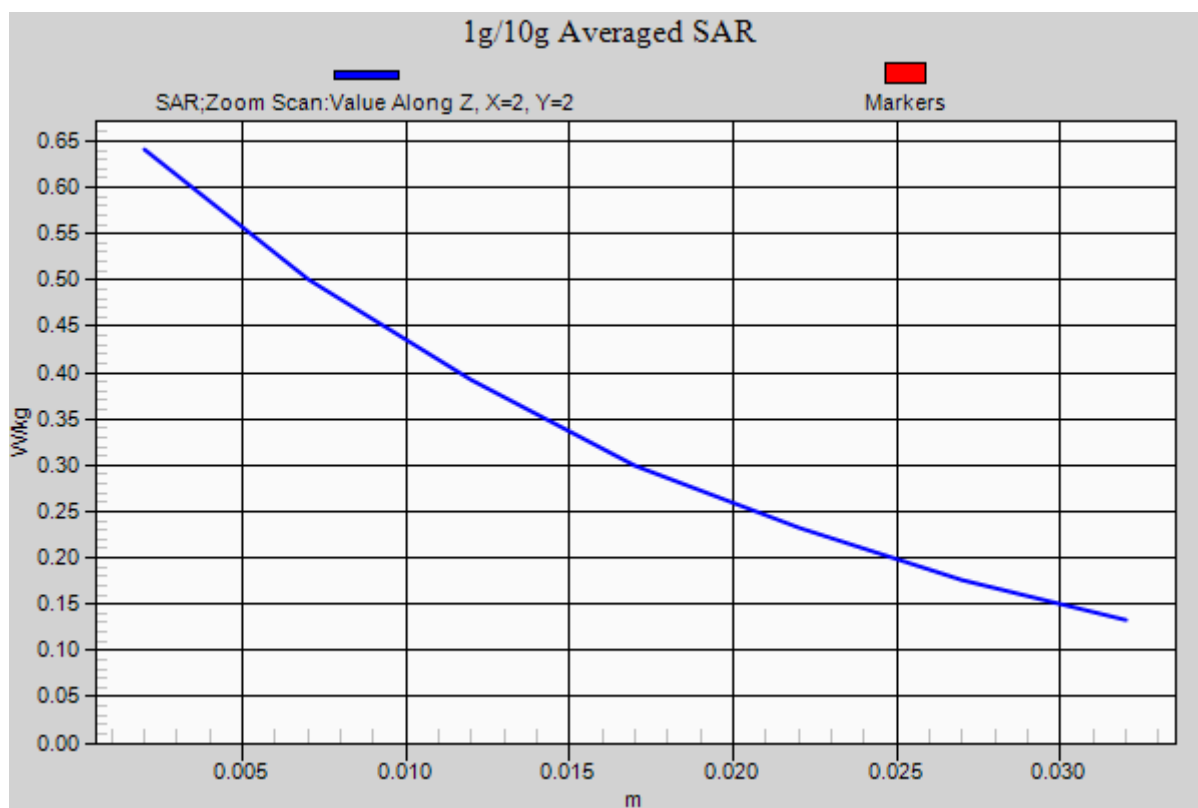

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GPRS 850-Body-Right Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0893

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 850/Body Right Middle CH190/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.349 W/kg


GPRS 850/Body Right Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.347 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

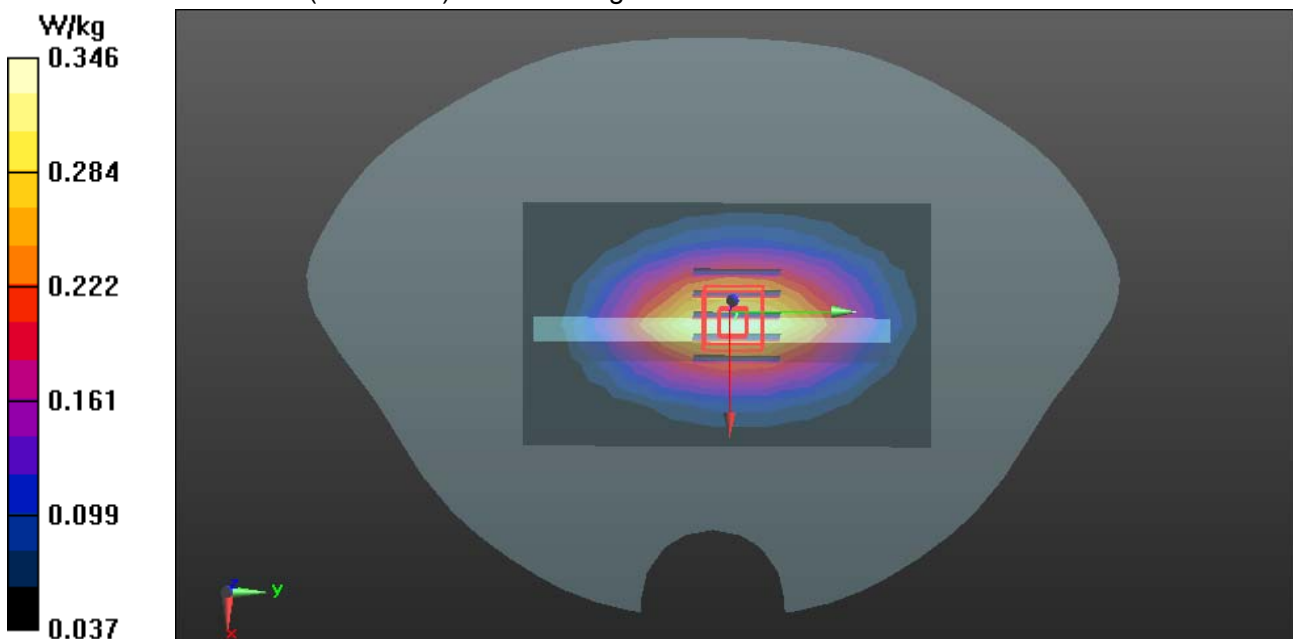

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GPRS 850-Body-Left Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0893

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 850/Body Left Middle CH190/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.349 W/kg


GPRS 850/Body Left Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.531 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.352 W/kg

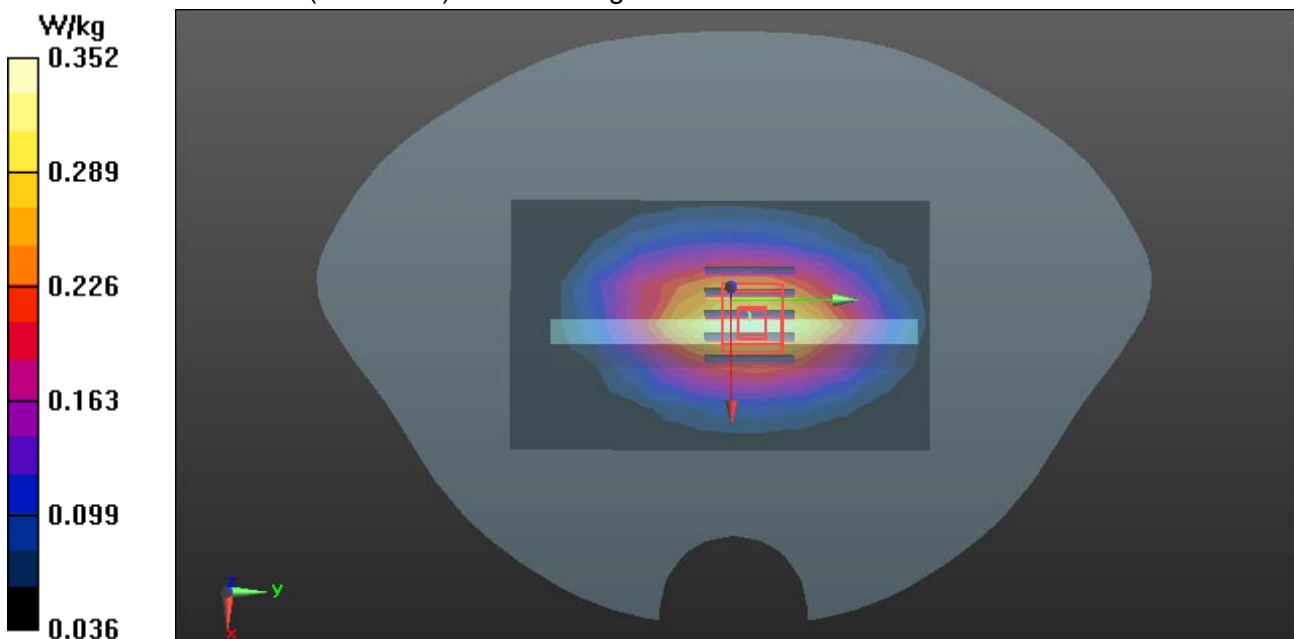

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

GPRS 850-Body-Bottom Middle CH190

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:2.0893

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 850/GPRS850 Body Bottom Middle CH190/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg


GPRS 850/GPRS850 Body Bottom Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.396 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

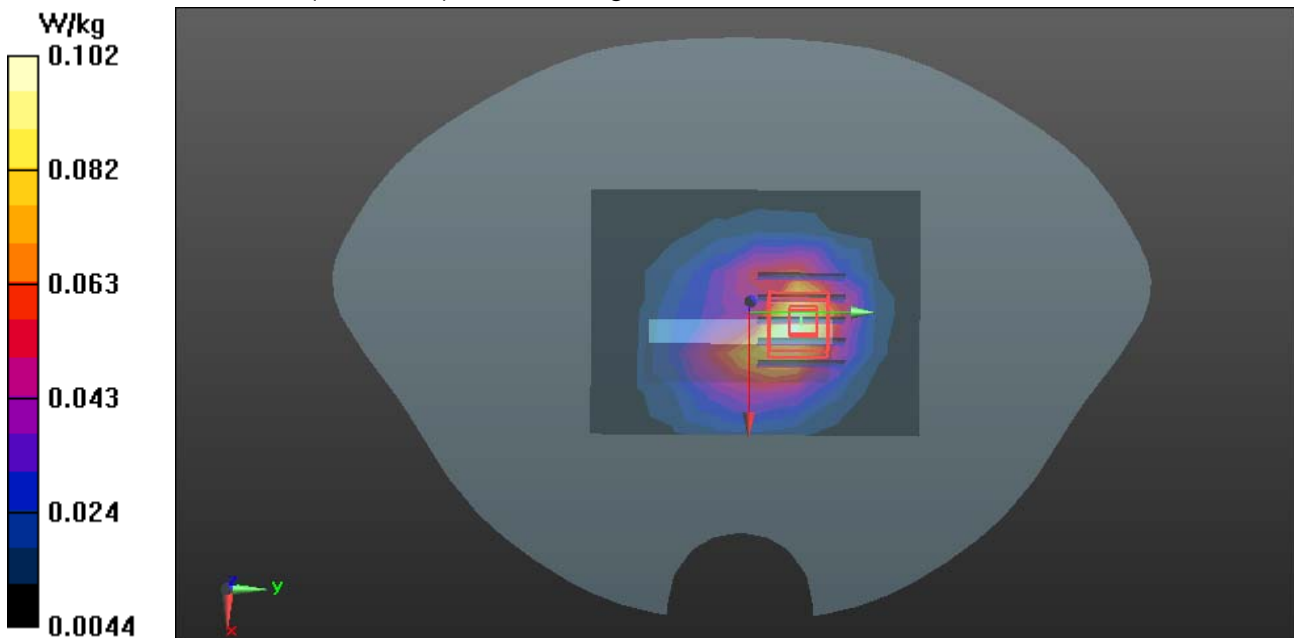

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

PCS 1900-Body Rear Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS 1900/Body Rear Low CH512/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 W/kg

PCS 1900/Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.643 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.216 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.721 W/kg

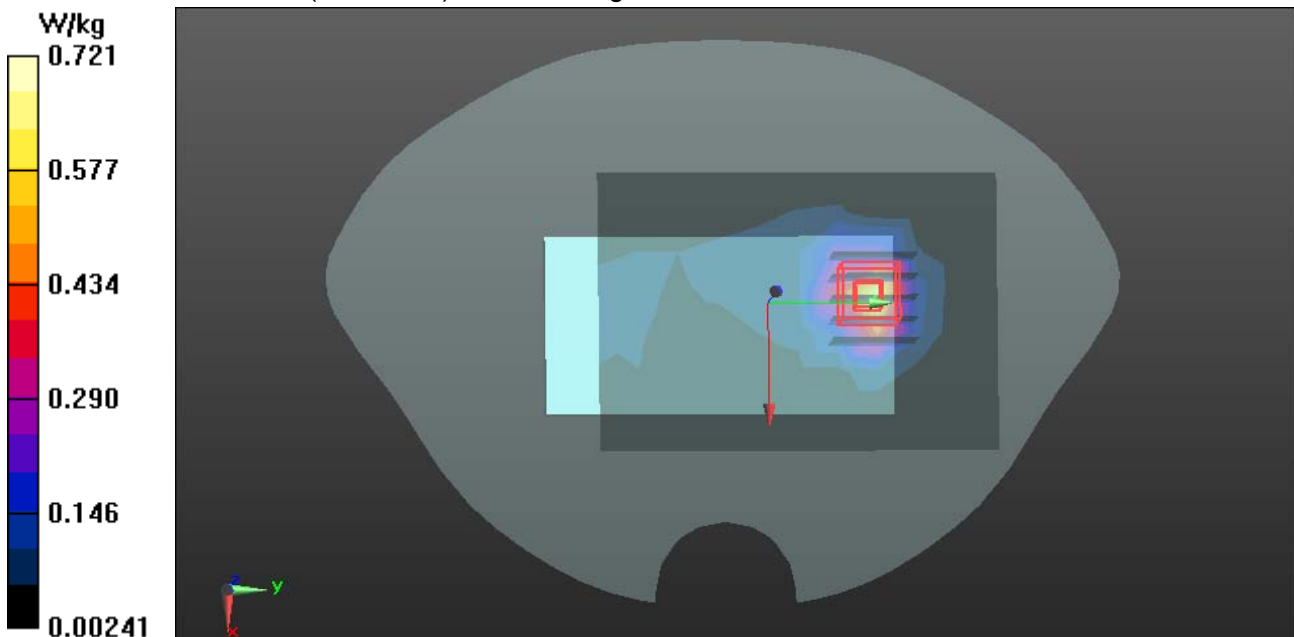

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

GPRS 1900-Body Front Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS2 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Body Front Low CH512/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 W/kg

GPRS 1900/Body Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.669 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.043 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.112 W/kg

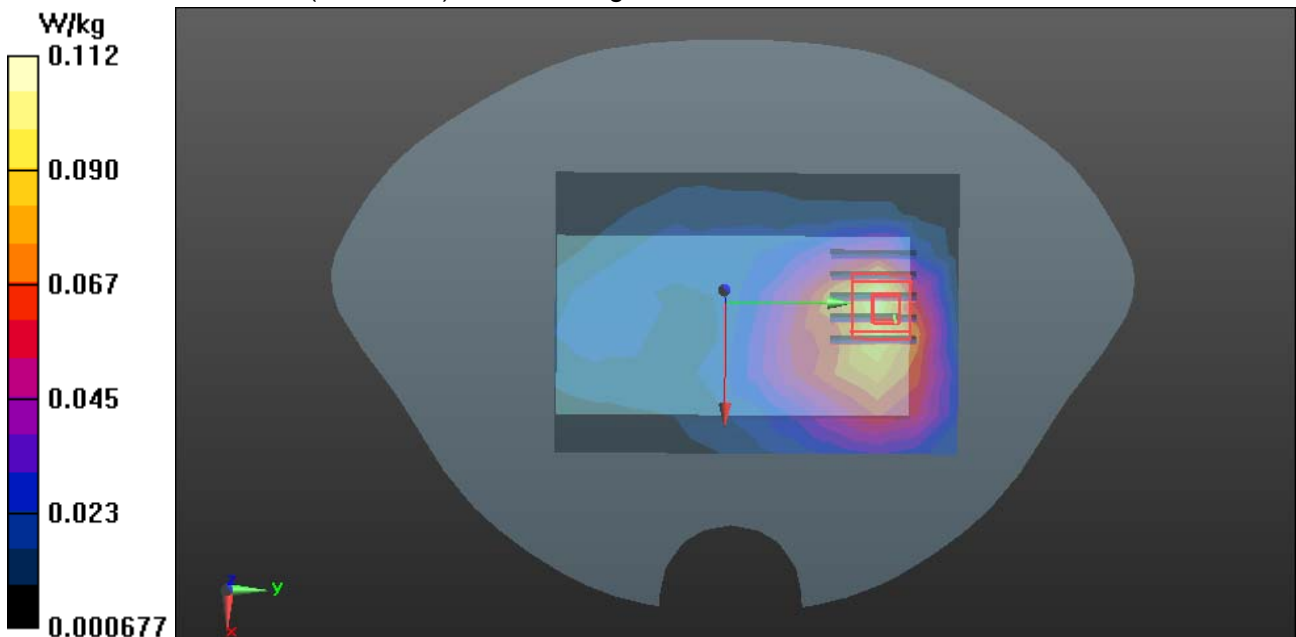

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

GPRS 1900-Body Rear Low CH51

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Body Rear Low CH512/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.673 W/kg

GPRS 1900/Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.104 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.232 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.769 W/kg

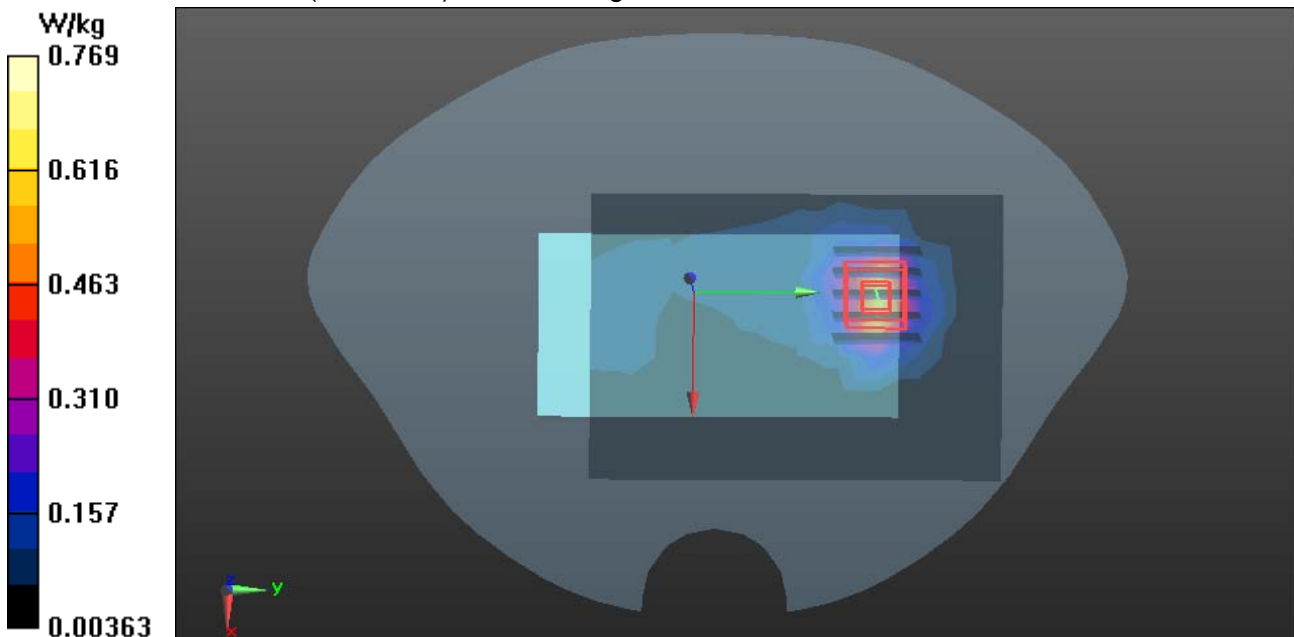


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

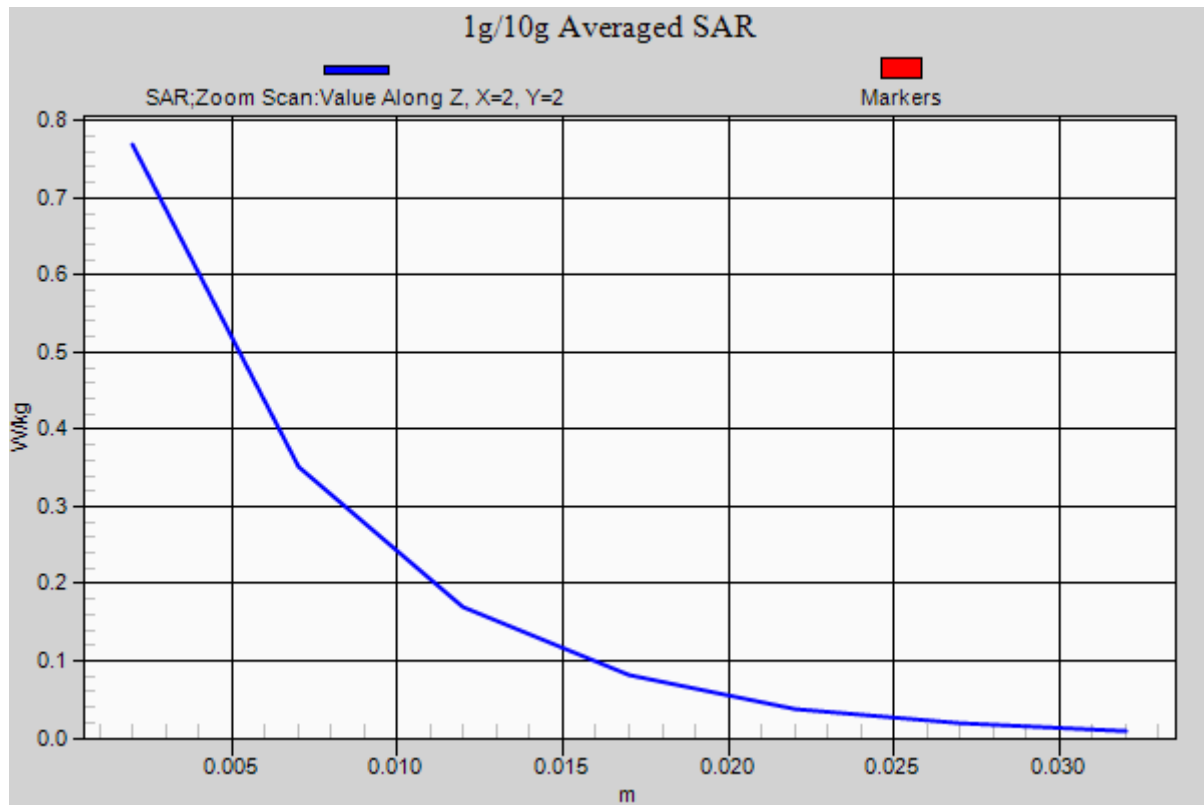

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

GPRS 1900-Body-Right Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS1900/Body Right Low CH512/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0144 W/kg

GPRS1900/Body Right Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.783 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00599 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0149 W/kg

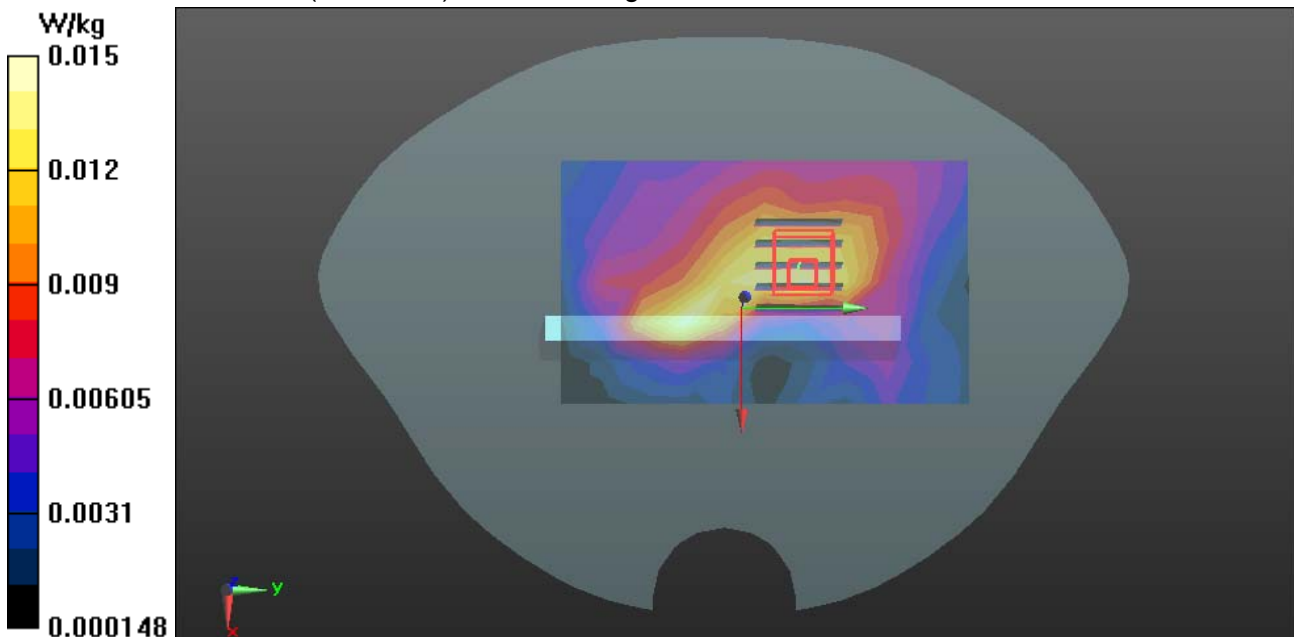

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

GPRS 1900-Body-Left Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Body Left Low CH512/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 W/kg

GPRS 1900/Body Left Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.449 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.050 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.153 W/kg

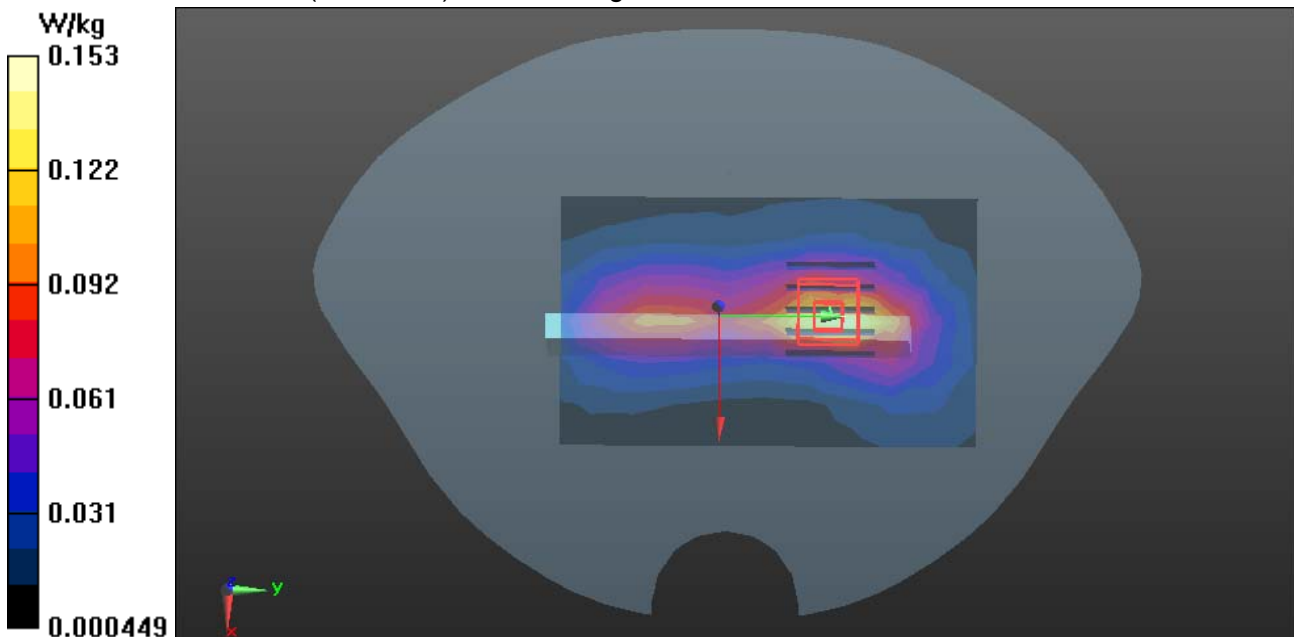

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/3/2014

GPRS 1900-Body-Bottom Low CH512

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Body Bottom Low CH512/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.143 W/kg

GPRS 1900/Body Bottom Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.978 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.051 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.148 W/kg

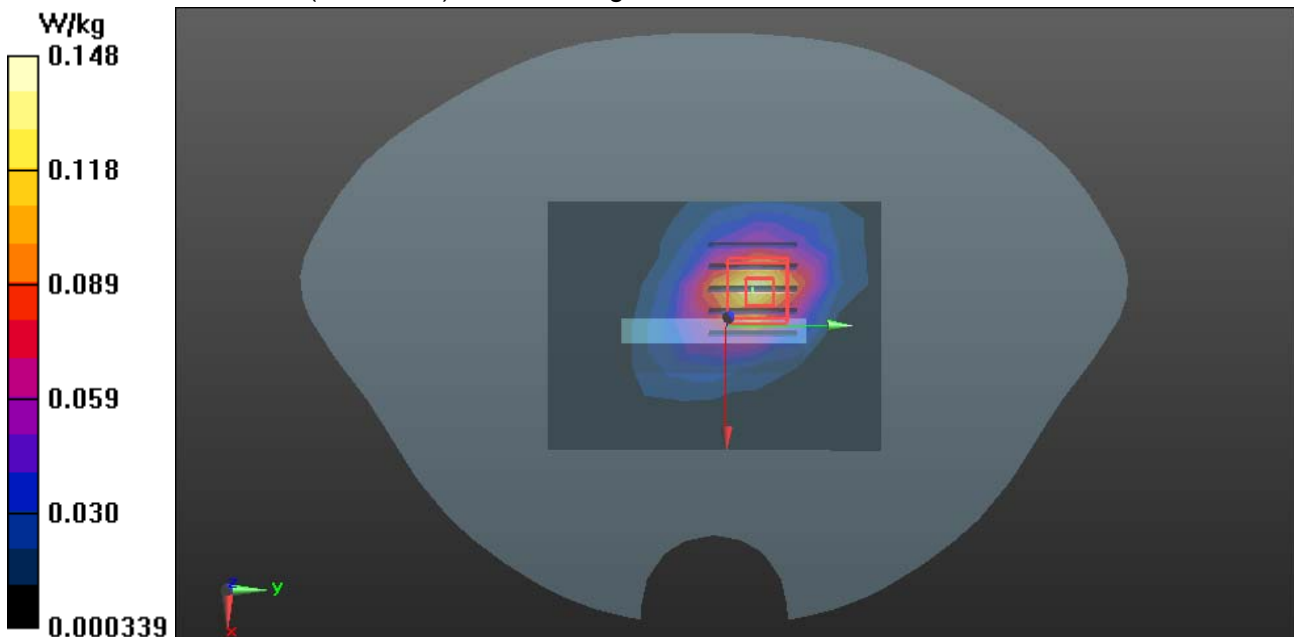

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body Front Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Body Front Low CH9262/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 W/kg

WCDMA/Body Front Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.728 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.078 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.199 W/kg

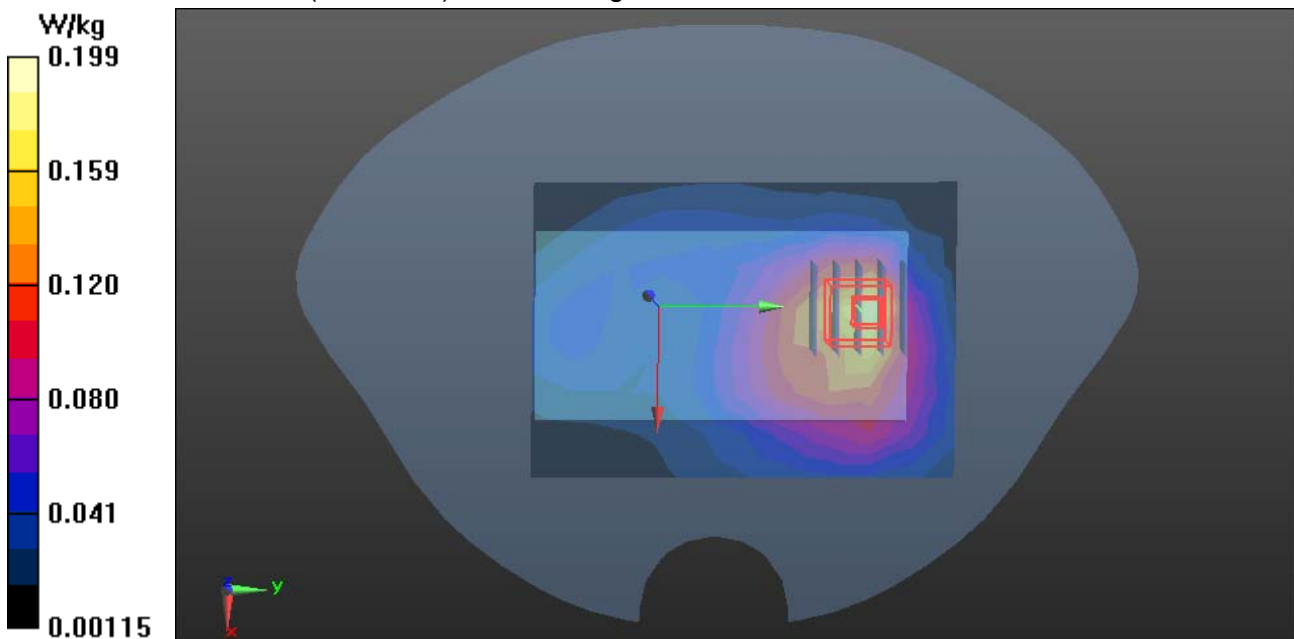

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body Rear Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Body Rear Low CH9262/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.43 W/kg

WCDMA/Body Rear Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.191 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.438 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.41 W/kg

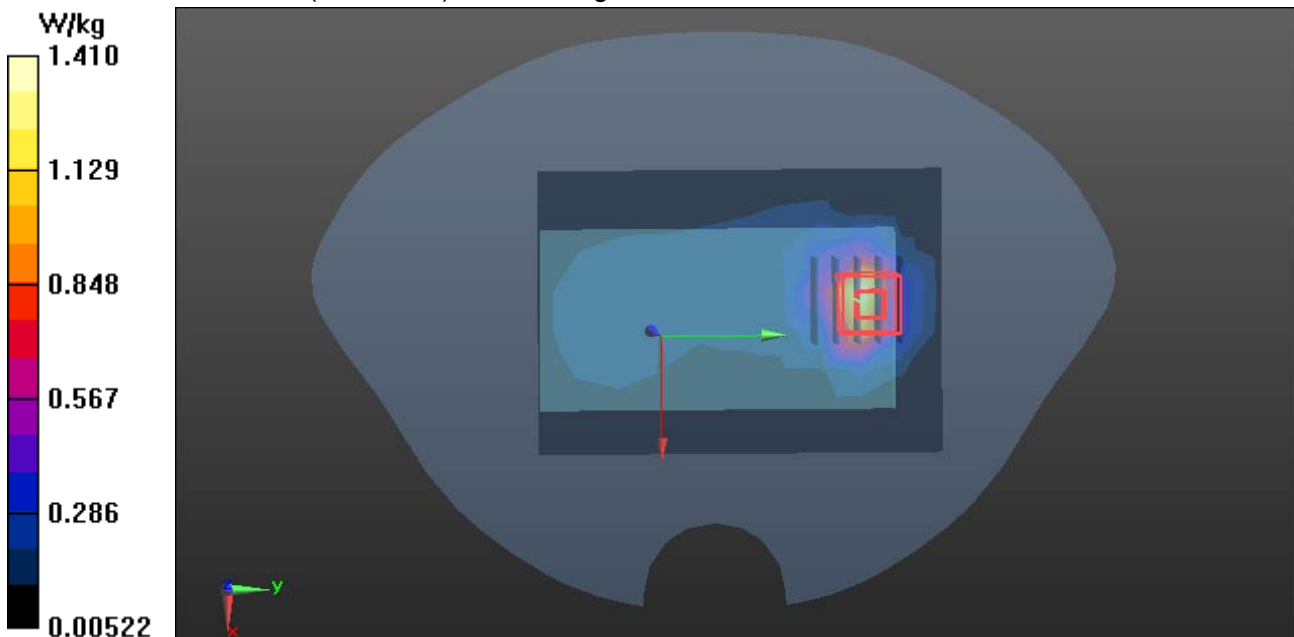


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

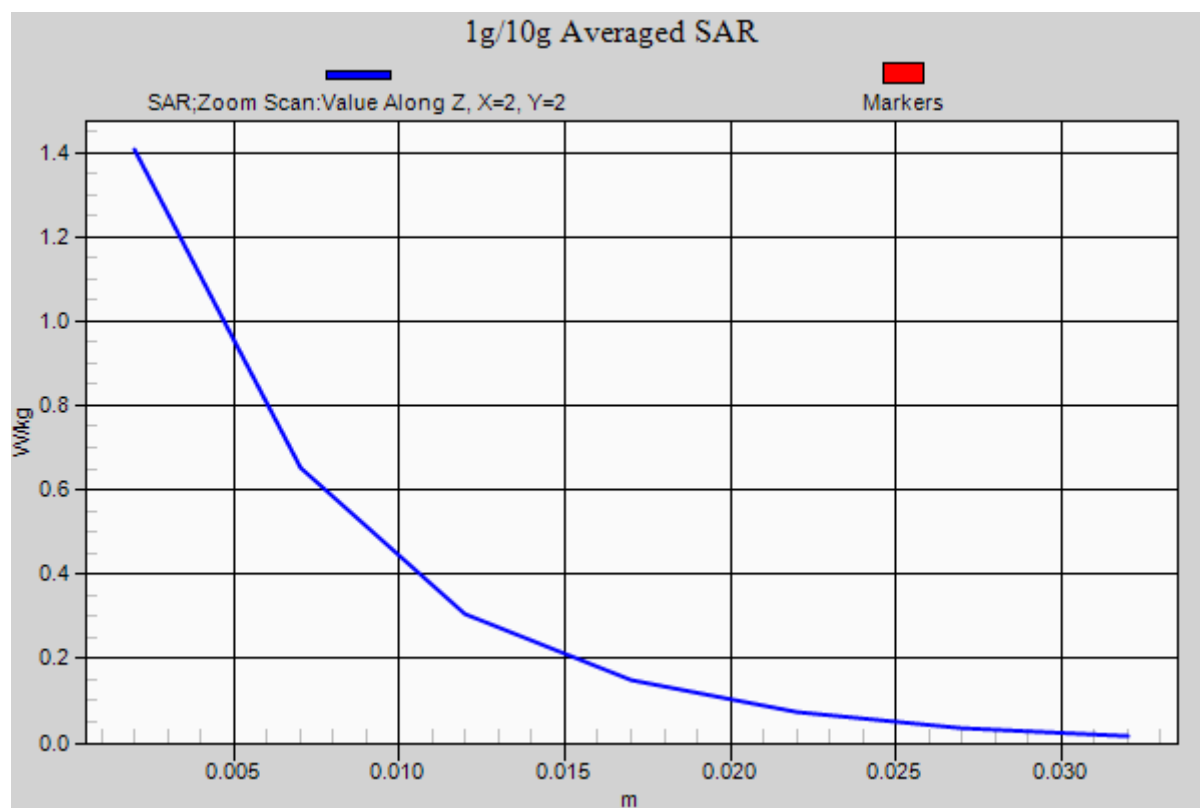

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body Rear Middle CH9400

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.561$ S/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Body Rear Middle CH9400/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.978 W/kg


WCDMA/Body Rear Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.840 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

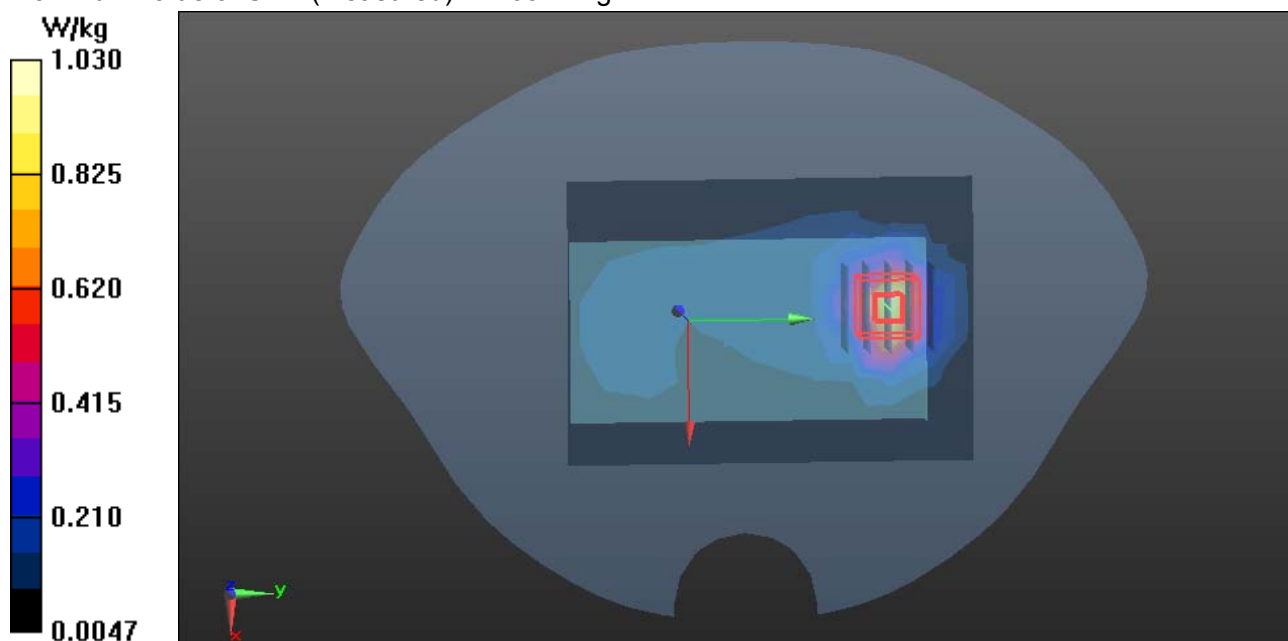

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body Rear High CH9538

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.589$ S/m; $\epsilon_r = 53.652$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Body Rear High CH9538/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.00 W/kg


WCDMA/Body Rear High CH9538/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.357 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.946 W/kg

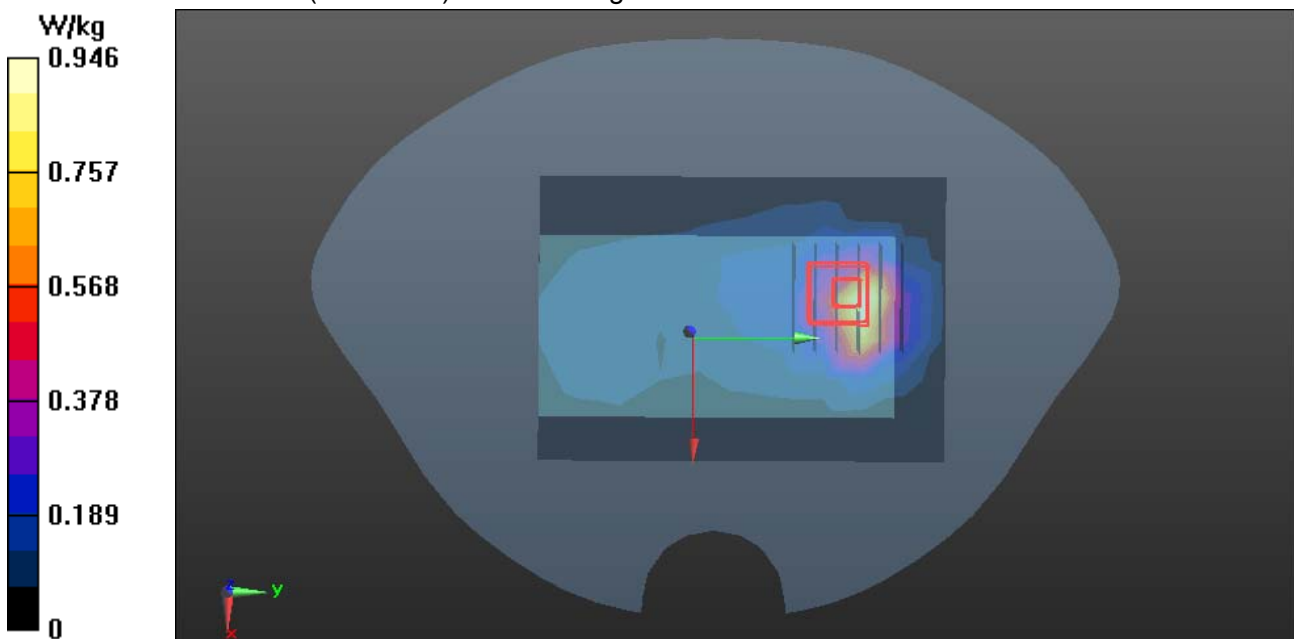

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body Low CH9262 Repeat

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/Body Rear Low CH9262 Repeat/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.26 W/kg

WCDMA/Body Rear Low CH9262 Repeat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.427 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.435 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.47 W/kg

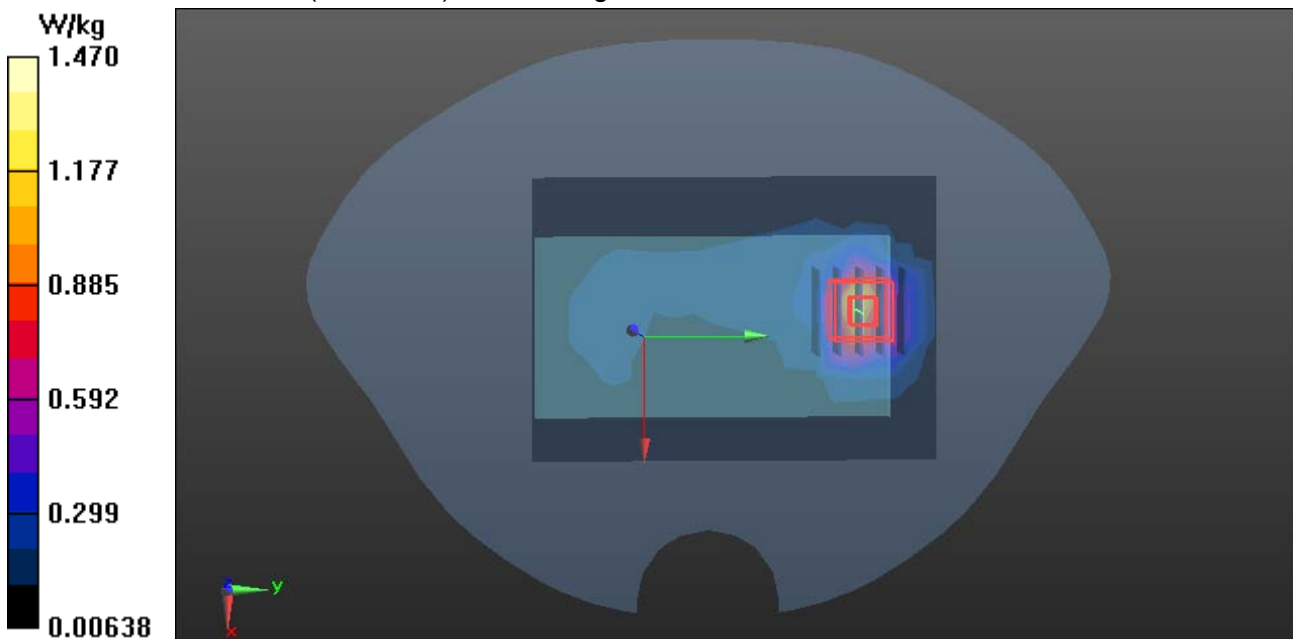

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body-Right Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Right Low CH9262/Area Scan (11x7x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0256 W/kg

WCDMA/WCDMA Band II Body Right Low CH9262/Zoom Scan (6x6x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.524 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0380 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.011 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0279 W/kg

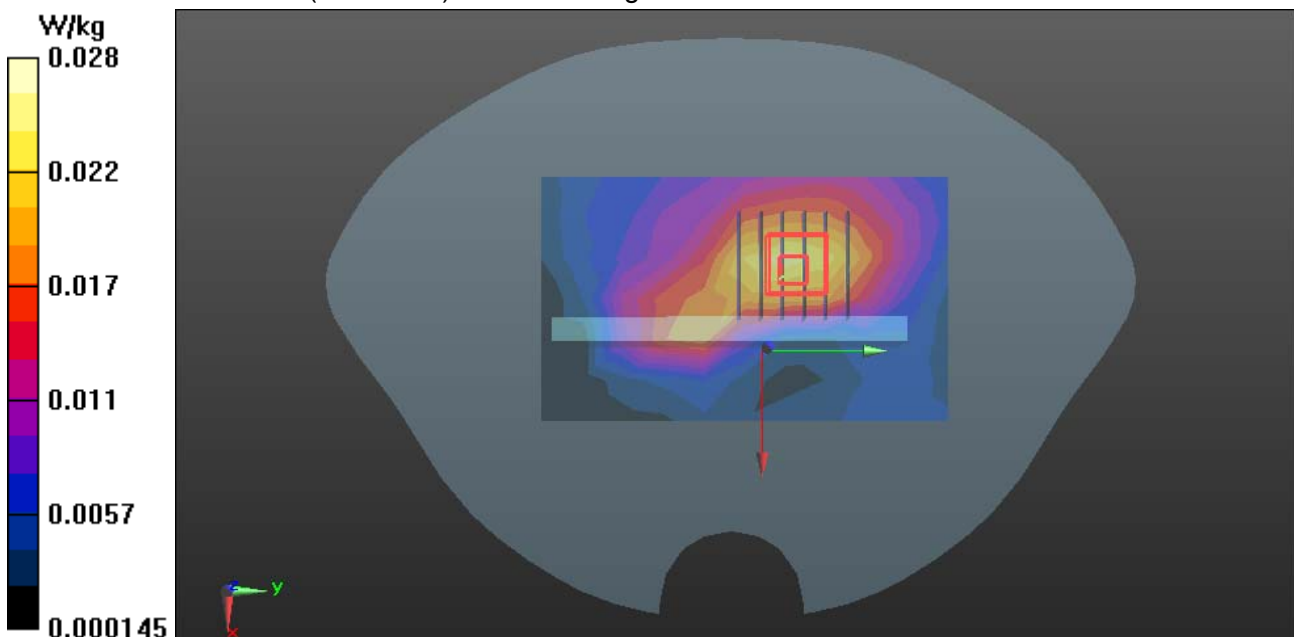

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body-Left Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Rear Low CH9262/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.211 W/kg

WCDMA/WCDMA Band II Body Rear Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.815 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.081 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.247 W/kg

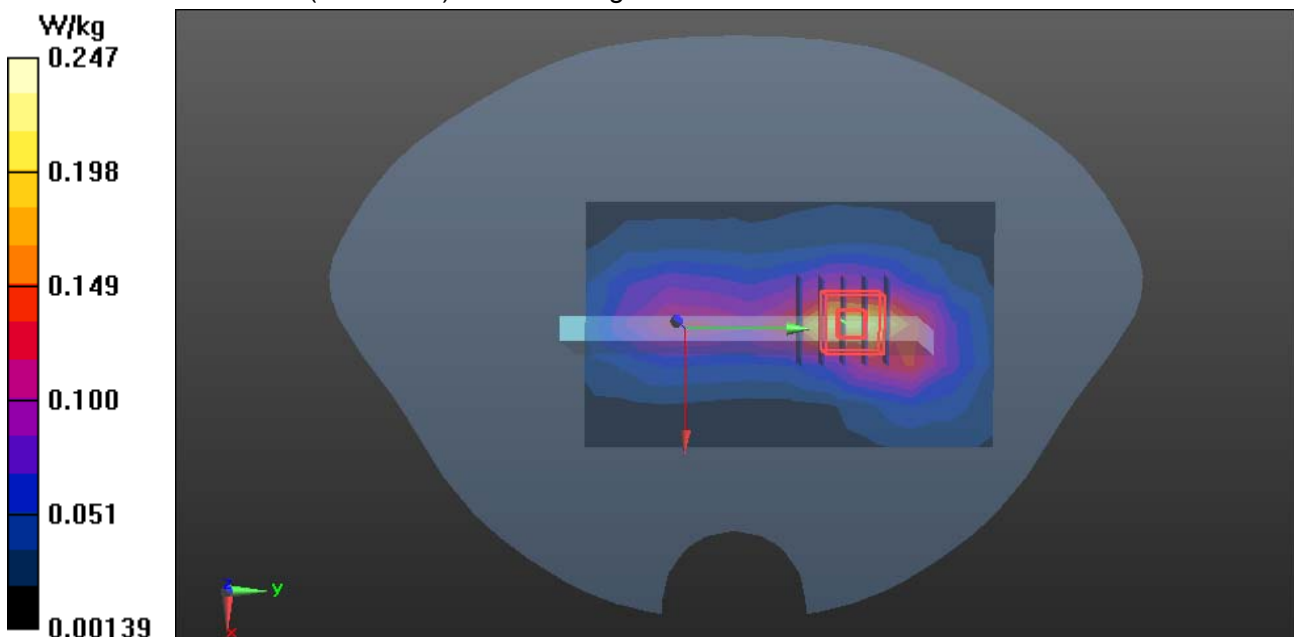

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/4/2014

WCDMA Band II-Body-Bottom Low CH9262

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 53.712$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Bottom Low CH9262/Area Scan (9x7x1): Measurement grid:
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.254 W/kg

WCDMA/WCDMA Band II Body Bottom Low CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.941 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.094 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.271 W/kg

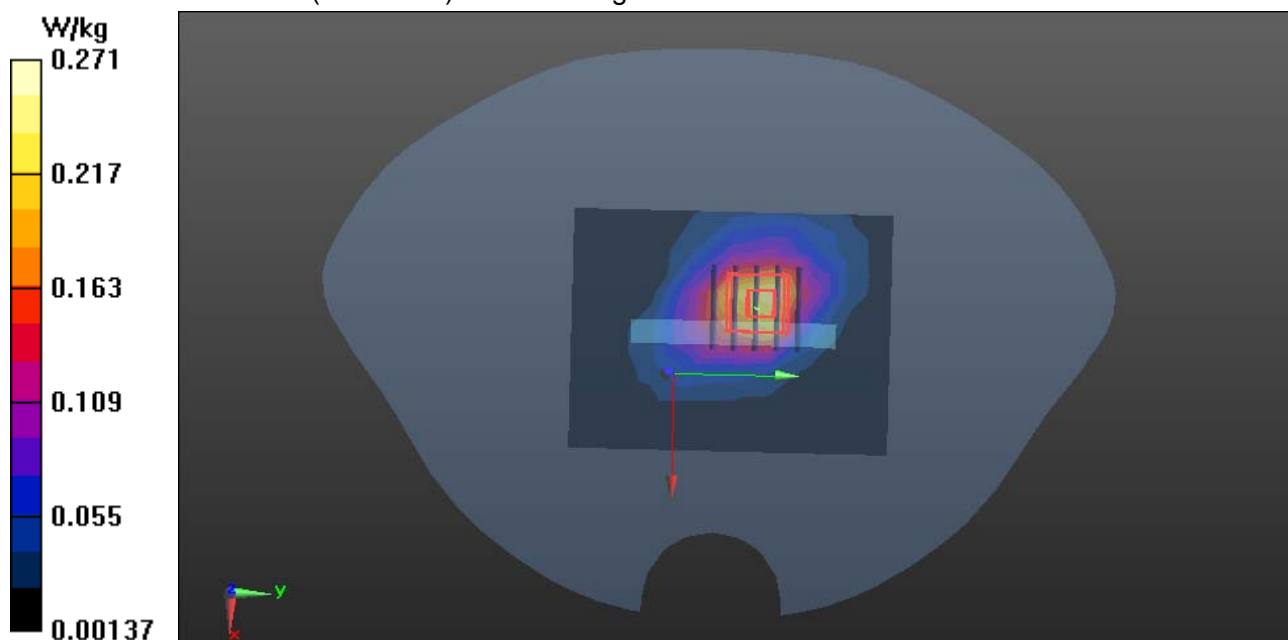

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

WCDMA Band V-Body Front High CH423

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.786$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Front High CH4233/Area Scan (11x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.186 W/kg

WCDMA/WCDMA Band V Body Front High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.122 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

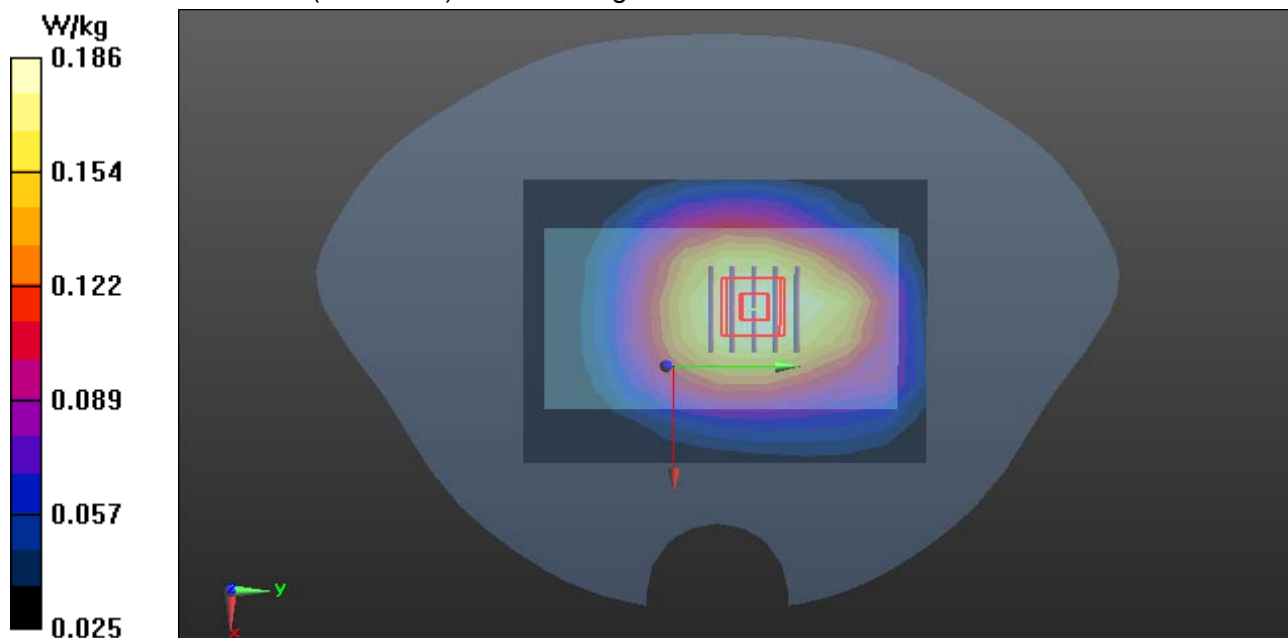

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

WCDMA Band V-Body Rear High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.786$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Rear High CH4233/Area Scan (11x8x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.493 W/kg

WCDMA/WCDMA Band V Body Rear High CH4233/Zoom Scan (6x6x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.644 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

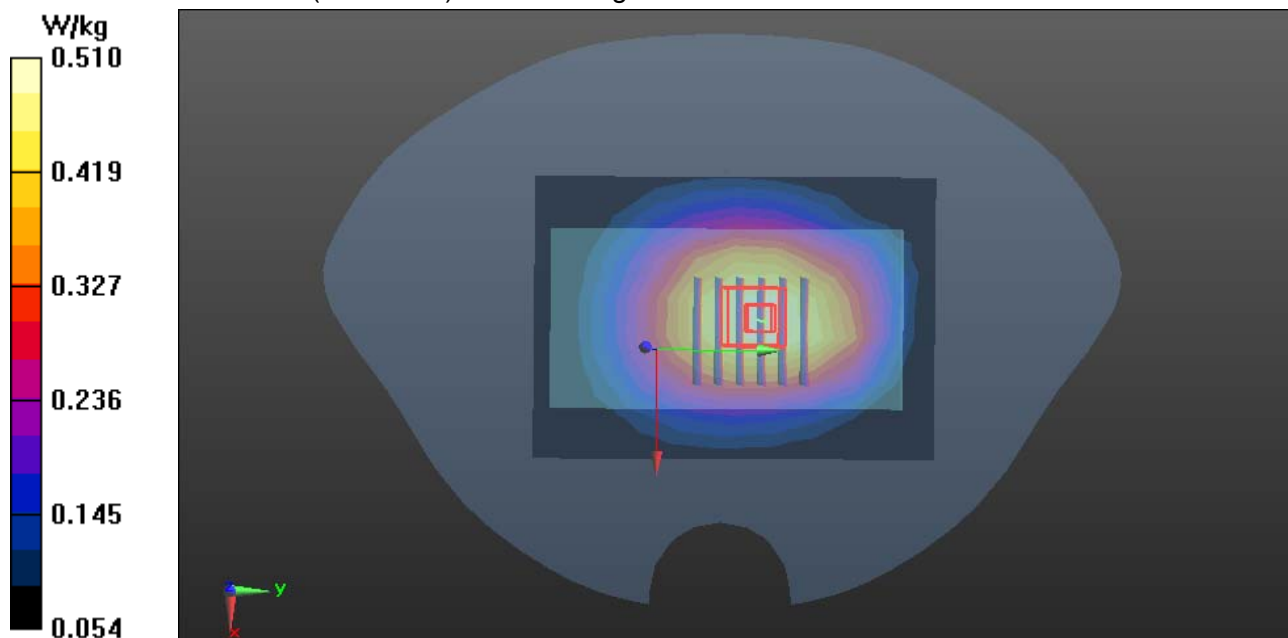


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

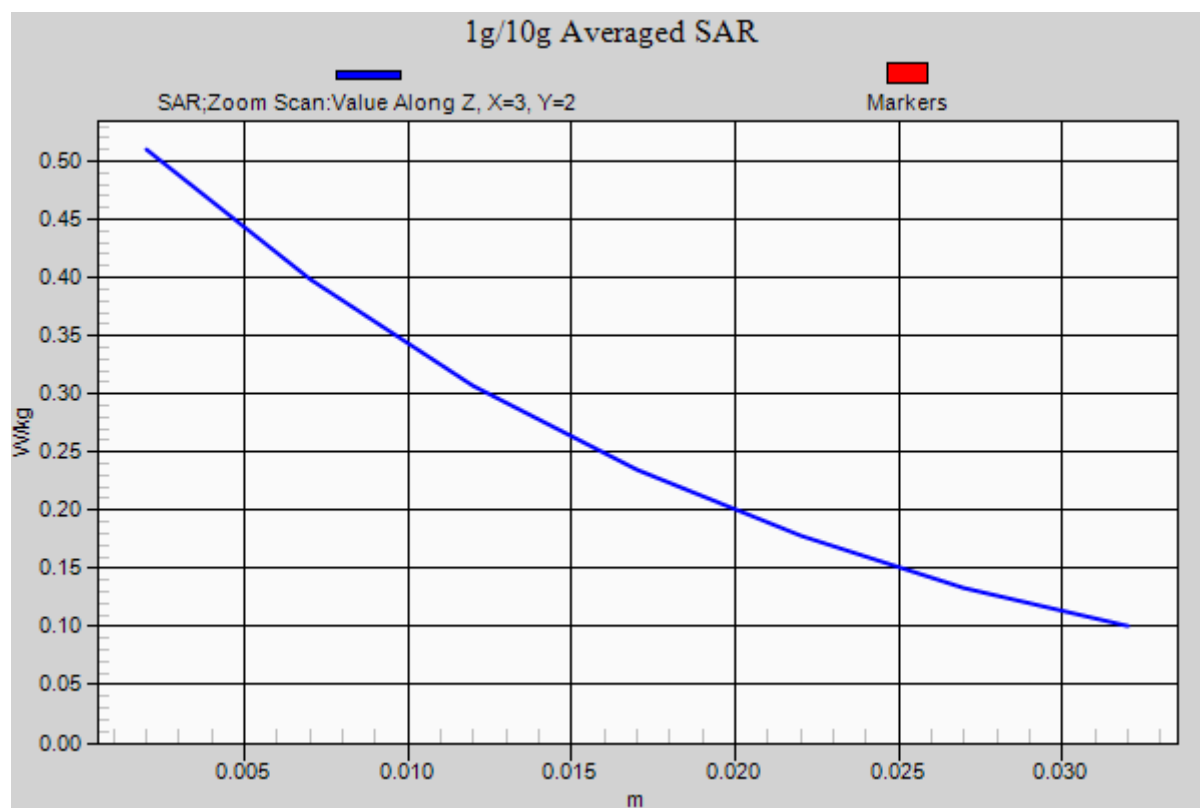

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

WCDMA Band V-Body-Right High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.786$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Right High CH4233/Area Scan (11x7x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.289 W/kg

WCDMA/WCDMA Band V Body Right High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.611 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

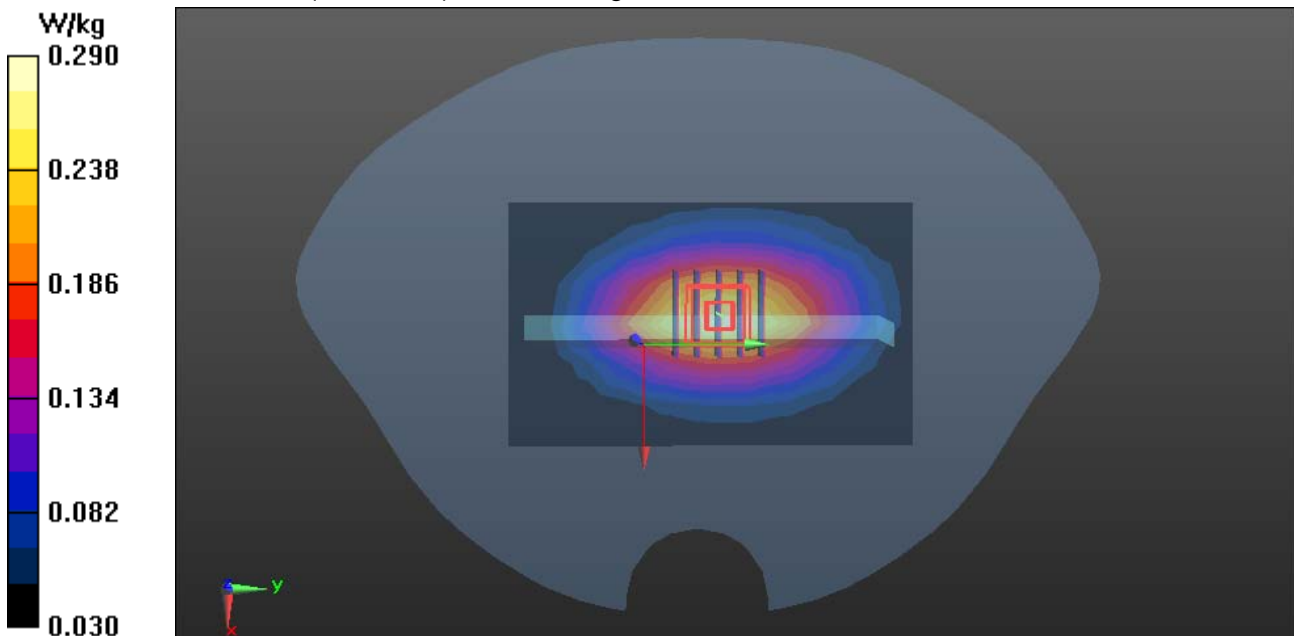

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

WCDMA Band V-Body-Left High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.786$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Left High CH4233/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.299 W/kg


WCDMA/WCDMA Band V Body Left High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.268 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

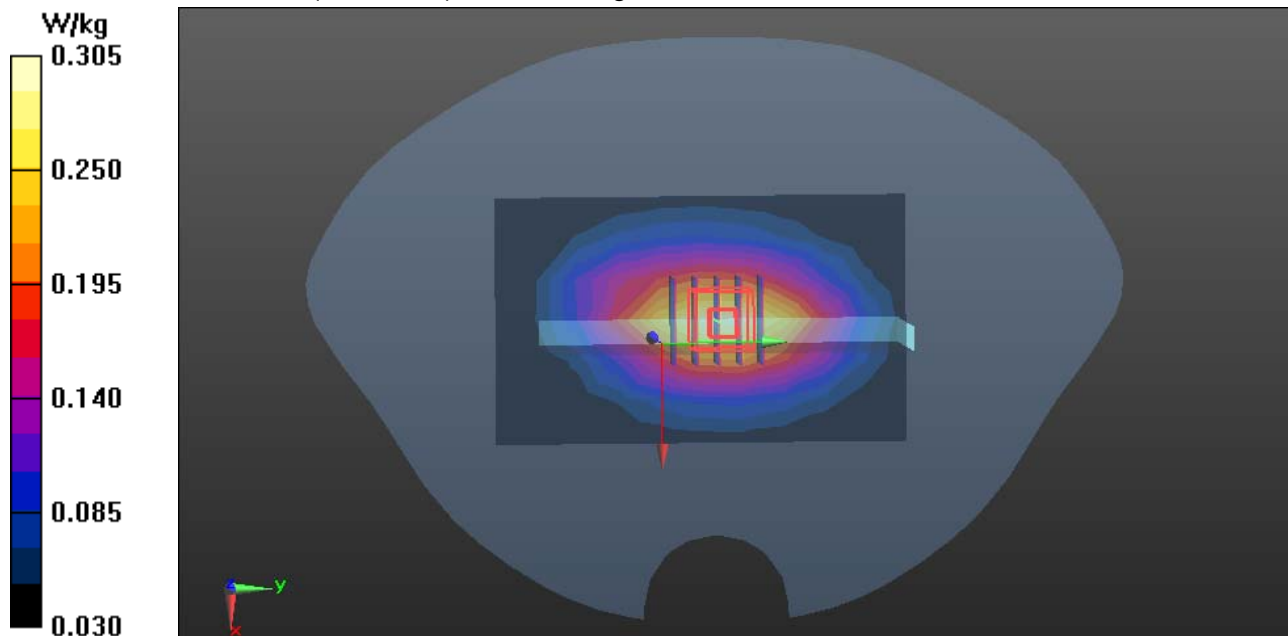

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/2/2014

WCDMA Band V-Body-Bottom High CH4233

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.966$ S/m; $\epsilon_r = 52.786$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Bottom High CH4233/Area Scan (9x7x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0778 W/kg


WCDMA/WCDMA Band V Body Bottom High CH4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.276 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0935 W/kg

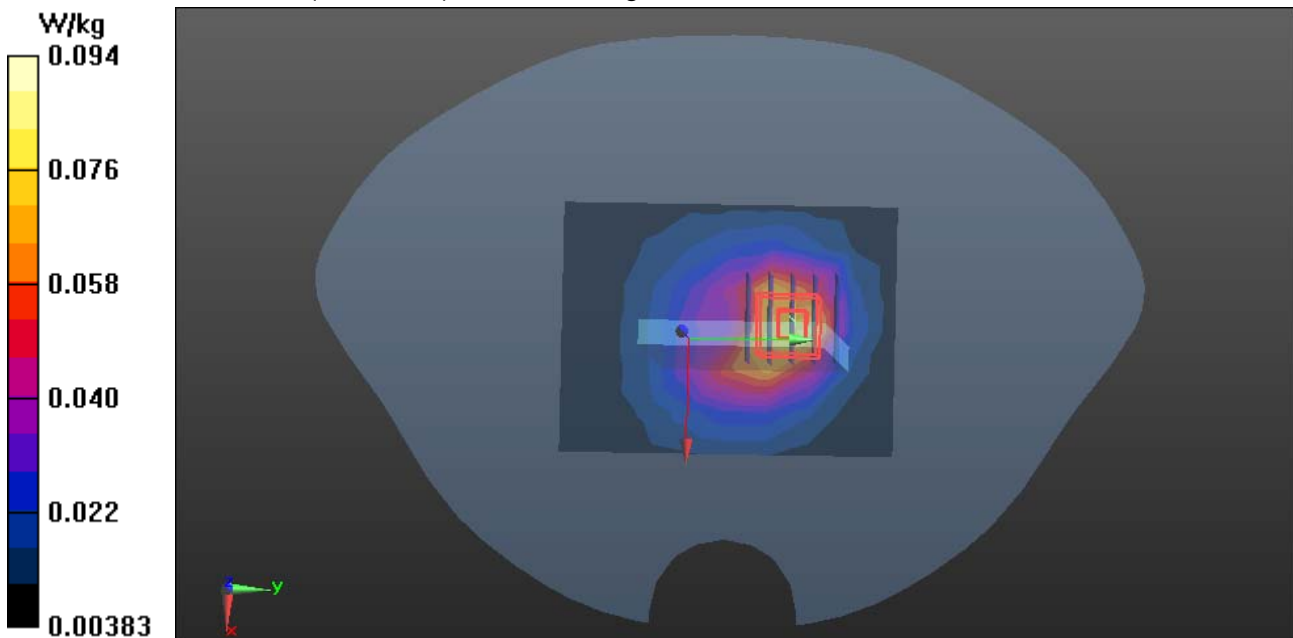

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Body Front High CH1

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.986 \text{ S/m}$; $\epsilon_r = 50.96$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Front High CH11/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0547 W/kg


WIFI/IEEE802.11b Body Front High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.344 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0530 W/kg

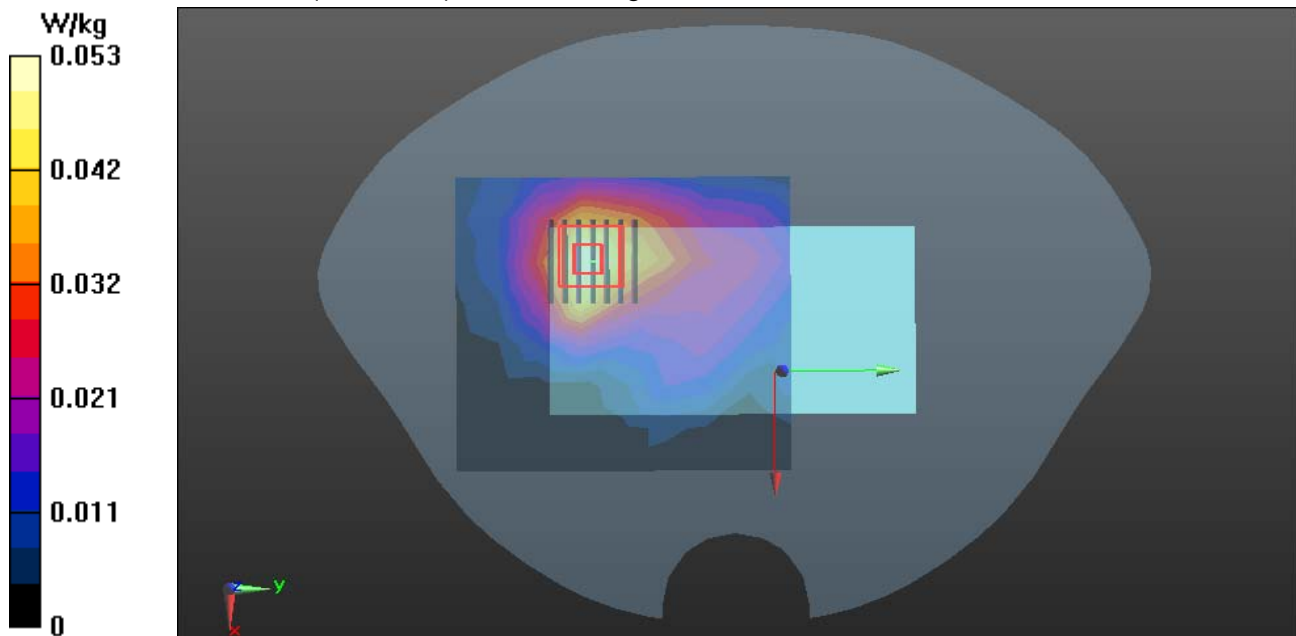

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/5/2014

WIFI-Body Rear High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.986 \text{ S/m}$; $\epsilon_r = 50.96$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Rear High CH11/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 W/kg


WIFI/IEEE802.11b Body Rear High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.205 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

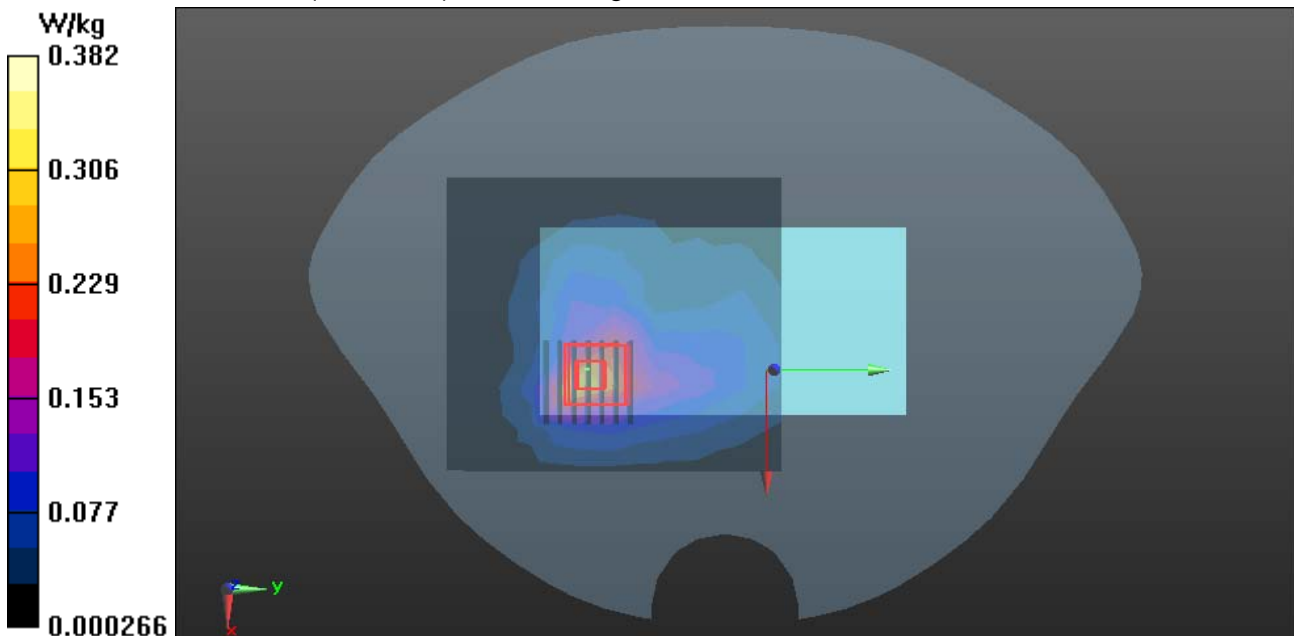


Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

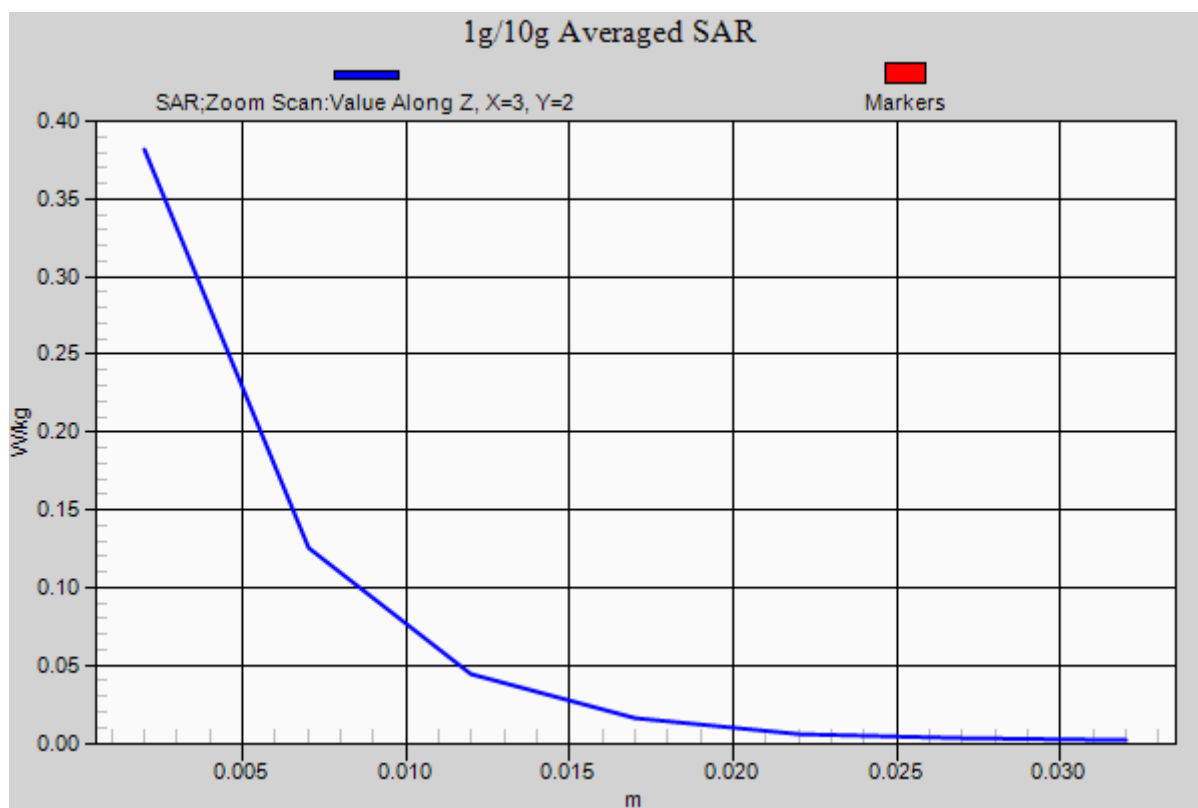

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2014

WIFI-Body-Left High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.986 \text{ S/m}$; $\epsilon_r = 50.96$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Left High CH11/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.192 W/kg


WIFI/IEEE802.11b Body Left High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.879 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

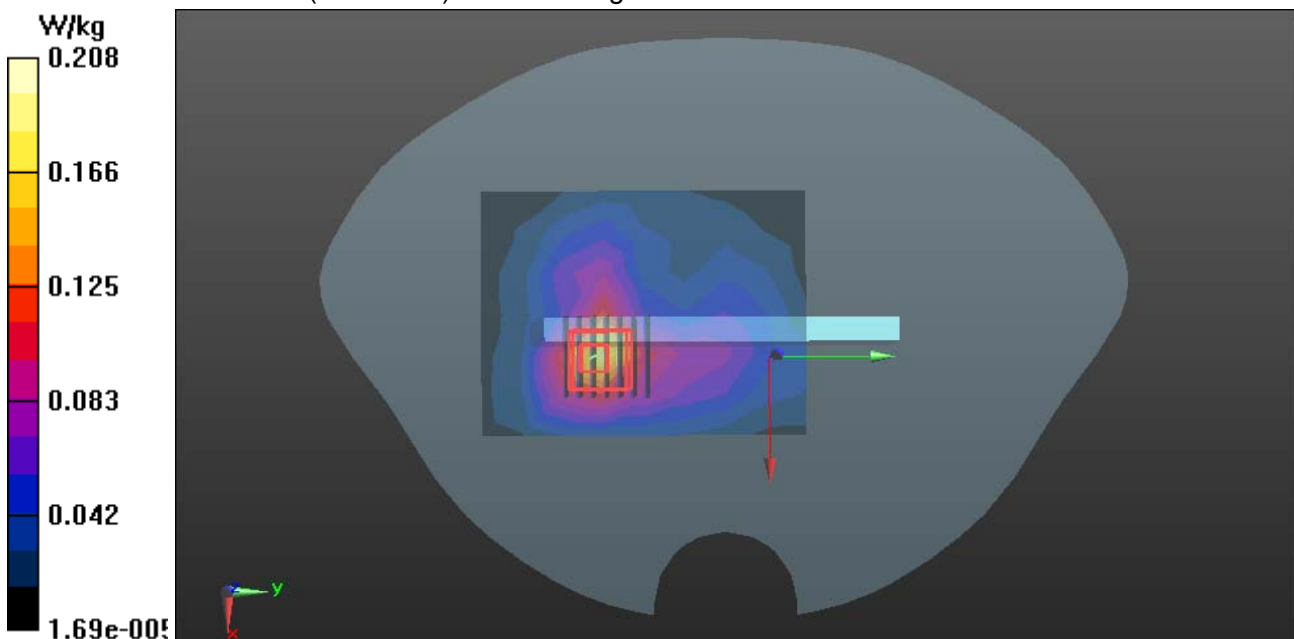

Compliance Certification Services Inc.

Report No: C140226S06-SF

FCC ID: 2AB4I-EVE008

Date of Issue :March 24, 2014

Test Laboratory: Compliance Certification Services Inc.

Date: 3/6/2014

WIFI-Body-Top High CH11

DUT: Handheld Mobile Digital Device; Type: EVE008; Serial: 355201262109353

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.986 \text{ S/m}$; $\epsilon_r = 50.96$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Top High CH11/Area Scan (8x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.203 W/kg

WIFI/IEEE802.11b Body Top High CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.535 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

