

EMC TEST REPORT for Intentional Radiator (Wi-Fi Function)
No. 1401401081SHA-001

Applicant : LUMI LEGEND ELECTRICAL CO., LTD
No.18,lane239,Beihai
Road,Jiangbei,Ningbo,China|315032
Manufacturer : LUMI LEGEND ELECTRICAL CO., LTD
No.18,lane239,Beihai
Road,Jiangbei,Ningbo,China|315032
Product Name : WIFI Switch
Type/Model : SW5101M

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2013): Radio Frequency Devices

ANSI C63.4 (2009): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Date of issue: May 21, 2014

Prepared by:



Wade Zhang (Project engineer)

Reviewed by:



Daniel Zhao (Reviewer)



Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	4
1.1 Applicant Information.....	4
1.2 Identification of the EUT	4
1.3 Technical specification	5
1.4 Mode of operation during the test / Test peripherals used.....	5
2. TEST SPECIFICATION	6
2.1 Instrument list	6
2.2 Test Standard	6
2.3 Test Summary	7
3. MINIMUM 6dB BANDWIDTH	8
3.1 Limit.....	8
3.2 Test Configuration	8
3.3 Test Procedure and test setup.....	8
3.4 Test Protocol	9
4. MAXIMUM PEAK OUTPUT POWER	13
4.1 Test limit	13
4.2 Test Configuration	13
4.3 Test procedure and test setup.....	13
4.4 Test protocol	14
5. POWER SPECTRUM DENSITY	15
5.1 Test limit	15
5.2 Test Configuration	15
5.3 Test procedure and test setup.....	15
5.4 Test Protocol	16
6. RADIATED EMISSION	20
6.1 Test limit	20
6.2 Test Configuration	20
6.3 Test procedure and test setup.....	21
6.4 Test protocol	22
7. EMISSION OUTSIDE THE FREQUENCY BAND	27
7.1 Limit.....	27
7.2 Test Configuration	27
7.3 Test procedure and test setup.....	27
7.4 Test protocol	28
8. POWER LINE CONDUCTED EMISSION	54
8.1 Limit.....	54
8.2 Test configuration	54
8.3 Test procedure and test set up.....	55
8.4 Test protocol	56

1. General Information

1.1 Applicant Information

Applicant : LUMI LEGEND ELECTRICAL CO., LTD
No.18,lane239,Beihai Road,Jiangbei,Ningbo,China|315032

Name of contact : Mr. Hank Zhang

Tel : 86 0574 88165637

Fax : 86 0587 88165656

Manufacturer : LUMI LEGEND ELECTRICAL CO., LTD
No.18,lane239,Beihai Road,Jiangbei,Ningbo,China|315032

1.2 Identification of the EUT

Equipment: WIFI Switch

Type/model: SW5101M

FCC ID: 2AB5K-SW5101M

1.3 Technical specification

Frequency Range:	2412 - 2462 MHz
Modulation:	CCK,BPSK,QPSK,DSSS,OFDM
Gain of Antenna:	Integral, 2.0 dBi
Rating:	120VAC 60Hz , 15A
Description of EUT:	The EUT has only one model. The EUT is a switch controlled by RF signal.
Channel Description:	11Channel for 2412MHz~2462MHz.

1.4 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Freq. Band	Modulation	Lowest(MHz)	Middle(MHz)	Highest(MHz)
2412-2462MHz	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462

Test software setting:

The test setting software for 802.11b/g/n(HT20) is offered by the manufactory.

Data rate VS Power

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

2.4GHz Band:

After this pre-scan, we choose the following table of the data rata as the worst case.

Freq. Band	Modulation	Worst case data rate
2400-2483.5MHz	802.11b	11Mbps
	802.11g	1Mbps
	802.11 n(HT20)	65Mbp

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2013-10-21	2014-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2013-10-21	2014-10-20
Test Receiver	ESCI 7	R&S	EC4501	2013-12-29	2014-12-28
Spectrum Analyzer	N9010	Agilent	EC4890	2013-10-21	2014-10-20
Power meter	ML 2495A	Anritsu	EC 4895	2013-10-21	2014-10-20
A.M.N.	ESH2-Z5	R&S	EC 3119	2014-1-9	2015-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2013-5-16	2015-5-14
Horn antenna	HF 906	R&S	EC 3049	2013-5-13	2015-5-11
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2013-4-12	2015-4-10
Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2013-4-12	2015-4-10
Log-period antenna	AT 1080	AR	EC 3044-7	2013-5-22	2014-5-21
Biconical antenna	3109PX	ETS	EC3564	2013-8-25	2014-8-24
Semi-anechoic chamber	-	Albatross project	EC 3048	2013-5-21	2014-5-20
Shielded room	-	Zhongyu	EC 2838	2014-1-12	2016-1-11
Shielded room	-	Zhongyu	EC 2839	2014-1-12	2016-1-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2014-2-1	2015-1-31
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2014-2-1	2015-1-31
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2014-2-1	2015-1-31
Band Reject Filter	WRCGV 2400/2483-2390/2493-35/10SS	Wainwright	EC4297-4	2014-2-1	2015-1-31

2.2 Test Standard

47CFR Part 15 (2013)
ANSI C63.4 (2009)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai.

TEST ITEM	FCC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	Pass
Maximum peak output power	15.247(b)	Pass
Power spectrum density	15.247(e)	Pass
Radiated emission	15.205 & 15.209	Pass
Emission outside the frequency band	15.247(d)	Pass
Power line conducted emission	15.207	Pass


3. Minimum 6dB Bandwidth

Test result: PASS

3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Test Configuration

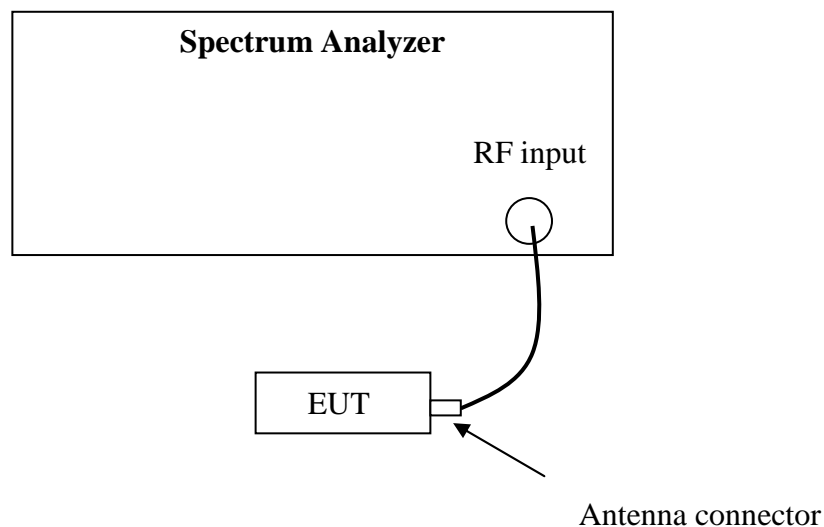

3.3 Test Procedure and test setup


The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r01” for compliance to FCC 47CFR 15.247 requirements.

3.4 Test Protocol

Temperature : 25°C
Relative Humidity : 55%


Mode	CH	Bandwidth (MHz)	Limit (MHz)
802.11b	L	8.40	≥0.5
	M	9.00	
	H	8.92	

Frequency L

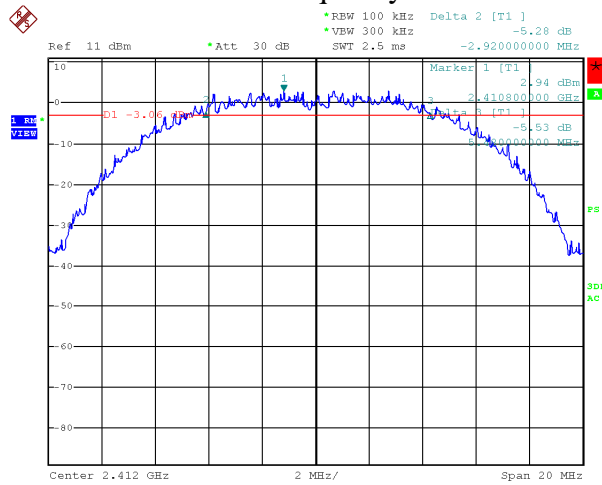


Date: 15.APR.2014 12:10:08

Frequency M

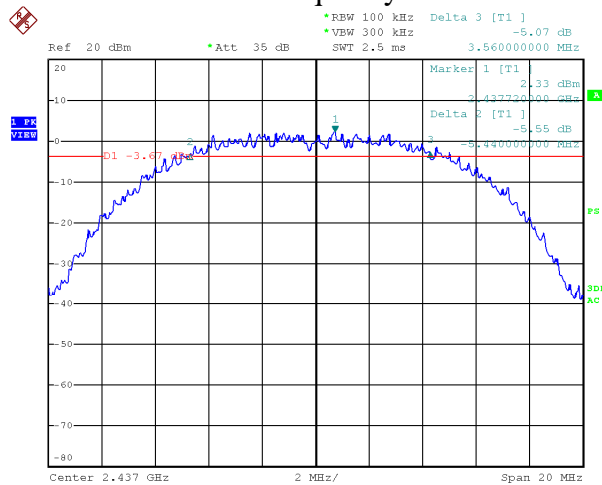


Date: 15.APR.2014 15:09:46

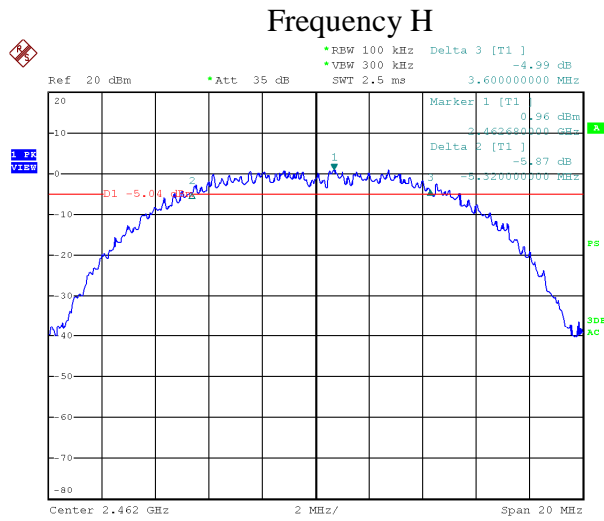


Date: 15.APR.2014 15:15:19


Mode	CH	Bandwidth (MHz)	Limit (MHz)
802.11g	L	15.84	≥0.5
	M	16.36	
	H	16.40	

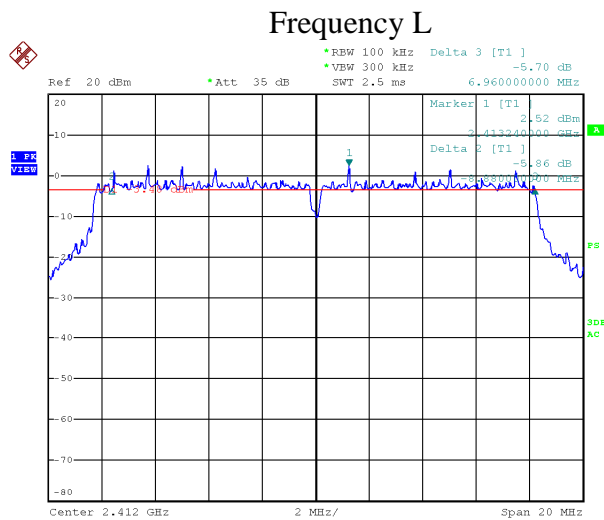

Date: 15.APR.2014 15:20:51

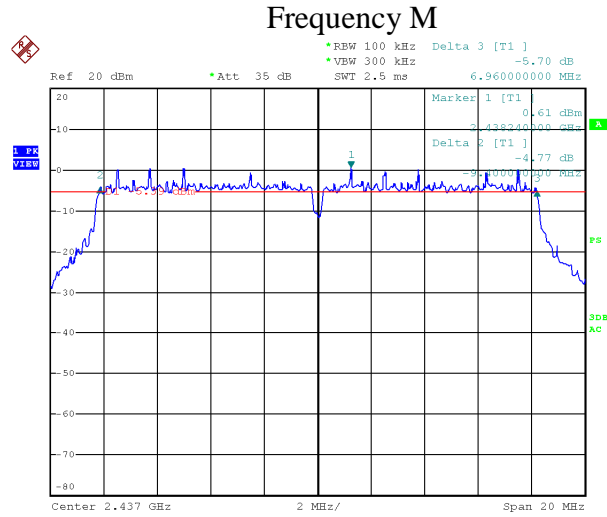


Date: 15.APR.2014 15:25:32

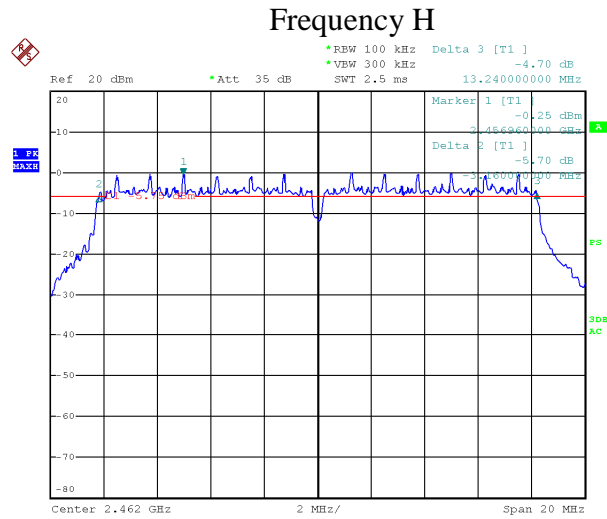

Date: 15.APR.2014 15:28:04


Mode	CH	Bandwidth (MHz)	Limit (MHz)
802.11n(HT20)	L	17.64	≥0.5
	M	17.72	
	H	17.68	

Frequency L

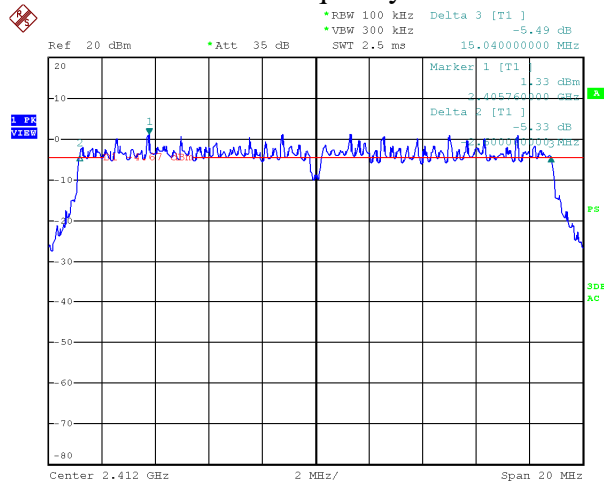


Date: 15.APR.2014 15:40:44

Frequency M

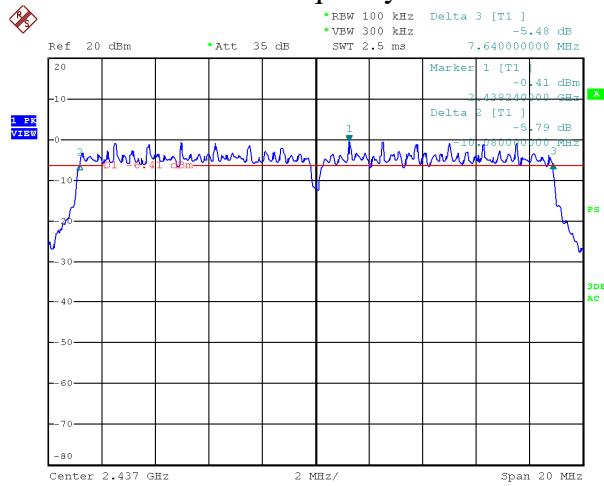

Date: 15.APR.2014 15:44:22

Frequency H

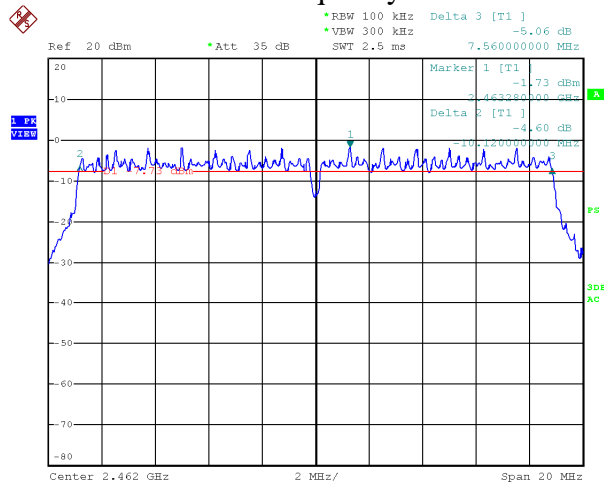

Date: 15.APR.2014 15:50:52

4. Maximum peak output power


Test result: Pass

4.1 Test limit

- ☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- ☐ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
- ☒ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Test Configuration

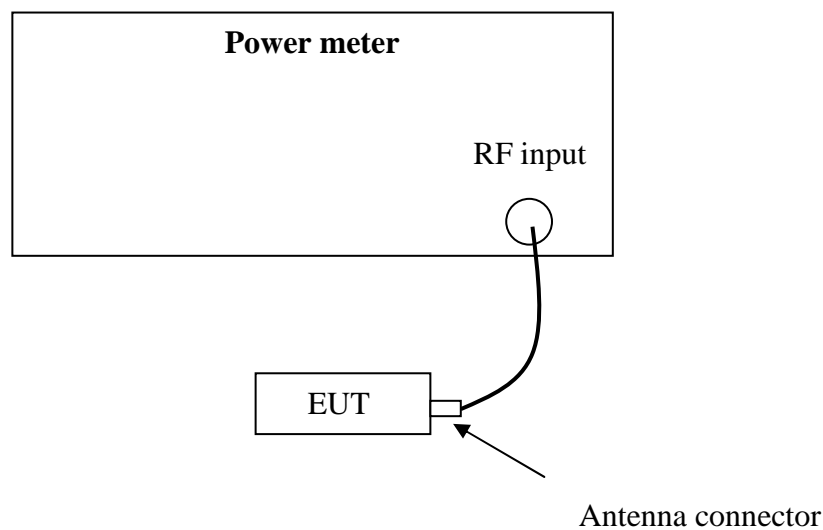

4.3 Test procedure and test setup

The EUT was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance v03r01" for compliance to FCC 47CFR 15.247 requirements (clause 9.1.2).

4.4 Test protocol

Temperature : 25 °C

Relative Humidity : 55 %

Mode	Freq. (MHz)	Reading (dBm)	Limit (dBm)	Margin (dB)
802.11b	2412	18.32	30.00	11.68
	2437	17.88	30.00	12.12
	2462	17.14	30.00	12.86
802.11g	2412	22.23	30.00	7.77
	2412	23.38	30.00	6.62
	2412	22.82	30.00	7.18
802.11n(HT20)	2412	18.89	30.00	11.11
	2437	17.61	30.00	12.39
	2462	16.23	30.00	13.77


5. Power spectrum density

Test result: Pass

5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Configuration

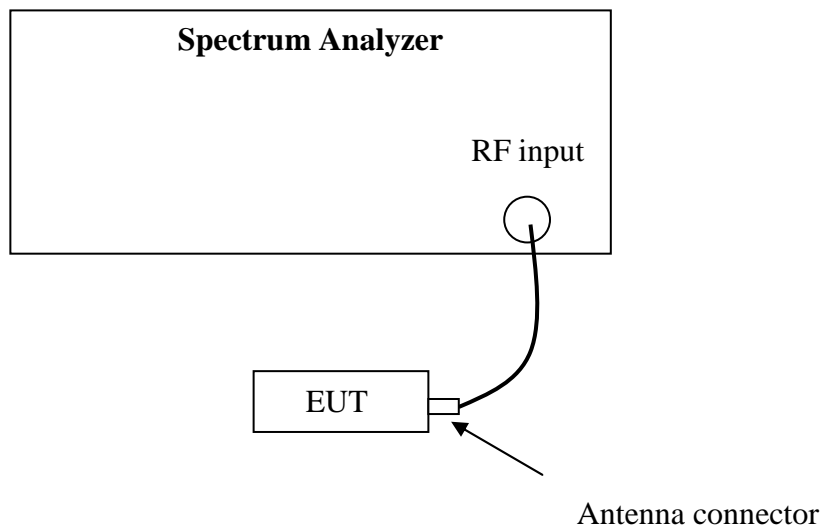

5.3 Test procedure and test setup

The power output per FCC §15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r01” (clause 10.2) for compliance to FCC 47CFR 15.247 requirements.


5.4 Test Protocol

Temperature : 25 °C

Relative Humidity: 55 %


Mode	CH	Cable loss (dB)	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11b	L	2.00	2.98	≤8.00
	M	2.00	2.33	
	H	2.00	0.96	

Frequency L

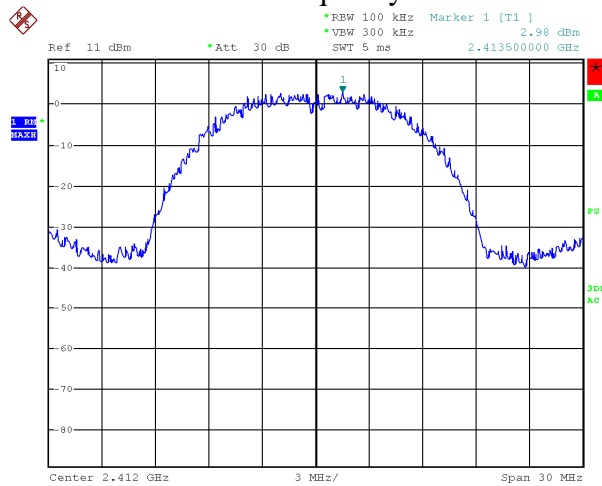


Date: 15.APR.2014 12:18:16

Frequency M

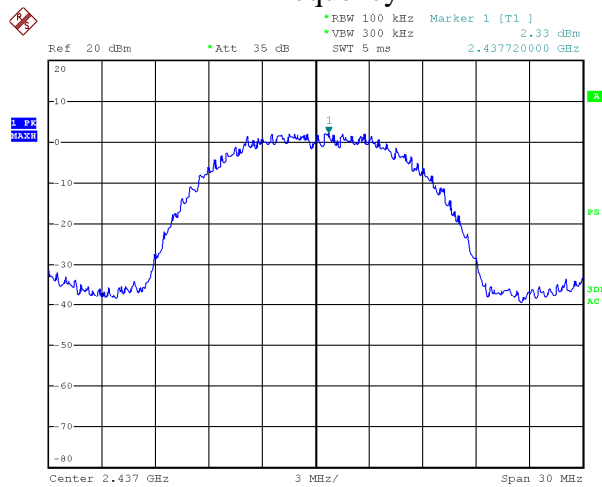


Date: 15.APR.2014 15:11:47

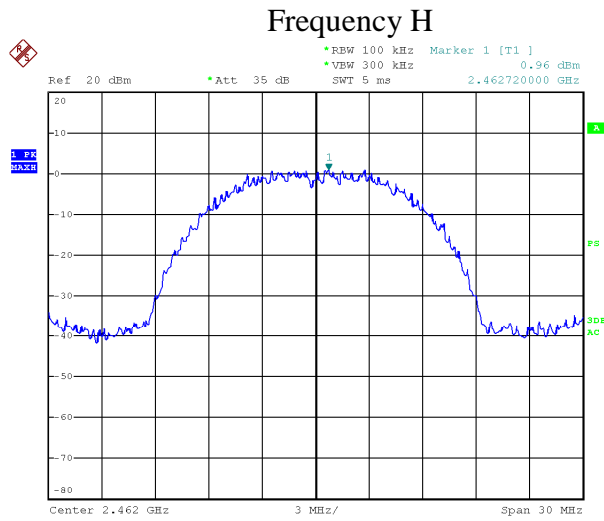


Date: 15.APR.2014 15:13:45


Mode	CH	Cable loss (dB)	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11g	L	2.00	2.41	≤8.00
	M	2.00	0.62	
	H	2.00	-0.18	

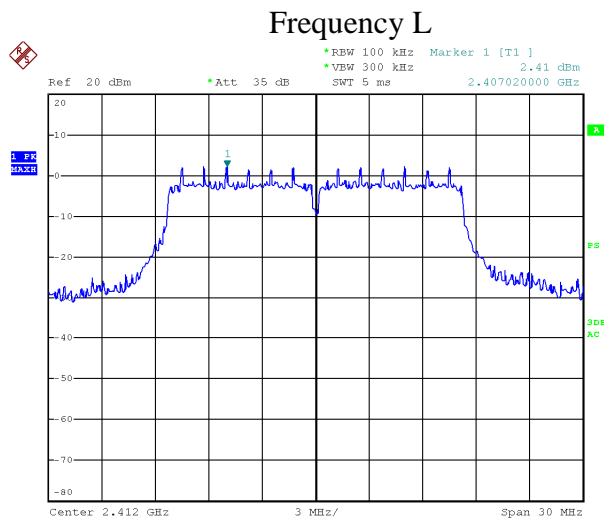

Date: 15.APR.2014 15:22:22

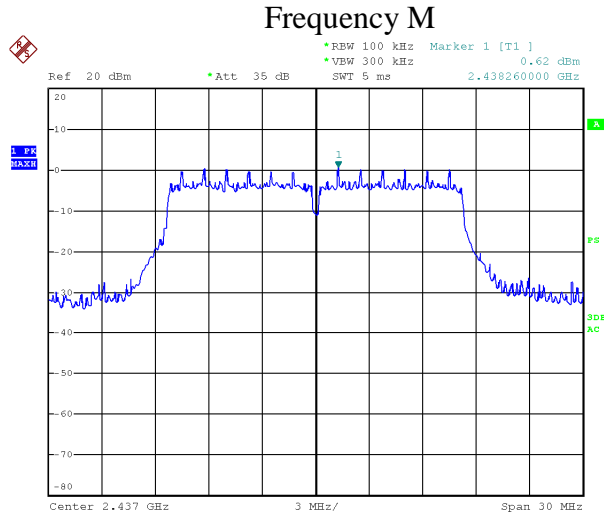

Date: 15.APR.2014 15:24:13

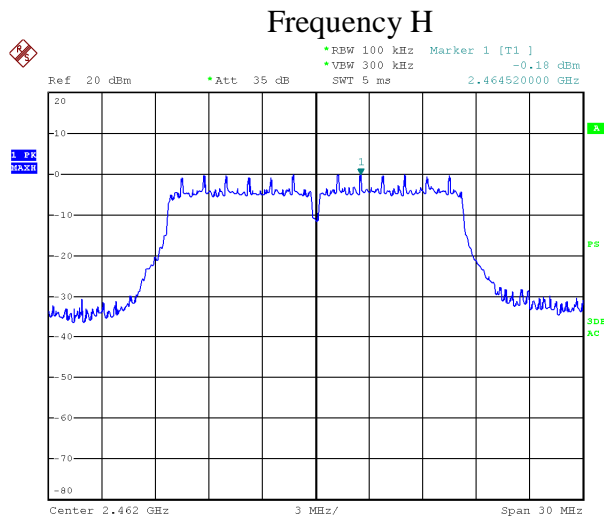

Date: 15.APR.2014 15:30:46

Mode	CH	Cable loss (dB)	PSD (dBm/100kHz)	Limit (dBm/3kHz)
802.11n (HT20)	L	2.00	1.07	≤8.00
	M	2.00	-0.63	
	H	2.00	-1.73	



6. Radiated emission


Test result: PASS

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

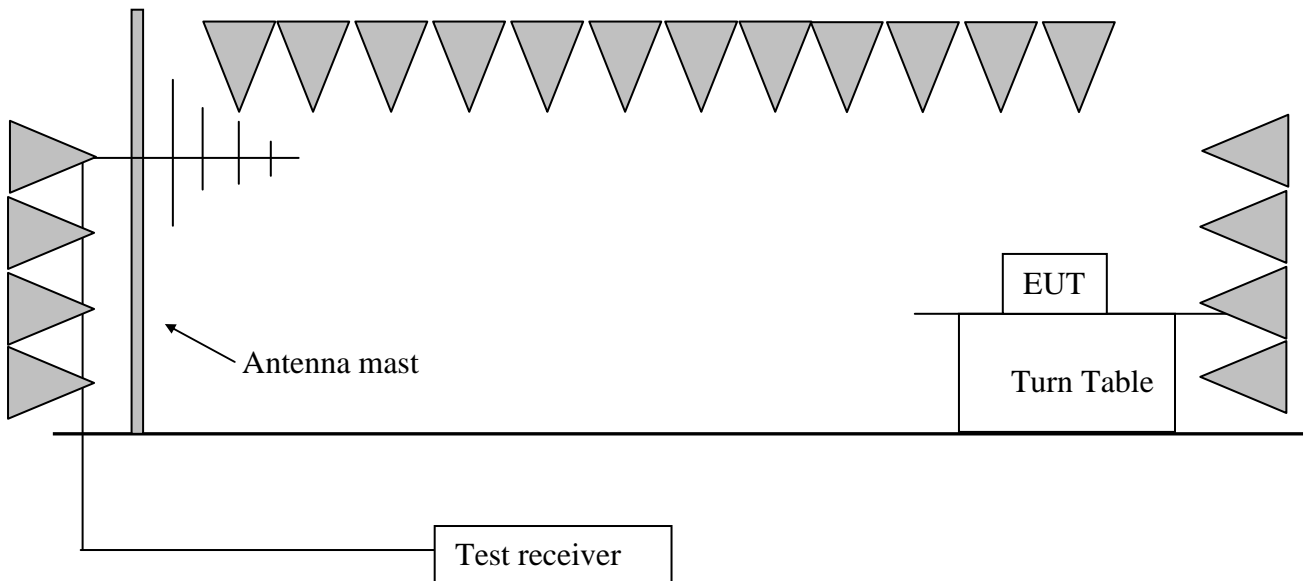

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


The EUT was tested according to DTS test procedure of KDB558074 D01 DTS “Meas Guidance v03r01” (clause 12.1) for compliance to FCC 47CFR 15.247 requirements.

6.4 Test protocol


Temperature : 18 °C
Relative Humidity : 54 %

Worst Case Below 1GHz:

Horizontal

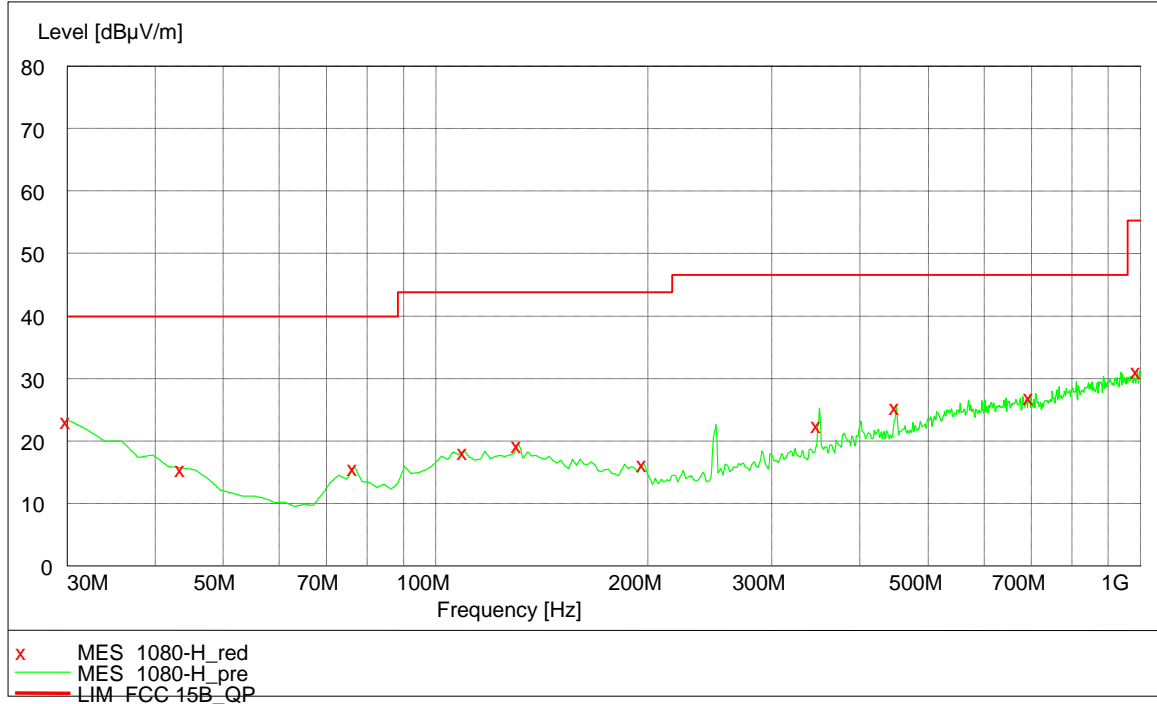

Vertical

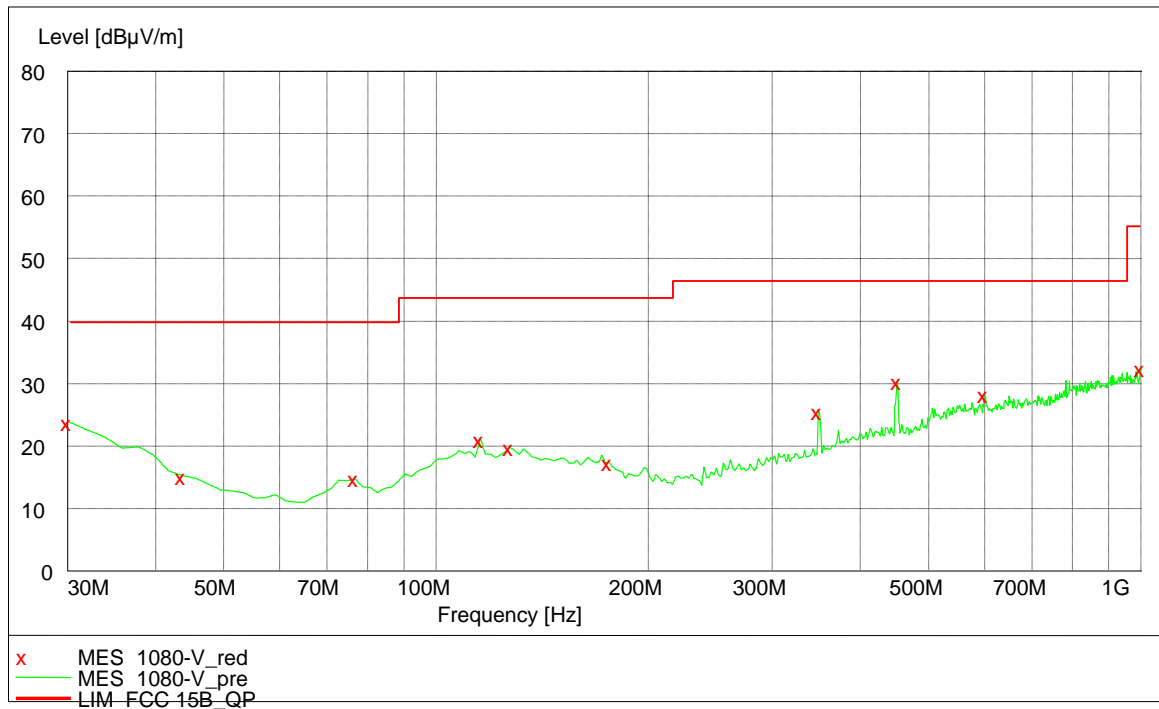

Test data:

Polarization	Frequency (MHz)	Measured level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Factor (dB)	Detector
H	30.00	23.90	40.00	16.10	22.00	PK
	115.53	21.10	43.50	22.40	15.80	PK
	127.19	19.80	43.50	23.70	15.90	PK
	451.82	30.50	46.50	16.00	19.20	PK
	599.56	28.30	46.50	18.20	21.60	PK
	1000.00	32.50	54.00	21.50	25.40	PK
V	30.00	23.40	40.00	16.60	22.00	PK
	109.70	18.40	43.50	25.10	15.50	PK
	131.08	19.60	43.50	23.90	15.80	PK
	449.88	25.60	46.50	20.90	19.20	PK
	696.75	27.20	46.50	19.30	22.50	PK
	990.28	31.30	54.00	22.70	25.40	PK

Remark: 1. Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 2. Measure level = Original Receiver Reading Level+ Correct Factor
 3. Margin = limit - Measure level

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading level = 10dBuV.
 Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Measure level = 10dBuV +
 0.20dB/m = 10.20dBuV/m
 Assuming limit = 54dBuV/m, Measure level = 10.20dBuV/m, then Margin = 54-
 10.20 = 43.80dBuV/m

Above 1GHz:

1: 802.11b

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	61.32	74	-7.80	100	210	12.68	PK
		46.55	54	-7.80	100	210	7.45	AV
	2412	110.30	-	-7.80	100	190	-	PK
		108.20	-	-7.80	100	190	-	AV
	4824	45.35	74	-2.10	100	190	28.65	PK
		37.65	54	-2.10	100	190	16.35	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	108.2	-	-7.8	100	210	-	PK
		109.1	-	-7.8	100	210	-	AV
	4874	45.12	74	-2.1	100	210	28.88	PK
		36.42	54	-2.1	100	210	17.58	AV
	7311	46.91	74	6.5	100	210	27.09	PK
		37.82	54	6.5	100	210	16.18	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	106.31	-	-7.8	100	210	-	PK
		107.22	-	-7.8	100	210	-	AV
	2483.5	62.72	74	-7.5	100	210	11.28	PK
		46.73	54	-7.5	100	210	7.27	AV
	4924	43.12	74	-2.1	100	210	30.88	PK
		33.34	54	-2.1	100	210	20.66	AV
	7386	46.82	74	6.5	100	210	27.18	PK
		36.23	54	6.5	100	210	17.77	AV
Note:	2462MHz is fundamental signal.							

2: 802.11g

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	66.84	74	-7.8	100	190	7.16	PK
		50.21	54	-7.8	100	190	3.79	AV
	2412	105.32	-	-7.8	100	190	-	PK
		104.89	-	-7.8	100	190	-	AV
	4824	43.22	74	-2.1	100	190	30.78	PK
		34.45	54	-2.1	100	190	19.55	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	103.82	-	-7.8	100	213	-	PK
		105.23	-	-7.8	100	213	-	AV
	4874	46.33	74	-2.1	100	213	27.67	PK
		33.72	54	-2.1	100	213	20.28	AV
	7311	48.23	74	6.5	100	213	25.77	PK
		37.42	54	6.5	100	213	16.58	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	104.63	-	-7.8	100	179	-	PK
		103.34	-	-7.8	100	179	-	AV
	2483.5	69.18	74	-7.5	100	179	4.82	PK
		48.33	54	-7.5	100	179	5.67	AV
	4924	43.12	74	-2.1	100	179	30.88	PK
		34.23	54	-2.1	100	179	19.77	AV
	7386	43.45	74	6.5	100	179	30.55	PK
		38.22	54	6.5	100	179	15.78	AV
Note:	2462MHz is fundamental signal.							

3: 802.11n20

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2390	65.23	74	-7.8	100	190	8.77	PK
		50.74	54	-7.8	100	190	3.26	AV
	2412	105.12	-	-7.8	100	190	-	PK
		103.32	-	-7.8	100	190	-	AV
	4824	43.32	74	-2.1	100	190	30.68	PK
		34.55	54	-2.1	100	190	19.45	AV
Note:	2412MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2437	102.21	-	-7.8	100	223	-	PK
		103.72	-	-7.8	100	223	-	AV
	4874	43.49	74	-2.1	100	223	30.51	PK
		34.23	54	-2.1	100	223	19.77	AV
	7311	48.19	74	6.5	100	223	25.81	PK
		36.23	54	6.5	100	223	17.77	AV
Note:	2437MHz is fundamental signal.							

Polarity	Frequency (MHz)	Measured level (dBuv/m)	Limit (dBuv/m)	Factor (dB)	Antenna (cm)	Turn table (deg)	Margin (dB)	Remark
Ver/Hor	2462	103.24	-	-7.8	100	189	-	PK
		105.68	-	-7.8	100	189	-	AV
	2483.5	64.93	74	-7.5	100	189	9.07	PK
		47.55	54	-7.5	100	189	6.45	AV
	4924	44.33	74	-2.1	100	189	29.67	PK
		34.53	54	-2.1	100	189	19.47	AV
	7386	45.35	74	6.5	100	189	28.65	PK
		36.38	54	6.5	100	189	17.62	AV
Note:	2462MHz is fundamental signal.							


7. Emission outside the frequency Band

Test result: PASS

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

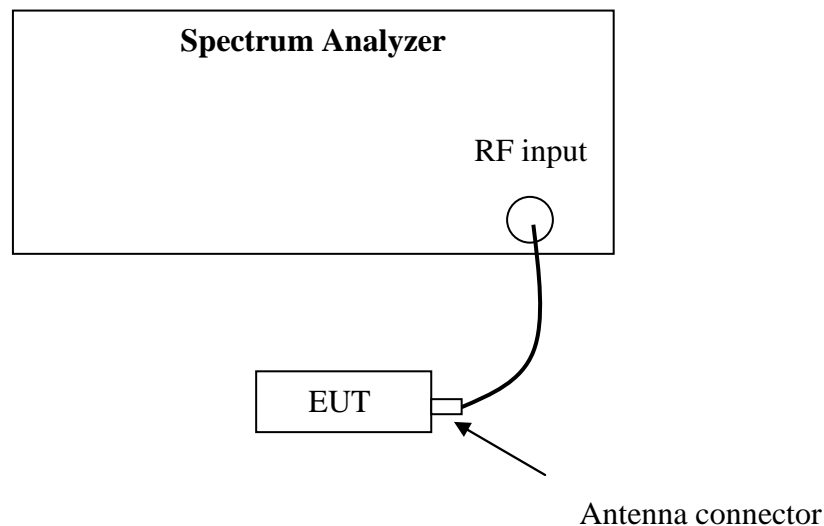

7.3 Test procedure and test setup

The Emission outside the frequency Band per FCC §15.247(d) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance v03r01” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

7.4 Test protocol

Mode	CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11b	L	-26.15	33.20	≥ 20
	M	-44.07	47.58	
	H	-41.65	45.45	


Low Band Edge - Frequency L




Spurious Emission 9kHz ~ 1GHz - Frequency L




Spurious Emission 1GHz ~ 2.5GHz - Frequency L

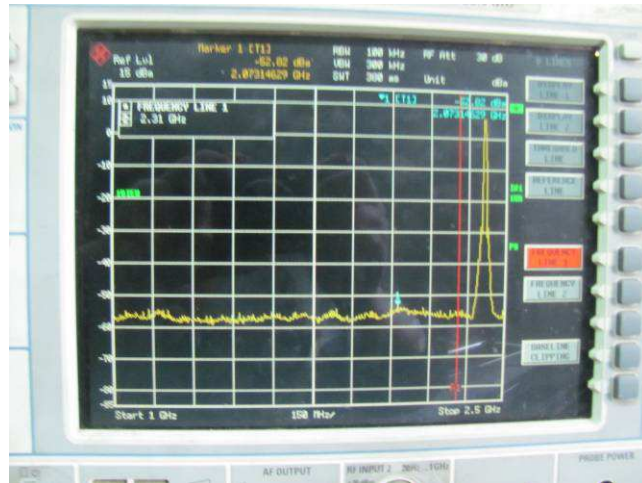

Spurious Emission 2.5GHz ~ 10GHz - Frequency L

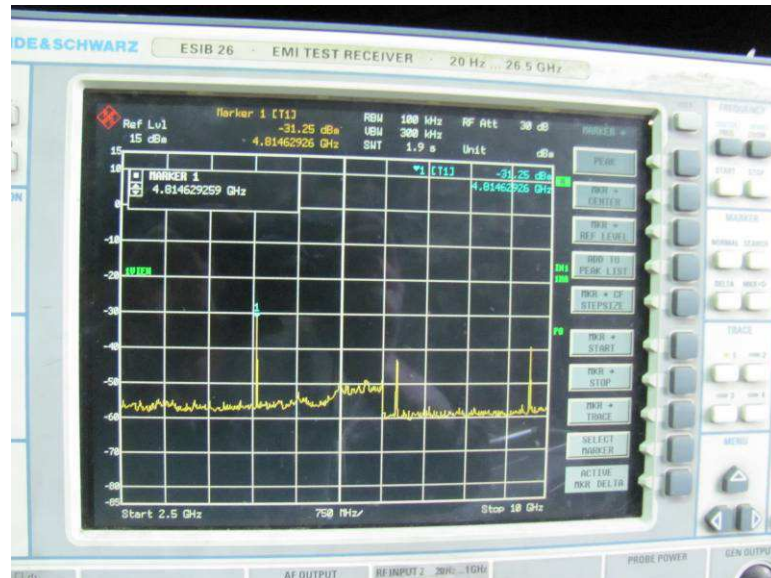


Spurious Emission 10GHz ~ 18GHz - Frequency L

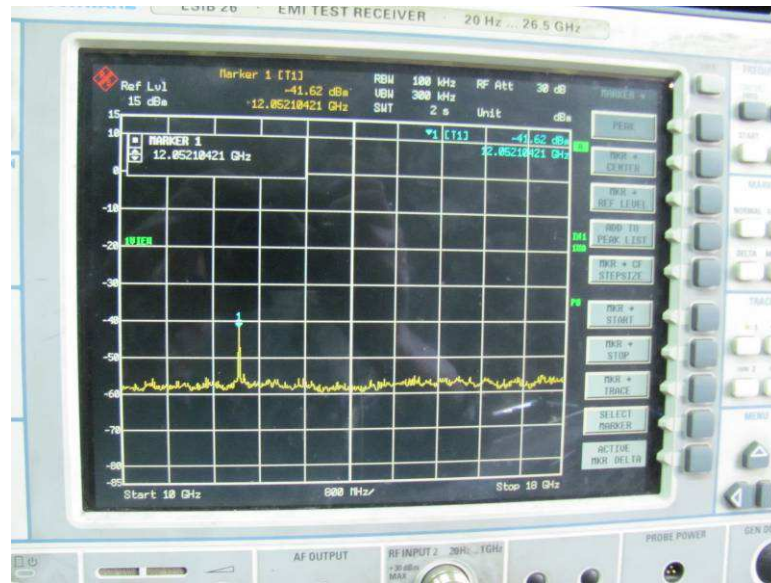


Spurious Emission 18GHz ~ 26GHz - Frequency L




Spurious Emission 9k Hz ~ 1GHz - Frequency M

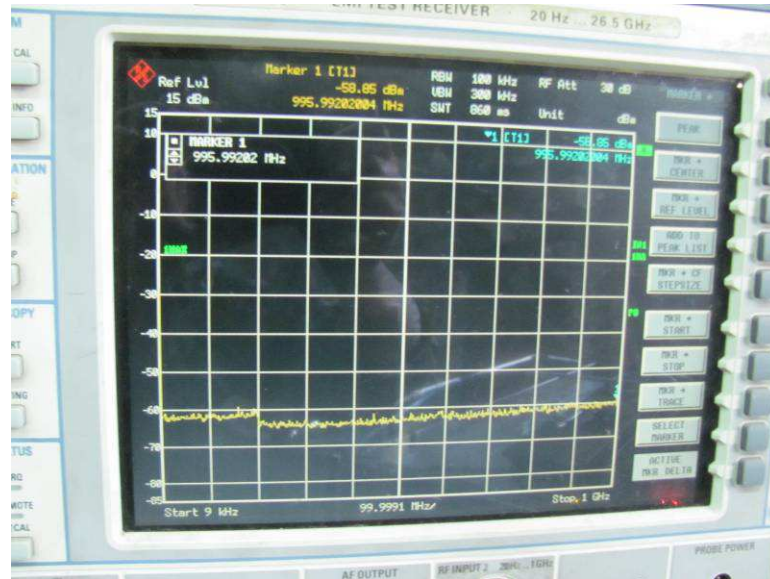


Spurious Emission 1GHz ~ 2.5GHz - Frequency M

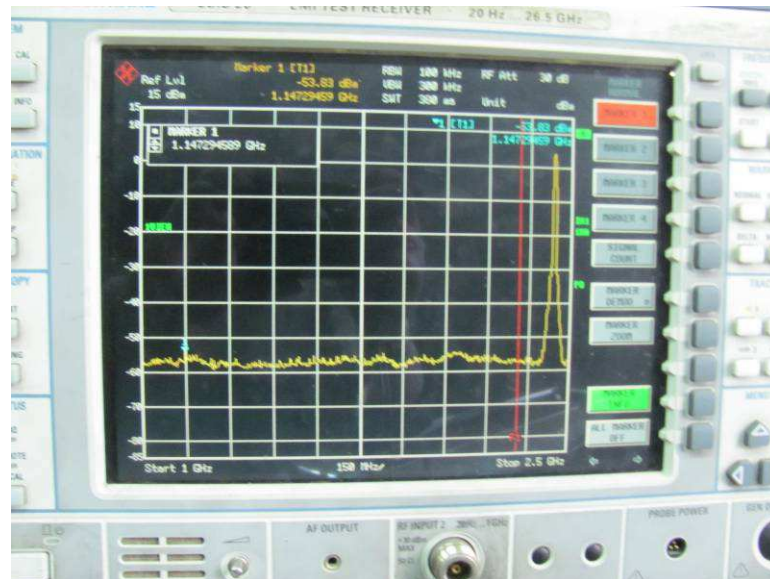


Spurious Emission 2.5GHz ~ 10GHz - Frequency M

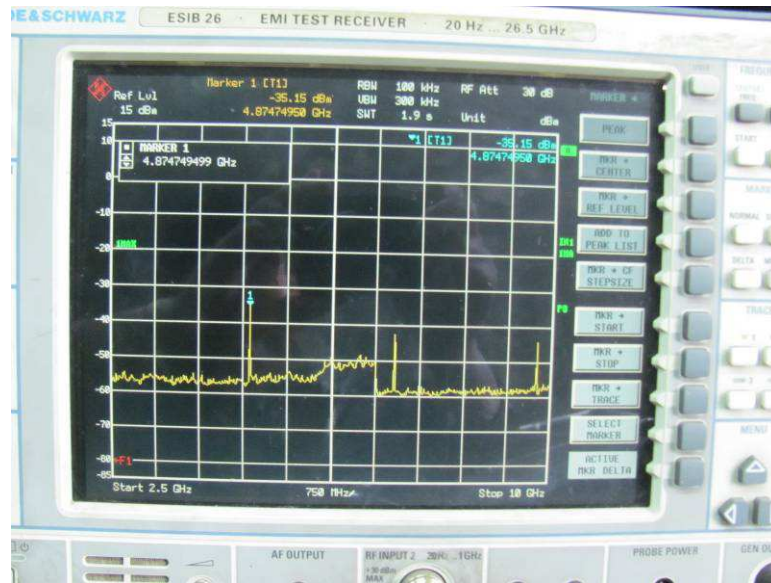

Spurious Emission 10GHz ~ 18GHz - Frequency M

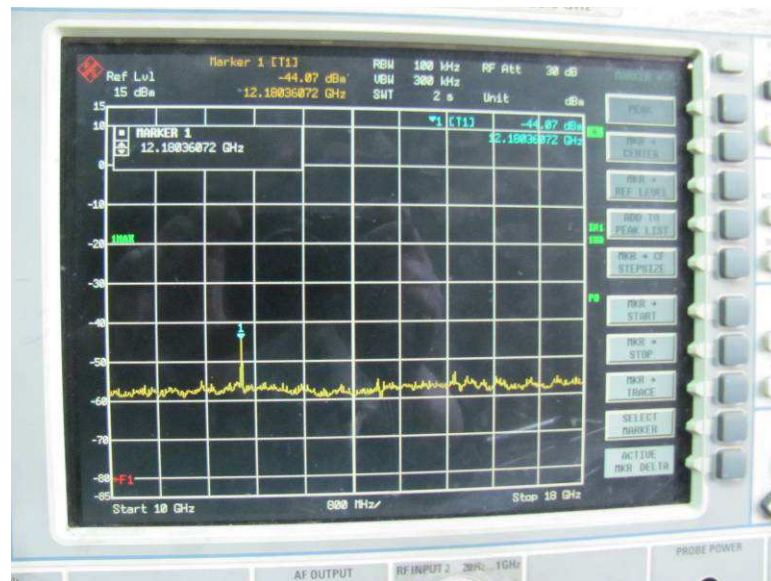


Spurious Emission 18GHz ~ 26GHz - Frequency M

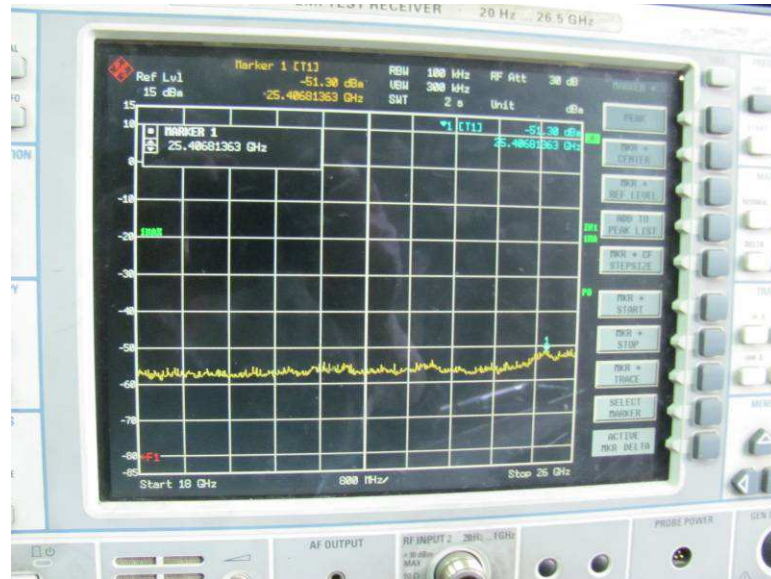

Spurious Emission 9k Hz ~ 1GHz - Frequency H




Spurious Emission 1GHz ~ 2.5GHz - Frequency H

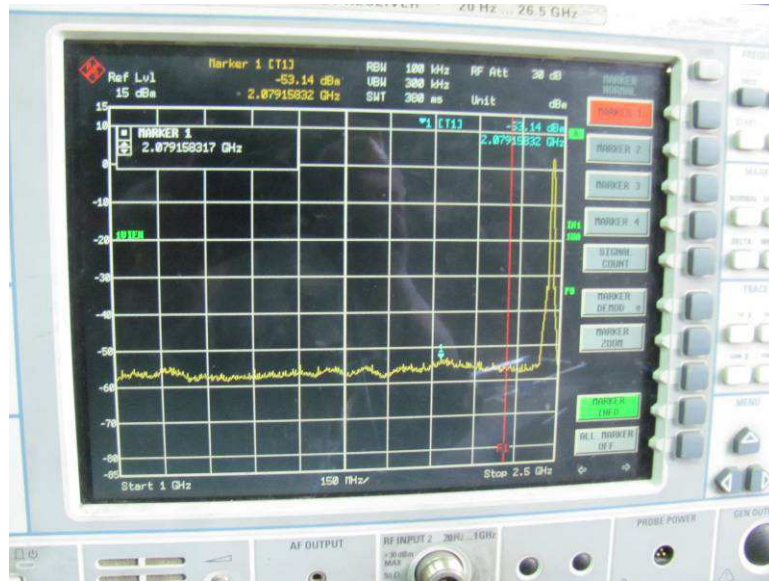

Spurious Emission 2.5GHz ~ 10GHz - Frequency H



Spurious Emission 10GHz ~ 18GHz - Frequency H

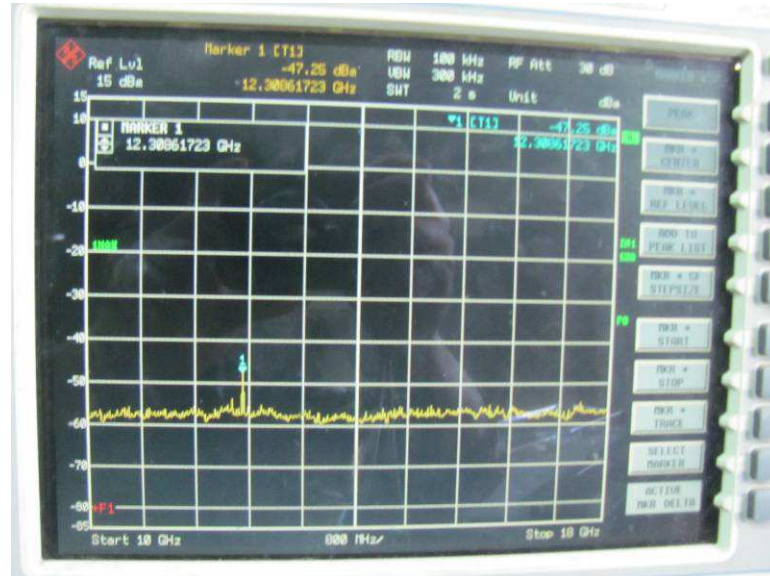

Spurious Emission 18GHz ~ 26GHz - Frequency H




High Band Edge - Frequency H




Mode	CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11g	L	-22.81	27.60	≥20
	M	-44.20	44.92	
	H	-43.13	43.06	

Low Band Edge - Frequency L

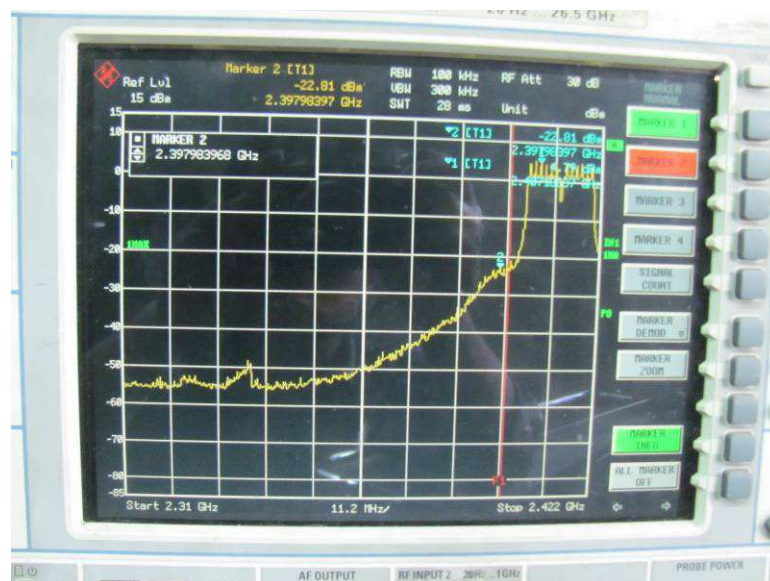


Spurious Emission 9k Hz ~ 1GHz - Frequency L

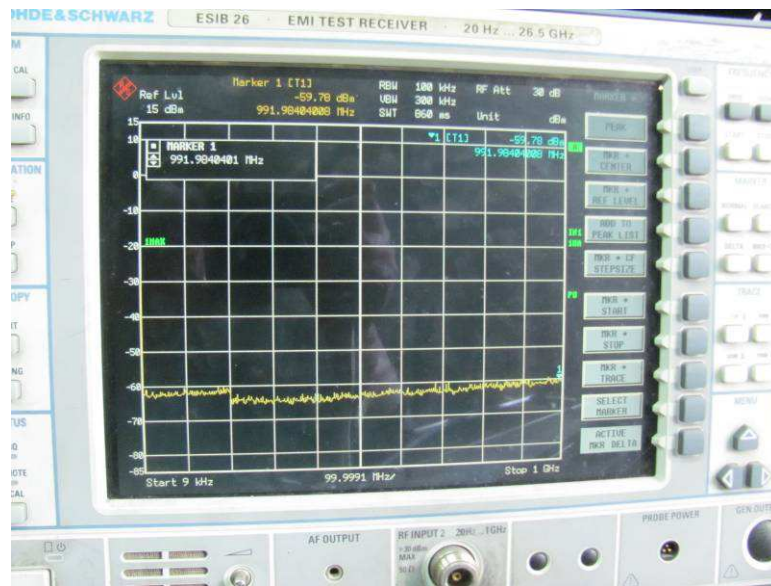

Spurious Emission 1GHz ~ 2.5GHz - Frequency L




Spurious Emission 2.5GHz ~ 10GHz - Frequency L

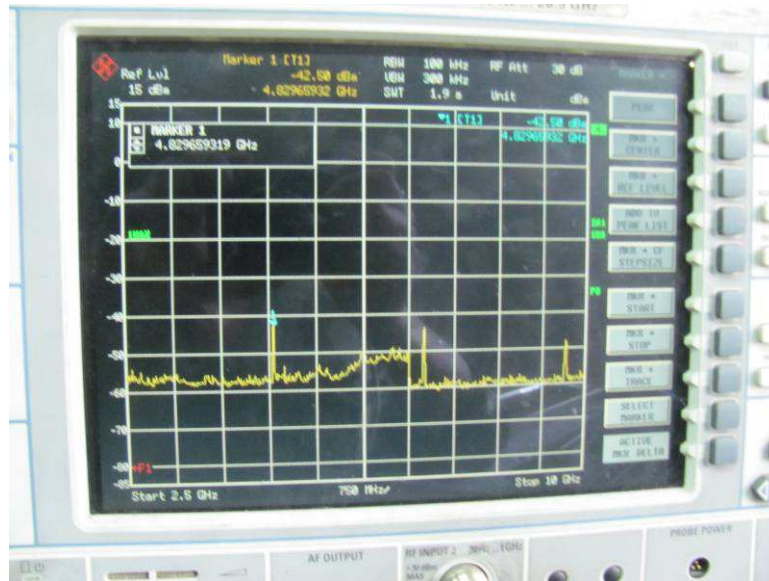


Spurious Emission 10GHz ~ 18GHz - Frequency L




Spurious Emission 18GHz ~ 26GHz - Frequency L

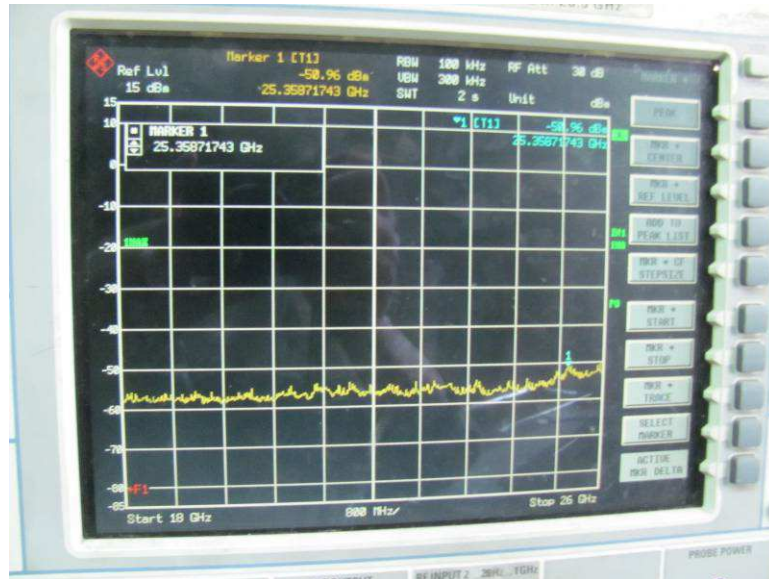


Spurious Emission 9k Hz ~ 1GHz - Frequency M

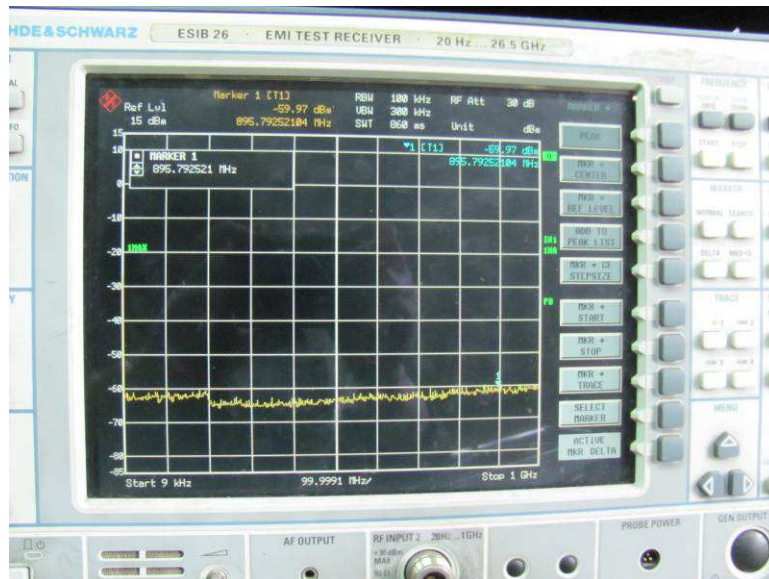


Spurious Emission 1GHz ~ 2.5GHz - Frequency M

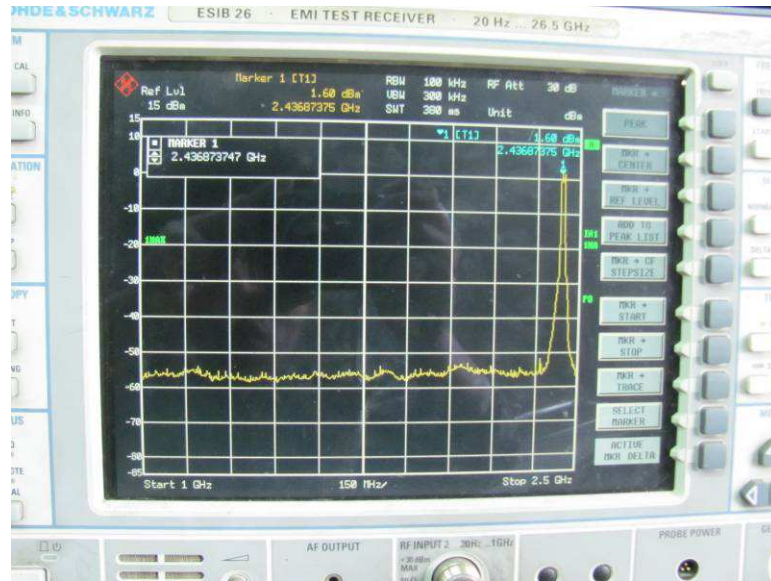


Spurious Emission 2.5GHz ~ 10GHz - Frequency M

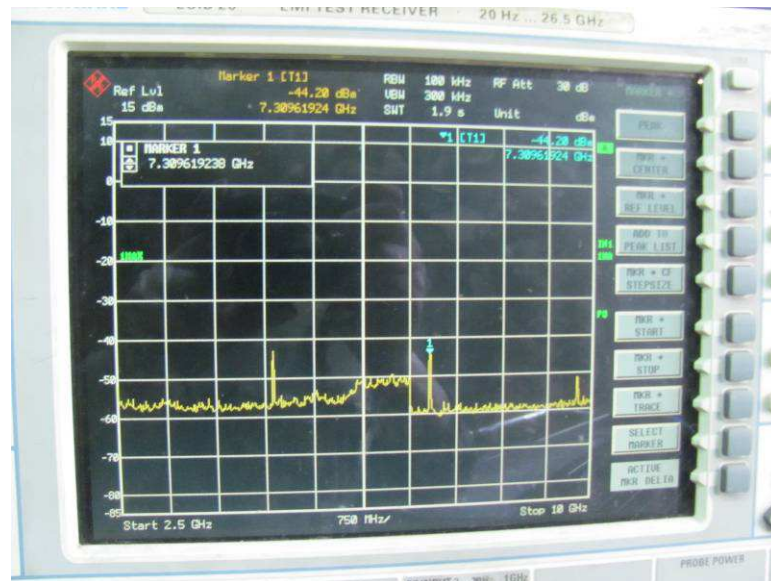


Spurious Emission 10GHz ~ 18GHz - Frequency M

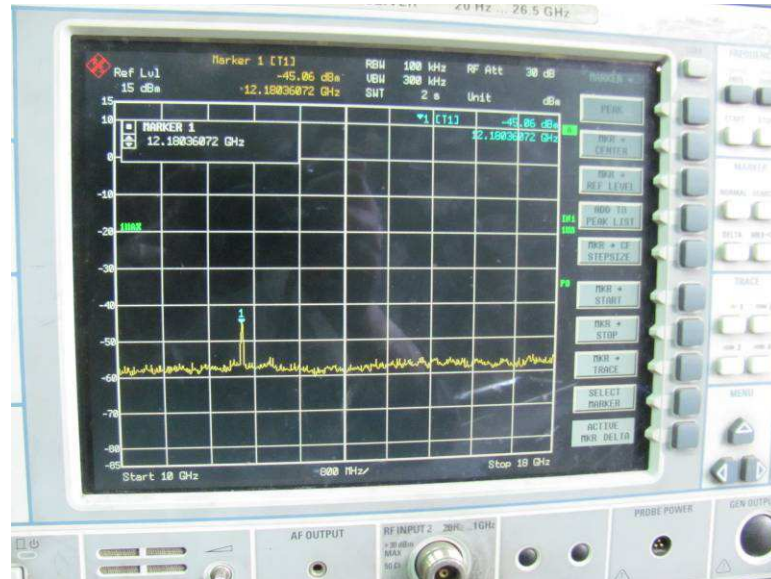


Spurious Emission 18GHz ~ 26GHz - Frequency M

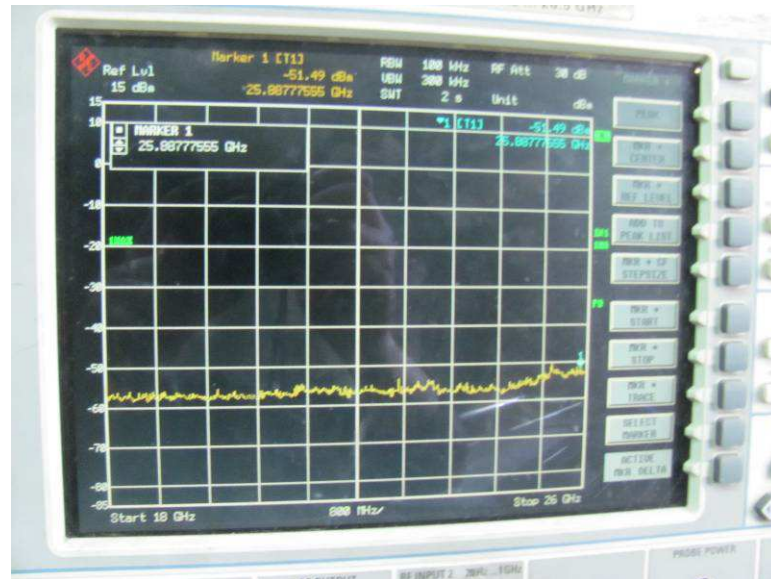

Spurious Emission 9k Hz ~ 1GHz - Frequency H

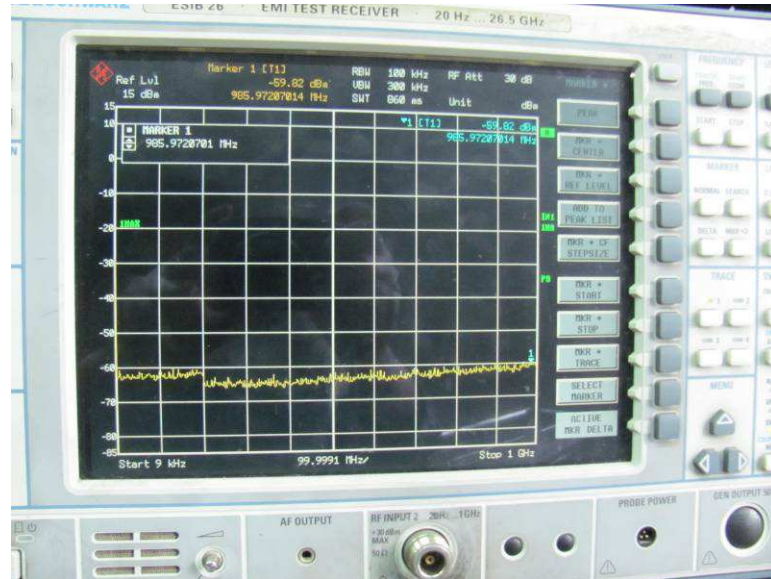


Spurious Emission 1GHz ~ 2.5GHz - Frequency H

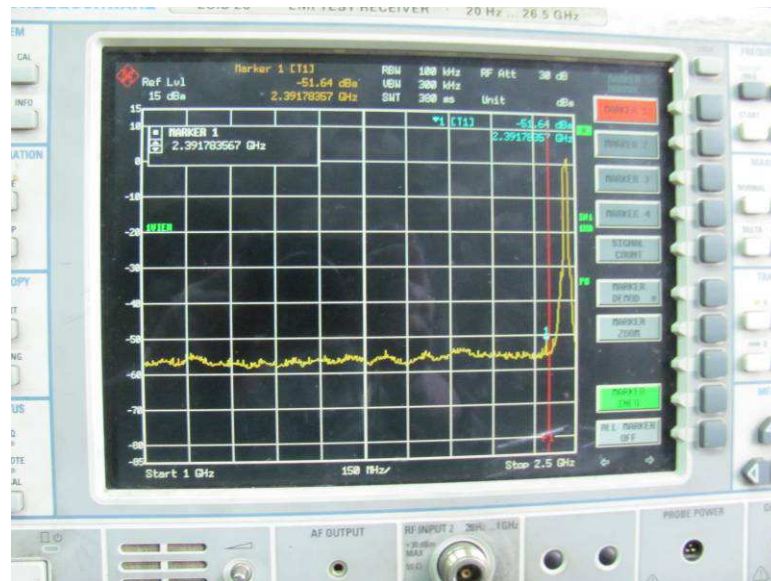


Spurious Emission 2.5GHz ~ 10GHz - Frequency H



Spurious Emission 10GHz ~ 18GHz - Frequency H

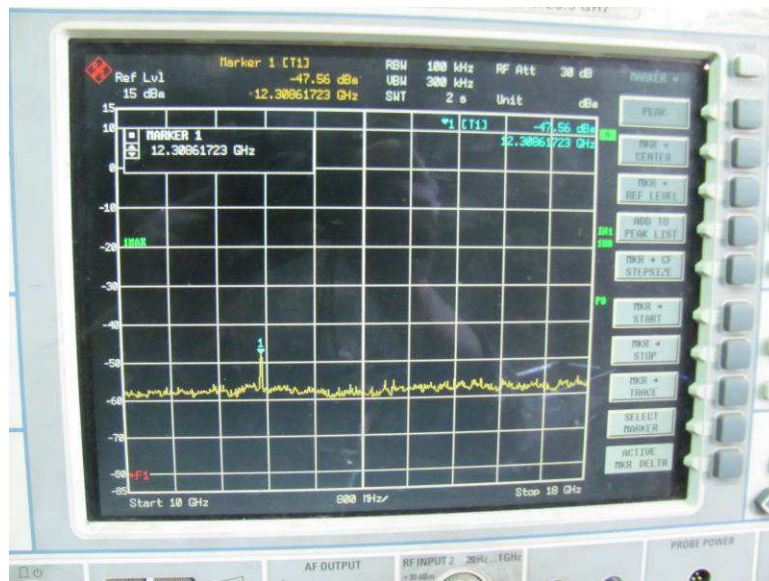

Spurious Emission 18GHz ~ 26GHz - Frequency H

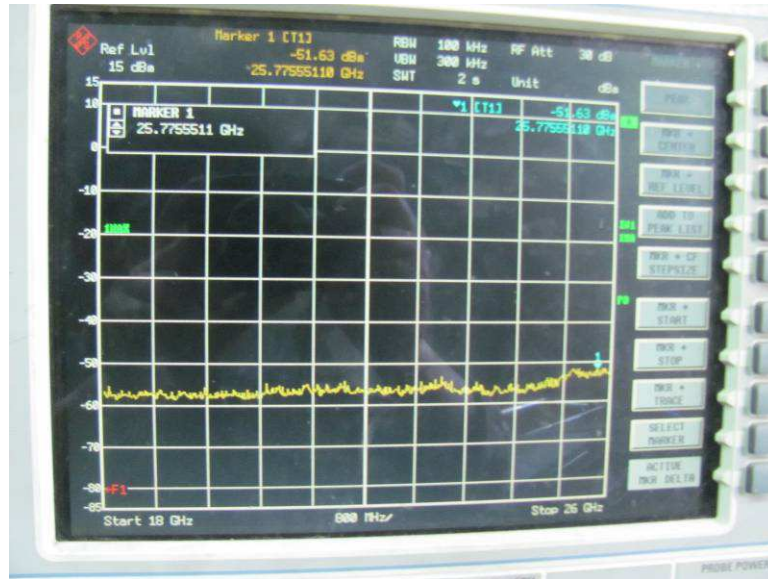

High Band Edge - Frequency H




Mode	CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
802.11n (HT20)	L	-31.90	34.01	≥ 20
	M	-48.80	49.52	
	H	-43.13	43.06	


Low Band Edge - Frequency L




Spurious Emission 9k Hz ~ 1GHz - Frequency L

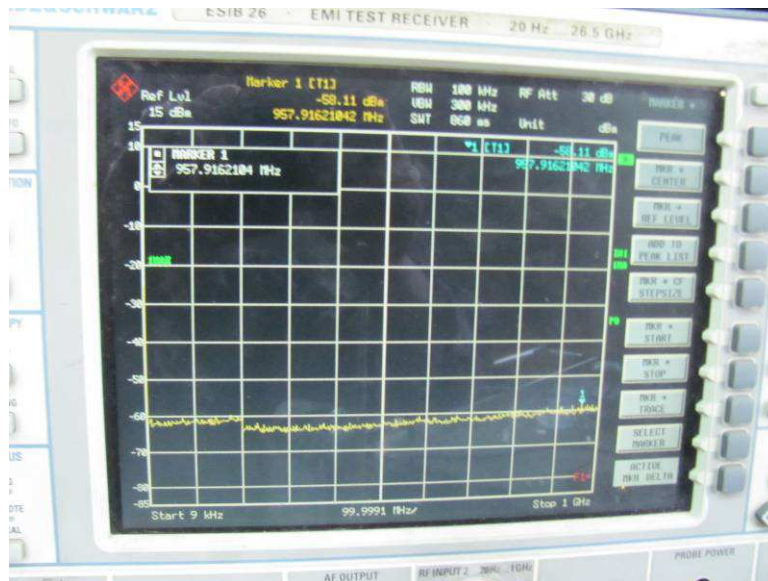


Spurious Emission 1GHz ~ 2.5GHz - Frequency L

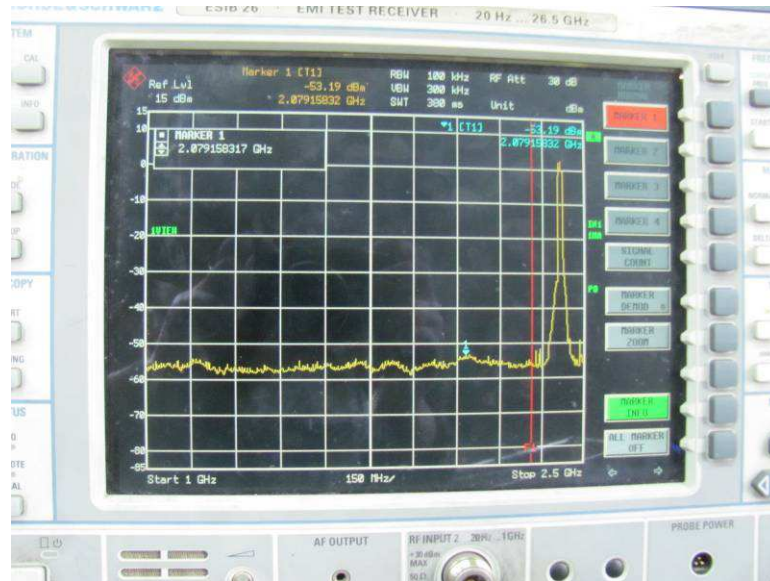


Spurious Emission 2.5GHz ~ 10GHz - Frequency L

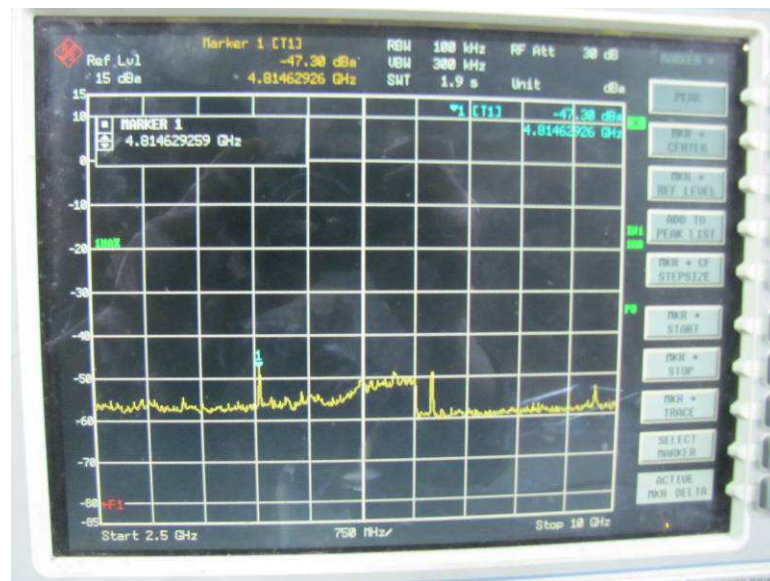


Spurious Emission 10GHz ~ 18GHz - Frequency L

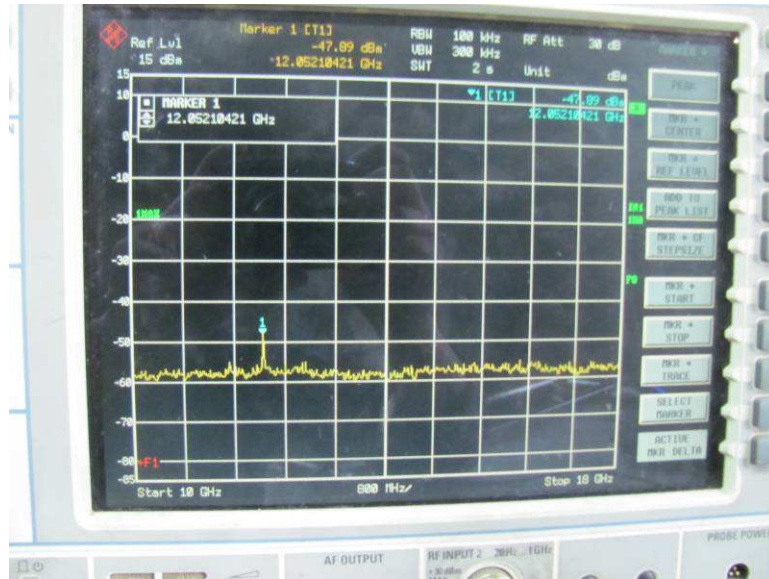


Spurious Emission 18GHz ~ 26GHz - Frequency L

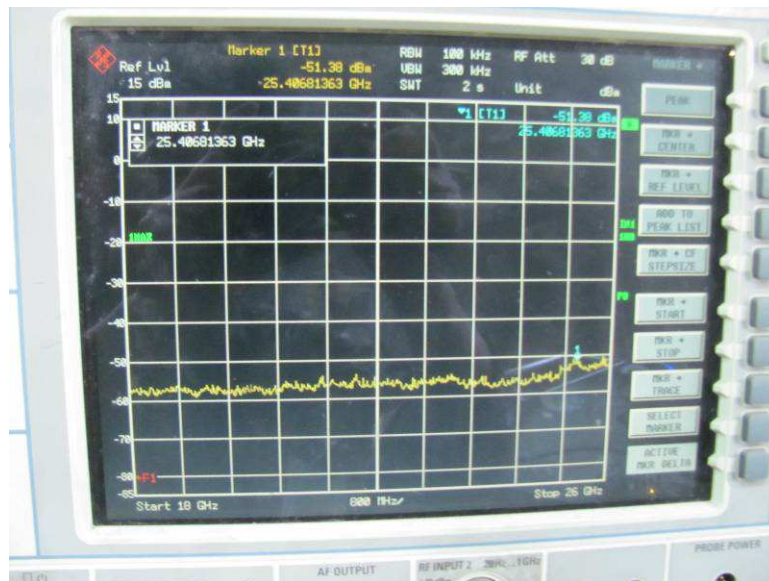


Spurious Emission 9k Hz ~ 1GHz - Frequency M

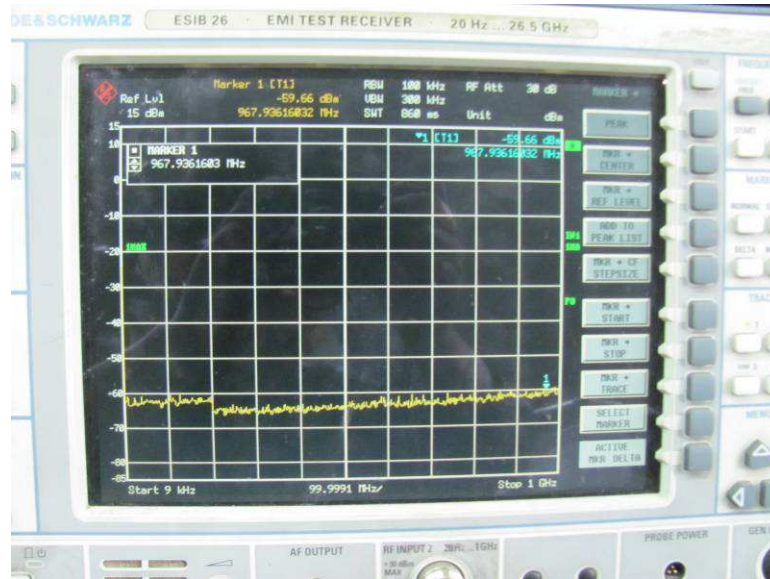


Spurious Emission 1GHz ~ 2.5GHz - Frequency M

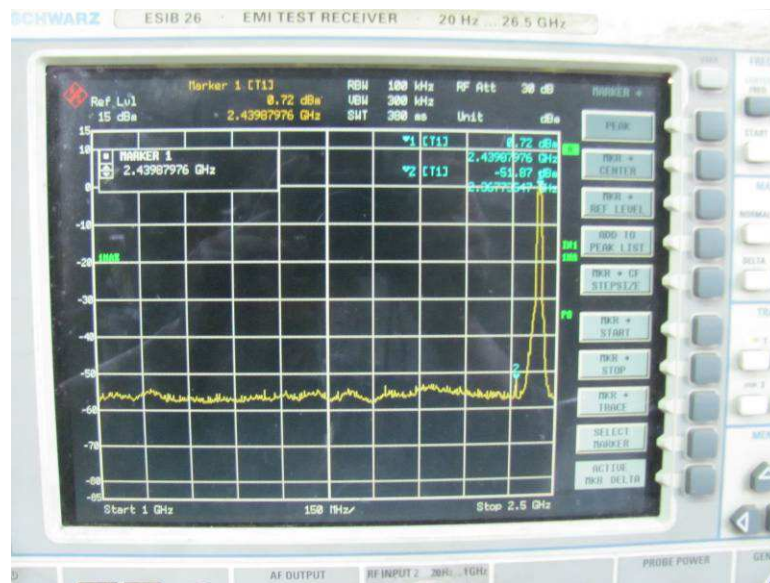


Spurious Emission 2.5GHz ~ 10GHz - Frequency M

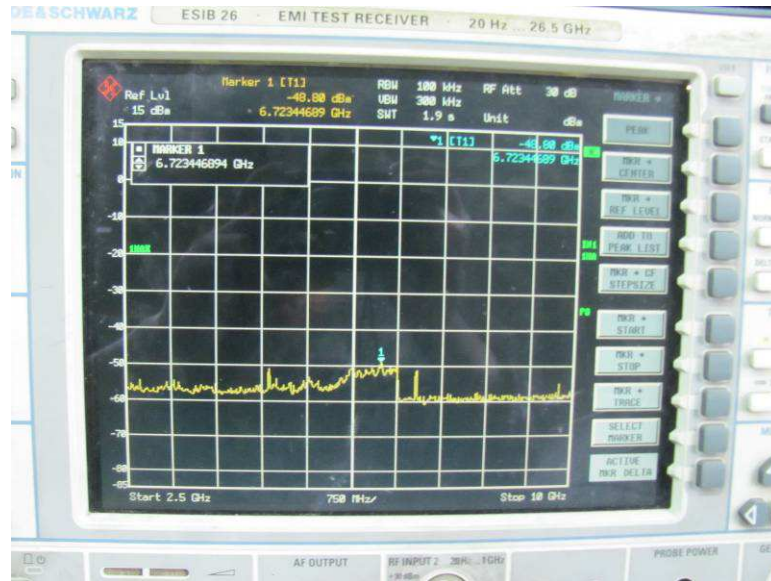


Spurious Emission 10GHz ~ 18GHz - Frequency M

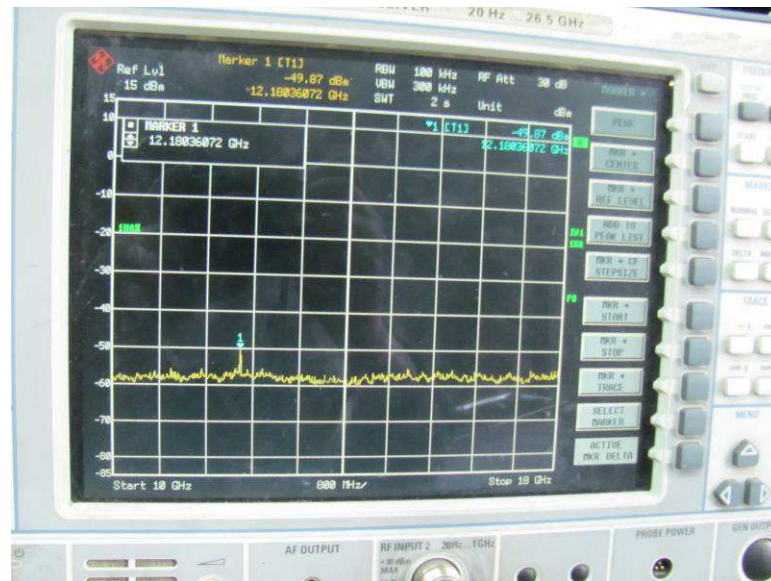

Spurious Emission 18GHz ~ 26GHz - Frequency M

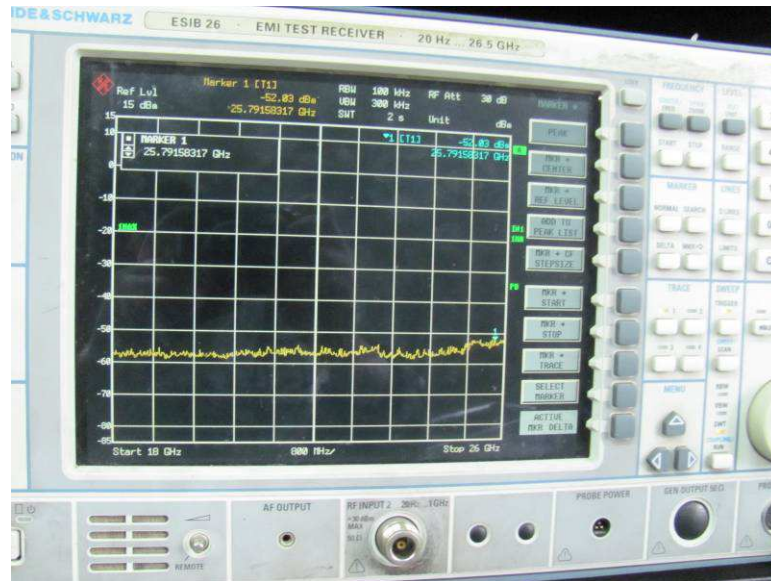


Spurious Emission 9k Hz ~ 1GHz - Frequency H

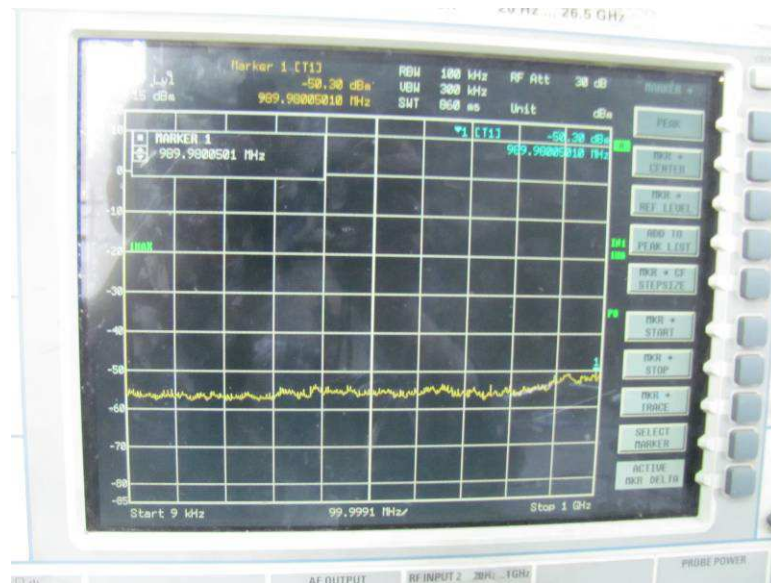


Spurious Emission 1GHz ~ 2.5GHz - Frequency H




Spurious Emission 2.5GHz ~ 10GHz - Frequency H

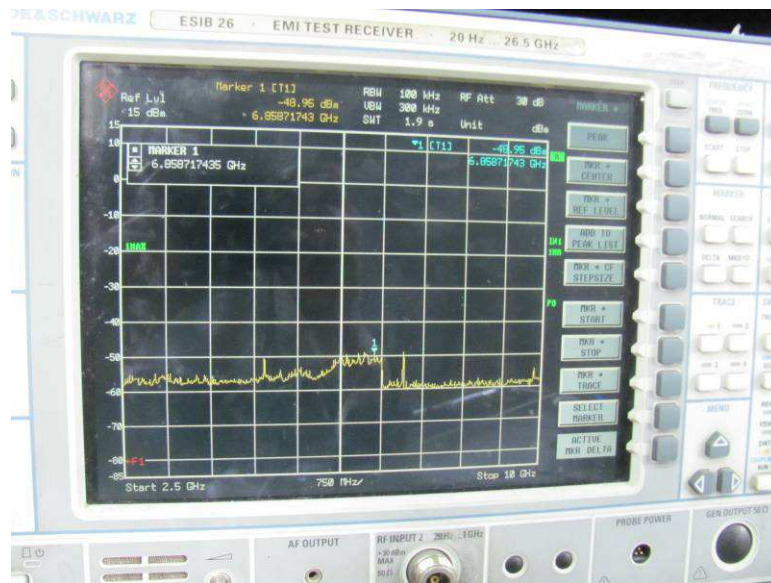


Spurious Emission 10GHz ~ 18GHz - Frequency H

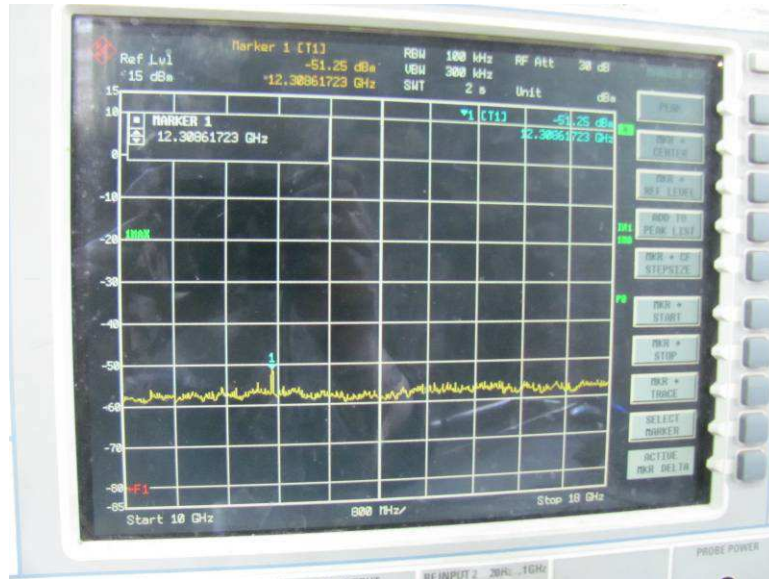

Spurious Emission 18GHz ~ 26GHz - Frequency H

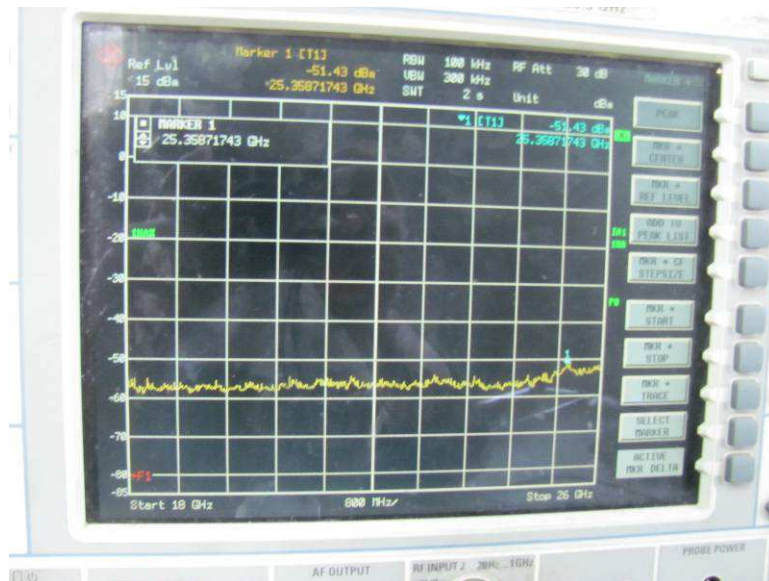

High Band Edge - Frequency H

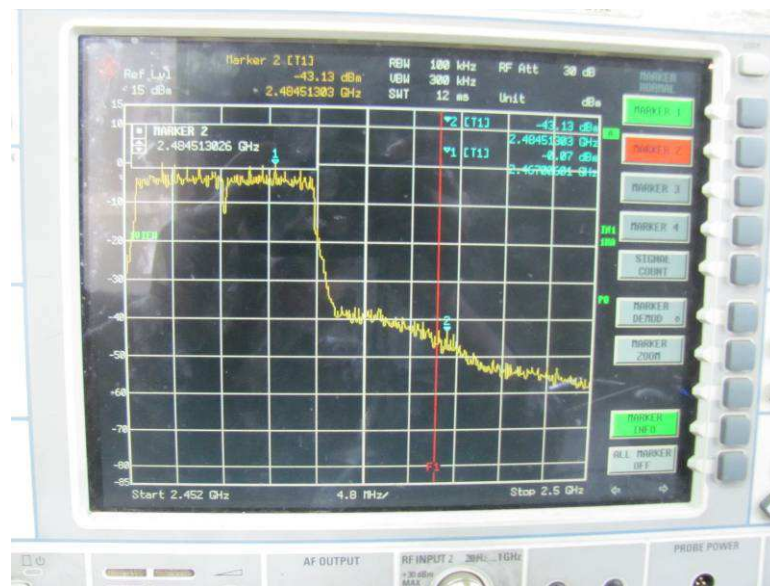


8. Power line conducted emission

Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

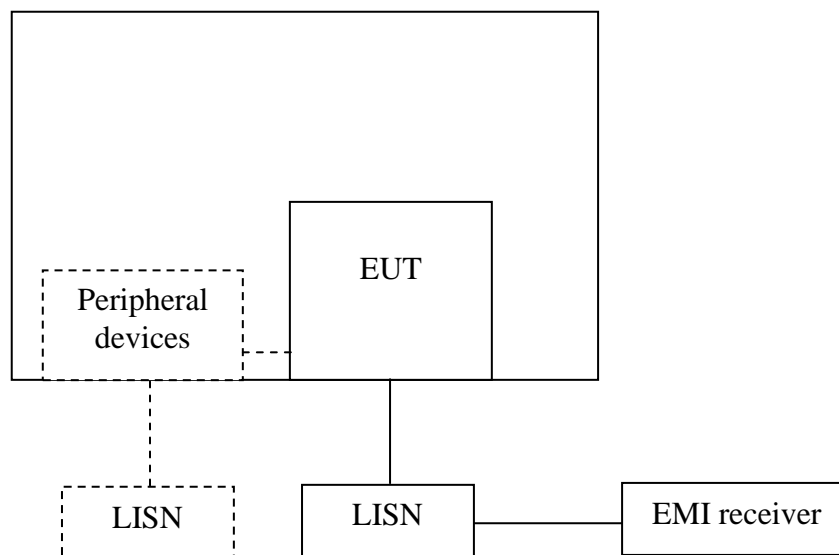

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.


8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.


8.4 Test protocol

L Line:

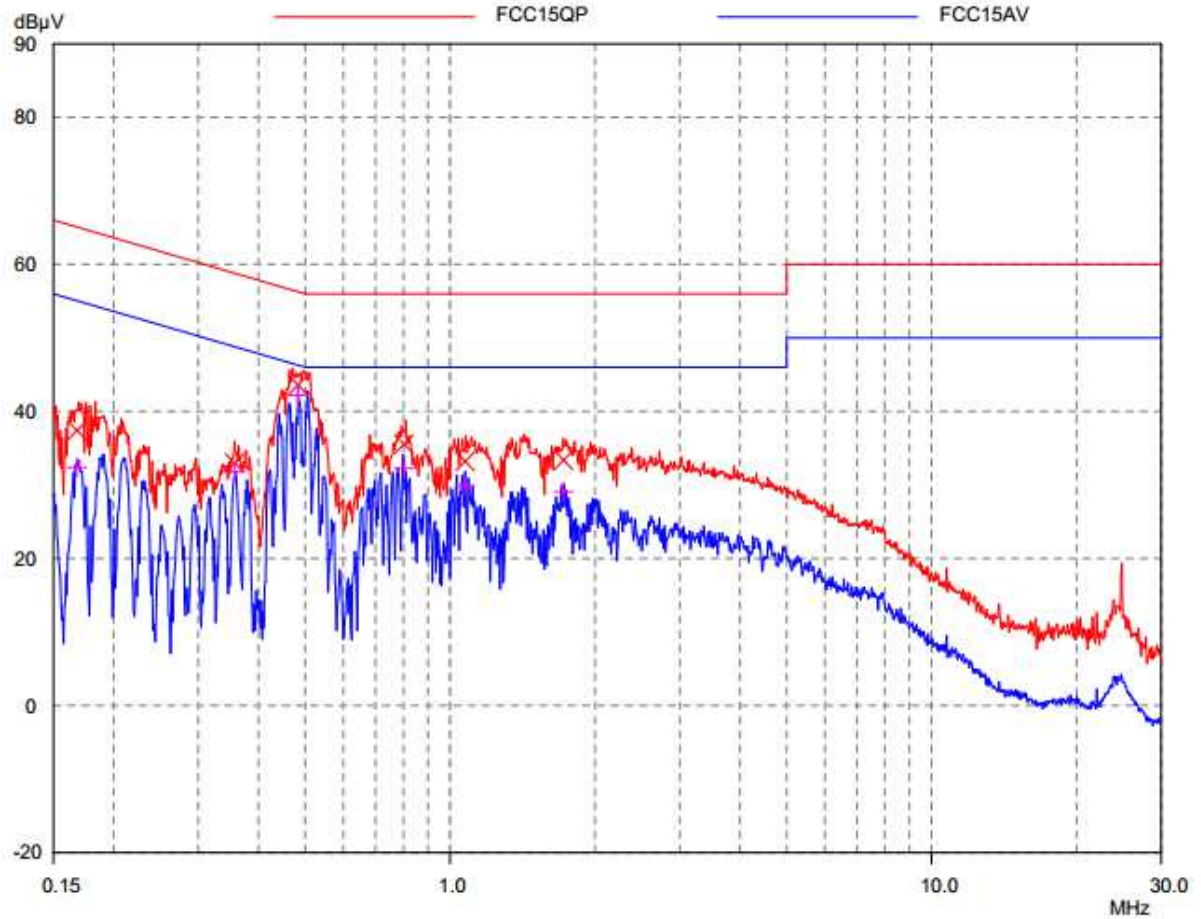

Frequency (MHz)	Measure Level (dBuV)	Limit (dBuV)	Margin (dB)	Type
0.168	37.42	65.07	27.65	QP
0.357	32.99	58.80	25.81	QP
0.483	43.61	56.29	12.68	QP
0.802	35.53	56.00	20.47	QP
1.074	33.20	56.00	22.80	QP
1.719	33.37	56.00	22.63	QP
0.168	32.37	55.07	22.70	AV
0.357	31.78	48.80	17.02	AV
0.483	42.19	46.29	4.10	AV
0.802	32.26	46.00	13.74	AV
1.074	29.85	46.00	16.15	AV
1.719	29.08	46.00	16.92	AV

N line:

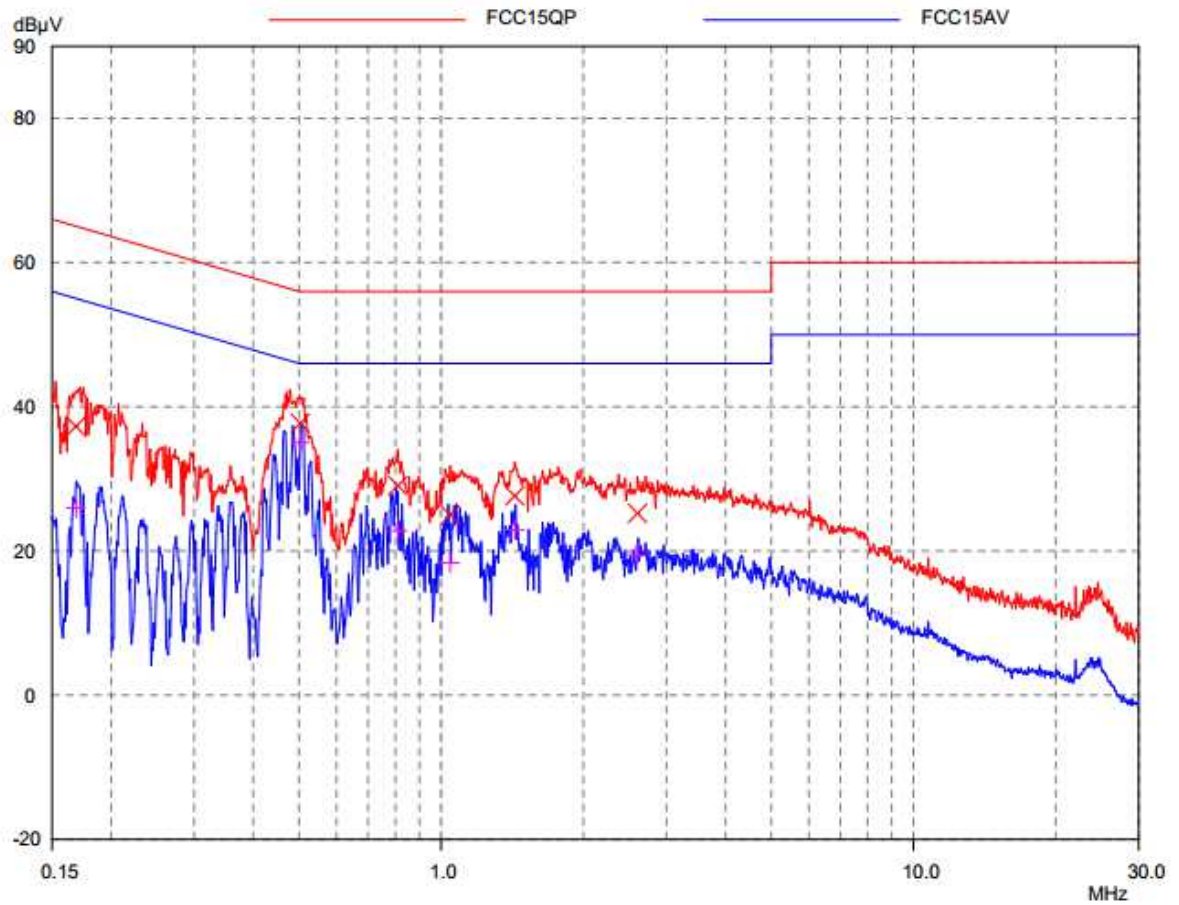

Frequency (MHz)	Measure Level (dBμV)	Limit (dBμV)	Margin (dB)	Type
0.168	37.28	65.04	27.76	QP
0.503	37.72	56.00	18.28	QP
0.809	29.04	56.00	26.96	QP
1.044	25.02	56.00	30.98	QP
1.431	27.62	56.00	28.38	QP
2.604	25.23	56.00	30.77	QP
0.168	25.98	55.04	29.06	AV
0.503	35.05	46.00	10.95	AV
0.809	22.79	46.00	23.21	AV
1.044	18.34	46.00	27.66	AV
1.431	22.89	46.00	23.11	AV
2.604	19.48	46.00	26.52	AV