



Compliance Certification Services Inc.

Report No: C140915S01-SF

FCC ID: 2AB9N-T6

Date of Issue :September 25, 2014

GSM 850-Right Head Cheek Middle CH190	2
GSM 850-Right Head Tilted Middle CH190	3
GSM 850-Left Head Cheek Middle CH190.....	4
GSM 850-Left Head Tilted Middle CH190	5
PCS 1900-Right Head Cheek Low CH512	6
PCS 1900-Right Head Tilted Low CH512	7
PCS 1900-Left Head Cheek Low CH512	8
PCS 1900-Left Head Tilted Low CH512	9
GSM 850-Body Front Middle CH190.....	10
GSM 850-Body Rear Middle CH190	11
PCS 1900-Body Front Low CH512	12
PCS 1900-Body Rear Low CH512	13



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Right Head Cheek Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Right Head Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.137 W/kg


GSM 850/Right Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.827 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.094 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.155 W/kg

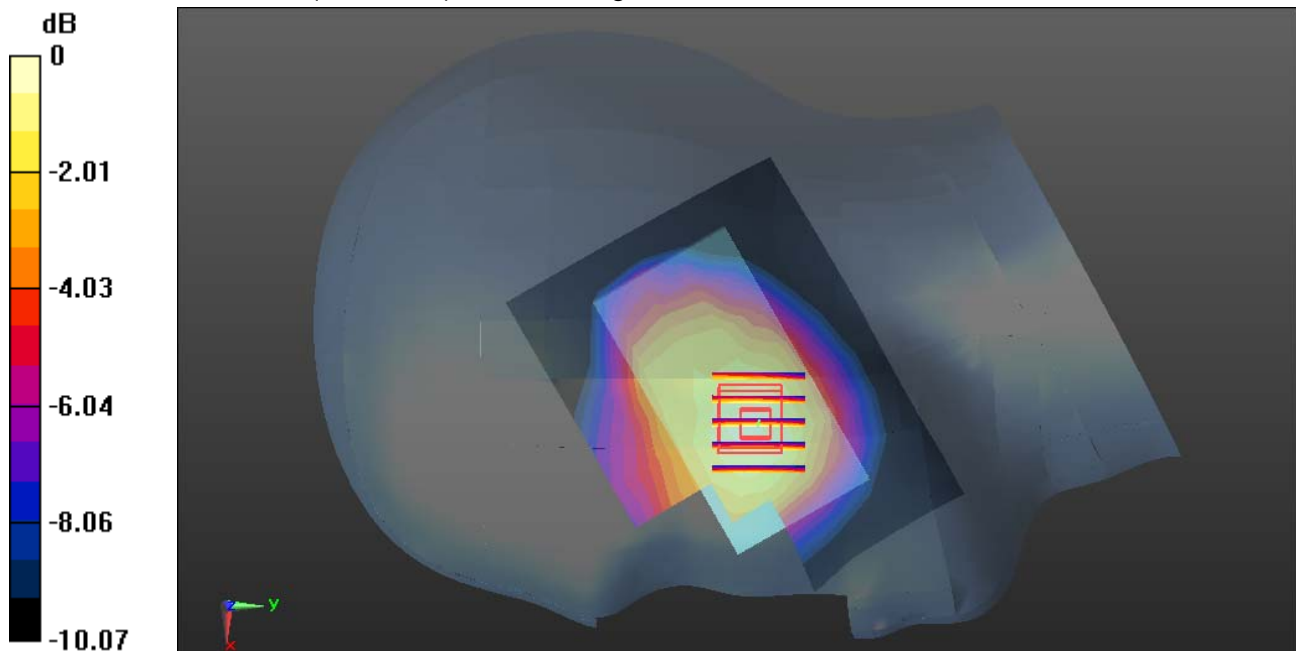

0 dB = 0.155 W/kg = -8.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Right Head Tilted Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Right Head Tilted Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 W/kg


GSM 850/Right Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.17 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.083 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.142 W/kg

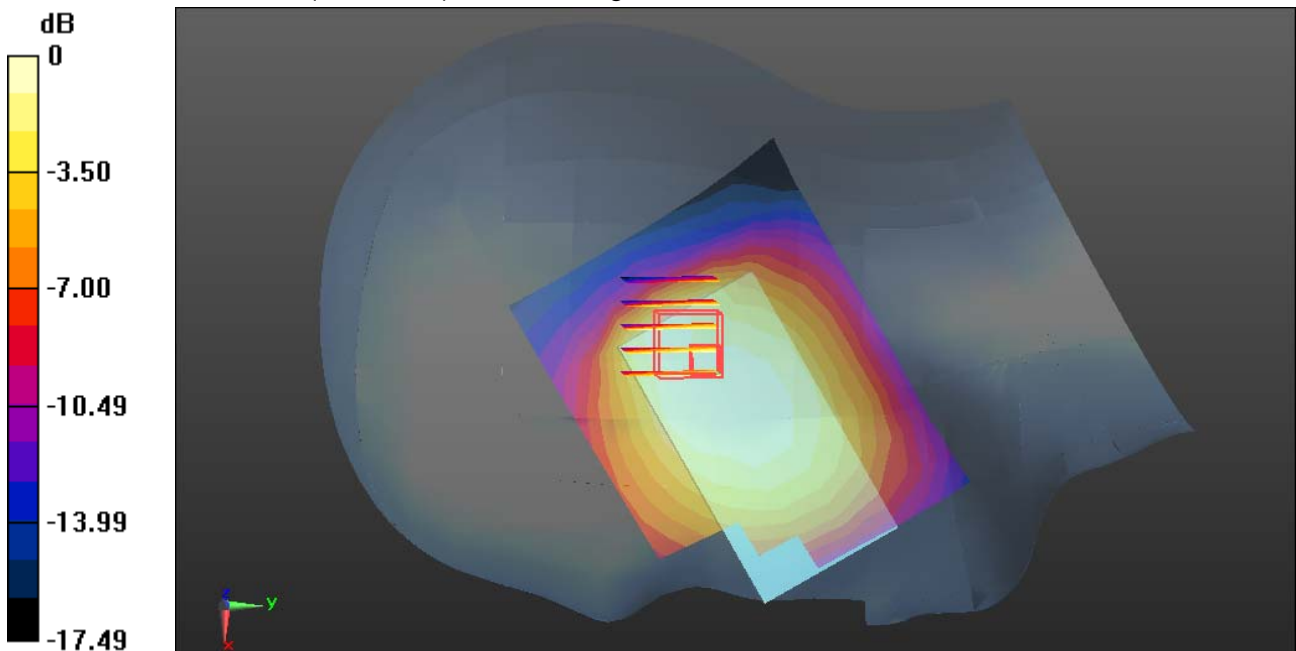

0 dB = 0.142 W/kg = -8.48 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Left Head Cheek Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Left Head Cheek Middle CH190/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.112 W/kg


GSM 850/Left Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.553 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.058 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.135 W/kg

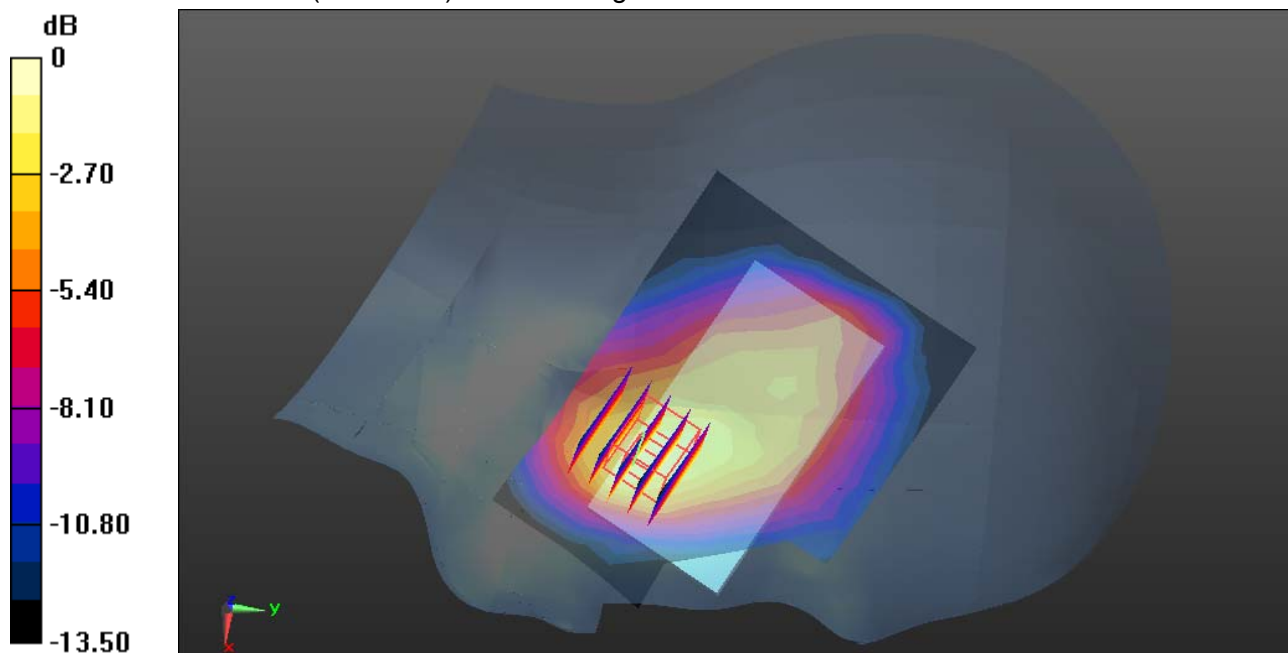

0 dB = 0.135 W/kg = -8.70 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Left Head Tilted Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.172$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Left Head Tilted Middle CH190/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.177 W/kg


GSM 850/Left Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.094 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.159 W/kg

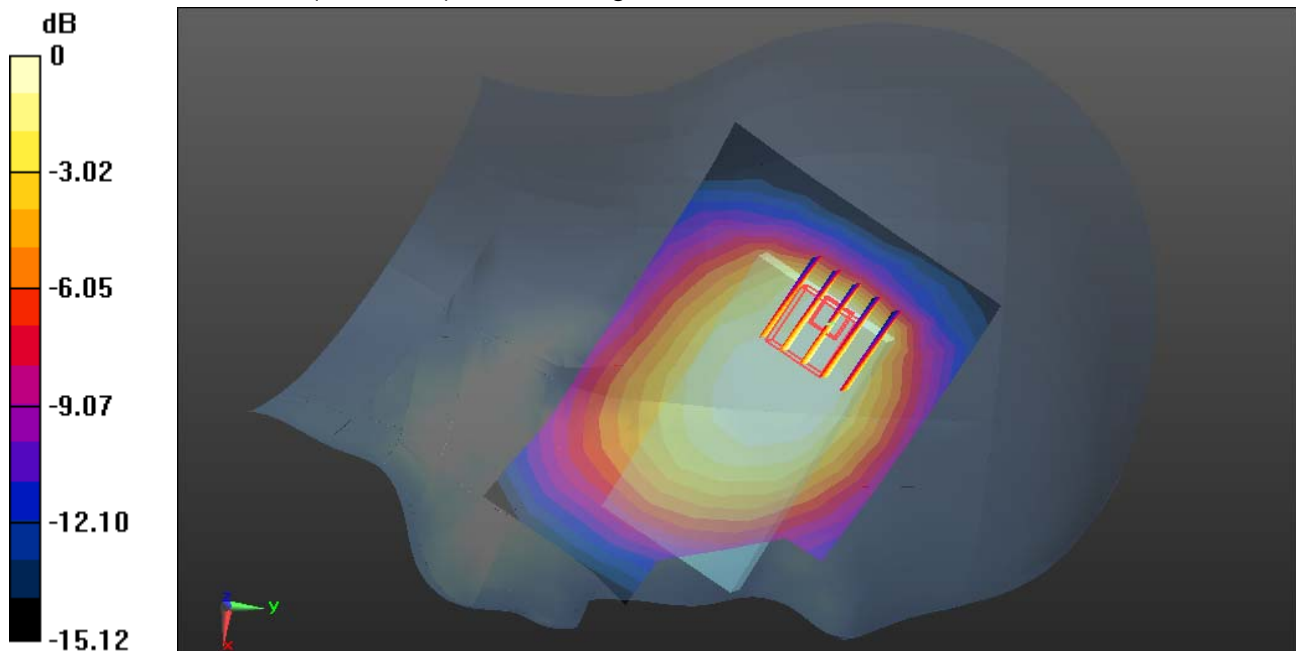

0 dB = 0.159 W/kg = -7.99 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Right Head Cheek Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Right Head Cheek Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0481 W/kg


PCS1900/Right Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.713 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.016 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0379 W/kg

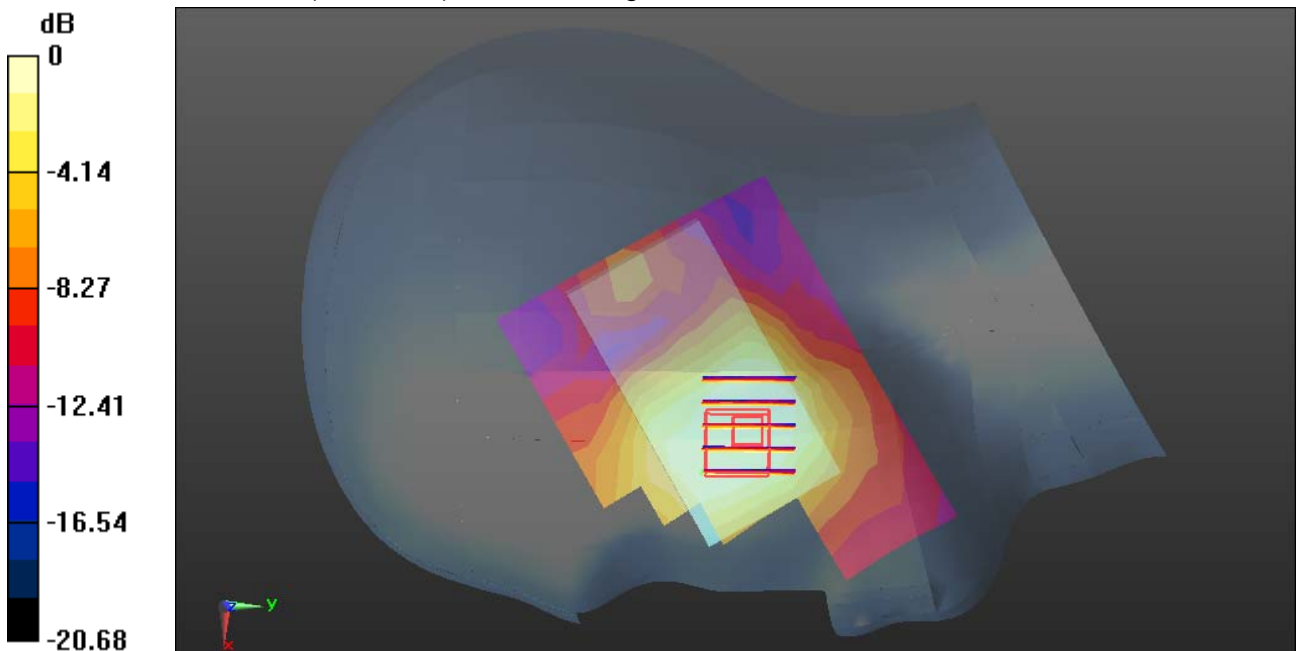

0 dB = 0.0379 W/kg = -14.21 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Right Head Tilted Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Right Head Tilted Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0152 W/kg


PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.700 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00638 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0201 W/kg

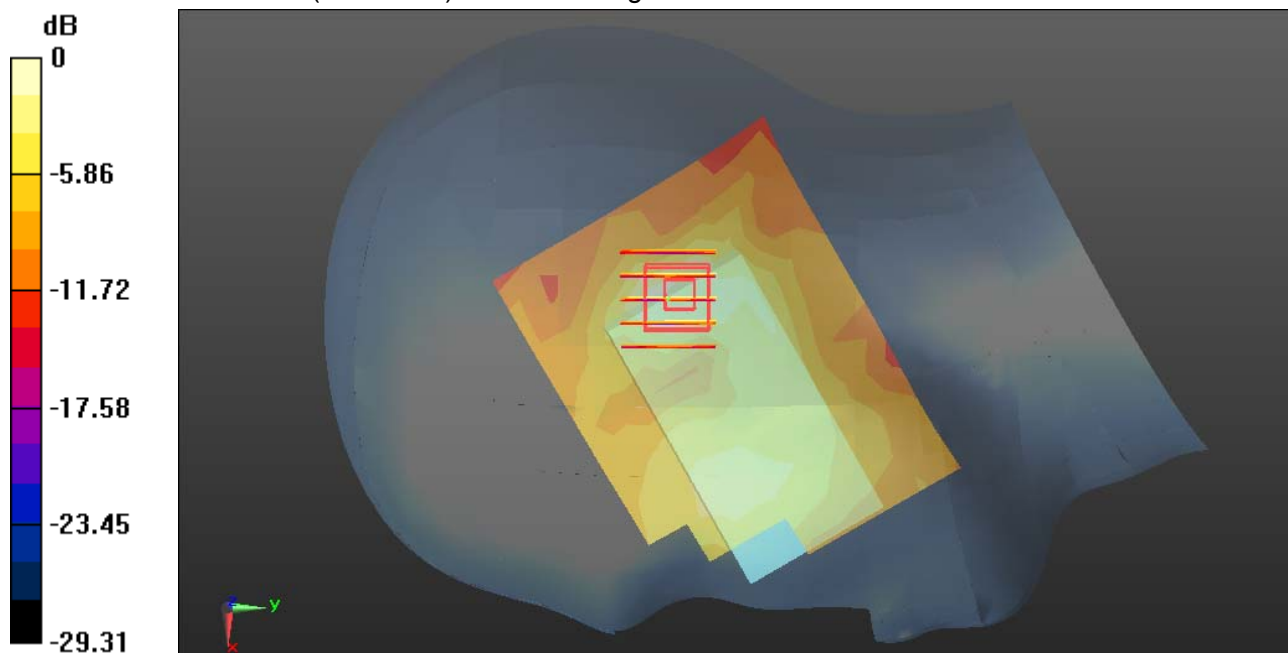

0 dB = 0.0201 W/kg = -16.97 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Left Head Cheek Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Left Head Cheek Low CH512/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0478 W/kg


PCS1900/Left Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.812 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.020 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0508 W/kg

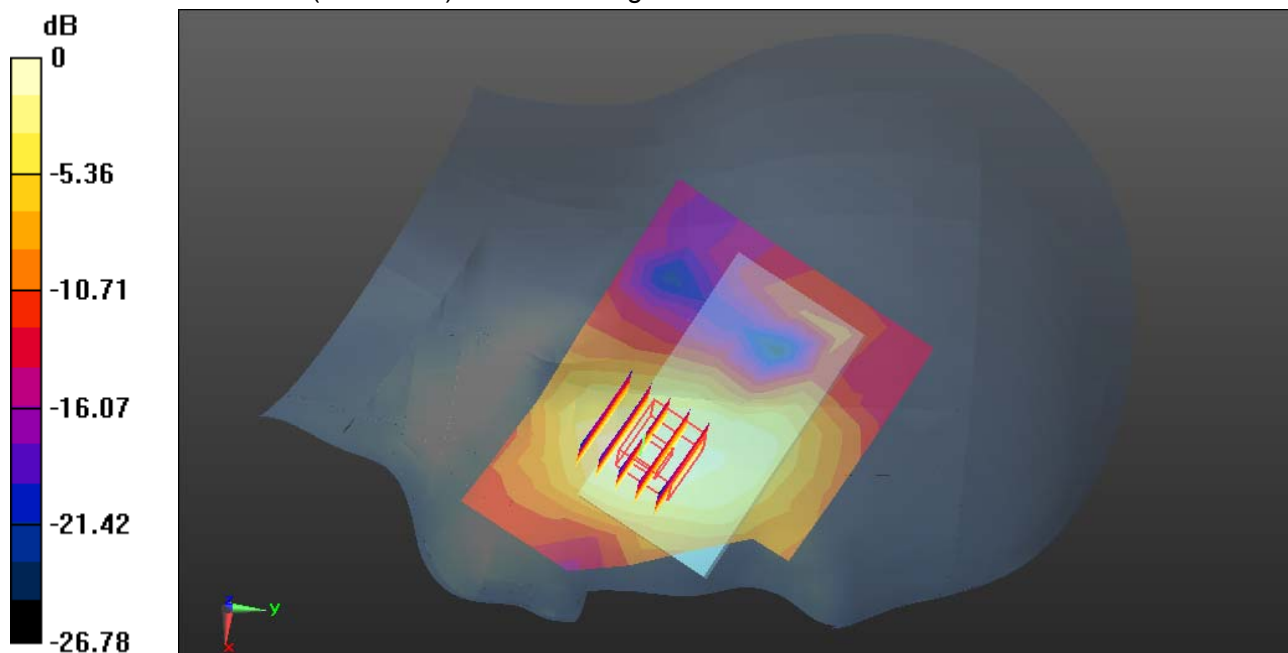

0 dB = 0.0508 W/kg = -12.94 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Left Head Tilted Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.573$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS1900/Left Head Tilted Low CH512/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0197 W/kg


PCS1900/Left Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.033 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00691 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0207 W/kg

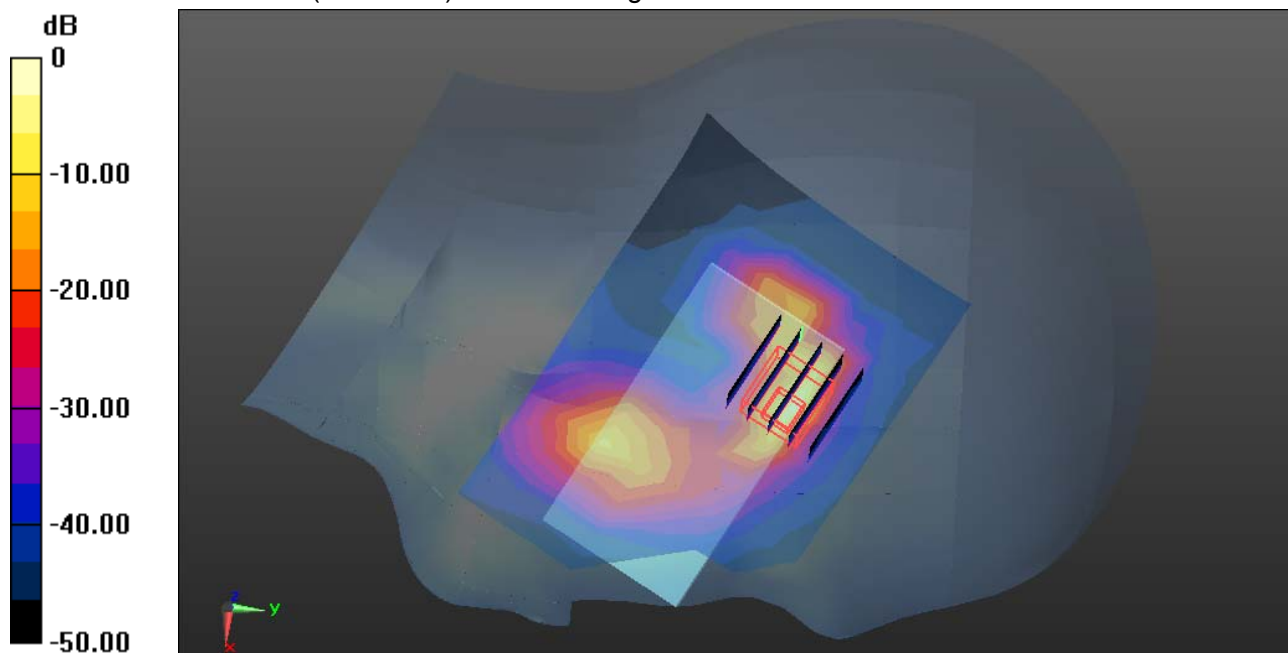

0 dB = 0.0207 W/kg = -16.84 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Body Front Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.262$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Body Front Middle CH190/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0637 W/kg


GSM 850/Body Front Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.223 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.039 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0636 W/kg

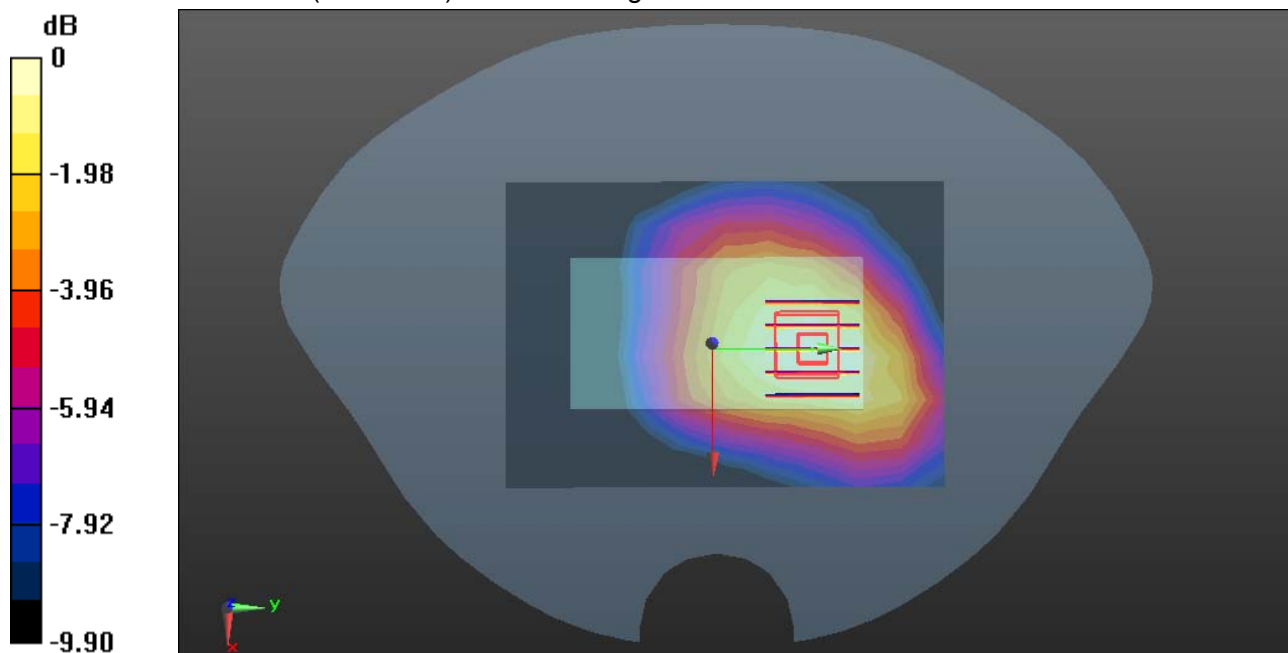

0 dB = 0.0636 W/kg = -11.97 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/19/2014

GSM 850-Body Rear Middle CH190**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.262$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

GSM 850/Body Rear Middle CH190/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.295 W/kg


GSM 850/Body Rear Middle CH190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.162 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 W/kg

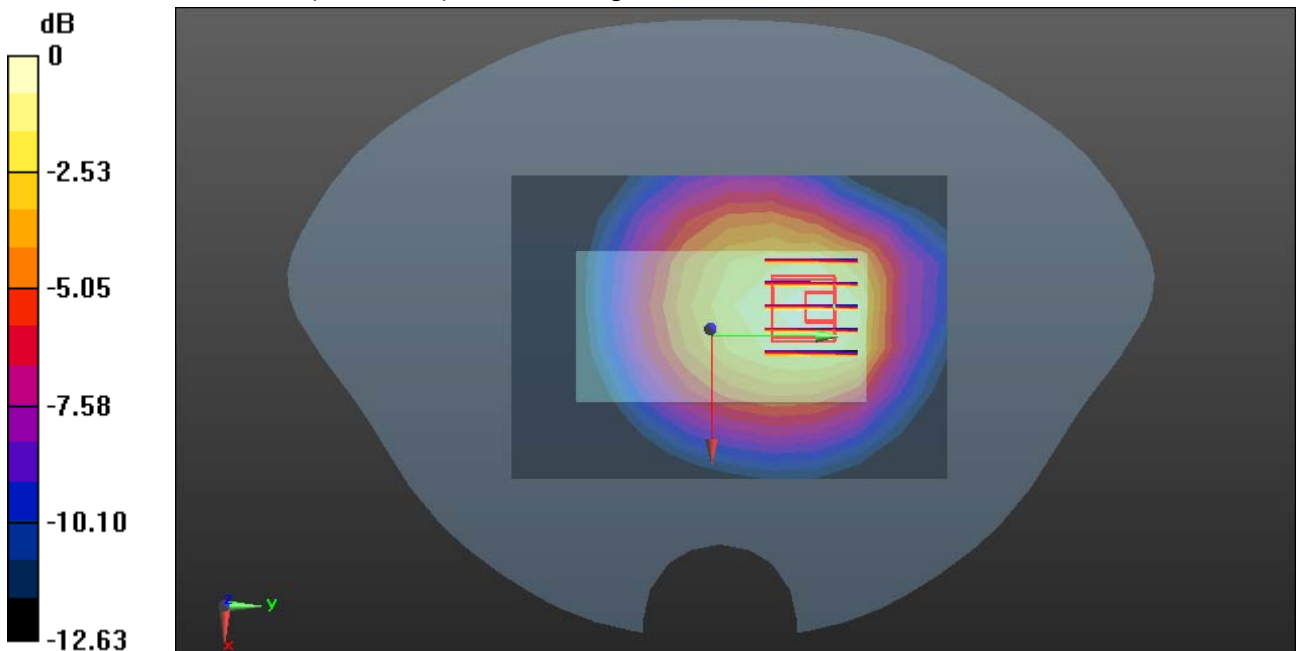

0 dB = 0.297 W/kg = -5.27 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Body Front Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS5 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Body Front Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0182 W/kg


PCS 1900/Body Front Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.609 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00729 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0181 W/kg

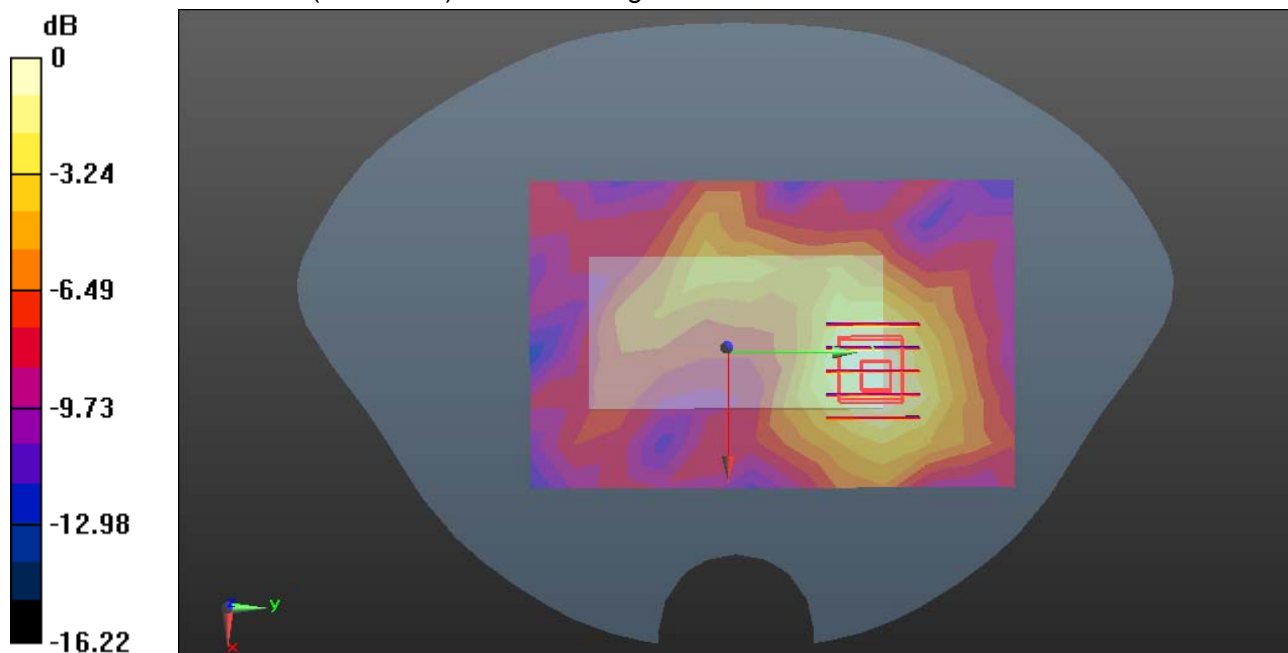

0 dB = 0.0181 W/kg = -17.42 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 9/21/2014

PCS 1900-Body Rear Low CH512**DUT: GSM mobile phone; Type: T6; Serial: 352273017386340**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 52.896$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

PCS 1900/Body Rear Low CH512/Area Scan (12x8x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0927 W/kg


PCS 1900/Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.424 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.027 W/kg[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0719 W/kg

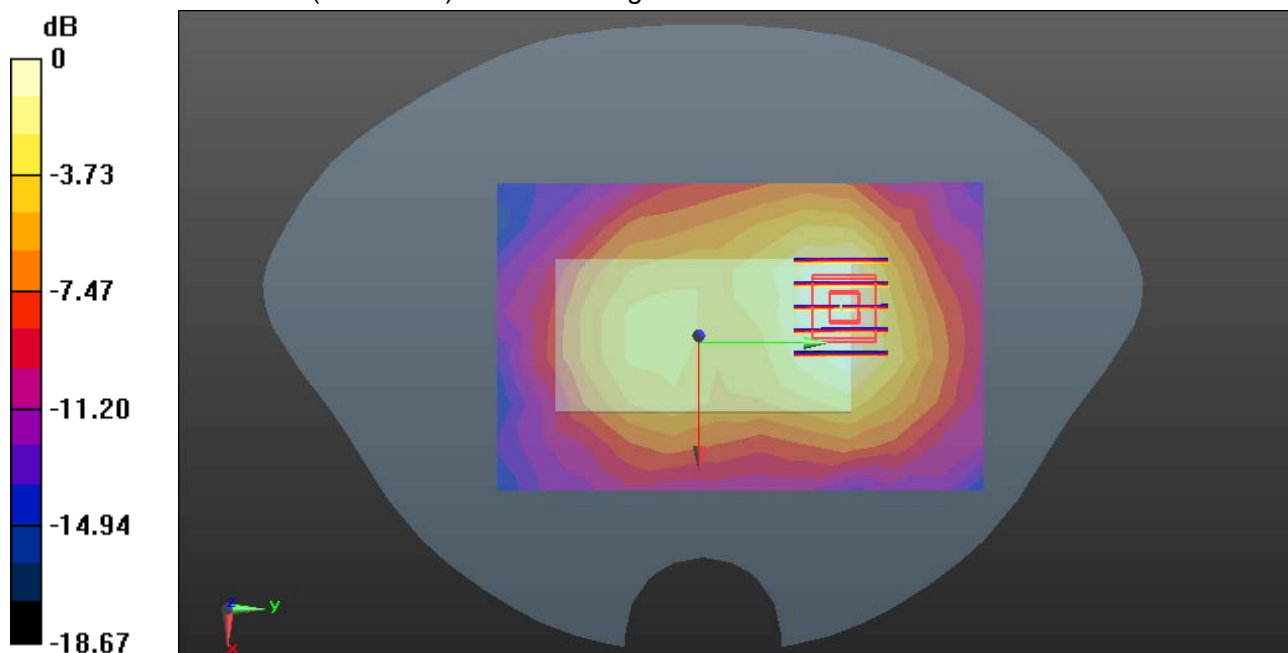

0 dB = 0.0719 W/kg = -11.43 dBW/kg