







ISO/IEC17025Accredited Lab.

Report No: FCC/IC 1409186
File reference No: 2014-10-24

Applicant: JIANGSU SHUANGSHUANG TECHNOLOGY CO., LTD.

Product: MID

Model No: D2-1014W

Trademark: N/A

Test Standards: FCC Part 15.247 and RSS-210

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, FCC Part 15 Subpart C, Paragraph 15.247 regulations and RSS-210 for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: October 24, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Date: 2014-10-24



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 121

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure	13
5.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	99% and 6dB Bandwidth Measurement.	38
8.0	Maximum Peak Output Power	77
9.0	Power Spectral Density Measurement.	80
10.0	Out of Band Measurement.	98
11.0	Antenna Requirement.	109
12.0	FCC Label.	110
13.0	Photo of Test Setup and EUT View.	111

Date: 2014-10-24



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: JIANGSU SHUANGSHUANG TECHNOLOGY CO., LTD.

Address: No.188, West Coastal Road, Haian County, Jiangsu Province, P.R. China.

Telephone: 0513-88355088 Fax: 0513-88355618

1.3 Description of EUT

Product: MID

Manufacturer: JIANGSU SHUANGSHUANG TECHNOLOGY CO., LTD.

Address: No.188, West Coastal Road, Haian County, Jiangsu Province, P.R. China.

Brand Name: N/A

Model Number: D2-1014W

Power Adapter Model No.: JY-05250

Input: 100-240V, 50/60Hz, 0.5A; Output: 5V, 2.5A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n(HT40): 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n(HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/40: 135, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

IEEE 802.11n HT40: 7 Channels

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-10-24



Page 5 of 121

Antenna: Integral Antenna with maximum gain 2.0 dBi

Rated input Voltage Input: DC5V, with Li-ion Battery 3.7V,7500mAh

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2014-09-29 to 2014-10-23

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Date: 2014-10-24



2.0	Test Equipments							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-22	2015-08-21			
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21			
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21			
Ultra Broadband ANT	R&S	HL562	100157	2014-08-22	2015-08-21			
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21			
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-22	2015-08-21			
System Controller	CT	SC100	-					
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	-				
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-			
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21			
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21			
3m OATS			N/A	2014-08-22	2015-08-21			
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2014-08-22	2015-08-21			
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2014-08-22	2015-08-21			
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21			
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-22	2015-08-21			
LISN	AFJ	LS16C	10010947251	2014-08-22	2015-08-21			
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21			
9*6*6 Anechoic			N/A	2014-08-22	2015-08-21			
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21			

Auxiliary Equipment 2.1

Name	Model No.	Rating	Manufacturer	FCC ID/DOC
Passive				
Earphone				
Monitor	PH2450		SAMSUNG	DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: FCC/IC1409186 Page 7 of 121

Date: 2014-10-24



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

IEEE 802.11n HT40

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Mid	2437
High	2452

IEEE 802.11n HT40 mode: 65Mbps data rate (worst case) was chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Date: 2014-10-24



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107	Conducted Emission Test	PASS	Complies
& 15.207 and RSS-210			
	Spectrum bandwidth of a		Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
Paragraph 15.247(a)(2) Limit	Division Multiplex System	PASS	
and RSS-210	Limit: 6dB		
	bandwidth>500kHz		
ECC Part 15 Danagraph	Maximum peak output		
FCC Part 15, Paragraph 15.247(b) and RSS-210	power	PASS	Complies
15.247(b) and RSS-210	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	PASS	Complies
15.109,15.205 & 15.209 and	Emission		
RSS-210	Limit: Table 15.209		
FCC Part 15, Paragraph	Power Spectral Density	PASS	Complies
15.247(e) and RSS-210	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	PASS	Complies
15.247(d) and RSS-210	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	Table 15.209		

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247 and RSS-210 Issue 8

EUT Modification 4.0


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Date: 2014-10-24



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

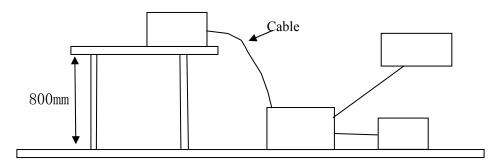

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID/IC
MID	JIANGSU SHUANGSHUANG	D2 1014W	FCC ID: 2ABDT-TQ10A10
MID	TECHNOLOGY CO., LTD.	D2-1014W	IC:12136A-TQ10A10

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186 Page 10 of 121

Date: 2014-10-24



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107 and RSS-210

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level Average Leve		Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2014-10-24



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

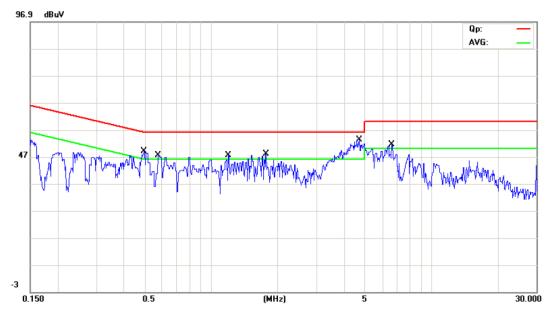

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBu∀	dB	Detector	Comment
1	0.4925	31.90	11.36	43.26	56.13	-12.87	QP	
2	0.4925	4.80	11.36	16.16	46.13	-29.97	AVG	
3	0.5750	31.50	11.45	42.95	56.00	-13.05	QP	
4	0.5750	5.00	11.45	16.45	46.00	-29.55	AVG	
5	1.7726	25.10	12.21	37.31	56.00	-18.69	QP	
6	1.7726	3.90	12.21	16.11	46.00	-29.89	AVG	
7	1.1933	28.60	11.98	40.58	56.00	-15.42	QP	
8	1.1933	2.00	11.98	13.98	46.00	-32.02	AVG	
9 *	4.6842	34.00	13.37	47.37	56.00	-8.63	QP	
10	4.6842	13.50	13.37	26.87	46.00	-19.13	AVG	
11	6.6017	30.50	12.83	43.33	60.00	-16.67	QP	
12	6.6017	7.20	12.83	20.03	50.00	-29.97	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-10-24



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

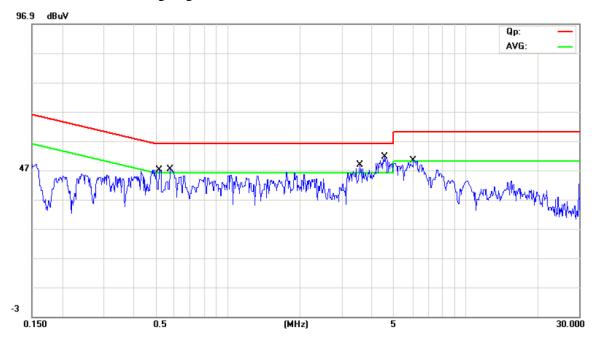

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBu∀	dBuV	dB	Detector	Comment
1		0.5187	29.40	11.39	40.79	56.00	-15.21	QP	
2		0.5187	-0.80	11.39	10.59	46.00	-35.41	AVG	
3		0.5743	28.70	11.45	40.15	56.00	-15.85	QP	
4		0.5743	1.10	11.45	12.55	46.00	-33.45	AVG	
5		3.5814	26.80	12.93	39.73	56.00	-16.27	QP	
6		3.5814	8.70	12.93	21.63	46.00	-24.37	AVG	
7	*	4.5766	32.40	13.33	45.73	56.00	-10.27	QP	
8		4.5766	11.40	13.33	24.73	46.00	-21.27	AVG	
9		6.0355	33.00	13.07	46.07	60.00	-13.93	QP	
10		6.0355	12.50	13.07	25.57	50.00	-24.43	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186 Page 13 of 121


Date: 2014-10-24



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS Detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with All installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are Distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

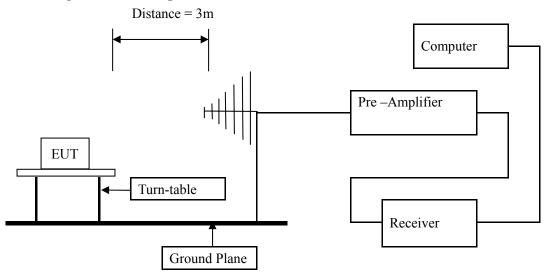

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC/IC1409186 Page 14 of 121

Date: 2014-10-24



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: FCC/IC1409186 Page 15 of 121

Date: 2014-10-24



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Keep WIFI Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
196.240	32.37	Н	43.50
164.160	28.21	Н	43.50
272.280	39.21	Н	46.00
182.920	34.29	V	43.50
168.120	32.27	V	43.50
273.440	34.93	V	46.00


Page 16 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Figure:

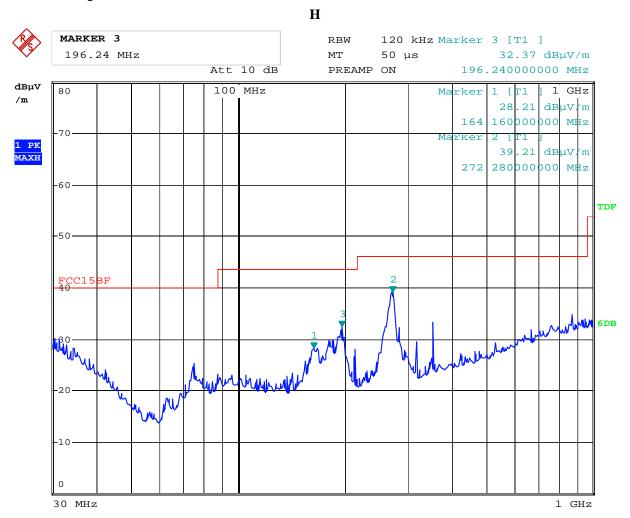

Date: 9.OCT.2014 15:54:20


Page 17 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Figure:

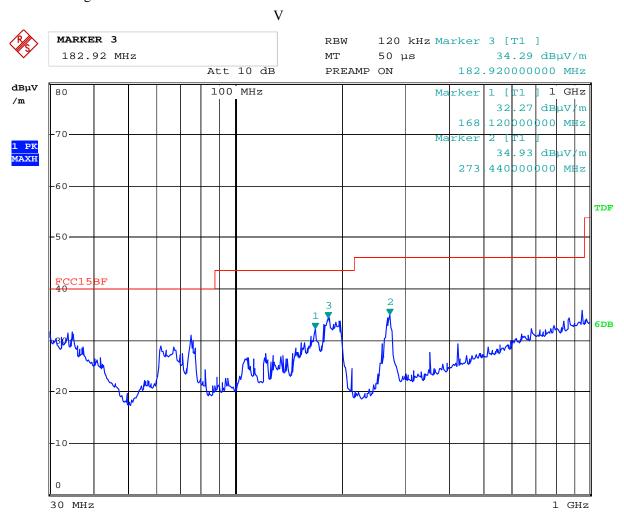

Date: 9.OCT.2014 15:57:37

Report No: FCC/IC1409186 Page 18 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4824.00	48.28 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.32 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2014-10-24



Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4874.00	48.15 (PK)	V	74(Peak)/ 54(AV)
4874.00	50.20 (PK)	Н	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4924	48.08 (PK)	Н	74(Peak)/ 54(AV)
4924	48.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772	-	H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

Date: 2014-10-24




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

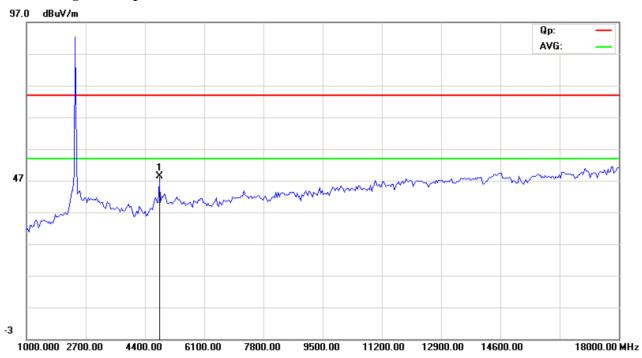

CH01 for 11g at 54Mbps: Vertical

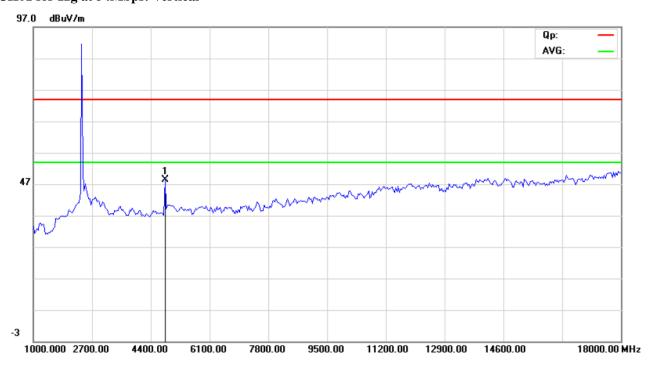


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-10-24



CH06 for 11g at 54Mbps: Vertical

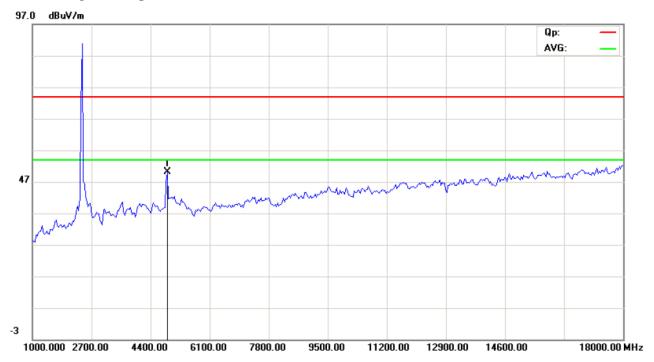

CH06 for 11g at 54Mbps: Horizontal

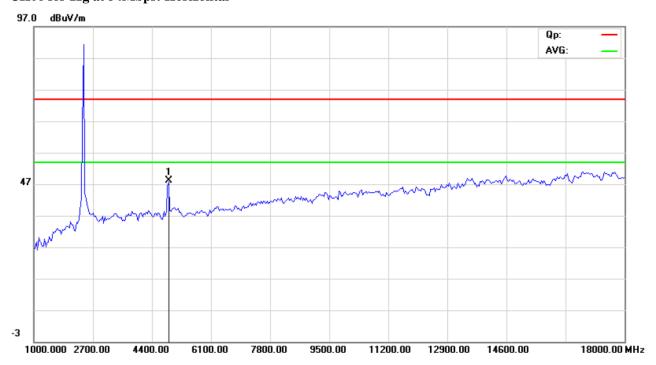


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-10-24



CH11 for 11g at 54Mbps: Vertical

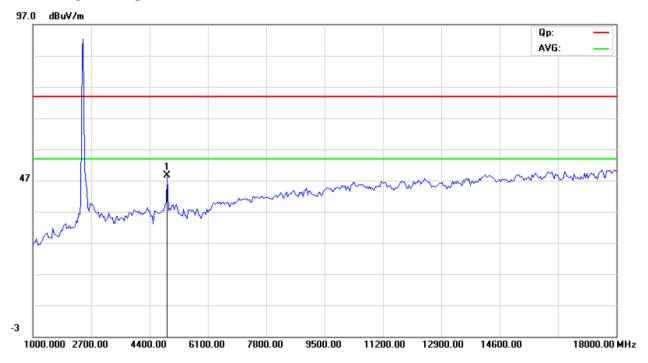

CH11 for 11g at 54Mbps: Horizontal

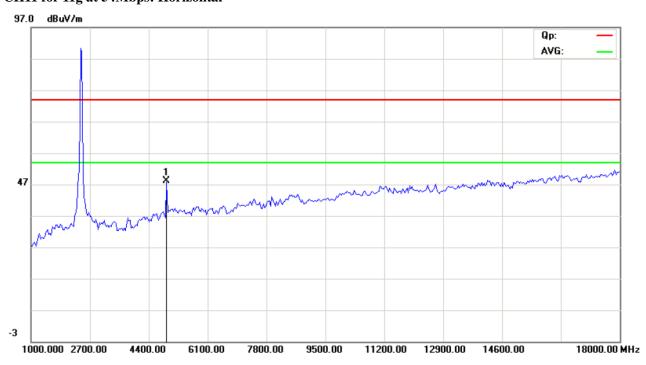

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186 Page 23 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4824.00	46.82 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4874.00	47.51 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.58 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC/IC1409186 Page 24 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4924	47.79 (PK)	Н	74(Peak)/ 54(AV)
4924	49.13 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2014-10-24




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

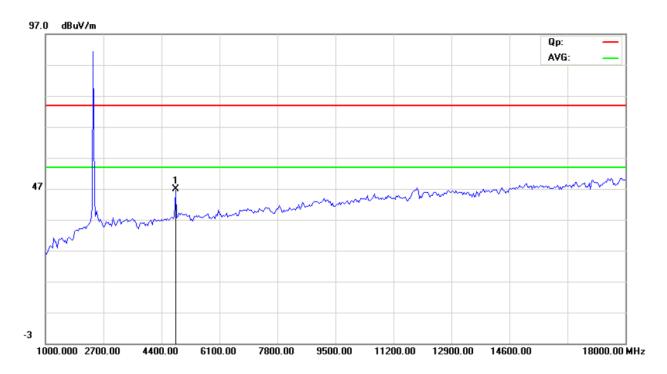

CH01 for 11b at 11Mbps: Vertical

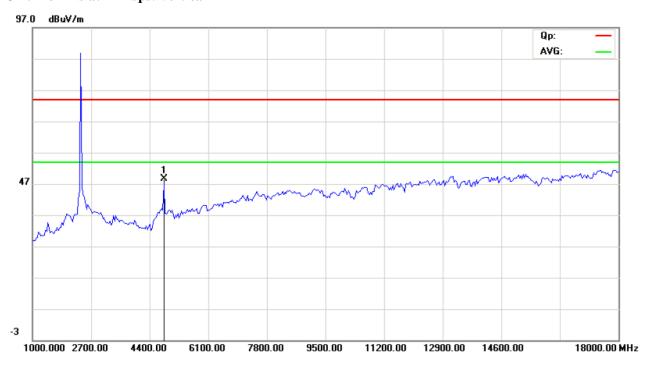

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 26 of 121

Report No: FCC/IC1409186


Date: 2014-10-24



CH06 for 11b at 11Mbps: Vertical

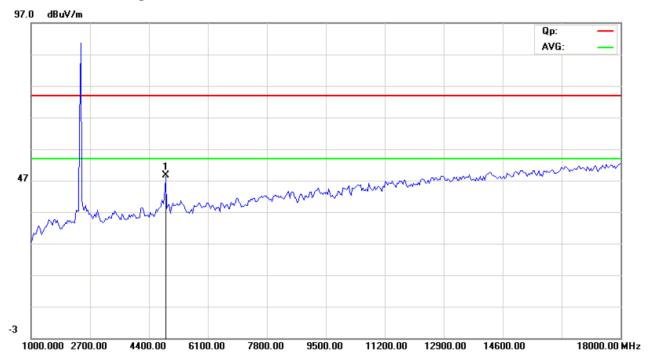

CH06 for 11b at 11Mbps: Horizontal

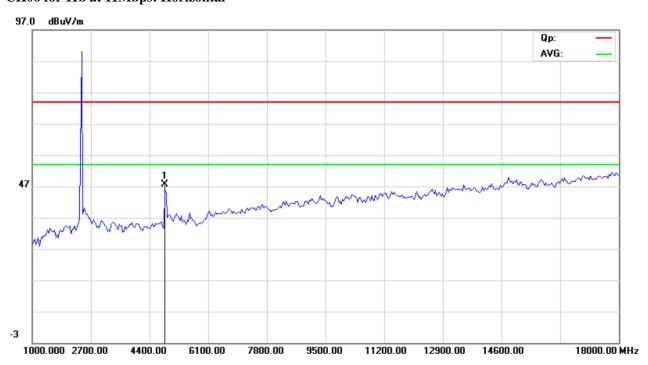


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-10-24



CH11 for 11b at 11Mbps: Vertical

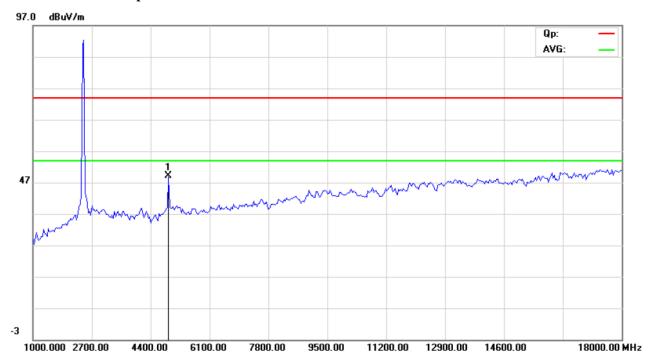

CH11 for 11b at 11Mbps: Horizontal

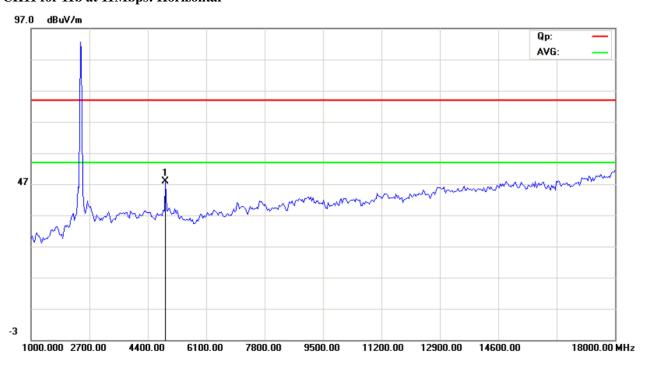

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186 Page 28 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH01 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4824.00	48.35 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4874.00	48.54 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.19 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC/IC1409186 Page 29 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4924	47.19 (PK)	Н	74(Peak)/ 54(AV)
4924	46.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Date: 2014-10-24




Please refer to the following test plots for details:

CH01 for 11n HT20 at 65Mbps: Horizontal

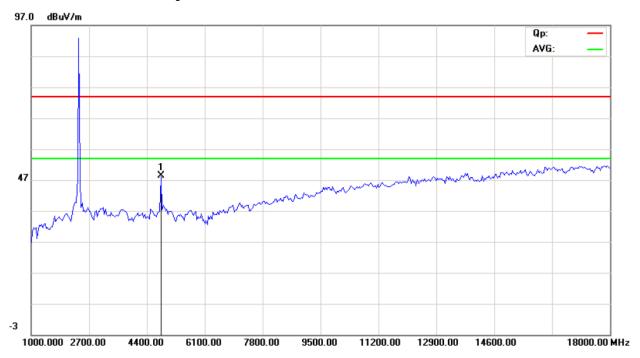

CH01 for 11n HT20 at 65Mbps: Vertical

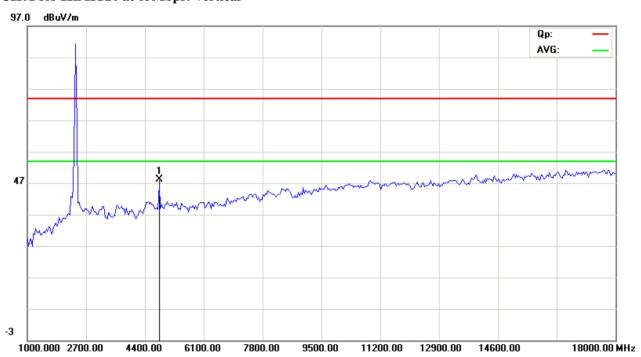

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 31 of 121

Report No: FCC/IC1409186


Date: 2014-10-24



CH06 for 11n HT20 at 65Mbps: Vertical

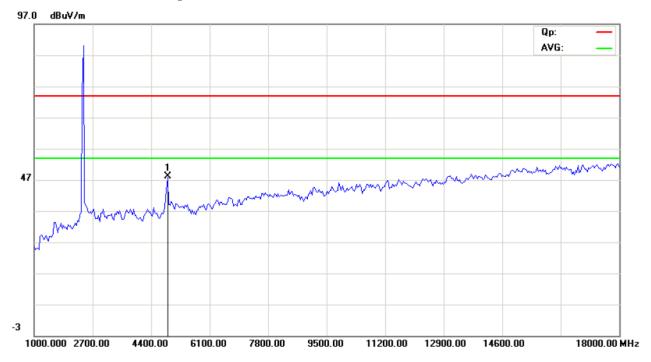

CH06 for 11n HT20 at 65Mbps: Horizontal

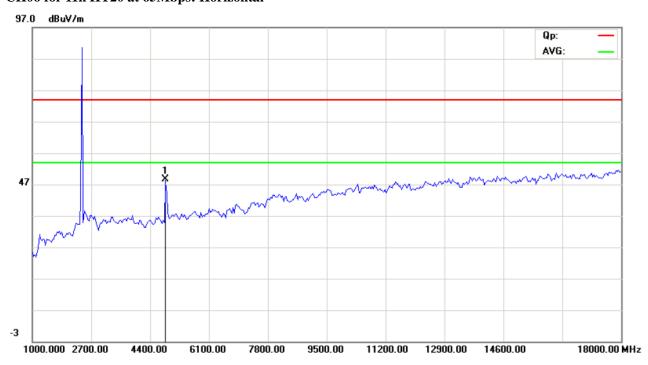


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-10-24



CH11 for 11n HT20 at 65Mbps: Vertical

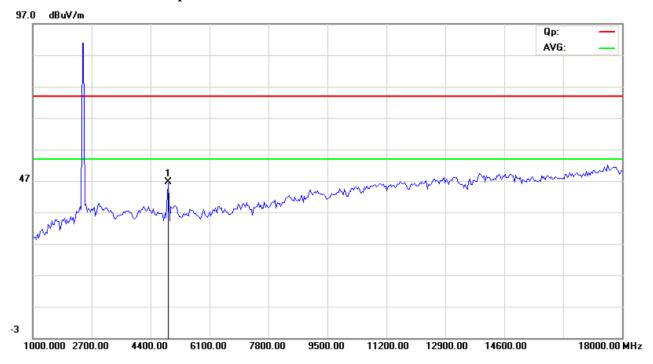

CH11 for 11n HT20 at 65Mbps: Horizontal

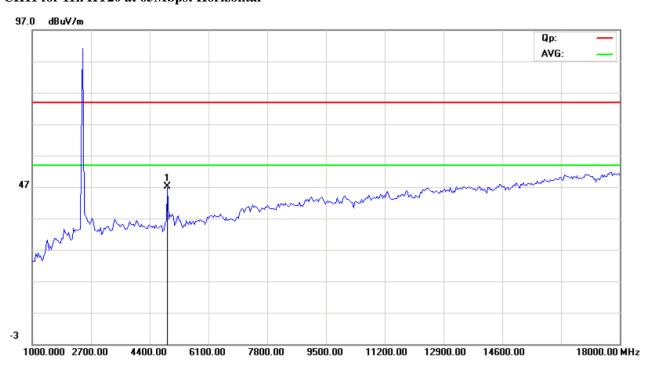

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186 Page 33 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH01 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4844.00	47.51 (PK)	Н	74(Peak)/ 54(AV)
4844.00	47.77 (PK)	V	74(Peak)/ 54(AV)
7266.00		H/V	74(Peak)/ 54(AV)
9688.00	-	H/V	74(Peak)/ 54(AV)
12110		H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954		H/V	74(Peak)/ 54(AV)
19376	-	H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH04 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4874.00	49.16 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.53 (PK)	V	74(Peak)/ 54(AV)
7311.00	1	H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933	-	H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Report No: FCC/IC1409186 Page 34 of 121

Date: 2014-10-24



Operation Mode: Transmitting under CH07 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4904	48.23 (PK)	Н	74(Peak)/ 54(AV)
4904	48.58 (PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808		H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Date: 2014-10-24




Please refer to the following test plots for details:

CH01 for 11n HT40 at 65Mbps: Horizontal

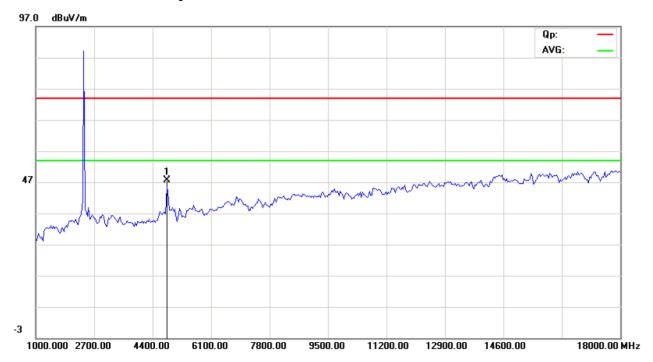

CH01 for 11n HT40 at 65Mbps: Vertical

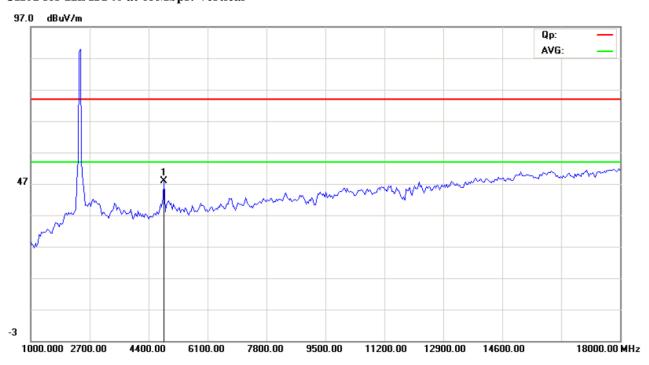

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 36 of 121

Report No: FCC/IC1409186


Date: 2014-10-24



CH04 for 11n HT40 at 65Mbps: Vertical

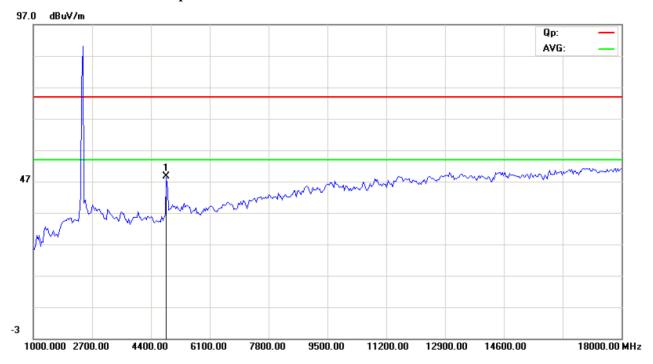

CH04 for 11n HT40 at 65Mbps: Horizontal

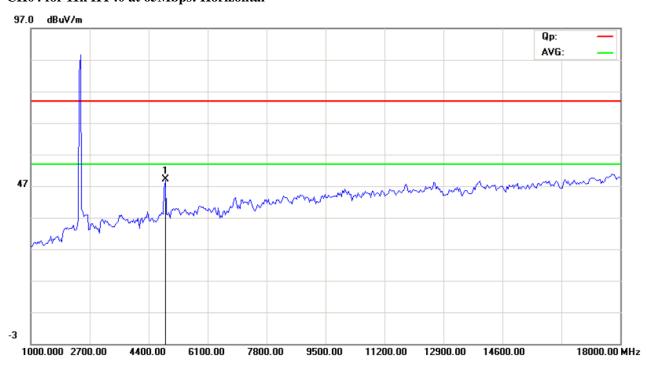

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: FCC/IC1409186


Date: 2014-10-24



CH07 for 11n HT40 at 65Mbps: Vertical

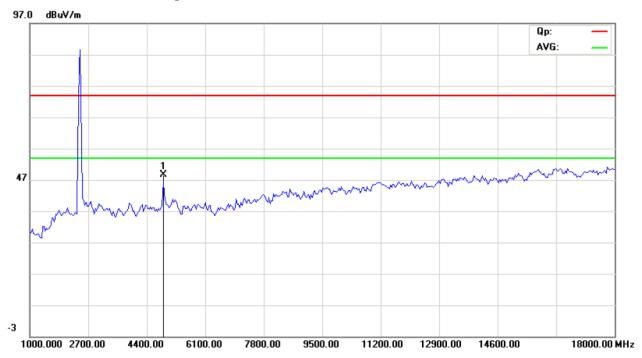

CH07 for 11n HT40 at 65Mbps: Horizontal

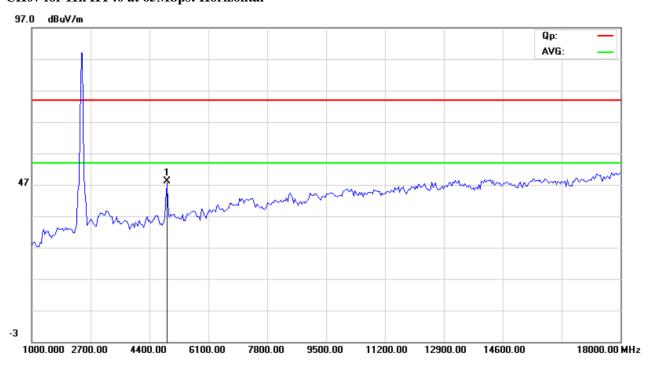

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 38 of 121


Report No: FCC/IC1409186

Date: 2014-10-24



7.0 99% and 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 99% and 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: FCC/IC1409186 Page 39 of 121

Date: 2014-10-24



99% Occupied Bandwidth


EUT		MID			Model		D2-1014W	
Mode		8	Input Voltage		DC3.7V			
Temperat	ure	24		Humidity		56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)	Minimum Limit (MHz)		Pass/ Fail
1		2412	1	15.06				Pass
6		2437	1	15.06		.06		Pass
11		2462	1	15.12				Pass
1		2412	11	15.00		.00		Pass
6		2437	11	14.94				Pass
11		2462	11	14	.94			Pass

Page 40 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



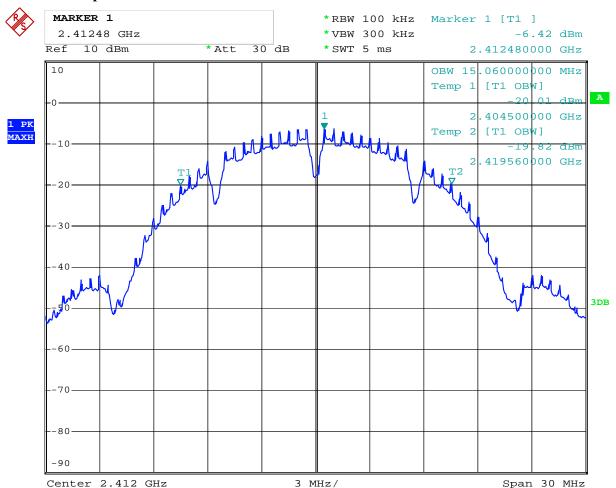


Page 41 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



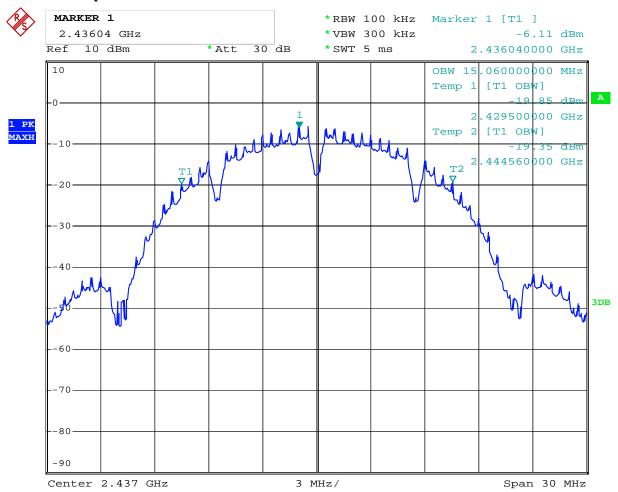


Page 42 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



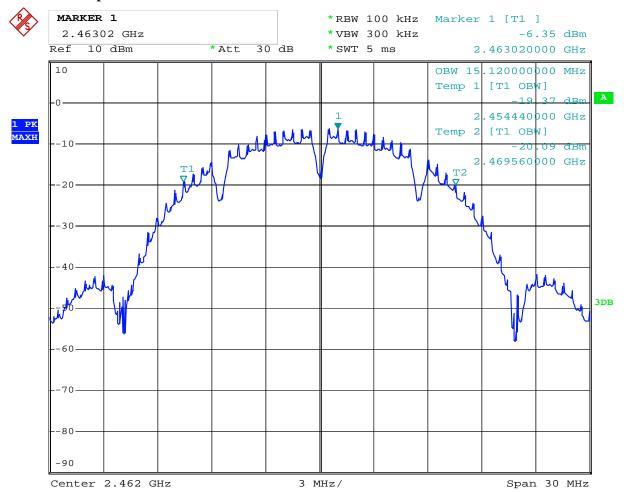


Page 43 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



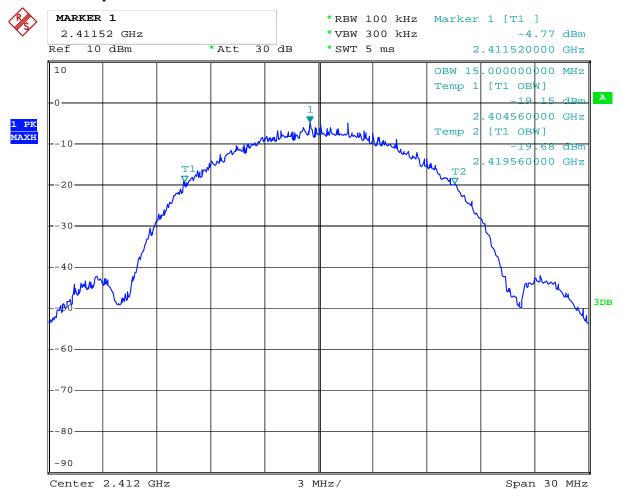


Page 44 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



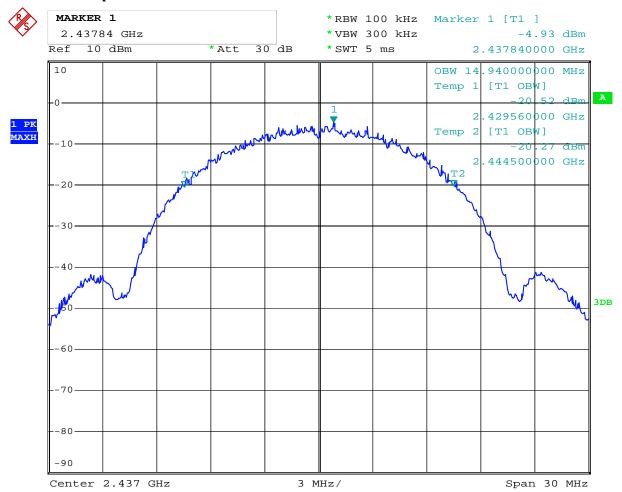


Page 45 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



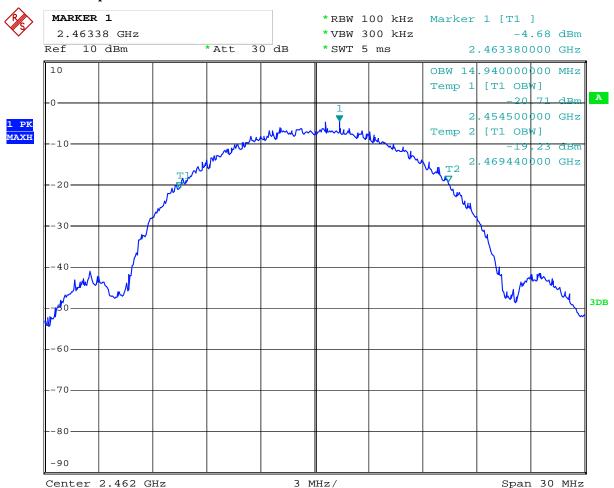

Report No: FCC/IC1409186 Page 46 of 121

Date: 2014-10-24



99% Occupied Bandwidth

EUT		MID			Model		D2-1014W	
Mode		8		Input Voltage		DC3.7V		
Temperature		24 deg. C,			Humidity		56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	54	16	5.62			Pass
6		2437	54	16	5.62			Pass
11		2462	54	16	62			Pass


Page 47 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

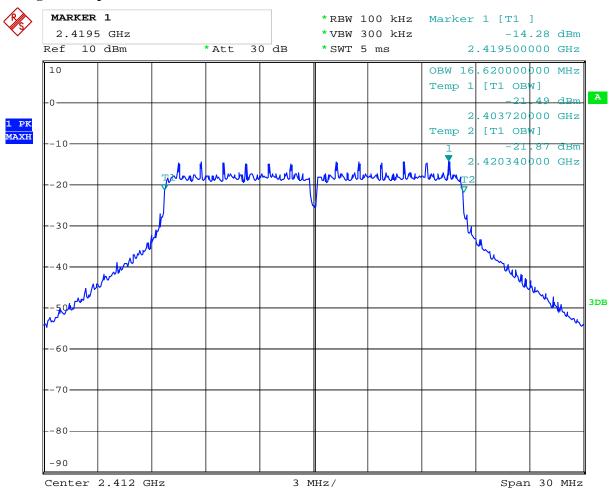


Page 48 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



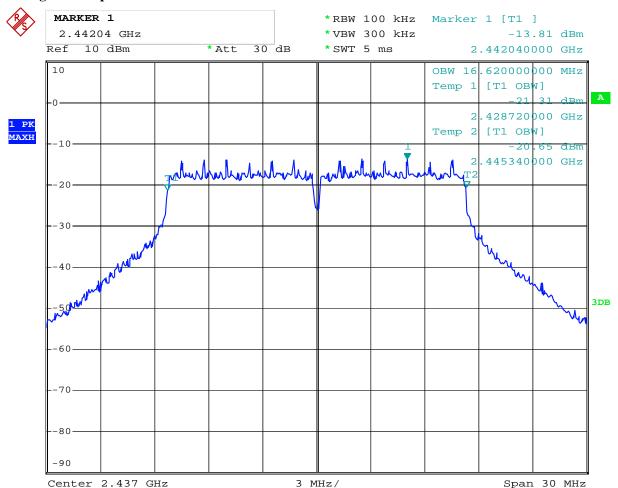


Page 49 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



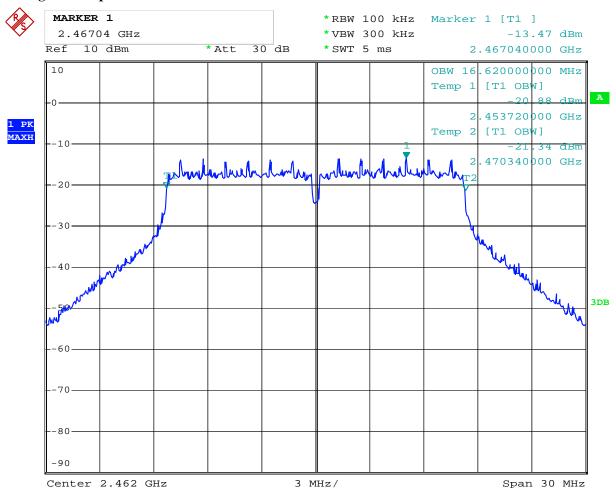

Report No: FCC/IC1409186 Page 50 of 121

Date: 2014-10-24



99% Occupied Bandwidth

EUT		MID			Model		D2-1014W	
Mode		802		Input Voltage		DC3.7V		
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	99% Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2412	65M	17	.82			Pass
6		2437	65M	17	.82			Pass
11		2462	65M	17	.82			Pass


Page 51 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

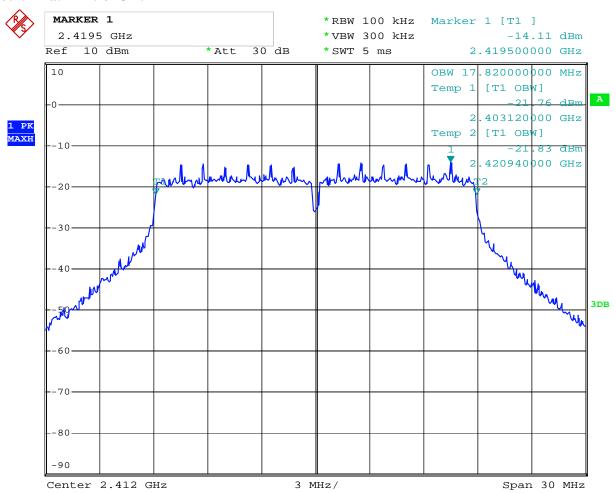


Page 52 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



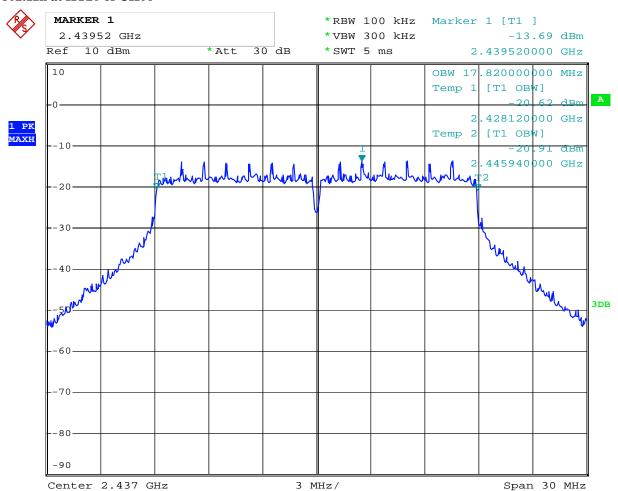


Page 53 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



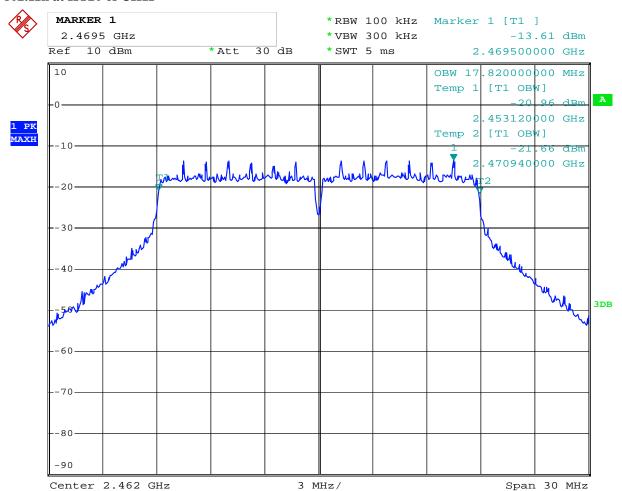

Report No: FCC/IC1409186 Page 54 of 121

Date: 2014-10-24



99% Occupied Bandwidth

EUT		MID			Model		D2-1014W	
Mode		802.11n HT40			Input Voltage		DC3.7V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	99% Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1		2422	65M	36	.10			Pass
4		2437	65M	36	.20			Pass
7		2452	65M	36	.10			Pass


Page 55 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

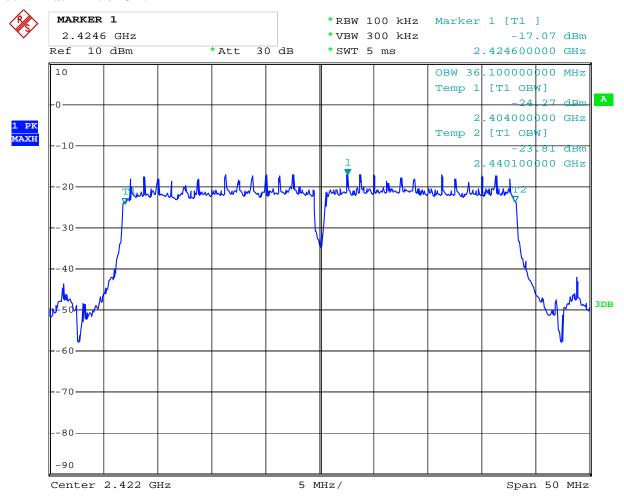


Page 56 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



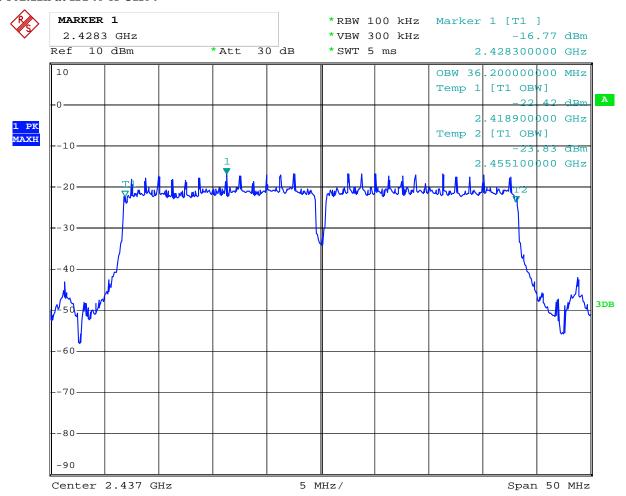


Page 57 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



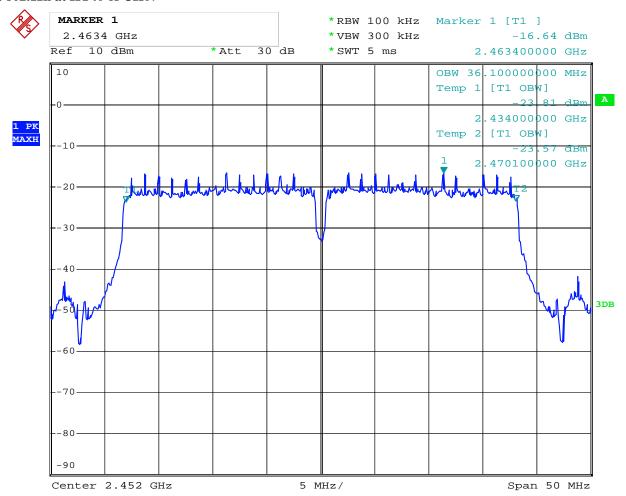

Report No: FCC/IC1409186 Page 58 of 121

Date: 2014-10-24



6dB Occupied Bandwidth


EUT		MID			Model		D2-1014W			
Mode		802.11b			Input Voltage		DC3.7V			
Temperat	ure	24		Humidity		56% RH				
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail		
1		2412	1	10.08		0.5		Pass		
6		2437	1	1 10			0.5	Pass		
11		2462	1	10.08			0.5	Pass		
1		2412	11	10.02			0.5	Pass		
6		2437	11	10.02		10.02			0.5	Pass
11		2462	11	10	10.02		0.5	Pass		

Page 59 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



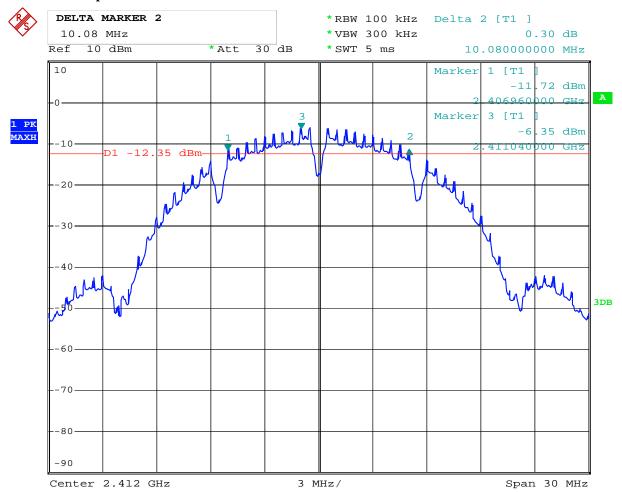


Page 60 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



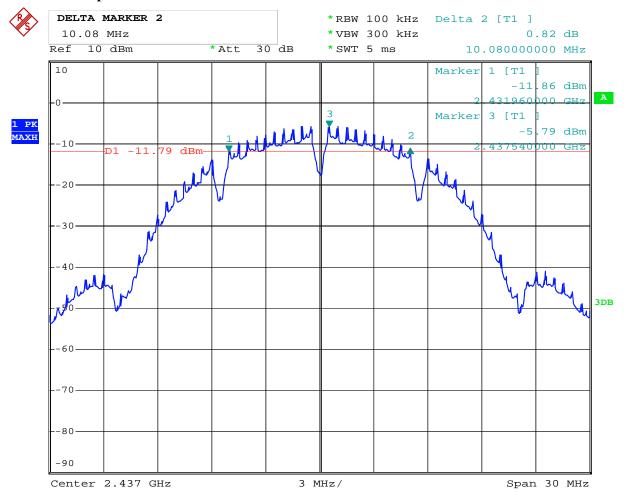


Page 61 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



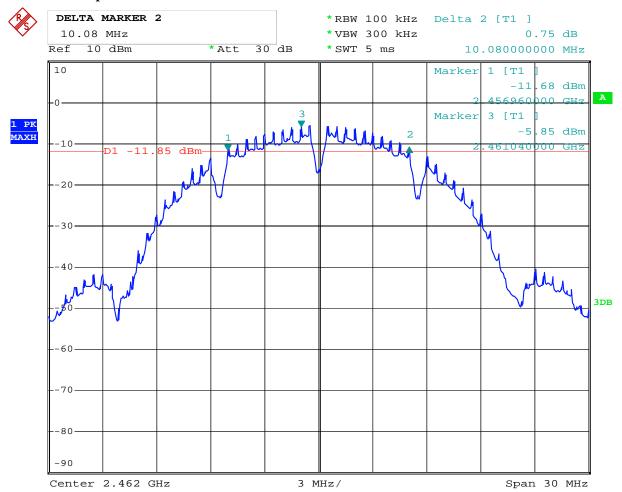


Page 62 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



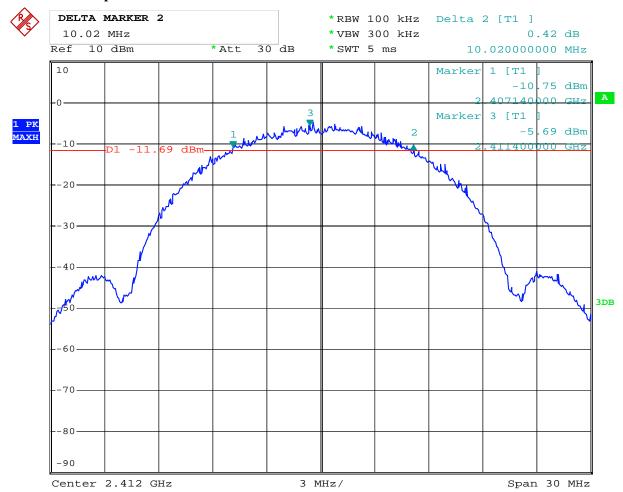


Page 63 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



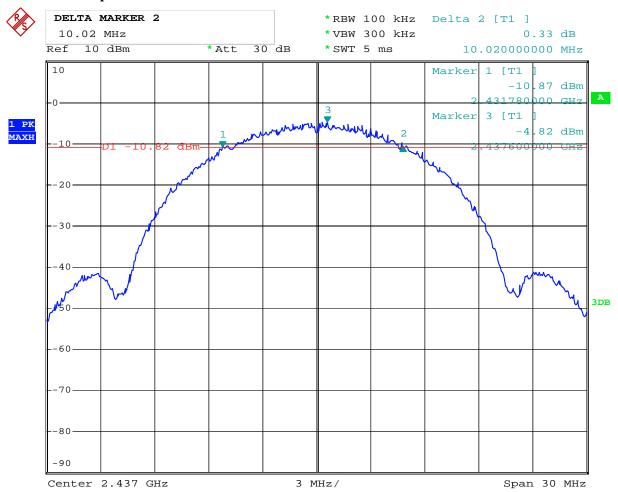


Page 64 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



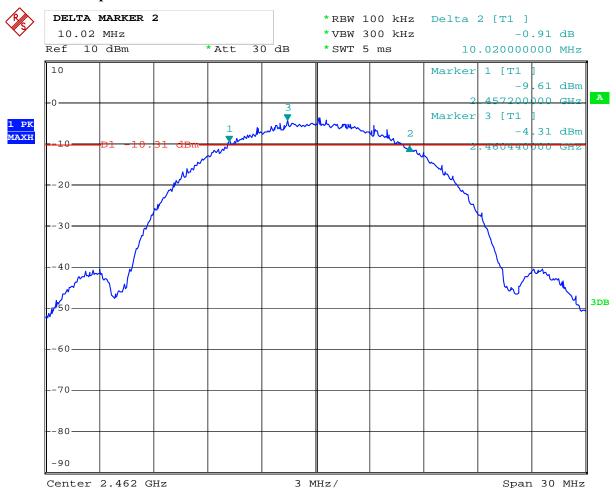

Report No: FCC/IC1409186 Page 65 of 121

Date: 2014-10-24



6dB Occupied Bandwidth

EUT		MID			Model		D2-1014W	
Mode		8		Input Voltage		DC3.7V		
Temperature		24 deg. C,			Humidity		5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	54	16	5.50		0.5	Pass
6		2437	54	16.50			0.5	Pass
11		2462	54	16.50			0.5	Pass


Page 66 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

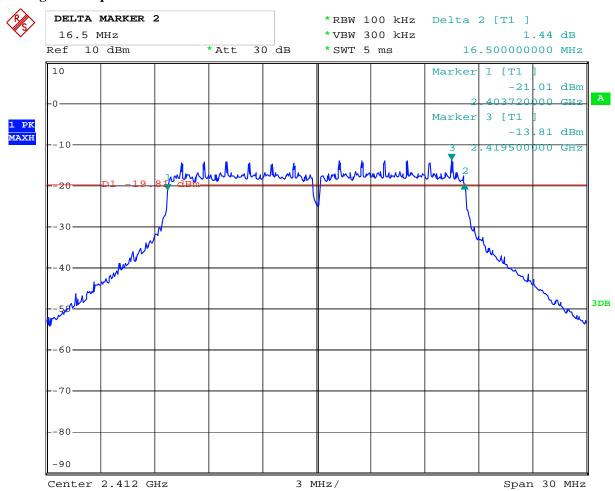


Page 67 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



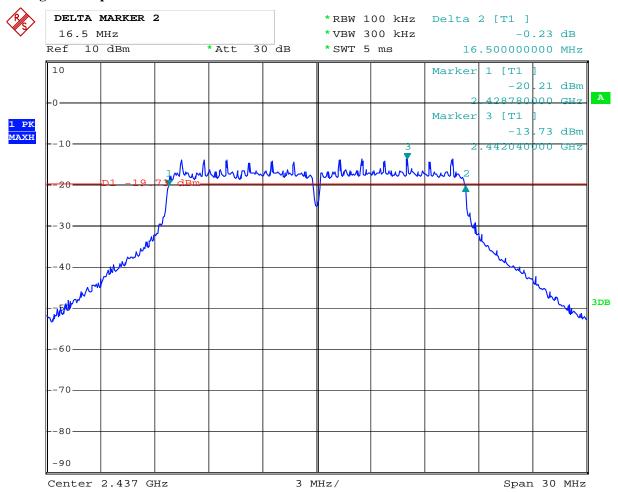


Page 68 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



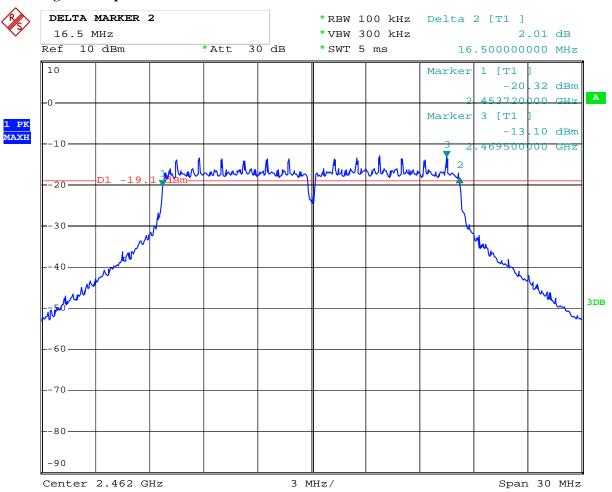

Report No: FCC/IC1409186 Page 69 of 121

Date: 2014-10-24



6dB Occupied Bandwidth

EUT		MID			Model		D2-1014W			
Mode		802.11n HT20			Input Voltage		DC3.7V			
Temperature		24 deg. C,			Humidity		56% RH			
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail		
1		2412	65M	17	.76		0.5	Pass		
6		2437	65M	17	17.76		17.76		0.5	Pass
11		2462	65M	17	17.76		0.5	Pass		


Page 70 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

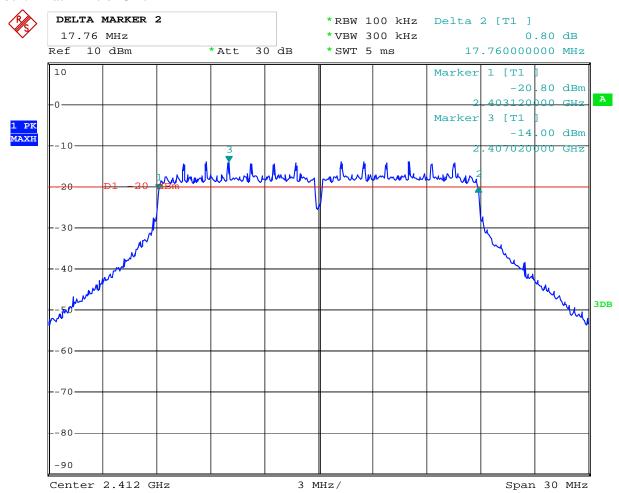


Page 71 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



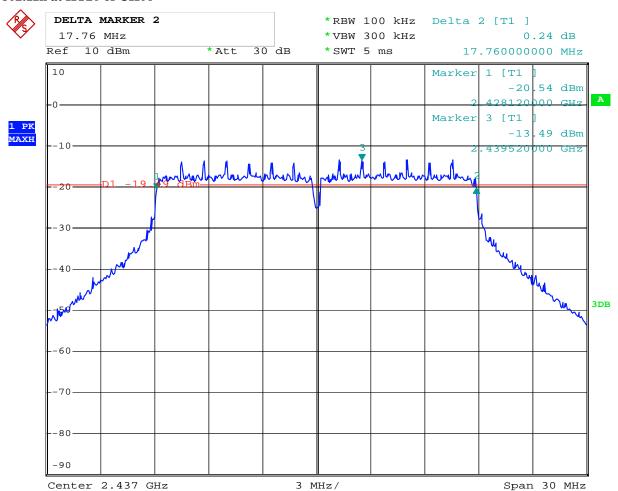


Page 72 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



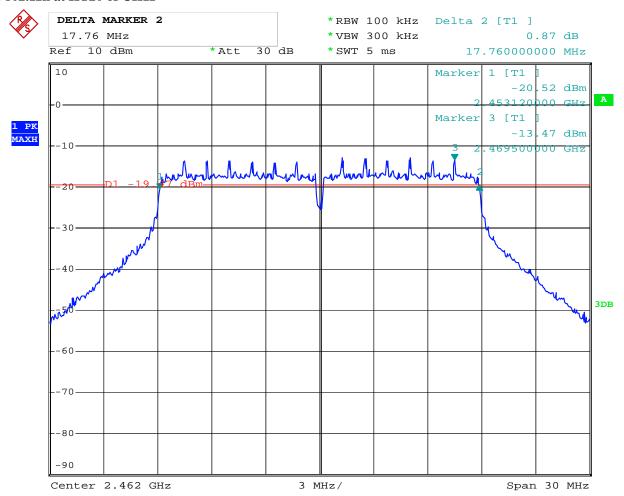

Report No: FCC/IC1409186 Page 73 of 121

Date: 2014-10-24



6dB Occupied Bandwidth

EUT			MID		Model		D2-1014W	
Mode		802	.11n HT40		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity	7 56% RH		% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ındwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2422	65M	36	.40	0.5		Pass
4		2437	65M	36	.40		0.5	Pass
7		2452	65M	36	.40		0.5	Pass


Page 74 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Test Plots:

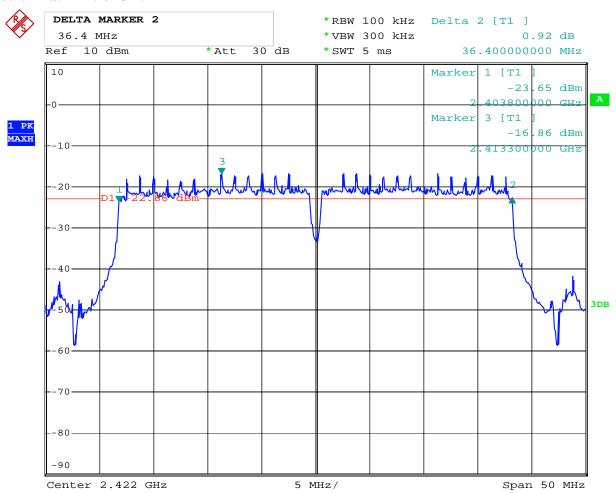


Page 75 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



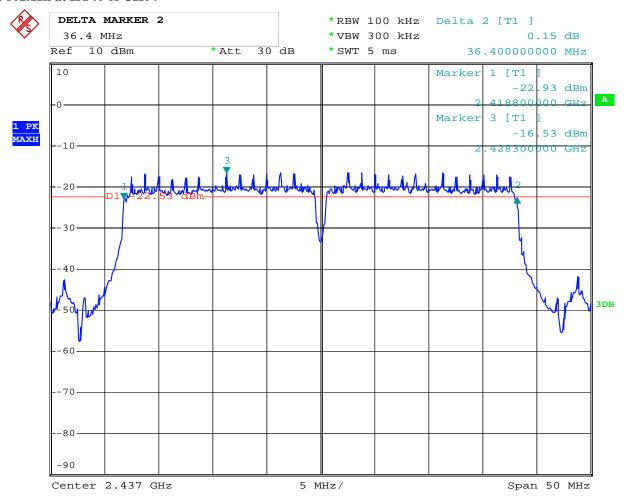


Page 76 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



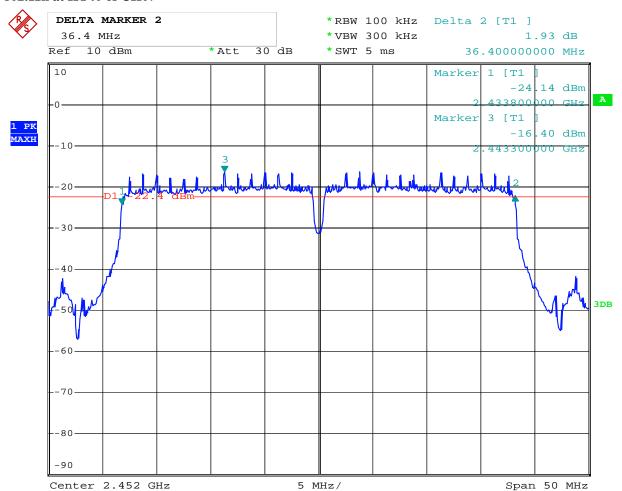

Report No: FCC/IC1409186

Date: 2014-10-24



Page 77 of 121

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Page 78 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



8.4Test Results

EUT	Г МІГ		D Mo		odel		D2-1014W
Mode	Mode 802.1		1b Inp		Input Voltage		DC3.7V
Temperat	ure	24 deg	g. C,	Hur	midity 5		56% RH
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	9.42		30		Pass
6		2437	9.55		30		Pass
11		2462	9.73		30		Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT MID		D Mc		odel		D2-1014W
Mode	Mode 802.1		1g	Input Voltage			DC3.7V
Temperat	ure	24 deg	g. C,	Humidity		56% RH	
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	5.74		30		Pass
6		2437	6.00		30		Pass
11		2462	6.15		30		Pass

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 79 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



EUT	MID		D Mo		odel		D2-1014W
Mode		802.11n ((HT20)	HT20) Input Vo			DC3.7V
Temperati	ure	24 deg	g. C,	Hur	nidity		56% RH
Channel	Cha	annel Frequency (MHz)	uency Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	5.92	5.92)	Pass
6		2437 6.17			30		Pass
11		2462	6.51		30)	Pass

Note: 1. At finial test to get the worst-case emission at 65Mbps of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT MIE		D Mo		odel		D2-1014W	
Mode	Mode 802.11n (F		(HT40) Input		Input Voltage		DC3.7V	
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Peak Power Ou (dBm)		Peak Power Limit (dBm)		Pass/ Fail	
1		2422	5.84		30		Pass	
4		2437 5.		30)	Pass	
7		2452	6.17		30		Pass	

Note: 1. At finial test to get the worst-case emission at 65Mbps of 11n HT40 for CH01, CH04 and CH7

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No: FCC/IC1409186 Page 80 of 121

Date: 2014-10-24



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = \max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: FCC/IC1409186 Page 81 of 121

Date: 2014-10-24



9.4Test Result

EUT	EUT MID		D Mo		odel		D2-1014W
Mode	Mode 802.11b 11Mbps Inpu		Input	Input Voltage		DC3.7V	
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Cha	annel Frequency (MHz)	Final RF Po Level (dB				Pass/ Fail
			11Mbps	S			
1		2412	-14.81	3			Pass
6		2437	-14.32	8			Pass
11		2462	-14.58		8		Pass

EUT	EUT MID		D Mo		odel		D2-1014W
Mode	Mode 802.11b 1		1Mbps Input V		Input Voltage		DC3.7V
Temperat	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Channel Frequency Final RF		Final RF Po	wer	Maximum Limit		Pass/ Fail
Chamilei	annel (MHz) Lev		Level in (dI	Bm) (dB		m)	
			1Mbps				
1		2412	-15.36		8		Pass
6		2437	-15.12		8		Pass
11		2462	-14.39		8		Pass

Page 82 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



EUT	EUT MID		D Mode		odel		D2-1014W	
Mode	Mode 802.11g 54Mbps Input Vol		Voltage		DC3.7V			
Temperati	ıre	24 deg	g. C,	Hur	umidity 56		56% RH	
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail	
Chamilei		(MHz)	Level in (dBm)		(dBm)			
			54Mbps	5				
1		2412	-21.99	8			Pass	
6	•	2437	-20.93	8			Pass	
11		2462	-23.04		8		Pass	

EUT	EUT MID		D Mo		odel		D2-1014W
Mode	Mode 802.11n HT20		20 65Mbps	ops Input Voltage			DC3.7V
Temperat	ure	24 deg	g. C, Humic		midity 56% l		56% RH
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail
Chamici		(MHz)	Level (dBm)		(dBm)		
			HT20				
1		2412	12 -22.89		8		Pass
6		2437	-22.67		8		Pass
11		2462	-21.35		8		Pass

EUT	EUT MID		D Mo		odel I		D2-1014W
Mode	Mode 802.11n HT4		10 65Mbps Inp		Input Voltage		DC3.7V
Temperati	ure	24 deg	g. C,	Hur	nidity		56% RH
Channel	Cha	annel Frequency (MHz)	* *		Maximum Limit (dBm)		Pass/ Fail
			HT40				
1		2422	-26.44				Pass
4		2437	2437 -25.97		8		Pass
7		2452	-25.38		8		Pass

Page 83 of 121


Report No: FCC/IC1409186

Date: 2014-10-24



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

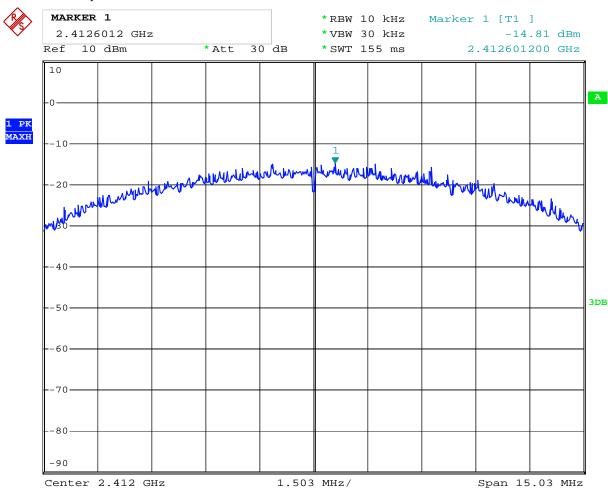


Page 84 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



2. 802.11b at 11Mbps at CH06

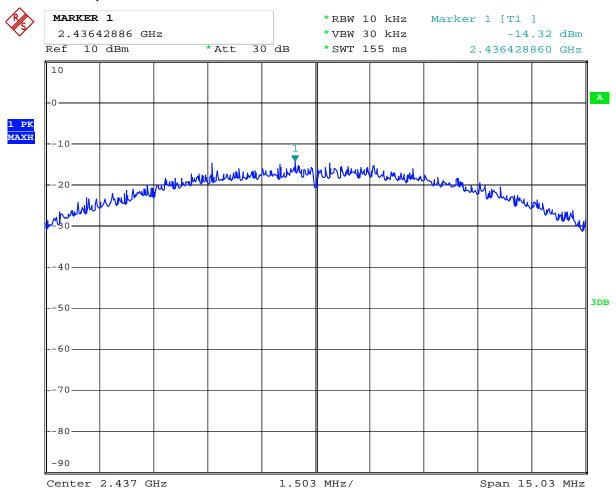


Page 85 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



3. 802.11b at 11Mbps of CH11

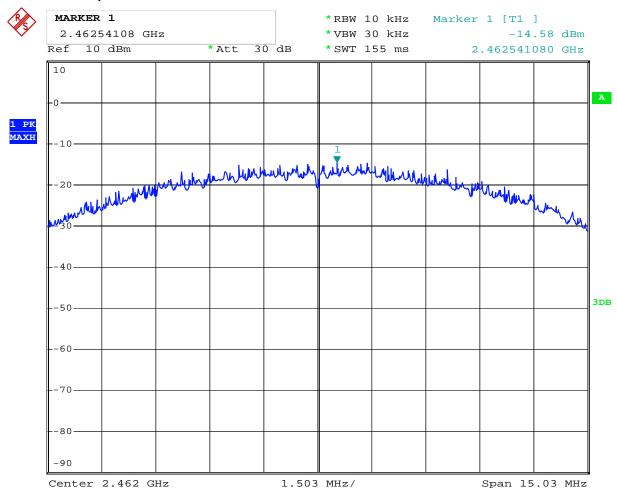


Page 86 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



4. 802.11b at 1Mbps of CH1

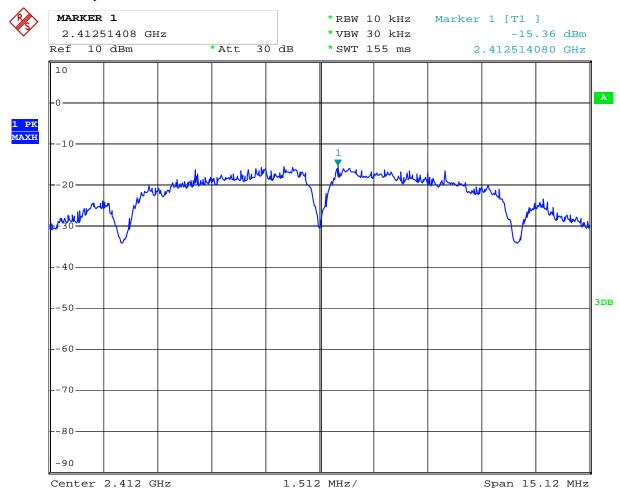


Page 87 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



5. 802.11b at 1Mbps of CH6

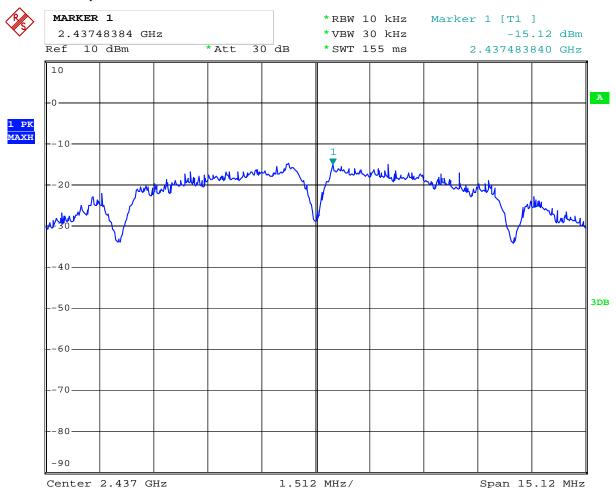


Page 88 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



6. 802.11b at 1Mbps of CH11

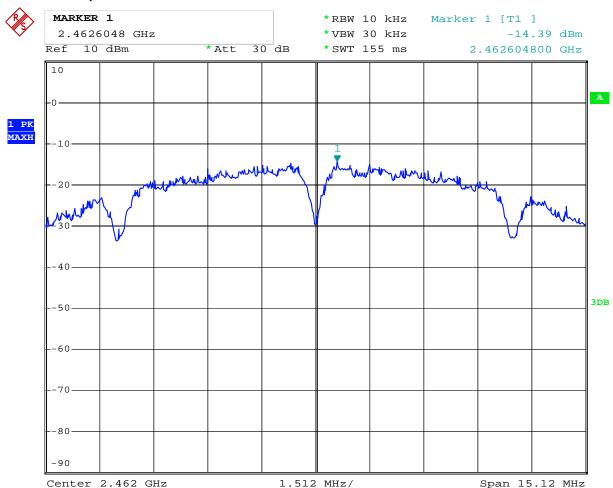


Page 89 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



7. 802.11g at 54Mbps of CH1

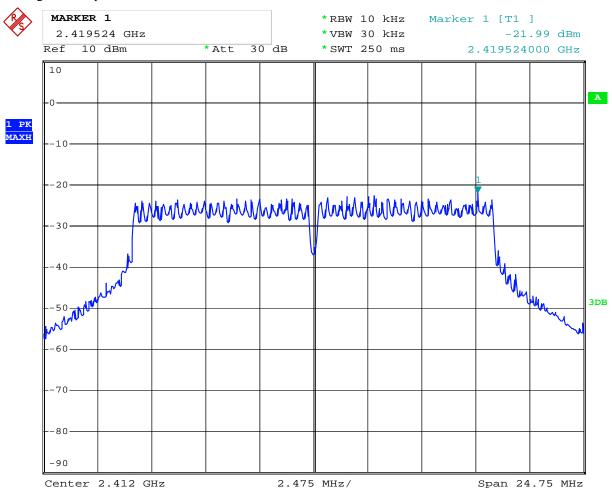


Page 90 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



8. 802.11g at 54Mbps of CH6

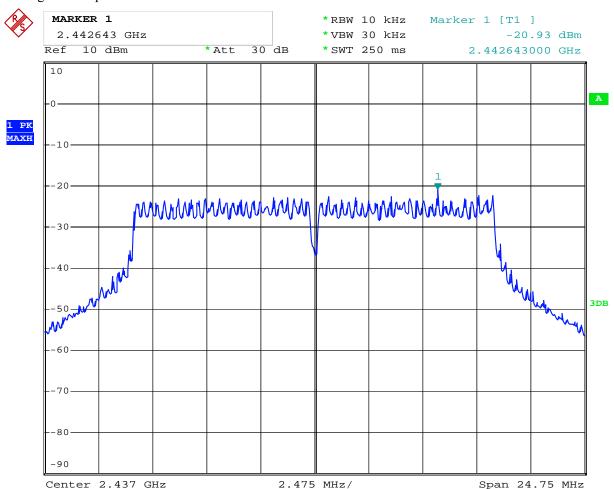


Page 91 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



9. 802.11g at 54Mbps of CH11

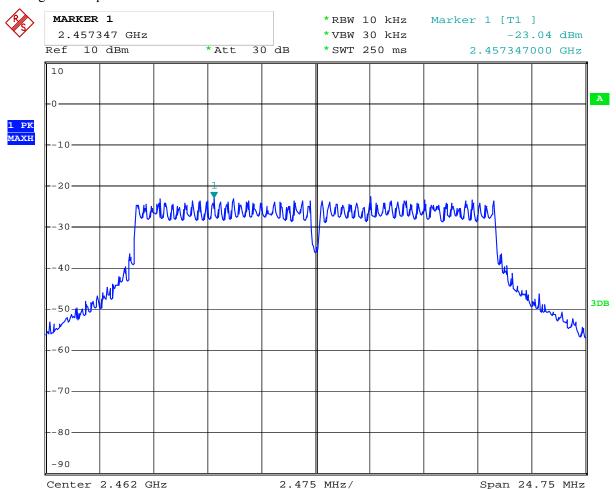


Page 92 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



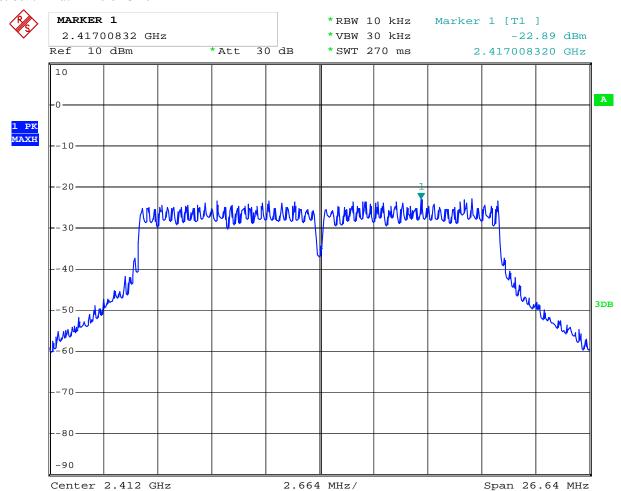


Page 93 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



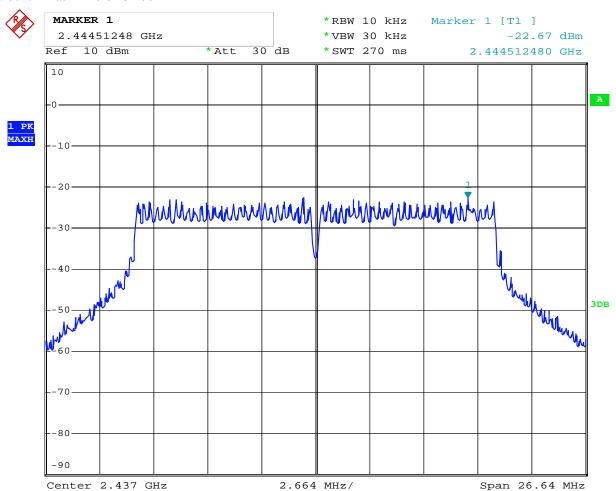


Page 94 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



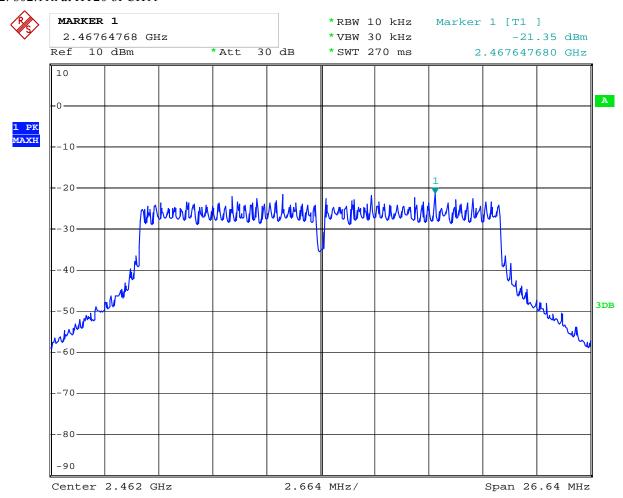


Page 95 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



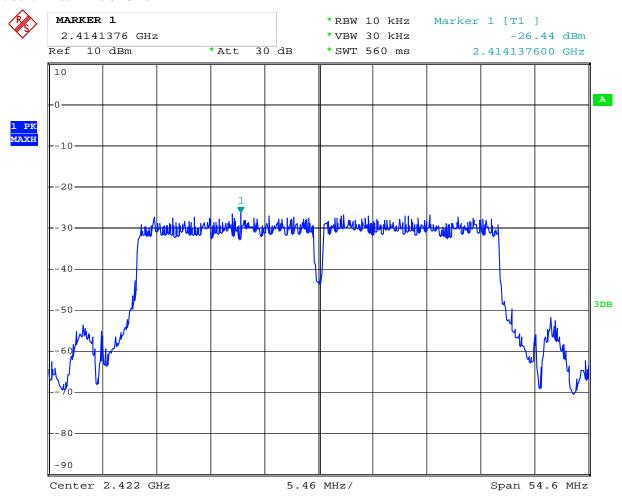


Page 96 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



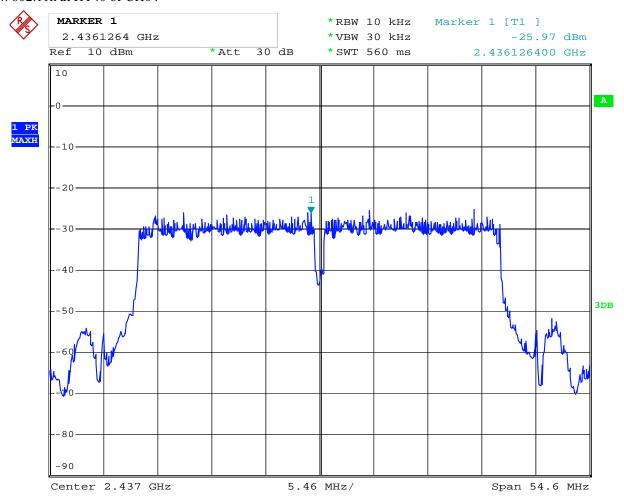


Page 97 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



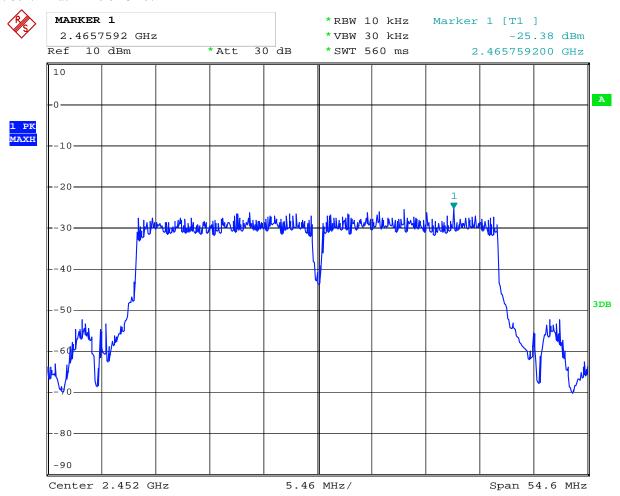


Report No: FCC/IC1409186 Page 98 of 121

Date: 2014-10-24



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. The worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 99 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBµV/m)	45.52	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	38.75	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure:

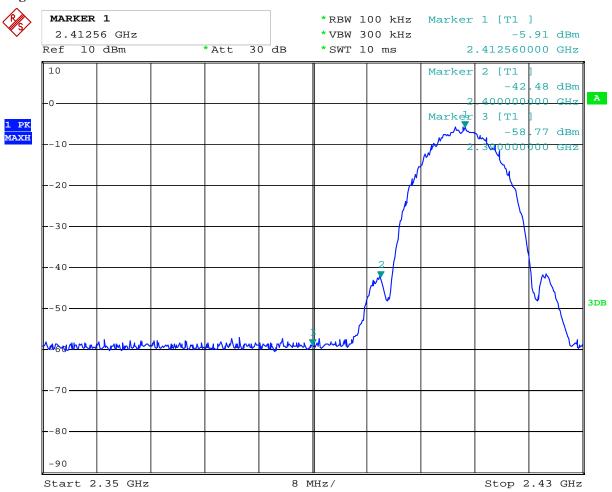

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 100 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2483.5	PK (dBμV/m)	41.71	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

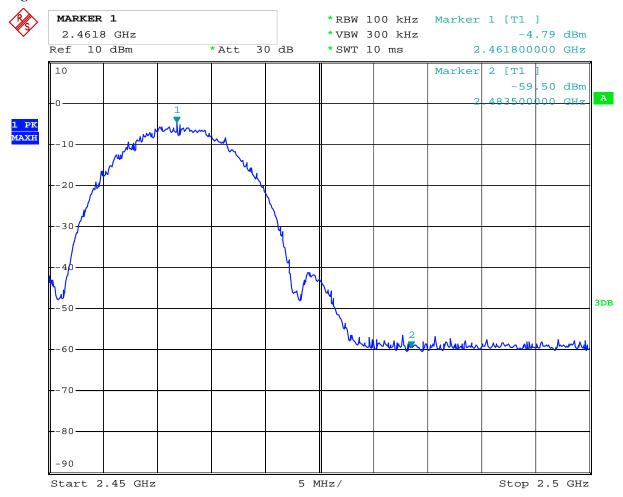

Page 101 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

2001 Build tage with reconstruction of the same reconstruction						
EUT	MID		Model	D2-1014W		
Mode	Keeping Transmitting		Input Voltage	DC3.7V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:	Pass		Detector	PK		
2400	PK (dBμV/m)	46.26	T took	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
2390	PK (dBμV/m)	38.99	Limit	74(dBμV/m)		
	AV ($dB\mu V/m$)		Lillit	54(dBμV/m)		

Test Figure:

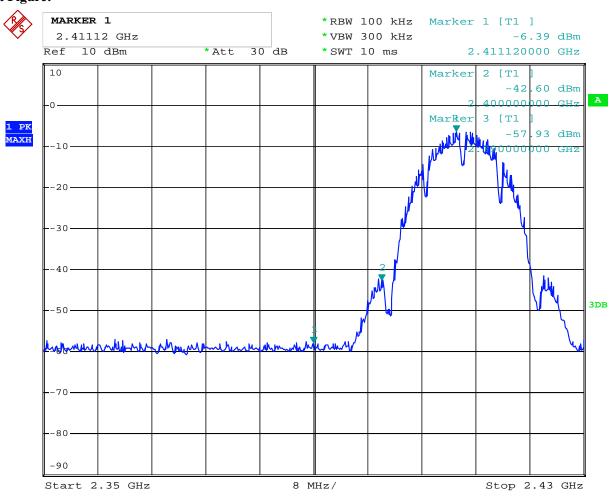

Page 102 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	42.38	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

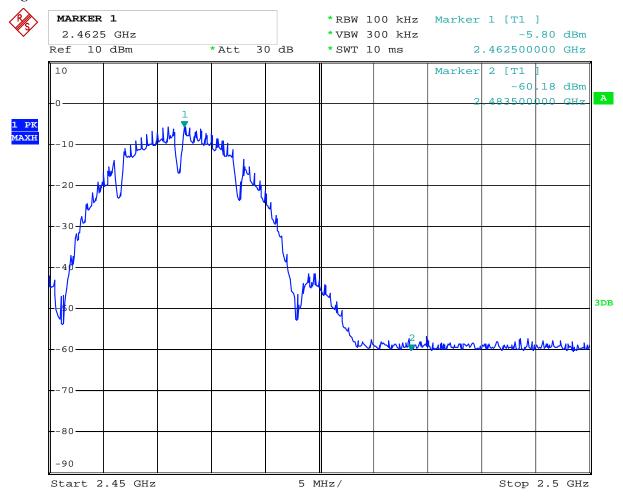

Page 103 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W		
Mode	Keeping Transmitting		Input Voltage	DC3.7V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:	Pass		Detector	PK		
2400	PK (dBμV/m)	47.92	T 10014	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
2390	PK (dBμV/m)	39.22	Limit	74(dBμV/m)		
	AV (dBμV/m)		Liililt	54(dBμV/m)		

Test Figure:

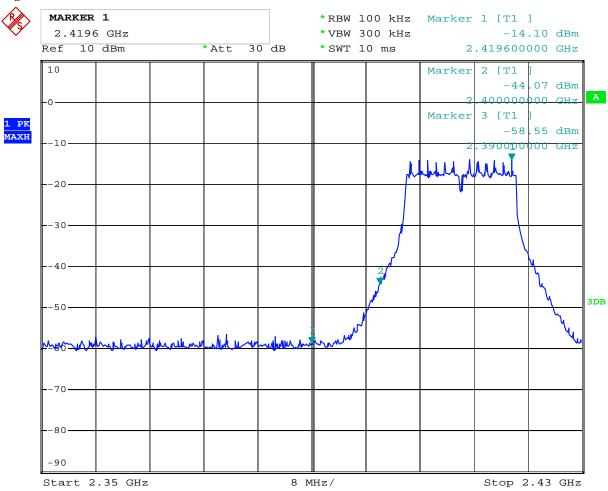

Page 104 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




CH11 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Mod	lel	D2-1014W
Mode	Keeping Transmitting		Input V	oltage	DC3.7V
Temperature	24 deg. C,		Humi	dity	56% RH
Test Result:	Pass		Detec	etor	PK
2483.5	PK (dBμV/m)	43.09	T ::4	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

Test Figure:

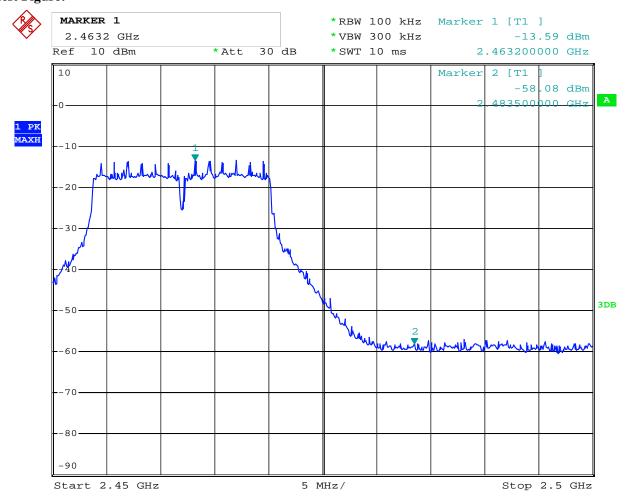

Page 105 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	48.52	T imit	$74(dB\mu V/m)$
	$AV (dB\mu V/m)$	1	Limit	54(dBμV/m)
2390	PK (dBµV/m)	41.21	Limit	74(dBμV/m)
	$AV (dB\mu V/m)$	-	Lillit	54(dBμV/m)

Test Figure:

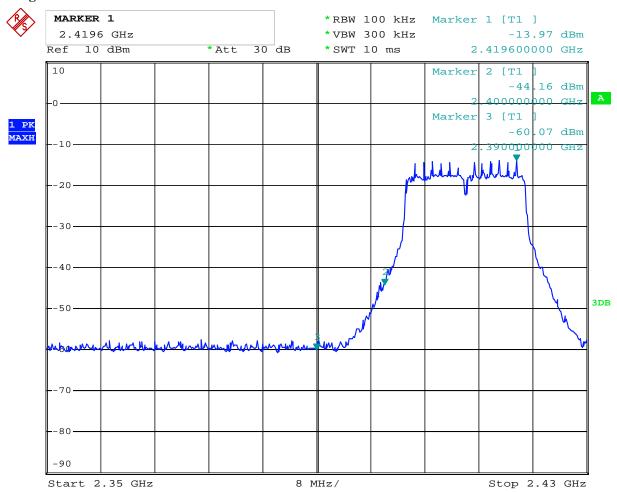

Page 106 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




CH11 at 65Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	43.47	I ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBµV/m)

Test Figure:

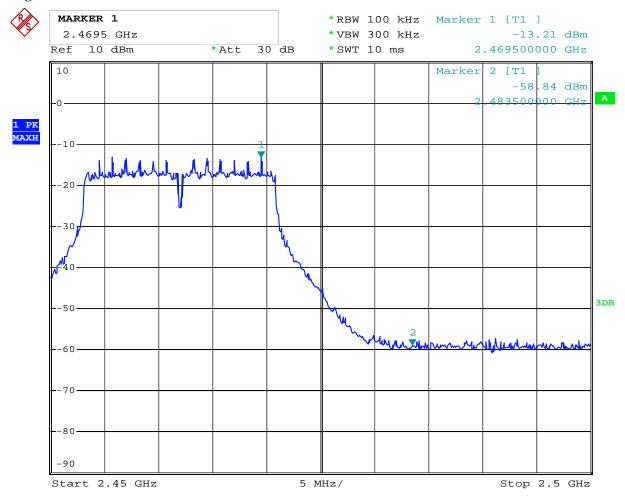

Page 107 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




For 802.11n (HT40) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W			
Mode	Keeping Transmitting		Input Voltage	DC3.7V			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
2400	PK (dBµV/m)	45.68	T ::4	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$			
2390	PK (dBμV/m)	38.02	Limit	74(dBμV/m)			
	AV (dBμV/m)		Liffit	54(dBμV/m)			

Test Figure:

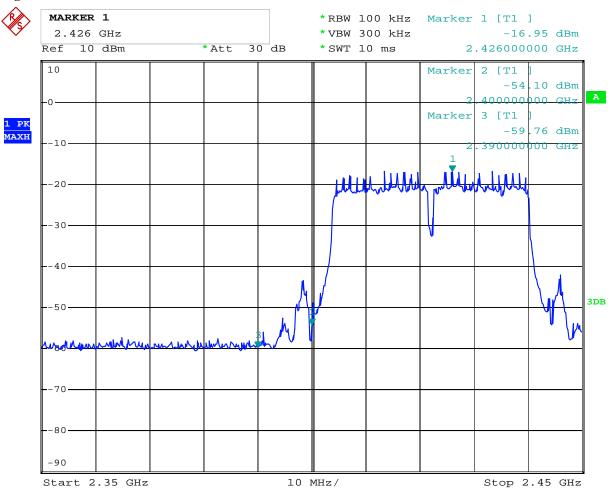

Page 108 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




CH7 at 65Mbps

10.4 Band-edge and Restricted band Measurement

EUT	MID		Model	D2-1014W
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5		T ::4	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure:

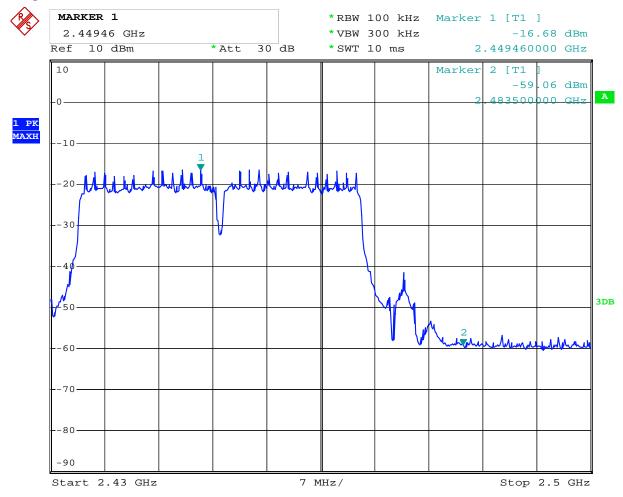

Report No: FCC/IC1409186

Date: 2014-10-24



Page 109 of 121

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is 2.0 dBi.

Page 110 of 121

Report No: FCC/IC1409186

Date: 2014-10-24




12.0 FCC/IC Label

FCC ID: 2ABDT-TQ10A10 IC: 12136A-TQ10A10

This device complies with FCC Part 15 and Industry Canada Licence-exempt RSS Standard(s). Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

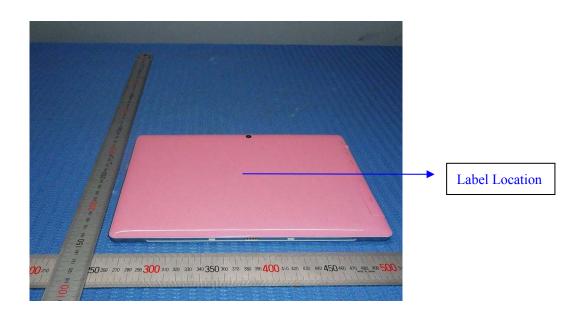

Page 111 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



13.0 **Photo of testing**

Conducted Emission Test Setup:



Page 112 of 121


Report No: FCC/IC1409186

Date: 2014-10-24



Radiated Emission Test Setup:



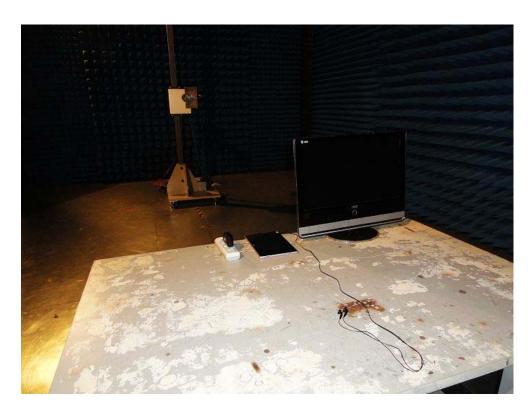

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: FCC/IC1409186

Date: 2014-10-24



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 114 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 115 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 116 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 117 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Inside view

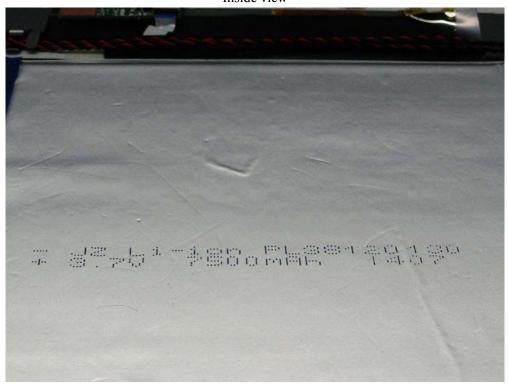



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 118 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier of others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: FCC/IC1409186

Date: 2014-10-24



Inside view



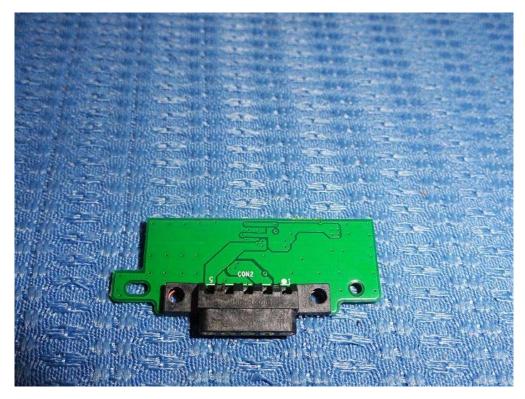

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 120 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 121 of 121

Report No: FCC/IC1409186

Date: 2014-10-24



Inside view





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to