

# FCC PART 15.247 TEST REPORT

For

# **Conplex International Limited**

Unit 902-904, 9th Floor, Tower B, Hung Hom Commercial Centre, 37, Ma Tau Wai Road. Hung Hum, Kowloon, HongKong.

FCC ID: 2ABGBJVX903

Report Type:		Product Type:		
Original Report		2G Feature Phone	e	
		51	mon	wang
Test Engineer:	Simon Wang	•	'	
S				
Report Number:	RSZ150114004	-00B		
Troport 1 (amount 1	10210011111	002		
Report Date:	2015-01-22			
Heport Dute.				
	Jimmy Xiao	Iin	nmy	xiao
Reviewed By:	RF Engineer		,	
Prepared By:	6/F, the 3rd Pha	3320018 3320008	al Build	

**Note**: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY TEST FACILITY	
SYSTEM TEST CONFIGURATION	
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLEBLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	
APPLICABLE STANDARD	
FCC §15.203 – ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
ANTENNA CONNECTOR CONSTRUCTION	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP.	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	12
CORRECTED FACTOR & MARGIN CALCULATION	
TEST RESULTS SUMMARY TEST DATA	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTYEUT SETUP	
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	
Test Procedure	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST EQUIPMENT LIST AND DETAILS	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH	28
APPLICABLE STANDARD	
TEST PROCEDURE	

TEST EQUIPMENT LIST AND DETAILS	28
Test Data	
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	
TEST EQUIPMENT LIST AND DETAILS.	
TEST DATA	59
PRODUCT SIMILARITY DECLARATION LETTER	63

### **GENERAL INFORMATION**

### **Product Description for Equipment under Test (EUT)**

The *Conplex International Limited*'s product, model number: *JV X903 (FCC ID:2ABGBJVX903)* or the "EUT" in this report was a *2G Feature Phone*, which was measured approximately: 12.89 cm (L) x 5.35 cm (W) x 1.13 cm (H), rated with input voltage: DC 3.7 V rechargeable Li-ion battery or DC5.0 V from adapter.

Report No.: RSZ150114004-00B

Adapter Information: Model: JV X57

Input: AC100-300V, 50/60Hz, 150mA

Output: DC 5.0V, 600mA

Note: The series product, model JV X903 and JFP 3432, JFP 2829, they are identical schematics and the only difference between them is the model number. Model JV X903 was selected for fully testing, which was explained in the attached product similarity declaration letter.

\*All measurement and test data in this report was gathered from production sample serial number: 1501197 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-01-14

### **Objective**

This test report is prepared on behalf of *Conplex International Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### **Related Submittal(s)/Grant(s)**

FCC Part 22H&24E PCE, and Part 15B JBP submissions with FCC ID: 2ABGBJVX903

### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

FCC Part 15.247 Page 4 of 63

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Report No.: RSZ150114004-00B

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.247 Page 5 of 63

# SYSTEM TEST CONFIGURATION

### **Description of Test Configuration**

The system was configured for testing in an engineering mode.

### **EUT Exercise Software**

N/A

### **Special Accessories**

No special accessory.

### **Equipment Modifications**

No modification was made to the EUT tested.

# **Support Equipment List and Details**

Manufacturer Description		Model	Serial Number	
TESCOM	Bluetooth Tester	TC-3000B	3000B630010	

Report No.: RSZ150114004-00B


### **External I/O Cable**

Cable Description	Length (m)	From Port	То
Un-shielding Detachable USB Cable	1.1	EUT	Adapter

FCC Part 15.247 Page 6 of 63

# **Block Diagram of Test Setup**

For conducted emission

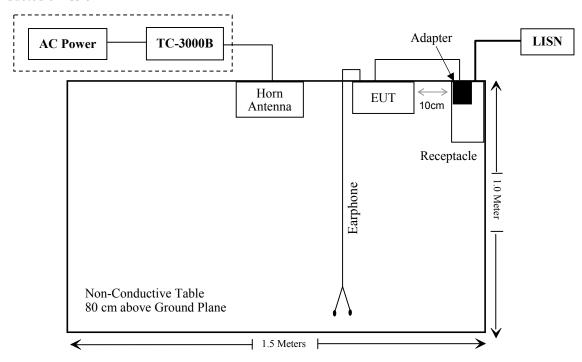

FCC Part 15.247 Page 7 of 63

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
\$15.205, \$15.209 & \$15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ150114004-00B

FCC Part 15.247 Page 8 of 63

# FCC §15.247 (i) & §2.1093 – RF EXPOSURE

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ150114004-00B

The SAR data please refer to the SAR report, report No.: RSZ150114004-20.

FCC Part 15.247 Page 9 of 63

# FCC §15.203 – ANTENNA REQUIREMENT

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ150114004-00B

### **Antenna Connector Construction**

The EUT has one monopole antenna arrangement for bluetooth, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

FCC Part 15.247 Page 10 of 63

# FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### **Applicable Standard**

FCC §15.207(a)

### **Measurement Uncertainty**


Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Report No.: RSZ150114004-00B

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### **EUT Setup**

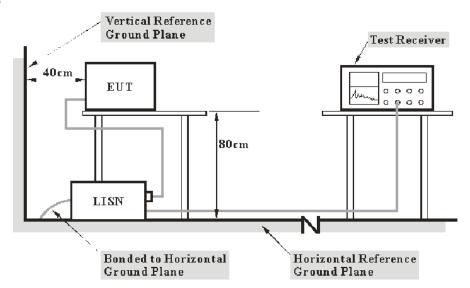

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

FCC Part 15.247 Page 11 of 63

### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

Report No.: RSZ150114004-00B

### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2014-06-17	2015-06-17
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2014-08-22	2015-08-22
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2014-10-15	2015-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53		

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

FCC Part 15.247 Page 12 of 63

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Part 15.207</u>, the worst margin reading as below:

Report No.: RSZ150114004-00B

### 10.4 dB at 0.372330 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

### **Test Data**

### **Environmental Conditions**

Temperature:	23	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Simon Wang on 2015-01-18


EUT operation mode: Transmitting/Charging

FCC Part 15.247 Page 13 of 63

# AC 120V/60 Hz, Line

### EMI Auto Test L

Report No.: RSZ150114004-00B

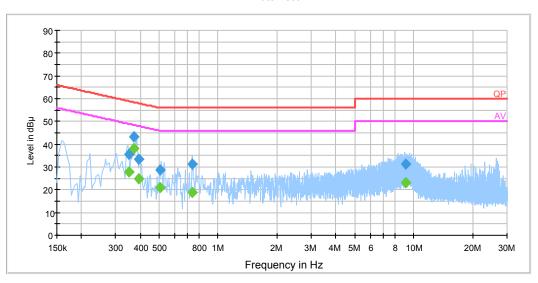


Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.348810	35.4	19.2	59.0	23.6	QP
0.348810	27.7	19.2	49.0	21.3	Ave.
0.372330	43.2	19.2	58.4	15.2	QP
0.372330	38.0	19.2	48.4	10.4	Ave.
0.392150	33.2	19.2	58.0	24.8	QP
0.392150	24.8	19.2	48.0	23.2	Ave.
0.506290	28.6	19.3	56.0	27.4	QP
0.506290	21.1	19.3	46.0	24.9	Ave.
0.734930	31.4	19.3	56.0	24.6	QP
0.734930	18.8	19.3	46.0	27.2	Ave.
9.122670	31.4	19.6	60.0	28.6	QP
9.122670	23.0	19.6	50.0	27.0	Ave.

FCC Part 15.247 Page 14 of 63

### AC 120V/60 Hz, Neutral

### EMI Auto Test N

Report No.: RSZ150114004-00B

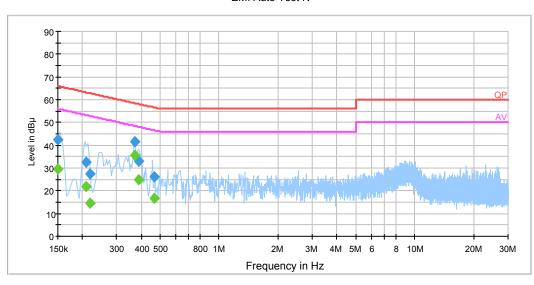

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	42.3	19.2	66.0	23.7	QP
0.150000	29.8	19.2	56.0	26.2	Ave.
0.209500	32.4	19.3	63.2	30.8	QP
0.209500	22.0	19.3	53.2	31.2	Ave.
0.218501	27.4	19.3	62.9	35.5	QP
0.218501	14.7	19.3	52.9	38.2	Ave.
0.372450	41.7	19.2	58.4	16.7	QP
0.372450	35.4	19.2	48.4	13.0	Ave.
0.388150	33.1	19.2	58.1	25.0	QP
0.388150	24.9	19.2	48.1	23.2	Ave.
0.464870	26.1	19.2	56.6	30.5	QP
0.464870	16.5	19.2	46.6	30.1	Ave.

### Note:

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
  3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 15 of 63

# FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### **Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

### **Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RSZ150114004-00B

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.


### **EUT Setup**

### **Below 1 GHz:**

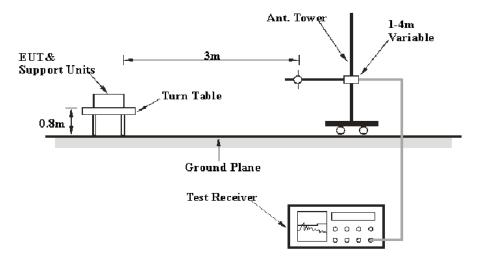

FCC Part 15.247 Page 16 of 63

### **Above 1GHz:**

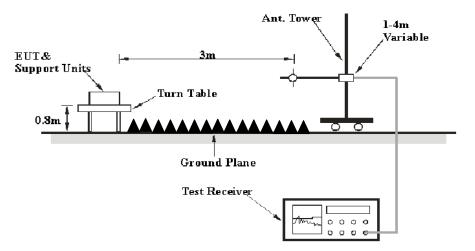

Report No.: RSZ150114004-00B

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
AUUVE I GHZ	1 MHz	10 Hz	/	Ave.

### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

FCC Part 15.247 Page 17 of 63

### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Report No.: RSZ150114004-00B

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2014-05-06	2015-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Broadband Antenna	JB3	A111513	2014-06-18	2017-06-17
Mini	Amplifier	ZVA-183-S+	5969001149	2014-04-23	2015-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-11-12	2015-11-12
the electro- Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
TDK	Chamber	Chamber B	1#	2014-07-22	2015-07-22
DUCOMMUN	Pre-amplifier	ALN- 22093530-01	991373-01	2014-08-03	2015-08-03
R&S	Auto test Software	EMC32	V9.10		

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.</u>

### 6.40 dB at 4804.00 MHz in the Vertical polarization for Low Channel

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m}$$
 ++  $U_{(L{\rm m}\,)} \leq L_{\rm lim}$  ++  $U_{\rm cispr}$ 

In BACL,  $U_{(Lm)}$  is less than +  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

FCC Part 15.247 Page 18 of 63

### **Test Data**

### **Environmental Conditions**

Temperature:	21
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-01-19

EUT operation mode: Transmitting

**30 MHz -25 GHz:** (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR Mode (GFSK))

Report No.: RSZ150114004-00B

Frequency	Re	eceiver	Turntable	Rx An	itenna		Corrected		C Part /205/209	
(MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)	Degree	Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	
	Low Channel (2402 MHz)									
256.7	43.15	QP	234	2.1	Н	-13.5	29.65	46	16.35	
2402.00	84.31	PK	54	2.1	Н	4.27	88.58	/	/	
2402.00	71.79	Ave.	54	2.1	Н	4.27	76.06	/	/	
2402.00	83.23	PK	39	2.5	V	4.17	87.40	/	/	
2402.00	70.89	Ave.	39	2.5	V	4.17	75.06	/	/	
2389.65	35.32	PK	150	2.3	Н	4.27	39.59	74	34.41	
2389.65	20.63	Ave.	150	2.3	Н	4.27	24.90	54	29.10	
2496.09	35.14	PK	101	2.3	Н	7.99	43.13	74	30.87	
2496.09	22.31	Ave.	101	2.3	Н	7.99	30.30	54	23.70	
2952.96	36.98	PK	236	1.8	V	11.08	48.06	74	25.94	
2952.96	21.55	Ave.	236	1.8	V	11.08	32.63	54	21.37	
4804.00	36.87	PK	71	1.9	V	25.01	61.88	74	12.12	
4804.00	22.59	Ave.	71	1.9	V	25.01	47.60	54	6.40	
7206.00	36.02	PK	153	2.4	Н	22.28	58.30	74	15.70	
7206.00	20.17	Ave.	153	2.4	Н	22.28	42.45	54	11.55	
9608.00	35.98	PK	271	1.4	Н	25.02	61.00	74	13.00	
9608.00	20.20	Ave.	271	1.4	Н	25.02	45.22	54	8.78	

FCC Part 15.247 Page 19 of 63

F	R	eceiver	T	Rx An	itenna	Corrected	Corrected		C Part /205/209
Frequency (MHz)	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			Middle C	hannel	(2441 N	MHz)			
256.7	42.96	QP	234	2.1	Н	-13.5	29.46	46	16.54
2441.00	83.45	PK	162	1.5	Н	4.27	87.72	/	/
2441.00	71.78	Ave.	162	1.5	Н	4.27	76.05	/	/
2441.00	83.71	PK	128	1.1	V	4.17	87.88	/	/
2441.00	71.79	Ave.	128	1.1	V	4.17	75.96	/	/
2380.43	34.12	PK	116	1.5	Н	4.27	38.39	74	35.61
2380.43	21.29	Ave.	116	1.5	Н	4.27	25.56	54	28.44
2495.75	35.84	PK	191	1.8	Н	7.99	43.83	74	30.17
2495.75	22.55	Ave.	191	1.8	Н	7.99	30.54	54	23.46
2756.78	36.07	PK	20	1.2	V	8.01	44.08	74	29.92
2756.78	22.43	Ave.	20	1.2	V	8.01	30.44	54	23.56
4882.00	35.01	PK	332	1.8	Н	22.71	57.72	74	16.28
4882.00	21.69	Ave.	332	1.8	Н	22.71	44.40	54	9.60
7323.00	34.53	PK	130	2.3	V	22.60	57.13	74	16.87
7323.00	21.26	Ave.	130	2.3	V	22.60	43.86	54	10.14
9764.00	34.16	PK	127	2.1	V	26.29	60.45	74	13.55
9764.00	20.24	Ave.	127	2.1	V	26.29	46.53	54	7.47
	•		High Ch	annel (	2480 M	Hz)			
256.7	42.83	QP	234	2.1	Н	-13.5	29.33	46	16.67
2480.00	79.44	PK	204	1.2	Н	7.99	87.43	/	/
2480.00	67.79	Ave.	204	1.2	Н	7.99	75.78	/	/
2480.00	81.84	PK	251	1.8	V	7.59	89.43	/	/
2480.00	70.10	Ave.	251	1.8	V	7.59	77.69	/	/
2330.78	38.60	PK	178	1.9	V	3.83	42.43	74	31.57
2330.78	23.82	Ave.	178	1.9	V	3.83	27.65	54	26.35
2483.60	51.43	PK	227	1.4	V	7.59	59.02	74	14.98
2483.60	23.02	Ave.	227	1.4	V	7.59	30.61	54	23.39
2978.29	36.01	PK	243	2.4	Н	11.28	47.29	74	26.71
2978.29	21.67	Ave.	243	2.4	Н	11.28	32.95	54	21.05
4960.00	36.21	PK	42	1.2	Н	22.21	58.42	74	15.58
4960.00	21.12	Ave.	42	1.2	Н	22.21	43.33	54	10.67
7440.00	35.09	PK	198	1.3	Н	21.54	56.63	74	17.37
7440.00	20.68	Ave.	198	1.3	Н	21.54	42.22	54	11.78
9920.00	34.47	PK	71	2.1	V	26.29	60.76	74	13.24
9920.00	19.33	Ave.	71	2.1	V	26.29	45.62	54	8.38

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading Margin = Limit - Corrected. Amplitude

FCC Part 15.247 Page 20 of 63

# FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ150114004-00B

### **Test Procedure**

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

### **Environmental Conditions**

Temperature:	21	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Simon Wang on 2015-01-18.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

FCC Part 15.247 Page 21 of 63

Note: Limit = 20 dB bandwidth \*2/3


FCC Part 15.247 Page 22 of 63

### BDR (GFSK): Low Channel

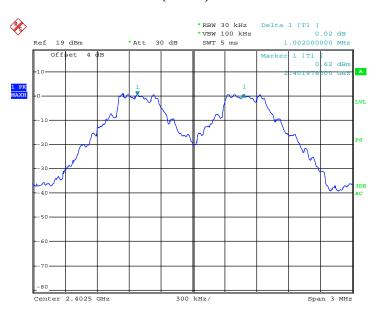

EUT
Date: 18.JAN.2015 16:06:55


### BDR (GFSK): Middle Channel

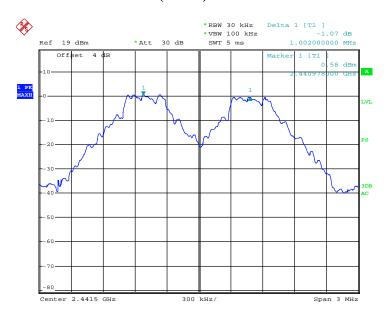

EUT
Date: 18.JAN.2015 16:03:56


FCC Part 15.247 Page 23 of 63

### BDR (GFSK): High Channel

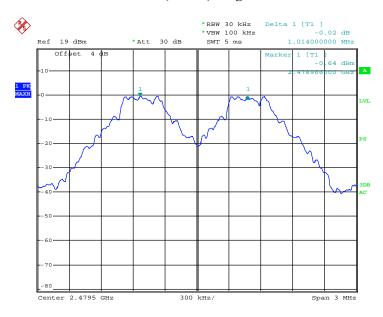

EUT
Date: 18.JAN.2015 16:02:54


### EDR ( $\pi/4$ -DQPSK): Low Channel

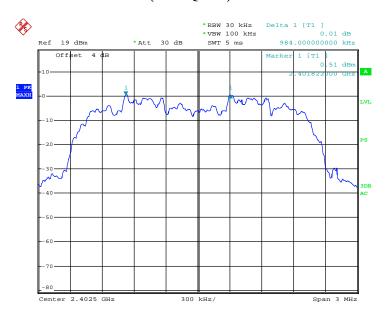

EUT
Date: 18.JAN.2015 16:09:08

FCC Part 15.247 Page 24 of 63

### EDR ( $\pi/4$ -DQPSK): Middle Channel

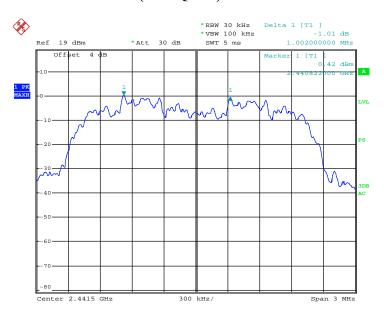

EUT
Date: 18.JAN.2015 16:10:06

### EDR ( $\pi/4$ -DQPSK): High Channel



EUT
Date: 18.JAN.2015 16:12:27

FCC Part 15.247 Page 25 of 63


# EDR (8DPSK): Low Channel

Report No.: RSZ150114004-00B



EUT
Date: 18.JAN.2015 16:15:43


### EDR (8DPSK): Middle Channel

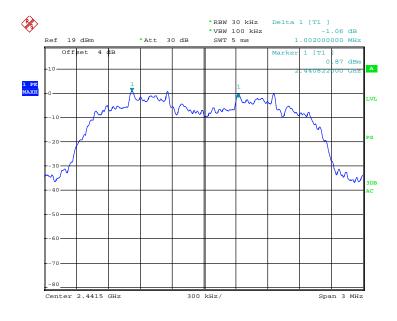

EUT
Date: 18.JAN.2015 16:14:26

FCC Part 15.247 Page 26 of 63

# EDR (8DPSK): High Channel

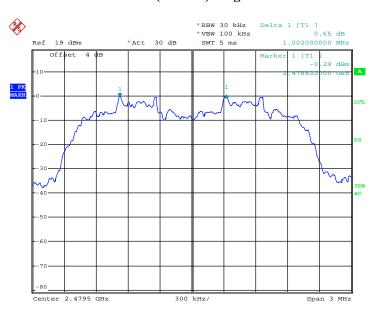

EUT

Date: 18.JAN.2015 16:13:29

FCC Part 15.247 Page 27 of 63

# FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ150114004-00B

### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

### **Environmental Conditions**

Temperature:	21	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Simon Wang on 2015-01-18.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part 15.247 Page 28 of 63

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
	Low	2402	0.964
BDR (GFSK)	Middle	2441	0.964
(GI SII)	High	2480	0.964
	Low	2402	1.352
EDR (π/4-DQPSK)	Middle	2441	1.364
(, 1 2 (1 2 12)	High	2480	1.356
	Low	2402	1.304
EDR (8DPSK)	Middle	2441	1.320
(021011)	High	2480	1.304

### BDR (GFSK): Low Channel

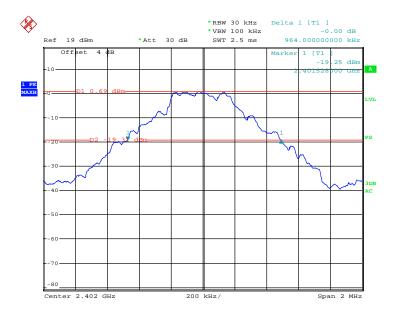


EUT

Date: 18.JAN.2015 15:58:56


FCC Part 15.247 Page 29 of 63

### BDR (GFSK): Middle Channel

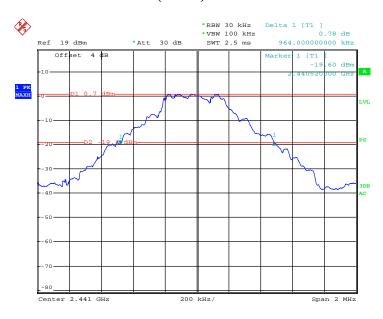

EUT
Date: 18.JAN.2015 16:00:44


## BDR (GFSK): High Channel

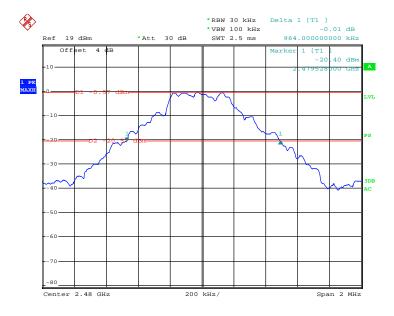

EUT
Date: 18.JAN.2015 16:01:50


FCC Part 15.247 Page 30 of 63

### EDR ( $\pi/4$ -DQPSK): Low Channel

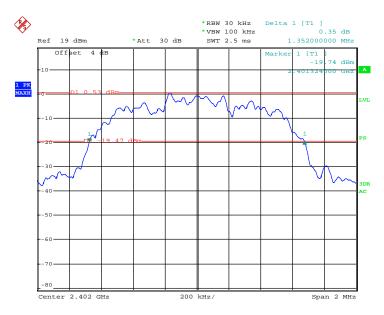

EUT
Date: 18.JAN.2015 15:53:55


### EDR ( $\pi/4$ -DQPSK): Middle Channel

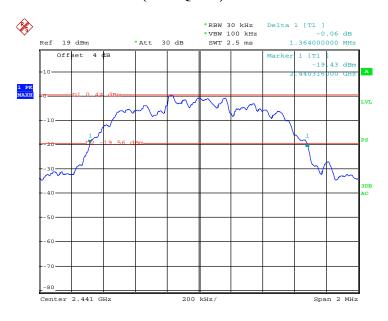

EUT
Date: 18.JAN.2015 15:56:13


FCC Part 15.247 Page 31 of 63

### EDR ( $\pi/4$ -DQPSK): High Channel

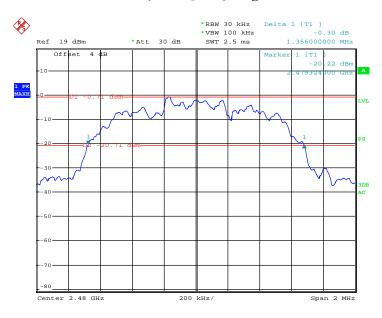

EUT
Date: 18.JAN.2015 15:57:34

### EDR (8DPSK): Low Channel

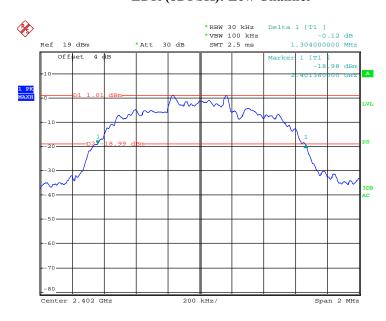


EUT
Date: 18.JAN.2015 15:49:06

FCC Part 15.247 Page 32 of 63


### AD (ADDRESS) MALLI CI

Report No.: RSZ150114004-00B

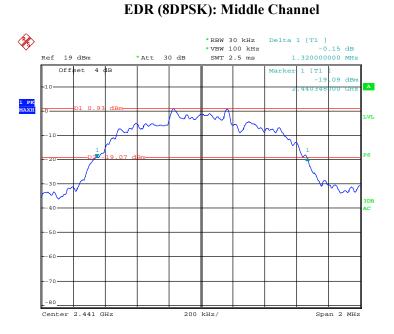

EUT
Date: 18.JAN.2015 15:51:01

### EDR (8DPSK): High Channel

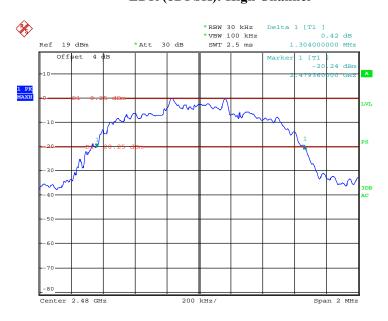

EUT
Date: 18.JAN.2015 15:52:35

FCC Part 15.247 Page 33 of 63

# FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ150114004-00B

### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

### **Environmental Conditions**

Temperature:	21	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Simon Wang on 2015-01-18.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

FCC Part 15.247 Page 34 of 63

(8DPSK)


Report No.: RSZ150114004-00B

### BDR (GFSK): Number of Hopping Channels

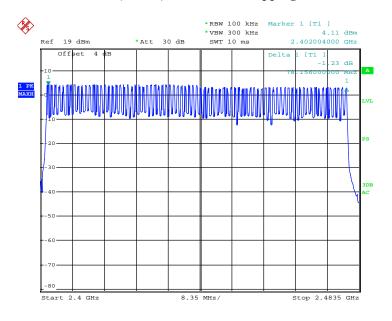


Date: 18.JAN.2015 16:30:24

FCC Part 15.247 Page 35 of 63

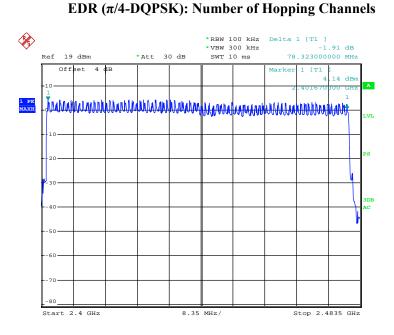

EUT
Date: 18.JAN.2015 16:36:25

### EDR (8DPSK): Number of Hopping Channels

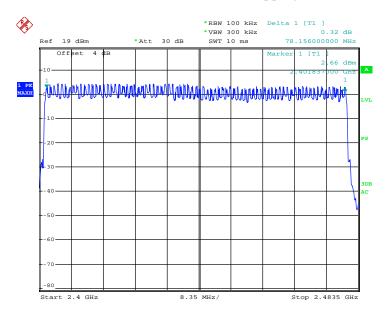

EUT
Date: 18.JAN.2015 16:41:28

FCC Part 15.247 Page 36 of 63

# FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ150114004-00B

### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

Temperature:	21
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-01-18.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


FCC Part 15.247 Page 37 of 63

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result		
D.V.		Low	0.402	0.129	0.4	Pass		
	DII 1	Middle	0.402	0.129	0.4	Pass		
	DH 1	High	0.402	0.129	0.4	Pass		
	<b>-</b>	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
		Low	1.680	0.269	0.4	Pass		
BDR	DII 2	Middle	1.680	0.269	0.4	Pass		
(GFSK)	DH 3	High	1.680	0.269	0.4	Pass		
	-	Note:	DH3:Dwell time = P	Pulse time*(1600/	4/79)*31.6S	•		
		Low	2.932	0.313	0.4	Pass		
	DIL 5	Middle	2.932	0.313	0.4	Pass		
	DH 5	High	2.932	0.313	0.4	Pass		
	-	Note:	DH5:Dwell time = P	Pulse time*(1600/	6/79)*31.6S	•		
		Low	0.402	0.129	0.4	Pass		
	2577.4	Middle	0.402	0.129	0.4	Pass		
	2DH 1	High	0.402	0.129	0.4	Pass		
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	2011.2	Low	1.692	0.271	0.4	Pass		
EDR		Middle	1.692	0.271	0.4	Pass		
$(\pi/4\text{-DQPSK})$	2DH 3	High	1.692	0.271	0.4	Pass		
	-	Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	2DH 5	Low	2.932	0.313	0.4	Pass		
		Middle	2.932	0.313	0.4	Pass		
		High	2.932	0.313	0.4	Pass		
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	3DH 1	Low	0.402	0.129	0.4	Pass		
		Middle	0.402	0.129	0.4	Pass		
		High	0.402	0.129	0.4	Pass		
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3011.3	Low	1.692	0.271	0.4	Pass		
EDR (8DPSK)		Middle	1.692	0.271	0.4	Pass		
	3DH 3	High	1.692	0.271	0.4	Pass		
	 	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
		Low	2.932	0.313	0.4	Pass		
	2011.5	Middle	2.932	0.313	0.4	Pass		
	3DH 5	High	2.932	0.313	0.4	Pass		
		Note:	3DH5:Dwell time = 1	Pulse time*(1600	/6/79)*31.6S			

FCC Part 15.247 Page 38 of 63


# BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RSZ150114004-00B

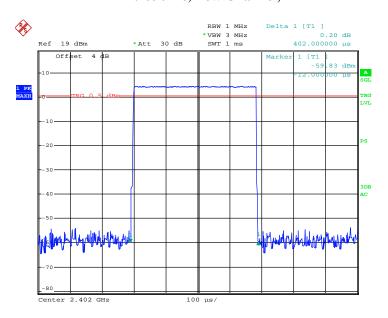

EUT
Date: 18.JAN.2015 16:43:25


# Pulse time, Middle Channel, DH1

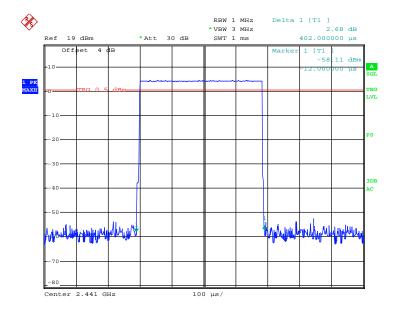

Date: 18.JAN.2015 16:43:51

FCC Part 15.247 Page 39 of 63


# Pulse time, High Channel, DH1

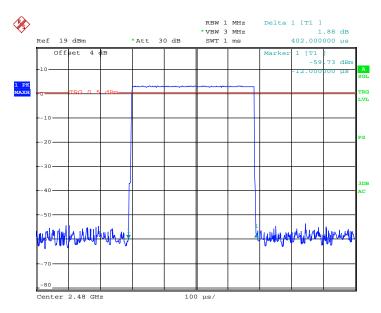

EUT

Date: 18.JAN.2015 16:44:02

# Pulse time, Low Channel, DH3

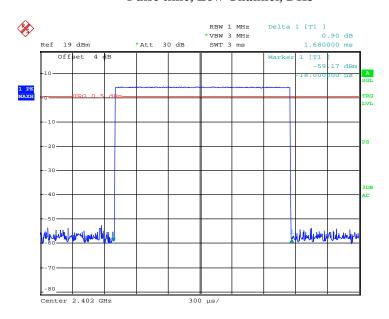


EUT

Date: 18.JAN.2015 16:47:01


FCC Part 15.247 Page 40 of 63

# Pulse time, Middle Channel, DH3

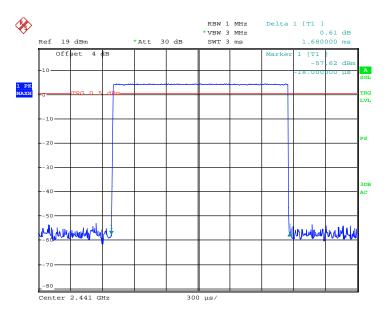

EUT
Date: 18.JAN.2015 16:46:50

# Pulse time, High Channel, DH3

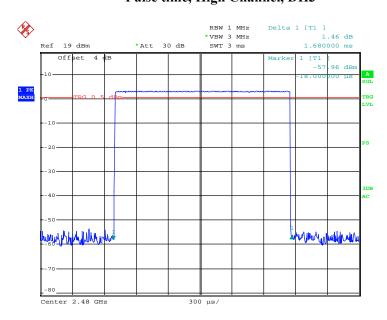


EUT

Date: 18.JAN.2015 16:46:35

FCC Part 15.247 Page 41 of 63


### Pulse time, Low Channel, DH5

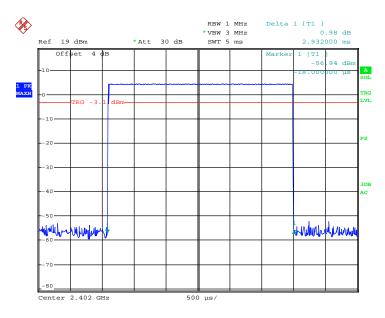

EUT

Date: 18.JAN.2015 16:50:03

# Pulse time, Middle Channel, DH5

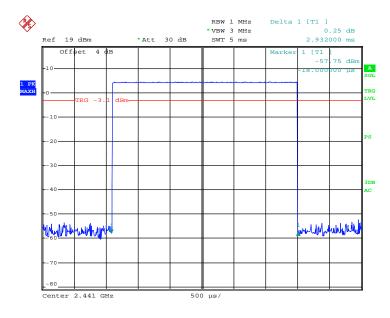


EUT

Date: 18.JAN.2015 16:50:27

FCC Part 15.247 Page 42 of 63


# Pulse time, High Channel, DH5

Report No.: RSZ150114004-00B

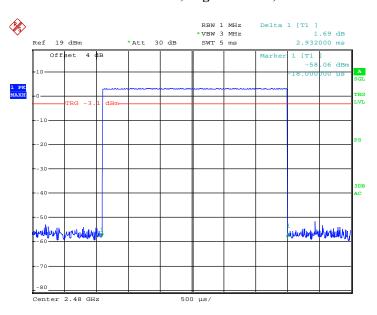

Date: 18.JAN.2015 16:50:36


# EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, DH1

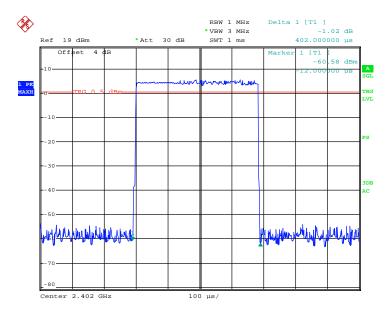

EUT
Date: 18.JAN.2015 16:44:56

FCC Part 15.247 Page 43 of 63


# Pulse time, Middle Channel, DH1

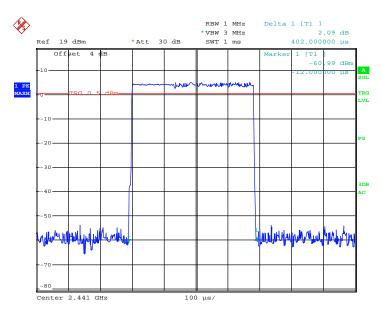

JT

Date: 18.JAN.2015 16:44:46

# Pulse time, High Channel, DH1

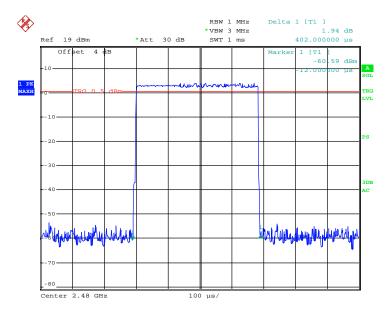


EUT

Date: 18.JAN.2015 16:44:33

FCC Part 15.247 Page 44 of 63


### Pulse time, Low Channel, DH3

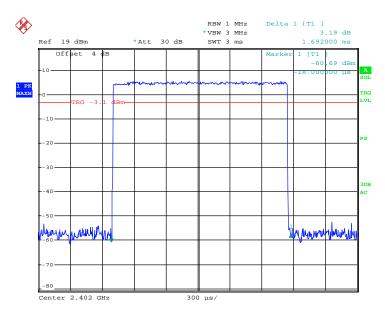

EUT

Date: 18.JAN.2015 16:47:47

# Pulse time, Middle Channel, DH3

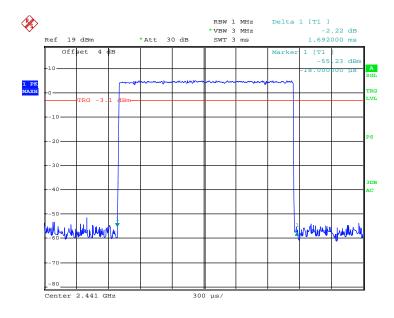


EUT

Date: 18.JAN.2015 16:47:59

FCC Part 15.247 Page 45 of 63


# Pulse time, High Channel, DH3

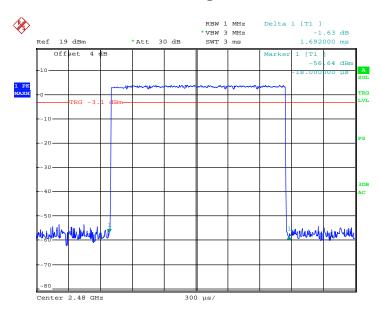

EUT

Date: 18.JAN.2015 16:48:12

# Pulse time, Low Channel, DH5

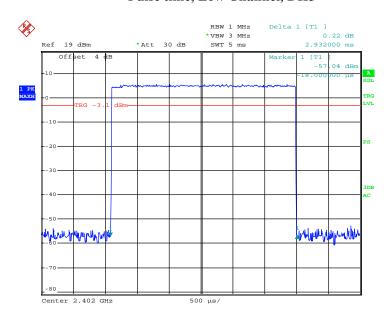


EUT

Date: 18.JAN.2015 16:51:57

FCC Part 15.247 Page 46 of 63


# Pulse time, Middle Channel, DH5

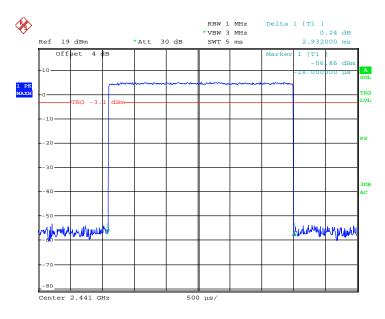

UT

Date: 18.JAN.2015 16:51:09

# Pulse time, High Channel, DH5

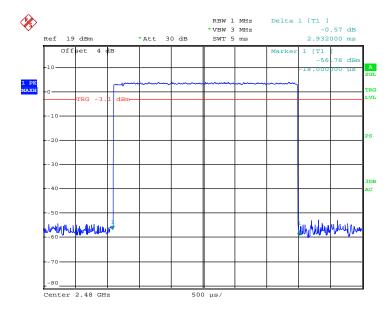


EUT

Date: 18.JAN.2015 16:50:51

FCC Part 15.247 Page 47 of 63


# EDR (8DPSK): Pulse time, Low Channel, DH1

Report No.: RSZ150114004-00B

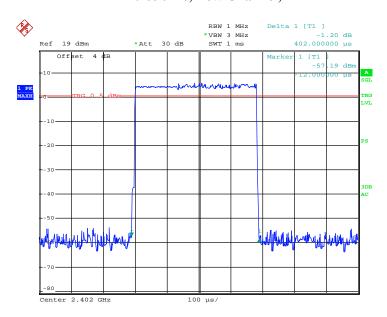

EUT
Date: 18.JAN.2015 16:45:15


# Pulse time, Middle Channel, DH1

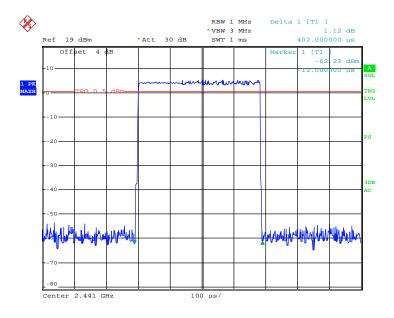

EUT
Date: 18.JAN.2015 16:45:29


FCC Part 15.247 Page 48 of 63

# Pulse time, High Channel, DH1

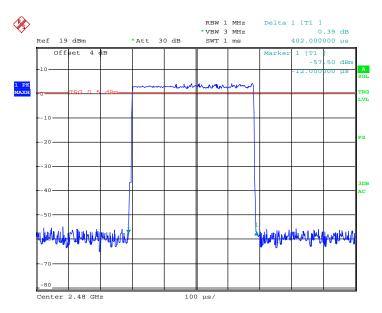

EUT
Date: 18.JAN.2015 16:45:43


# Pulse time, Low Channel, DH3

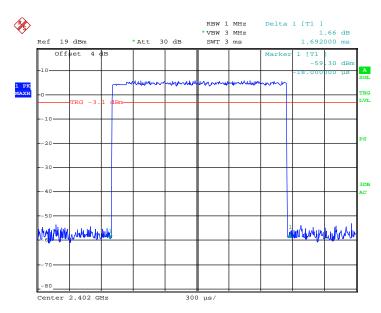

EUT
Date: 18.JAN.2015 16:49:09

FCC Part 15.247 Page 49 of 63


# Pulse time, Middle Channel, DH3

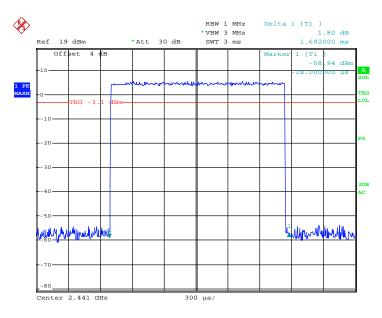

EUT

Date: 18.JAN.2015 16:48:45

# Pulse time, High Channel, DH3

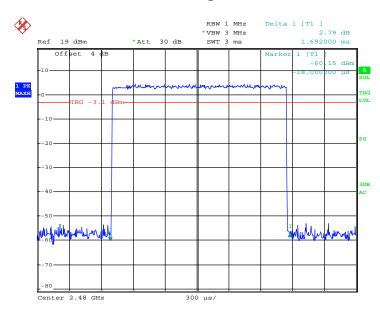


EUT

Date: 18.JAN.2015 16:48:30

FCC Part 15.247 Page 50 of 63


# Pulse time, Low Channel, DH5

Report No.: RSZ150114004-00B

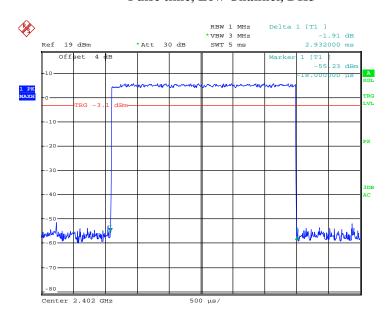

EUT
Date: 18.JAN.2015 16:52:10

# Pulse time, Middle Channel, DH5

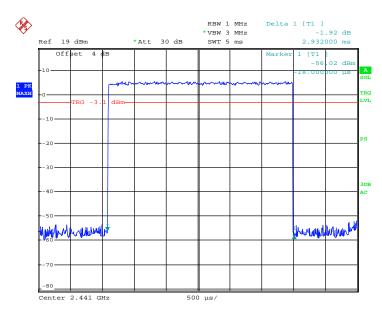


EUT

Date: 18.JAN.2015 16:52:24

FCC Part 15.247 Page 51 of 63

# Pulse time, High Channel, DH5

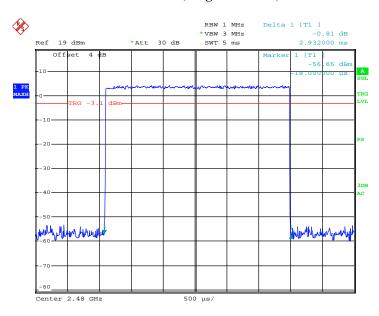

EUT

Date: 18.JAN.2015 16:52:40

FCC Part 15.247 Page 52 of 63

# FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ150114004-00B

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

### **Environmental Conditions**

Temperature:	22
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-01-18.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

FCC Part 15.247 Page 53 of 63

Mode	Channel	Frequency	Peak Out	Limit	
Wiode	Channel	(MHz)	(dBm)	(mW)	(mW)
	Low	2402	4.41	2.761	1000
BDR (GFSK)	Middle	2441	4.67	2.931	1000
(31313)	High	2480	3.43	2.203	1000
	Low	2402	6.02	3.999	1000
EDR (π/4-DQPSK)	Middle	2441	5.64	3.664	1000
(0, 12 Q1 212)	High	2480	4.52	2.831	1000
	Low	2402	6.26	4.227	1000
EDR (8DPSK)	Middle	2441	5.81	3.811	1000
(3= = \$12)	High	2480	4.41	2.761	1000


# BDR (GFSK): Low Channel

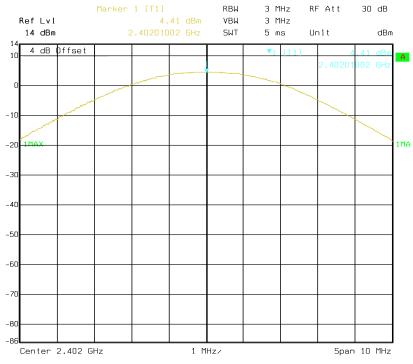

Date: 22.JAN.2015 15:16:36


FCC Part 15.247 Page 54 of 63

# BDR (GFSK): Middle Channel

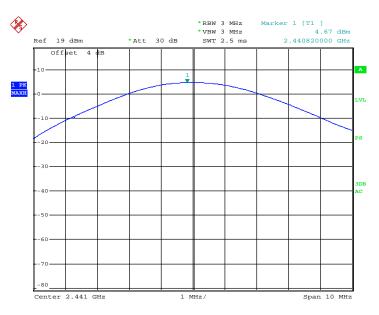

EUT
Date: 18.JAN.2015 15:40:27


# BDR (GFSK): High Channel

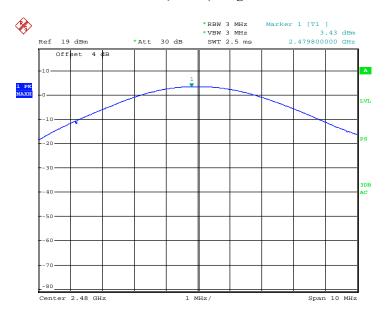

EUT
Date: 18.JAN.2015 15:41:14

FCC Part 15.247 Page 55 of 63

# EDR( $\pi/4$ -DQPSK): Low Channel

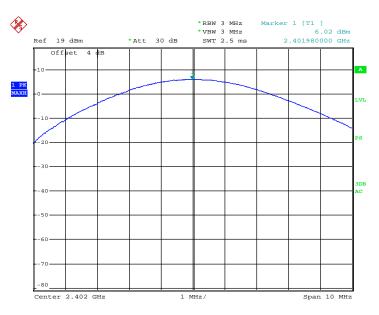

EUT
Date: 18.JAN.2015 15:44:38


# EDR( $\pi/4$ -DQPSK): Middle Channel



EUT
Date: 18.JAN.2015 15:45:48

FCC Part 15.247 Page 56 of 63


# EDR( $\pi/4$ -DQPSK): High Channel

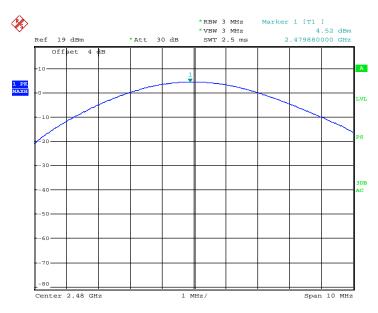

EUT

Date: 18.JAN.2015 15:43:17

# EDR(8DPSK): Low Channel

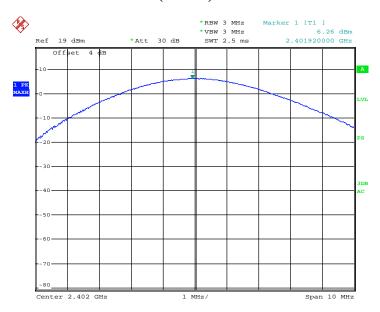


EUT

Date: 18.JAN.2015 15:46:35

FCC Part 15.247 Page 57 of 63

# EDR(8DPSK): Middle Channel

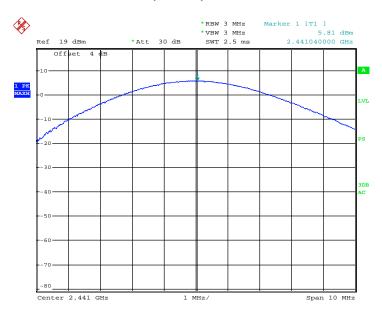

EUT

Date: 18.JAN.2015 15:46:59

# EDR(8DPSK): High Channel



EUT

Date: 18.JAN.2015 15:47:26

FCC Part 15.247 Page 58 of 63

# FCC §15.247(d) - BAND EDGES TESTING

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ150114004-00B

### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

Temperature:	22
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Simon Wang from 2015-01-18

EUT operation mode: Transmitting

FCC Part 15.247 Page 59 of 63


# BDR (GFSK): Band Edge-Left Side

Report No.: RSZ150114004-00B

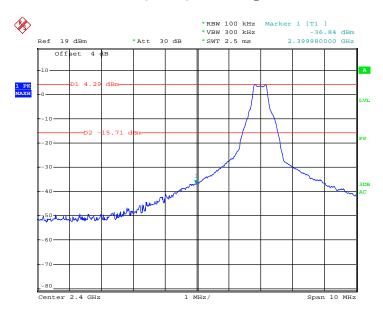

EUT
Date: 18.JAN.2015 16:22:34

# BDR (GFSK): Band Edge-Right Side

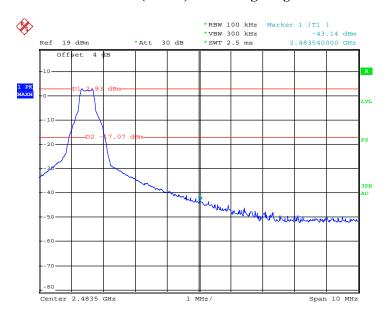


Date: 18.JAN.2015 16:24:10

EUT


FCC Part 15.247 Page 60 of 63

# EDR ( $\pi$ /4-DQPSK): Band Edge-Left Side

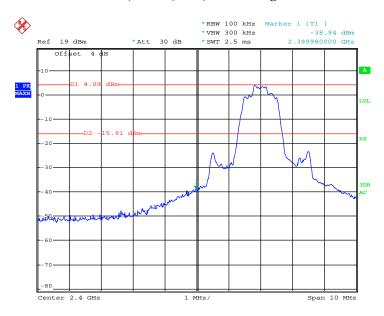

EUT
Date: 18.JAN.2015 16:21:21


# EDR ( $\pi$ /4-DQPSK): Band Edge-Right Side

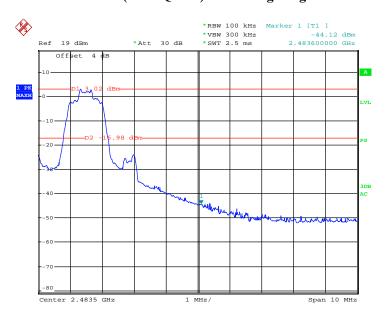

EUT
Date: 18.JAN.2015 16:19:49


FCC Part 15.247 Page 61 of 63

# EDR (8DPSK): Band Edge-Left Side

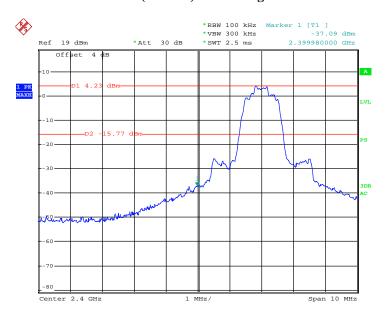

EUT
Date: 18.JAN.2015 16:17:22

# BDR (8DPSK): Band Edge-Right Side

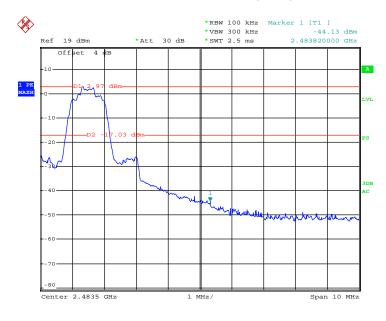

EUT
Date: 18.JAN.2015 16:18:23

FCC Part 15.247 Page 62 of 63

# PRODUCT SIMILARITY DECLARATION LETTER



Sourcing the best for the future Conplex International Limited Unit902-904,9th Floor, Tower B, Hung Hom Commercial Centre, 37, Ma Tau Wai Road, Hung Hum, Kowloon, Hong Kong Tel: 86-755-29081966

2015/01/20

# **Product Similarity Declaration**

To Whom It May Concern,

We, Conplex International Limited, hereby declare that our 2G feature phone, Model Number: JV X903,JFP 3432 and JFP 2829 are electrically identical with the model number JV X903 that was tested by BACL. They are just different in model numbers and Appearance colors.

Report No.: RSZ150114004-00B

Please contact me if you have any question.

Signature:

Hugo Zhai

Project Manager

For and on behalf of COMPLEX INTERNATIONAL LIMITED 透 战 網 探 市 国 公 男

Jugu

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 63 of 63