

FCC TEST REPORT  
for  
Shenzhen Champion Industry Co., Ltd.

Smart Table  
Model No.: LD99-3

Prepared for : Shenzhen Champion Industry Co., Ltd.  
Address : Longqin Road No. 13, Shahu, Pingshan New Area, Shenzhen China  
518118

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,  
Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544  
Fax: (86) 755-26014772

Report Number : 201311953F  
Date of Test : Nov. 27~ Dec. 09, 2013  
Date of Report : Dec. 09, 2013

## TABLE OF CHONTENTS

Description

Page

Test Report Verification

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT) .....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty .....	5
<b>2. TEST PROCEDURE .....</b>	<b>6</b>
<b>3. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>7</b>
3.1. Block Diagram of Test Setup .....	7
3.2. Power Line Conducted Emission Measurement Limits (FCC Part 15 15.207).....	7
3.3. Configuration of EUT on Measurement.....	7
3.4. Operating Condition of EUT .....	7
3.5. Test Procedure.....	8
3.6. Power Line Conducted Emission Measurement Results.....	8
<b>4. RADIATED EMISSION MEASUREMENT.....</b>	<b>11</b>
4.1. Radiated Emission Limits .....	11
4.2. Test Procedure.....	11
4.3. Test Setup.....	12
4.4. Test Results (Below 30MHz).....	14
4.5. Test Results (Between 30-1000MHz) .....	17
<b>5. OCCUPIED BANDWIDTH.....</b>	<b>23</b>
5.1. Requirements (2.1049):.....	23
5.2. Test Procedure.....	23
5.4. Test Results .....	23
<b>6. TEST SETUP PHOTOGRAPH.....</b>	<b>25</b>
6.1. Photo of Conducted Emission Measurement .....	25
6.2. Photo of Radiation Emission Test.....	25

APPENDIX I (External Photos) (3 Pages)

APPENDIX II (Internal Photos) (3 Pages)

**TEST REPORT VERIFICATION**

Applicant : Shenzhen Champion Industry Co., Ltd.  
Manufacturer : Shenzhen Champion Industry Co., Ltd.  
EUT : Smart Table  
Model No. : LD99-3  
Rating : DC 5V, 1.5A Via USB Port  
Trade Mark : Etable


Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C 15.207&15.209-2012, Part 2: 2012 & FCC / ANSI C63.4-2009


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Nov. 27~ Dec. 09, 2013

Prepared by :   
(Engineer/ Rock Zeng)

Reviewer :   
(Project Manager/ Sally Zhang)

Approved & Authorized Signer :   
(Manager/ Tom Chen)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Description	: Smart Table
Model Number	: LD99-3
Test Power Supply	: DC 5V
Frequency	: 113-176KHz
Modulation	: Pulse Modulation
Applicant	: Shenzhen Champion Industry Co., Ltd.
Address	: Longqin Road No. 13, Shahu, Pingshan New Area, Shenzhen China 518118
Manufacturer	: Shenzhen Champion Industry Co., Ltd.
Address	: Longqin Road No. 13, Shahu, Pingshan New Area, Shenzhen China 518118
Date of Sample received	: Nov. 27, 2013
Date of Test	: Nov. 27~ Dec. 09, 2013

## 1.2. Auxiliary Equipment Used during Test

Adapter : Power Supply  
Model: CW0502000  
Input: 100-240V~, 50-60Hz, 0.4A Max  
Output: 5V $\overline{\text{---}}$ , 2A

## 1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS - LAB Code: L3503**

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

### **FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

### **IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, February 22, 2013.

### **Test Location**

All Emissions tests were performed  
1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

## 1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

## 2. Test Procedure

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

**Example:**

Freq (MHz) METER READING + ACF = FS  
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m


**ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

### 3. POWER LINE CONDUCTED MEASUREMENT

#### 3.1. Block Diagram of Test Setup

##### 3.1.1 Block diagram of connection between the EUT and simulators

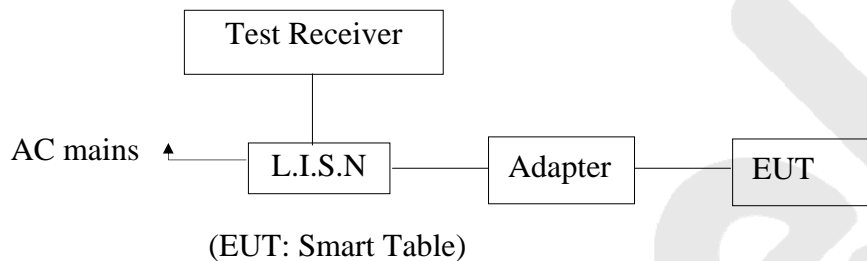

#### 3.2. Power Line Conducted Emission Measurement Limits (FCC Part 15

15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Smart Table  
Model Number : LD99-3  
Applicant : Shenzhen Champion Industry Co., Ltd.

#### 3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in test mode (Charging) and measure it.

### 3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 3.6.

#### Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 23, 2013	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 23, 2013	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 23, 2013	1 Year

Conduction Uncertainty :  $U_c = 3.4\text{dB}$

### 3.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.




**CONDUCTED EMISSION TEST DATA**

Test Site: 1# Shielded Room  
Operating Condition: On  
Operator: Bevan Zhang  
Test Specification: DC 5V  
Comment: L  
Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

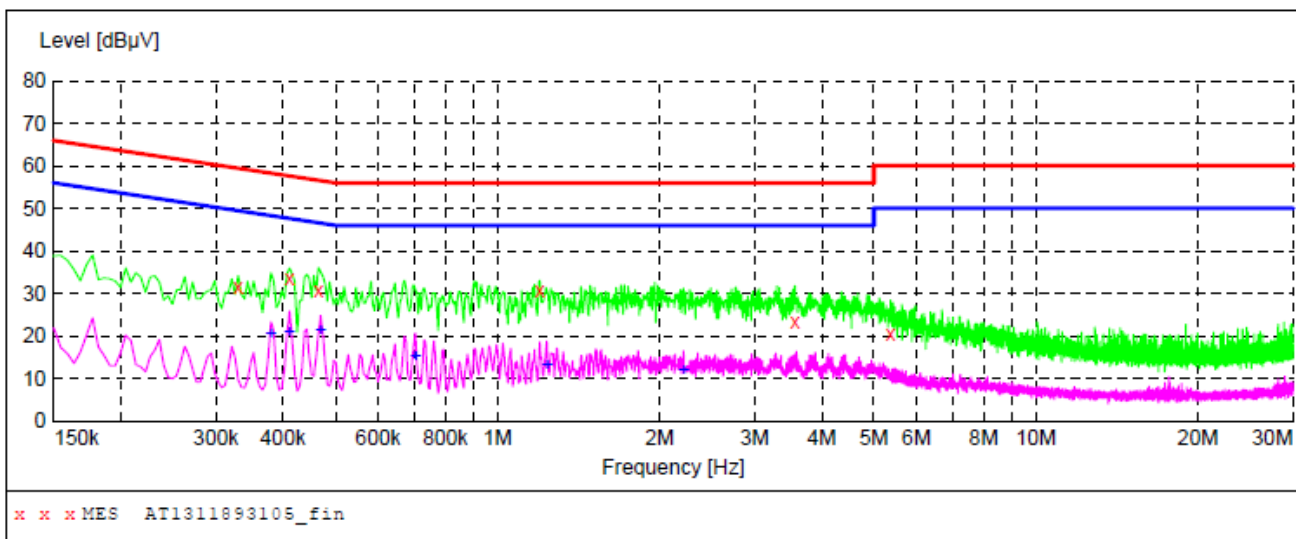**MEASUREMENT RESULT: "AT1311893105\_fin"**

11/27/2013 6:46PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.330000	31.60	20.1	60	27.9	QP	L1	GND
0.411000	33.70	20.1	58	24.3	QP	L1	GND
0.465000	30.50	20.1	57	26.5	QP	L1	GND
1.198000	30.70	20.2	56	25.3	QP	L1	GND
3.565000	23.50	20.4	56	32.5	QP	L1	GND
5.365000	20.60	20.5	60	39.4	QP	L1	GND

**MEASUREMENT RESULT: "AT1311893105\_fin2"**

11/27/2013 6:46PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.379500	20.50	20.1	48	27.8	AV	L1	GND
0.411000	21.00	20.1	48	27.0	AV	L1	GND
0.469500	21.30	20.1	47	26.7	AV	L1	GND
0.703500	15.00	20.1	46	31.0	AV	L1	GND
1.234000	13.20	20.2	46	32.8	AV	L1	GND
2.215000	12.10	20.3	46	33.9	AV	L1	GND

## CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room  
Operating Condition: On  
Operator: Bevan Zhang  
Test Specification: DC 5V  
Comment: N  
Tem:25°C Hum:50%

### SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

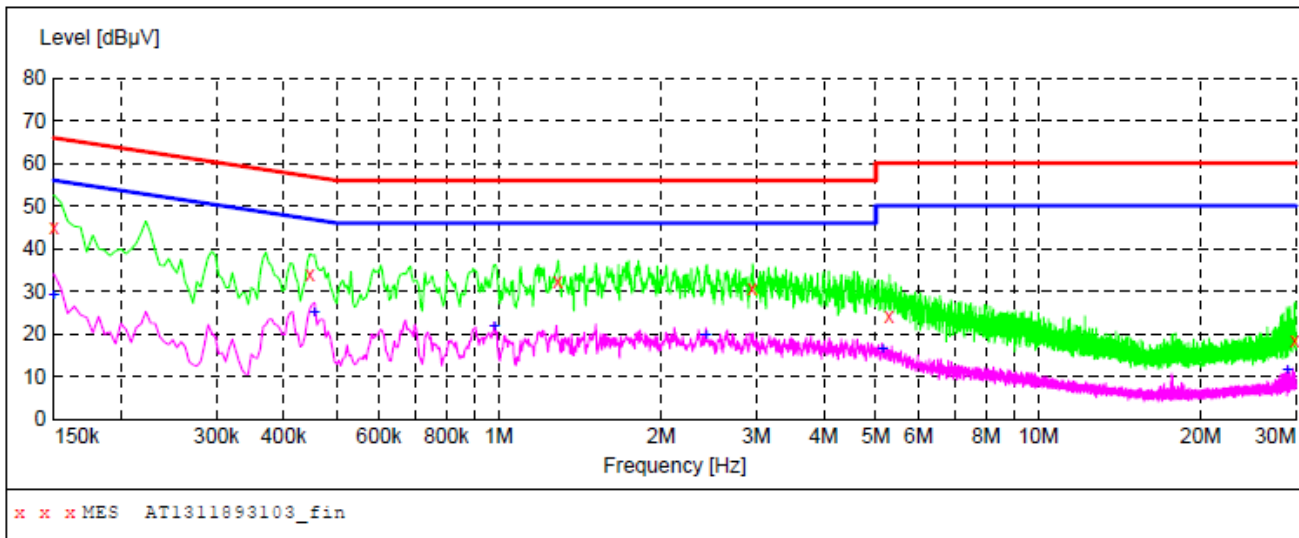

### MEASUREMENT RESULT: "AT1311893103\_fin"

11/27/2013 6:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	44.90	20.1	66	21.1	QP	N	GND
0.447000	34.10	20.1	57	22.8	QP	N	GND
1.288000	32.20	20.2	56	23.8	QP	N	GND
2.953000	30.50	20.4	56	25.5	QP	N	GND
5.297500	24.20	20.5	60	35.8	QP	N	GND
29.894500	18.40	20.9	60	41.6	QP	N	GND

### MEASUREMENT RESULT: "AT1311893103\_fin2"

11/27/2013 6:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	29.10	20.1	56	26.9	AV	N	GND
0.456000	25.00	20.1	47	21.8	AV	N	GND
0.982500	21.60	20.2	46	24.4	AV	N	GND
2.422000	19.80	20.3	46	26.2	AV	N	GND
5.135500	16.30	20.5	50	33.7	AV	N	GND
28.940500	11.30	20.9	50	38.7	AV	N	GND

## 4. RADIATED EMISSION MEASUREMENT

### 4.1. Radiated Emission Limits

Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

Note:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as


$$Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30 uV/m$$

### 4.2. Test Procedure


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.3. Test Setup

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

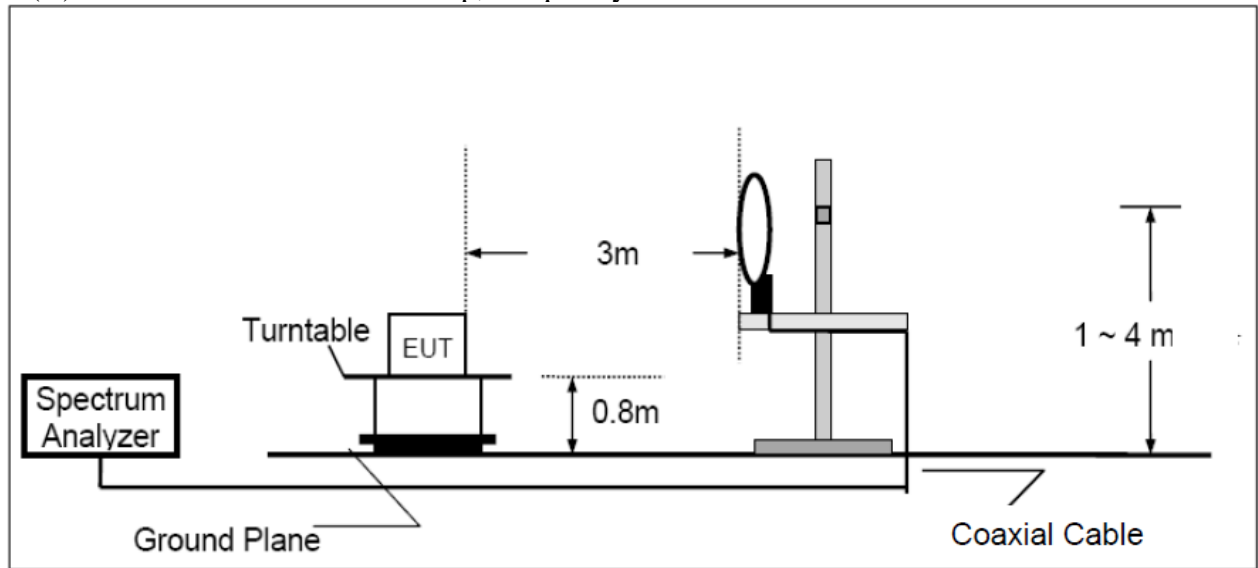

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

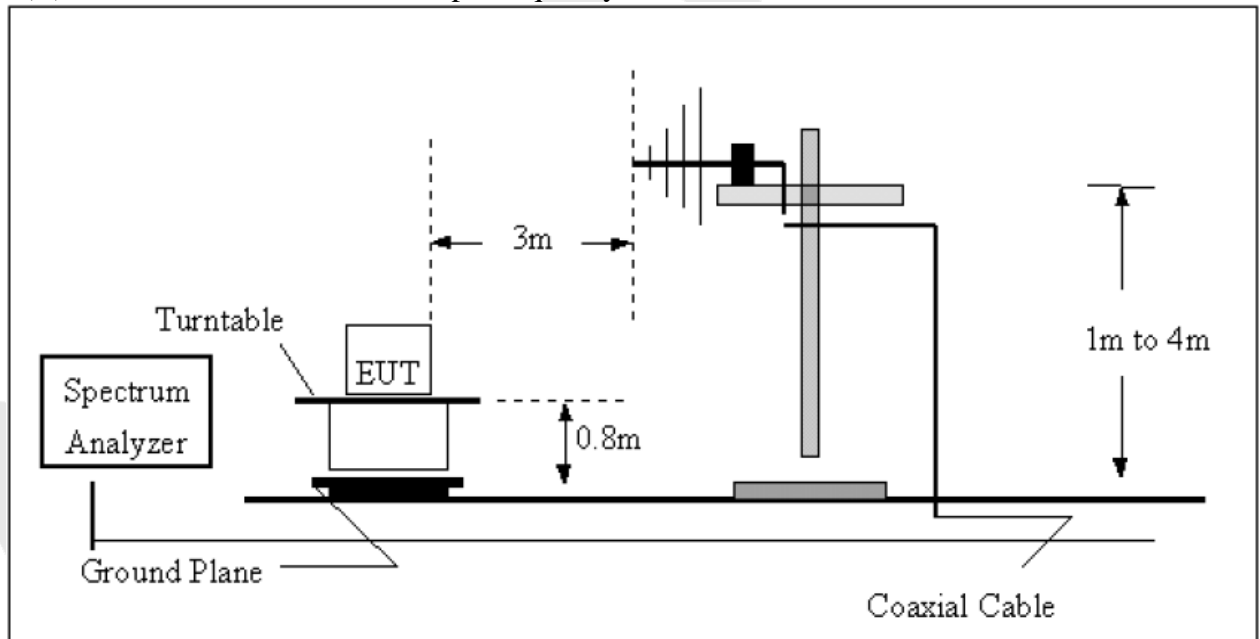

## Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 23, 2013	1 Year
2.	Loop Antenna	ARA	PLA-1030/ B	1029	Apr. 23, 2013	3 Year
3.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 14, 2013	3 Year
4.	Pre-amplifier	SONOMA	310N	186860	Aug. 09, 2013	1 Year
5.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

#### 4.4. Test Results (Below 30MHz)

100% Charged:

Low Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
113.00	79.33	16.00	95.33	21.24	300	106.54	-11.21	PK
226.00	70.29	15.60	85.89	10.67	300	100.52	-14.63	PK
339.00	56.17	15.30	71.47	7.07	300	97.00	-25.53	PK
452.00	50.81	14.80	65.61	5.30	300	94.50	-28.89	PK
565.00	43.64	14.50	58.14	42.47	30	72.56	-14.42	PK
678.00	39.55	13.95	53.5	35.39	30	70.97	-17.47	PK
791.00	--	--	--	--	--	--	--	--
904.00	--	--	--	--	--	--	--	--
1017.00	--	--	--	--	--	--	--	--
1130.00	--	--	--	--	--	--	--	--

High Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
176.00	77.25	16.00	93.25	13.64	300	102.69	-9.44	PK
352.00	69.13	15.60	84.73	6.82	300	96.67	-11.94	PK
528.00	50.87	15.30	66.17	45.45	30	73.15	-6.98	PK
704.00	45.62	14.80	60.42	34.09	30	70.65	-10.23	PK
880.00	44.33	14.50	58.83	27.27	30	68.72	-9.89	PK
1056.00	38.07	13.95	52.02	22.73	30	67.13	-15.11	PK
1232.00	--	--	--	--	--	--	--	--
1408.00	--	--	--	--	--	--	--	--
1584.00	--	--	--	--	--	--	--	--
1760.00	--	--	--	--	--	--	--	--

50% Charged:

Low Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
113.00	79.12	16.00	95.12	21.24	300	106.54	-11.42	PK
226.00	70.05	15.60	85.65	10.67	300	100.52	-14.87	PK
339.00	55.79	15.30	71.09	7.07	300	97.00	-25.91	PK
452.00	51.24	14.80	66.04	5.30	300	94.50	-28.46	PK
565.00	43.73	14.50	58.23	42.47	30	72.56	-14.33	PK
678.00	39.82	13.95	53.77	35.39	30	70.97	-17.20	PK
791.00	--	--	--	--	--	--	--	--
904.00	--	--	--	--	--	--	--	--
1017.00	--	--	--	--	--	--	--	--
1130.00	--	--	--	--	--	--	--	--

High Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
176.00	77.19	16.00	93.19	13.64	300	102.69	-9.5	PK
352.00	69.36	15.60	84.96	6.82	300	96.67	-11.71	PK
528.00	50.94	15.30	66.24	45.45	30	73.15	-6.91	PK
704.00	45.09	14.80	59.89	34.09	30	70.65	-10.76	PK
880.00	44.88	14.50	59.38	27.27	30	68.72	-9.34	PK
1056.00	38.76	13.95	52.71	22.73	30	67.13	-14.42	PK
1232.00	--	--	--	--	--	--	--	--
1408.00	--	--	--	--	--	--	--	--
1584.00	--	--	--	--	--	--	--	--
1760.00	--	--	--	--	--	--	--	--



0% Charged:

Low Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
113.00	78.04	16.00	94.04	21.24	300	106.54	-12.5	PK
226.00	70.11	15.60	85.71	10.67	300	100.52	-14.81	PK
339.00	56.84	15.30	72.14	7.07	300	97.00	-24.86	PK
452.00	50.75	14.80	65.55	5.30	300	94.50	-28.95	PK
565.00	43.11	14.50	57.61	42.47	30	72.56	-14.95	PK
678.00	39.96	13.95	53.91	35.39	30	70.97	-17.06	PK
791.00	--	--	--	--	--	--	--	--
904.00	--	--	--	--	--	--	--	--
1017.00	--	--	--	--	--	--	--	--
1130.00	--	--	--	--	--	--	--	--

High Channel:

Freq.(KHz)	Reading at 3m (dBuV/m)	Factor (dB) Cable loss	Result at 3m (dBuV/m)	Field Strength Limit (uV/m)	Required Measurement Distance (m)	Limitation Converted 3m dist. (dBuV/m)	Over Limit (dB)	Detector (PK/AV)
176.00	76.51	16.00	92.51	13.64	300	102.69	-10.18	PK
352.00	68.94	15.60	84.54	6.82	300	96.67	-12.13	PK
528.00	50.42	15.30	65.72	45.45	30	73.15	-7.43	PK
704.00	45.62	14.80	60.42	34.09	30	70.65	-10.23	PK
880.00	42.95	14.50	57.45	27.27	30	68.72	-11.27	PK
1056.00	38.71	13.95	52.66	22.73	30	67.13	-14.47	PK
1232.00	--	--	--	--	--	--	--	--
1408.00	--	--	--	--	--	--	--	--
1584.00	--	--	--	--	--	--	--	--
1760.00	--	--	--	--	--	--	--	--

Remark:

(1) Spectrum Setting:

9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.

150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.

(2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform.

(3) The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.

(4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table

(5) The transmitting frequency of EUT depends on the load, the manufacturer provided several proper loads, which means the EUT can work in low channel and high channel separately by using different loads, so the EUT can be tested on the low and high channels under various conditions of battery.




#### 4.5. Test Results (Between 30-1000MHz)

Pass


The test curves are shown in the following pages.

<b>Job No.:</b>	<b>AT1311893F</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>(RE)FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>DC 5V</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Test By:</b>	<b>Rock Zeng</b>
<b>Temp.(C)/Hum.(%RH):</b>	<b>24.3( C)/55%RH</b>	<b>Distance:</b>	<b>3m</b>
<b>Mode:</b>	<b>ON (100% Charged)</b>		

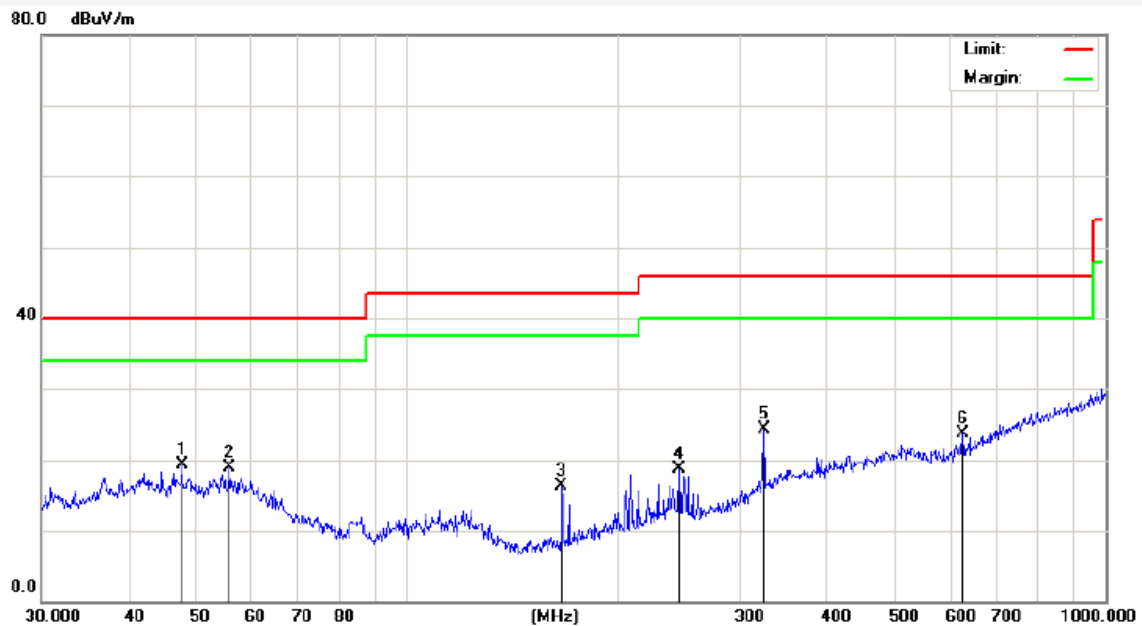


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	47.6586	33.81	-14.46	19.35	40.00	-20.65	peak			
2	55.8047	33.93	-15.00	18.93	40.00	-21.07	peak			
3	166.6514	38.99	-22.66	16.33	43.50	-27.17	peak			
4	245.0900	37.10	-18.31	18.79	46.00	-27.21	peak			
5	324.4561	39.34	-15.04	24.30	46.00	-21.70	peak			
6	625.0780	34.31	-10.55	23.76	46.00	-22.24	peak			

Job No.:	AT1311893F	Polarization:	Vertical
Standard:	(RE)FCC PART15 C_3m	Power Source:	DC 5V
Test item:	Radiation Test	Test By:	Rock Zeng
Temp.(C)/Hum.(%RH):	24.3( C)/55%RH	Distance:	3m
Mode:	ON(100% Charged)		

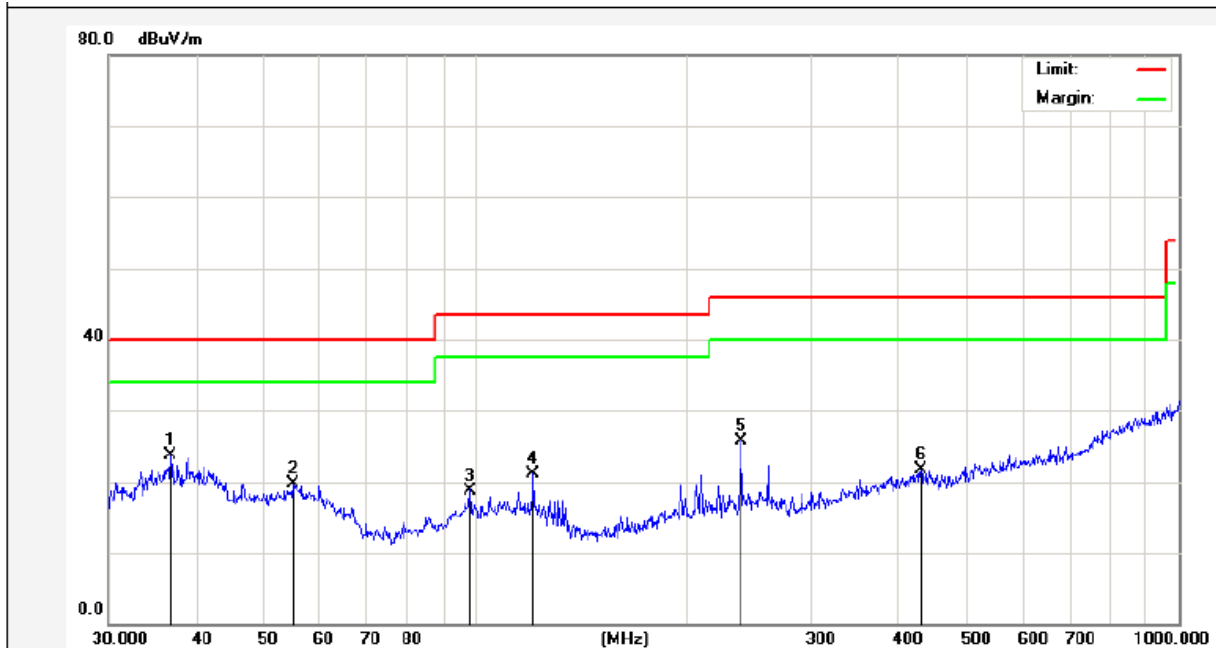


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.7661	39.31	-15.62	23.69	40.00	-16.31	peak			
2	54.8348	34.60	-14.91	19.69	40.00	-20.31	peak			
3	98.1419	34.66	-15.86	18.80	43.50	-24.70	peak			
4	120.6991	37.62	-16.43	21.19	43.50	-22.31	peak			
5	238.3102	39.84	-14.18	25.66	46.00	-20.34	peak			
6	429.5228	33.02	-11.24	21.78	46.00	-24.22	peak			

<b>Job No.:</b>	<b>AT1311893F</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>(RE)FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>DC 5V</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Test By:</b>	<b>Rock Zeng</b>
<b>Temp.(C)/Hum.(%RH):</b>	<b>24.3( C)/55%RH</b>	<b>Distance:</b>	<b>3m</b>
<b>Mode:</b>	<b>ON (50% Charged)</b>		

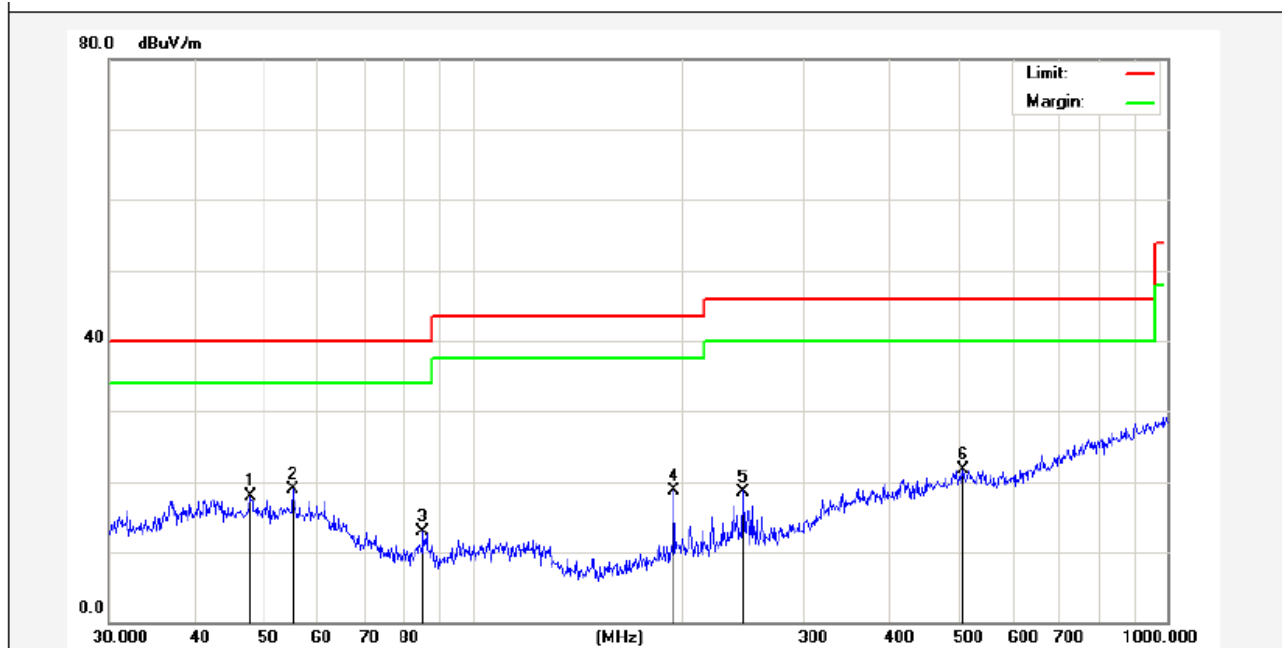


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	47.9940	32.41	-14.47	17.94	40.00	-22.06	peak			
2	55.2207	33.83	-14.94	18.89	40.00	-21.11	peak			
3	84.9995	33.20	-20.35	12.85	40.00	-27.15	peak			
4	195.1365	39.53	-20.89	18.64	43.50	-24.86	peak			
5	245.0900	36.91	-18.31	18.60	46.00	-27.40	peak			
6	508.2582	32.70	-10.97	21.73	46.00	-24.27	peak			

<b>Job No.:</b>	<b>AT1311893F</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Standard:</b>	<b>(RE)FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>DC 5V</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Test By:</b>	<b>Rock Zeng</b>
<b>Temp.(C)/Hum.(%RH):</b>	<b>24.3( C)/55%RH</b>	<b>Distance:</b>	<b>3m</b>
<b>Mode:</b>	<b>ON(50% Charged)</b>		

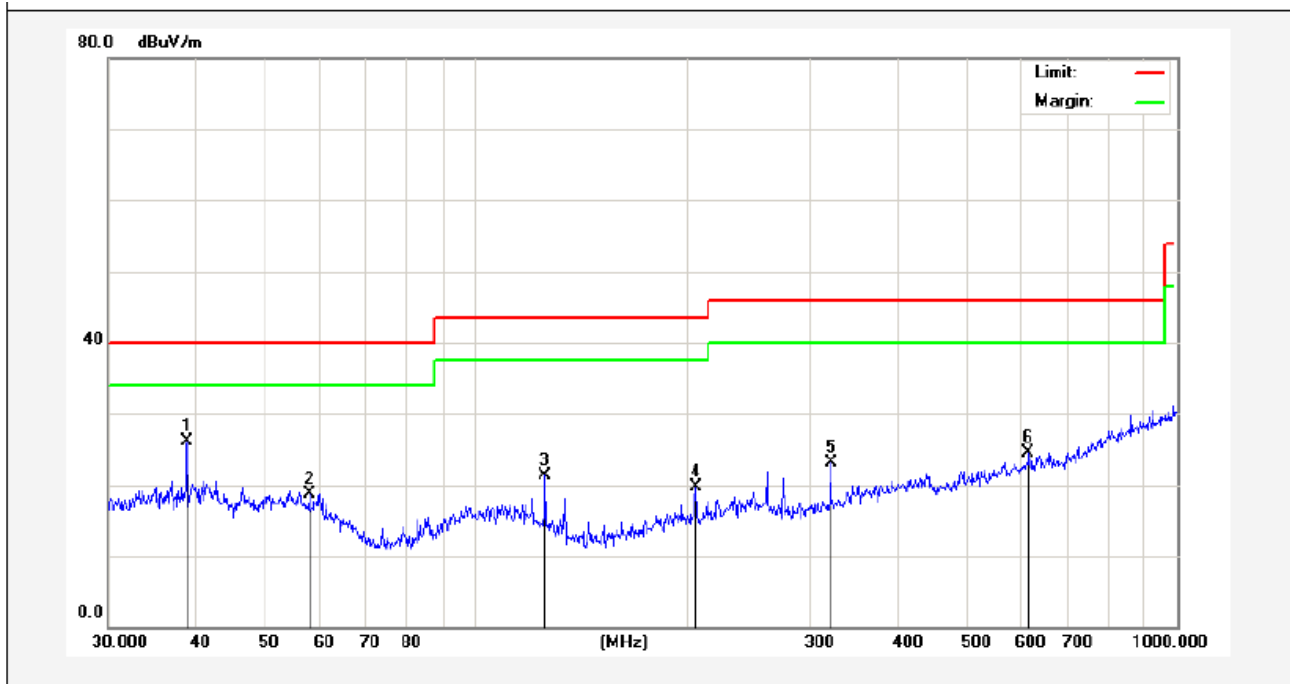


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.8878	40.98	-14.79	26.19	40.00	-13.81	peak			
2	57.9993	33.85	-15.21	18.64	40.00	-21.36	peak			
3	125.8864	38.55	-17.20	21.35	43.50	-22.15	peak			
4	206.3976	35.32	-15.63	19.69	43.50	-23.81	peak			
5	321.0608	37.31	-14.20	23.11	46.00	-22.89	peak			
6	614.2142	33.66	-9.13	24.53	46.00	-21.47	peak			

<b>Job No.:</b>	<b>AT1311893F</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>(RE)FCC PART15 C _3m</b>	<b>Power Source:</b>	<b>DC 5V</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Test By:</b>	<b>Rock Zeng</b>
<b>Temp.(C)/Hum.(%RH):</b>	<b>24.3( C)/55%RH</b>	<b>Distance:</b>	<b>3m</b>
<b>Mode:</b>	<b>ON (0% Charged)</b>		

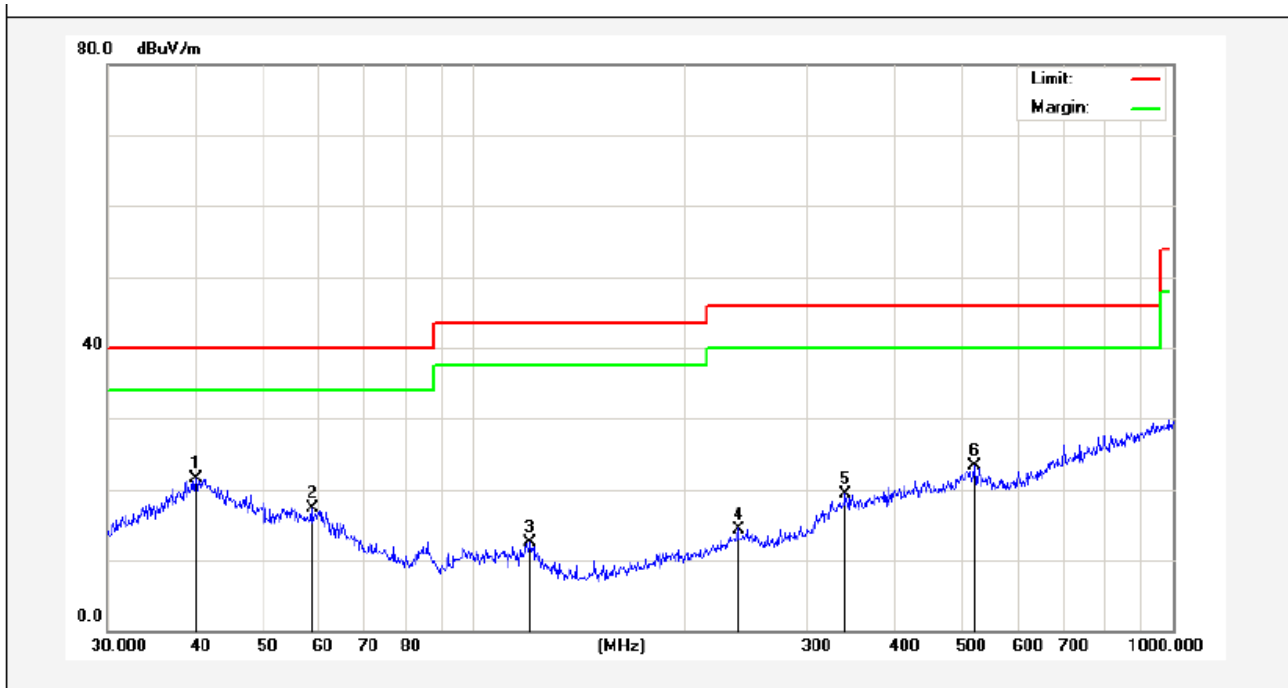

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.1347	31.93	-10.42	21.51	40.00	-18.49	peak			
2	58.8185	32.53	-15.28	17.25	40.00	-22.75	peak			
3	120.6991	33.95	-21.43	12.52	43.50	-30.98	peak			
4	239.1473	32.57	-18.17	14.40	46.00	-31.60	peak			
5	340.7817	33.61	-14.27	19.34	46.00	-26.66	peak			
6	520.8882	34.30	-11.01	23.29	46.00	-22.71	peak			

<b>Job No.:</b>	<b>AT1311893F</b>	<b>Polarization:</b>	<b>Vertical</b>
<b>Standard:</b>	<b>(RE)FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>DC 5V</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Test By:</b>	<b>Rock Zeng</b>
<b>Temp.(C)/Hum.(%RH):</b>	<b>24.3( C)/55%RH</b>	<b>Distance:</b>	<b>3m</b>
<b>Mode:</b>	<b>ON(0% Charged)</b>		

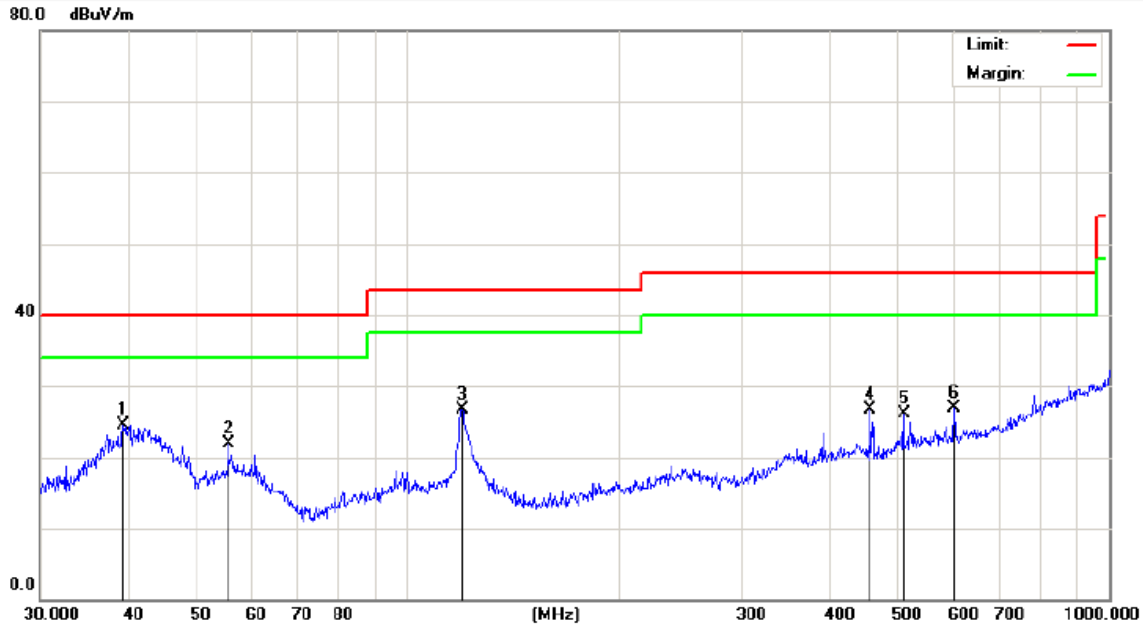

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.4371	35.39	-10.80	24.59	40.00	-15.41	peak			
2	55.6094	36.93	-14.99	21.94	40.00	-18.06	peak			
3	119.8555	43.09	-16.32	26.77	43.50	-16.73	peak			
4	457.5072	38.68	-11.99	26.69	46.00	-19.31	peak			
5	510.0436	36.85	-10.77	26.08	46.00	-19.92	peak			
6	601.4265	36.09	-9.22	26.87	46.00	-19.13	peak			

## 5. Occupied Bandwidth

### 5.1. Requirements (2.1049):

The occupied bandwidth is measured as the 99% emission bandwidth, the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

### 5.2. Test Procedure

1. The 99% bandwidth is measured with a spectrum analyser connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Adjust the centre frequency of the spectrum analyser on the frequency be measured, and set for peak detector mode, max. hold trace mode.  
RBW= 300 Hz, VBW= 1KHz
3. The span of the analyzer shall be set to capture all products of the modulation process including the emission skirts. Use the marker-peak function to set the marker to the peak of the emission.
4. User the OBW function to measure 99% emission bandwidth, record the occupied bandwidth value.



#### Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 09, 2013	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 09, 2013	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 23, 2013	1 Year

### 5.4. Test Results

Pass.

Please refer the following plot.

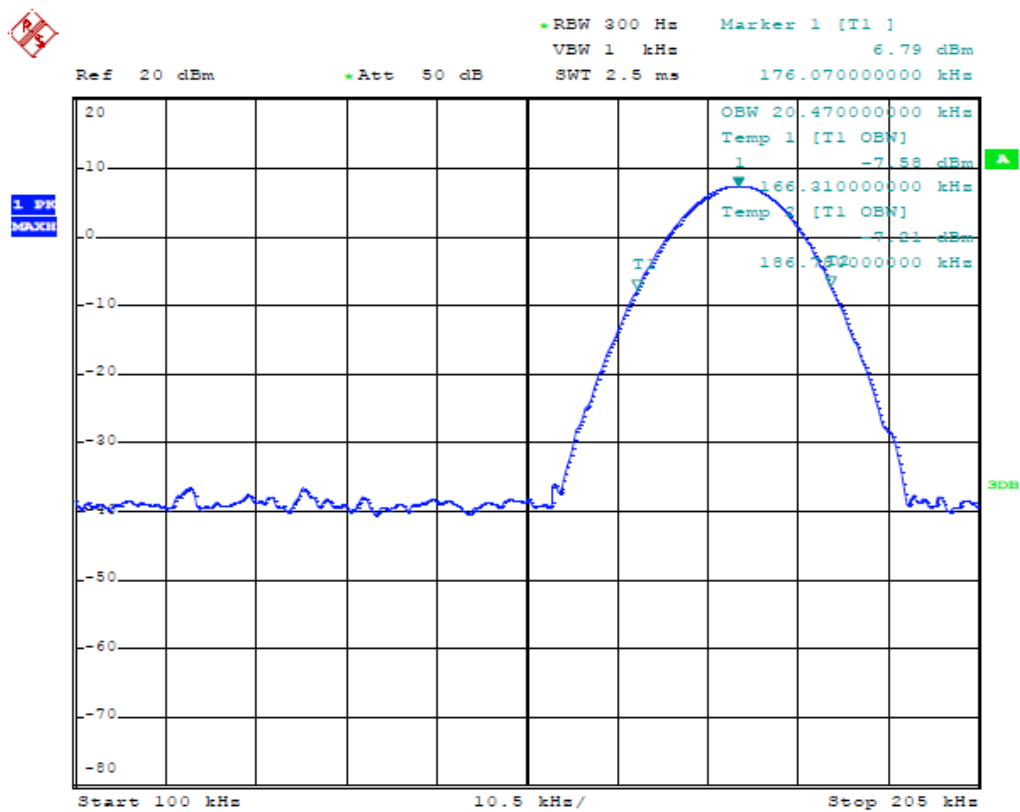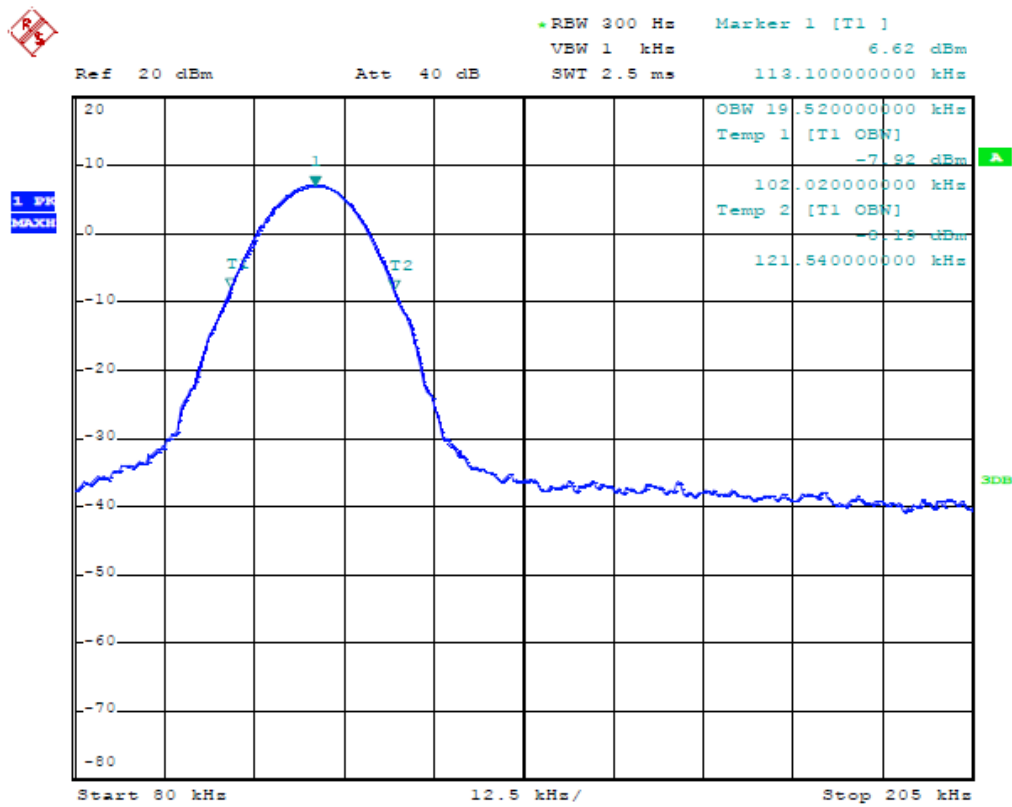




## 6. TEST SETUP PHOTOGRAPH

### 6.1. Photo of Conducted Emission Measurement



### 6.2. Photo of Radiation Emission Test

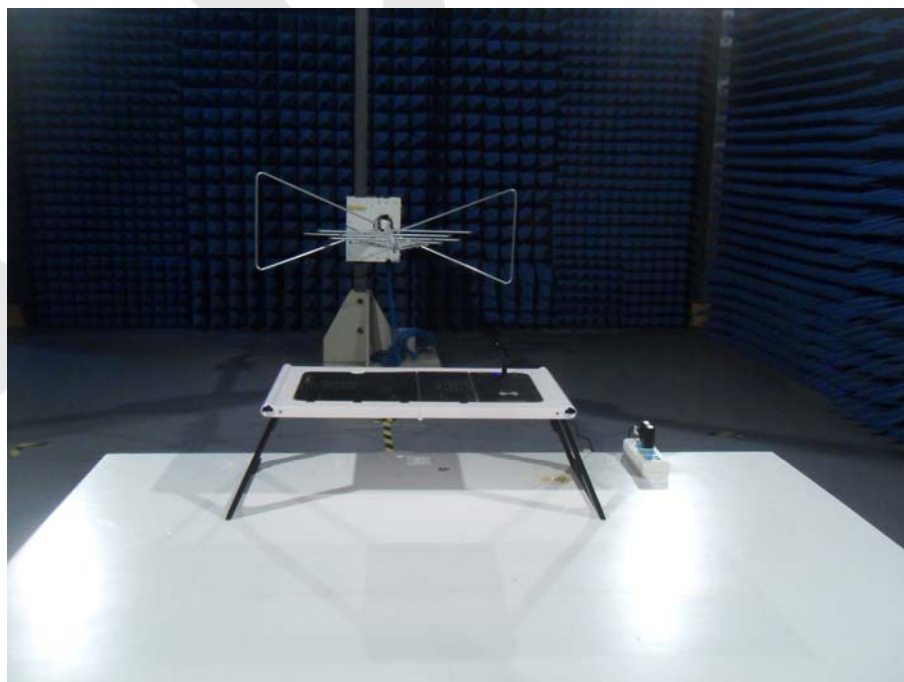

## APPENDIX I (External Photos)

Figure 1

The EUT-Overall View (Fold)

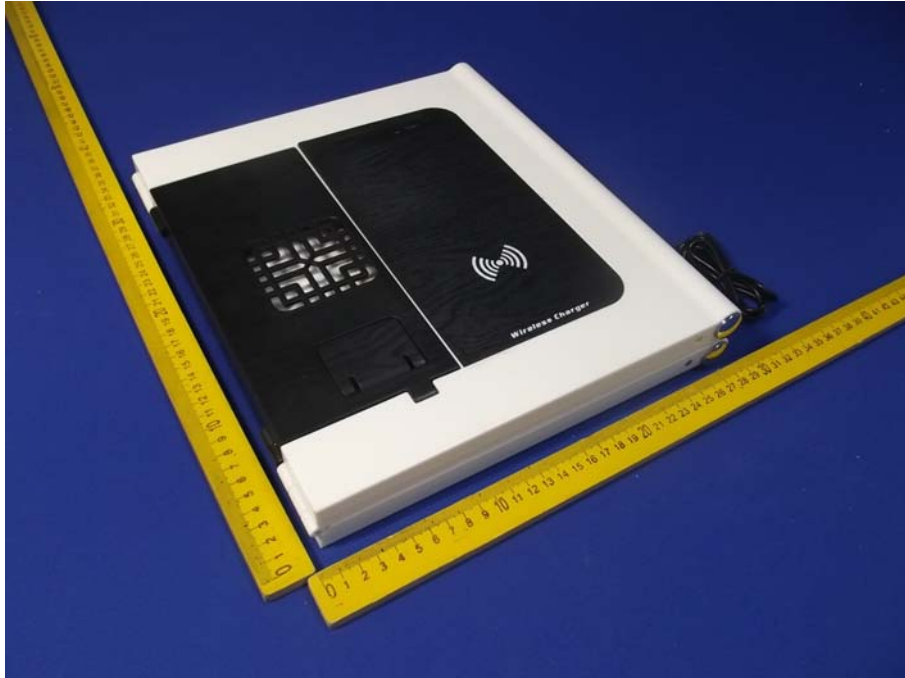


Figure 2

The EUT-Top View (Fold)



Figure 3  
The EUT-Bottom View (Fold)

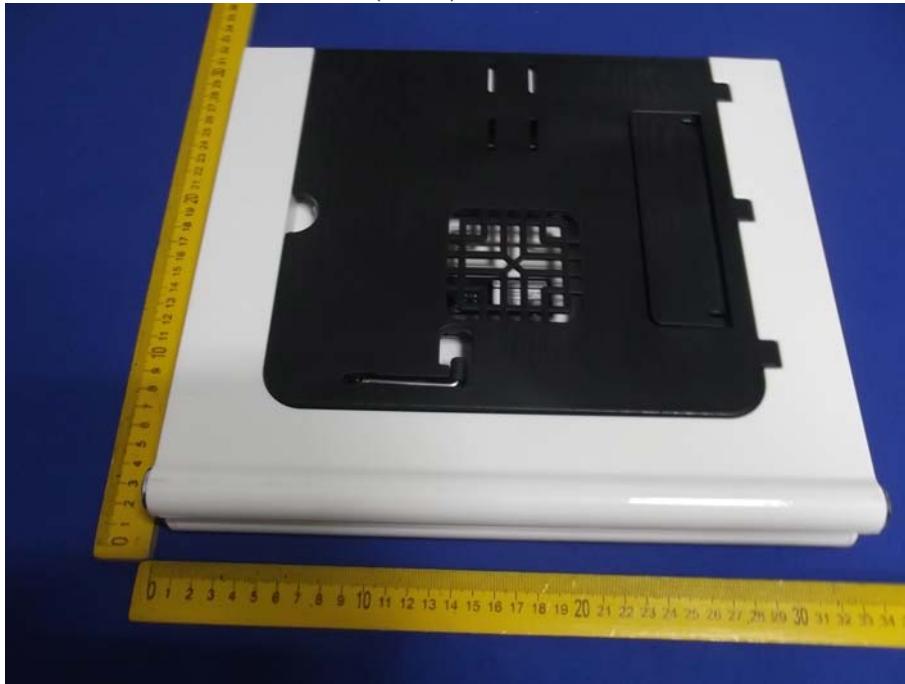


Figure 4  
The EUT-Front View (Fold)



Figure 5  
The EUT-Rear View (Fold)



Figure 6  
The EUT-Left View (Fold)



Figure 7  
The EUT-Back View (Fold)



Figure 8  
The EUT-Front View (Unfold)





Figure 9  
The EUT-Back View (Unfold)

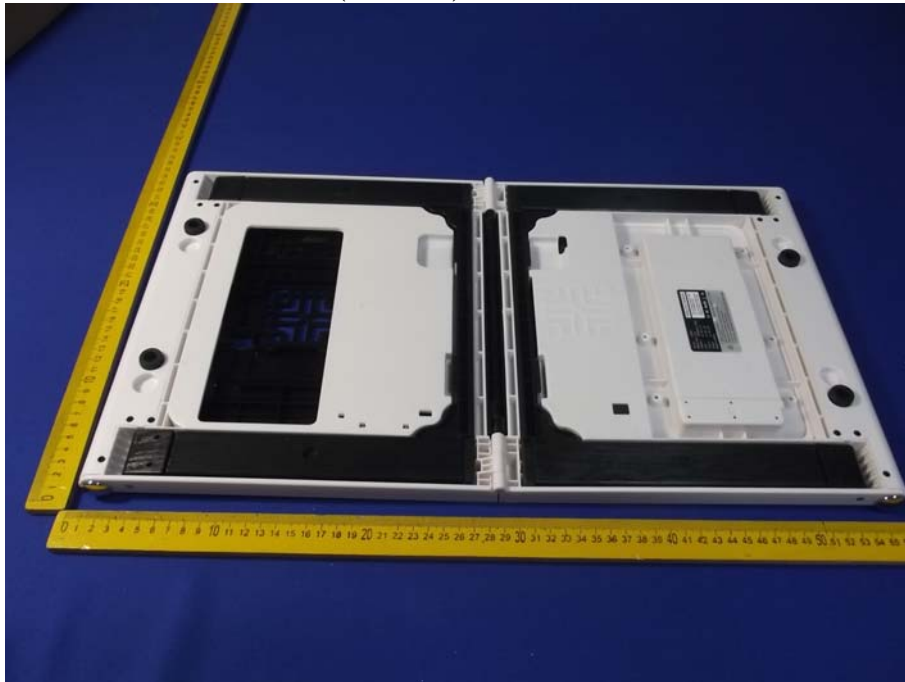


Figure 10  
The EUT-Overall View



Figure 11  
The EUT-Port View



## APPENDIX II (Internal Photos)

Figure 12

The EUT-Inside View



Figure 13

PCB of the EUT-Front View

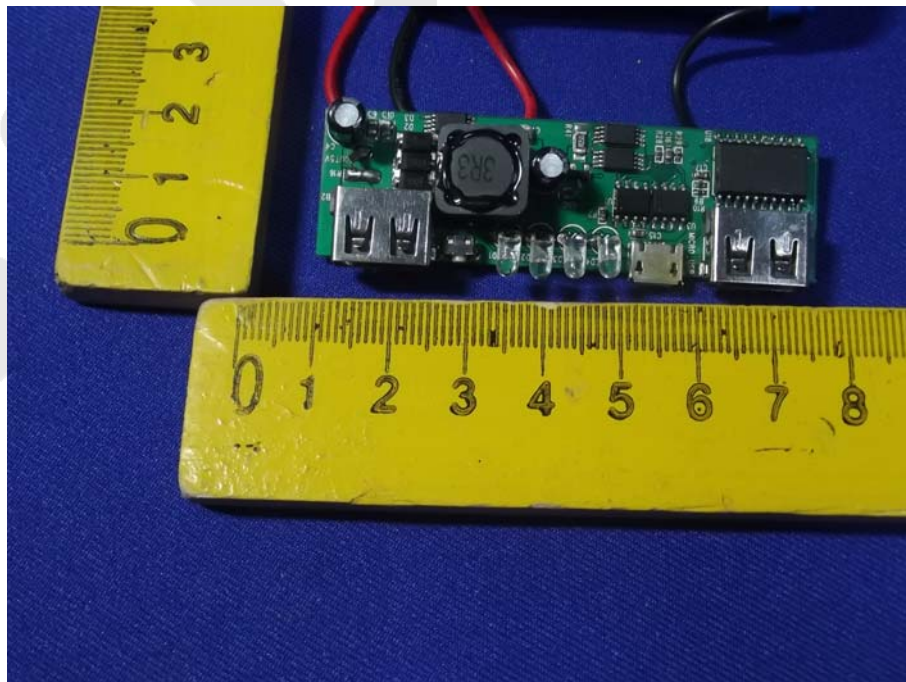




Figure 14  
PCB of the EUT-Back View

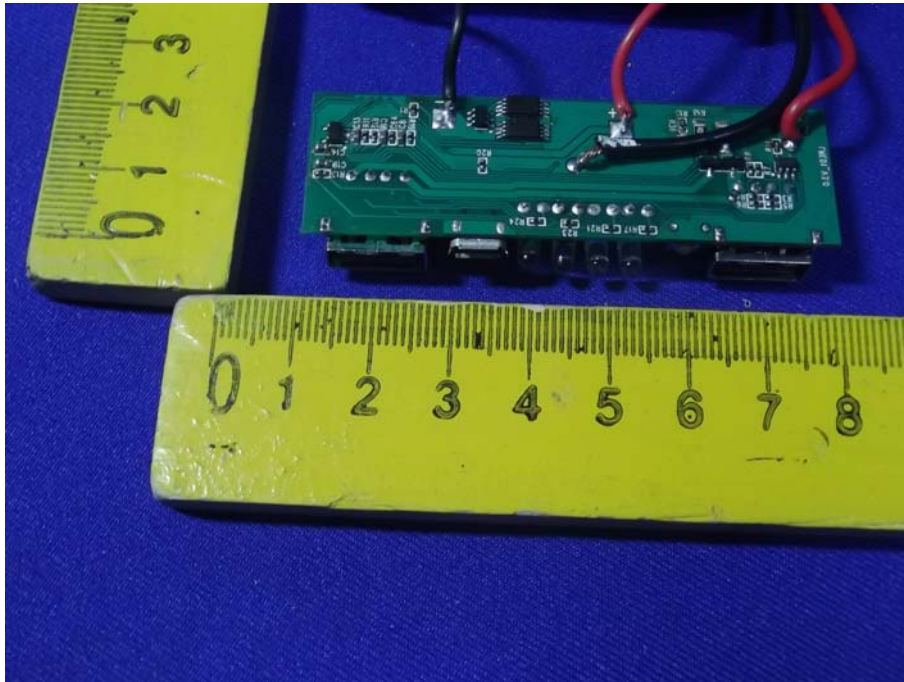


Figure 15  
PCB of the EUT-Front View

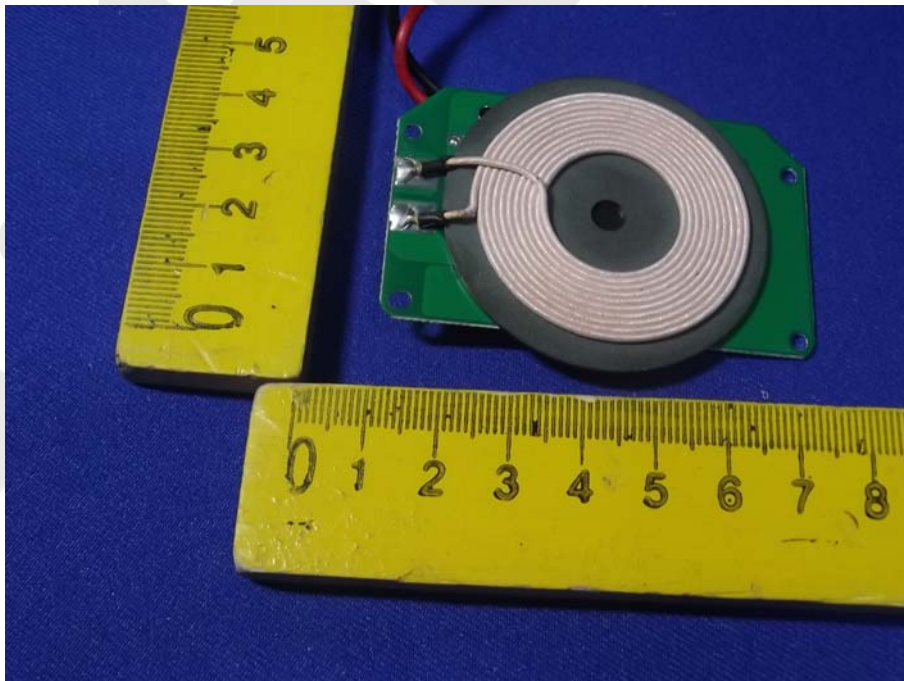


Figure 16  
PCB of the EUT-Back View

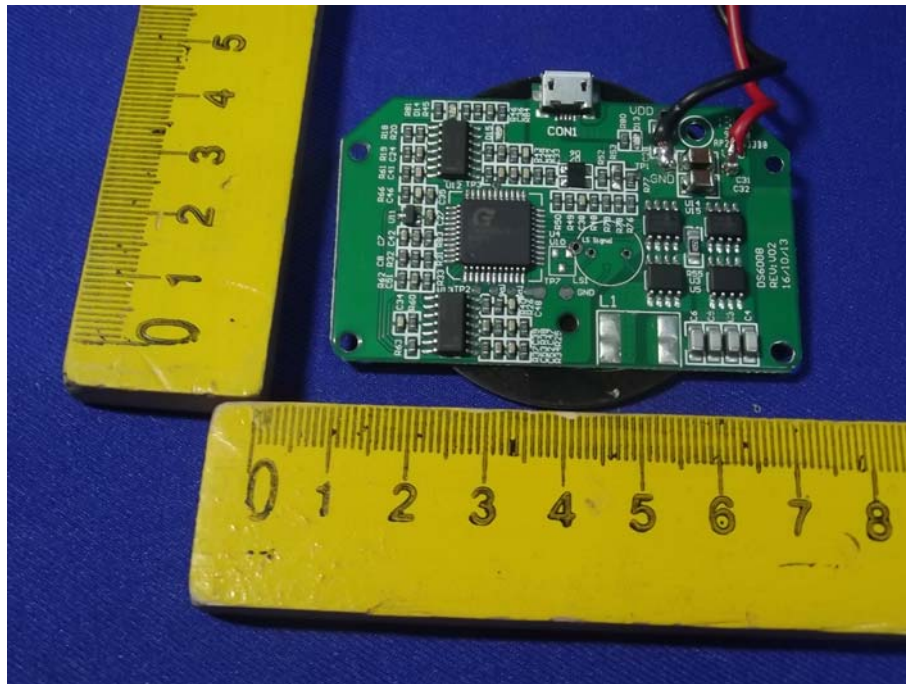


Figure 17  
The EUT-Battery View

