

TEST REPORT

Reference No...... : WTD13S1109321E
FCC ID : 2ABKTSM-230
Applicant..... : SoundMax Technology Co., Ltd.
Address..... : 2F., no.140-1, Changle Rd., Luzhou Dist., New Taipei City
24767, Taiwan
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Bluetooth Speaker
Model No : SM-230
Standards..... : FCC CFR47 Part 15 Subpart C: 2012
Date of Receipt sample : 2013-11-25
Date of Test : 2013-11-26 to 2013-11-30
Date of Issue..... : 2013-12-11
Test Result..... : **Pass ***

***Remarks:**

The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: The same as above

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Maikou Zhang / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

| Test Items | Test Requirement | Result |
|---|----------------------------------|--------|
| Spurious Radiated Emissions | 15.205(a) 15.209 15.247(d) | PASS |
| Band edge Emissions | 15.247(d) | PASS |
| Spurious RF Conducted Emissions from out of band | 15.247(d) | PASS |
| Duty Cycle | 15.35 | PASS |
| Conducted Emissions | 15.207 | PASS |
| 20dB Bandwidth | 15.215c 15.247(a)(1) | PASS |
| Maximum Peak Output Power | 15.247(b)(1) | PASS |
| Frequency Separation | 15.247(a)(1) | PASS |
| Number of Hopping Frequency | 15.247(a)(1)(iii) | PASS |
| Dwell time | 15.247(a)(1)(iii) | PASS |
| Maximum Permissible Exposure (Exposure of Humans to RF Fields) | 1.1307(b)(1) | PASS |

3 Contents

| | Page |
|--|-----------|
| 1 COVER PAGE..... | 1 |
| 2 TEST SUMMARY | 2 |
| 3 CONTENTS | 3 |
| 4 GENERAL INFORMATION..... | 5 |
| 4.1 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 4.2 DETAILS OF E.U.T. | 5 |
| 4.3 CHANNEL LIST | 5 |
| 4.4 DESCRIPTION OF SUPPORT UNITS | 5 |
| 4.5 TEST FACILITY | 6 |
| 4.6 TEST LOCATION..... | 6 |
| 5 EQUIPMENT USED DURING TEST | 7 |
| 5.1 EQUIPMENTS LIST | 7 |
| 5.2 MEASUREMENT UNCERTAINTY | 7 |
| 5.3 TEST EQUIPMENT CALIBRATION | 7 |
| 6 CONDUCTED EMISSION | 8 |
| 6.1 E.U.T. OPERATION | 8 |
| 6.2 EUT SETUP..... | 8 |
| 6.3 CONDUCTED EMISSION TEST RESULT | 9 |
| 7 SPURIOUS RADIATED EMISSIONS..... | 11 |
| 7.1 EUT OPERATION :..... | 11 |
| 7.2 TEST SETUP | 12 |
| 7.3 SPECTRUM ANALYZER SETUP | 13 |
| 7.4 TEST PROCEDURE | 14 |
| 7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION | 14 |
| 7.6 SUMMARY OF TEST RESULTS | 15 |
| 8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND..... | 18 |
| 8.1 TEST PROCEDURE | 18 |
| 8.2 TEST RESULT | 18 |
| 9 BAND EDGE MEASUREMENT | 22 |
| 9.1 TEST PROCEDURE | 22 |
| 9.2 TEST RESULT:..... | 23 |
| 10 20 DB BANDWIDTH MEASUREMENT | 26 |
| 10.1 TEST PROCEDURE:..... | 26 |
| 10.2 TEST RESULT: | 26 |
| 11 MAXIMUM PEAK OUTPUT POWER | 32 |
| 11.1 TEST PROCEDURE:..... | 32 |
| 11.2 TEST RESULT: | 32 |
| 12 HOPPING CHANNEL SEPARATION | 38 |
| 12.1 TEST PROCEDURE:..... | 38 |
| 12.2 TEST RESULT: | 38 |
| 13 NUMBER OF HOPPING FREQUENCY..... | 44 |
| 13.1 TEST PROCEDURE:..... | 44 |
| 13.2 TEST RESULT: | 44 |

| | | |
|-----------|---|-----------|
| 14 | DWELL TIME | 46 |
| 14.1 | TEST PROCEDURE:..... | 46 |
| 14.2 | TEST RESULT: | 46 |
| 15 | ANTENNA REQUIREMENT | 62 |
| 16 | RF EXPOSURE..... | 63 |
| 16.1 | REQUIREMENTS:..... | 63 |
| 16.2 | THE PROCEDURES / LIMIT | 63 |
| 16.3 | MPE CALCULATION METHOD | 64 |
| 17 | PHOTOGRAPHS – TEST SETUP | 65 |
| 17.1 | CONDUCTED EMISSIONS | 65 |
| 17.2 | RADIATED EMISSIONS | 65 |
| 18 | PHOTOGRAPHS - CONSTRUCTIONAL DETAILS | 69 |
| 18.1 | EUT – EXTERNAL VIEW1..... | 69 |
| 18.2 | EUT – INTERNAL VIEW..... | 72 |

4 General Information

4.1 General Description of E.U.T.

| | |
|-----------------------------|--|
| Product Name | : Bluetooth Speaker |
| Model No. | : SM-230 |
| Model Description | : N/A |
| Operation Frequency | : 2402MHz ~ 2480MHz, 79 channels in total, separated by 1MHz |
| Type of Modulation | : GFSK, Pi/4DQPSK, 8DPSK |
| Oscillator | : Crystal 16MHz for RF module |
| Antenna installation | : PCB Printed Antenna |
| Antenna Gain | : 2dBi |

4.2 Details of E.U.T.

| | |
|-----------------------|--|
| Technical Data | : DC 5.0V powered for USB Charging or Built-in battery: 3.7V |
|-----------------------|--|

4.3 Channel List

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1 | 2402 | 2 | 2403 | 3 | 2404 | 4 | 2405 |
| 5 | 2406 | 6 | 2407 | 7 | 2408 | 8 | 2409 |
| 9 | 2410 | 10 | 2411 | 11 | 2412 | 12 | 2413 |
| 13 | 2414 | 14 | 2415 | 15 | 2416 | 16 | 2417 |
| 17 | 2418 | 18 | 2419 | 19 | 2420 | 20 | 2421 |
| 21 | 2422 | 22 | 2423 | 23 | 2424 | 24 | 2425 |
| 25 | 2426 | 26 | 2427 | 27 | 2428 | 28 | 2429 |
| 29 | 2430 | 30 | 2431 | 31 | 2432 | 32 | 2433 |
| 33 | 2434 | 34 | 2435 | 35 | 2436 | 36 | 2437 |
| 37 | 2438 | 38 | 2439 | 39 | 2440 | 40 | 2441 |
| 41 | 2442 | 42 | 2443 | 43 | 2444 | 44 | 2445 |
| 45 | 2446 | 46 | 2447 | 47 | 2448 | 48 | 2449 |
| 49 | 2450 | 50 | 2451 | 51 | 2452 | 52 | 2453 |
| 53 | 2454 | 54 | 2455 | 55 | 2456 | 56 | 2457 |
| 57 | 2458 | 58 | 2459 | 59 | 2460 | 60 | 2461 |
| 61 | 2462 | 62 | 2463 | 63 | 2464 | 64 | 2465 |
| 65 | 2466 | 66 | 2467 | 67 | 2468 | 68 | 2469 |
| 69 | 2470 | 70 | 2471 | 71 | 2472 | 72 | 2473 |
| 73 | 2474 | 74 | 2475 | 75 | 2476 | 76 | 2477 |
| 77 | 2478 | 78 | 2479 | 79 | 2480 | - | - |

4.4 Description of Support Units

| No. | Equipment | Manufacturer | Model No. | Serial No. |
|-----|-----------|--------------|-----------|------------|
| 1. | Notebook | LENOVO | X201i | 75Y4408 |

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2012.

4.6 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

| Conducted Emissions at Mains Terminals Disturbance Voltage | | | | | | |
|--|----------------------------|----------------------|-------------|-----------------|-----------------------|----------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMI Test Receiver | R&S | ESCI | 101155 | Sep.18,2013 | Sep.17,2014 |
| 2. | LISN | SCHWARZBECK | NSLK 8128 | 8128-289 | Sep.18,2013 | Sep.17,2014 |
| 3. | Limiter | York | MTS-IMP-136 | 261115-001-0024 | Sep.18,2013 | Sep.17,2014 |
| 4. | Cable | LARGE | RF300 | - | Sep.18,2013 | Sep.17,2014 |
| 3m Semi-anechoic Chamber for Radiation | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1 | EMC Analyzer | Agilent | E7405A | MY45114943 | Sep.18,2013 | Sep.17,2014 |
| 2 | Active Loop Antenna | Beijing Dazhi | ZN30900A | - | Sep.18,2013 | Sep.17,2014 |
| 3 | Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 336 | Apr.20,2013 | Apr.19,2014 |
| 4 | Coaxial Cable (below 1GHz) | Top | TYPE16(13M) | - | Sep.18,2013 | Sep.17,2014 |
| 5 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9120 D | 667 | Apr.20,2013 | Apr.19,2014 |
| 6 | Broadband Preamplifier | COMPLIANCE DIRECTION | PAP-1G18 | 2004 | Apr.07,2013 | Apr.06,2014 |
| 7 | Coaxial Cable (above 1GHz) | Top | 25MHz-18GHz | EW02014-7 | Apr.20,2013 | Apr.19,2014 |

5.2 Measurement Uncertainty

| Parameter | Uncertainty |
|--------------------------|--|
| Radio Frequency | $\pm 1 \times 10^{-6}$ |
| Bandwidth | $\pm 1.5 \times 10^{-6}$ |
| RF Power | ± 1.0 dB |
| RF Power Density | ± 2.2 dB |
| Temperature | ± 1 °C |
| DC Source | $\pm 0.05\%$ |
| Radiated Emissions test | ± 5.03 dB (Bilog antenna 30M~1000MHz) |
| | ± 4.74 dB (Horn antenna 1000M~25000MHz) |
| Conducted Emissions test | 3.64dB (150kHz~30MHz) |

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

| | |
|-------------------|--|
| Test Requirement: | FCC CFR 47 Part 15 Section 15.207 |
| Test Method: | ANSI C63.4:2003 |
| Test Result: | PASS |
| Frequency Range: | 150kHz to 30MHz |
| Class: | Class B |
| Limit: | 66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz |
| Detector: | Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit |

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

EUT Operation:


The pre-test was performed in Bluetooth transmit mode, and the data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

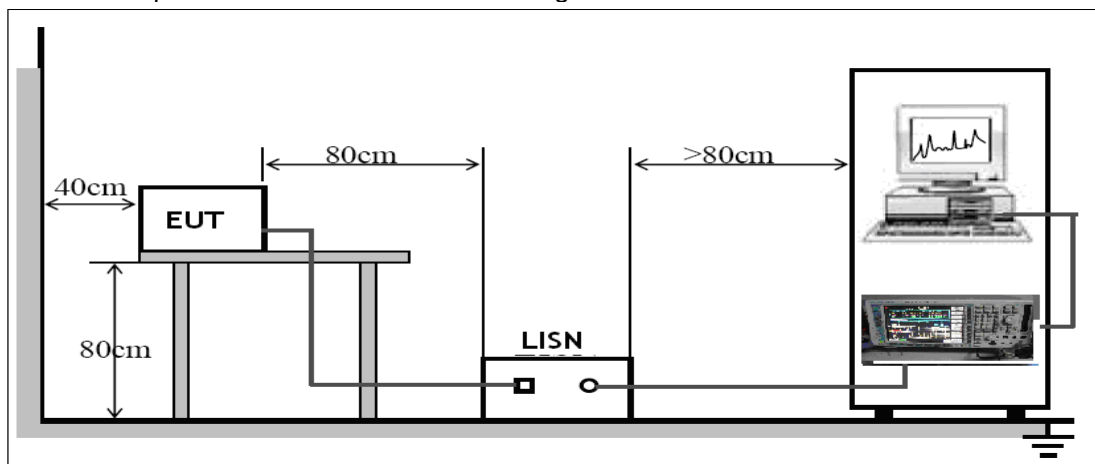


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: Bluetooth transmit mode

Live line:

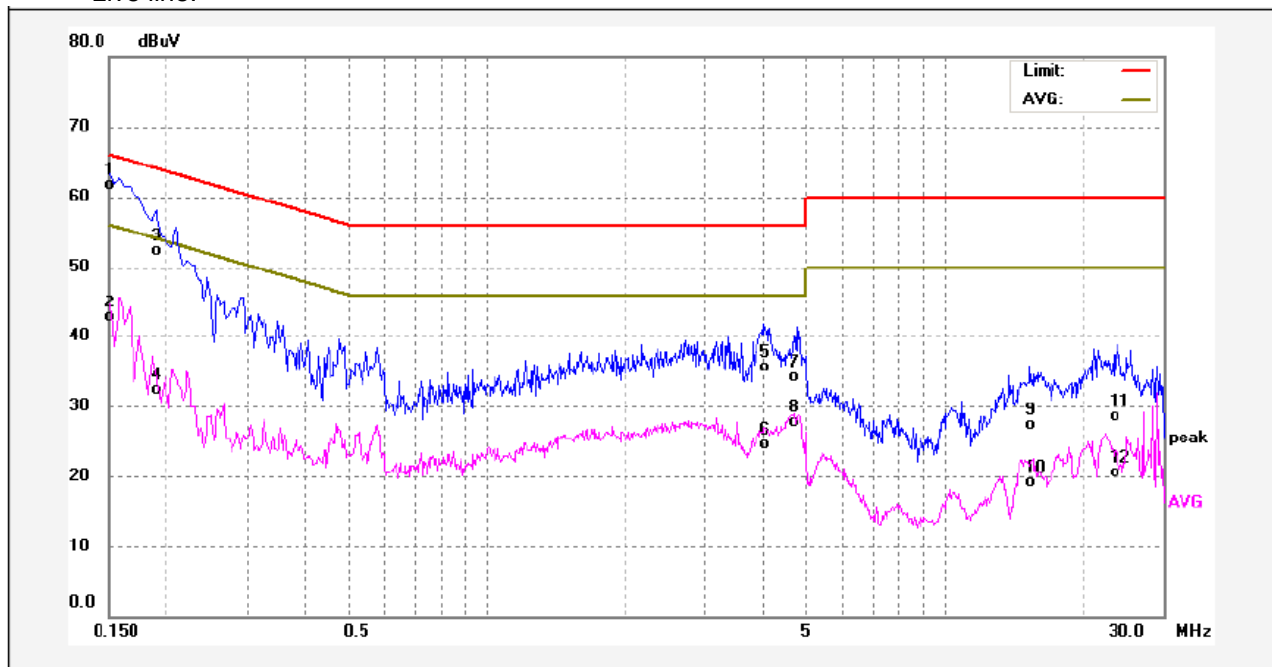

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.1500 | 50.49 | 11.17 | 61.66 | 65.99 | -4.33 | QP | |
| 2 | 0.1500 | 31.58 | 11.17 | 42.75 | 55.99 | -13.24 | AVG | |
| 3 | 0.1914 | 41.08 | 11.28 | 52.36 | 63.97 | -11.61 | QP | |
| 4 | 0.1914 | 21.02 | 11.28 | 32.30 | 53.97 | -21.67 | AVG | |
| 5 | 4.0220 | 24.28 | 11.23 | 35.51 | 56.00 | -20.49 | QP | |
| 6 | 4.0220 | 13.37 | 11.23 | 24.60 | 46.00 | -21.40 | AVG | |
| 7 | 4.7540 | 22.90 | 11.24 | 34.14 | 56.00 | -21.86 | QP | |
| 8 | 4.7540 | 16.56 | 11.24 | 27.80 | 46.00 | -18.20 | AVG | |
| 9 | 15.3140 | 15.81 | 11.46 | 27.27 | 60.00 | -32.73 | QP | |
| 10 | 15.3140 | 7.55 | 11.46 | 19.01 | 50.00 | -30.99 | AVG | |
| 11 | 23.6420 | 16.94 | 11.55 | 28.49 | 60.00 | -31.51 | QP | |
| 12 | 23.6420 | 8.98 | 11.55 | 20.53 | 50.00 | -29.47 | AVG | |

Neutral line:

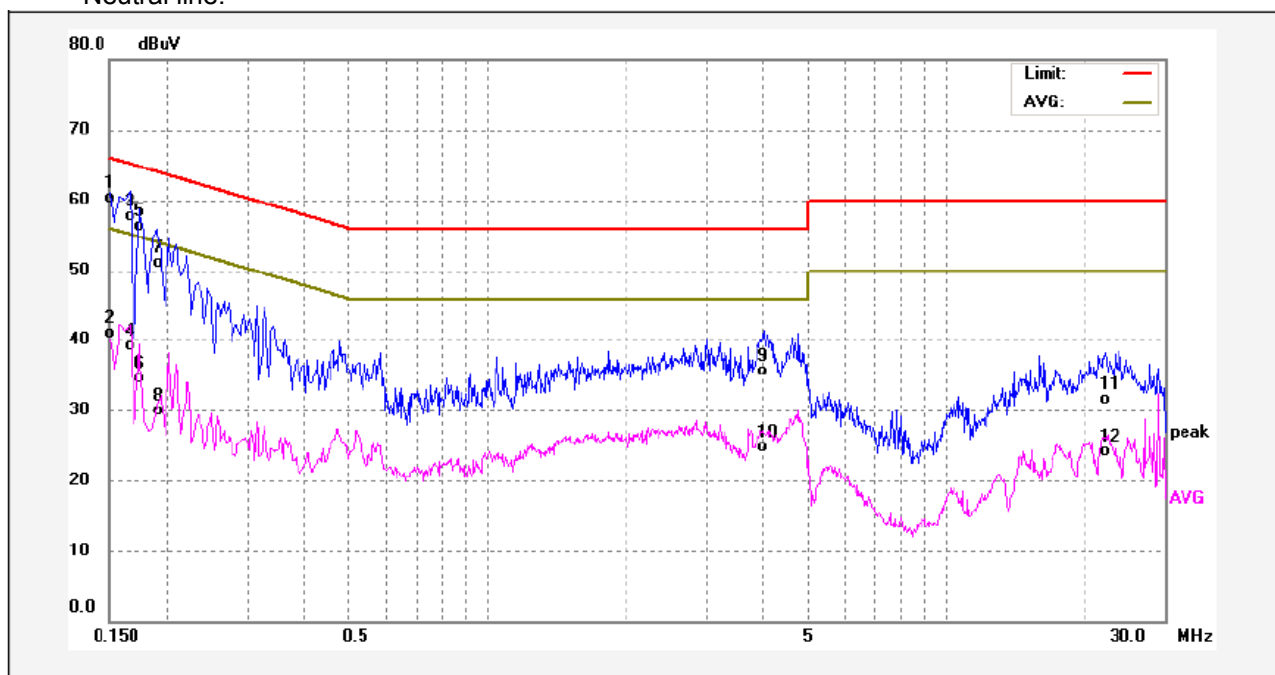

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1 | 0.1500 | 49.07 | 11.17 | 60.24 | 65.99 | -5.75 | QP | |
| 2 | 0.1500 | 29.67 | 11.17 | 40.84 | 55.99 | -15.15 | AVG | |
| 3 | 0.1660 | 46.55 | 11.21 | 57.76 | 65.15 | -7.39 | QP | |
| 4 | 0.1660 | 27.98 | 11.21 | 39.19 | 55.15 | -15.96 | AVG | |
| 5 | 0.1740 | 44.99 | 11.23 | 56.22 | 64.76 | -8.54 | QP | |
| 6 | 0.1740 | 23.28 | 11.23 | 34.51 | 54.76 | -20.25 | AVG | |
| 7 | 0.1900 | 39.82 | 11.27 | 51.09 | 64.03 | -12.94 | QP | |
| 8 | 0.1900 | 18.67 | 11.27 | 29.94 | 54.03 | -24.09 | AVG | |
| 9 | 4.0260 | 24.22 | 11.23 | 35.45 | 56.00 | -20.55 | QP | |
| 10 | 4.0260 | 13.50 | 11.23 | 24.73 | 46.00 | -21.27 | AVG | |
| 11 | 22.1940 | 19.92 | 11.53 | 31.45 | 60.00 | -28.55 | QP | |
| 12 | 22.1940 | 12.60 | 11.53 | 24.13 | 50.00 | -25.87 | AVG | |

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|--------------------|-----------------------|-----------------|---|---------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | $2400/F(\text{kHz})$ | 300 | $10000 * 2400/F(\text{kHz})$ | $20\log^{(2400/F(\text{kHz}))} + 80$ |
| 0.490 ~ 1.705 | $24000/F(\text{kHz})$ | 30 | $100 * 24000/F(\text{kHz})$ | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30 | 30 | 30 | $100 * 30$ | $20\log^{(30)} + 40$ |
| 30 ~ 88 | 100 | 3 | 100 | $20\log^{(100)}$ |
| 88 ~ 216 | 150 | 3 | 150 | $20\log^{(150)}$ |
| 216 ~ 960 | 200 | 3 | 200 | $20\log^{(200)}$ |
| Above 960 | 500 | 3 | 500 | $20\log^{(500)}$ |

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1010 mbar


Operation Mode:

The EUT was tested in transmitting mode, and the data were shown as follow.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

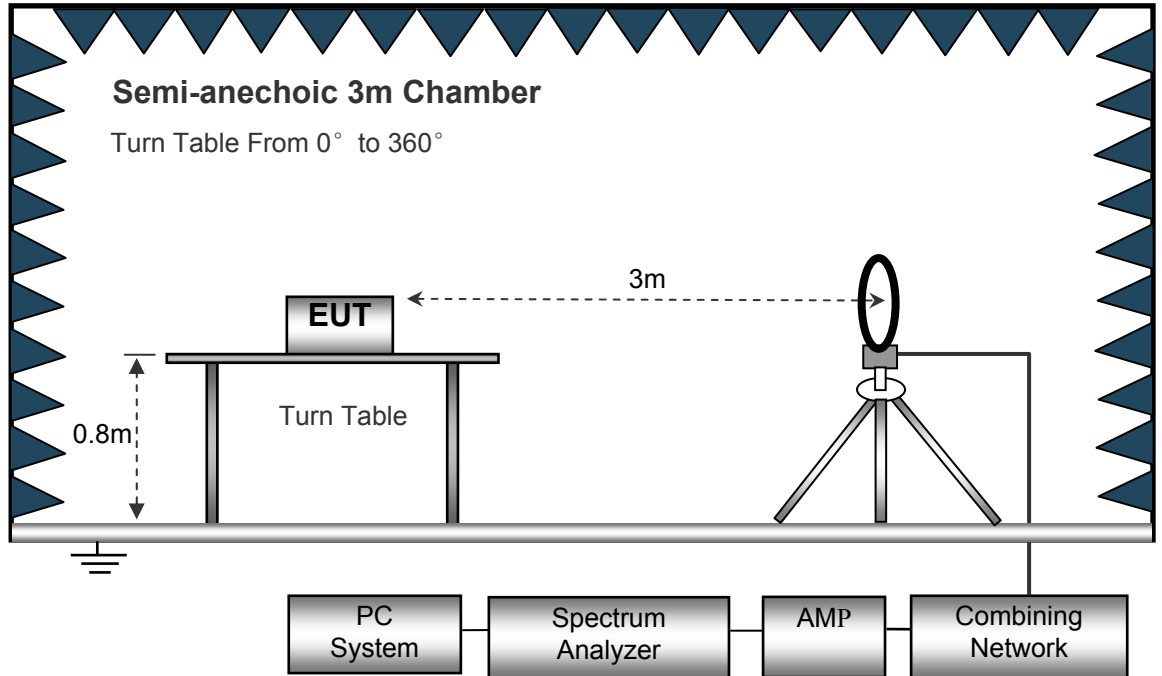

The test setup for emission measurement from 30 MHz to 1 GHz.

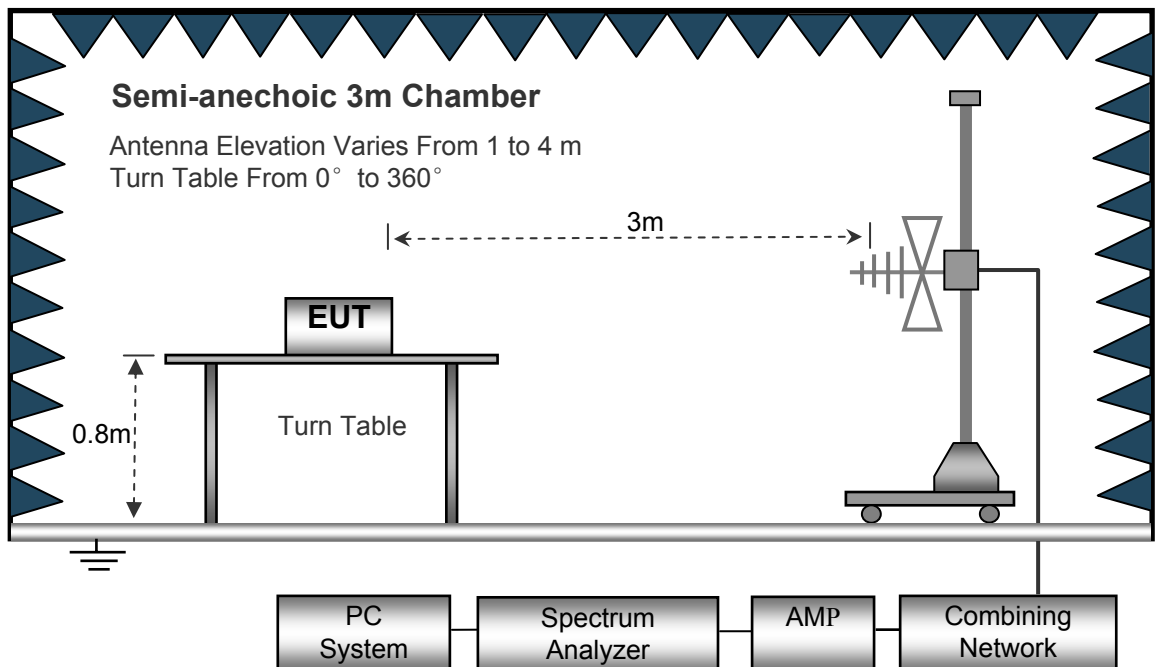

The test setup for emission measurement above 1 GHz.

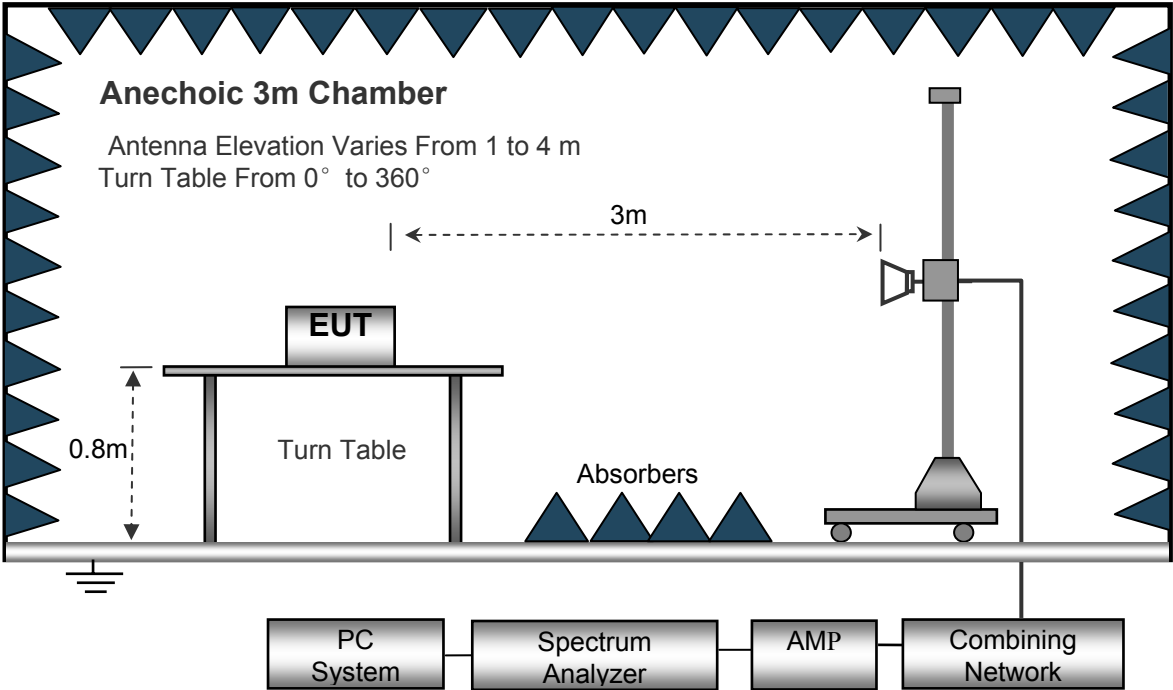

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9kHz to 25000MHz.

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Test mode: transmitting

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|----------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK Lower Channel 2402MHz | | | | | | | | | |
| 95.90 | 19.13 | PK | 224 | 1.8 | H | 13.39 | 32.52 | 40.00 | -7.48 |
| 95.90 | 20.56 | PK | 288 | 2.0 | V | 13.39 | 33.95 | 40.00 | -6.05 |
| 4804.00 | 53.22 | PK | 131 | 1.1 | H | -1.06 | 52.16 | 74.00 | -21.84 |
| 4804.00 | 44.75 | Ave | 131 | 1.1 | V | -1.06 | 43.69 | 54.00 | -10.31 |
| 7206.00 | 43.97 | PK | 322 | 1.5 | H | 1.33 | 45.30 | 74.00 | -28.70 |
| 7206.00 | 39.88 | Ave | 322 | 1.5 | V | 1.33 | 41.21 | 54.00 | -12.79 |
| 2310.03 | 46.51 | PK | 210 | 1.1 | H | -13.19 | 33.32 | 74.00 | -40.68 |
| 2310.03 | 37.70 | Ave | 210 | 1.1 | V | -13.19 | 24.51 | 54.00 | -29.49 |
| 2372.49 | 42.75 | PK | 118 | 1.8 | H | -13.14 | 29.61 | 74.00 | -44.39 |
| 2372.49 | 38.63 | Ave | 118 | 1.8 | V | -13.14 | 25.49 | 54.00 | -28.51 |
| 2484.52 | 44.93 | PK | 216 | 1.3 | H | -13.08 | 31.85 | 74.00 | -42.15 |
| 2484.52 | 38.80 | Ave | 216 | 1.3 | V | -13.08 | 25.72 | 54.00 | -28.28 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|------------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK Center Channel 2441MHz | | | | | | | | | |
| 95.90 | 19.47 | PK | 37 | 1.6 | H | 13.39 | 32.86 | 40.00 | -7.14 |
| 95.90 | 20.49 | PK | 351 | 1.0 | V | 13.39 | 33.88 | 40.00 | -6.12 |
| 4882.00 | 50.11 | PK | 3 | 1.2 | H | -0.62 | 49.49 | 74.00 | -24.51 |
| 4882.00 | 45.32 | Ave | 3 | 1.2 | V | -0.62 | 44.70 | 54.00 | -9.30 |
| 7323.00 | 47.77 | PK | 131 | 1.2 | H | 2.21 | 49.98 | 74.00 | -24.02 |
| 7323.00 | 40.81 | Ave | 131 | 1.2 | V | 2.21 | 43.02 | 54.00 | -10.98 |
| 2310.94 | 45.05 | PK | 8 | 1.3 | H | -13.19 | 31.86 | 74.00 | -42.14 |
| 2310.94 | 39.03 | Ave | 8 | 1.3 | V | -13.19 | 25.84 | 54.00 | -28.16 |
| 2387.89 | 42.66 | PK | 267 | 1.4 | H | -13.14 | 29.52 | 74.00 | -44.48 |
| 2387.89 | 37.16 | Ave | 267 | 1.4 | V | -13.14 | 24.02 | 54.00 | -29.98 |
| 2499.25 | 44.44 | PK | 218 | 1.5 | H | -13.08 | 31.36 | 74.00 | -42.64 |
| 2499.25 | 38.00 | Ave | 218 | 1.5 | V | -13.08 | 24.92 | 54.00 | -29.08 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | FCC Part 15.247/209/205 | |
|-----------------------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|-------------------------|--------|
| | | | | Height | Polar | | | Limit | Margin |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK Upper Channel 2480MHz | | | | | | | | | |
| 95.90 | 20.01 | PK | 83 | 1.8 | H | 13.39 | 33.40 | 40.00 | -6.60 |
| 95.90 | 20.36 | PK | 46 | 1.7 | V | 13.39 | 33.75 | 40.00 | -6.25 |
| 4960.00 | 51.79 | PK | 336 | 1.5 | H | -0.24 | 51.55 | 74.00 | -22.45 |
| 4960.00 | 46.13 | Ave | 336 | 1.5 | V | -0.24 | 45.89 | 54.00 | -8.11 |
| 7440.00 | 47.23 | PK | 210 | 1.8 | H | 2.84 | 50.07 | 74.00 | -23.93 |
| 7440.00 | 40.49 | Ave | 210 | 1.8 | V | 2.84 | 43.33 | 54.00 | -10.67 |
| 2312.06 | 45.65 | PK | 84 | 1.5 | H | -13.19 | 32.46 | 74.00 | -41.54 |
| 2312.06 | 37.03 | Ave | 84 | 1.5 | V | -13.19 | 23.84 | 54.00 | -30.16 |
| 2359.65 | 43.63 | PK | 175 | 1.3 | H | -13.14 | 30.49 | 74.00 | -43.51 |
| 2359.65 | 36.51 | Ave | 175 | 1.3 | V | -13.14 | 23.37 | 54.00 | -30.63 |
| 2486.05 | 43.60 | PK | 254 | 2.0 | H | -13.08 | 30.52 | 74.00 | -43.48 |
| 2486.05 | 38.24 | Ave | 254 | 2.0 | V | -13.08 | 25.16 | 54.00 | -28.84 |

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported.

8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz. Sweep = auto.
4. mark the worst point and record.

8.2 Test Result

Test Frequency: Below 30MHz



Remark: For emissions below 30MHz, no emission higher than background level, so the data does not show in the report.

Test Frequency: 30MHz ~ 25GHz



Remark: All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

Modulation:GFSK



Lower Channel

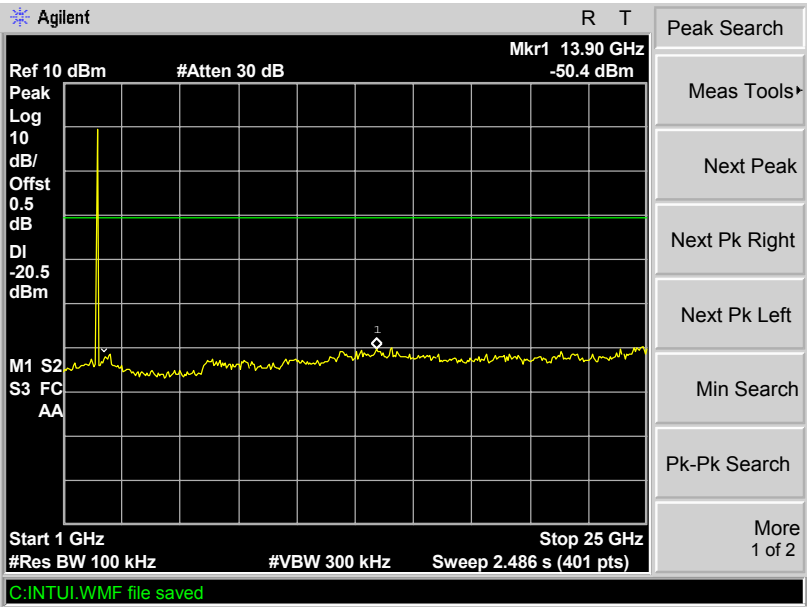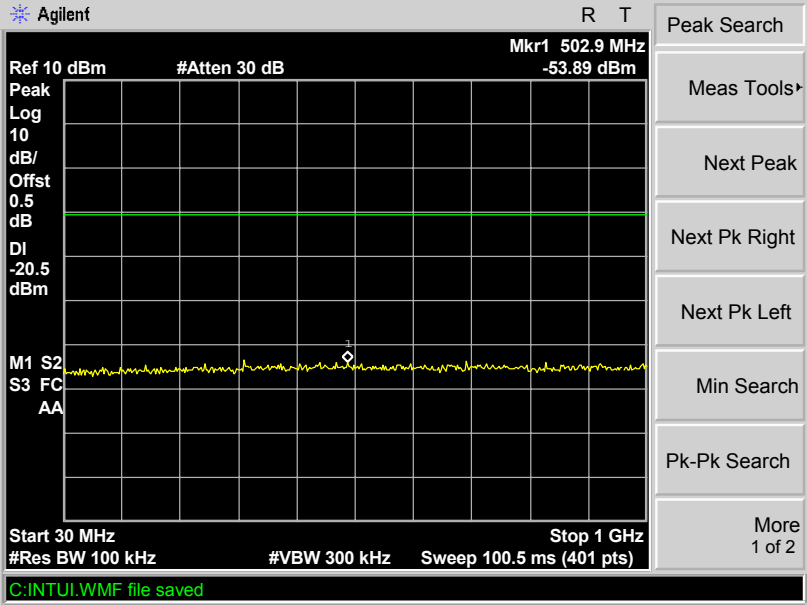

Middle Channel

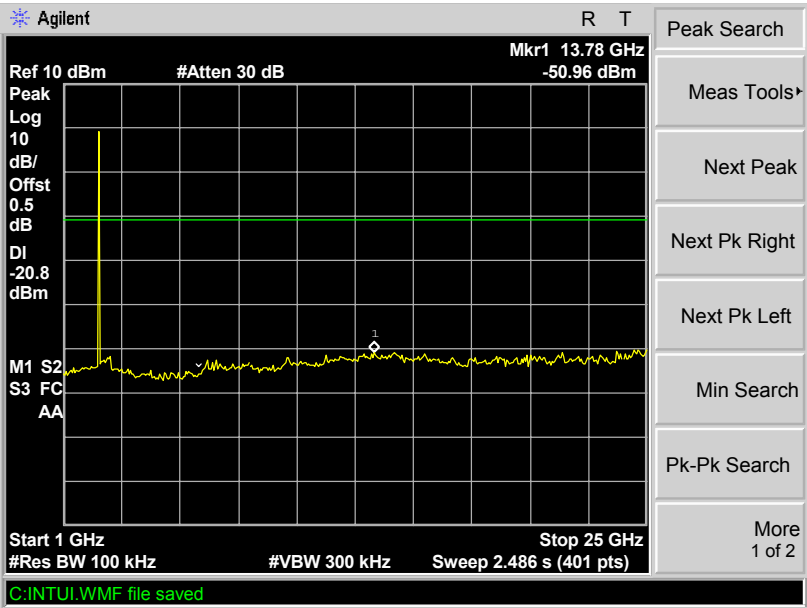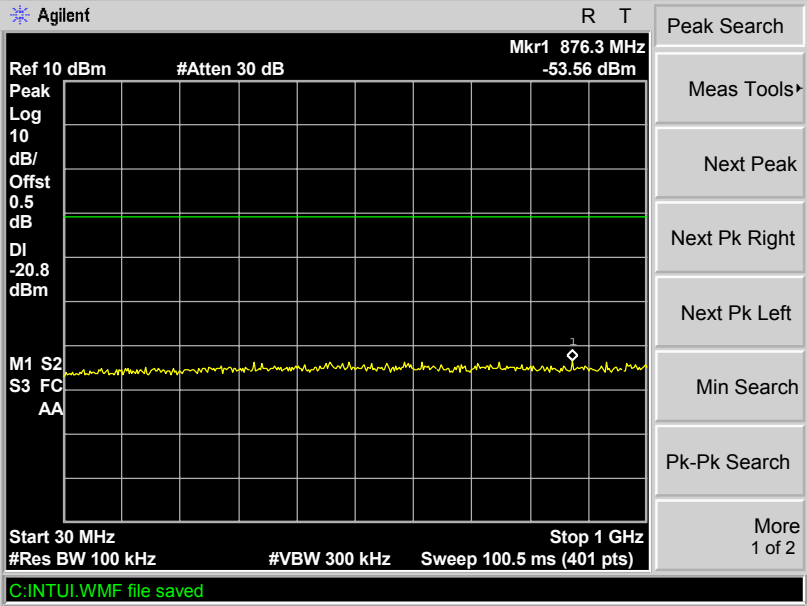

Upper Channel

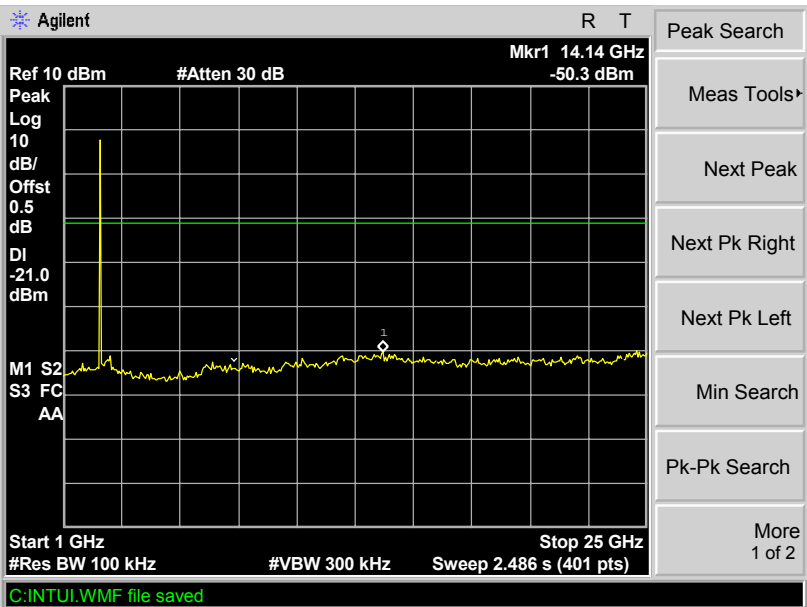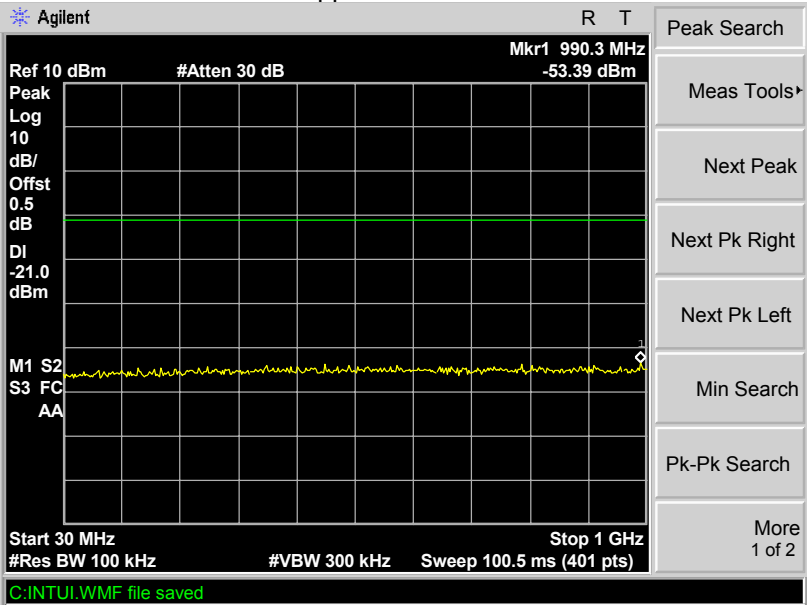

9 Band Edge Measurement



| | |
|-------------------|---|
| Test Requirement: | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). |
| Test Method: | DA 00-705 |
| Limit: | 40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz |



9.1 Test Procedure



1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
 - For Peak value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW \geq RBW; Sweep = auto
Detector function = peak
Trace = max hold
 - For AVG value:
RBW = 1 MHz for $f \geq 1$ GHz
VBW = 10Hz; Sweep = auto
Detector function = AVG
Trace = max hold
4. continuous transmitting

9.2 Test Result:

Test result plots shown as follows:

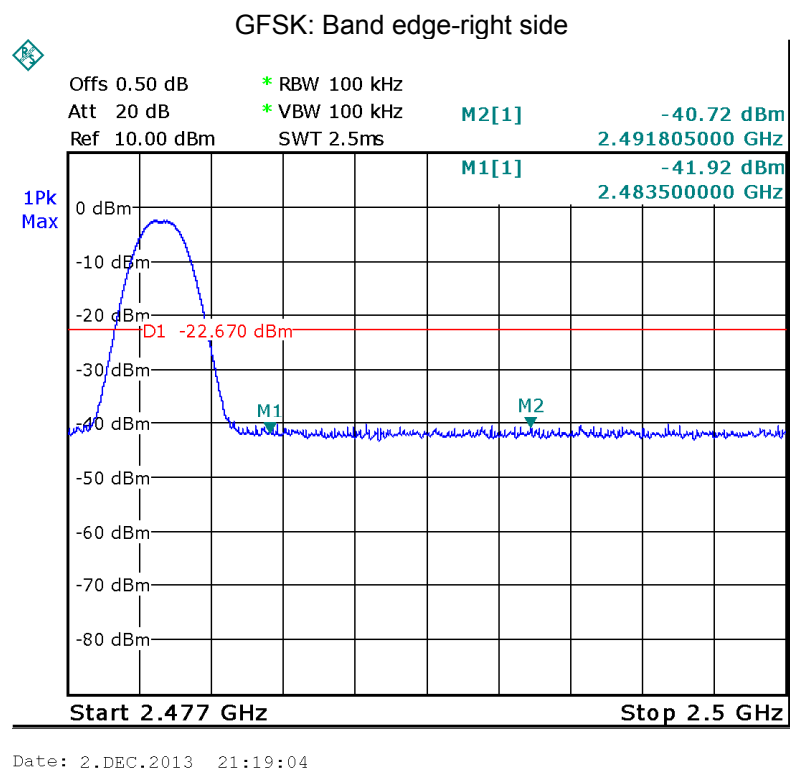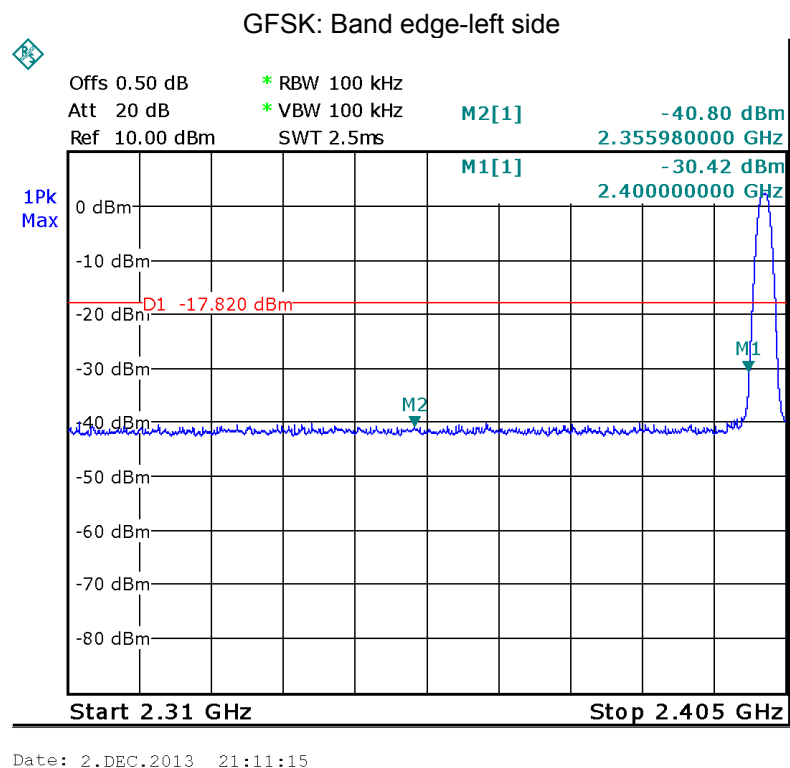

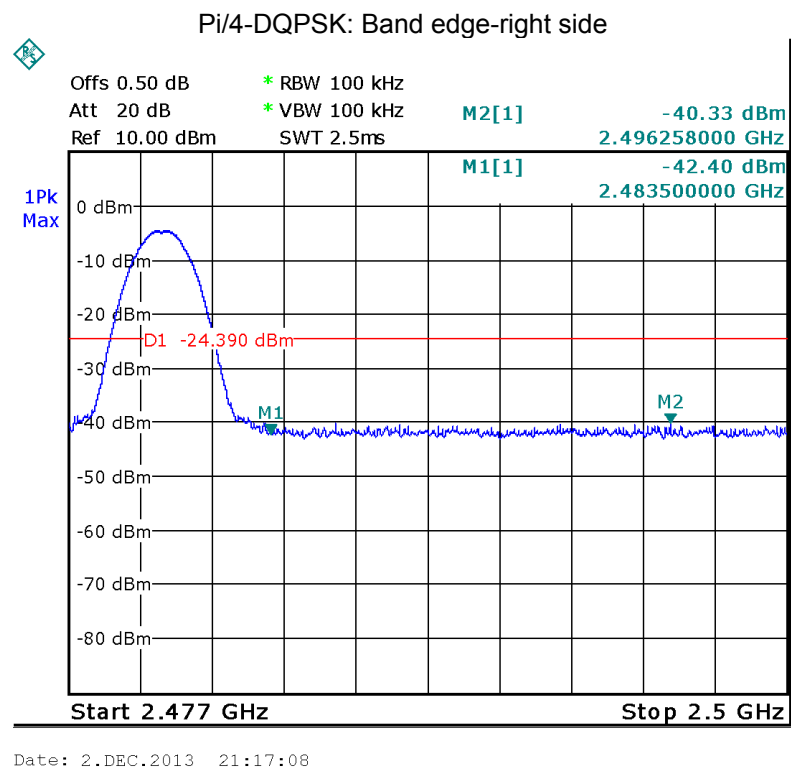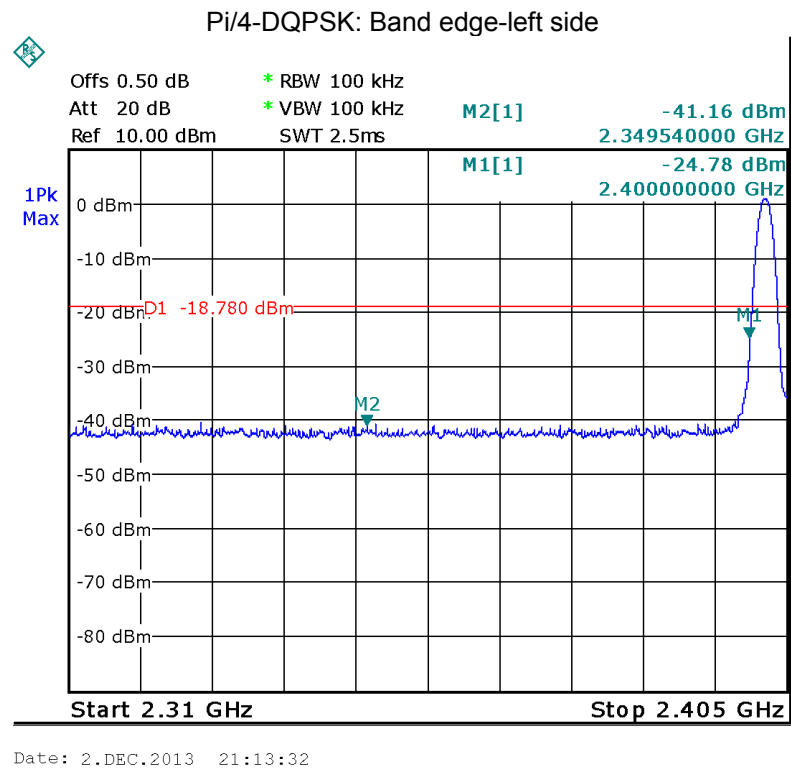

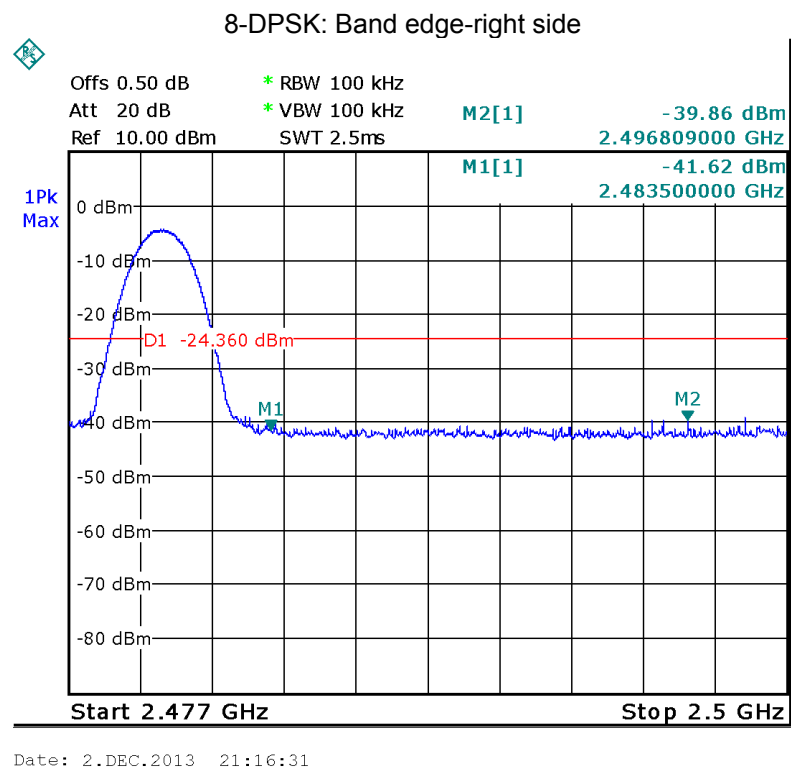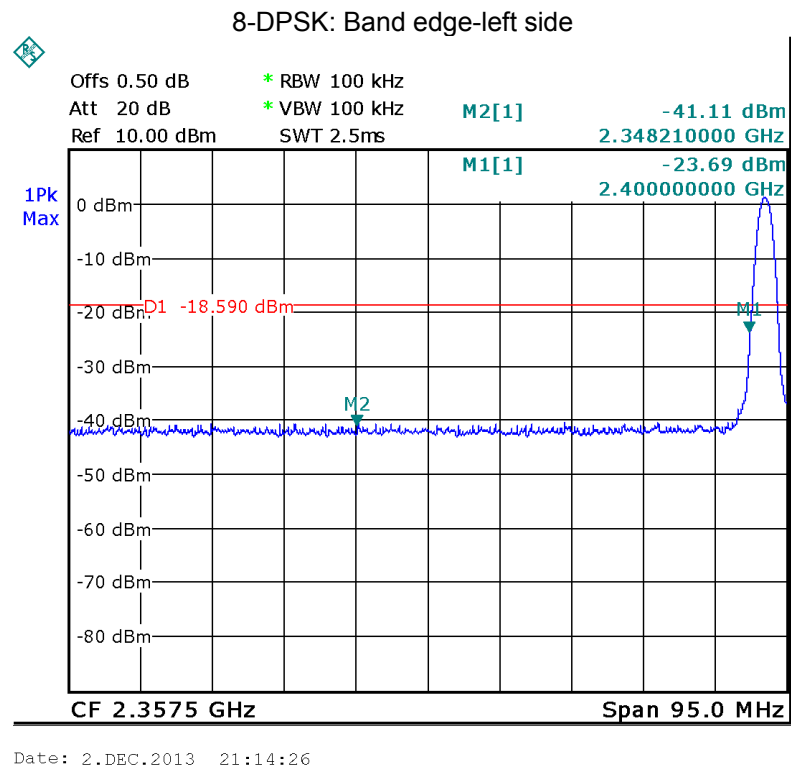

10 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz


10.2 Test Result:

| Modulation | Test Channel | Bandwidth(MHz) |
|------------|--------------|----------------|
| GFSK | Lower | 0.870 |
| | Middle | 0.828 |
| | Upper | 0.876 |
| Pi/4DQPSK | Lower | 1.260 |
| | Middle | 1.254 |
| | Upper | 1.206 |
| 8DPSK | Lower | 1.224 |
| | Middle | 1.230 |
| | Upper | 1.230 |

Test result plot as follows:


Modulation:GFSK

Lower Channel

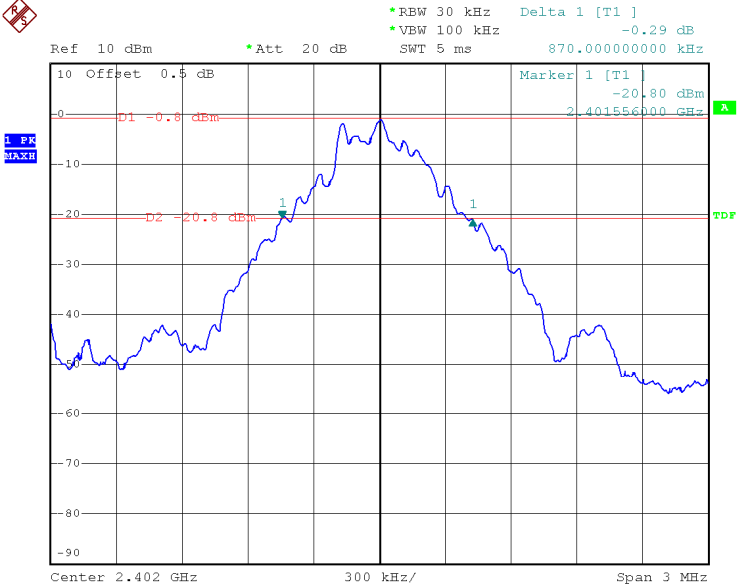


1
Date: 2.DEC.2013 10:34:00


Middle Channel

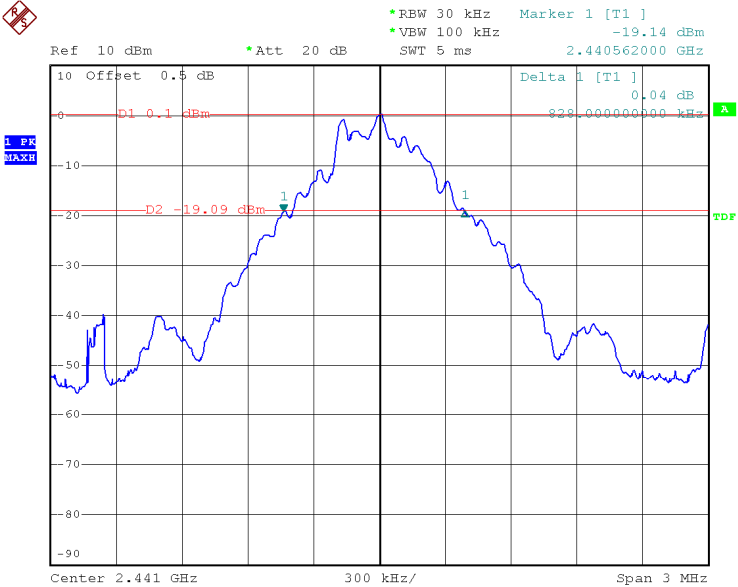


1
Date: 2.DEC.2013 10:37:20

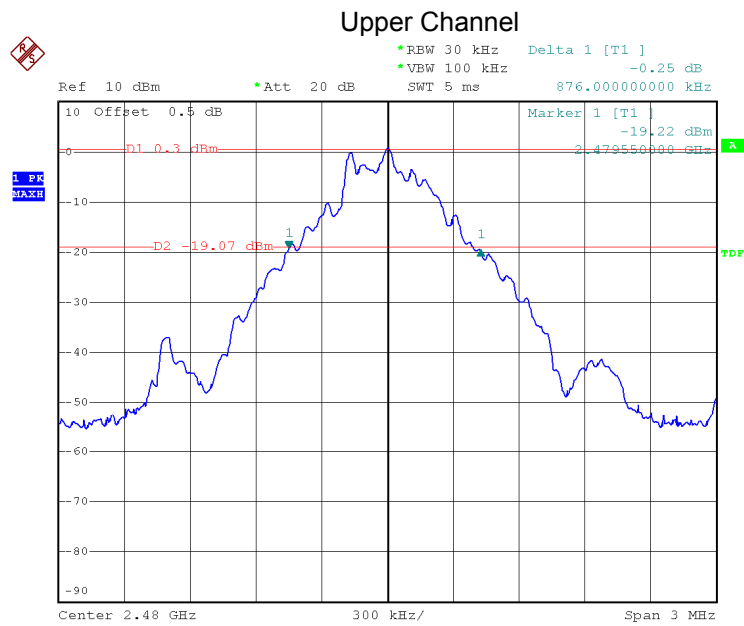


1
Date: 2.DEC.2013 10:40:20

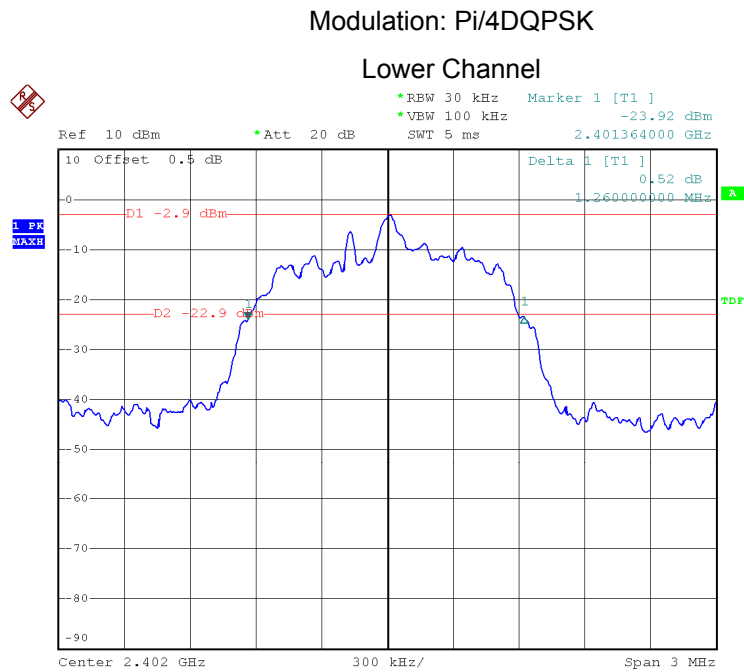

1
Date: 2.DEC.2013 10:47:27

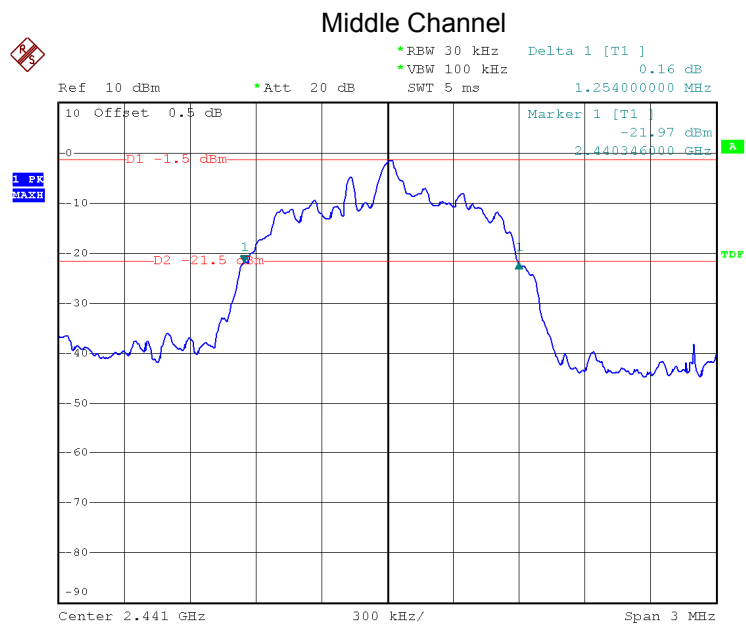


1
Date: 2.DEC.2013 10:45:25

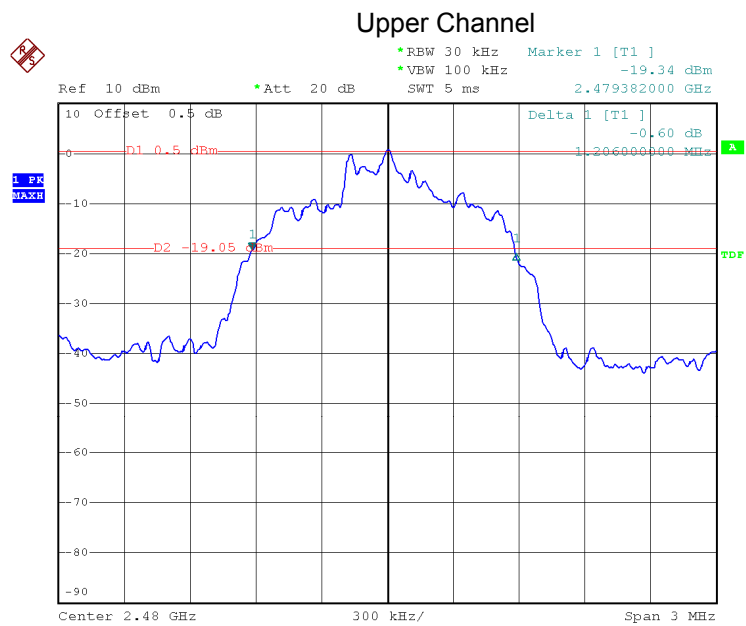

1
Date: 2.DEC.2013 10:42:23

Modulation: 8DPSK


Lower Channel

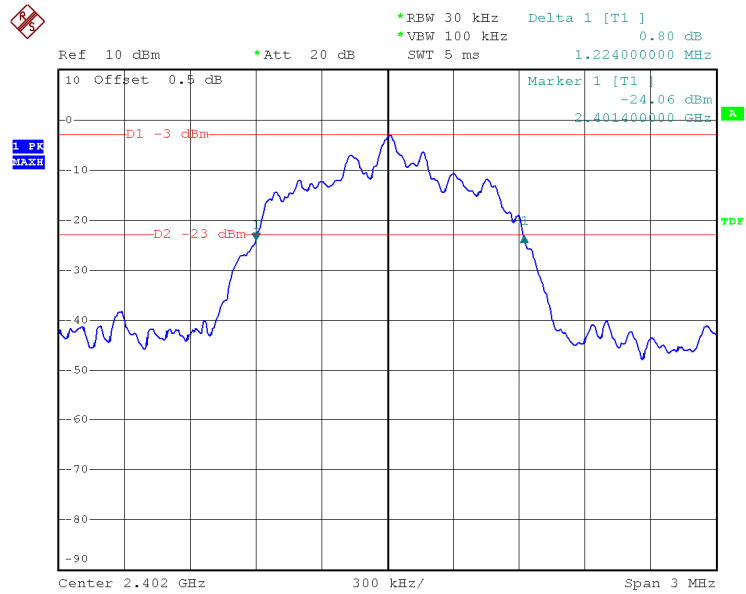

1


Date: 2.DEC.2013 10:49:47

Middle Channel

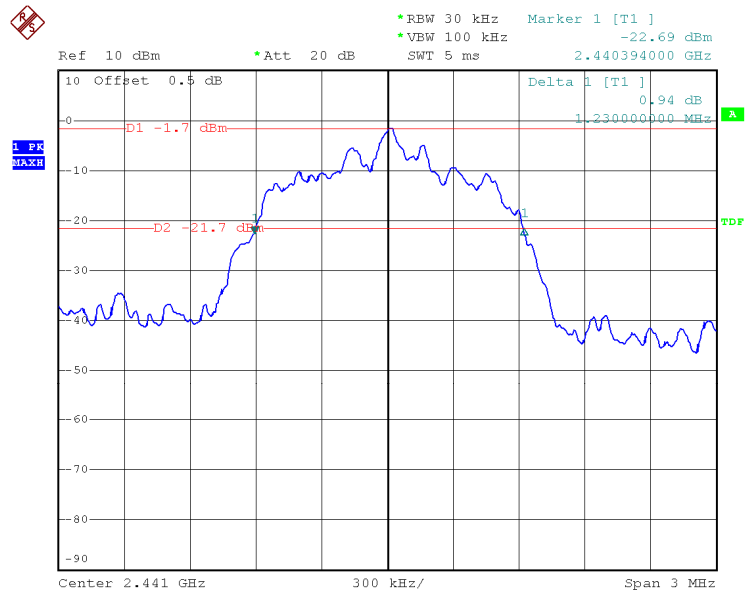

1

Date: 2.DEC.2013 10:51:16

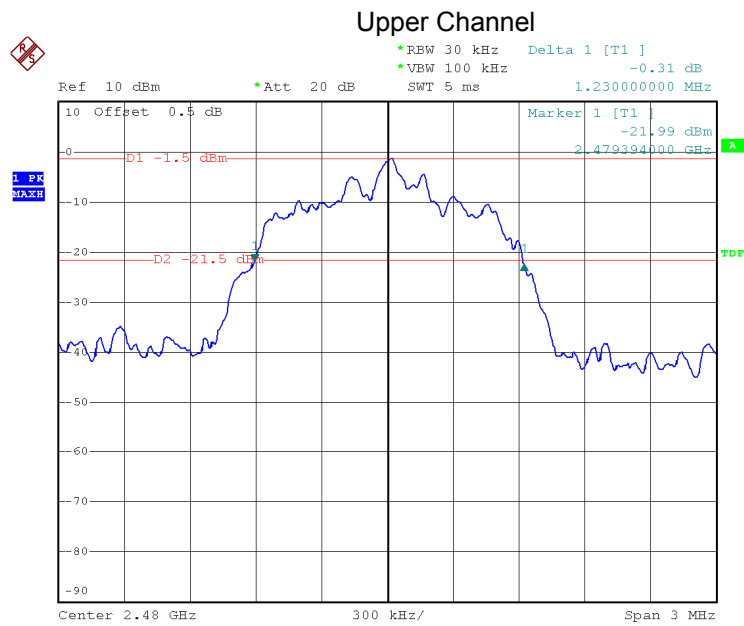

1

Date: 2.DEC.2013 10:52:29

11 Maximum Peak Output Power

| | |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies. |
| Test mode: | Test in fixing frequency transmitting mode. |

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


11.2 Test Result:

| Modulation | Test Channel | Output Power (dBm) | Limit (dBm) |
|------------|--------------|--------------------|-------------|
| GFSK | Lower | -0.69 | 30 |
| | Middle | 0.96 | 30 |
| | Upper | 1.49 | 30 |
| Pi/4DQPSK | Lower | -1.73 | 30 |
| | Middle | 0.17 | 30 |
| | Upper | 0.62 | 30 |
| 8DPSK | Lower | -1.22 | 30 |
| | Middle | 0.61 | 30 |
| | Upper | 0.85 | 30 |

Test result plot as follows:


Modulation:GFSK

Lower Channel

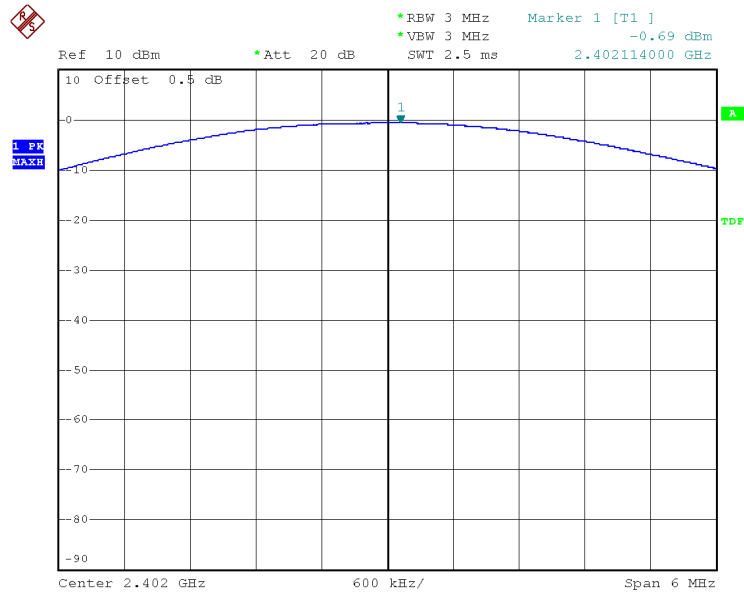


1
Date: 2.DEC.2013 14:03:50

Middle Channel

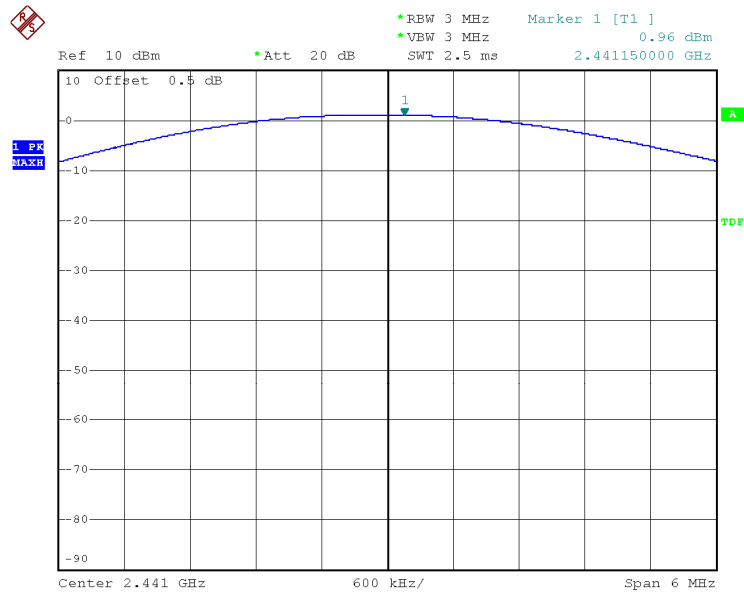


1
Date: 2.DEC.2013 14:05:14

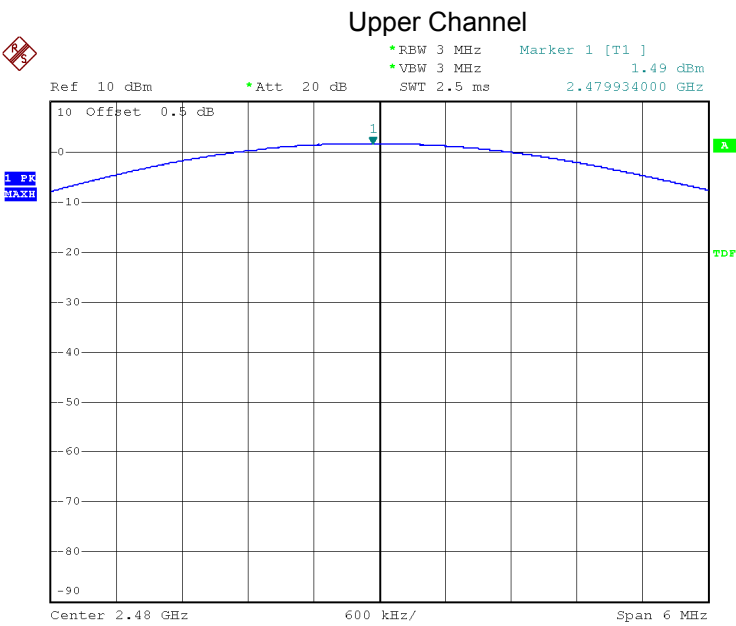


1
Date: 2.DEC.2013 14:06:05


Modulation: Pi/4DQPSK

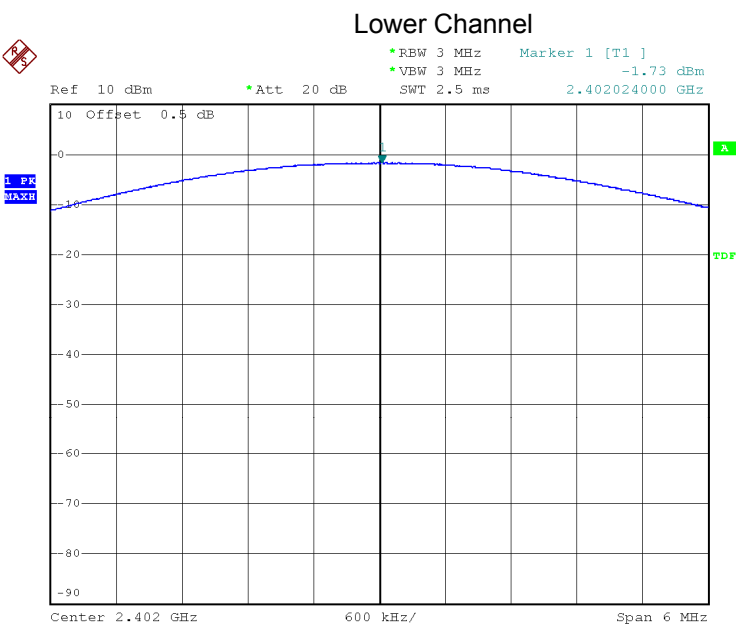

1
Date: 2.DEC.2013 14:09:45

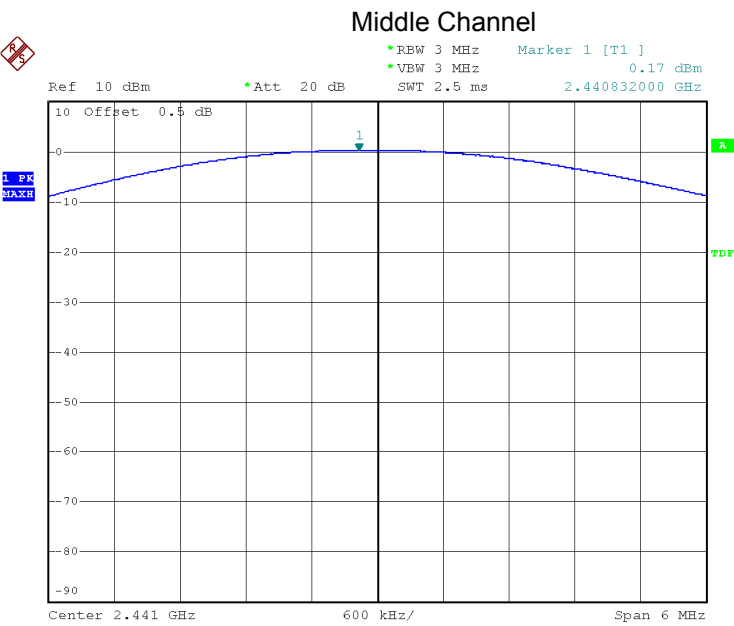


1
Date: 2.DEC.2013 14:10:32

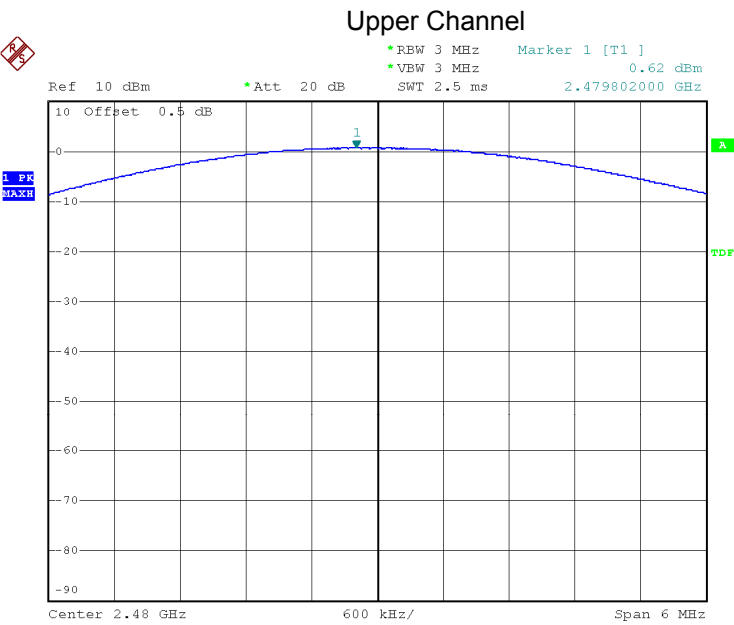

1
Date: 2.DEC.2013 14:11:09

Modulation: 8DPSK


Lower Channel

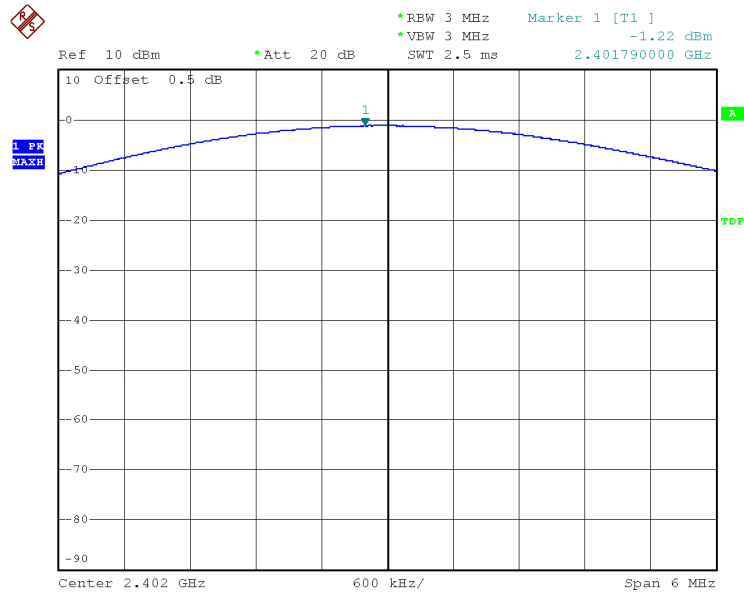

1


Date: 2.DEC.2013 14:24:24

Middle Channel

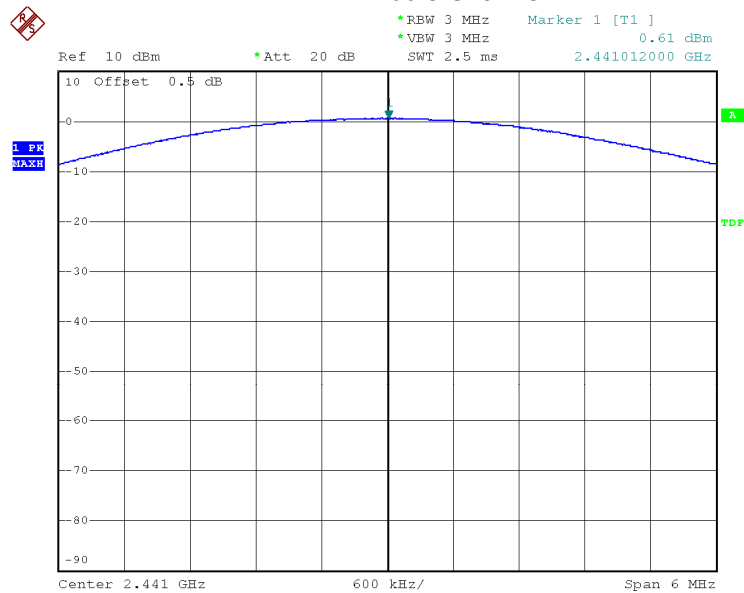

1

Date: 2.DEC.2013 14:26:31

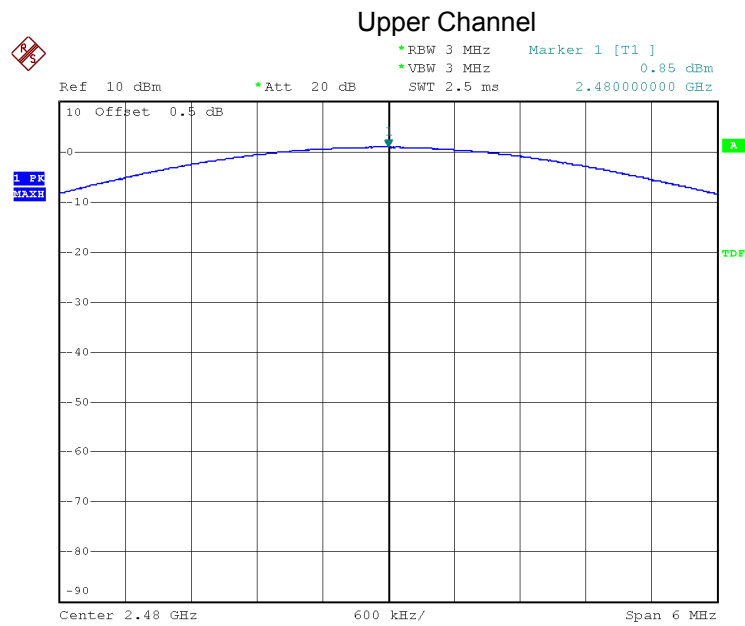

1

Date: 2.DEC.2013 14:27:15

12 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


12.2 Test Result:

| Modulation | Test Channel | Separation (MHz) |
|------------|--------------|------------------|
| GFSK | Lower | 1.005 |
| | Middle | 1.002 |
| | Upper | 1.002 |
| Pi/4DQPSK | Lower | 1.005 |
| | Middle | 1.002 |
| | Upper | 1.005 |
| 8DPSK | Lower | 1.005 |
| | Middle | 1.002 |
| | Upper | 1.002 |

Test result plot as follows:

Modulation:GFSK


Lower Channel

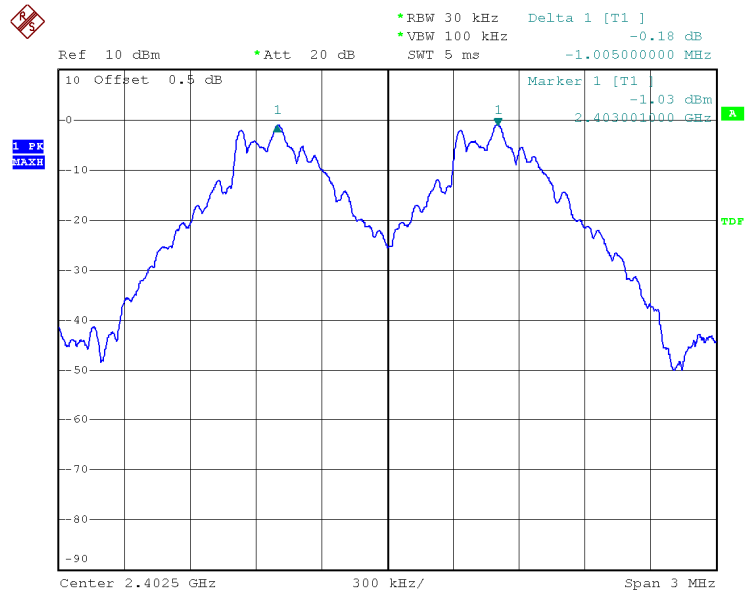

1

Date: 2.DEC.2013 13:17:07


Middle Channel

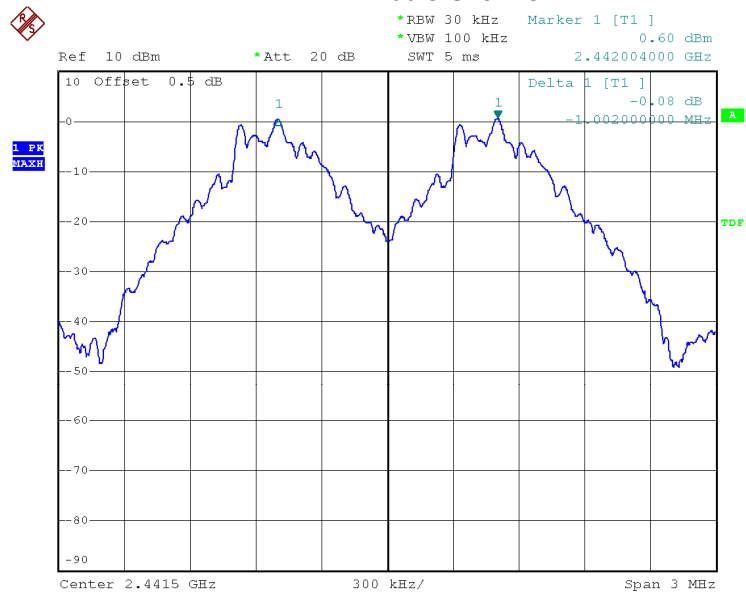

1

Date: 2.DEC.2013 13:20:34


Upper Channel

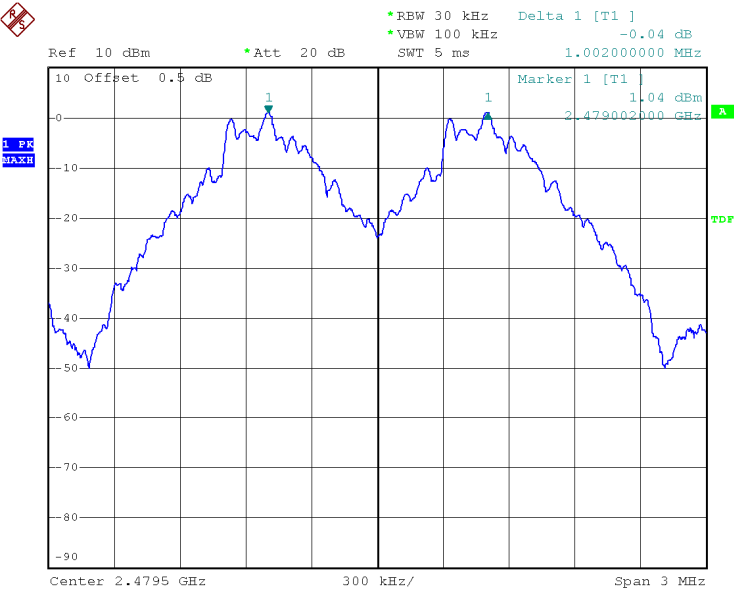


1
Date: 2.DEC.2013 13:22:04

Modulation: Pi/4DQPSK

Lower Channel

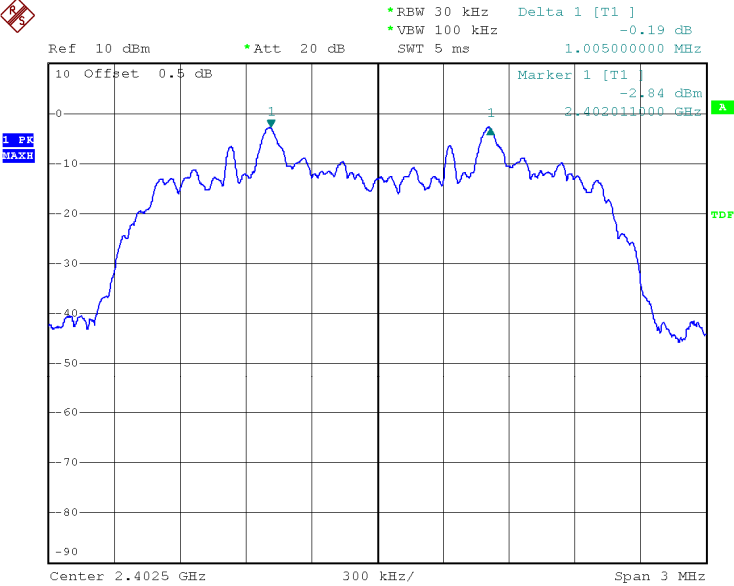


1
Date: 2.DEC.2013 13:27:18

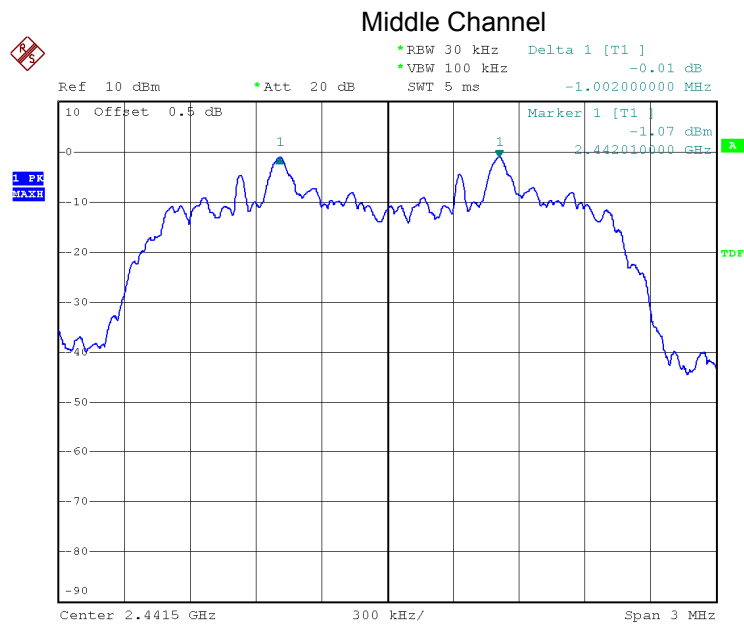

1

Date: 2.DEC.2013 13:30:10

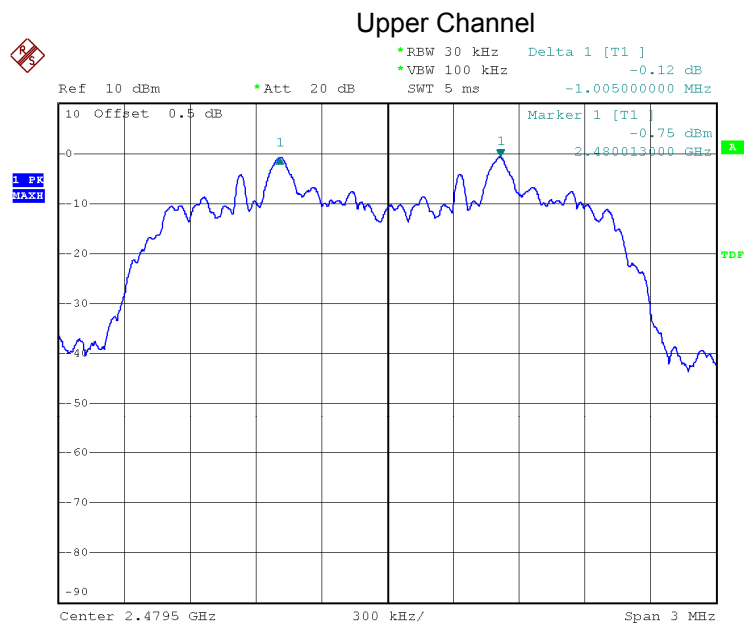


1

Date: 2.DEC.2013 13:38:15

Modulation: 8DPSK

Lower Channel

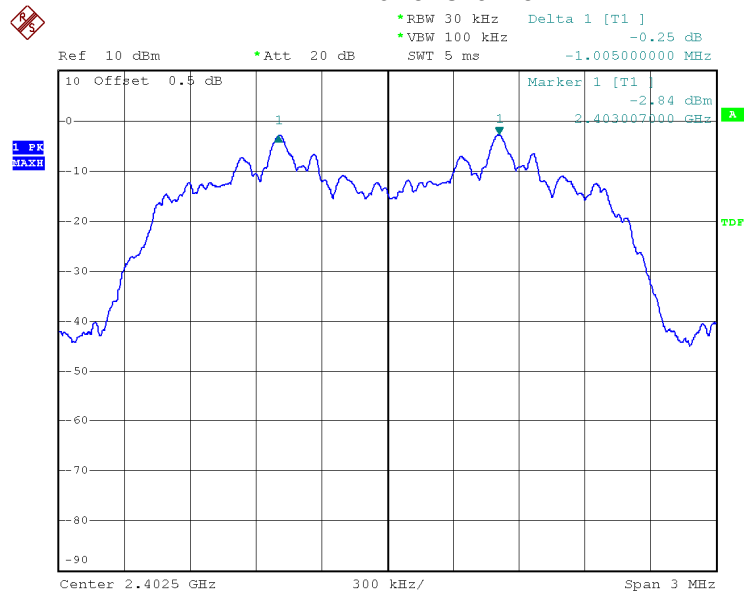

1


Date: 2.DEC.2013 13:55:52

Middle Channel



1

Date: 2.DEC.2013 13:58:32

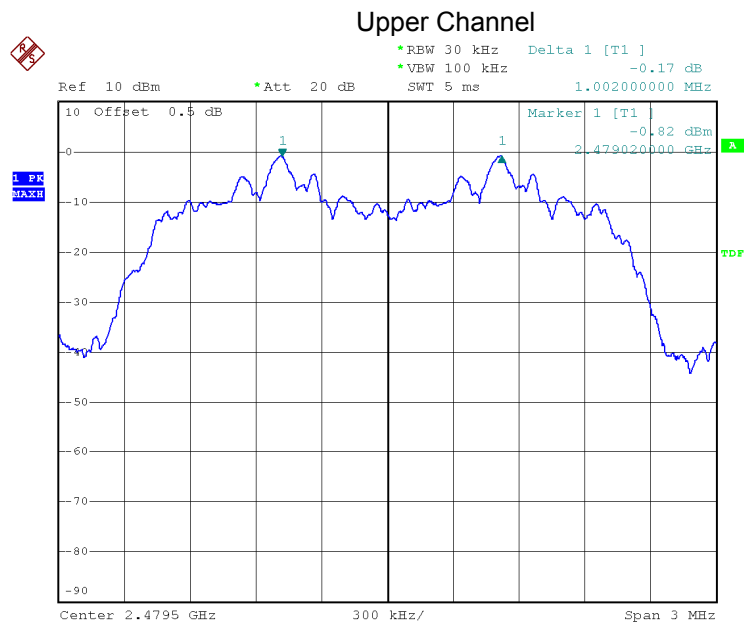

1
Date: 2.DEC.2013 14:00:49

13 Number of Hopping Frequency

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

DA 00-705

Test Limit:

Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Mode:


Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;


13.2 Test Result:

Total Channels are 79 Channels.

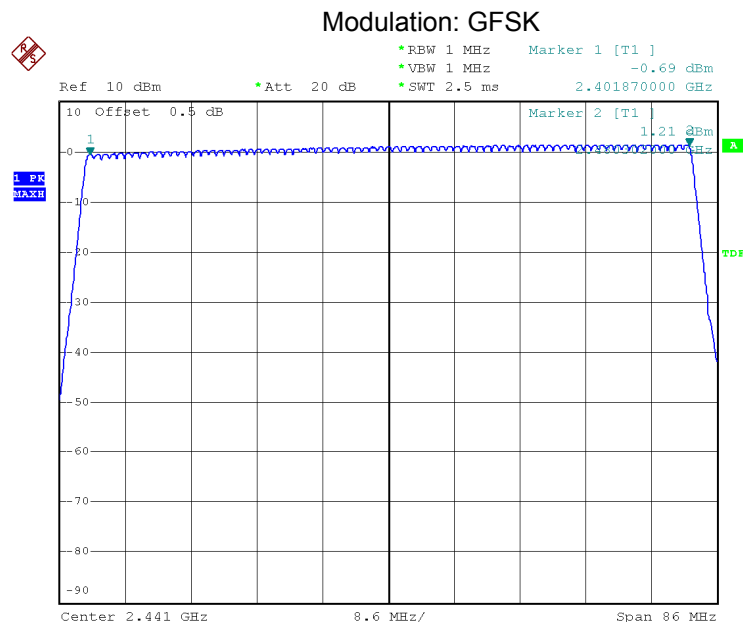


1

Date: 2.DEC.2013 14:40:48

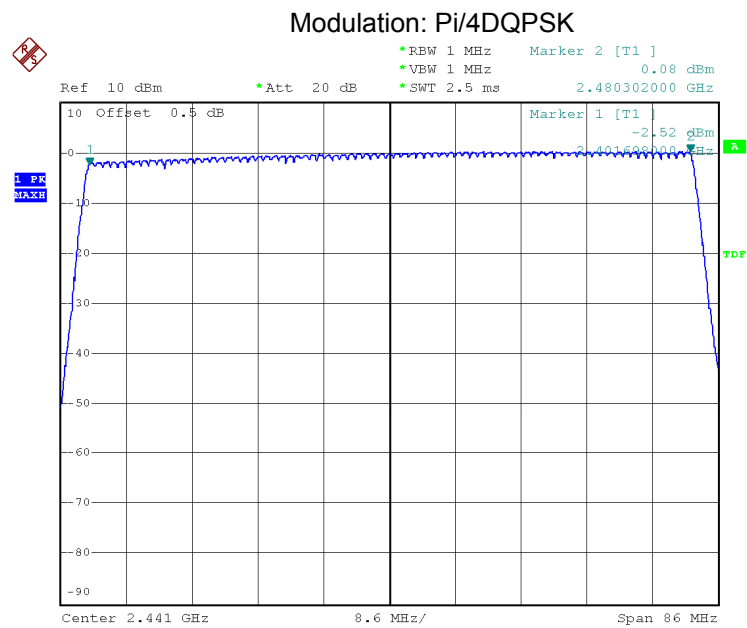

1
Date: 2.DEC.2013 14:39:11

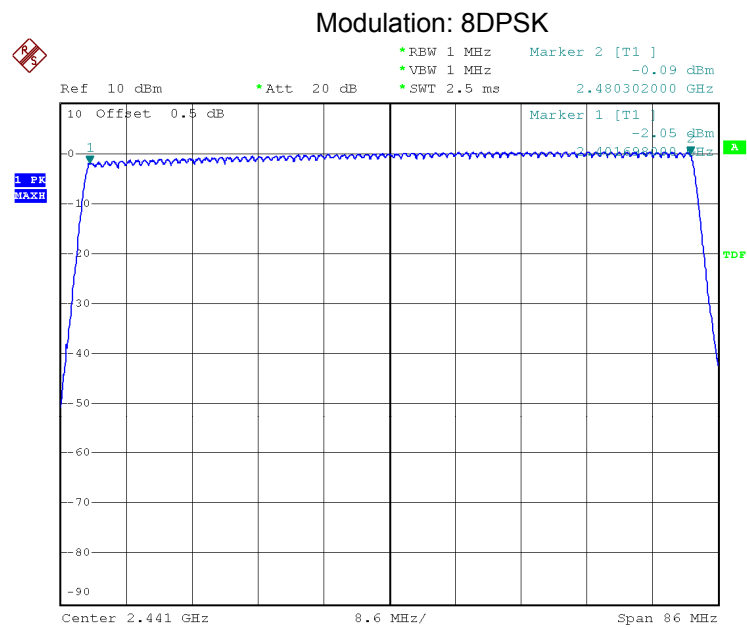

1
Date: 2.DEC.2013 14:37:36

14 Dwell Time

| | |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. |
| Test Mode: | Test in hopping transmitting operating mode. |

14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$


DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

| Data Packet | Dwell Time(s) |
|-------------|----------------------------------|
| DH5 | $1600/79/6*31.6*(MkrDelta)/1000$ |
| DH3 | $1600/79/4*31.6*(MkrDelta)/1000$ |
| DH1 | $1600/79/2*31.6*(MkrDelta)/1000$ |
| Remark | Mkr Delta is single pulse time. |


| Modulation | Frequency | Data Packet | Mkr Delta(ms) | Dwell Time(s) | Limits(s) |
|------------|----------------|-------------|---------------|---------------|-----------|
| GFSK | Lower channel | DH1 | 0.538 | 0.172 | 0.400 |
| | Middle channel | | 0.538 | 0.172 | 0.400 |
| | Upper channel | | 0.538 | 0.172 | 0.400 |
| | Lower channel | DH3 | 1.800 | 0.288 | 0.400 |
| | Middle channel | | 1.800 | 0.288 | 0.400 |
| | Upper channel | | 1.800 | 0.288 | 0.400 |
| | Lower channel | DH5 | 3.052 | 0.326 | 0.400 |
| | Middle channel | | 3.068 | 0.327 | 0.400 |
| | Upper channel | | 3.068 | 0.327 | 0.400 |
| Pi/4DQPSK | Lower channel | DH1 | 0.544 | 0.174 | 0.400 |
| | Middle channel | | 0.544 | 0.174 | 0.400 |
| | Upper channel | | 0.544 | 0.174 | 0.400 |
| | Lower channel | DH3 | 1.812 | 0.290 | 0.400 |
| | Middle channel | | 1.812 | 0.290 | 0.400 |
| | Upper channel | | 1.812 | 0.290 | 0.400 |
| | Lower channel | DH5 | 3.068 | 0.327 | 0.400 |
| | Middle channel | | 3.068 | 0.327 | 0.400 |
| | Upper channel | | 3.064 | 0.327 | 0.400 |
| 8DPSK | Lower channel | DH1 | 0.546 | 0.175 | 0.400 |
| | Middle channel | | 0.546 | 0.175 | 0.400 |
| | Upper channel | | 0.546 | 0.175 | 0.400 |
| | Lower channel | DH3 | 1.812 | 0.290 | 0.400 |
| | Middle channel | | 1.812 | 0.290 | 0.400 |
| | Upper channel | | 1.812 | 0.290 | 0.400 |
| | Lower channel | DH5 | 3.068 | 0.327 | 0.400 |
| | Middle channel | | 3.068 | 0.327 | 0.400 |
| | Upper channel | | 3.068 | 0.327 | 0.400 |

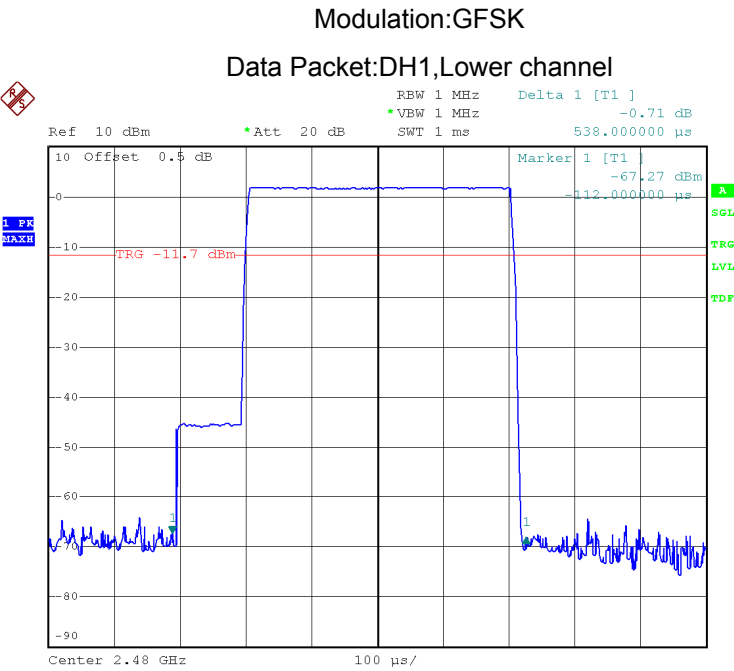


1
Date: 2.DEC.2013 15:38:16

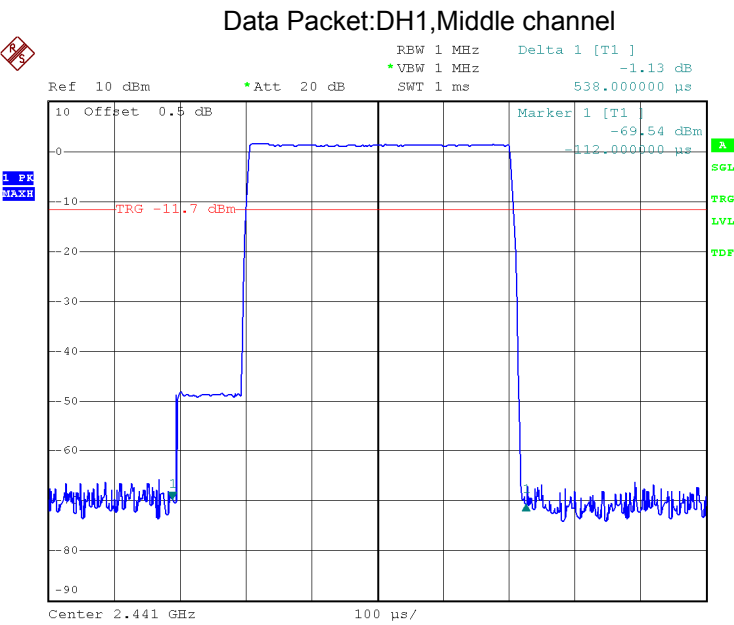


1
Date: 2.DEC.2013 15:36:59

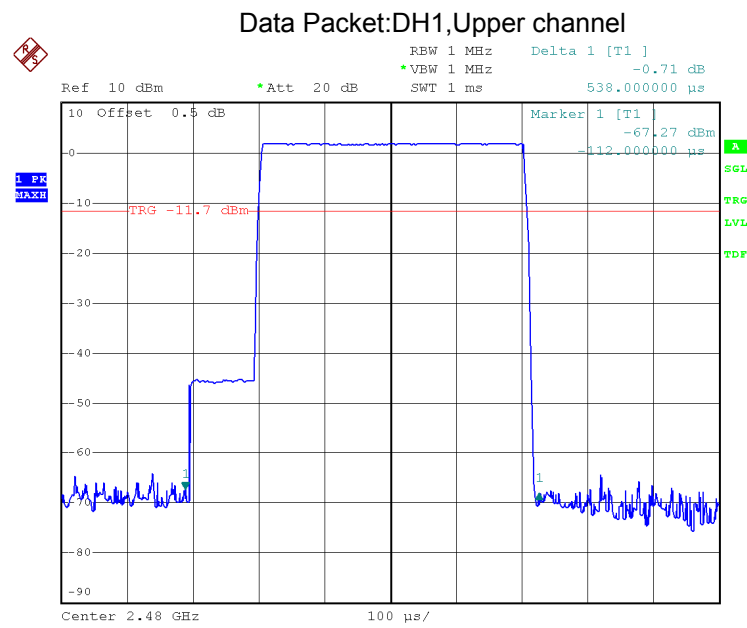


1
Date: 2.DEC.2013 15:38:16

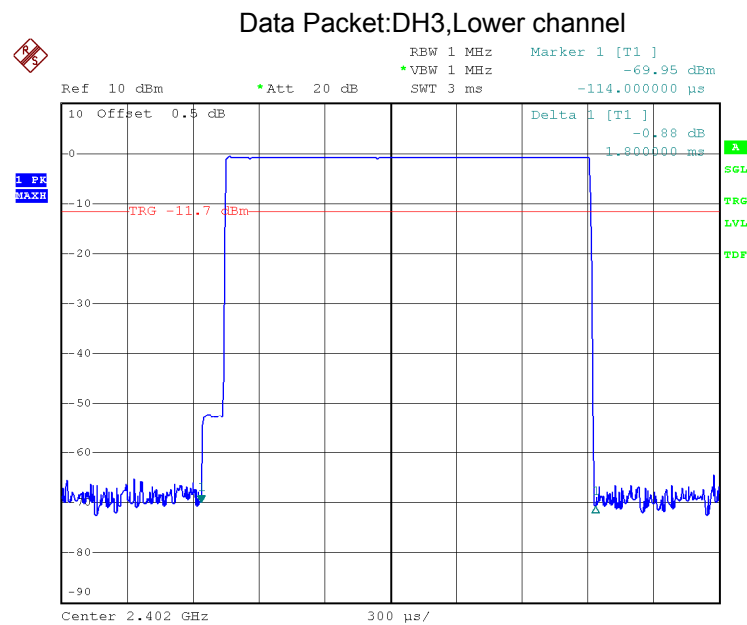


1
Date: 2.DEC.2013 15:56:11

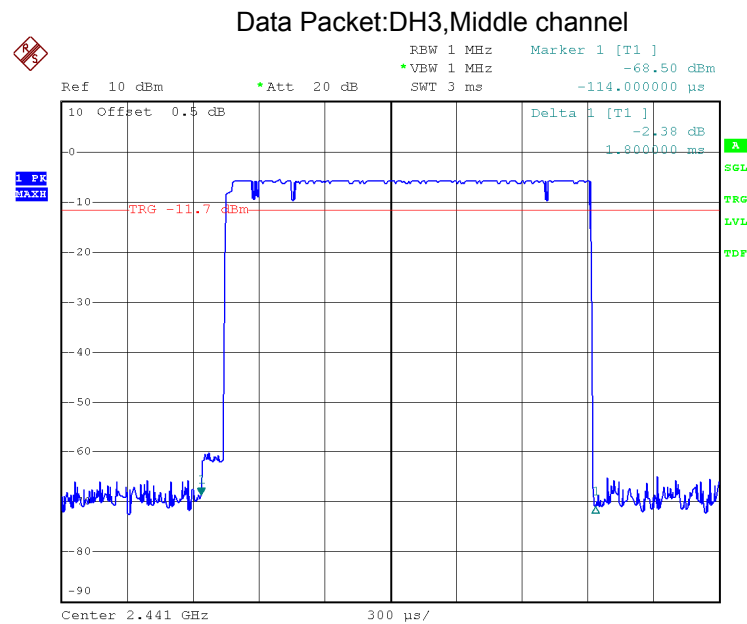


1
Date: 2.DEC.2013 15:56:53

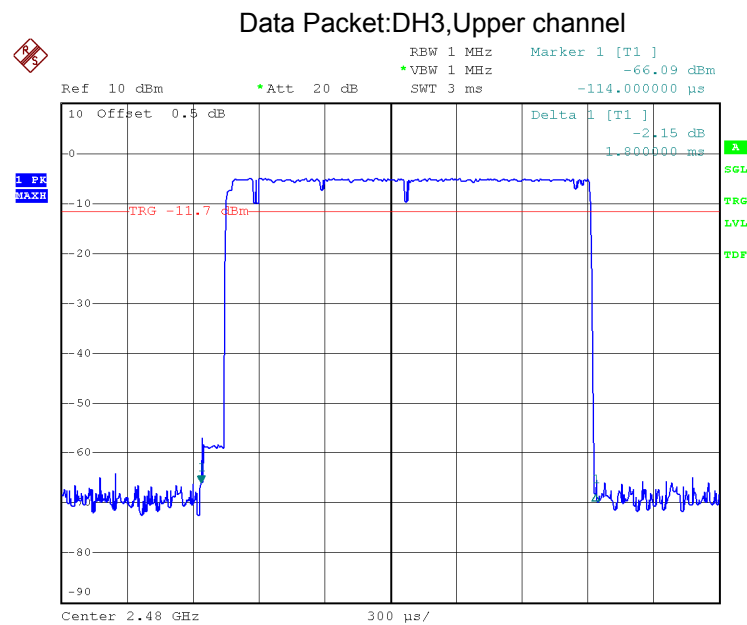


1
Date: 2.DEC.2013 15:57:50

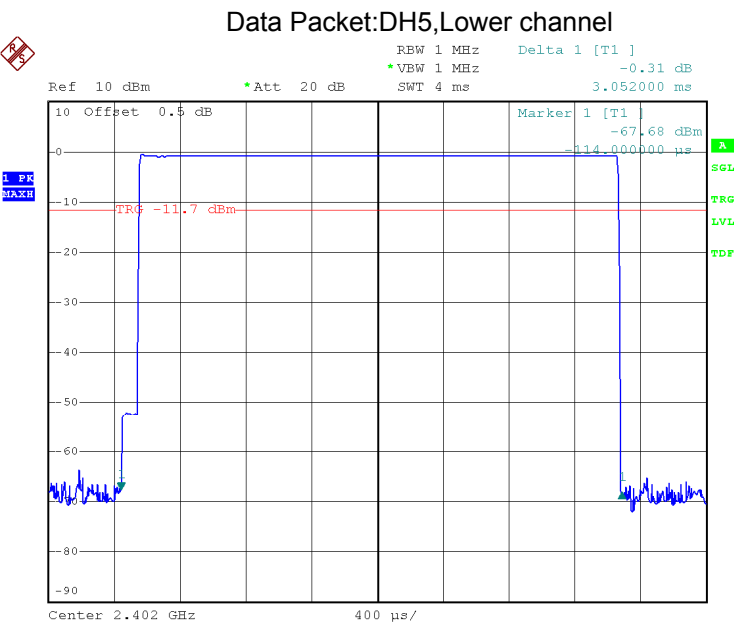


1
Date: 2.DEC.2013 16:03:45

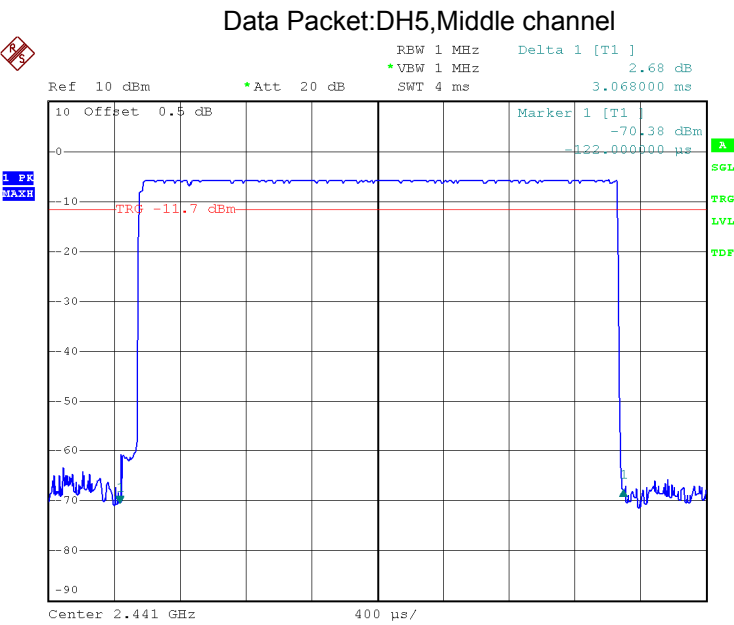


1
Date: 2.DEC.2013 16:10:06

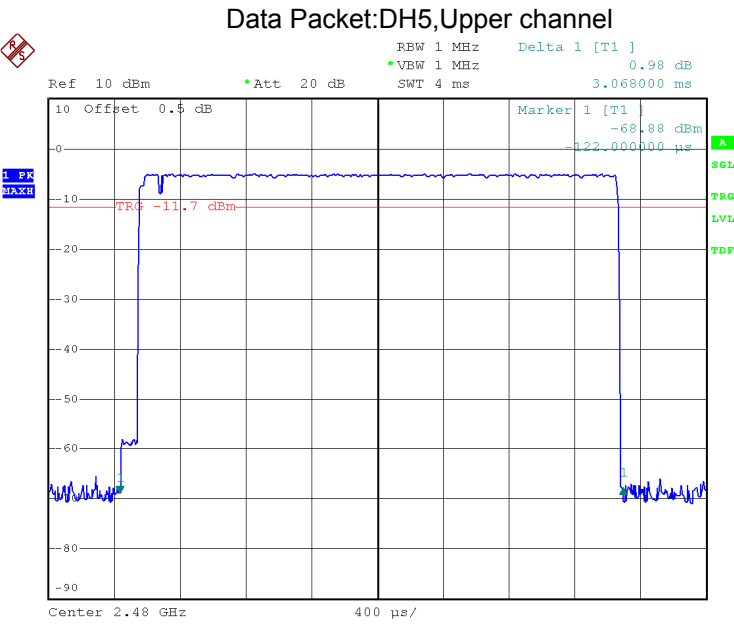


1
Date: 2.DEC.2013 16:09:42

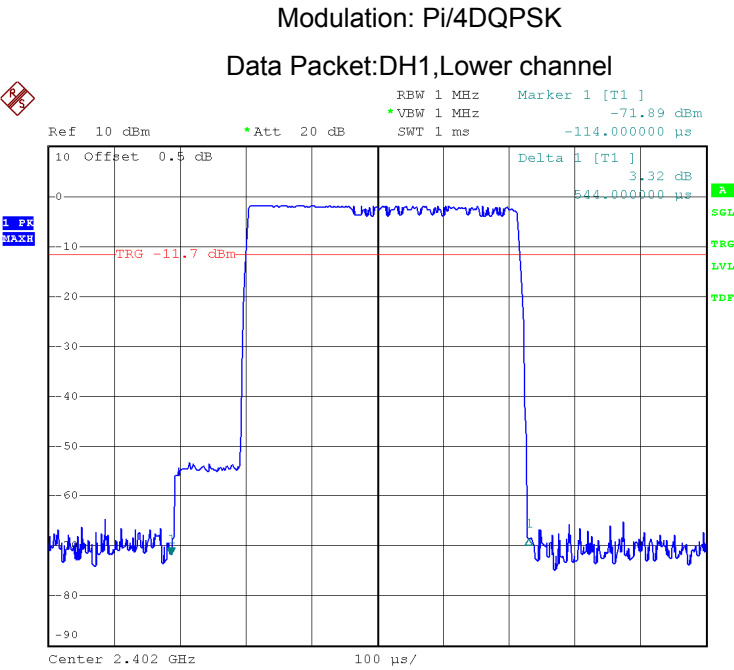


1
Date: 2.DEC.2013 15:39:45

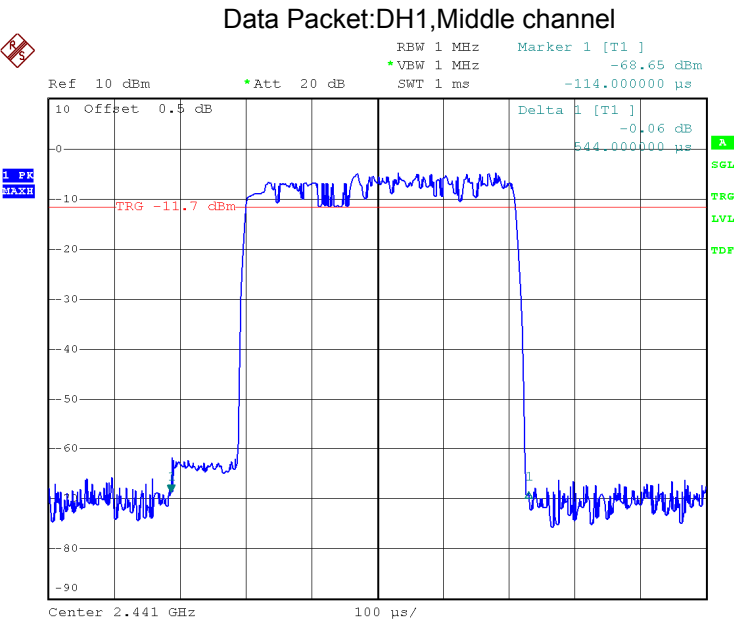


1
Date: 2.DEC.2013 15:46:32

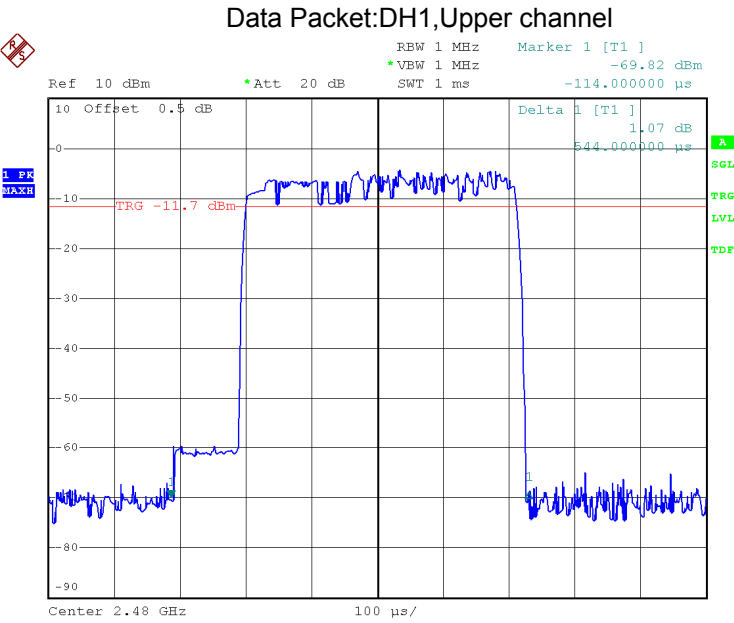


1
Date: 2.DEC.2013 15:48:11

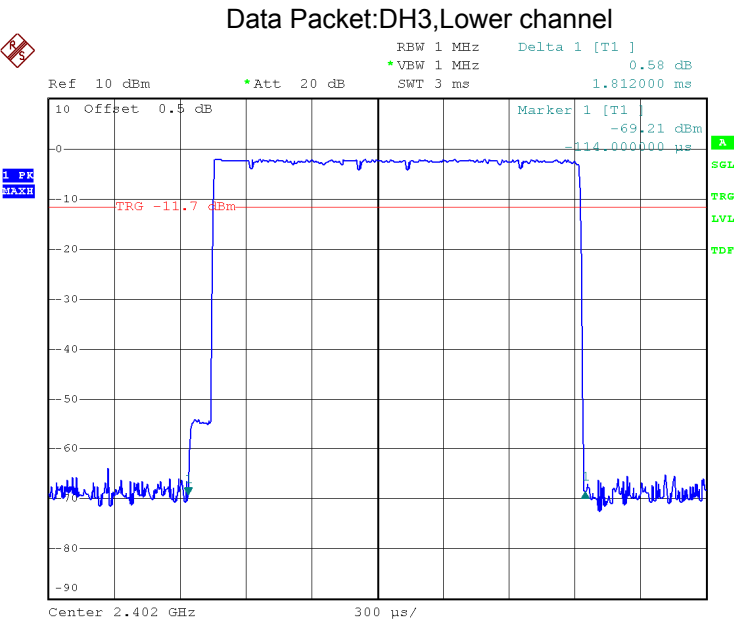


1
Date: 2.DEC.2013 15:58:47

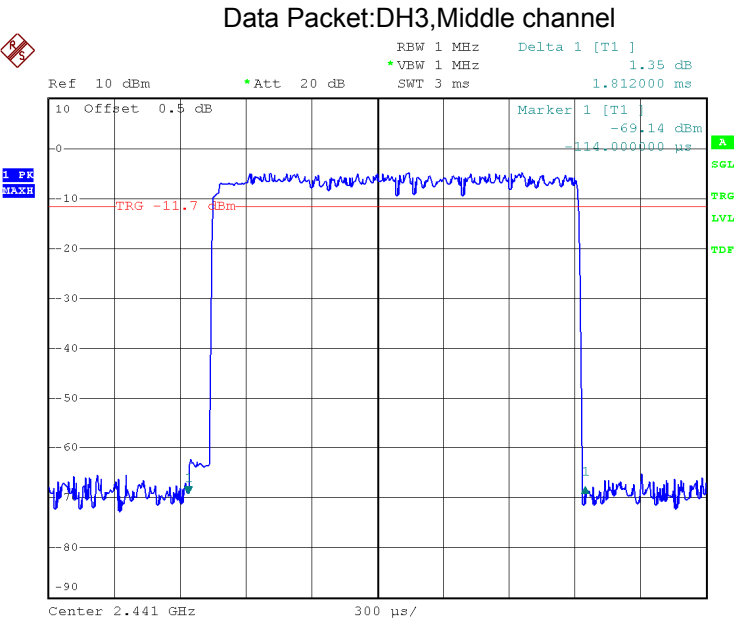


1
Date: 2.DEC.2013 15:59:34

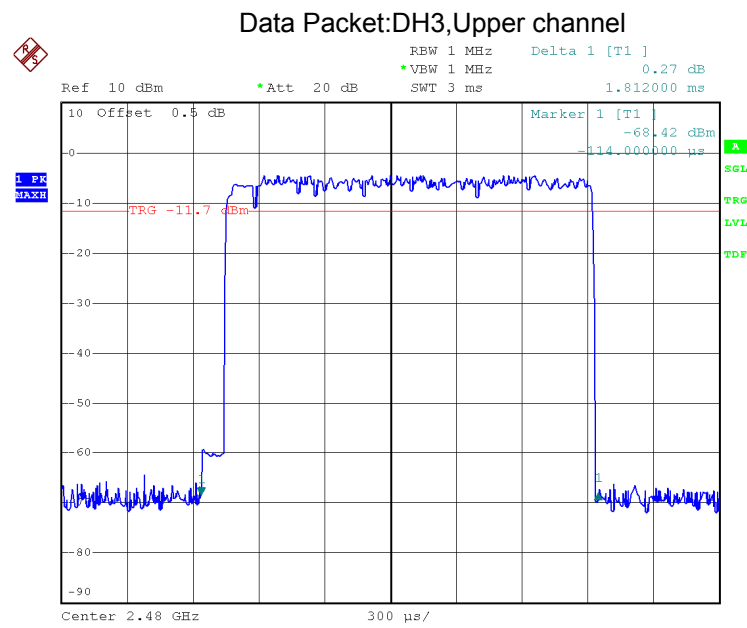


1
Date: 2.DEC.2013 16:00:05

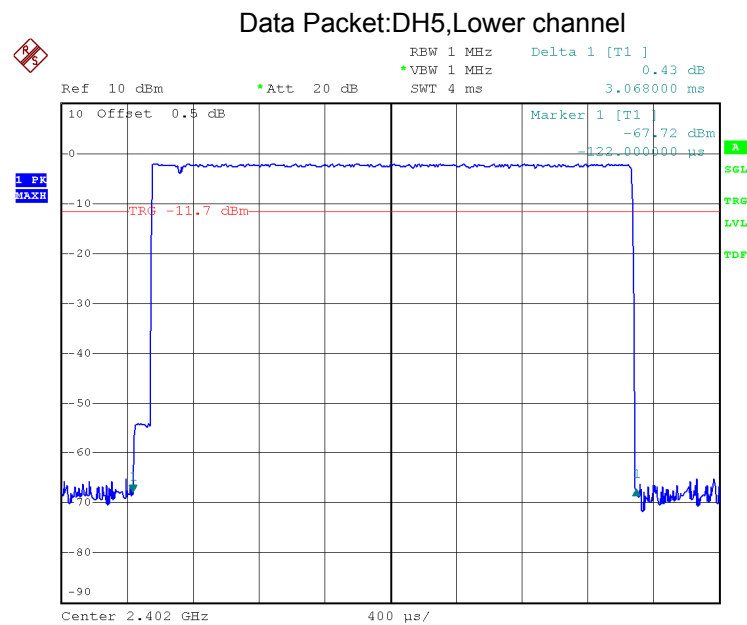

1
Date: 2.DEC.2013 16:06:15

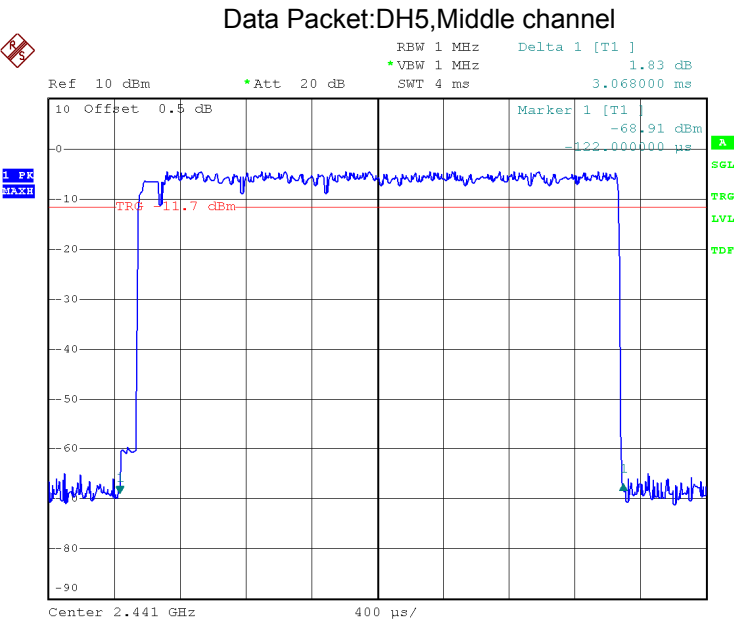


1
Date: 2.DEC.2013 16:08:30

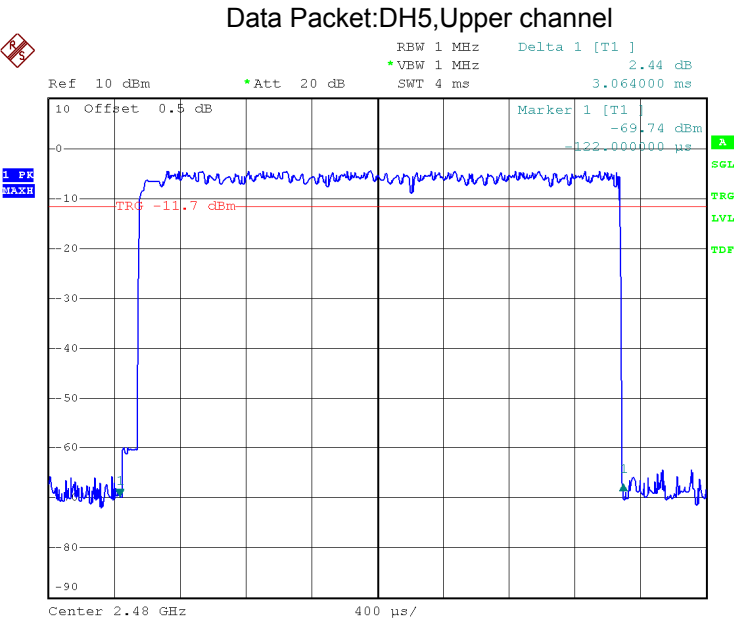

1
Date: 2.DEC.2013 16:18:18


Modulation: 8DPSK

Data Packet:DH1,Lower channel

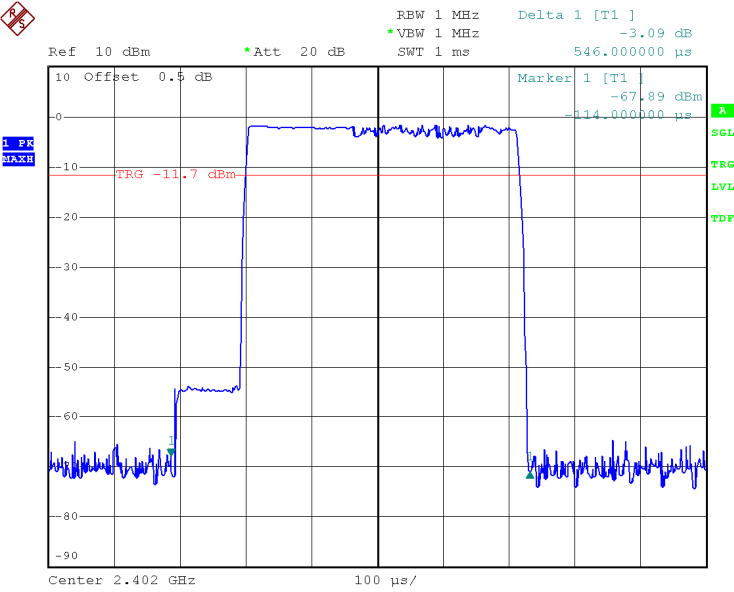


1
Date: 2.DEC.2013 15:51:25


Data Packet:DH1,Middle channel

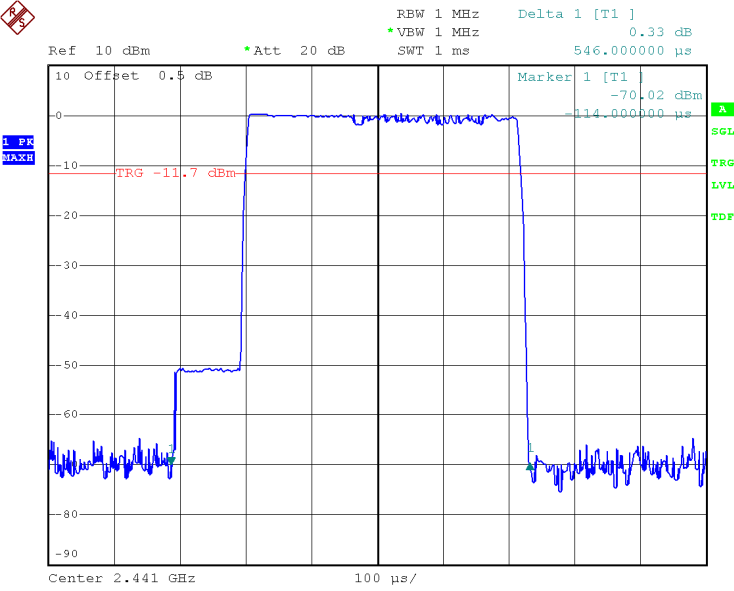

1
Date: 2.DEC.2013 15:51:58

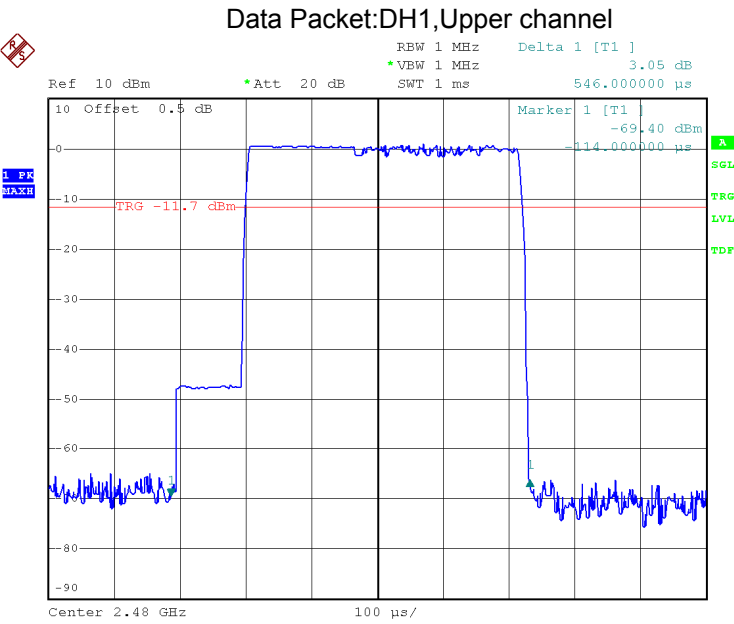


1
Date: 2.DEC.2013 15:52:55

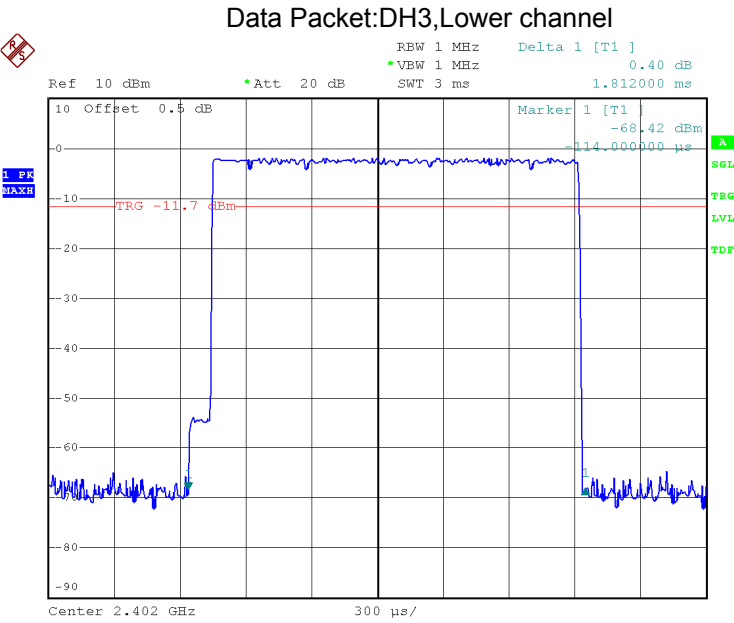


1
Date: 2.DEC.2013 16:00:56

Data Packet:DH3,Middle channel

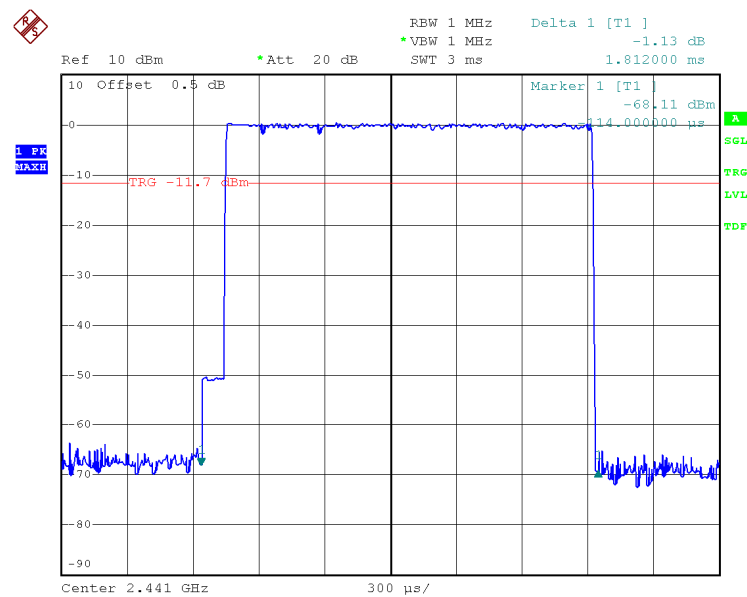


1
Date: 2.DEC.2013 16:01:29


Data Packet:DH3,Upper channel

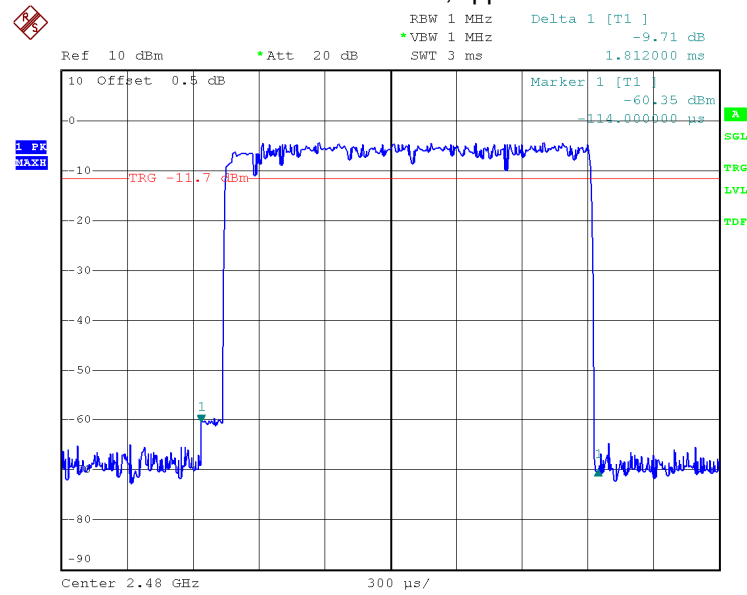


1
Date: 2.DEC.2013 16:02:13

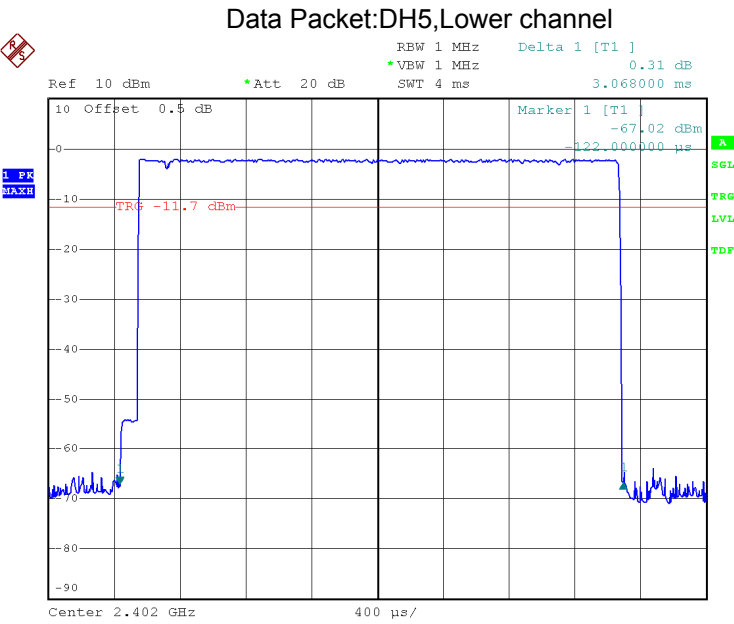

1
Date: 2.DEC.2013 16:11:29

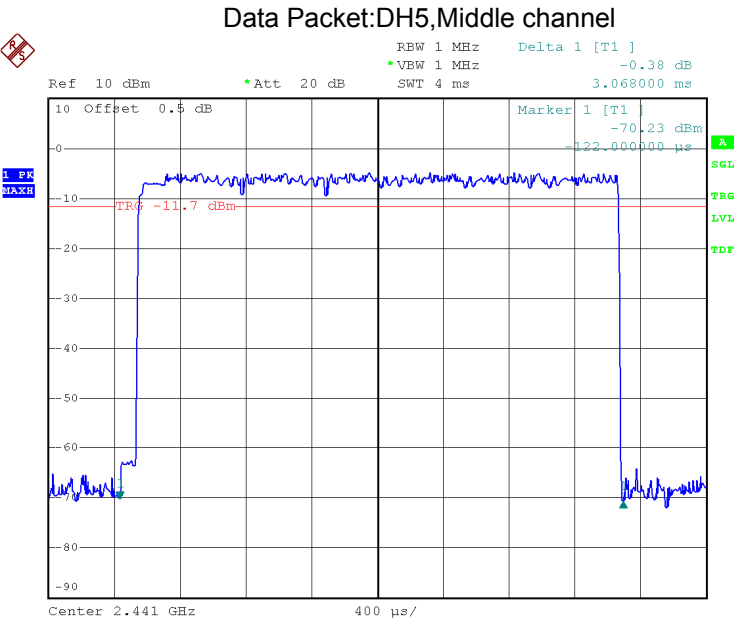

1
Date: 2.DEC.2013 16:12:04

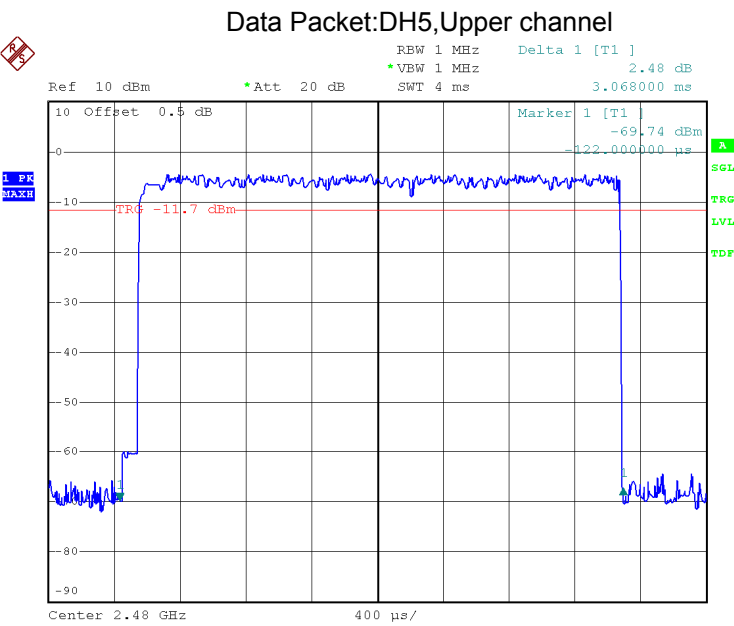

1

Date: 2.DEC.2013 16:13:18

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

16 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

16.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180/f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1.0 | 30 |

Note: f = frequency in MHz ; *Plane-wave equivalent power density

16.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric) , $\text{Gain}_{\text{numeric}} = 10^{(\text{dBi}/10)}$

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

| Modulation | Antenna Gain (dBi) | Antenna Gain (numeric) | Max. Output Power (dBm) | Peak Output Power (mW) | Power Density (S) (mW/cm ²) | Limit of Power Density (S) (mW/cm ²) |
|------------|--------------------|------------------------|-------------------------|------------------------|---|--|
| GFSK | 2 | 1.585 | 1.49 | 1.409 | 0.004443 | 1 |
| Pi/4DQPSK | 2 | 1.585 | 0.62 | 1.153 | 0.003636 | 1 |
| 8DPSK | 2 | 1.585 | 0.85 | 1.216 | 0.003834 | 1 |


17 Photographs – Test Setup

17.1 Conducted Emissions




17.2 Radiated Emissions


Below 30MHz

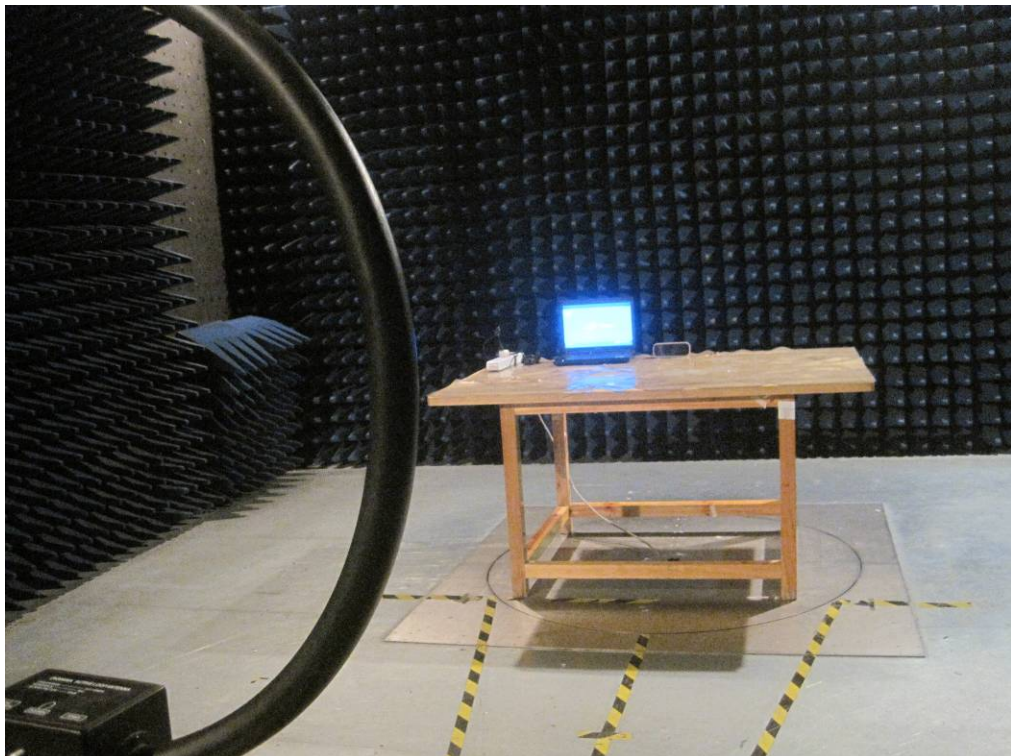





From 30-1000MHz

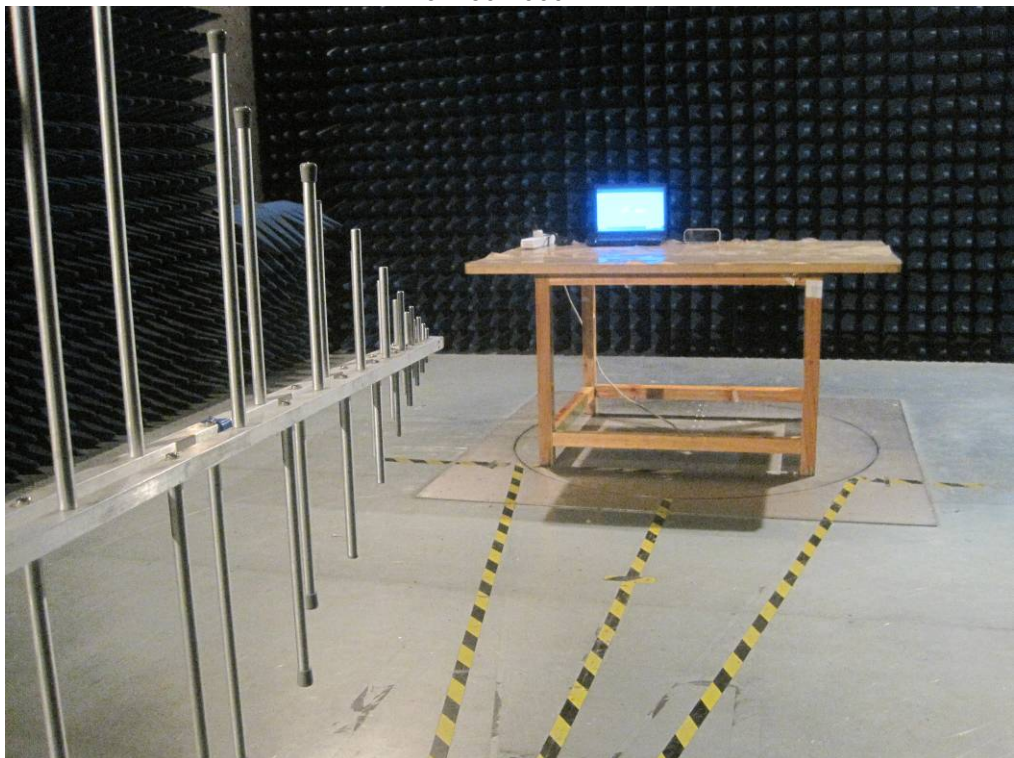

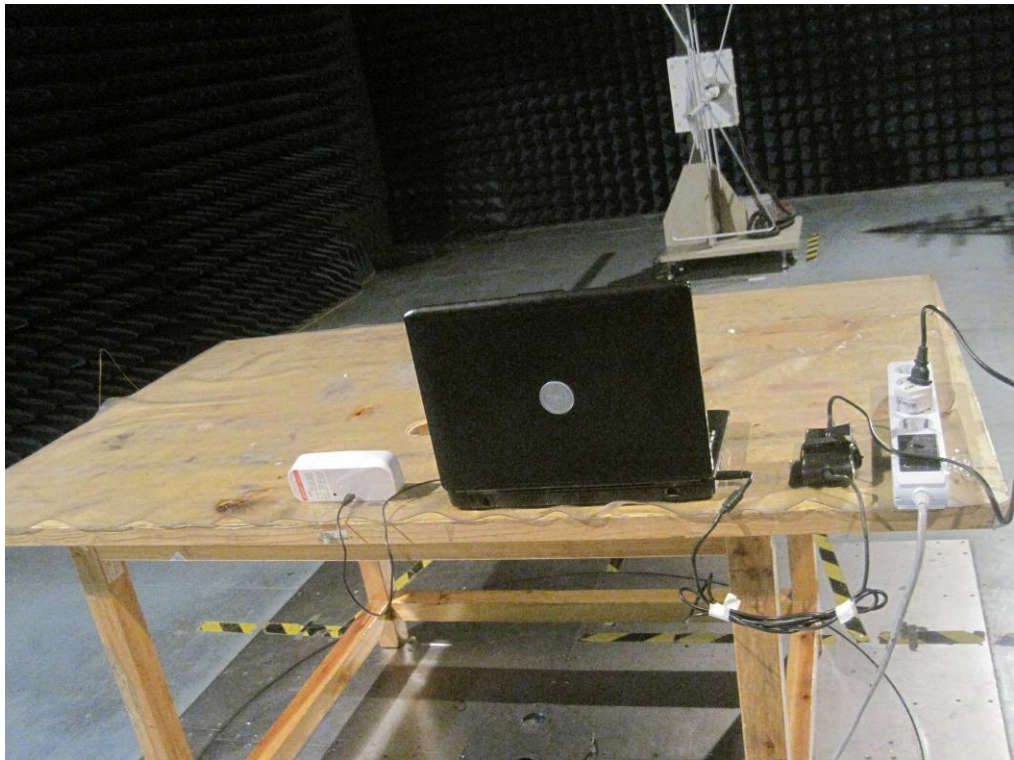

Above 1GHz

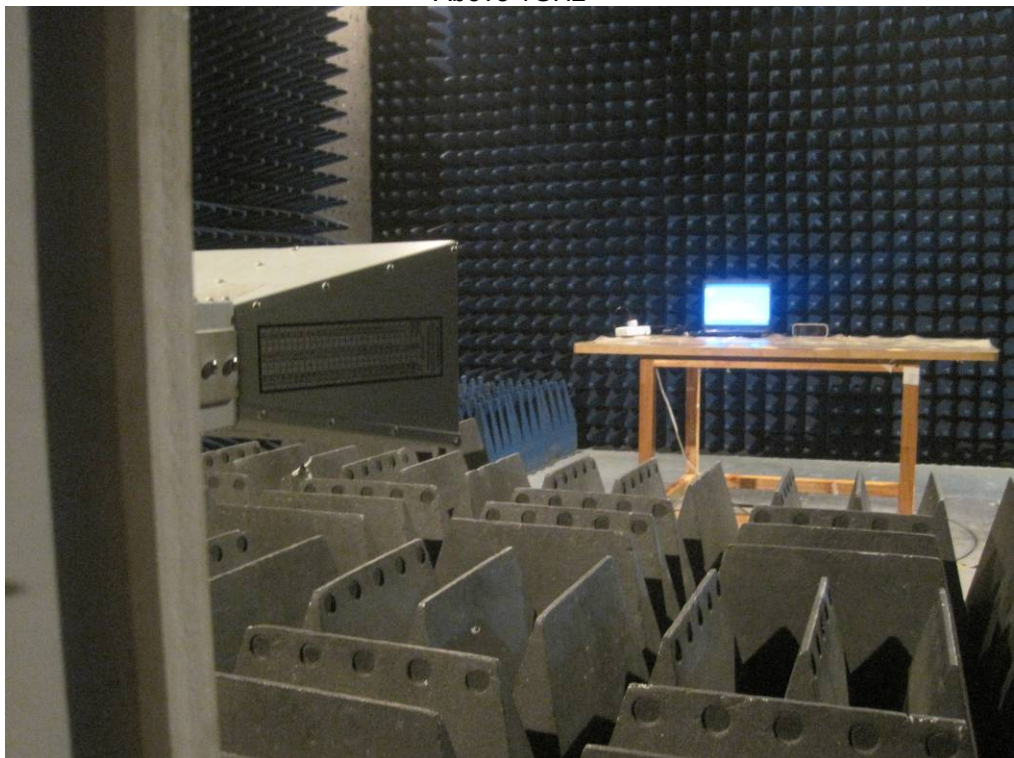

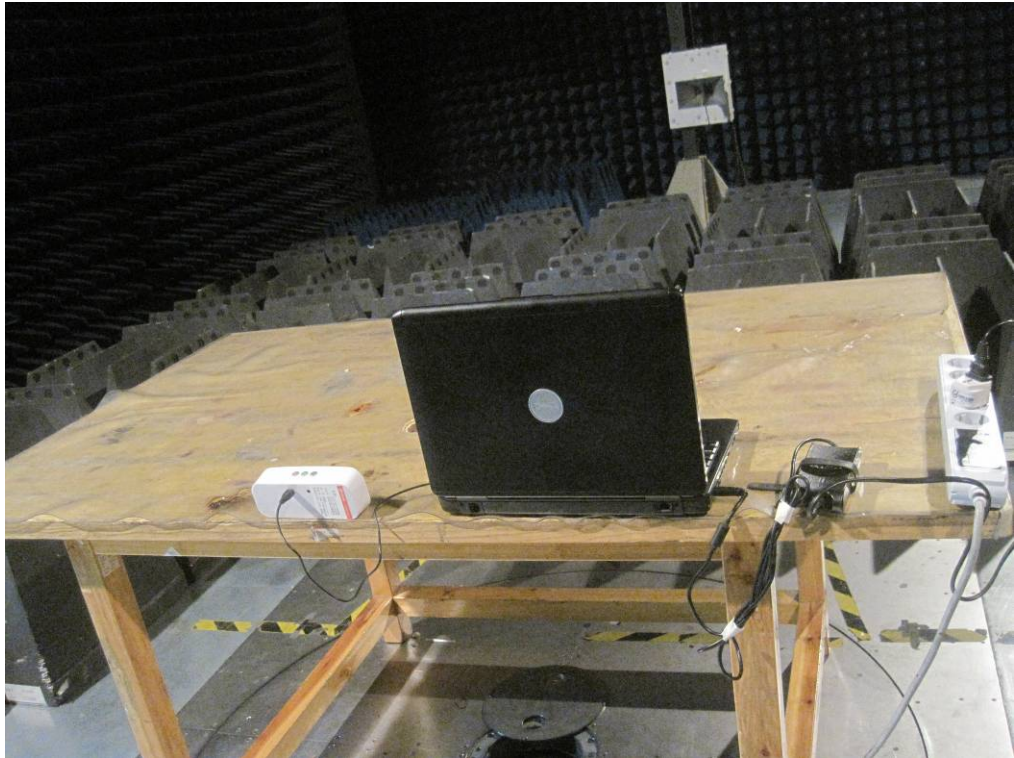


18 Photographs - Constructional Details



18.1 EUT – External View1.









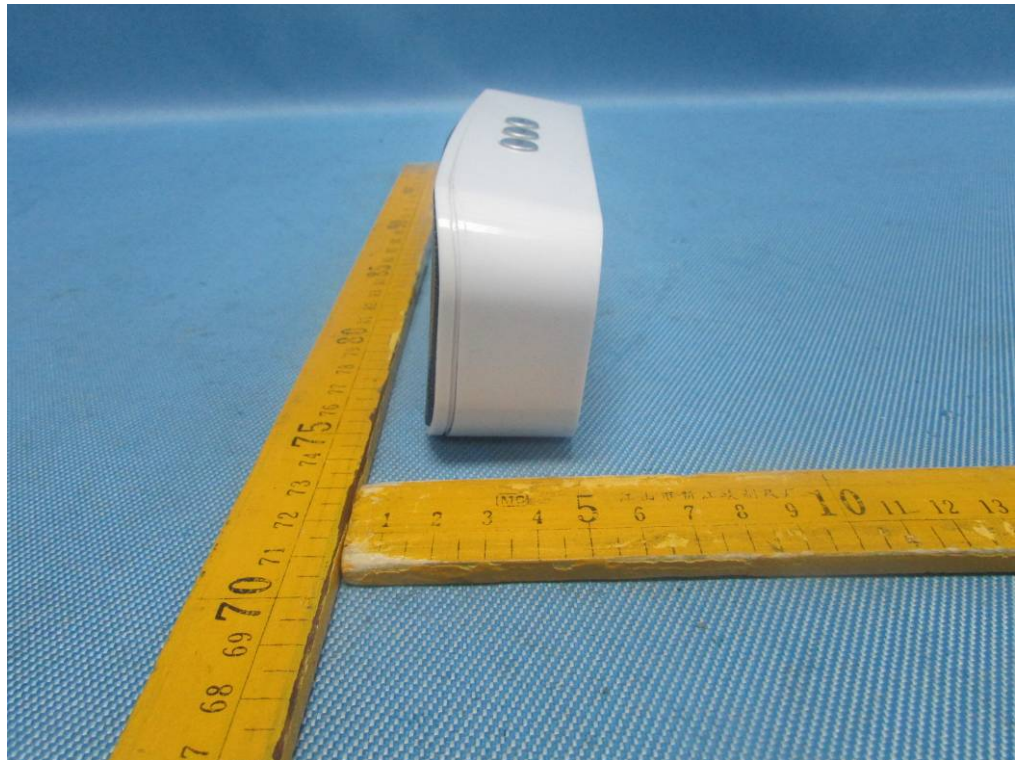

18.2 EUT – Internal View

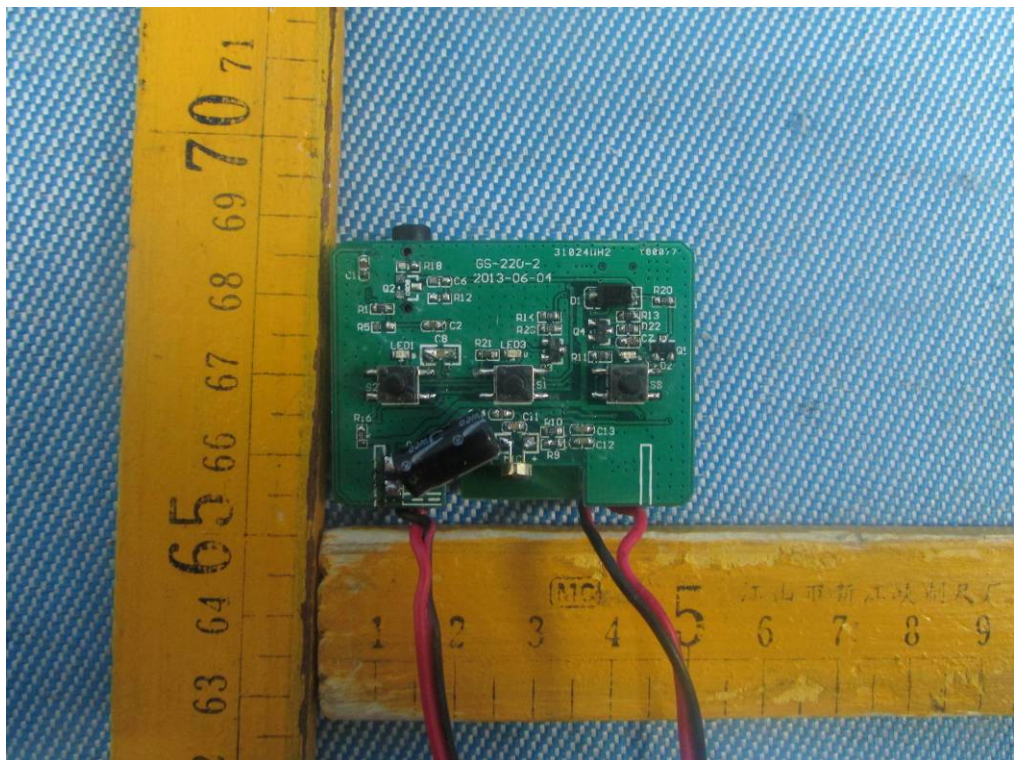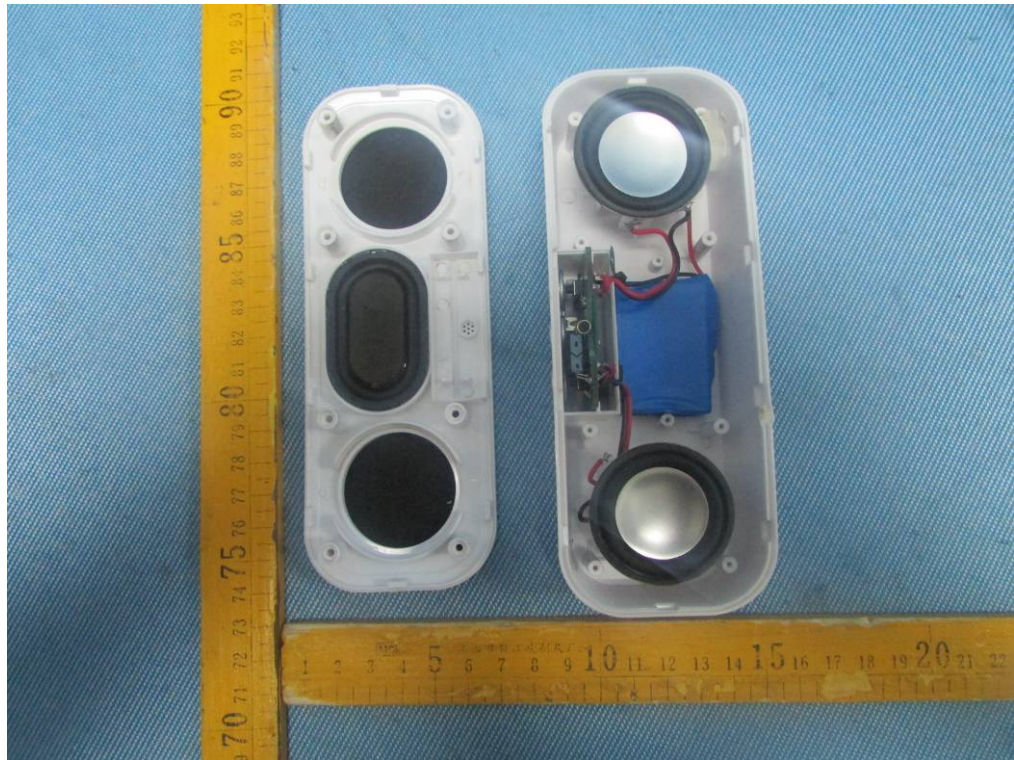

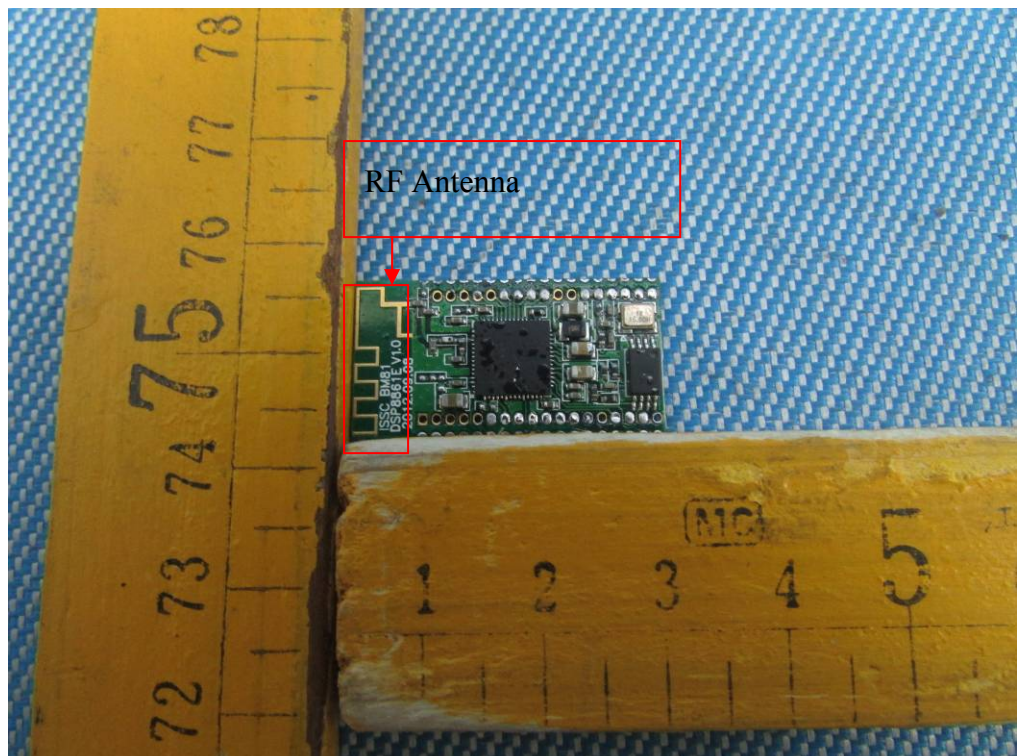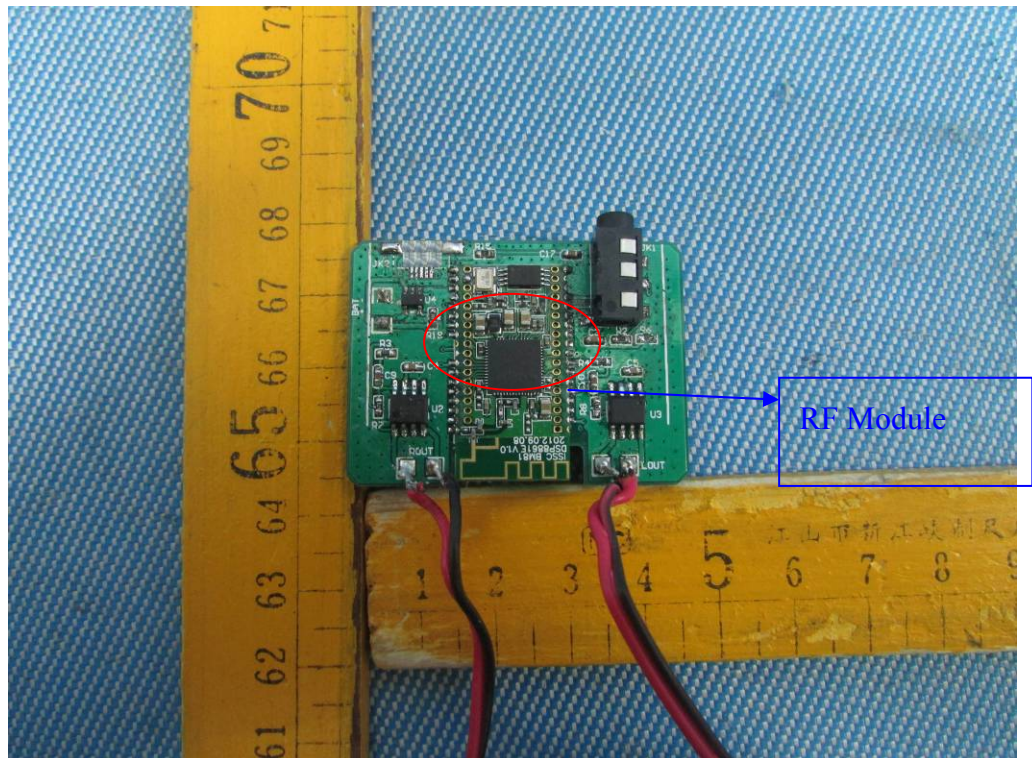

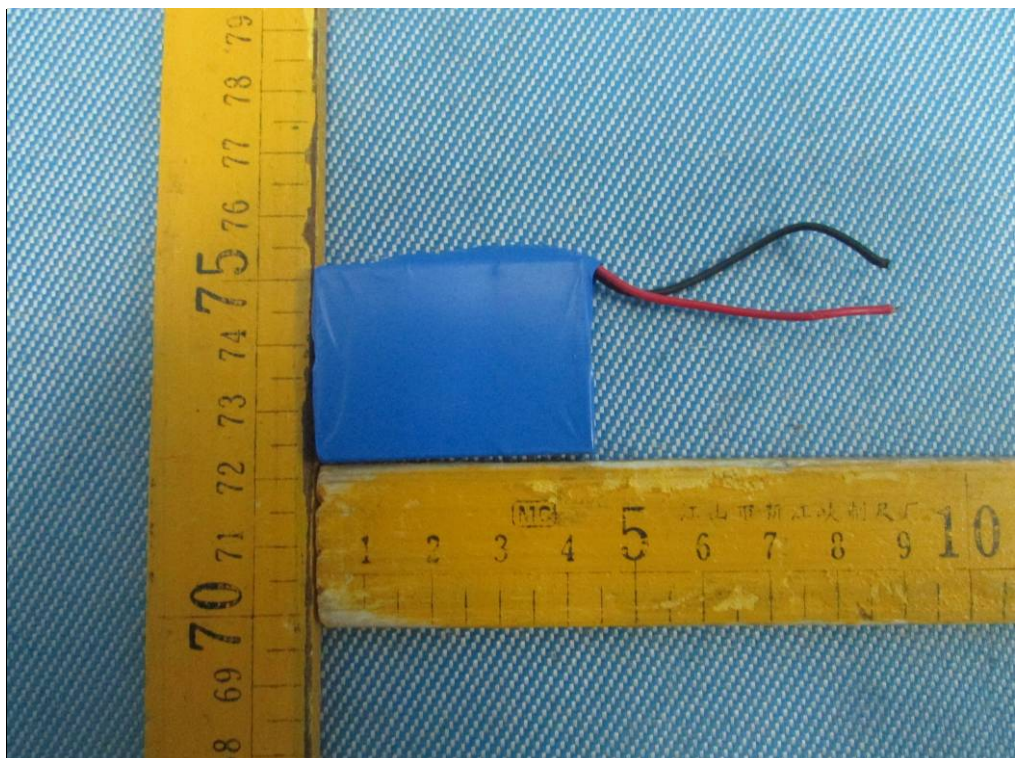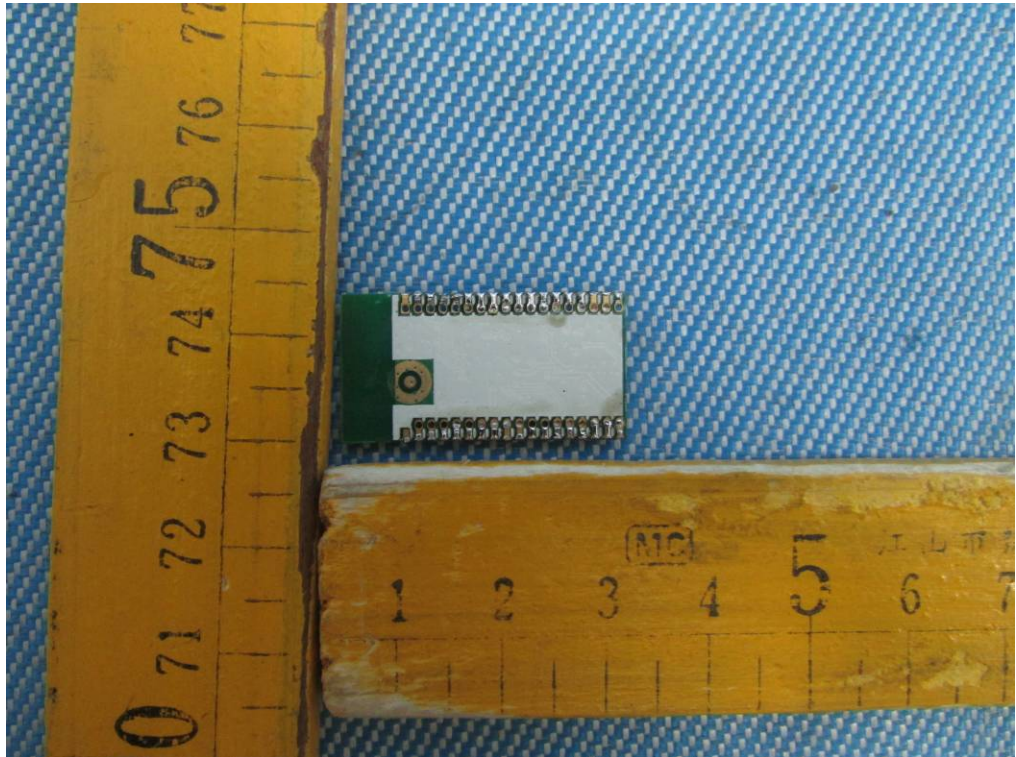

===== End of test report =====