

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 Section 11.11

7.5.3. Test Setting


1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to \geq 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW \geq 3 x RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize


7.5.4. Test Setup

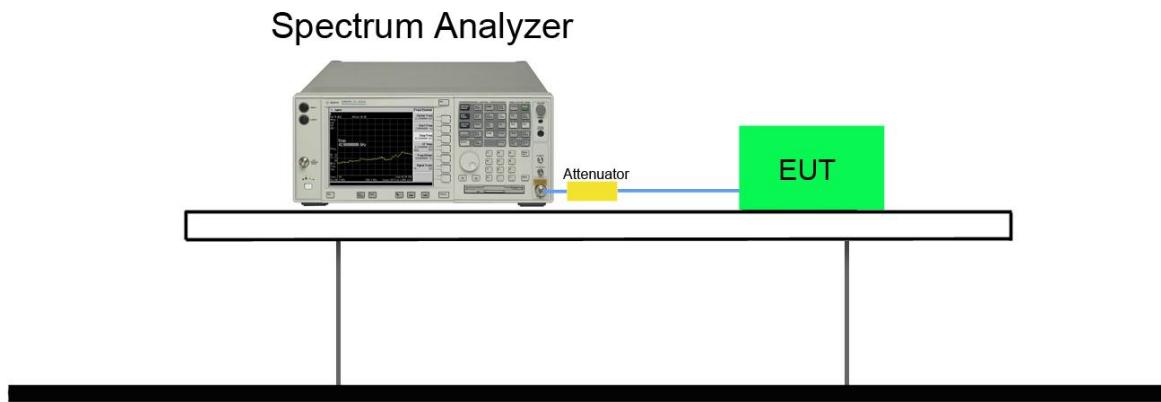



7.5.5. Test Result


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
Ant 0					
802.11b	1	01	2412	30dBc	Pass
802.11b	1	06	2437	30dBc	Pass
802.11b	1	11	2462	30dBc	Pass
802.11g	6	01	2412	30dBc	Pass
802.11g	6	06	2437	30dBc	Pass
802.11g	6	11	2462	30dBc	Pass
802.11n-HT20	6.5	01	2412	30dBc	Pass
802.11n-HT20	6.5	06	2437	30dBc	Pass
802.11n-HT20	6.5	11	2462	30dBc	Pass
802.11n-HT40	13.5	03	2422	30dBc	Pass
802.11n-HT40	13.5	06	2437	30dBc	Pass
802.11n-HT40	13.5	09	2452	30dBc	Pass
Ant 1					
802.11n-HT20	6.5	01	2412	30dBc	Pass
802.11n-HT20	6.5	06	2437	30dBc	Pass
802.11n-HT20	6.5	11	2462	30dBc	Pass
802.11n-HT40	13.5	03	2422	30dBc	Pass
802.11n-HT40	13.5	06	2437	30dBc	Pass
802.11n-HT40	13.5	09	2452	30dBc	Pass


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
Ant 0 / Ant 0 + 1					
802.11n-HT20	6.5	01	2412	30dBc	Pass
802.11n-HT20	6.5	06	2437	30dBc	Pass
802.11n-HT20	6.5	11	2462	30dBc	Pass
802.11n-HT40	13.5	03	2422	30dBc	Pass
802.11n-HT40	13.5	06	2437	30dBc	Pass
802.11n-HT40	13.5	09	2452	30dBc	Pass
Ant 1 / Ant 0 + 1					
802.11n-HT20	6.5	01	2412	30dBc	Pass
802.11n-HT20	6.5	06	2437	30dBc	Pass
802.11n-HT20	6.5	11	2462	30dBc	Pass
802.11n-HT40	13.5	03	2422	30dBc	Pass
802.11n-HT40	13.5	06	2437	30dBc	Pass
802.11n-HT40	13.5	09	2452	30dBc	Pass

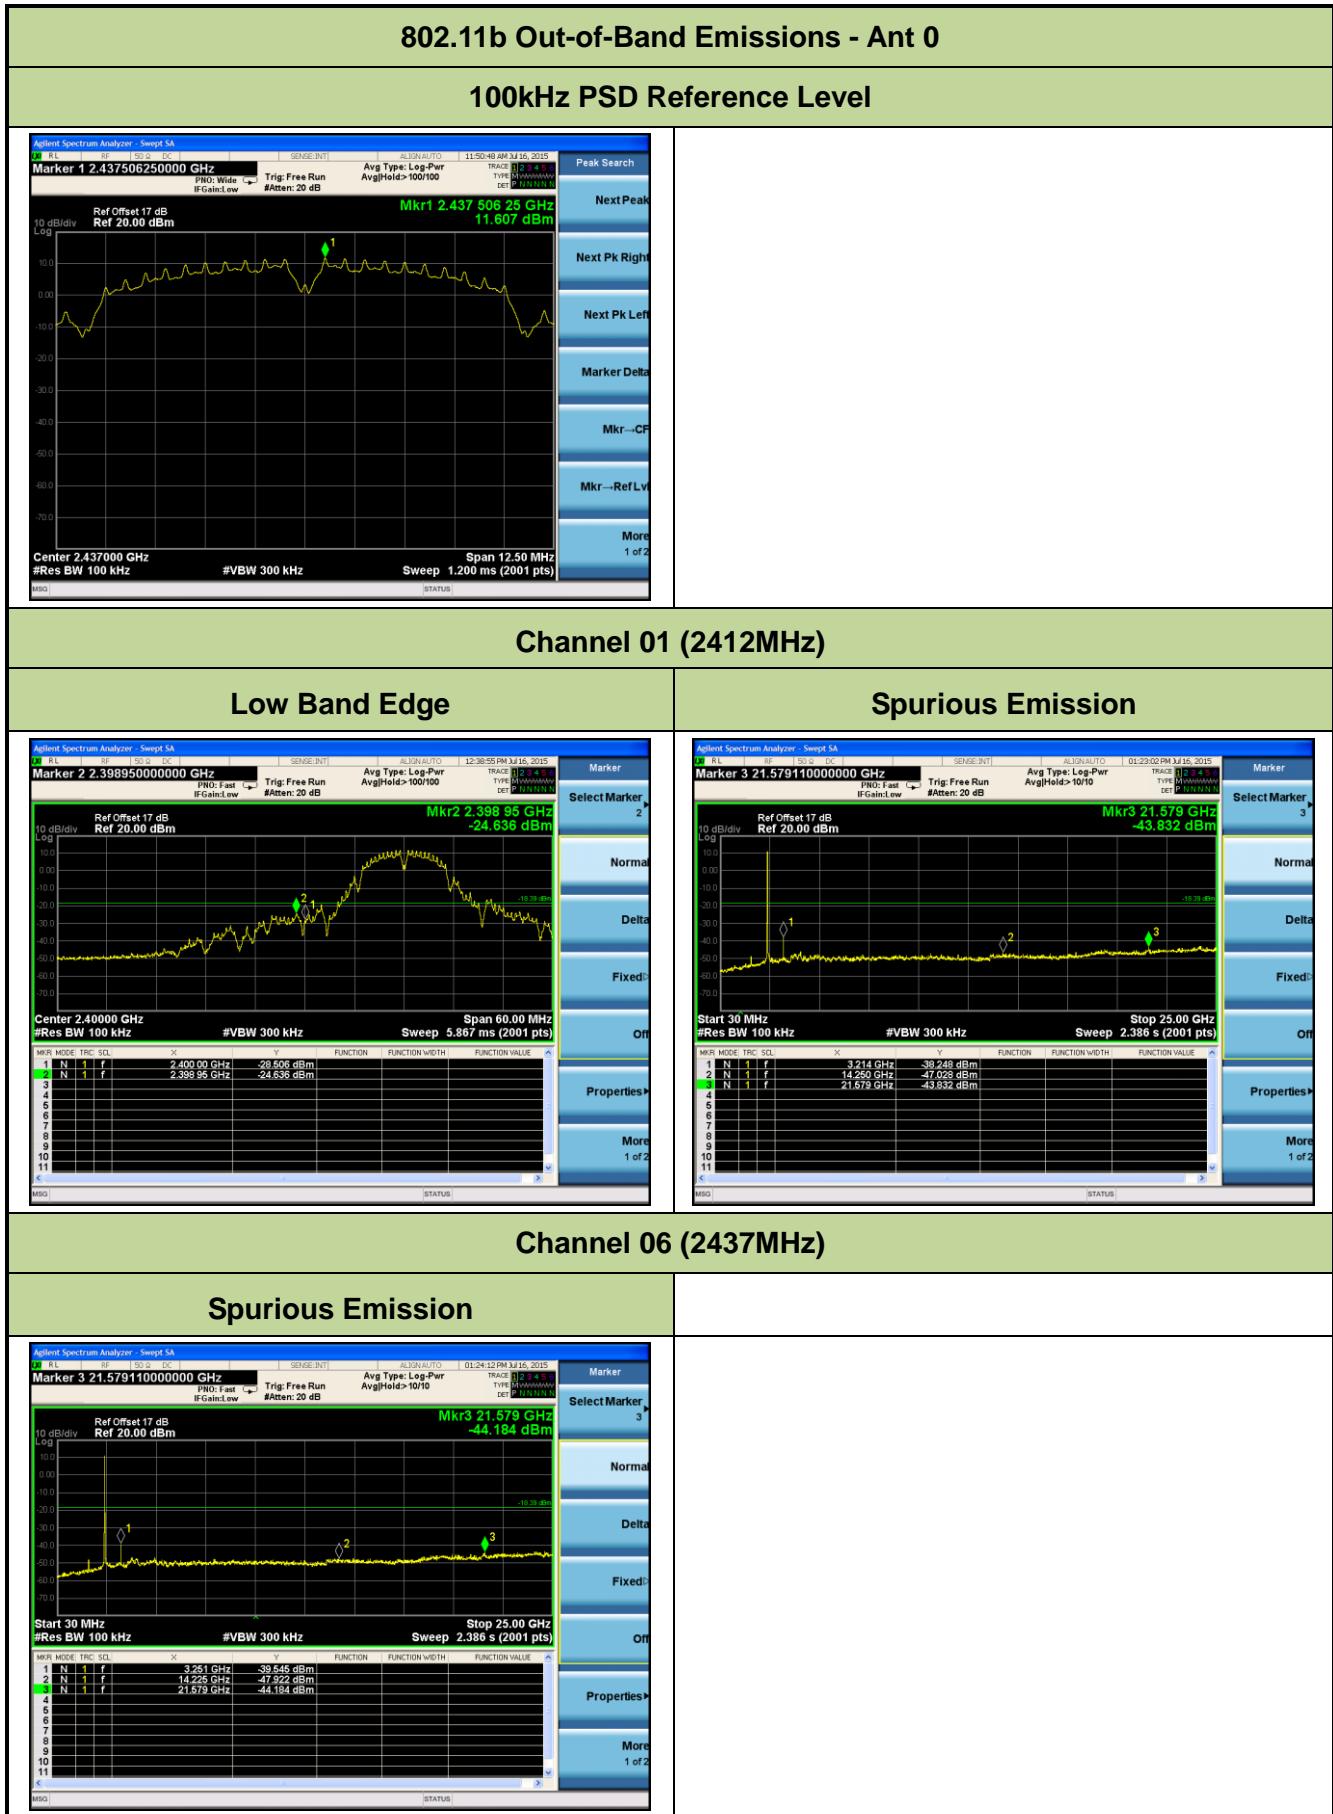


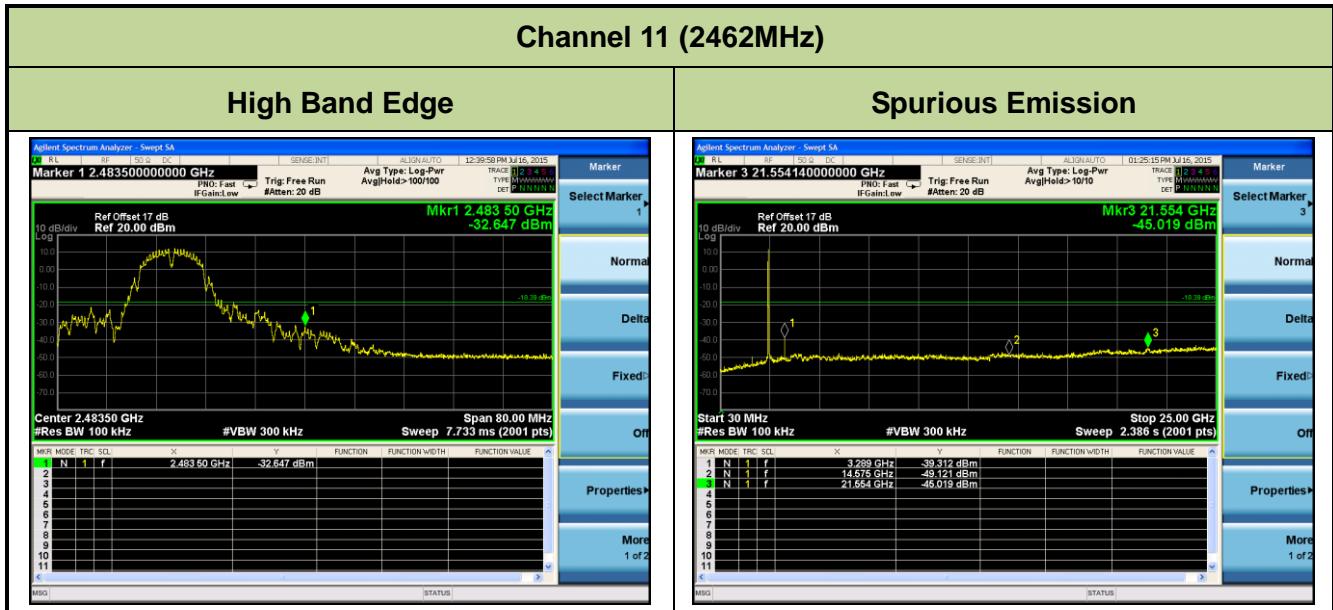


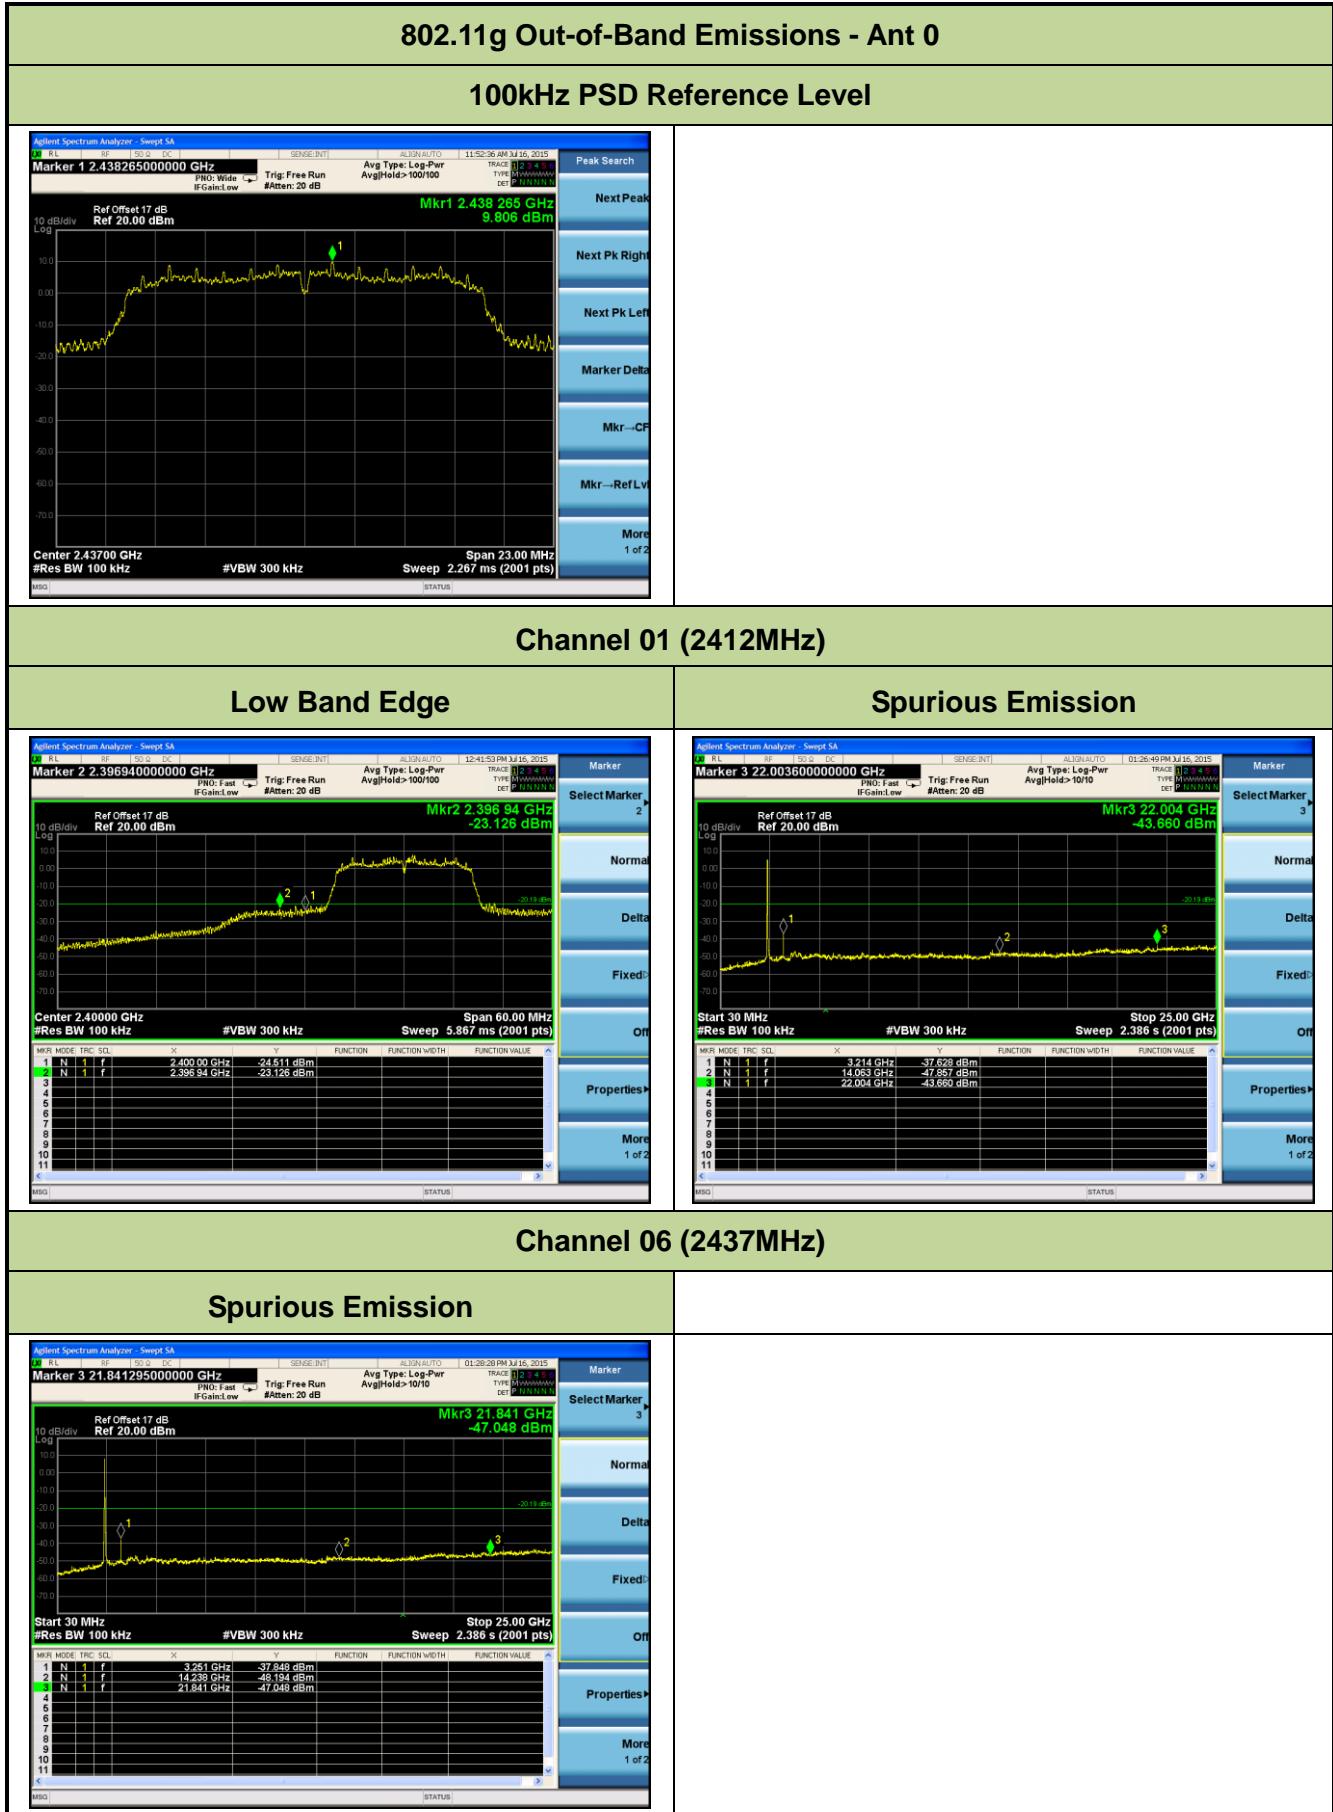


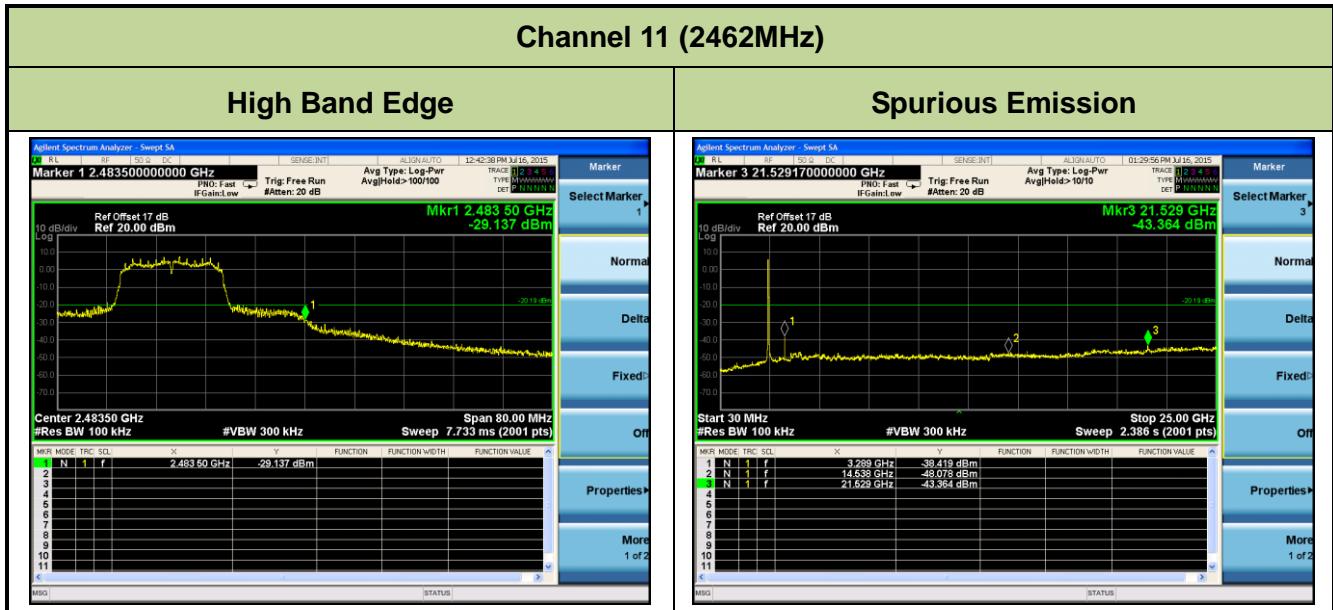


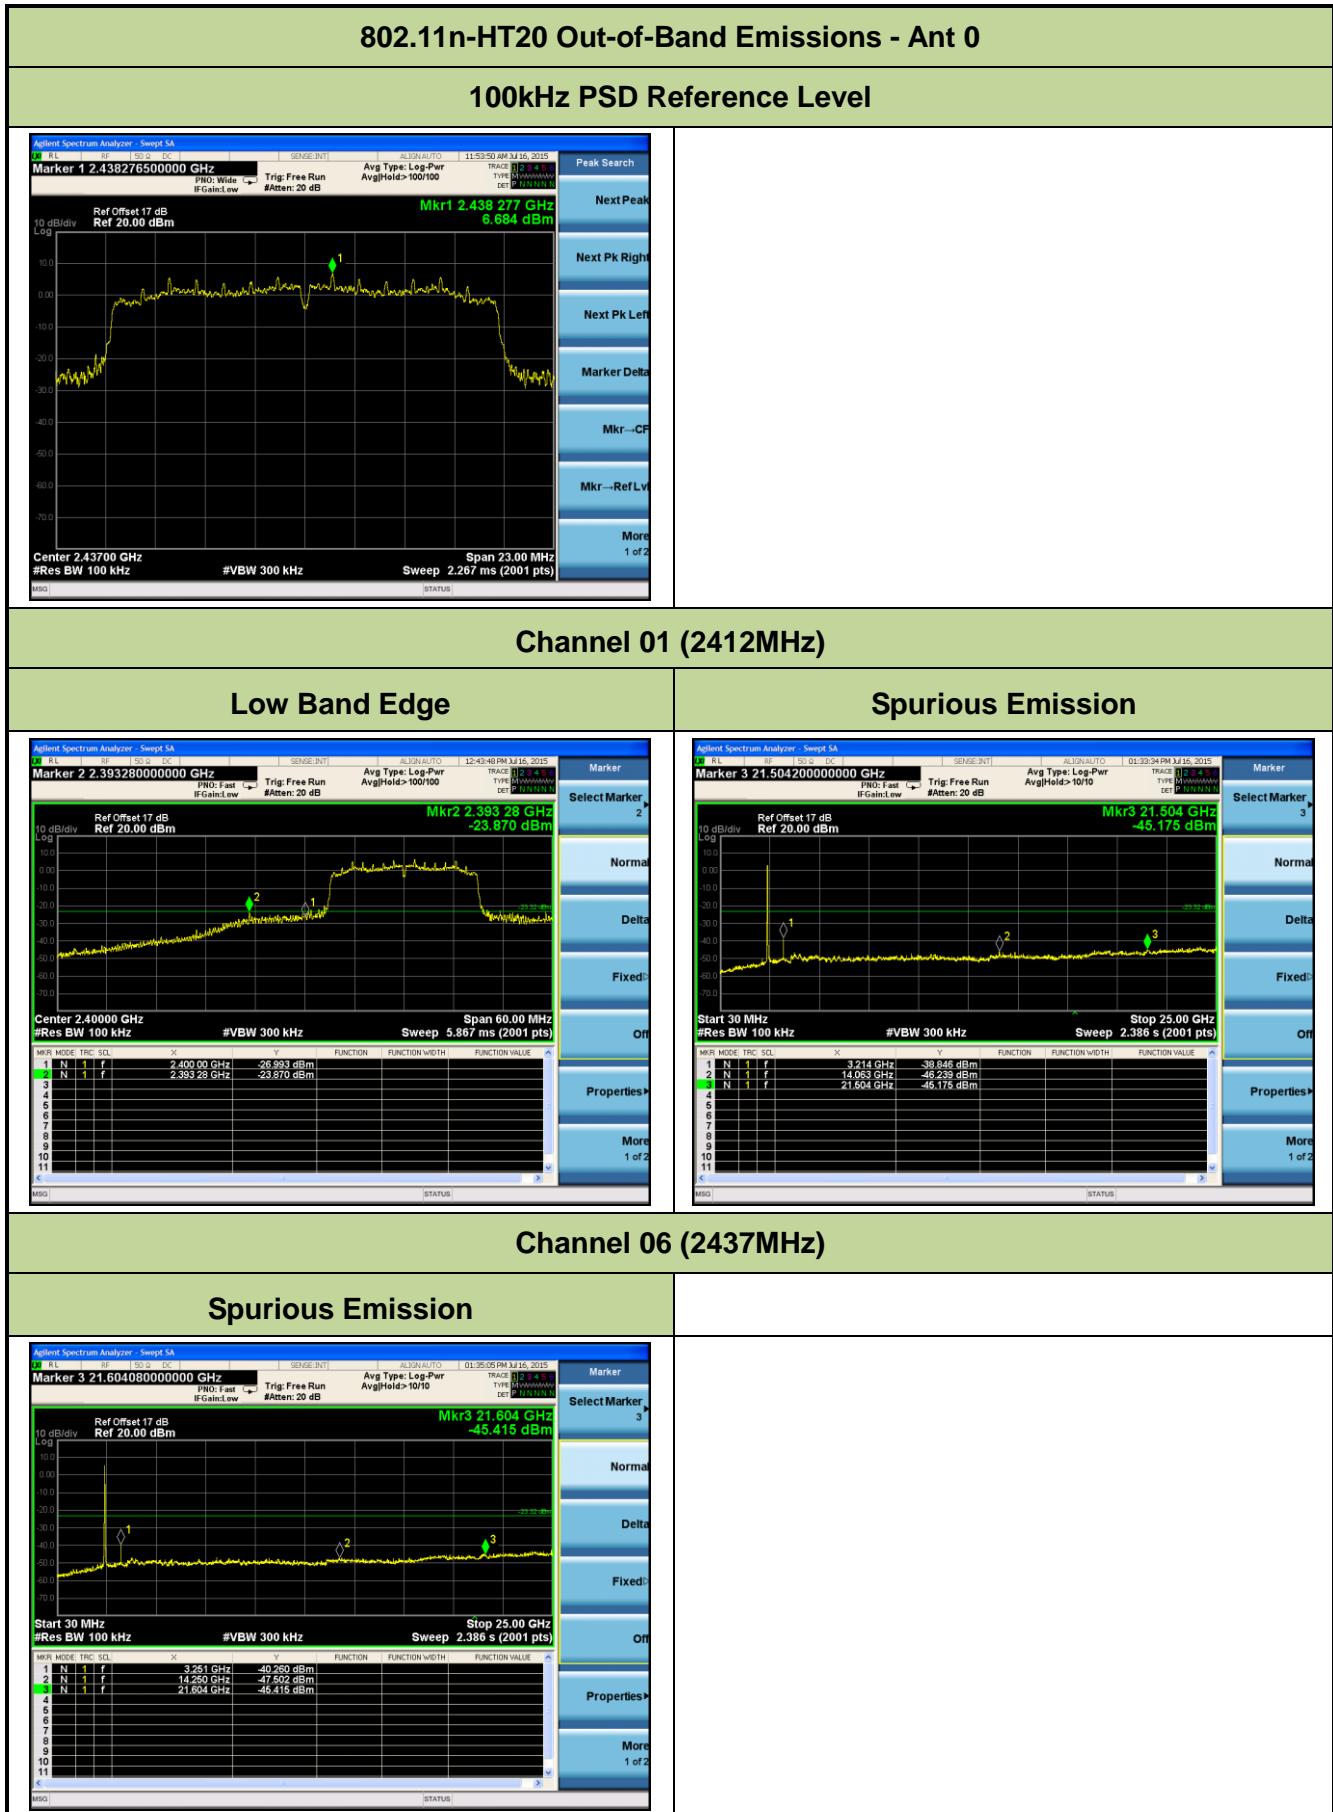


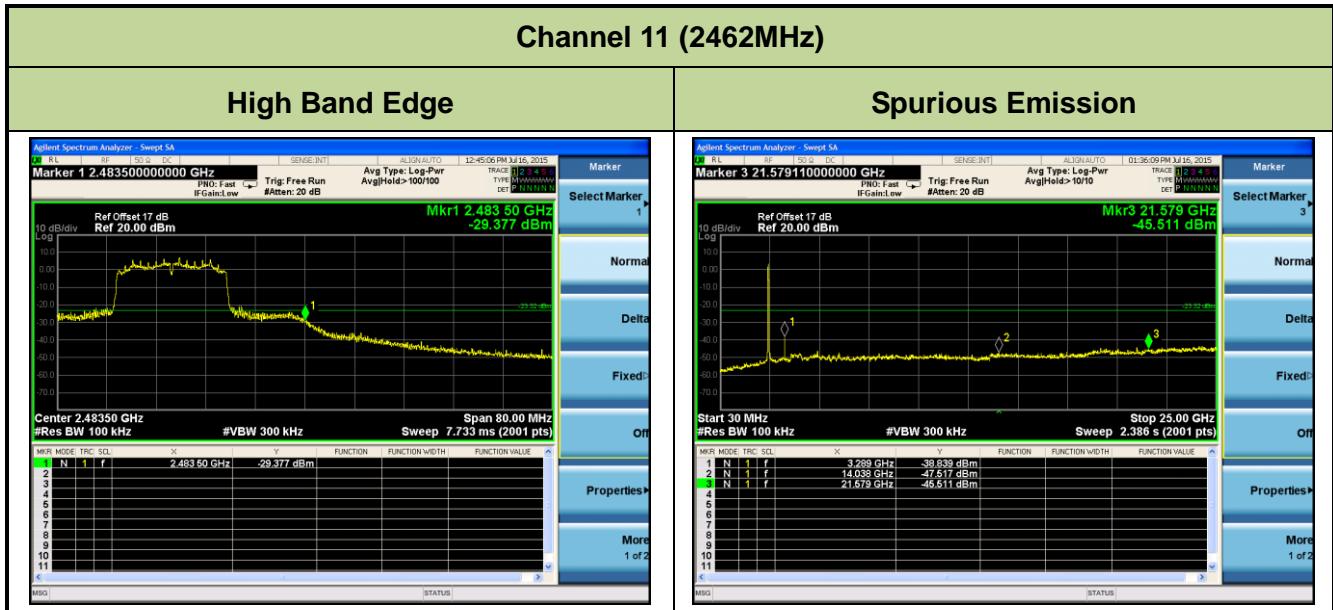


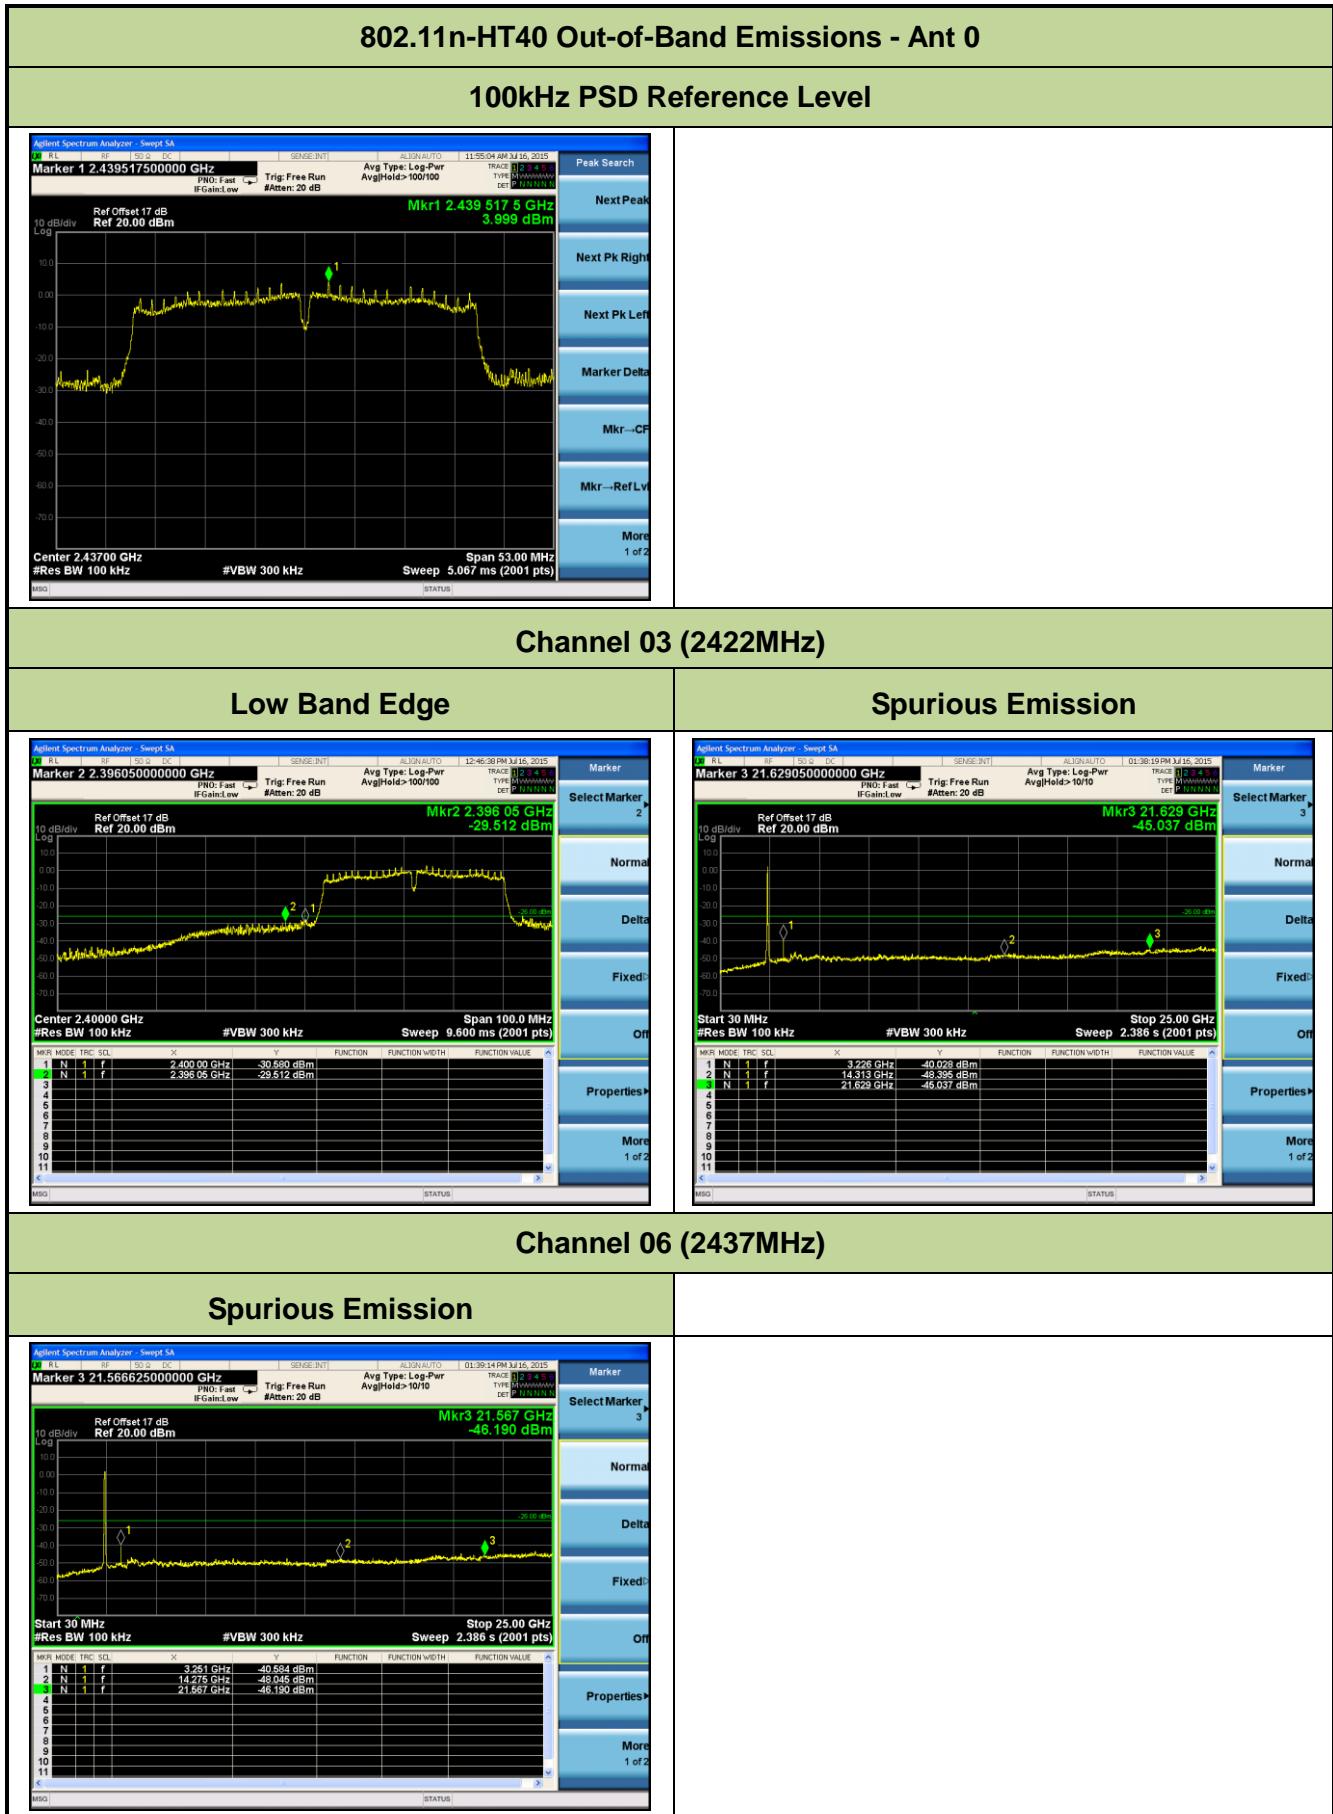


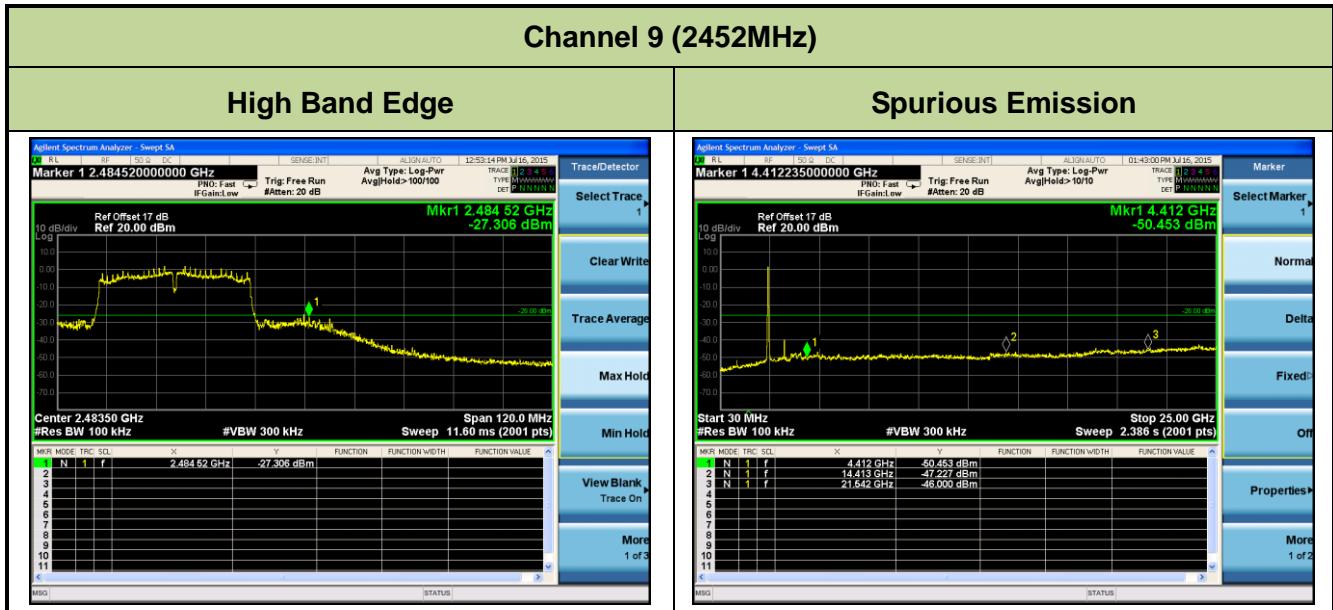


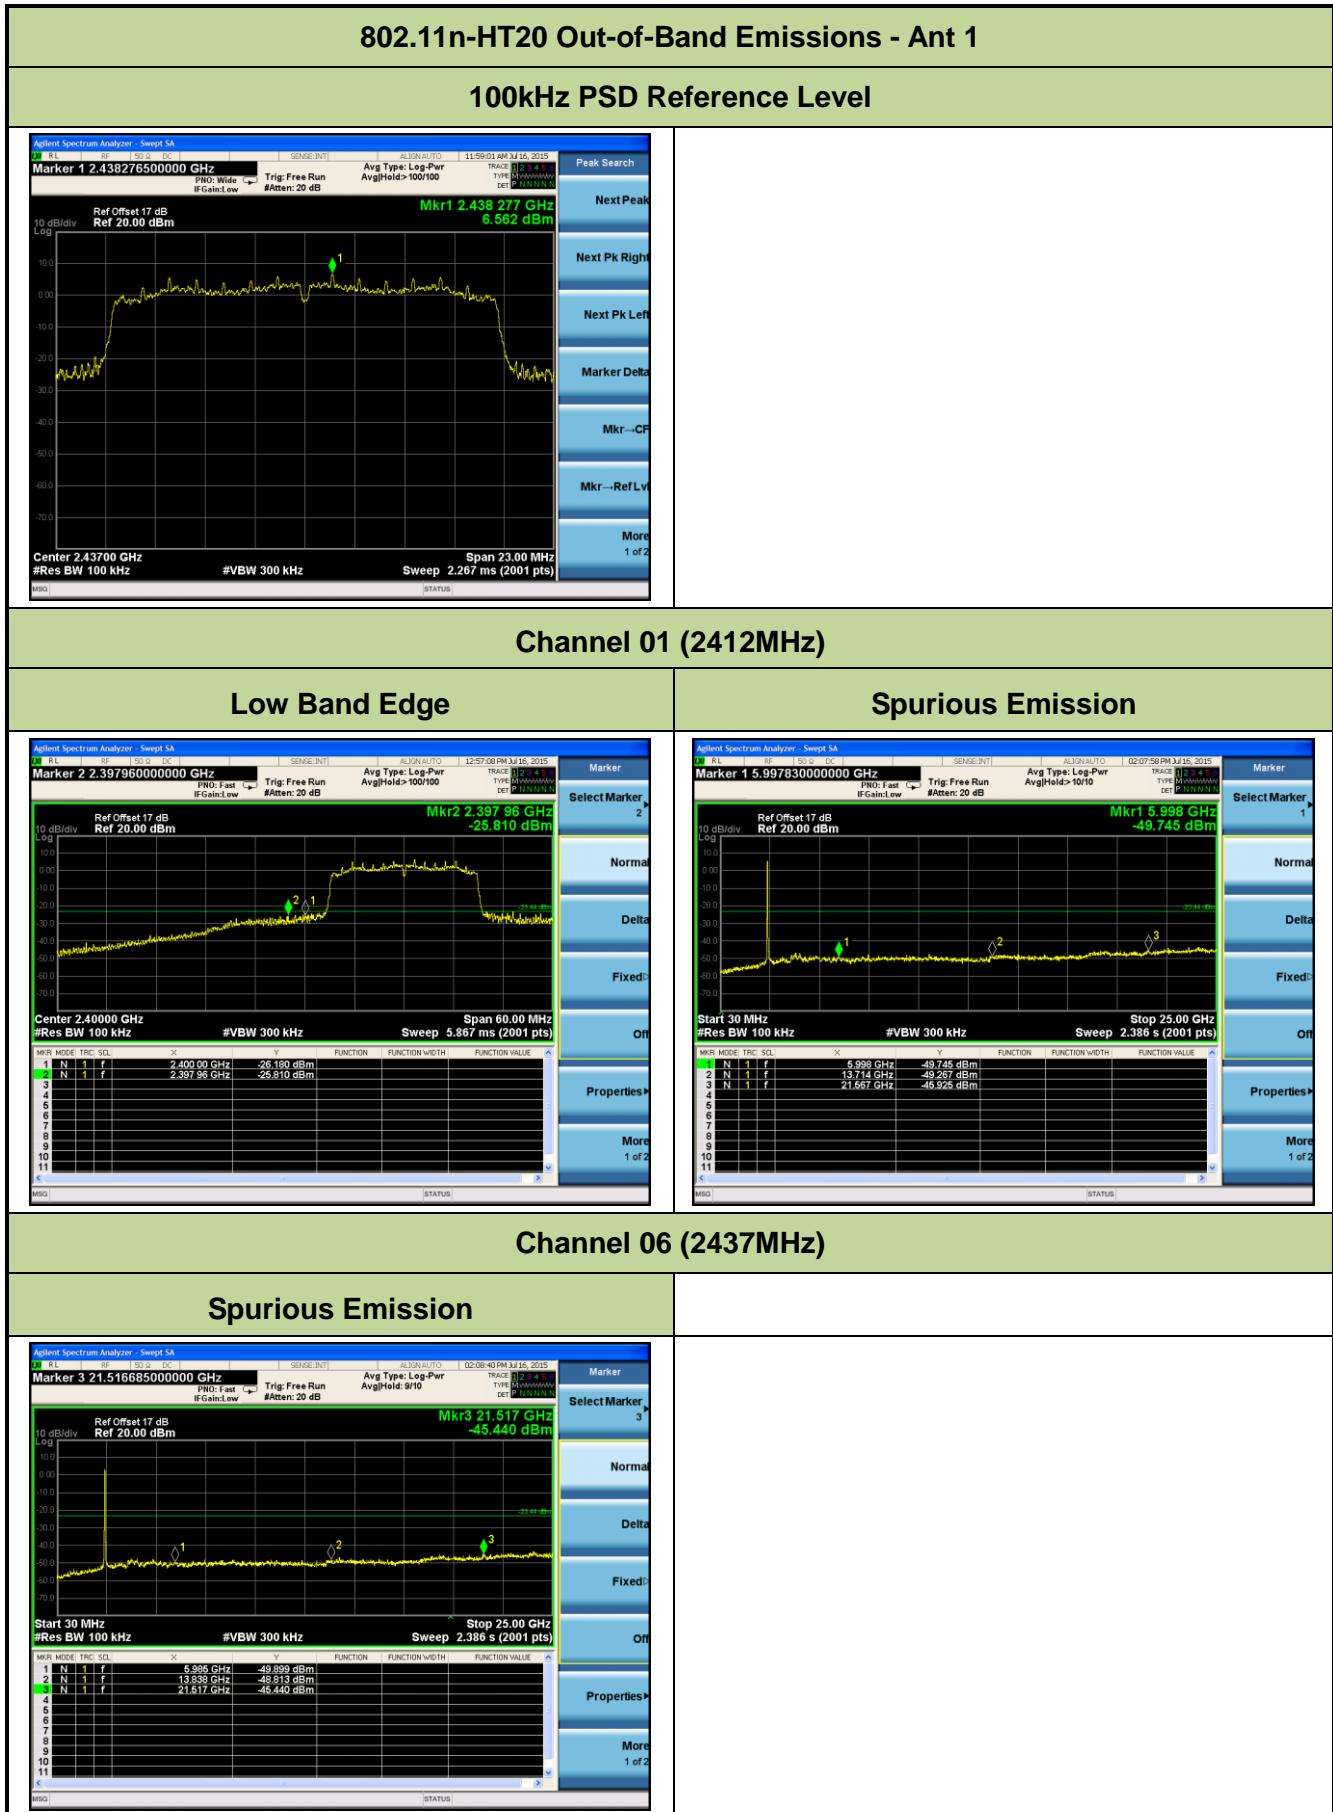


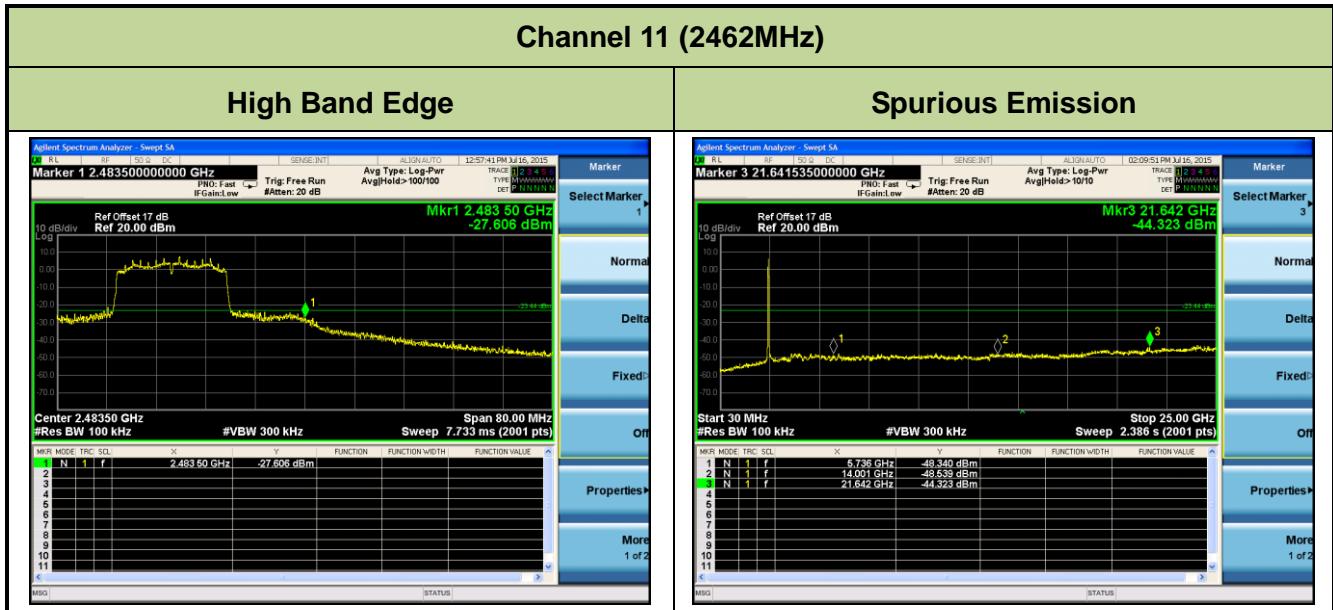

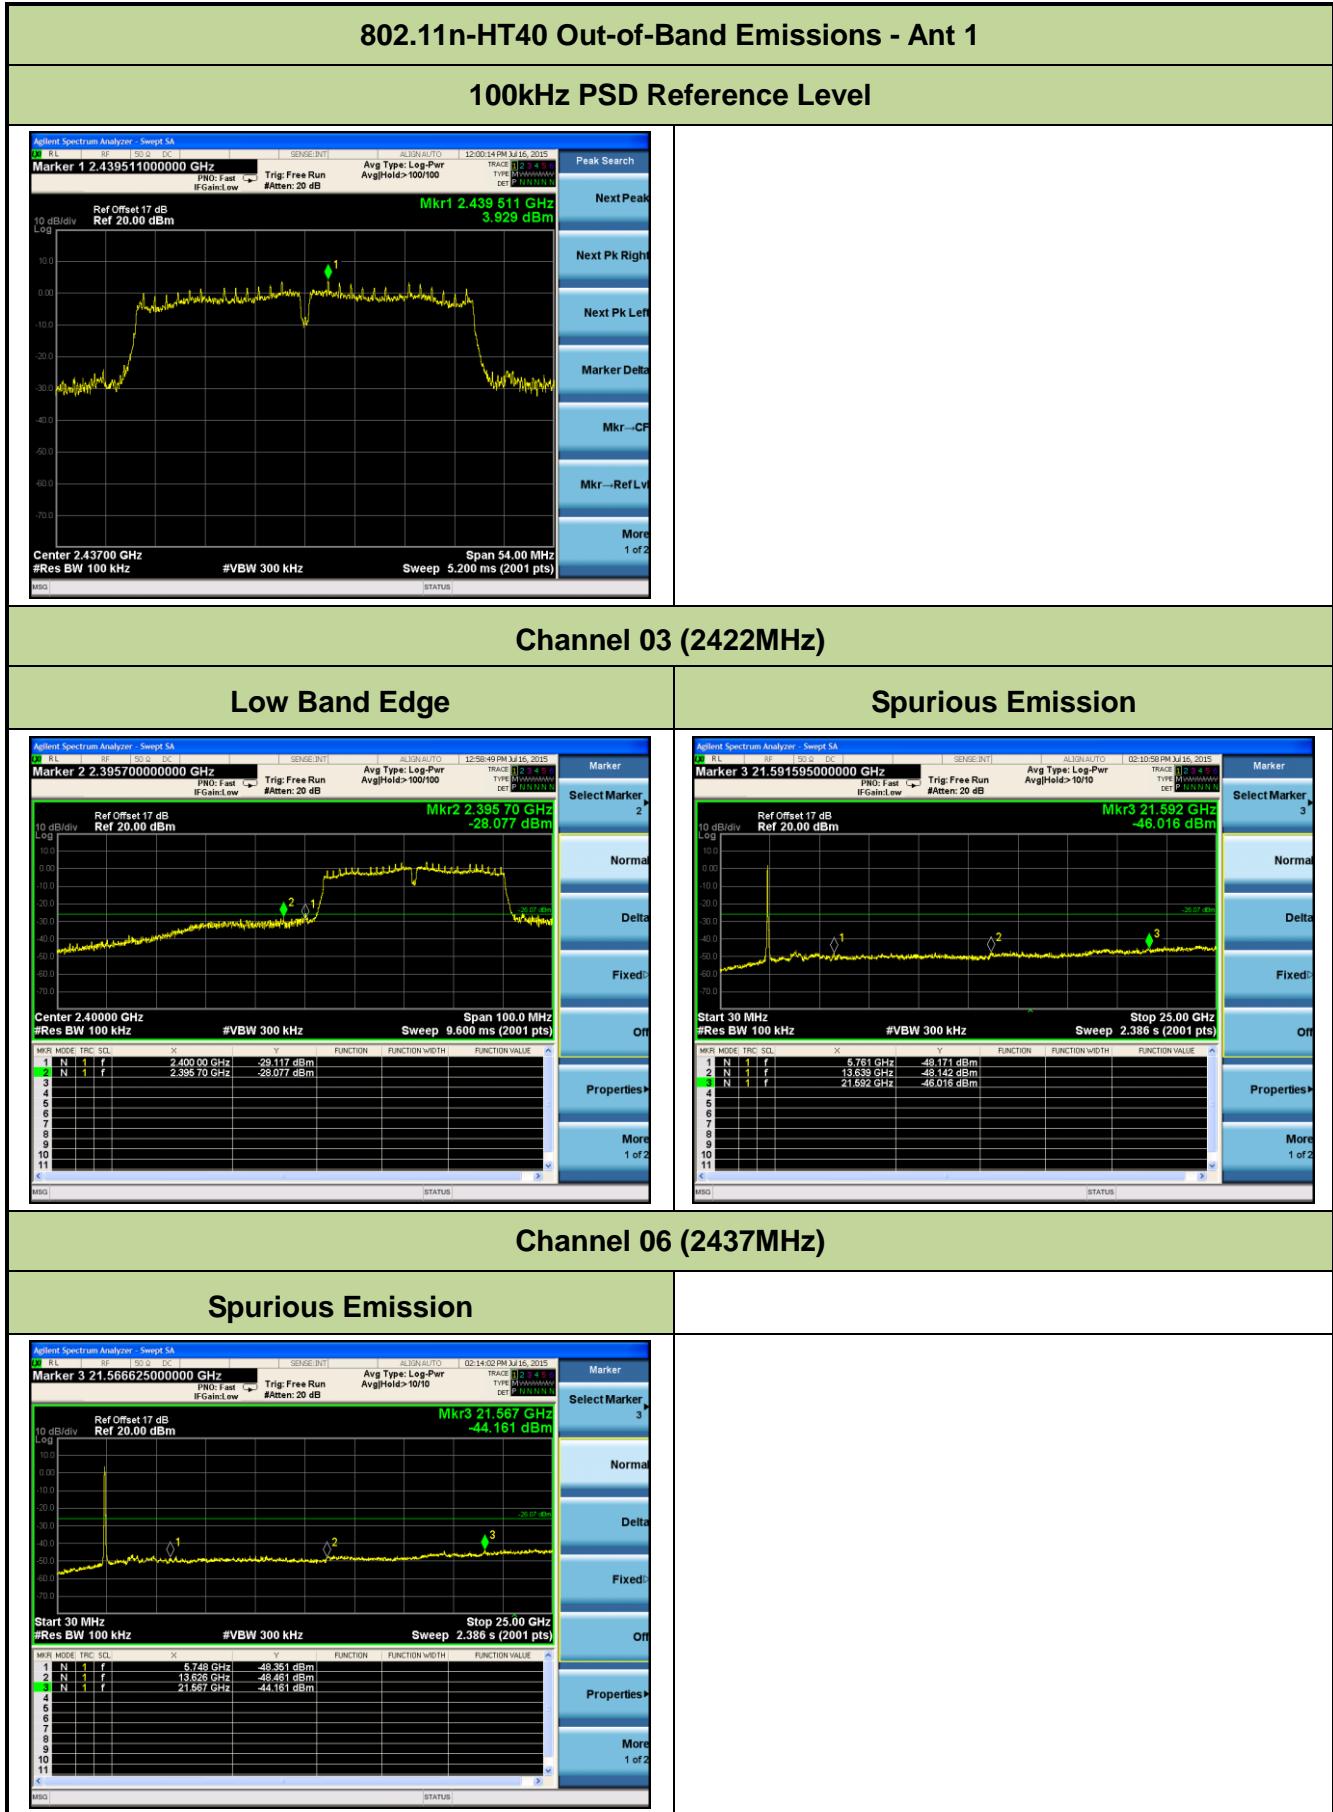

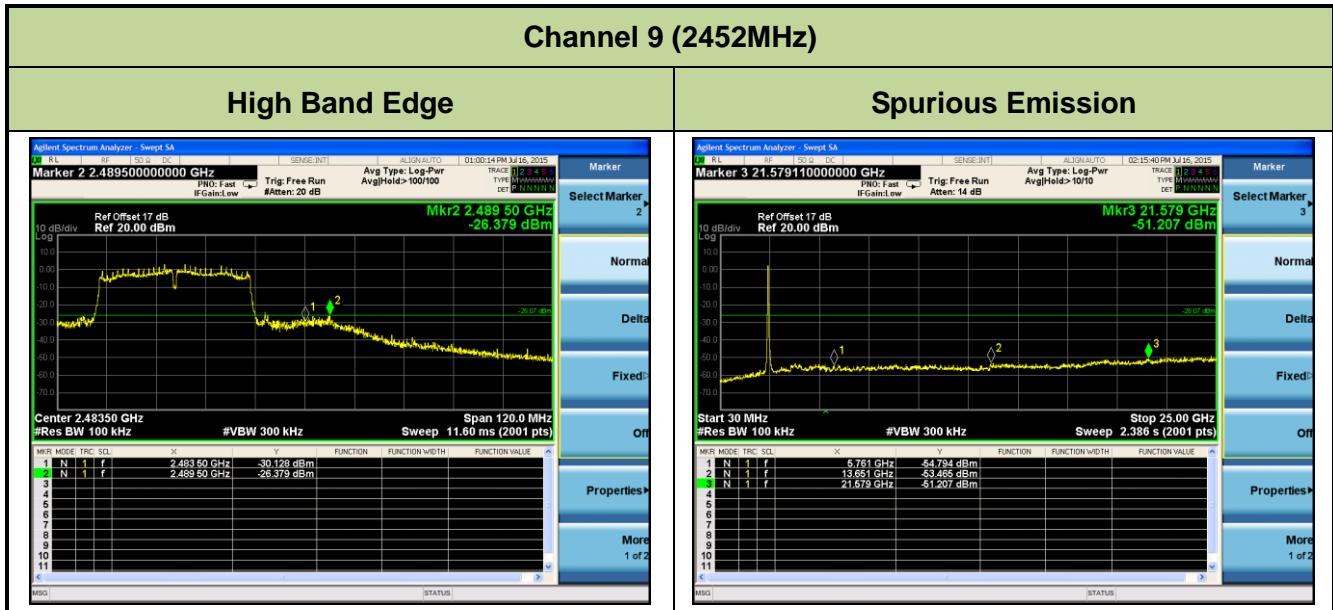


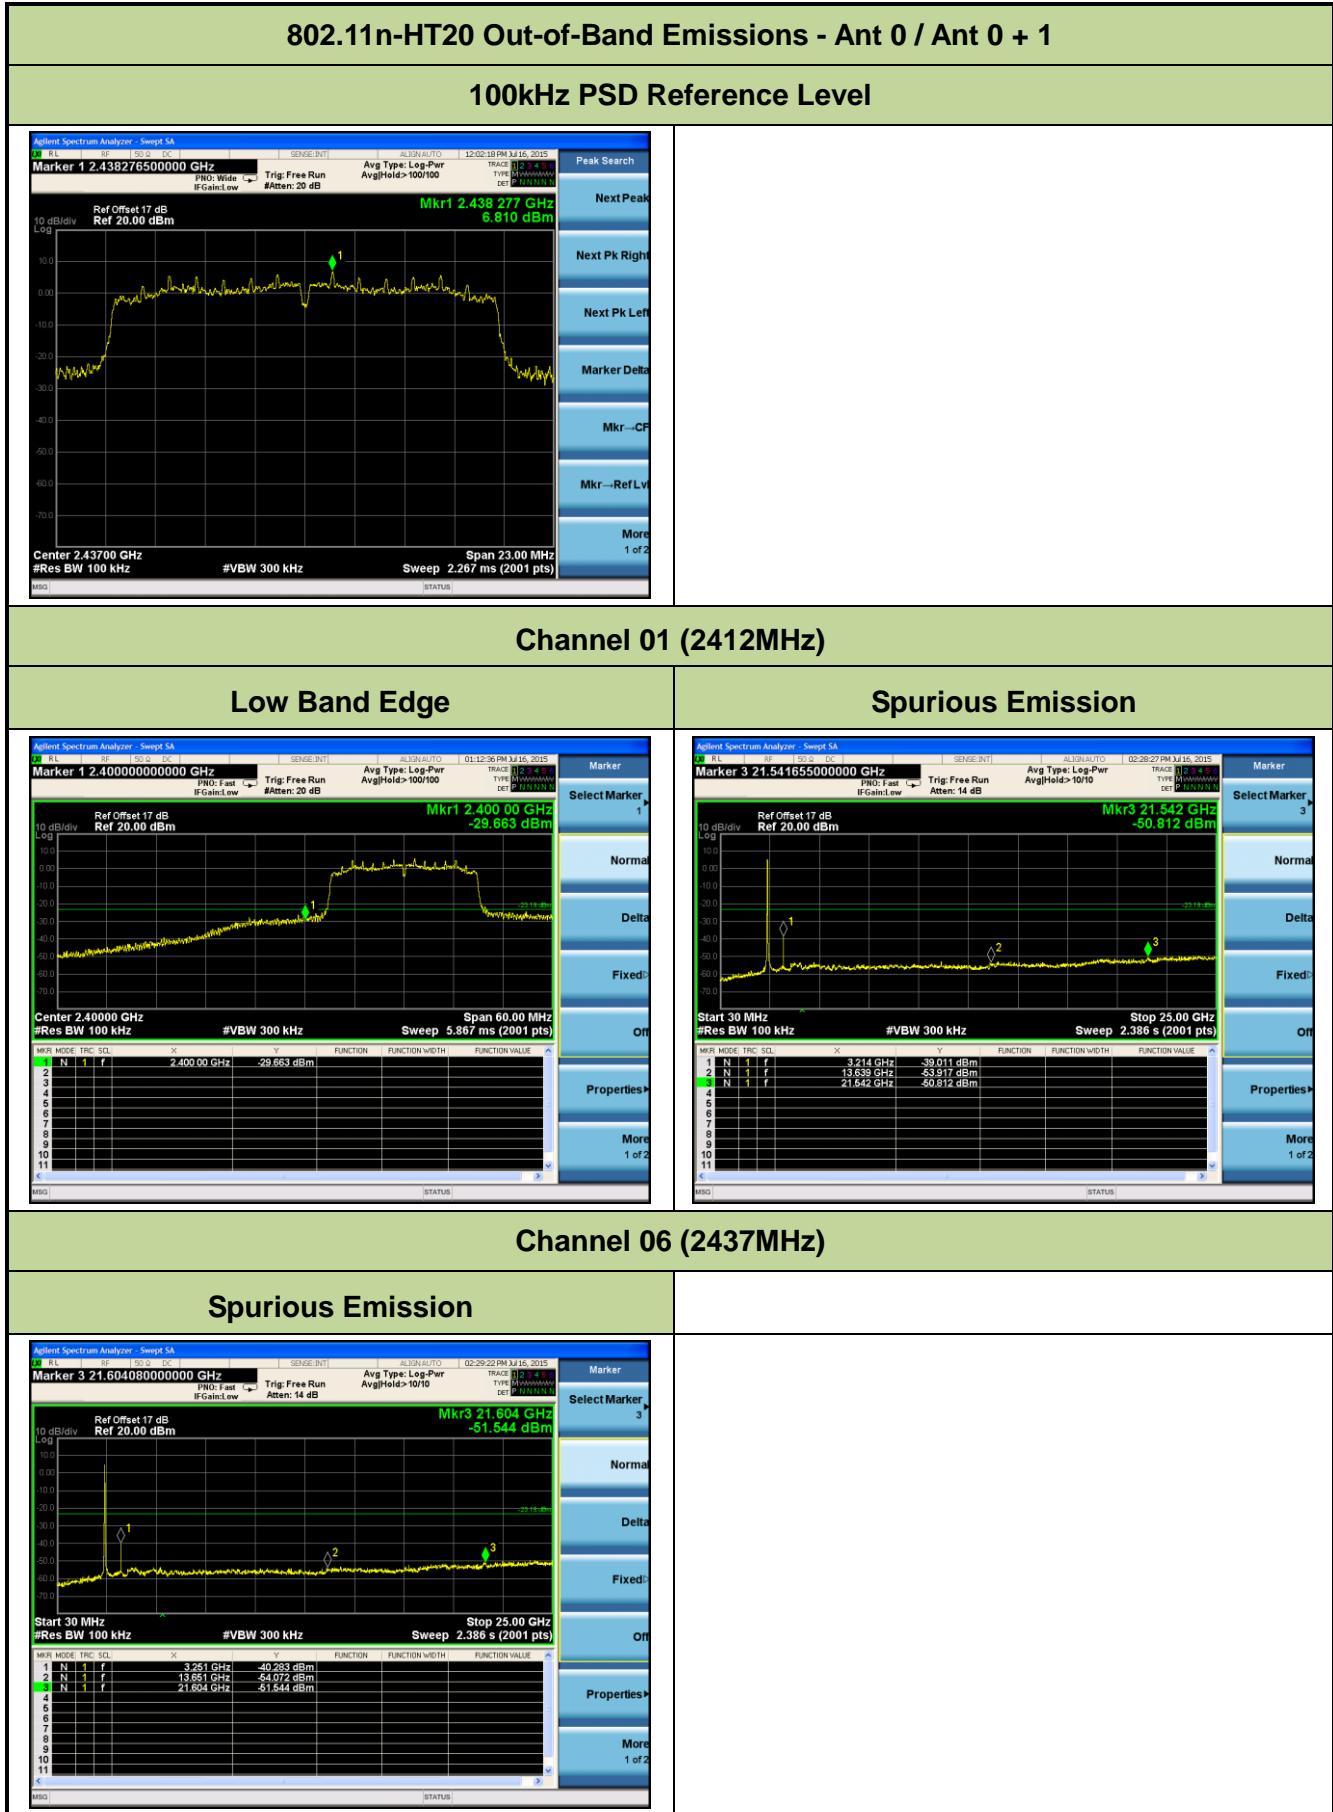

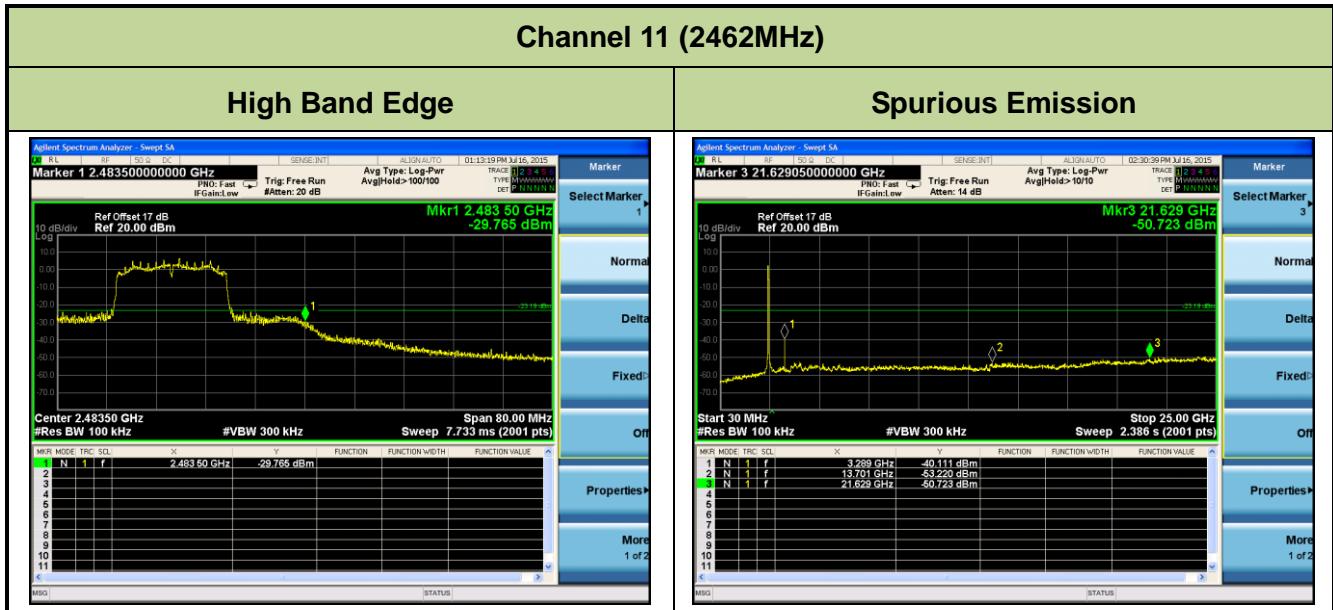

802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

100kHz PSD Reference Level

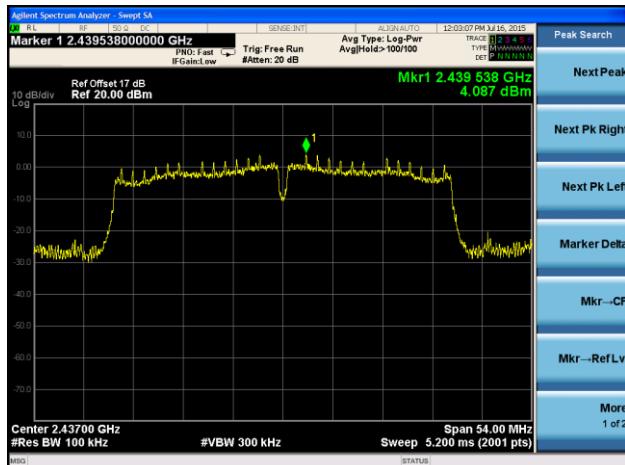


Channel 03 (2422MHz)

Low Band Edge





Spurious Emission

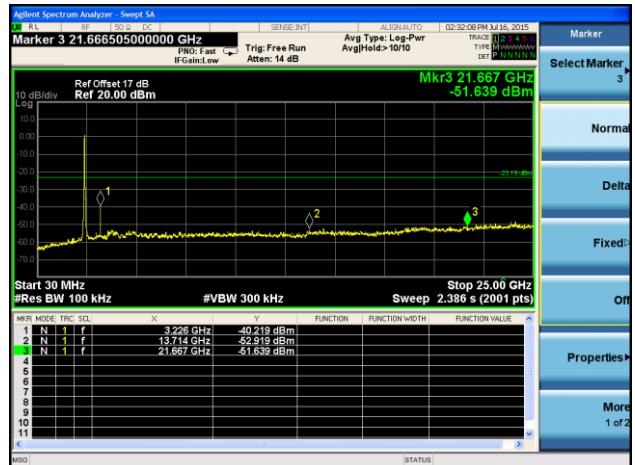

Channel 06 (2437MHz)

Spurious Emission

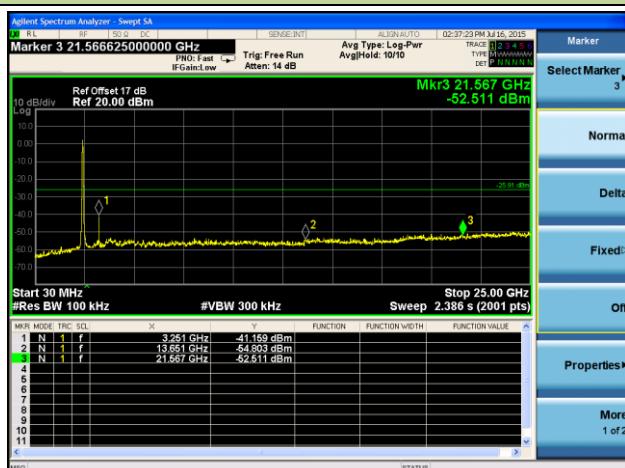

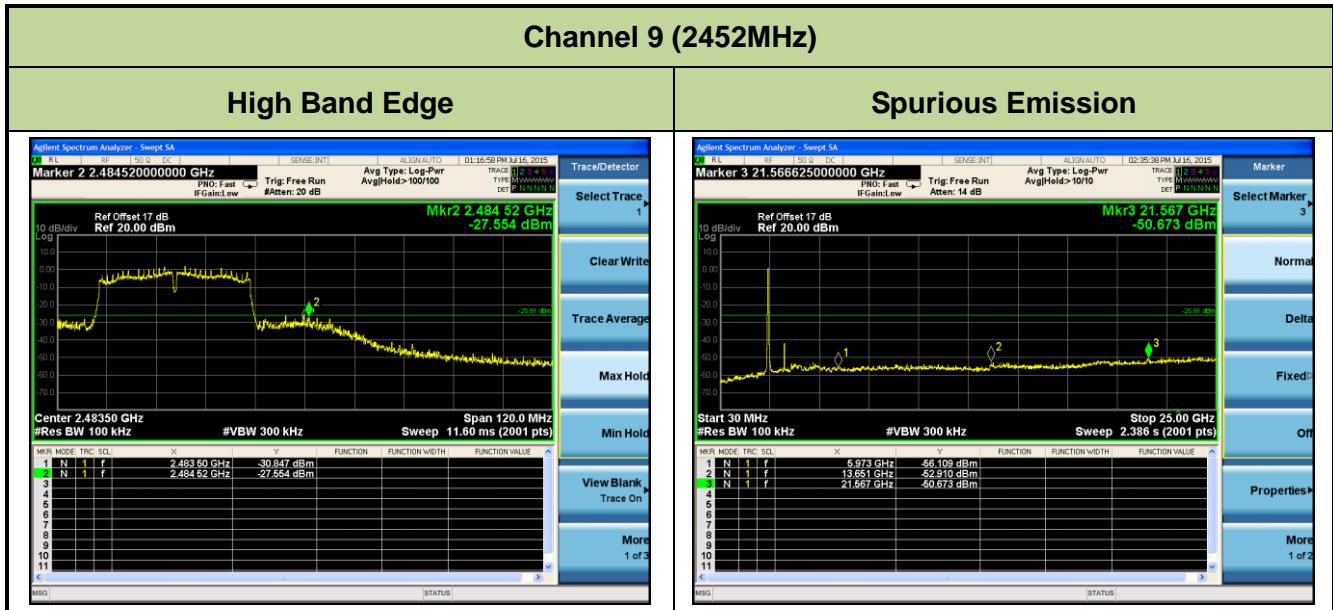

802.11n-HT20 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

100kHz PSD Reference Level




Channel 01 (2412MHz)

Low Band Edge





Spurious Emission

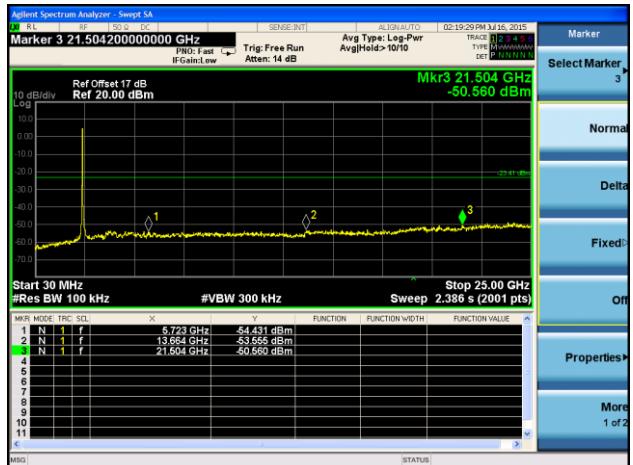

Channel 06 (2437MHz)


Spurious Emission

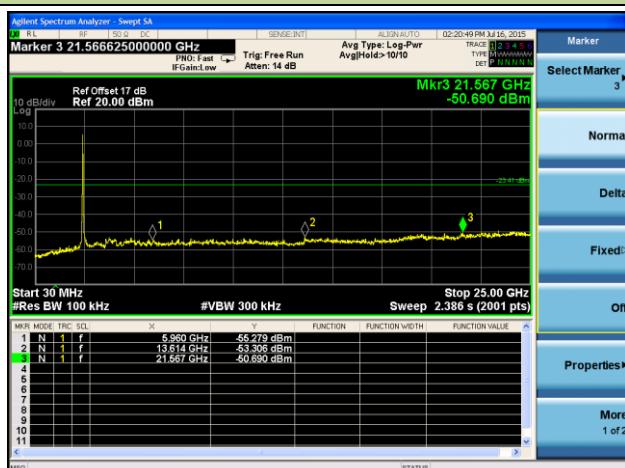

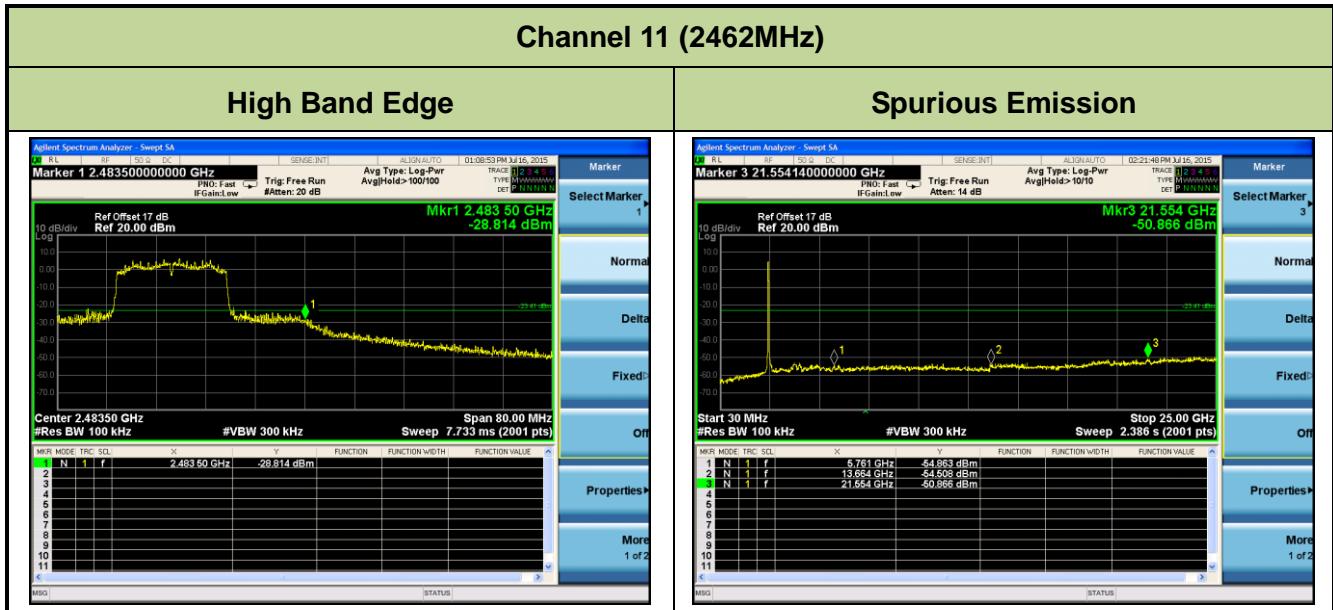

802.11n-HT40 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

100kHz PSD Reference Level

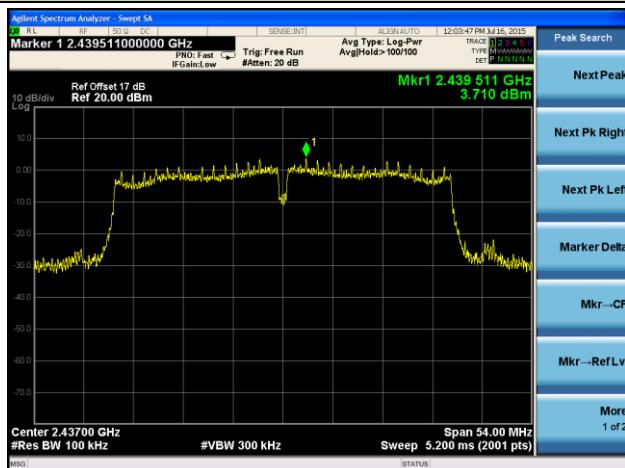


Channel 03 (2422MHz)

Low Band Edge





Spurious Emission

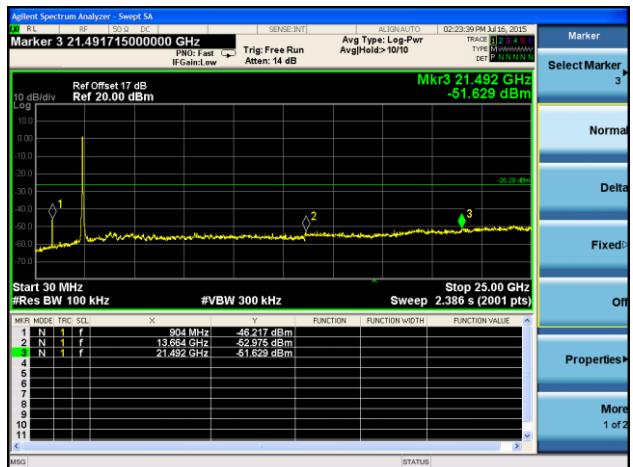

Channel 06 (2437MHz)

Spurious Emission

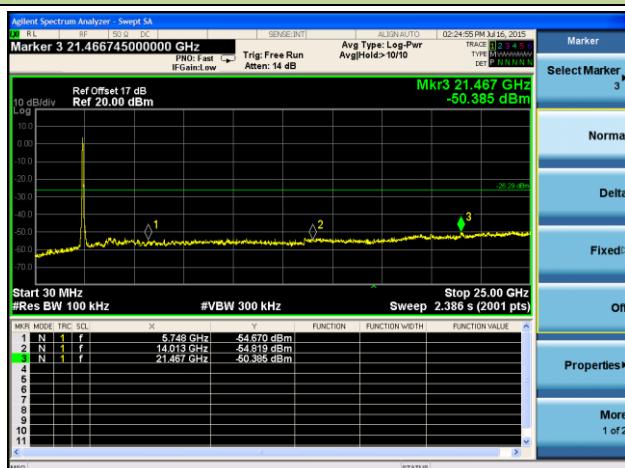

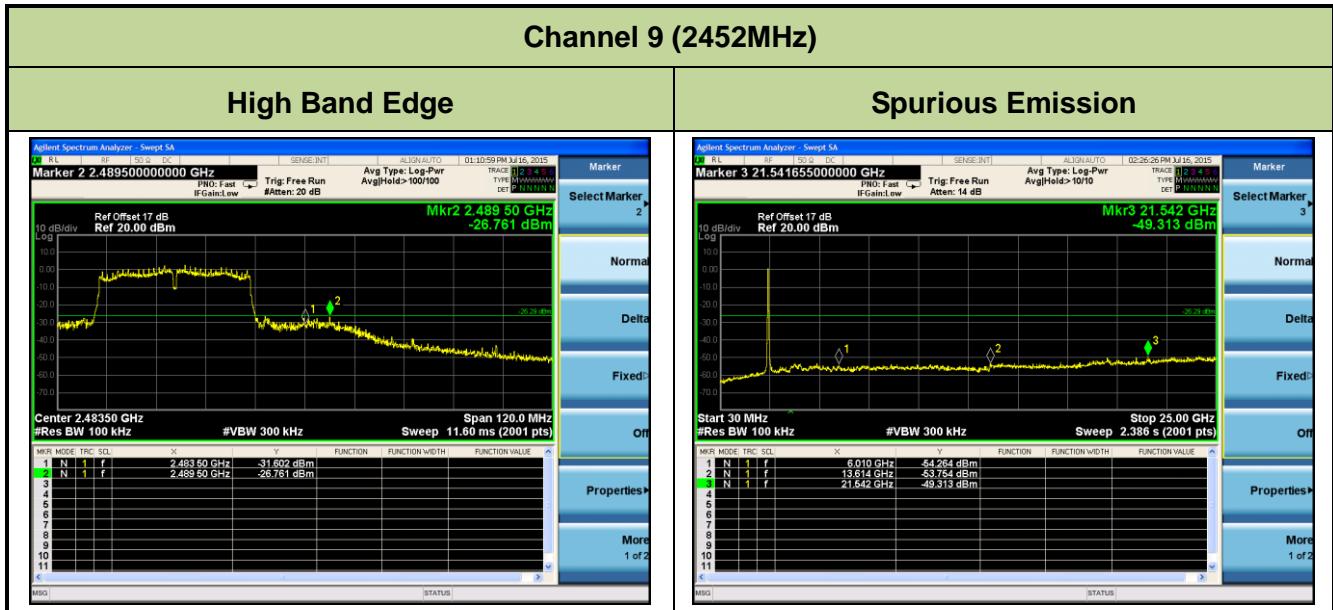

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz