Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F

FCC ID: 2ABM5W-100



FCC PART 15 SUBPART C MEASURMENT AND TEST REPORT

For

Zhong Shan City LI TAI Electronic Industrial Co., Ltd

No.3 Industrial District, Wuguishan Town, Zhongshan, Guangdong, China 528458

E.U.T.: Wi-Fi Speaker System

Model Name: W100

Brand Name: N/A

FCC ID: 2ABM5W-100

Report Number: NTC1501018F

Test Date(s): January 14, 2015 to February 10, 2015

Report Date(s): February 14, 2015

Prepared by

Dongguan Nore Testing Center Co., Ltd.

Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong, China

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer

Rose Hu / Engineer

Sunm Ly / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F FCC ID: 2ABM5W-100



Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	
1.6 TEST FACILITY AND LOCATION	
1.7 SUMMARY OF TEST RESULTS	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT CONFIGURATION	7
2.2 SPECIAL ACCESSORIES	7
2.3 DESCRIPTION OF TEST MODES	
2.4 EUT Exercise	
3. CONDUCTED EMISSIONS TEST	8
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
3.2 TEST CONDITION	8
3.3 MEASUREMENT RESULTS	8
4. RADIATED EMISSION TEST	11
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
4.2 MEASUREMENT PROCEDURE	12
4.3 LIMIT	
4.4 MEASUREMENT RESULTS	14
5. CHANNEL SEPARATION TEST	17
5.1 MEASUREMENT PROCEDURE	17
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
5.3 MEASUREMENT RESULTS	17
6. 20DB BANDWIDTH	23
6.1 MEASUREMENT PROCEDURE	23
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	23
6.3 MEASUREMENT RESULTS	23
7. HOPPING CHANNEL NUMBER	24
7.1 MEASUREMENT PROCEDURE	
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3 MEASUREMENT RESULTS	29



8. TIME OF OCCUPANCY (DWELL TIME)	31
8.1 MEASUREMENT PROCEDURE	31
8.2 MEASUREMENT RESULTS	31
9. MAXIMUM PEAK OUTPUT POWER	31
9.1 MEASUREMENT PROCEDURE	37
9.2 MEASUREMENT RESULTS	37
10. BAND EDGE	37
10.1 Measurement Procedure	43
10.2 LIMIT	43
10.3 MEASUREMENT RESULTS	43
11. ANTENNA APPLICATION	43
11.1 Antenna requirement	50
11.2 MEASUREMENT RESULTS	50
12. CONDUCTED SPURIOUS EMISSIONS	51
12.1 MEASUREMENT PROCEDURE	51
12.2. MEASUREMENT RESULTS	51
13. TEST EQUIPMENT LIST	54

Report No.: NTC1501018F FCC ID: 2ABM5W-100



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a BT & wifi speaker, it's powered by DC 15V come from Adapter. For more details features, please refer to User's Manual.

Manufacturer : Zhong Shan City LI TAI Electronic Industrial Co., Ltd

Address : No.3 Industrial District, Wuguishan Town,

Zhongshan, Guangdong, China 528458

Power Supply : DC 15V Come from adapter

Adapter M/N:SHF1500100A1BA

Input: AC 100-240V 50/60Hz 0.4A

Output: DC 15.0V 1.0A

Model name : W100

BT Version : 3.0+EDR

Frequency: : 2402-2480MHz

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

Number of Channel : 79

Channel space : 1MHz

Antenna Type : PCB

Antenna Gain : 1.13 dBi (declared by manufacturer)

Note : The EUT contains WIFI module

(FCC ID: PPD-CUS227)

Report No.: NTC1501018F FCC ID: 2ABM5W-100



1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ABM5W-100 filing to comply with Section 15.247 of the FCC Part 15 (2014), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

Report No.: NTC1501018F FCC ID: 2ABM5W-100



1.6 Test Facility and Location

Listed by FCC, August 02, 2011 The Certificate Registration Number is 665078. Listed by Industry Canada, July 01, 2011 The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.

(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong, China (Full Name: Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

Report No.: NTC1501018F FCC ID: 2ABM5W-100



2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK, 8DPSK were tested.

2.4 EUT Exercise


The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

Report No.: NTC1501018F FCC ID: 2ABM5W-100



3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

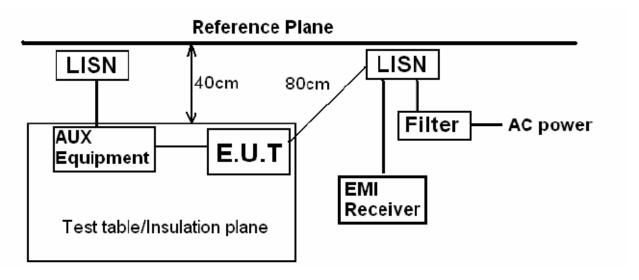

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: BT Mode

3.3 Measurement Results

Please refer to following plots.

Report No.: NTC1501018F **FCC ID: 2ABM5W-100**






Dongguan NTC Co., Ltd. Tel: +86-769-22022444 Fax: +86-769-22022799

gCenter Web: Http://www.ntc-c.com

Site: Conduction

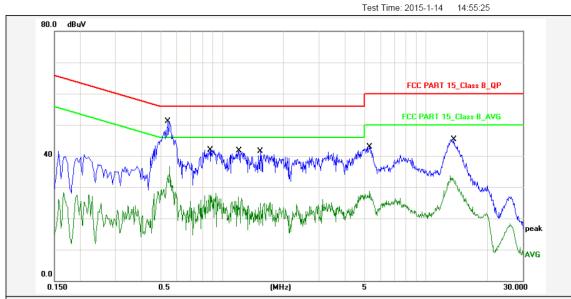

Report No.:

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission Phase: L1

Applicant: Temp.()/Hum.(%): 22(C) / 50 % Product: Wi-Fi Speaker System Power Rating: AC 120V/60Hz

Model No.: W100 Test Engineer: Stan

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5420	10.80	37.30	48.10	56.00	-7.90	QP	Р	
2	0.5420	10.80	22.80	33.60	46.00	-12.40	AVG	Р	
3	0.8740	10.80	28.10	38.90	56.00	-17.10	QP	Р	
4	0.8740	10.80	13.70	24.50	46.00	-21.50	AVG	Р	
5	1.2140	10.80	27.80	38.60	56.00	-17.40	QP	Р	
6	1.2140	10.80	13.10	23.90	46.00	-22.10	AVG	Р	
7	1.5380	10.80	27.60	38.40	56.00	-17.60	QP	Р	
8	1.5380	10.80	11.10	21.90	46.00	-24.10	AVG	Р	
9	5.2938	10.80	29.00	39.80	60.00	-20.20	QP	Р	
10	5.2938	10.80	14.80	25.60	50.00	-24.40	AVG	Р	
11	13.7979	10.80	31.50	42.30	60.00	-17.70	QP	Р	
12	13.7979	10.80	19.30	30.10	50.00	-19.90	AVG	Р	

Note: Level=Reading+Factor. Margin=Limit-Level.


Report No.: NTC1501018F FCC ID: 2ABM5W-100



Site: Conduction



Dongguan NTC Co., Ltd. Tel: +86-769-22022444 Fax: +86-769-22022799 Web: <u>Http://www.ntc-c.com</u>

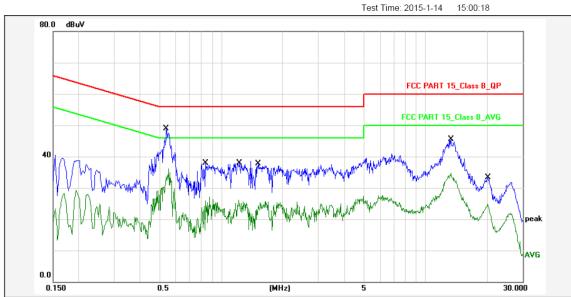

Report No.:

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission Phase:

Applicant: 22(C) / 50 % Temp.()/Hum.(%): Product: Wi-Fi Speaker System Power Rating: AC 120V/60Hz

Test Engineer: Model No.: W100 Stan

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5380	10.80	35.10	45.90	56.00	-10.10	QP	Р	
2	0.5380	10.80	22.30	33.10	46.00	-12.90	AVG	Р	
3	0.8420	10.80	24.00	34.80	56.00	-21.20	QP	Р	
4	0.8420	10.80	13.30	24.10	46.00	-21.90	AVG	Р	
5	1.2300	10.80	24.10	34.90	56.00	-21.10	QP	Р	
6	1.2300	10.80	12.30	23.10	46.00	-22.90	AVG	Р	
7	1.5260	10.80	23.90	34.70	56.00	-21.30	QP	Р	
8	1.5260	10.80	11.40	22.20	46.00	-23.80	AVG	Р	
9	13.3499	10.80	31.60	42.40	60.00	-17.60	QP	Р	
10	13.3499	10.80	20.80	31.60	50.00	-18.40	AVG	Р	
11	20.3660	10.80	19.40	30.20	60.00	-29.80	QP	Р	
12	20.3660	10.80	11.00	21.80	50.00	-28.20	AVG	Ք	


Note: Level=Reading+Factor. Margin=Limit-Level.




4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)


4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

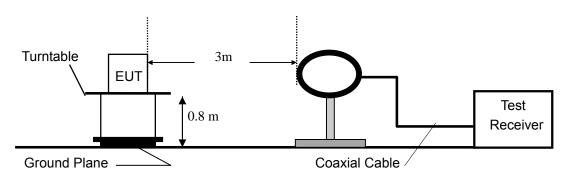

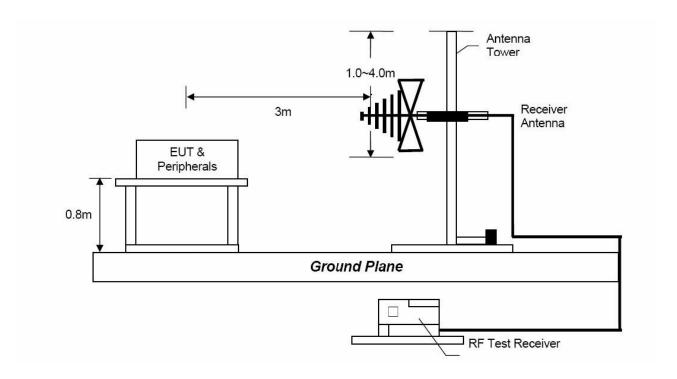



4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

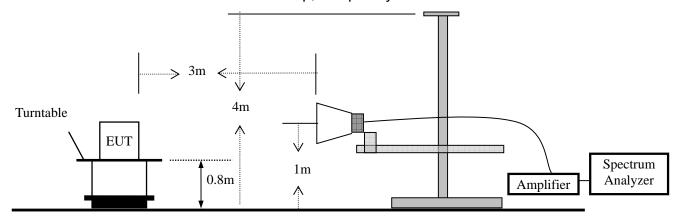

4.2 Measurement Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- e. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

For 30MHz to 1GHz:

Sept the spectrum analyzer as: RBW=120kHz, VBW=300kHz, Detector=Quasi-Peak

For Above 1GHz:

Set the spectrum analyzer as: RBW=1MHz, VBW=3MHz, Detector=Peak. Set the spectrum analyzer as: RBW=1MHz, VBW=10Hz, Detector=Peak.

Report No.: NTC1501018F FCC ID: 2ABM5W-100



During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
Above 1000	Average	1 MHz	10 Hz

4.3 Limit

Frequency range	Distance Meters	Field Strengths Limit (15.209)
MHz		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Report No.: NTC1501018F FCC ID: 2ABM5W-100



4.4 Measurement Results

Operation Mode: TX (the worst case 8DPSK, Lowest channel)
Frequency Range: 9KHz~1GHz Temperature: 21 °C
Test Result: PASS Humidity: 48 %
Measured Distance: 3m Test By: Sance

Test Date: January 07, 2015

Freq.	Ant.Pol.	Reading	Factor	Emission	Limit	Margin	Note
		Level		Level	3m		
(MHz)	H/V	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
69.7700	V	42.64	-17.31	25.33	40.00	-14.67	QP
229.8200	V	51.10	-15.46	35.64	46.00	-10.36	QP
709.9700	V	38.26	-3.58	34.68	46.00	-11.32	QP
720.6400	V	38.37	-3.28	35.09	46.00	-10.91	QP
229.8200	Н	54.84	-12.46	42.36	46.00	-3.62	QP
315.1800	Н	45.71	-10.06	35.65	46.00	-10.35	QP
400.5400	Н	44.22	-9.10	35.12	46.00	-10.88	QP
600.3600	Н	43.76	-5.00	38.76	46.00	-7.24	QP
695.4200	Н	42.93	-3.96	38.97	46.00	-7.03	QP


Other emissions are lower than 10dB below the allowable limit.

Note: (1) Emission Level= Reading Level + Factor

- (2) Factor= Antenna Gain + Cable Loss Amplifier Gain
- (3) Measurement uncertainty: ±3.4dB
- (4) Loop antenna used for the emission below 30MHz.
- (5) Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Report No.: NTC1501018F FCC ID: 2ABM5W-100



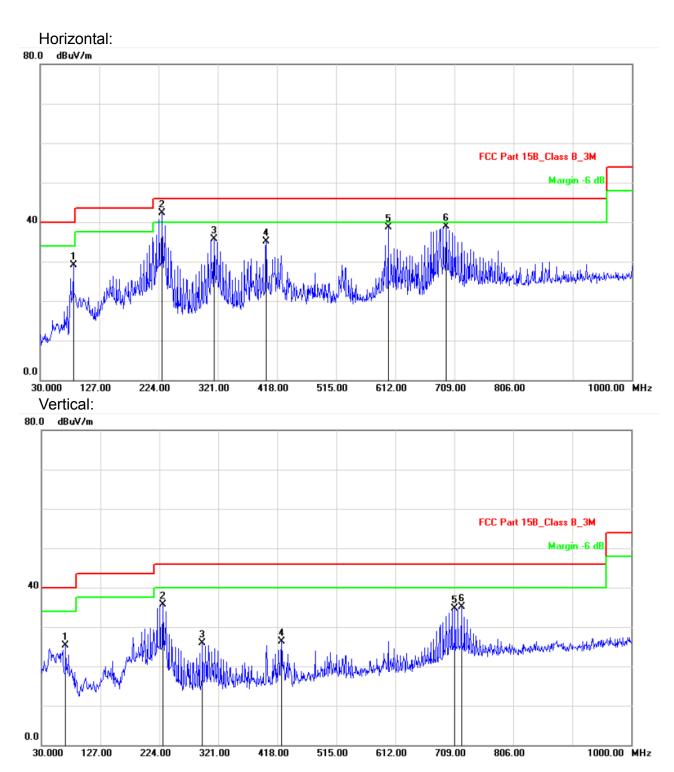

Report No.: NTC1501018F FCC ID: 2ABM5W-100



Modulation: GFSK (the worst case)

Frequency Range: 1-25GHz Test Date: January 14, 2015

Test Result: PASS Temperature: 21 °C Measured Distance: 3m Humidity: 48 %

Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Rea Level(- Leactor		Emissio (dBı			t 3m V/m)	Maı (d	rgin B)
(IVITIZ)	(PK	AV	(ub/III)	PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	40.12	33.77	14.63	54.75	48.40	74.00	54.00	-19.25	-5.60
7206	V	35.43	24.94	20.68	56.11	45.62	74.00	54.00	-17.89	-8.38
4804	Н	39.42	30.36	14.63	54.05	44.99	74.00	54.00	-19.95	-9.01
7206	Н	34.77	24.71	20.68	55.45	45.39	74.00	54.00	-18.55	-8.61
Operation Mode: TX Mode (Mid)										
4882	V	37.73	30.25	14.97	52.70	45.22	74.00	54.00	-21.30	-8.78
7323	V	32.38	25.01	20.91	53.29	45.92	74.00	54.00	-20.71	-8.08
4882	Н	40.86	30.35	14.97	55.83	45.32	74.00	54.00	-18.17	-8.68
7323	Н	35.19	22.03	20.91	56.10	42.94	74.00	54.00	-17.90	-11.06
			Oper	ation Mo	de: TX M	ode (Hig	gh)			
4960	V	37.03	27.91	15.30	52.33	43.21	74.00	54.00	-21.67	-10.79
7440	V	34.29	23.89	21.16	55.45	45.05	74.00	54.00	-18.55	-8.95
4960	Н	40.30	27.33	15.30	55.60	42.63	74.00	54.00	-18.40	-11.37
7440	Н	34.11	22.01	21.16	55.27	43.17	74.00	54.00	-18.73	-10.83

Note: (1) All Readings are Peak Value and AV.

- (2) Emission Level= Reading Level + Factor
- (3) Factor= Antenna Gain + Cable Loss Amplifier Gain
- (4) Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
- (5) Measurement uncertainty: ±3.7dB.
- (6) Horn antenna used for the emission over 1000MHz.

Report No.: NTC1501018F FCC ID: 2ABM5W-100




5. Channel Separation test

5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Results

Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz

Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: Jan., 20, 2015

Temperature: 21 °C Humidity: 48 %


Test Result: PASS

Channel number	Channel	Separation Read	Separation Limit				
	frequency (MHz)	Value (KHz)	(KHz)				
		GFSK					
Lowest	2402	1005	>958				
Middle	2441	1005	>954				
Highest	2480	1000	>962				
π/4-DQPSK							
Lowest	2402	1000	>895				
Middle	2441	1000	>881				
Highest	2480	1000	>879				
	8DPSK						
Lowest	2402	1005	>876				
Middle	2441	1000	>876				
Highest	2480	1000	>876				

Report No.: N I C15010 FCC ID: 2ABM5W-100



GFSK Lowest Channel

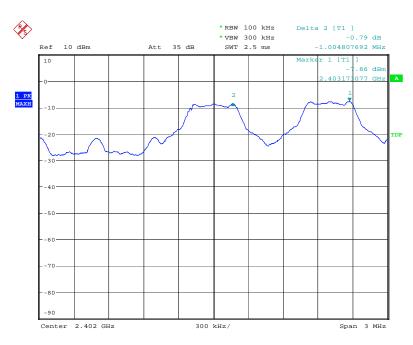

Date: 20.JAN.2015 15:47:05

GFSK Middle Channel



Date: 20.JAN.2015 15:48:36

FCC ID: 2ABM5W-100




GFSK Highest Channel



Date: 20.JAN.2015 15:49:44


π/4-DQPSK Lowest Channel

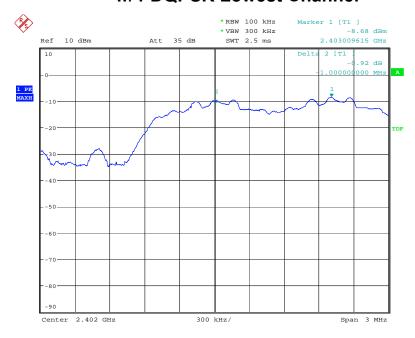

Date: 20.JAN.2015 15:51:54




π/4-DQPSK Middle Channel

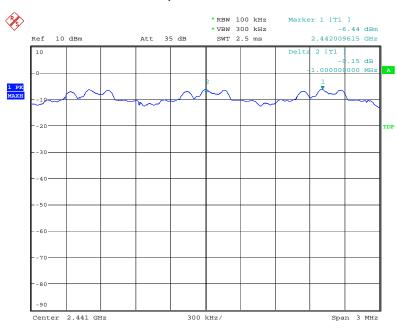

Date: 20.JAN.2015 15:54:50


π/4-DQPSK Highest Channel

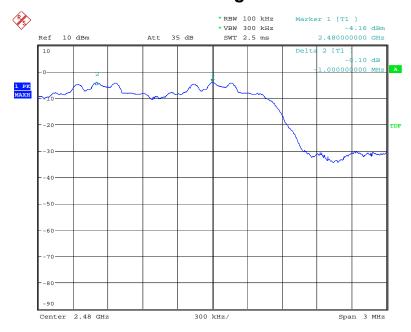

Date: 20.JAN.2015 15:56:37




8DPSK Lowest Channel

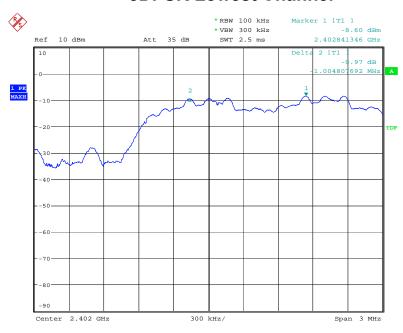

Date: 20.JAN.2015 15:58:35

8DPSK Middle Channel

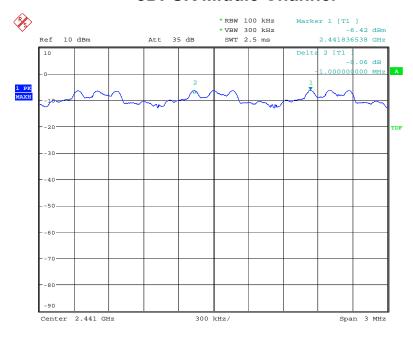


Date: 20.JAN.2015 16:00:26

FCC ID: 2ABM5W-100



8DPSK Highest Channel

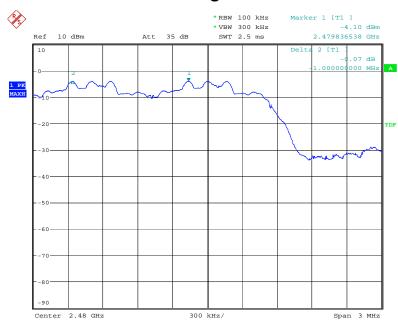

Date: 20.JAN.2015 16:01:33

Report No.: NTC1501018F FCC ID: 2ABM5W-100



6. 20dB Bandwidth

6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Results

Refer to attached data chart.

Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK

RBW: 30KHz VBW: 100KHz Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: Jan., 20, 2015

Temperature : 21 $^{\circ}$ C Humidity : 48 $^{\circ}$


Test Result: PASS

Channel frequency (MHz)	20dB Down BW(kHz)		
GF	SK		
2402	958		
2441	954		
2480	962		
π/4-D	QPSK		
2402	1342		
2441	1322		
2480	1318		
8DI	PSK		
2402	1314		
2441	1314		
2480	1314		

Report No.: NTC1501018F FCC ID: 2ABM5W-100




GFSK Lowest Channel

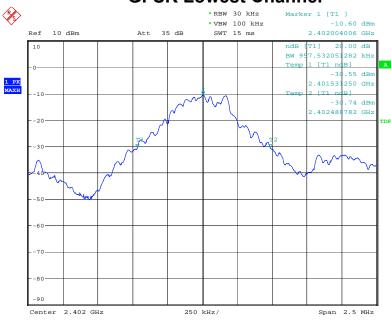

Date: 20.JAN.2015 15:33:39


GFSK Middle Channel

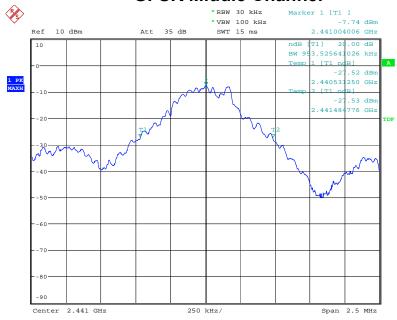

Date: 20.JAN.2015 15:34:36




GFSK Highest Channel

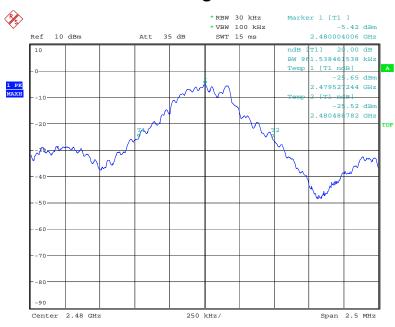

Date: 20.JAN.2015 15:35:30


π/4-DQPSK Lowest Channel

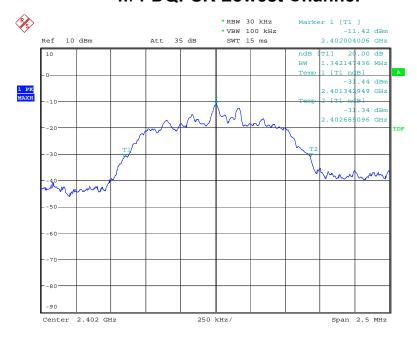

Date: 20.JAN.2015 15:36:19




π/4-DQPSK Middle Channel

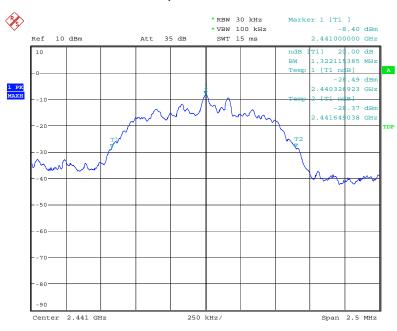

Date: 20.JAN.2015 15:36:51


π/4-DQPSK Highest Channel

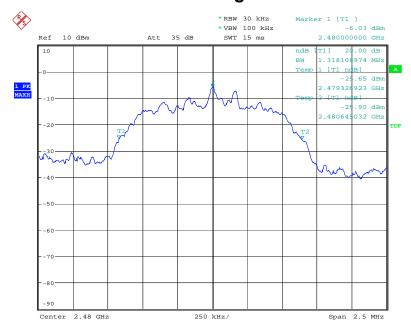

Date: 20.JAN.2015 15:37:21




8DPSK Lowest Channel

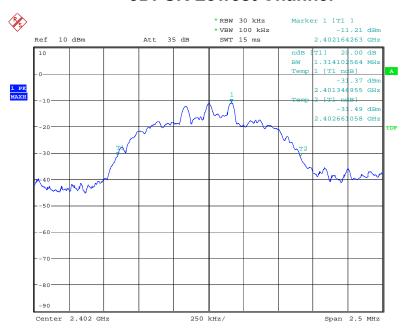

Date: 20.JAN.2015 15:38:17

8DPSK Middle Channel

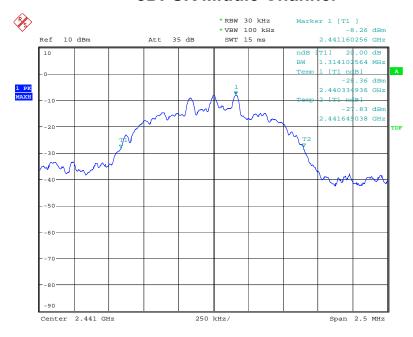


Date: 20.JAN.2015 15:38:51

FCC ID: 2ABM5W-100



8DPSK Highest Channel

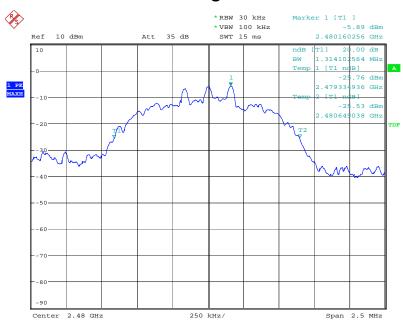

Date: 20.JAN.2015 15:39:23

Report No.: NTC1501018F FCC ID: 2ABM5W-100



7. Hopping Channel Number

7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

7.2 Test SET-UP (Block Diagram of Configuration)

EUT Spectrum Analyzer

7.3 Measurement Results

Modulation GFSK, $\pi/4$ -DQPSK, 8DPSK

RBW: 100KHz VBW: 300KHz

Packet: DH5 Spectrum Detector: PK

Test By: Sance Test Date: Jan., 20, 2015

Temperature : 21 $^{\circ}$ C Humidity : 48 $^{\circ}$

Test Result: PASS


Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥15

The worst case: GFSK

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F

Report No.: NTC15010 FCC ID: 2ABM5W-100



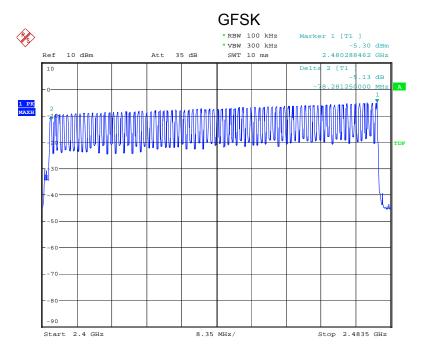

Date: 20.JAN.2015 16:37:32

Report No.: NTC1501018F FCC ID: 2ABM5W-100



8. Time of Occupancy (Dwell Time)

8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

8.2 Measurement Results

The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.


Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

RBW: 1MHz VBW: 3MHz Spectrum Detector: PK Test By: Sance Test Date: Jan., 20, 2015 Temperature: 21° C Test Result: PASS Humidity: 48°

Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2441	0.409(ms)*(1600/(2*79))*31.6=130.9	400
DH3	2441	1.675(ms)*(1600/(4*79))*31.6=268.0	400
DH5	2441	2.901(ms)*(1600/(6*79))*31.6=309.4	400
π/4-DQPSK			
2-DH1	2441	0.405(ms)*(1600/(2*79))*31.6=129.6	400
2-DH3	2441	1.671(ms)*(1600/(4*79))*31.6=267.4	400
2-DH5	2441	2.921(ms)*(1600/(6*79))*31.6=311.6	400
8DPSK			
3-DH1	2441	0.405(ms)*(1600/(2*79))*31.6=129.6	400
3-DH3	2441	1.679(ms)*(1600/(4*79))*31.6=268.6	400
3-DH5	2441	2.917(ms)*(1600/(6*79))*31.6=311.1	400




GFSK DH1

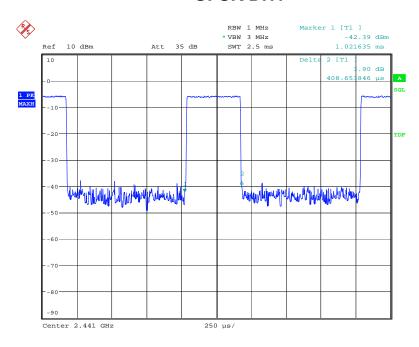

Date: 20.JAN.2015 16:02:47

GFSK DH3

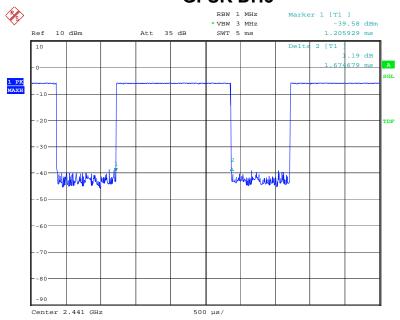


Date: 20.JAN.2015 16:03:14

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F

Report No.: N1C15010 FCC ID: 2ABM5W-100






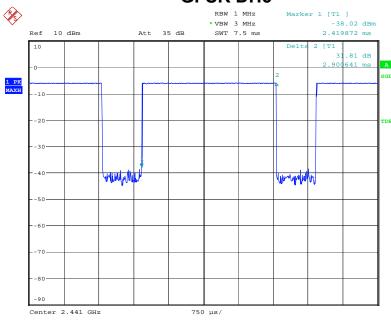

Date: 20.JAN.2015 16:03:39

π/4-DQPSK 2-DH1

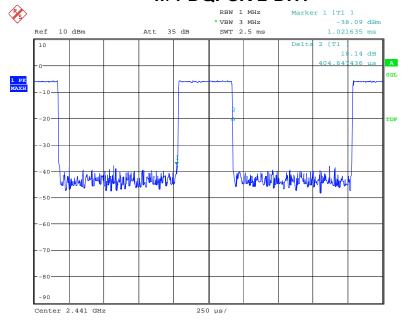


Date: 20.JAN.2015 16:04:13

FCC ID: 2ABM5W-100




$\pi/4$ -DQPSK 2-DH3

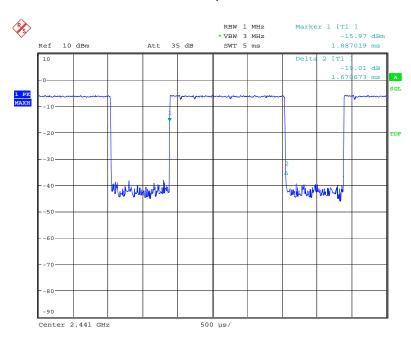

Date: 20.JAN.2015 16:04:49

π/4-DQPSK 2-DH5

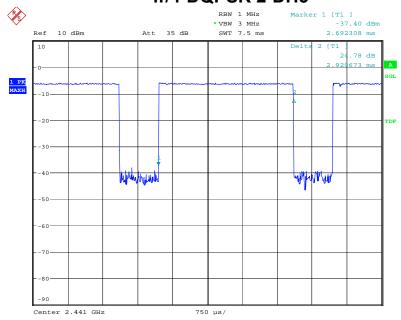


Date: 20.JAN.2015 16:05:15

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F

FCC ID: 2ABM5W-100




8DPSK 3-DH1

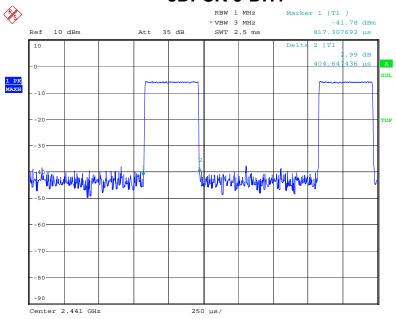

Date: 20.JAN.2015 16:05:44

8DPSK 3-DH3

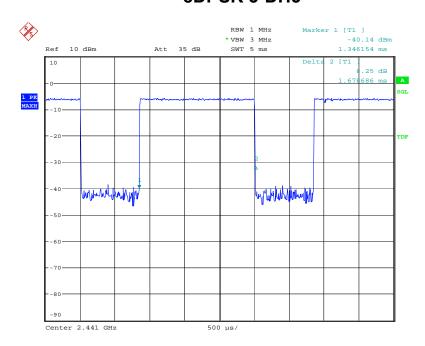


Date: 20.JAN.2015 16:06:10

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F

Report No.: NTC15010 FCC ID: 2ABM5W-100



8DPSK 3-DH5

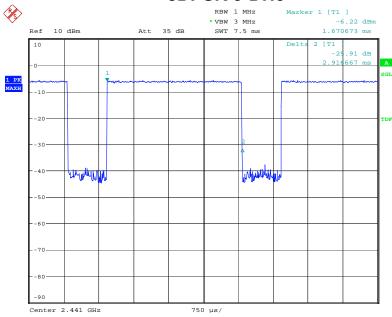

Date: 20.JAN.2015 16:06:35

Report No.: NTC1501018F FCC ID: 2ABM5W-100



9. MAXIMUM PEAK OUTPUT POWER

9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

9.2 Measurement Results

Refer to attached data chart.

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK

RBW: 3MHz VBW: 3MHz

Spectrum Detector: PK Test Date: Jan., 20, 2015

Test By: Sance Temperature : 21 $^{\circ}$ C Test Result: PASS Humidity : 48 $^{\circ}$

Channel Frequency (MHz)	Cable Loss dB	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail			
GFSK								
2402.00	1.5	0.21	-6.84	30	PASS			
2441.00	1.5	0.41	-3.91	30	PASS			
2480.00	1.5	0.70	-1.56	30	PASS			
π/4-DQPSK								
2402.00	1.5	0.18	-7.45	21	PASS			
2441.00	1.5	0.36	-4.47	21	PASS			
2480.00	1.5	0.61	-2.17	21	PASS			
8DPSK								
2402.00	1.5	0.18	-7.48	21	PASS			
2441.00	1.5	0.36	-4.42	21	PASS			
2480.00	1.5	0.62	-2.11	21	PASS			

Report No.: N I C15010 FCC ID: 2ABM5W-100



GFSK Lowest Channel



Date: 20.JAN.2015 16:07:35

GFSK Middle Channel



Date: 20.JAN.2015 16:07:49

FCC ID: 2ABM5W-100




GFSK Highest Channel



Date: 20.JAN.2015 16:08:01

π/4-DQPSK Lowest Channel

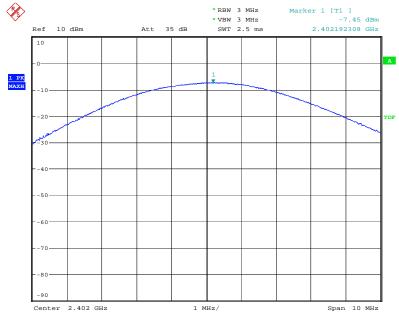


Date: 20.JAN.2015 16:08:32

FCC ID: 2ABM5W-100




π/4-DQPSK Middle Channel

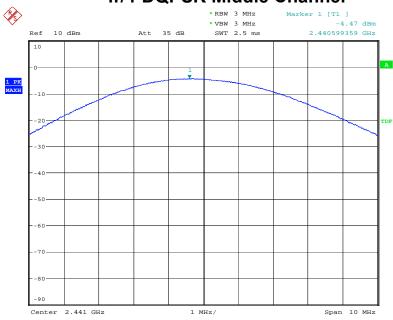

Date: 20.JAN.2015 16:08:48

$\pi/4\text{-DQPSK}$ Highest Channel

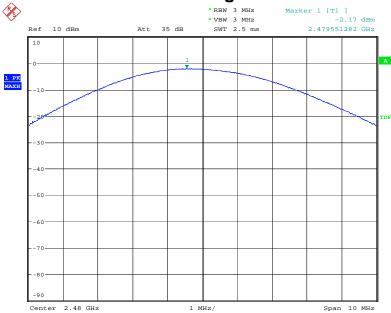

Date: 20.JAN.2015 16:09:01

FCC ID: 2ABM5W-100




8DPSK Lowest Channel



Date: 20.JAN.2015 16:09:33


8DPSK Middle Channel

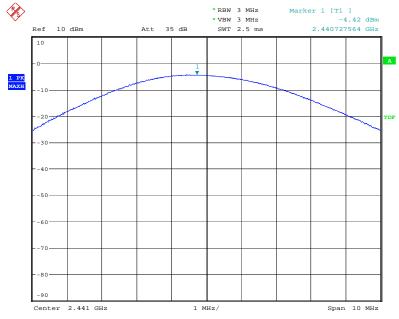

Date: 20.JAN.2015 16:09:47

FCC ID: 2ABM5W-100



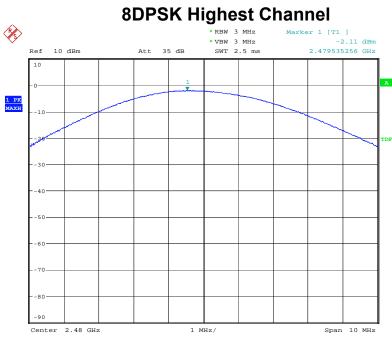

Date: 20.JAN.2015 16:10:04

Report No.: NTC1501018F FCC ID: 2ABM5W-100



10. Band Edge

10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

10.2 Limit

15.247(d)In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.3 Measurement Results

Please see below test table and plots.

For Radiated Emission The worst case: GFSK

The field sacon of ort							
Freq. (MHz)	Ant.Pol. (H/V)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2398.050	Н	60.35	42.29	74.00	54.00	-13.65	-11.71
2399.100	V	52.48	40.31	74.00	54.00	-21.52	-13.69
2484.220	Н	55.79	42.43	74.00	54.00	-18.21	-11.57
2481.290	V	52.88	41.41	74.00	54.00	-21.12	-12.59
2483.500	Н	58.30	39.17	74.00	54.00	-15.70	-14.83
2483.500	V	58.19	40.15	74.00	54.00	-15.81	-13.85

Note: (1) Emission Level= Reading Level + Factor

(2) Factor= Antenna Gain + Cable Loss - Amplifier Gain


(3) Horn antenna used for the emission over 1000MHz.


FCC ID: 2ABM5W-100




For RF Conducted

GFSK Lowest Channel

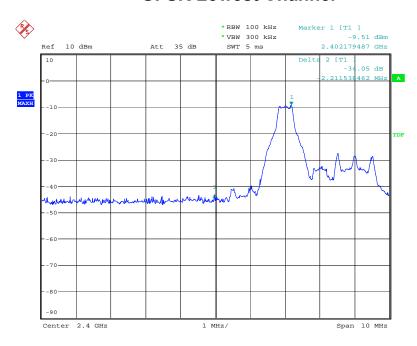



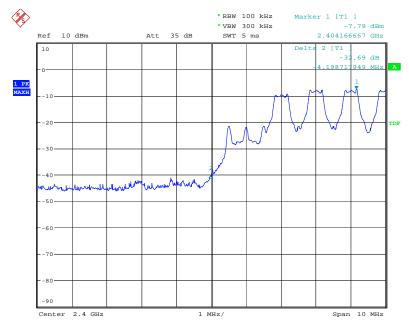


Date: 20.JAN.2015 16:13:01


FCC ID: 2ABM5W-100



GFSK Highest Channel

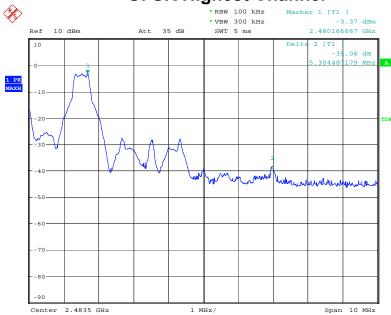

Date: 20.JAN.2015 16:13:45

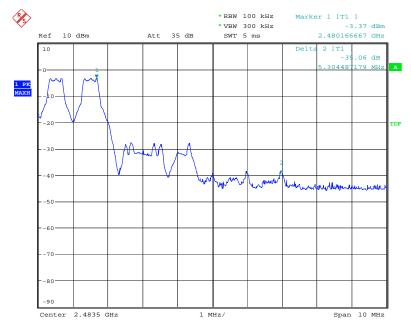


Date: 20.JAN.2015 16:14:08


FCC ID: 2ABM5W-100



π/4-DQPSK Lowest Channel

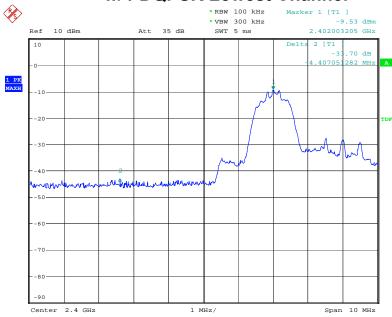

Date: 20.JAN.2015 16:15:37

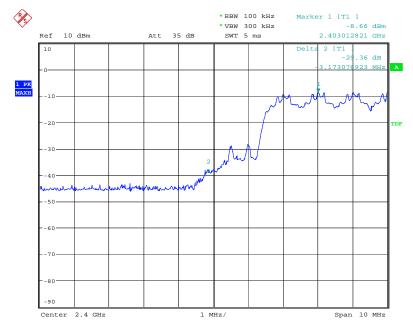


Date: 20.JAN.2015 16:16:53


Report No.: N I C15010 FCC ID: 2ABM5W-100



$\pi/4\text{-DQPSK}$ Highest Channel

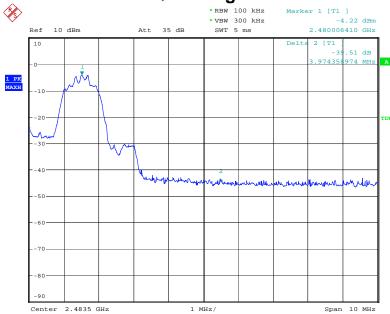

Date: 20.JAN.2015 16:17:33

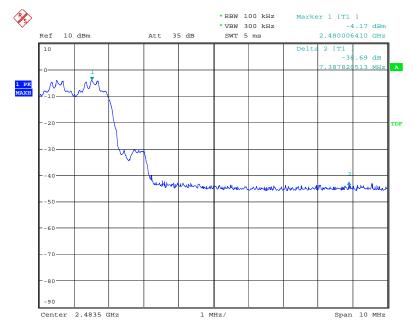


Date: 20.JAN.2015 16:18:11


FCC ID: 2ABM5W-100



8DPSK Lowest Channel

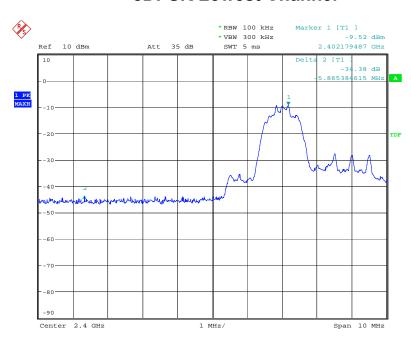



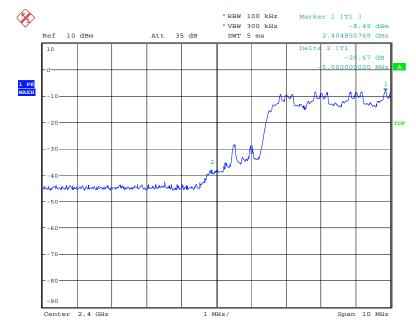


Date: 20.JAN.2015 16:23:11


FCC ID: 2ABM5W-100



8DPSK Highest Channel

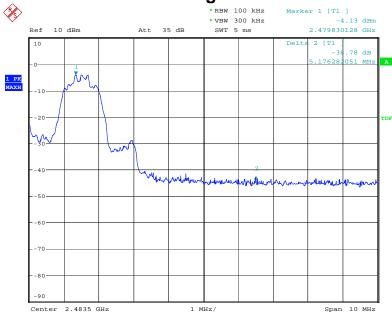

Date: 20.JAN.2015 16:24:58

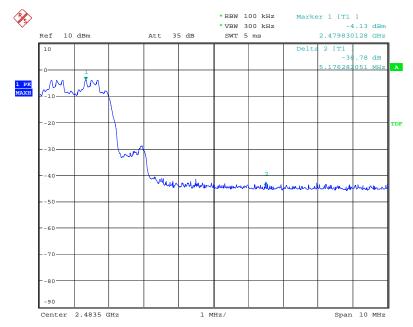

Date: 20.JAN.2015 16:25:59

Report No.: NTC1501018F FCC ID: 2ABM5W-100



11. Antenna Application

11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Measurement Results

The antenna is integrated on the main PCB (permanent attached antenna) and no consideration of replacement, and the best case gain of the antenna is 1.13dBi. So, the antenna is consider meet the requirement.

Report No.: NTC1501018F FCC ID: 2ABM5W-100



12. Conducted Spurious Emissions

12.1 Measurement Procedure

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.


12.2. Measurement Results

Please refer to following plots, the worst case (GFSk) was shown.

Report No.: NTC1501018F FCC ID: 2ABM5W-100




Lowest Channel

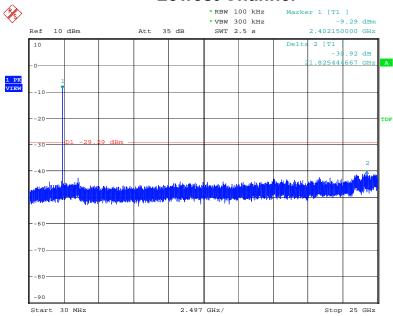

Date: 20.JAN.2015 16:27:09

Note: Sweep points=30001pts Middle Channel

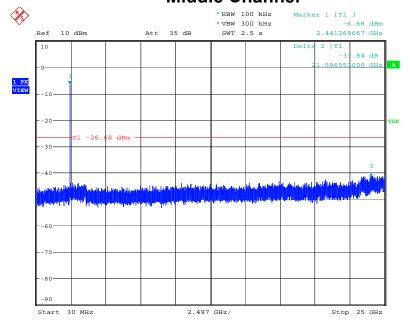


Date: 20.JAN.2015 16:27:39

Note: Sweep points=30001pts

FCC ID: 2ABM5W-100



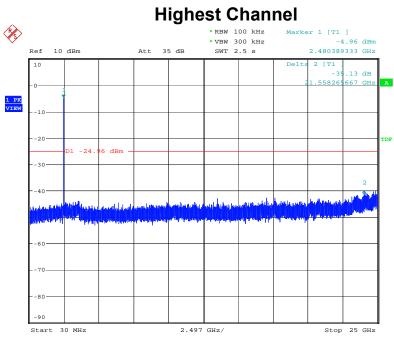

Date: 20.JAN.2015 16:28:08

Note: Sweep points=30001pts

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1501018F FCC ID: 2ABM5W-100



13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360°, 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 08, 2014	Nov. 07, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2014	Oct.23, 2015
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 06, 2014	Nov. 05, 2015
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2014	Oct.10, 2015
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 02, 2014	Sep. 01, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 04, 2014	Nov. 03, 2015
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015