



FCC Test Report (Bluetooth)

FCC ID : 2ABPGDKBIGBOX

Applicant : DKNIGHT INC.
10990 Matinal Cir, San Diego, CA, USA 92127.

Sample Description

Product Name : DKnight Big Magicbox Wireless Speaker

Model No. : DK-BigMAGICBOX-040

Trademark : DKnight

Receipt Date : 2015-12-01

Test Date : 2015-12-04 to 2015-12-05

Issue Date : 2015-12-07

Test Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Conclusions : PASSED*

*In the configuration tested, the EUT complied with the standards specified above.

Test/Witness Engineer :

Approved & Authorized :

Jason Deng

Frank Zhang

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



Contents

CONTENTS	2
1. GENERAL INFORMATION	4
1.1. Client Information	4
1.2. General Description of EUT (Equipment Under Test)	4
1.3. Block Diagram Showing The Configuration of System Tested	5
1.4. Description of Support Units	5
1.5. External I/O Cable	5
1.6. Description of Test Mode	5
1.7. Test Instruments List	6
1.8. Laboratory Location	7
2. TEST SUMMARY	8
3. ANTENNA REQUIREMENT	9
3.1. Standard Requirement	9
3.2. Antenna Connected Construction	9
4. CONDUCTED EMISSION TEST	10
4.1. Test Standard and Limit	10
4.2. Test Setup	10
4.3. Test Procedure	10
4.4. Test Data	11
5. CONDUCTED PEAK OUTPUT POWER TEST	14
5.1. Test Standard and Limit	14
5.2. Test Setup	14
5.3. Test Procedure	14
5.4. Test Data	14
6. PEAK POWER SPECTRAL DENSITY	15
6.1. Test Standard and Limit	15
6.2. Test Setup	15
6.3. Test Procedure	15
6.4. Test Data	15
7. BANDWIDTH	18
7.1. Test Standard and Limit	18
7.2. Test Setup	18
7.3. Test Procedure	18
7.4. Test Data	18
8. BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD)	21
8.1. Test Standard and Limit	21
8.2. Test Setup	21



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 3 of 31

8.3. Test Procedure.....	21
8.4. Test Data.....	21
9. BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD).....	23
9.1. Test Standard and Limit.....	23
9.2. Test Setup.....	23
9.3. Test Procedure.....	23
9.4. Test Data.....	24
10. SPURIOUS EMISSION.....	25
10.1. Test Standard and Limit.....	25
10.2. Test Setup.....	25
10.3. Test Procedure.....	25
10.4. Test Data.....	26



1. General Information

1.1. Client Information

Applicant	:	DKNIGHT INC.
Address	:	10990 Matinal Cir, San Diego, CA, USA 92127.
Manufacturer	:	Shenzhen Tranbel Technology CO., LTD.
Address	:	Floor 4, Building C, Yinfeng Industrial park, Aviation Road, Xixiang Street, Bao'an District, Shenzhen.

1.2. General Description of EUT (Equipment Under Test)

Product Name	:	DKnight Big Magicbox Wireless Speaker	
Models No.	:	DK-BigMAGICBOX-040	
Trademark	:	DKnight	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
		Number of Channel:	40 Channels
		Modulation Type:	GFSK
		Modulation Technology:	BT4.0
		Antenna Type:	Integral PCB Antenna
		Antenna Gain:	0 dBi
Power Supply	:	DC 3.7V From battery or DC 5V From USB For Charge	

Note:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472




ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 5 of 31

08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	40	2456
13	2428	27	2456		
Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.					

1.3. Block Diagram Showing The Configuration of System Tested

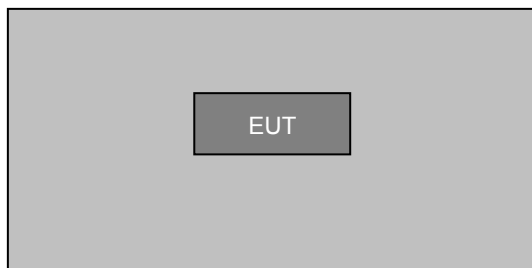

1.4. Description of Support Units

Name	Model	Serial Number	Manufacturer
Printer	HP1020	CNCJ410726	HP
LCD Monitor	G205HV	10306738385	ACER
PC	ASPIREM1830	PTSF90C00305005CAC3000	ACER
Keyboard	SK-9625	KBUSB1580500037E0100	ACER
Mouse	MS.11200.014	M-UAY-ACR2	ACER

1.5. External I/O Cable

N/A

1.6. Description of Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follows was evaluated respectively.



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 6 of 31

Test Mode	Description
Transmitting mode	Keep the EUT in Transmitting mode with worst case data rate
Remark	N/A

Remark: The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

1.7. Test Instruments List

	Test Equipment	Manufacturer	Model No.	Cal. Date	Cal. Due date
1	Bilog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	May 23, 2015	May 22, 2016
2	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	May 28, 2015	May 27, 2016
3	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
4	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
5	Coaxial cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
6	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
7	Coaxial Cable	N/A	N/A	Mar. 30, 2015	Mar. 29, 2016
8	Amplifier (10kHz-1.3GHz)	HP	8447D	Mar. 30, 2015	Mar. 29, 2016
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	Jun. 07, 2015	Jun. 06, 2016
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	Mar. 30, 2015	Mar. 29, 2016
11	Horn Antenna	ETS-LINDGREN	3160	Mar. 30, 2015	Mar. 29, 2016
12	Positioning Controller	UC	UC3000	N/A	N/A
13	Spectrum analyzer 9kHz-30GHz	Rohde & Schwarz	FSP	May 27, 2015	May 26, 2016
14	EMI Test Receiver	Rohde & Schwarz	ESPI	Mar. 30, 2015	Mar. 29, 2016
15	Loop antenna	Laplace instrument	RF300	May 27, 2015	May 26, 2016



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 7 of 31

16	Universal radio communication tester	Rhode & Schwarz	CMU200	May 27, 2015	May 26, 2016
17	Signal Analyzer	Rohde & Schwarz	FSIQ3	May 27, 2015	May 26, 2016
18	L.I.S.N.#1	Rohde & Schwarz	NSLK8126	May 27, 2015	May 26, 2016
19	L.I.S.N.#2	Rohde & Schwarz	ENV216	May 27, 2015	May 26, 2016
20	Power Meter	Anritsu	ML2487A	May 27, 2015	May 26, 2016
21	Power sensor	Anritsu	MA2491A	May 27, 2015	May 26, 2016

1.8. Laboratory Location

Shenzhen TOBY technology Co., Ltd

Address: 1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, 518057, China

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562 7.

Tel:0086-755-26509301 Fax: 0086-755-26509195



2. Test Summary

Standard Section	Test Item	Judgment
Section 15.247&15.209	Spurious Emission	PASSED
Section 15.207	Conduction Emission	PASSED
Section 15.247	Bandwidth Test	PASSED
Section 15.247	Peak Power	PASSED
Section 15.247	Power Density	PASSED
Section 15.247	Band Edge	PASSED
Section 15.203	Antenna Requirement	PASSED
Remark: "N/A" is an abbreviation for Not Applicable.		



3. Antenna Requirement

3.1. Standard Requirement

3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2. Antenna Connected Construction

The bluetooth antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

4. Conducted Emission Test

4.1. Test Standard and Limit

4.1.1 Test Standard

FCC Part15 Section 15.207


4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequencies.

4.2. Test Setup

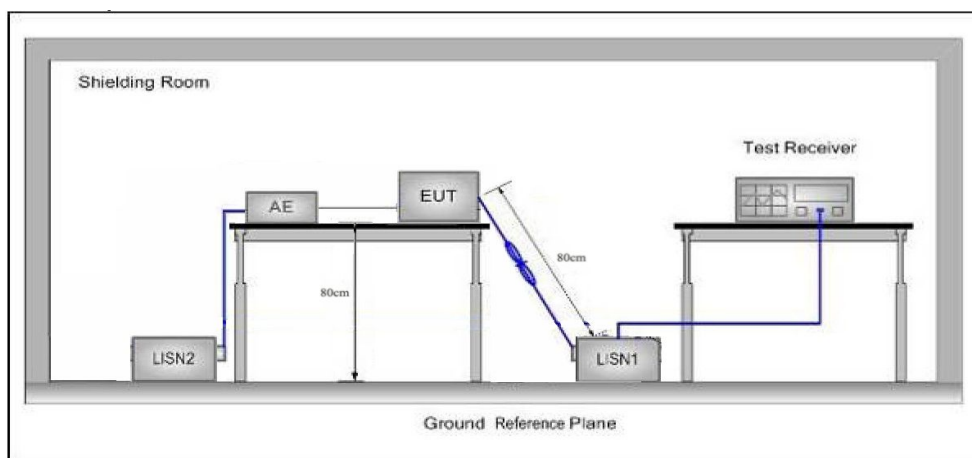

4.3. Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \Omega / 50 \mu\text{H} + 5 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

The Test Receiver setup: RBW=9kHz, VBW=30kHz, Sweep time= auto

4.4. Test Data

PASS.




ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 12 of 31

EUT: DKnight Big Magicbox Wireless Speaker
M/N: DK-BigMAGICBOX-040
Operating Condition: Bluetooth TX mode
Test Site: Conduction Room
Operator: Jason
Test Specification: DC 5V from USB port with AC120V/60HZ
Polarization: Line
Note: Tem:23°C Hum:50%

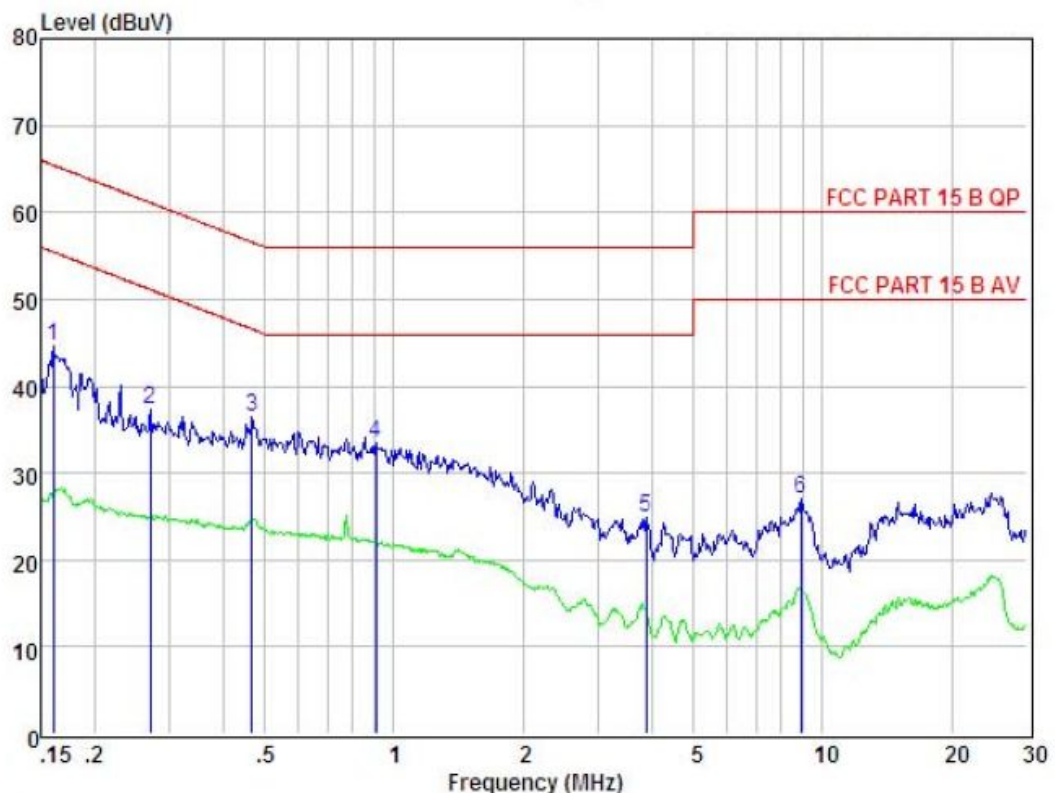

Condition		: FCC PART 15 B QP				POL: LINE		Temp:23.7 °C Hum:51 %	
Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	0.161	34.67	0.03	-9.72	0.10	44.52	65.43	-20.91	Peak
2	0.270	27.42	0.03	-9.72	0.10	37.27	61.12	-23.85	Peak
3	0.466	26.59	0.03	-9.72	0.10	36.44	56.58	-20.14	Peak
4	0.909	23.59	0.04	-9.71	0.10	33.44	56.00	-22.56	Peak
5	3.881	15.00	0.08	-9.69	0.12	24.89	56.00	-31.11	Peak
6	8.916	17.32	0.16	-9.41	0.18	27.07	60.00	-32.93	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss




ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 13 of 31

EUT: DKnight Big Magicbox Wireless Speaker
M/N: DK-BigMAGICBOX-040
Operating Condition: Bluetooth TX mode
Test Site: Conduction Room
Operator: Jason
Test Specification: DC 5V from USB port with AC120V/60HZ
Polarization: Neutral
Note: Tem:23°C Hum:50%

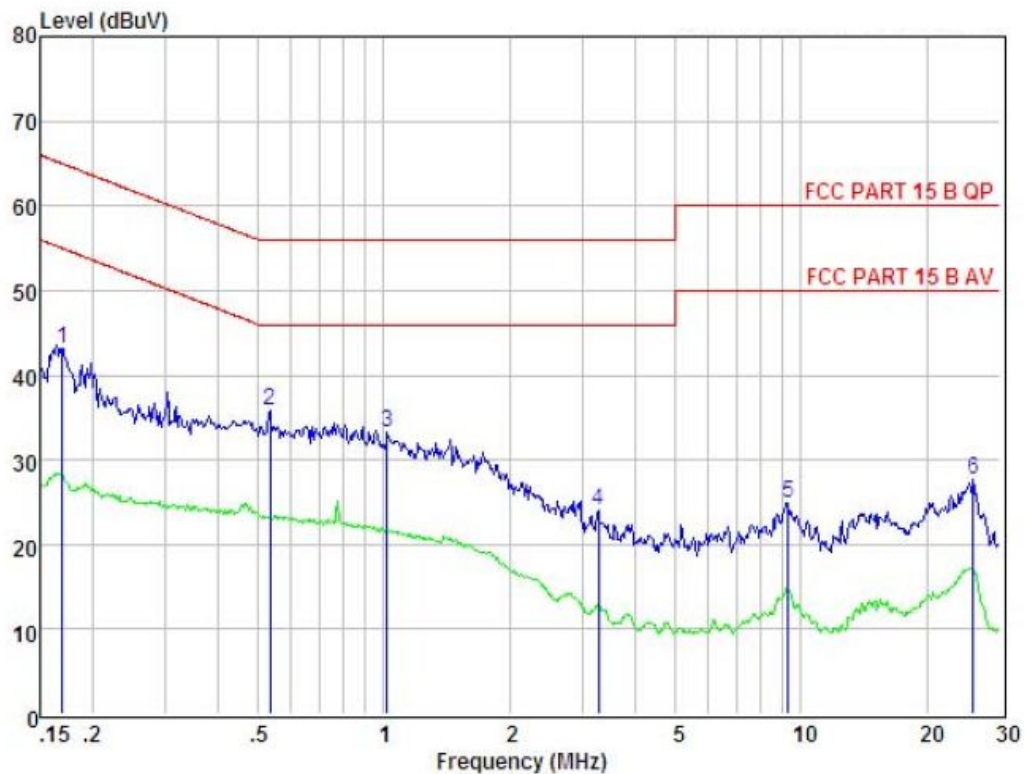

Condition : FCC PART 15 B QP POL: NEUTRAL Temp:23.7 °C Hum:51 %

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.169	33.28	0.03	-9.72	0.10	43.13	64.99	-21.86	Peak
2	0.535	26.00	0.03	-9.72	0.10	35.85	56.00	-20.15	Peak
3	1.021	23.37	0.04	-9.71	0.10	33.22	56.00	-22.78	Peak
4	3.276	14.12	0.07	-9.69	0.12	24.00	56.00	-32.00	Peak
5	9.302	15.07	0.17	-9.39	0.19	24.82	60.00	-35.18	Peak
6	25.864	17.09	0.46	-9.63	0.51	27.69	60.00	-32.31	Peak

Remarks: Level = Read + LISN Factor - Preamp Factor + Cable loss



5. Conducted Peak Output Power Test

5.1. Test Standard and Limit


5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3)

5.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

5.2. Test Setup

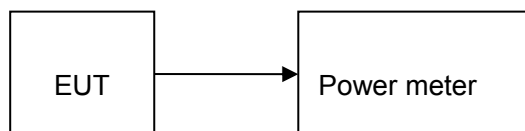

5.3. Test Procedure

- (1) The EUT was directly connected to peak power meter and antenna output port as show in the block diagram above.
- (2) Measure out each mode and each bands peak output power of EUT.
- (3) The EUT was set to continuously transmitting in the max power during the test.

5.4. Test Data

GFSK mode				
Channel Number	Channel Frequency (MHz)	Test Result (dBm)	Limit (30dBm)	Judgment
CH 00	2402	4.535	21	PASSED
CH 19	2440	5.198	21	PASSED
CH 39	2480	6.610	21	PASSED



6. PEAK POWER SPECTRAL DENSITY

6.1. Test Standard and Limit


6.1.1 Test Standard

FCC Part15 C Section 15.247

6.1.2 Test Limit

FCC Part 15 Subpart C(15.247)	
Test Item	Limit
Power Density	8dBm

6.2. Test Setup



6.3. Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Bandwidth: RBW=3kHz, VBW=1 kHz, detector= Peak

6.4. Test Data


Channel Number	Channel Frequency	Power Density
		GFSK
CH 00	2402(MHz)	-10.021
CH 19	2440MHz)	-9.144
CH 39	2480(MHz)	-8.659
Remark: Test plot as follows		



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 16 of 31

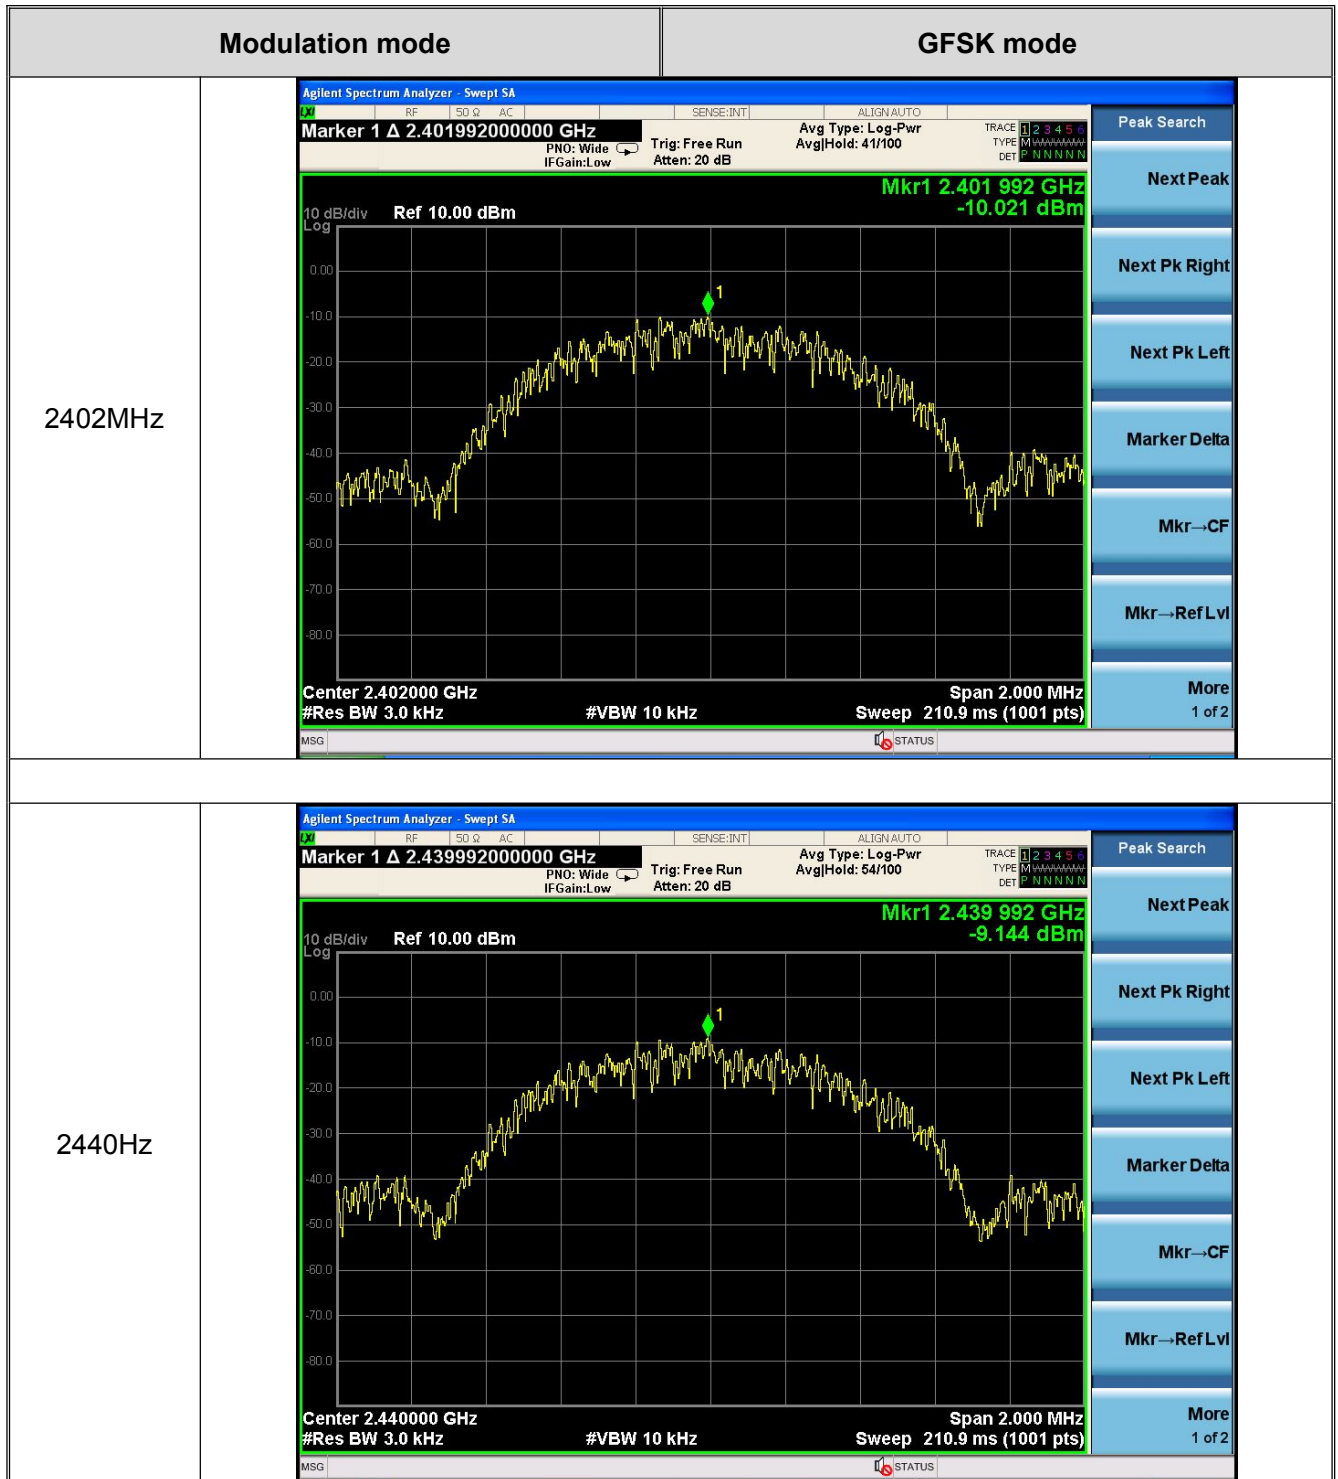



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 17 of 31





7. Bandwidth

7.1. Test Standard and Limit


7.1.1 Test Standard

FCC Part15 C Section 15.247 \

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range (MHz)
6dB Bandwidth	500KHz	2400~2483.5

7.2. Test Setup

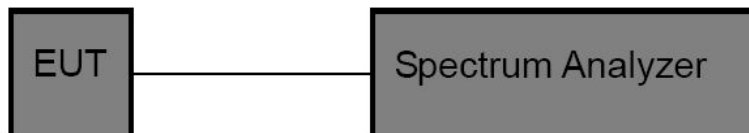

7.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
RBW=100 kHz, VBW=300 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

7.4. Test Data


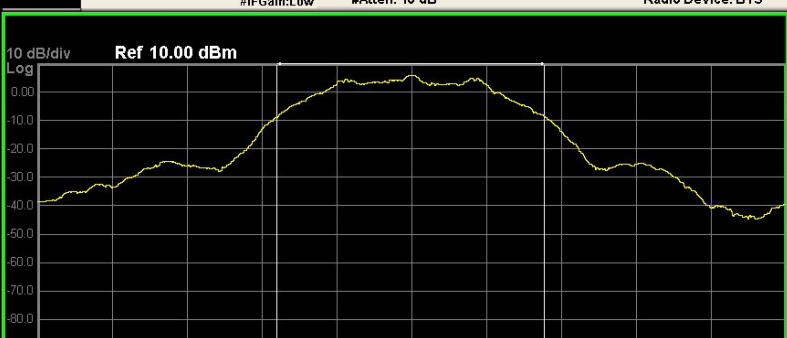
Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)	Result
CH0	2402	688.7	500	PASS
CH19	2440	682.6	500	PASS
CH39	2480	681.1	500	PASS



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 19 of 31

Modulation mode		GFSK mode	
2402MHz		<div>Agilent Spectrum Analyzer - Occupied BW</div> <div><div>Center Freq 2.402000000 GHz</div><div>Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 10 dB</div><div>Radio Std: None Avg Hold> 10/10 Radio Device: BTS</div></div> <div><div>10 dB/div</div><div>Ref 10.00 dBm</div><div></div><div>Center 2.402 GHz #Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Span 3 MHz Sweep 1 ms</div><div>Occupied Bandwidth 1.0556 MHz</div><div>Total Power 11.8 dBm</div><div>Transmit Freq Error 2.536 kHz</div><div>OBW Power 99.00 %</div><div>x dB Bandwidth 688.7 kHz</div><div>x dB -6.00 dB</div></div> <div>Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz</div>	
		<div>Agilent Spectrum Analyzer - Occupied BW</div> <div><div>Center Freq 2.440000000 GHz</div><div>Center Freq: 2.440000000 GHz Trig: Free Run #Atten: 10 dB</div><div>Radio Std: None Avg Hold> 10/10 Radio Device: BTS</div></div> <div><div>10 dB/div</div><div>Ref 10.00 dBm</div><div></div><div>Center 2.44 GHz #Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Span 3 MHz Sweep 1 ms</div><div>Occupied Bandwidth 1.0658 MHz</div><div>Total Power 12.1 dBm</div><div>Transmit Freq Error -2.384 kHz</div><div>OBW Power 99.00 %</div><div>x dB Bandwidth 682.6 kHz</div><div>x dB -6.00 dB</div></div> <div>Frequency Center Freq 2.440000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz</div>	



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 20 of 31





8. Band Edge Requirement (Conducted Emission Method)

8.1. Test Standard and Limit


8.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

8.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

8.2. Test Setup



8.3. Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.


(2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak

8.4. Test Data

Test plot as follows



Page: 22 of 31

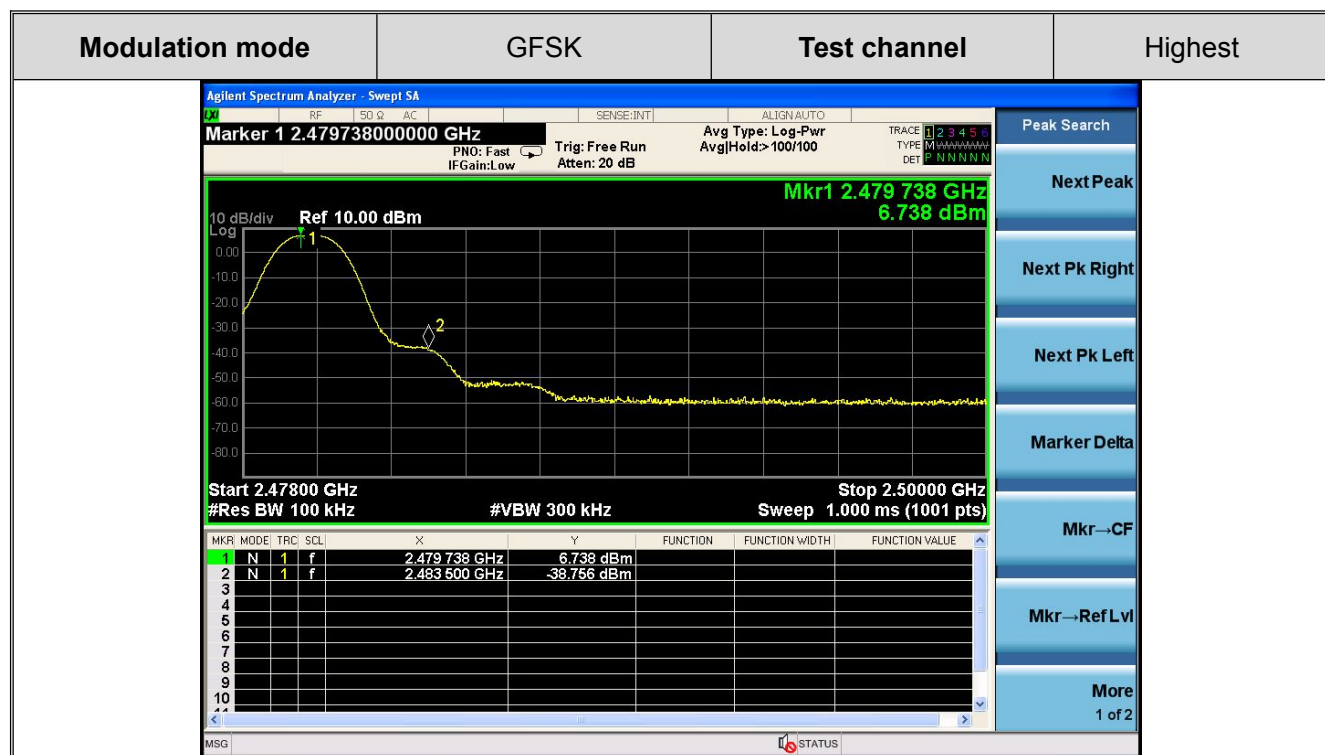

9. Band Edge Requirement (Radiated Emission Method)

9.1. Test Standard and Limit

9.1.1 Test Standard


FCC Part15 C Section 15.209 and 15.205

9.1.2 Test Limit

Radiated Emission Test Limit

Frequency	Limit (dB μ V/m @3m)	Remark
Above 1GHz	54.00	Average value
	74.00	Peak value

9.2. Test Setup

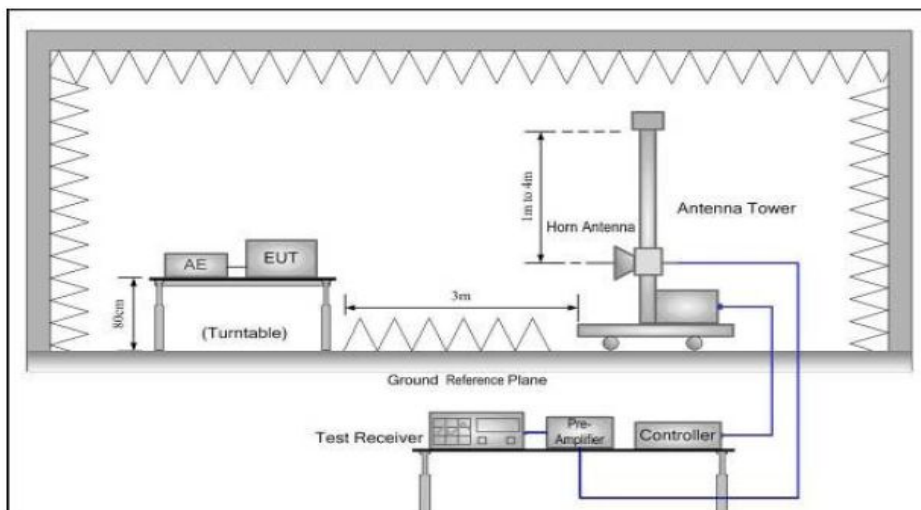

9.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 24 of 31

Hold Mode. Peak Value: RBW=1MHz, VBW=3MHz; Average value: RBW=1MHz, VBW=10Hz

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

9.4. Test Data

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK, and all data were shown in the report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2400.00	20.64	27.58	5.67	0	53.89	74.00	-20.11	H	PEAK
2400.00	20.77	27.58	5.67	0	54.02	74.00	-19.98	V	PEAK
2400.00	9.46	27.58	5.67	0	42.71	54.00	-11.29	H	AVG.
2400.00	10.02	27.58	5.67	0	43.27	54.00	-10.73	V	AVG.
Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
2483.50	20.33	27.52	5.7	0	53.55	74.00	-20.45	H	PEAK
2483.50	22.12	27.52	5.7	0	55.34	74.00	-18.66	V	PEAK
2483.50	9.41	27.52	5.7	0	42.63	54.00	-11.37	H	AVG.
2483.50	10.07	27.52	5.7	0	43.29	54.00	-10.71	V	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

10. Spurious Emission

10.1. Test Standard and Limit

10.1.1 Test Standard

FCC Part15 C Section 15.209


10.1.2 Test Limit

Frequency (MHz)	Limit (dB μ V/m)	
	At 3m Distance	
30MHz~88MHz	40	Quasi-peak
88MHz~216MHz	43.5	Quasi-peak
216MHz~960MHz	46	Quasi-peak
960MHz~1000MHz	54	Quasi-peak
Above 1000MHz	54	Average
	74	Peak


Remark: 1. The lower limit shall apply at the transition frequency.

10.2. Test Setup

Below 1GHz

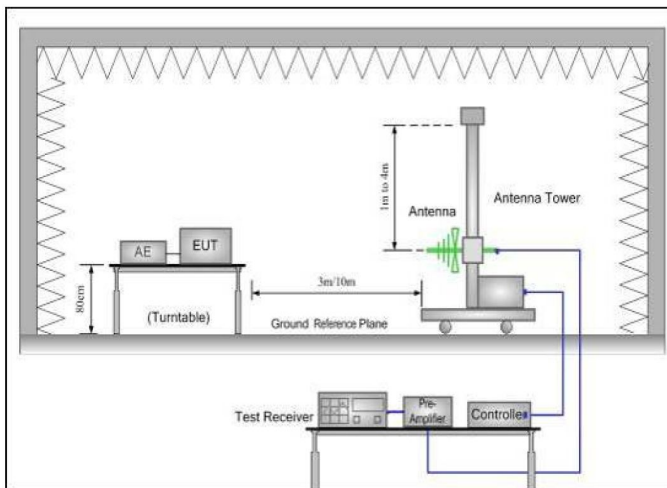

Above 1GHz

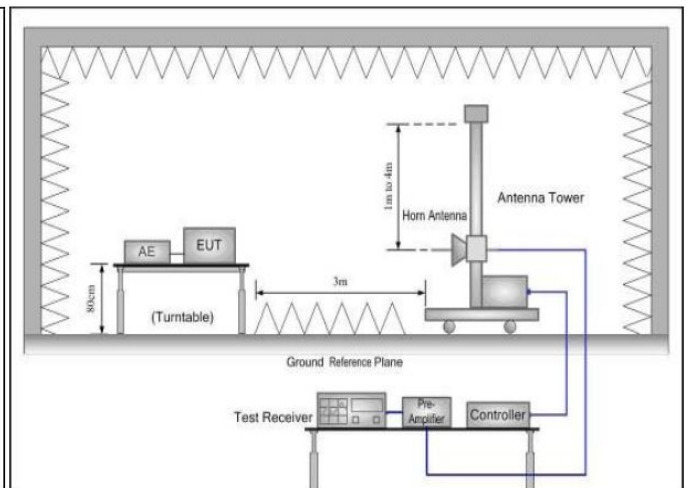

10.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set



to make the measurement.

- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Peak value: RBW=1MHz, VBW=3MHz;

Average value: RBW=1MHz, VBW=10Hz;

;

QP Value: RBW=120kHz, VBW=300kHz

- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

10.4. Test Data


Remark:

1. During the test, pre-scan the GFSK.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
3. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.



Radiated Emission Test Data (Below 1GHz)

EUT: DKnight Big Magicbox Wireless Speaker
M/N: DK-BigMAGICBOX-040
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Jason
Test Specification: DC 5V From USB Port with AC120V/60Hz
Polarization: Horizontal
Note Tem:23℃ Hum:50%

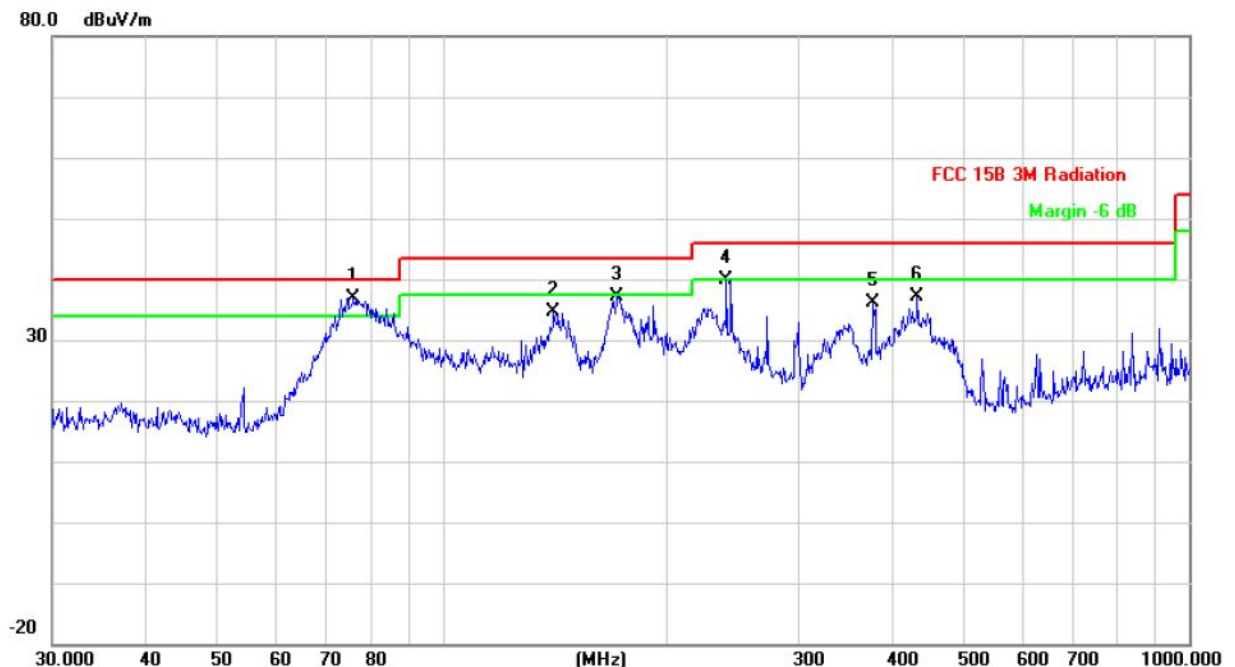

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	75.9771	60.36	-23.42	36.94	40.00	-3.06	peak		
2		140.8351	56.42	-21.91	34.51	43.50	-8.99	peak		
3		171.3925	58.18	-21.10	37.08	43.50	-6.42	peak		
4		239.9874	58.43	-18.59	39.84	46.00	-6.16	peak		
5		377.2590	50.37	-14.31	36.06	46.00	-9.94	peak		
6		432.5457	49.91	-12.78	37.13	46.00	-8.87	peak		




ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 28 of 31

Radiated Emission Test Data (Below 1GHz)

EUT: DKnight Big Magicbox Wireless Speaker
M/N: DK-BigMAGICBOX-040
Operating Condition: Bluetooth TX mode
Test Site: 3m chamber
Operator: Jason
Test Specification: DC 5V From USB Port with AC120V/60Hz
Polarization: Vertical
Note Tem:23℃ Hum:50%

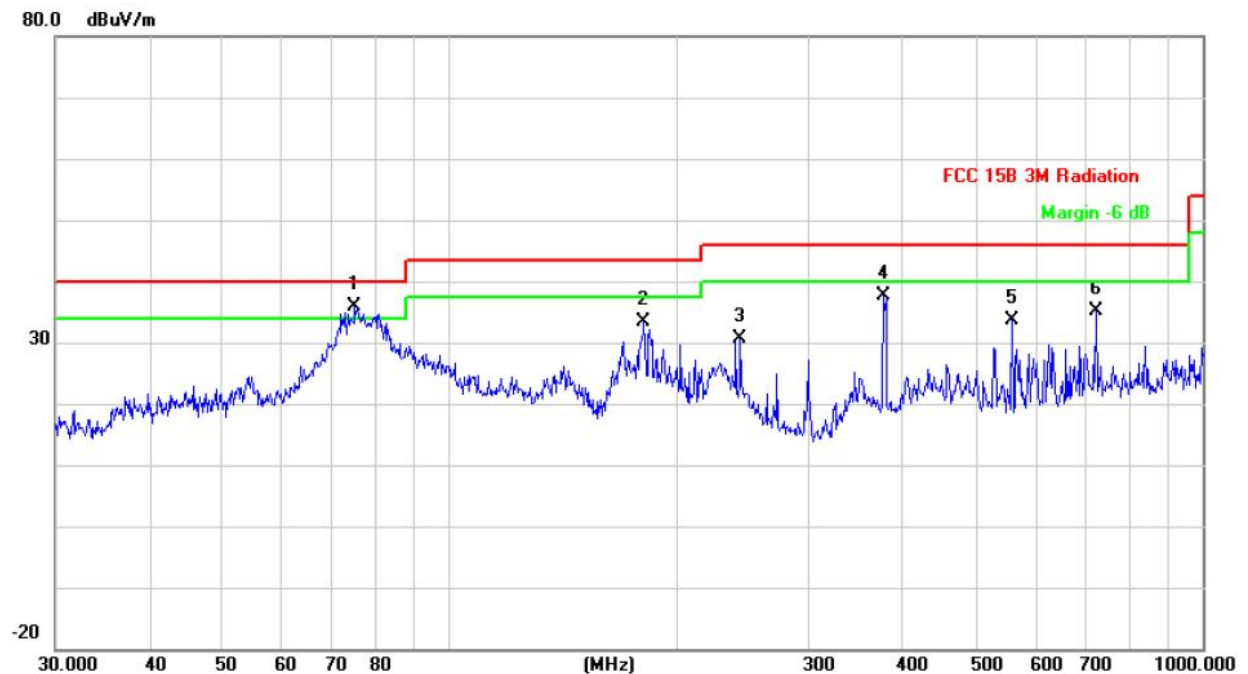

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	74.9191	59.28	-23.45	35.83	40.00	-4.17	peak		
2		181.2834	54.06	-20.62	33.44	43.50	-10.06	peak		
3		243.3771	49.07	-18.43	30.64	46.00	-15.36	peak		
4		377.2590	51.86	-14.31	37.55	46.00	-8.45	peak		
5		558.7300	43.68	-10.13	33.55	46.00	-12.45	peak		
6		721.7259	42.33	-7.10	35.23	46.00	-10.77	peak		



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 29 of 31

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Lowest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	38.23	31.53	8.9	40.24	38.42	74.00	-35.58	V	PEAK
7206.00	34.61	36.47	10.59	41.24	40.43	74.00	-33.57	V	PEAK
9608.00	*					74.00		V	PEAK
12010.00	*					74.00		V	PEAK
14412.00	*					74.00		V	PEAK
16814.00	*					74.00		V	PEAK
4804.00	36.25	31.53	8.9	40.24	36.44	74.00	-37.56	H	PEAK
7206.00	34.62	36.47	10.59	41.24	40.44	74.00	-33.56	H	PEAK
9608.00	*					74.00		H	PEAK
12010.00	*					74.00		H	PEAK
14412.00	*					74.00		H	PEAK
16814.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4804.00	37.22	31.53	8.9	40.24	37.41	54.00	-16.59	V	AVG.
7206.00	34.81	36.47	10.59	41.24	40.63	54.00	-13.37	V	AVG.
9608.00	*					54.00		V	AVG.
12010.00	*					54.00		V	AVG.
14412.00	*					54.00		V	AVG.
16814.00	*					54.00		V	AVG.
4804.00	36.84	31.53	8.9	40.24	37.03	54.00	-16.97	H	AVG.
7206.00	34.79	36.47	10.59	41.24	40.61	54.00	-13.39	H	AVG.
9608.00	*					54.00		H	AVG.
12010.00	*					54.00		H	AVG.
14412.00	*					54.00		H	AVG.
16814.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 30 of 31

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Middle				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
488000	36.94	31.58	8.98	40.15	37.35	74.00	-36.65	V	PEAK
732000	34.63	36.48	10.69	41.15	40.65	74.00	-33.35	V	PEAK
9764.00	*					74.00		V	PEAK
12205.00	*					74.00		V	PEAK
14646.00	*					74.00		V	PEAK
17087.00	*					74.00		V	PEAK
488000	37.05	31.58	8.98	40.15	37.46	74.00	-36.54	H	PEAK
732000	33.9	36.48	10.69	41.15	39.92	74.00	-34.08	H	PEAK
9764.00	*					74.00		H	PEAK
12205.00	*					74.00		H	PEAK
14646.00	*					74.00		H	PEAK
17087.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4882.00	36.75	31.58	8.98	40.15	37.16	54.00	-16.84	V	AVG.
7323.00	33.84	36.47	10.69	41.15	39.85	54.00	-14.15	V	AVG.
9764.00	*					54.00		V	AVG.
12205.00	*					54.00		V	AVG.
14646.00	*					54.00		V	AVG.
17087.00	*					54.00		V	AVG.
4882.00	36.51	31.58	8.98	40.15	36.92	54.00	-17.08	H	AVG.
7323.00	34.65	36.47	10.69	41.15	40.66	54.00	-13.34	H	AVG.
9764.00	*					54.00		H	AVG.
12205.00	*					54.00		H	AVG.
14646.00	*					54.00		H	AVG.
17087.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



ATA Testing Technology Service Co., Ltd.

Report No.:ATA151207005F

Page: 31 of 31

Radiated Emission Test Data (Above 1GHz)

Test mode: GFSK					Test channel: Highest				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	36.48	31.69	9.08	40.03	37.22	74.00	-36.78	V	PEAK
7440.00	34.6	36.6	10.8	41.05	40.95	74.00	-33.05	V	PEAK
9920.00	*					74.00		V	PEAK
12400.00	*					74.00		V	PEAK
14880.00	*					74.00		V	PEAK
17360.00	*					74.00		V	PEAK
4960.00	35.95	31.69	9.08	40.03	36.69	74.00	-37.31	H	PEAK
7440.00	33.84	36.6	10.8	41.05	40.19	74.00	-33.81	H	PEAK
9920.00						74.00		H	PEAK
12400.00	*					74.00		H	PEAK
14880.00	*					74.00		H	PEAK
17360.00	*					74.00		H	PEAK
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Level
4960.00	35.84	31.69	9.08	40.03	36.58	54.00	-17.42	V	AVG.
7440.00	33.9	36.6	10.8	41.05	40.25	54.00	-13.75	V	AVG.
9920.00	*					54.00		V	AVG.
12400.00	*					54.00		V	AVG.
14880.00	*					54.00		V	AVG.
17360.00	*					54.00		V	AVG.
4960.00	36.83	31.69	9.08	40.03	37.57	54.00	-16.43	H	AVG.
7440.00	33.95	36.6	10.8	41.05	40.3	54.00	-13.70	H	AVG.
9920.00	*					54.00		H	AVG.
12400.00	*					54.00		H	AVG.
14880.00	*					54.00		H	AVG.
17360.00	*					54.00		H	AVG.

Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.