



# TEST REPORT

**APPLICANT** : BDE Technology Co., Ltd

**PRODUCT NAME** : BDE Low Power, Long Range Sub-1G Module

**MODEL NAME** : BDE-RFM216

**BRAND NAME** : BDE

**FCC ID** : 2ABRUBDRFM216

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2019-11-27


**TEST DATE** : 2019-12-04 to 2019-12-05

**ISSUE DATE** : 2019-12-16

Edited by:

  
Zeng Xiaoying (Rapporteur)

Approved by:

  
Peng Huarui ( Supervisor )

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





## DIRECTORY

<b>1. Technical Information .....</b>	<b>4</b>
<b>1.1. Applicant and Manufacturer Information .....</b>	<b>4</b>
<b>1.2. Equipment Under Test (EUT) Description .....</b>	<b>4</b>
<b>1.3. Host Information .....</b>	<b>5</b>
<b>1.4. The Channel Number and Frequency .....</b>	<b>6</b>
<b>1.5. Test Standards and Results .....</b>	<b>8</b>
<b>1.6. Environmental Conditions .....</b>	<b>9</b>
<b>2. 47 CFR Part 15C Requirements .....</b>	<b>10</b>
<b>2.1. Conducted Emission .....</b>	<b>10</b>
<b>2.2. Radiated Emission .....</b>	<b>14</b>
<b>Annex A Test Uncertainty .....</b>	<b>27</b>
<b>Annex B Testing Laboratory Information .....</b>	<b>28</b>



REPORT No.: SZ19100195W02

Change History		
Version	Date	Reason for change
1.0	2019-12-16	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	BDE Technology Co., Ltd
<b>Applicant Address:</b>	Innovation Building C1-1105, 182 Science Ave, Science City, Guangzhou, China
<b>Manufacturer:</b>	BDE Technology Co., Ltd
<b>Manufacturer Address:</b>	Innovation Building C1-1105, 182 Science Ave, Science City, Guangzhou, China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	BDE Low Power, Long Range Sub-1G Module
<b>Serial No:</b>	(N/A, marked #1 by test site)
<b>Equipment Type:</b>	FHSS
<b>Modulation Type:</b>	2-GFSK
<b>Data Rate:</b>	5kbps, 50kbps 200kbps
<b>Operating Frequency Range:</b>	5kbps, 50kbps: 902.2MHz - 927.8MHz 200kbps: 902.4MHz - 927.6MHz

**Note 1:** This is a Class II permissive change report for FCC ID: 2ABRUBDRFM216, we tested and recorded the test results for below test items.

1. Conducted Emission
2. Radiated Emission

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3.Host Information

<b>Product Name:</b>	BDE Low Power, Long Range Sub-1G USB Dongle
<b>Model Name:</b>	BDE-USB216
<b>Brand Name:</b>	BDE
<b>Hardware Version:</b>	2.2
<b>Software Version:</b>	1.0
<b>Antenna Type:</b>	Helical Antenna
<b>Antenna Gain:</b>	4.37dBi



## 1.4.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	<b>902.2</b>	33	908.8	66	915.4	99	922.0
1	902.4	34	909.0	67	915.6	100	922.2
2	902.6	35	909.2	68	915.8	101	922.4
3	902.8	36	909.4	69	916.0	102	922.6
4	903.0	37	909.6	70	916.2	103	922.8
5	903.2	38	909.8	71	916.4	104	923
6	903.4	39	910.0	72	916.6	105	923.2
7	903.6	40	910.2	73	916.8	106	923.4
8	903.8	41	910.4	74	917.0	107	923.6
9	904.0	42	910.6	75	917.2	108	923.8
10	904.2	43	910.8	76	917.4	109	924.0
11	904.4	44	911.0	77	917.6	110	924.2
12	904.6	45	911.2	78	917.8	111	924.4
13	904.8	46	911.4	79	918.0	112	924.6
14	905.0	47	911.6	80	918.2	113	924.8
15	905.2	48	911.8	81	918.4	114	925.0
16	905.4	49	912.0	82	918.6	115	925.2
17	905.6	50	912.2	83	918.8	116	925.4
18	905.8	51	912.4	84	919.0	117	925.6
19	906.0	52	912.6	85	919.2	118	925.8
20	906.2	53	912.8	86	919.4	119	926.0
21	906.4	54	913.0	87	919.6	120	926.2
22	906.6	55	913.2	88	919.8	121	926.4
23	906.8	56	913.4	89	920.0	122	926.6
24	907.0	57	913.6	90	920.2	123	926.8
25	907.2	58	913.8	91	920.4	124	927.0
26	907.4	59	914.0	92	920.6	125	927.2
27	907.6	60	914.2	93	920.8	126	927.4
28	907.8	61	914.4	94	921	127	927.6
29	908.0	62	914.6	95	921.2	<b>128</b>	<b>927.8</b>
30	908.2	63	914.8	96	921.4		
31	908.4	<b>64</b>	<b>915.0</b>	97	921.6		
32	908.6	65	915.2	98	921.8		

**Note:** The black bold channels were selected for 5kbps and 50kbps test.



Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>0</b>	<b>902.4</b>	16	908.8	<b>32</b>	<b>915.2</b>	48	921.6
1	902.8	17	909.2	33	915.6	49	922.0
2	903.2	18	909.6	34	916.0	50	922.4
3	903.6	19	910.0	35	916.4	51	922.8
4	904.0	20	910.4	36	916.8	52	923.2
5	904.4	21	910.8	37	917.2	53	923.6
6	904.8	22	911.2	38	917.6	54	924.0
7	905.2	23	911.6	39	918.0	55	924.4
8	905.6	24	912.0	40	918.4	56	924.8
9	906.0	25	912.4	41	918.8	57	925.2
10	906.4	26	912.8	42	919.2	58	925.6
11	906.8	27	913.2	43	919.6	59	926.0
12	907.2	28	913.6	44	920.0	60	926.4
13	907.6	29	914.0	45	920.4	61	926.8
14	908.0	30	914.4	46	920.8	62	927.2
15	908.4	31	914.8	47	921.2	<b>63</b>	<b>927.6</b>

**Note:** The black bold channels were selected for 200kbps test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	N/A	N/A
2	15.247(a)1 15.247(h)	Hopping Mechanism	N/A	N/A	N/A	N/A
3	15.247(a)	Number of Hopping Frequency	N/A	N/A	N/A	N/A
4	N/A	Duty Cycle	N/A	N/A	N/A	N/A
5	15.247(b)	Maximum Peak Conducted Output Power	N/A	N/A	N/A	N/A
6	15.247(b)	Maximum Average Conducted Output Power	N/A	N/A	N/A	N/A
7	15.247(a)	20dB Bandwidth	N/A	N/A	N/A	N/A
8	15.247(a)	Carrier Frequency Separation	N/A	N/A	N/A	N/A
9	15.247(a)	Time of Occupancy (Dwell time)	N/A	N/A	N/A	N/A
10	15.247(d)	Conducted Spurious Emission	N/A	N/A	N/A	N/A
11	15.207	Conducted Emission	Dec 04, 2019	Lin Jiayong	PASS	No deviation
12	15.209, 15.247(d)	Radiated Emission	Dec 05, 2019	Gao Jianrou	PASS	No deviation





**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 15C Requirements

### 2.1. Conducted Emission

#### 2.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

#### NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 2.1.2. Test Description

##### Test Setup:

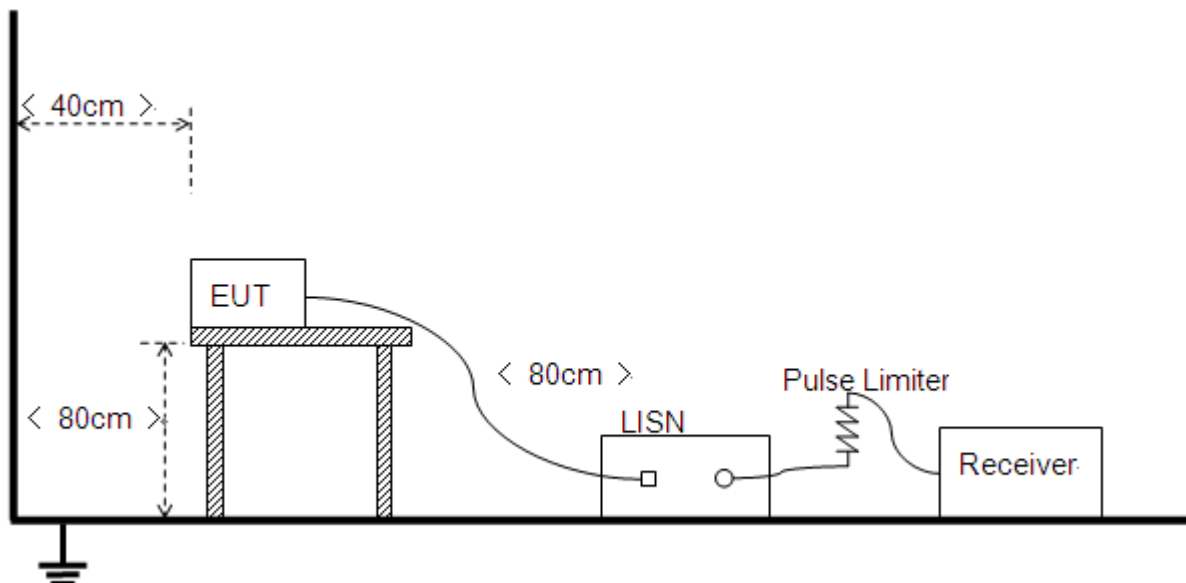

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference



Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

### 2.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### Test Setup:

Test Mode: EUT+PC+ + Adapter+915M TX


Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$$


$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage division factor of LISN

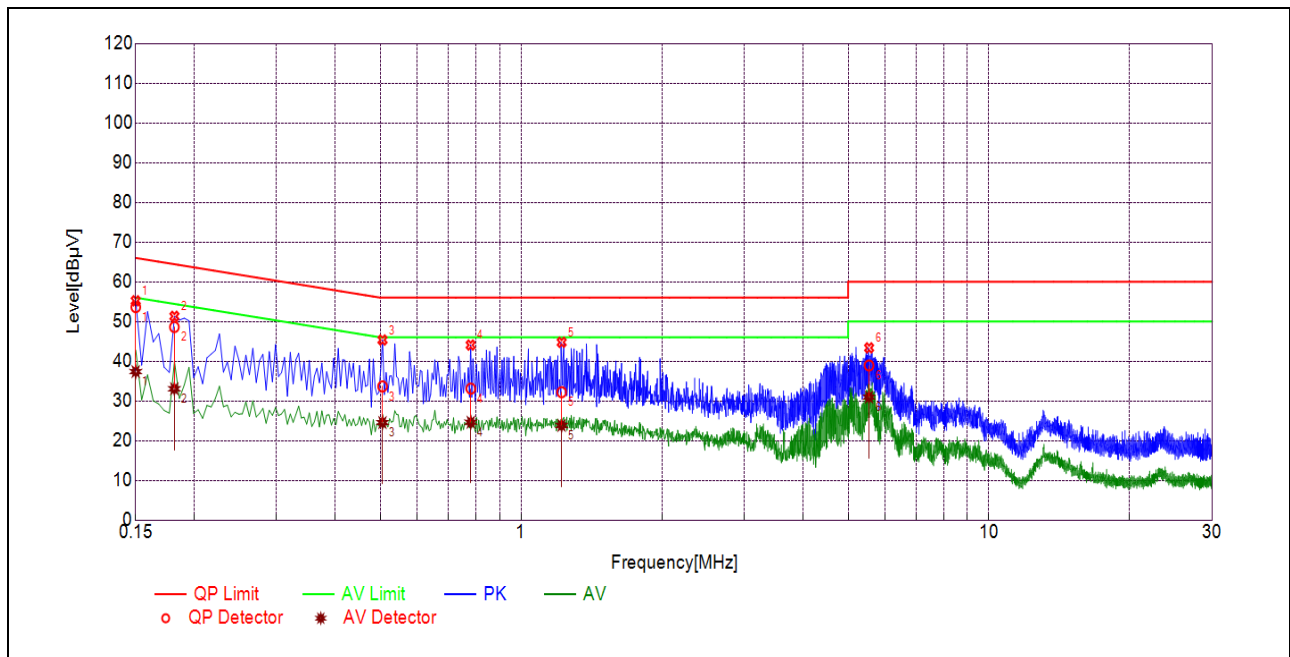

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1500	53.62	37.38	66.00	56.00	Line	PASS
2	0.1814	48.61	33.05	64.42	54.42		PASS
3	0.5054	33.65	24.55	56.00	46.00		PASS
4	0.7806	33.09	24.63	56.00	46.00		PASS
5	1.2205	32.20	23.82	56.00	46.00		PASS
6	5.5426	38.93	30.96	60.00	50.00		PASS

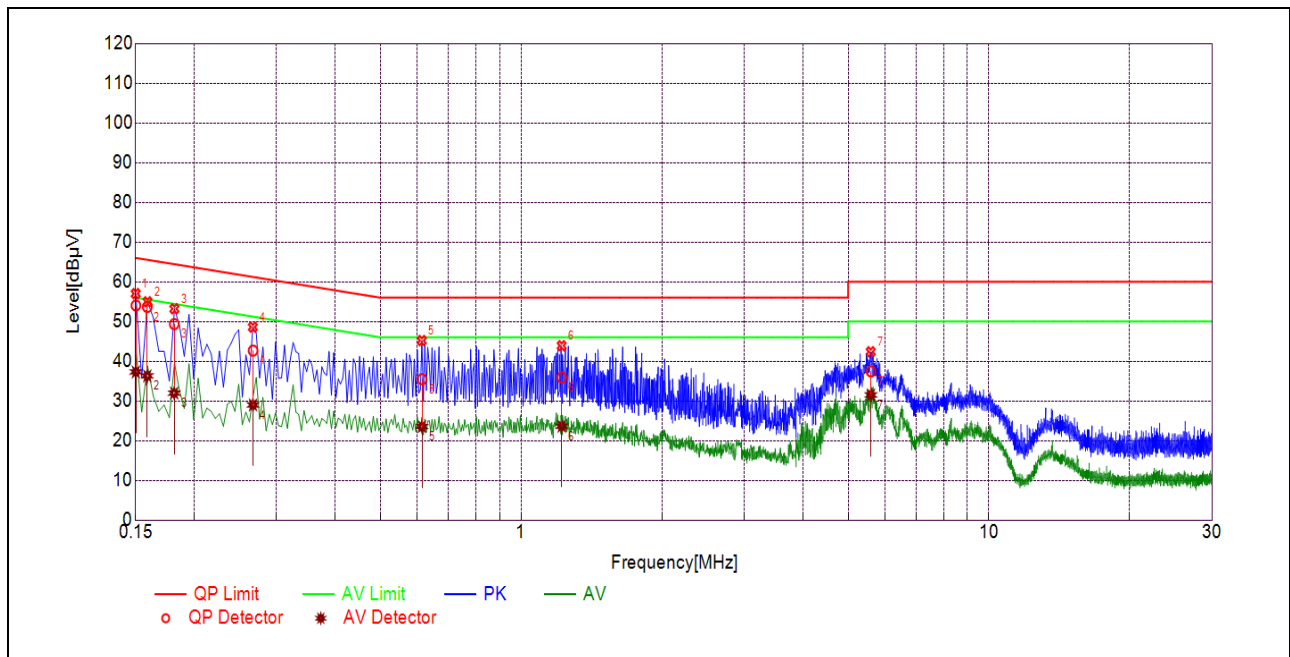

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1501	54.04	37.29	66.00	56.00	Neutral	PASS
2	0.1588	53.65	36.29	65.52	55.52		PASS
3	0.1813	49.35	31.97	64.42	54.42		PASS
4	0.2672	42.68	29.00	61.21	51.21		PASS
5	0.6139	35.46	23.53	56.00	46.00		PASS
6	1.2213	35.91	23.62	56.00	46.00		PASS
7	5.5961	37.42	31.50	60.00	50.00		PASS

## 2.2. Radiated Emission

### 2.2.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


**Note 1:** For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note 2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


## 2.2.2. Test Description

### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

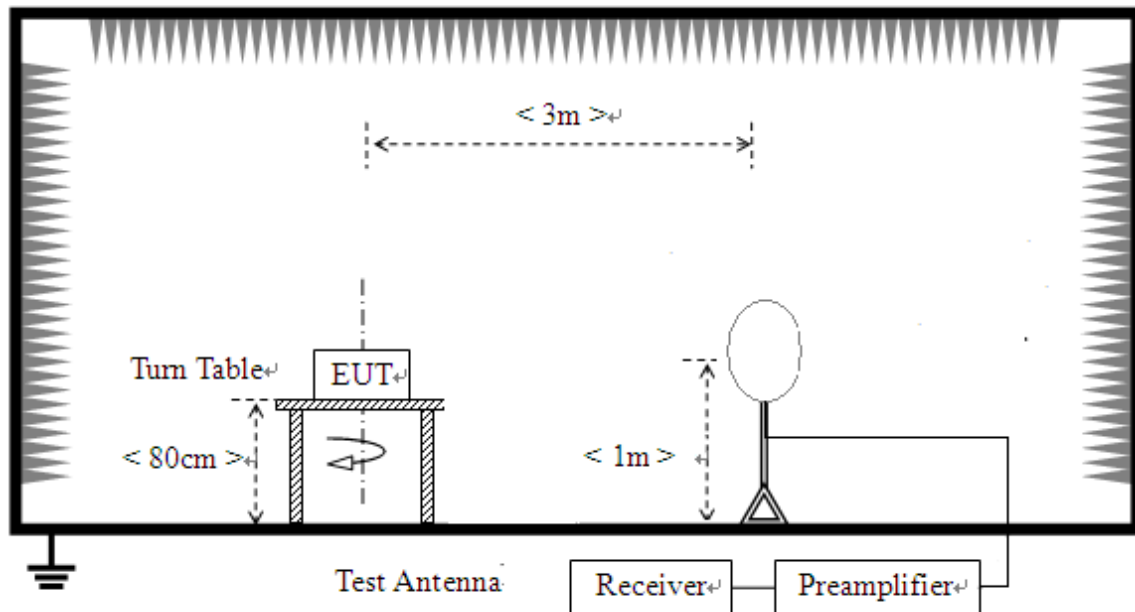

- 2) For radiated emissions from 30MHz to 1GHz

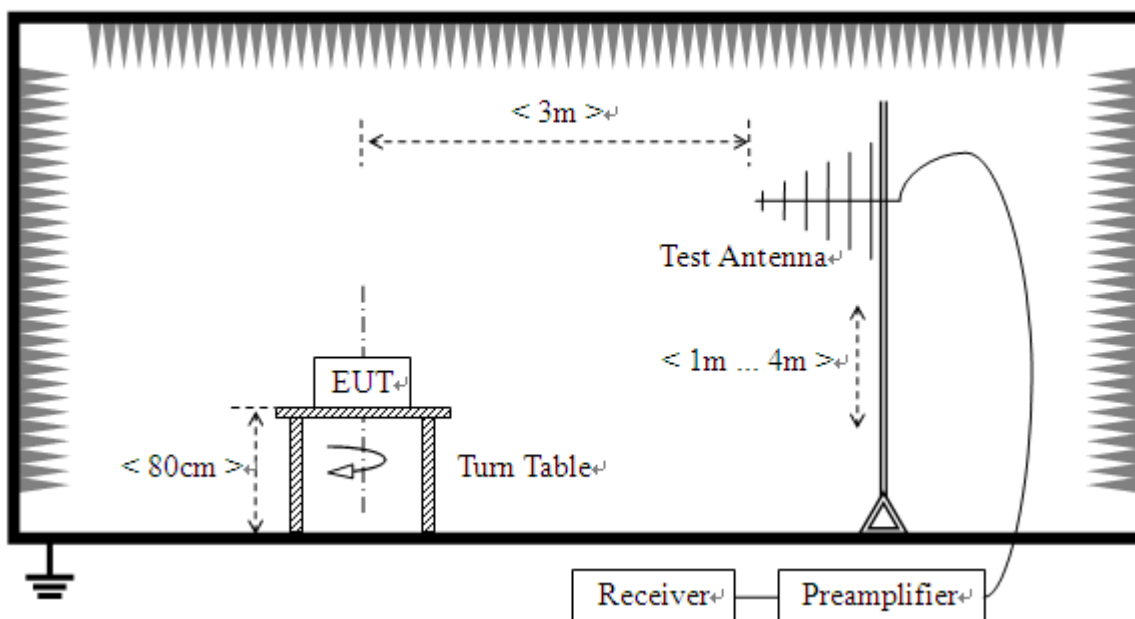

### 3) For radiated emissions above 1GHz

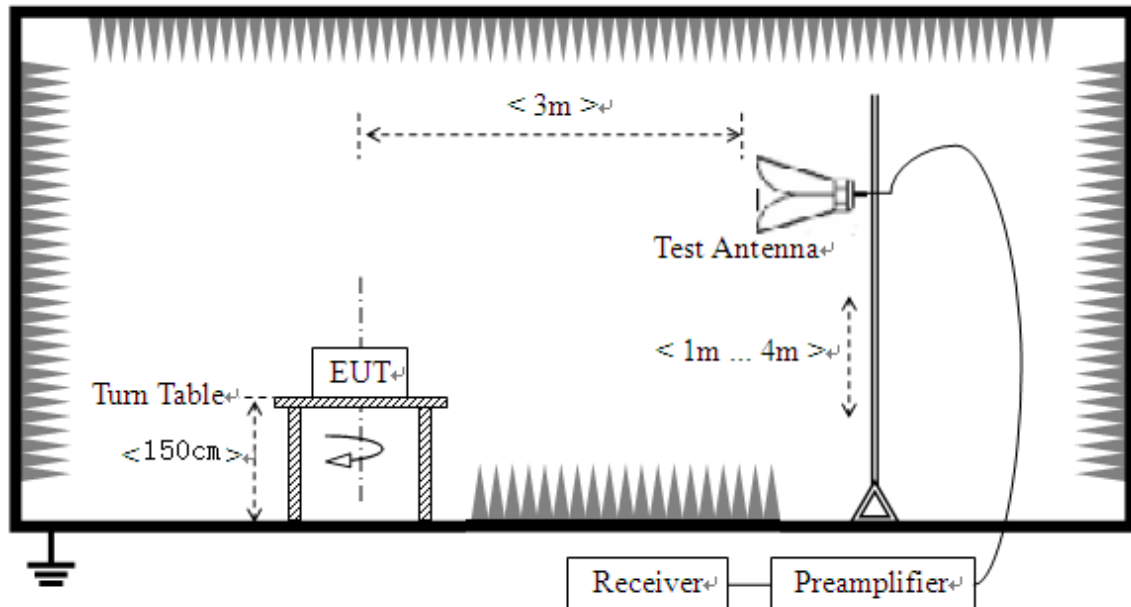

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, for radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be





higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

### 2.2.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




5kbps

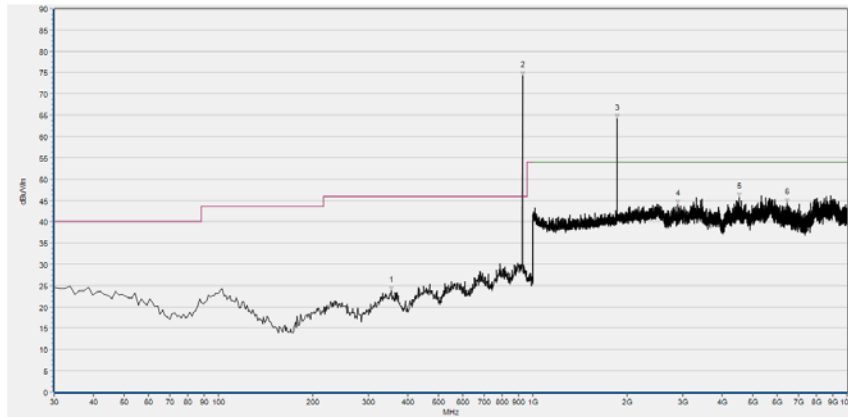**Plot for Channel = 0**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
355.357	23.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
902.159	74.19	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1805.700	64.54	N/A	35.65	74.00	N/A	54.00	Horizontal	PASS
2897.400	44.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4545.881	45.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6447.354	44.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 5kbps)

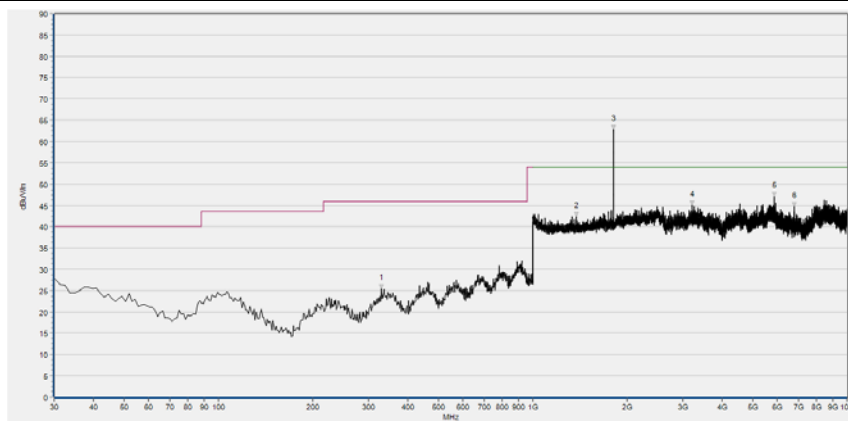

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
329.862	25.52	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1372.629	42.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1805.700	62.73	N/A	34.98	74.00	N/A	54.00	Vertical	PASS
3220.367	45.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5863.321	47.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6791.853	44.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 5kbps)

### Plot for Channel = 64

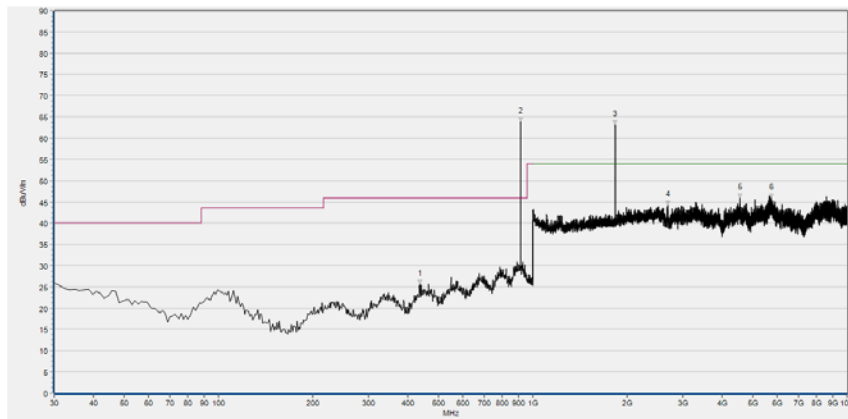

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
437.910	25.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
915.019	63.89	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1829.600	63.35	N/A	34.54	74.00	N/A	54.00	Horizontal	PASS
2687.470	44.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4555.301	45.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5752.973	45.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 5kbps)

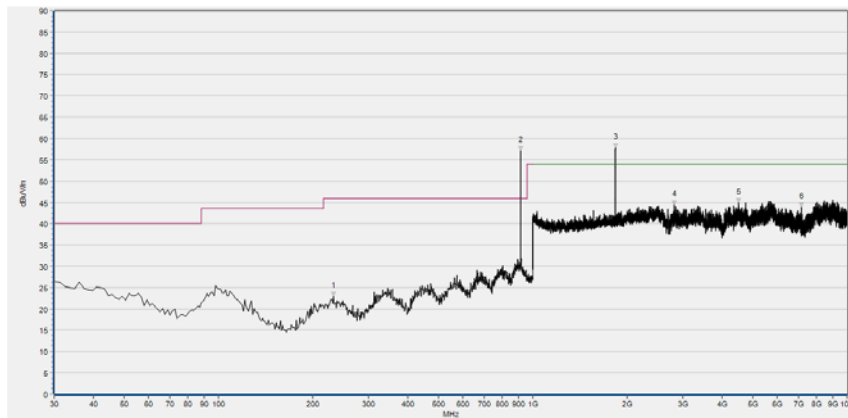

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
232.741	22.88	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
915.019	57.14	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1830.200	57.19	N/A	34.25	74.00	N/A	54.00	Vertical	PASS
2818.003	44.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4524.350	44.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7153.846	43.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 5kbps)

### Plot for Channel = 128

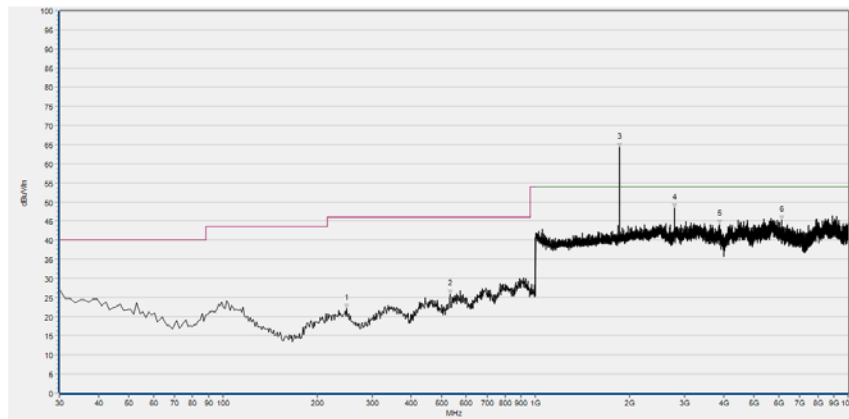

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
248.523	22.12	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
532.603	25.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1853.700	64.66	N/A	35.70	74.00	N/A	54.00	Horizontal	PASS
2780.324	48.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3877.069	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6114.966	45.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 5kbps)

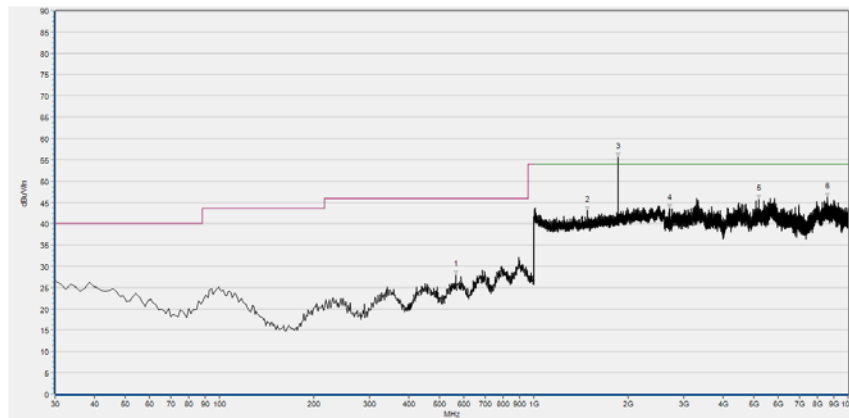

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
565.382	27.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1481.473	43.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1853.800	55.84	N/A	32.18	74.00	N/A	54.00	Vertical	PASS
2707.656	43.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5189.125	45.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8601.819	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 5kbps)

50kbps

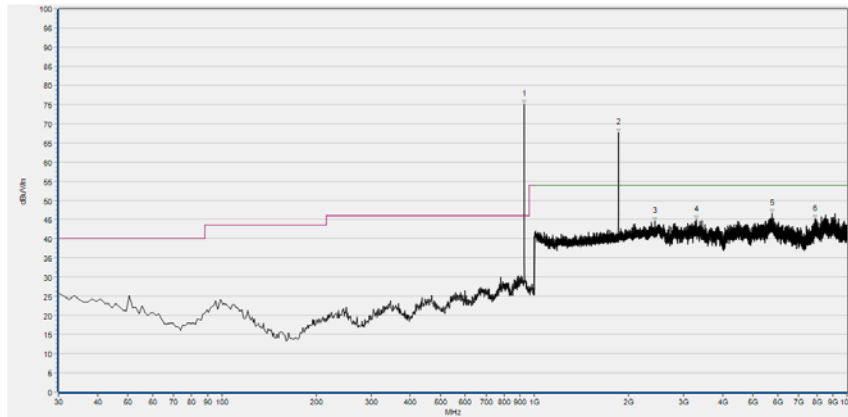**Plot for Channel = 0**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
903.159	75.09	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1806.600	67.82	N/A	37.35	74.00	N/A	54.00	Horizontal	PASS
2425.210	44.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3288.998	44.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5743.553	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7892.635	45.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 5kbps)

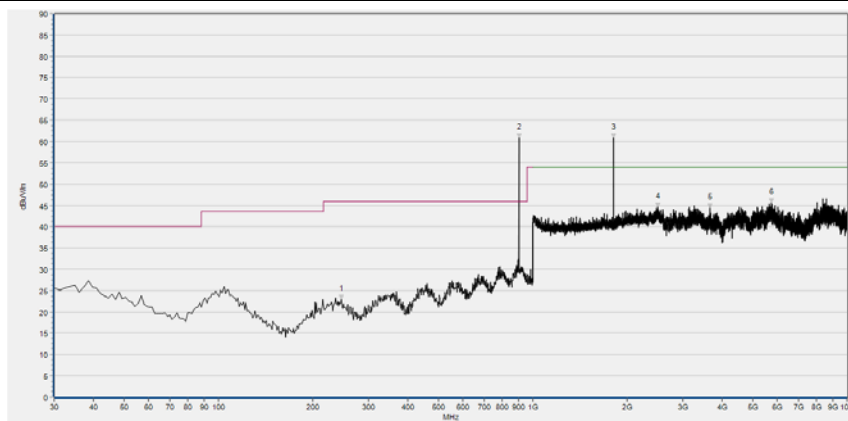

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
246.095	22.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
902.879	60.83	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1805.600	60.27	N/A	33.46	74.00	N/A	54.00	Vertical	PASS
2504.602	44.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3656.374	44.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5757.010	45.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 5kbps)

### Plot for Channel = 64

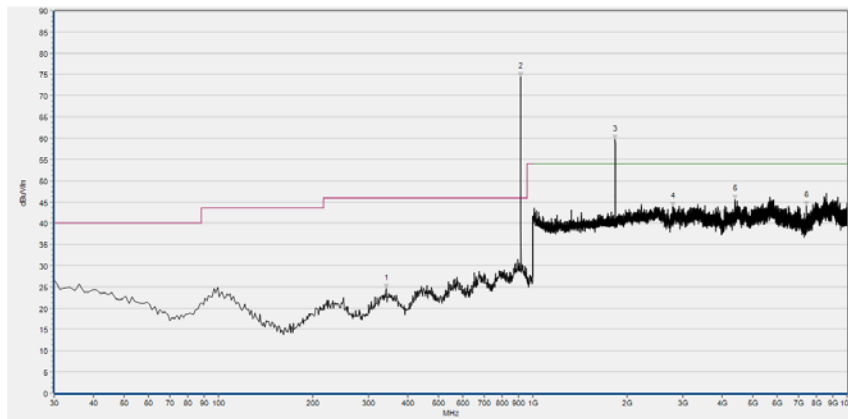

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
342.003	24.60	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
915.019	74.42	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1829.700	59.20	N/A	34.54	74.00	N/A	54.00	Horizontal	PASS
2785.706	43.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4403.237	45.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7405.492	44.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 5kbps)

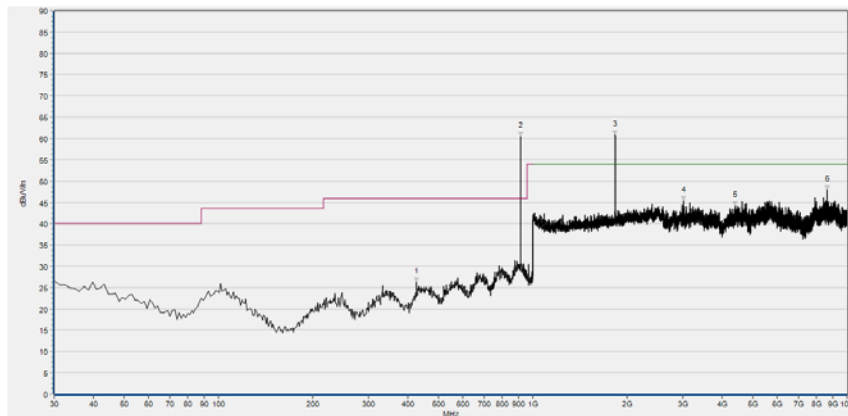

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
426.984	26.36	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
915.019	60.57	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1829.800	61.20	N/A	34.20	74.00	N/A	54.00	Vertical	PASS
3014.475	45.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4407.274	44.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8627.387	48.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 5kbps)

### Plot for Channel = 128

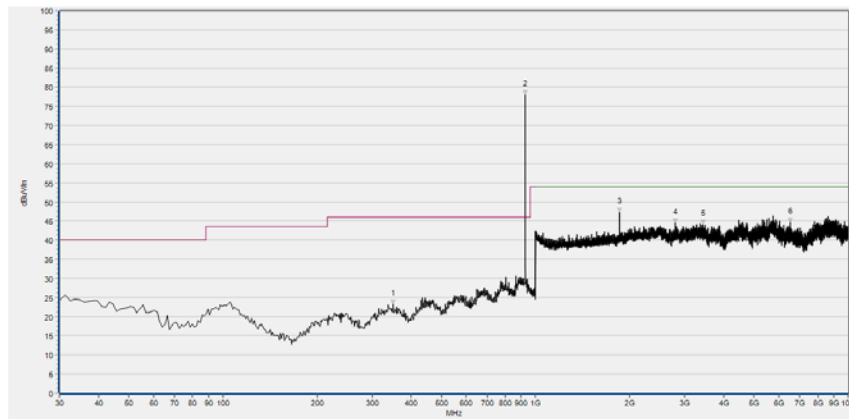

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
350.501	23.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
927.159	77.96	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1854.102	47.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2800.509	44.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3435.679	44.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6534.825	44.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 10GHz, Antenna Horizontal, 5kbps)

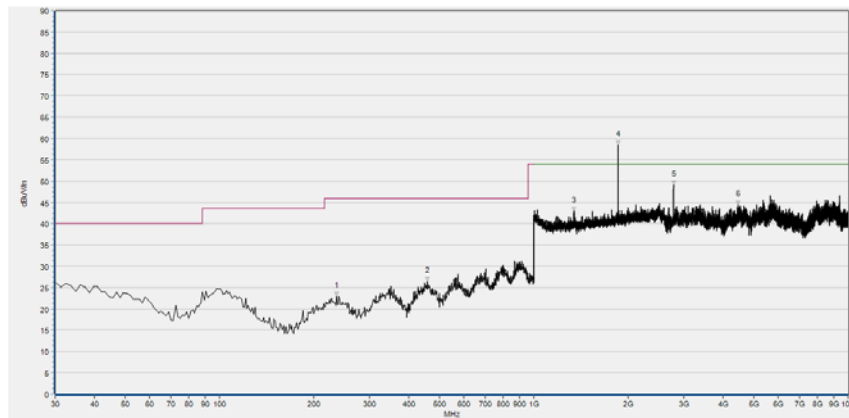


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
236.383	22.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
457.334	26.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1343.818	42.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1853.600	57.11	N/A	32.77	74.00	N/A	54.00	Vertical	PASS
2781.669	49.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4458.411	44.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 10GHz, Antenna Vertical, 5kbps)




200kbps

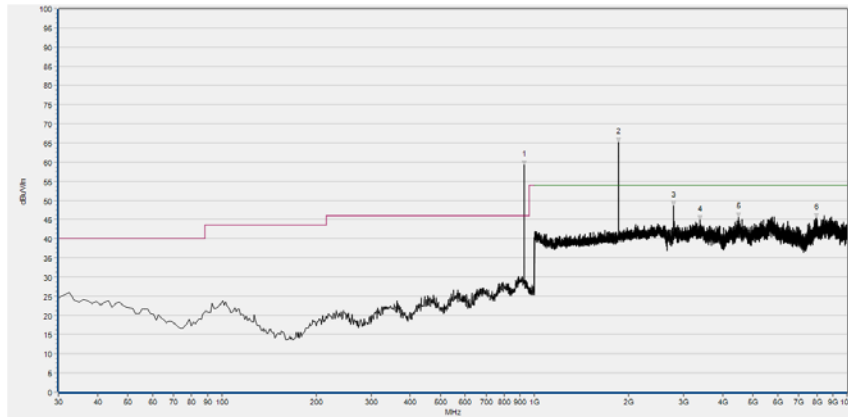**Plot for Channel = 0**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
903.159	59.28	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1805.700	70.18	N/A	34.76	74.00	N/A	54.00	Horizontal	PASS
2781.669	48.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3375.123	44.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4489.362	45.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7967.994	45.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 10GHz, Antenna Horizontal, 200kbps)

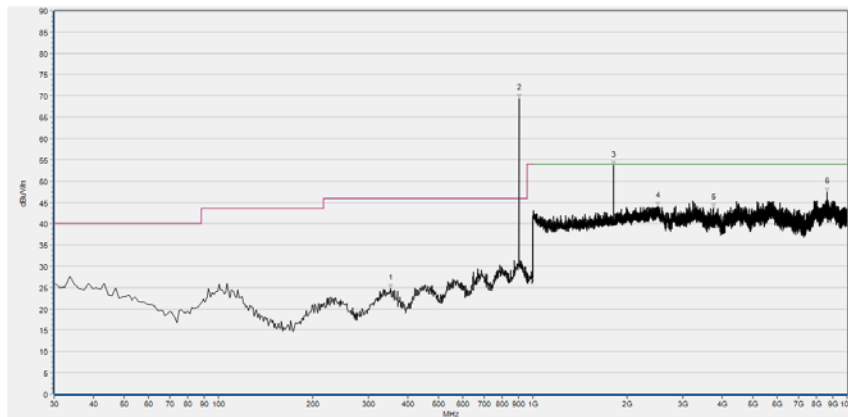


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
352.929	24.80	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
902.879	69.36	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1805.700	54.69	N/A	32.94	74.00	N/A	54.00	Vertical	PASS
2496.279	44.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3762.684	43.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8615.276	47.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 10GHz, Antenna Vertical, 200kbps)




### Plot for Channel = 32

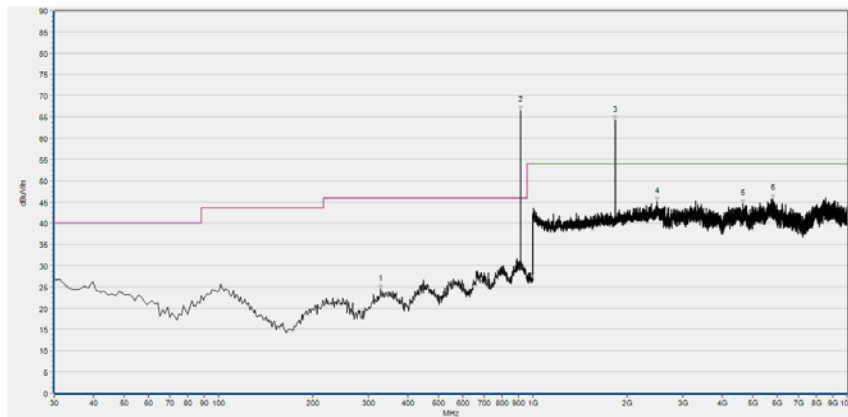

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
328.648	24.45	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
915.019	66.49	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1829.700	64.32	N/A	35.56	74.00	N/A	54.00	Horizontal	PASS
2483.473	45.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4653.537	44.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5794.690	45.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 10GHz, Antenna Horizontal, 200kbps)

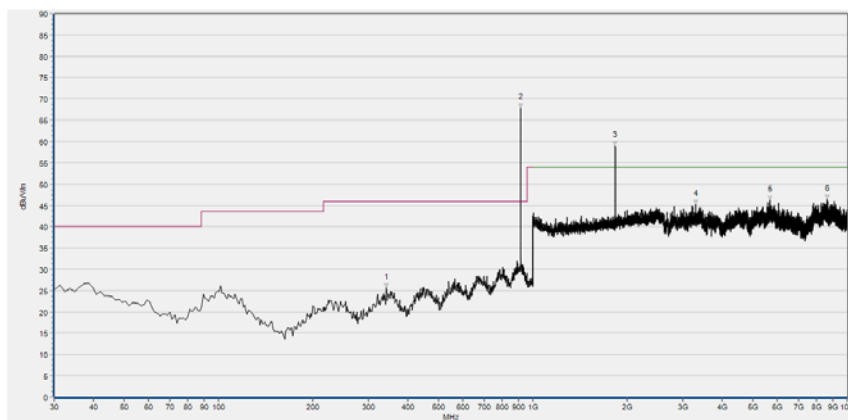

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
342.003	25.68	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
915.019	67.93	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1830.400	57.67	N/A	33.74	74.00	N/A	54.00	Vertical	PASS
3297.072	45.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5687.034	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8623.350	46.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 10GHz, Antenna Vertical, 200kbps)

### Plot for Channel = 63

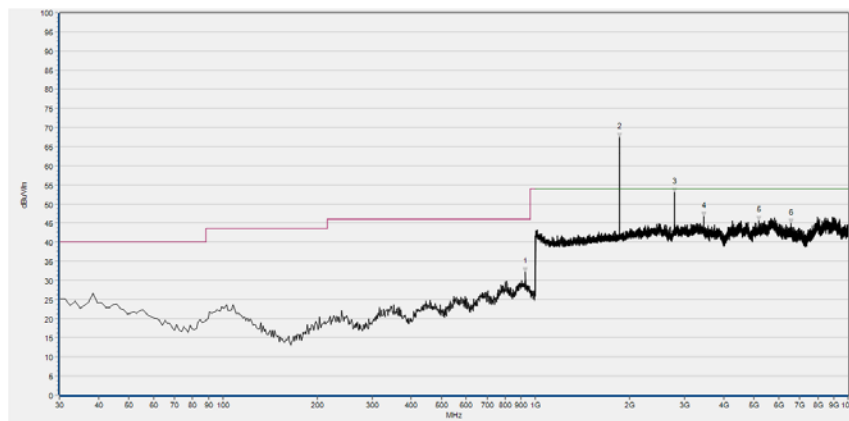

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
928.373	32.25	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1853.600	67.87	N/A	37.17	74.00	N/A	54.00	Horizontal	PASS
2780.324	52.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3455.865	46.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5181.051	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6557.701	44.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 10GHz, Antenna Horizontal, 200kbps)

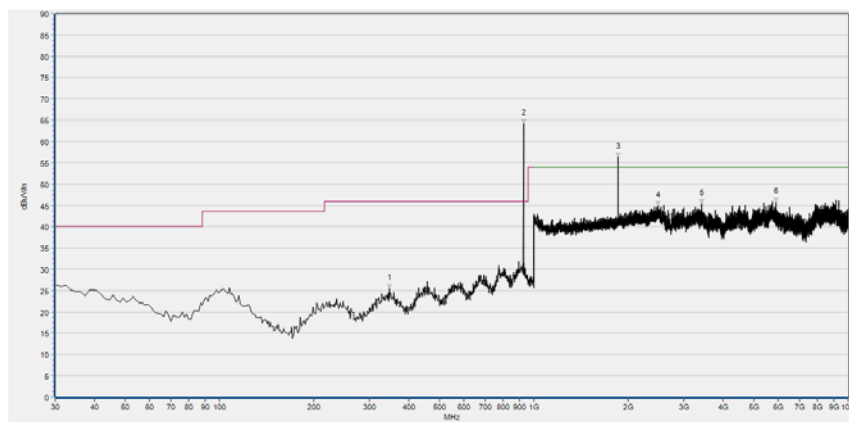

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
346.859	25.46	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
927.159	64.20	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1853.600	55.90	N/A	32.49	74.00	N/A	54.00	Vertical	PASS
2482.193	44.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3426.259	45.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5879.469	45.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 10GHz, Antenna Vertical, 200kbps)



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2019.05.08	2020.05.09
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
PC	OB68192 JS	T430i	Lenovo	NA	NA
Adapter	NA	ADLX90N CT3A	Lenovo	NA	NA

##### 4.2 List of Software Used

Description	Manufacturer	Software Version
MORLAB EMCR V1.2	MORLAB	V1.0

**4.3 Radiated Test Equipments**

<b>Equipment Name</b>	<b>Serial No.</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Cal. Date</b>	<b>Cal. Due</b>
Receiver	MY54130016	N9038A	Agilent	2019.07.26	2020.07.25
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.08	2020.05.09
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.15	2020.02.14
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2020.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2020.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2019.05.08	2020.05.09
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————