

# FCC Part 15E

## Measurement and Test Report

For

**RTC Industries, Inc.**

**2800 Golf Road. Rolling Meadows, IL. USA**

**FCC ID: 2ABUA-T200111**

**FCC Rule(s):** FCC Part 15.407

**Product Description:** ProfitPoint™ 10"

**Tested Model:** T200111

**Report No.:** WTE19X02008847W-1

**Sample Receipt Date:** 2019-02-22

**Tested Date:** 2019-02-22 to 2019-03-15

**Issued Date:** 2019-04-03

**Tested By:** Jason Su/ Engineer

**Reviewed By:** Silin Chen / EMC Manager

**Approved & Authorized By:** Jandy So / PSQ Manager

**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING .....	4
1.5 EUT OPERATING DURING TEST .....	5
1.6 TEST FACILITY .....	5
1.7 EUT SETUP AND TEST MODE.....	6
1.8 MEASUREMENT UNCERTAINTY .....	7
1.9 TEST EQUIPMENT LIST AND DETAILS .....	8
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>3. RF EXPOSURE .....</b>	<b>10</b>
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
<b>4. ANTENNA REQUIREMENT .....</b>	<b>11</b>
4.1 STANDARD APPLICABLE.....	11
4.2 EVALUATION INFORMATION .....	11
<b>5. CONDUCTED EMISSIONS .....</b>	<b>12</b>
5.1 TEST PROCEDURE.....	12
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	12
5.3 TEST RECEIVER SETUP .....	12
5.4 SUMMARY OF TEST RESULTS/PLOTS .....	12
<b>6. POWER SPECTRAL DENSITY .....</b>	<b>15</b>
6.1 STANDARD APPLICABLE.....	15
6.2 TEST PROCEDURE.....	15
6.3 SUMMARY OF TEST RESULTS/PLOTS .....	16
<b>7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....</b>	<b>25</b>
7.1 STANDARD APPLICABLE.....	25
7.2 TEST PROCEDURE.....	25
7.3 SUMMARY OF TEST RESULTS/PLOTS .....	27
<b>8. MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>36</b>
8.1 STANDARD APPLICABLE.....	36
8.2 TEST PROCEDURE.....	36
8.3 SUMMARY OF TEST RESULTS/PLOTS .....	37
<b>9. RADIATED SPURIOUS EMISSIONS.....</b>	<b>46</b>
9.1 STANDARD APPLICABLE.....	46
9.2 TEST PROCEDURE.....	46
9.3 TEST RECEIVER SETUP .....	48
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	48
9.5 SUMMARY OF TEST RESULTS/PLOTS .....	48
<b>10. FREQUENCY STABILITY .....</b>	<b>78</b>
10.1 STANDARD APPLICABLE.....	78
10.2 TEST PROCEDURE.....	78
10.3 SUMMARY OF TEST RESULTS/PLOTS .....	78

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: RTC Industries, Inc.  
Address of applicant: 2800 Golf Road. Rolling Meadows, IL. USA

Manufacturer: Chengdu Vantron Technology, Ltd.  
Address of manufacturer: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China 610045

General Description of EUT	
Product Name:	ProfitPoint™ 10"
Brand Name:	/
Model No.:	T200111
Adding Model(s):	/
Rated Voltage:	Adapter DC12V
Battery Capacity:	/
Power Adapter:	S024AMM1200200 Input:AC100-240V 50/60Hz 600mA Output: DC12V 2000mA
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	13.94dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM, 256QAM
Data Rate:	6-54Mbps, up to 433.3Mbps
Type of Antenna:	Integral Antenna
Antenna Gain:	2dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407:** General technical requirements.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01:** GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Table for parameters of Test Software setting

Install “RFTestTool.apk” and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	76	76	76	/	/	/	/	/	/	/	76	76	76
802.11n-HT20 MCS0	76	76	76	/	/	/	/	/	/	/	76	76	76
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	76	76	/	/	/	/	/	/	76	76			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	76		/		/		/		/		76		

### **1.5 EUT Operating during test**

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

### **1.6 Test Facility**

#### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

#### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz,5775 MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	2.95	Unshielded	With Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
RJ45 Cable	2.0	Unshielded	Without Ferrite
HDMI Cable	1.4	Shielded	With Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-18	2019-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-18	2019-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-18	2019-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-18	2019-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-18	2019-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-18	2019-03-17



## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1091, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the MPE Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

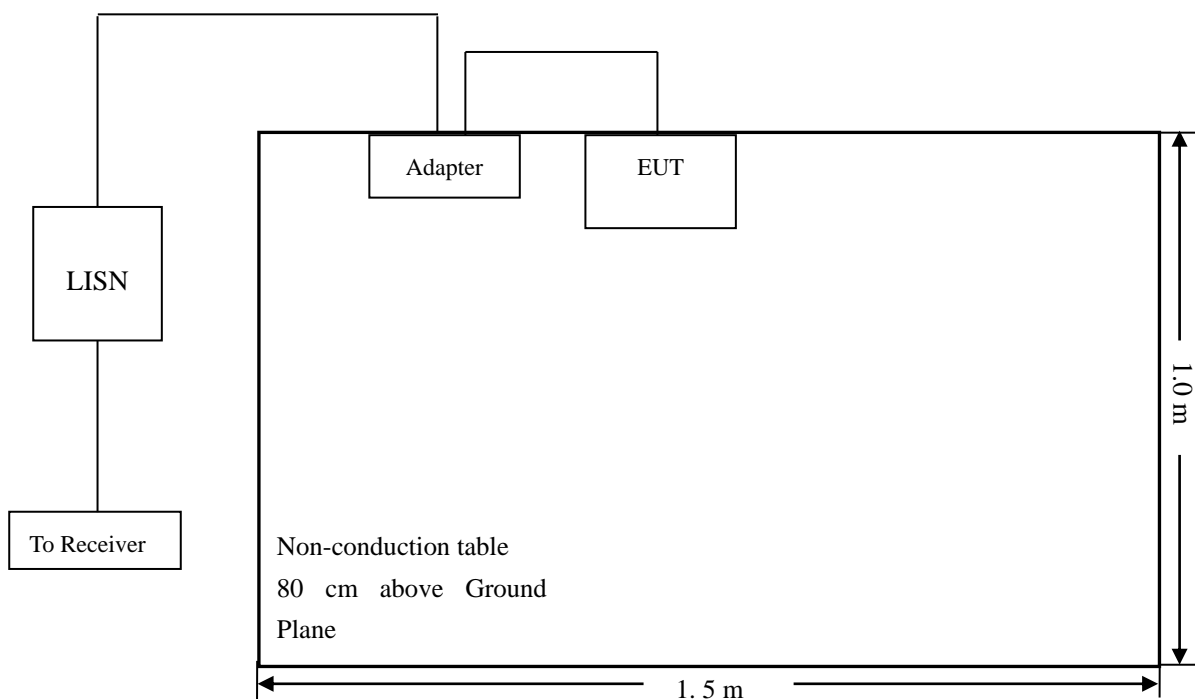
## 5. Conducted Emissions

### 5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 5.2 Basic Test Setup Block Diagram




### 5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 5.4 Summary of Test Results/Plots

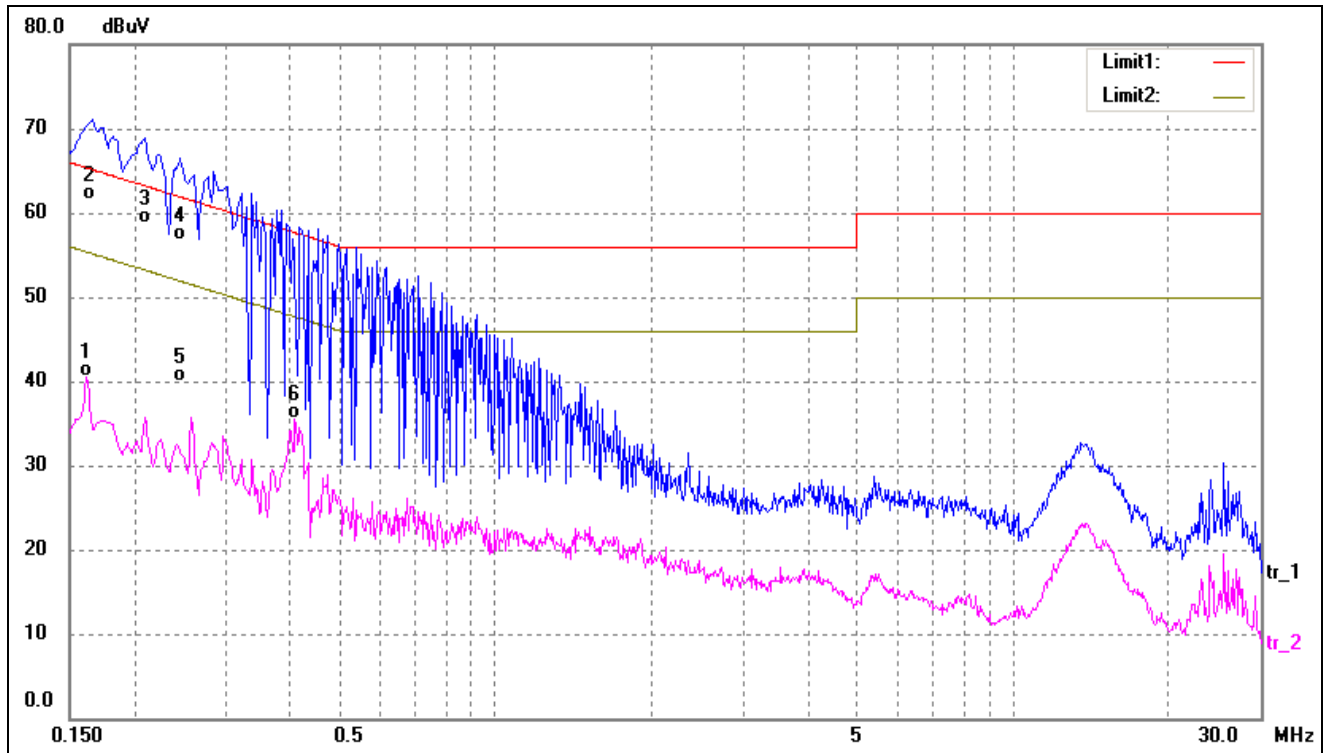Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	30.46	10.10	40.56	55.36	-14.80	AVG
2*	0.1660	51.49	10.11	61.60	65.16	-3.56	QP
3	0.2100	48.63	10.13	58.76	63.21	-4.45	QP
4	0.2460	46.59	10.15	56.74	61.89	-5.15	QP
5	0.2460	29.77	10.15	39.92	51.89	-11.97	AVG
6	0.4100	25.30	10.25	35.55	47.65	-12.10	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

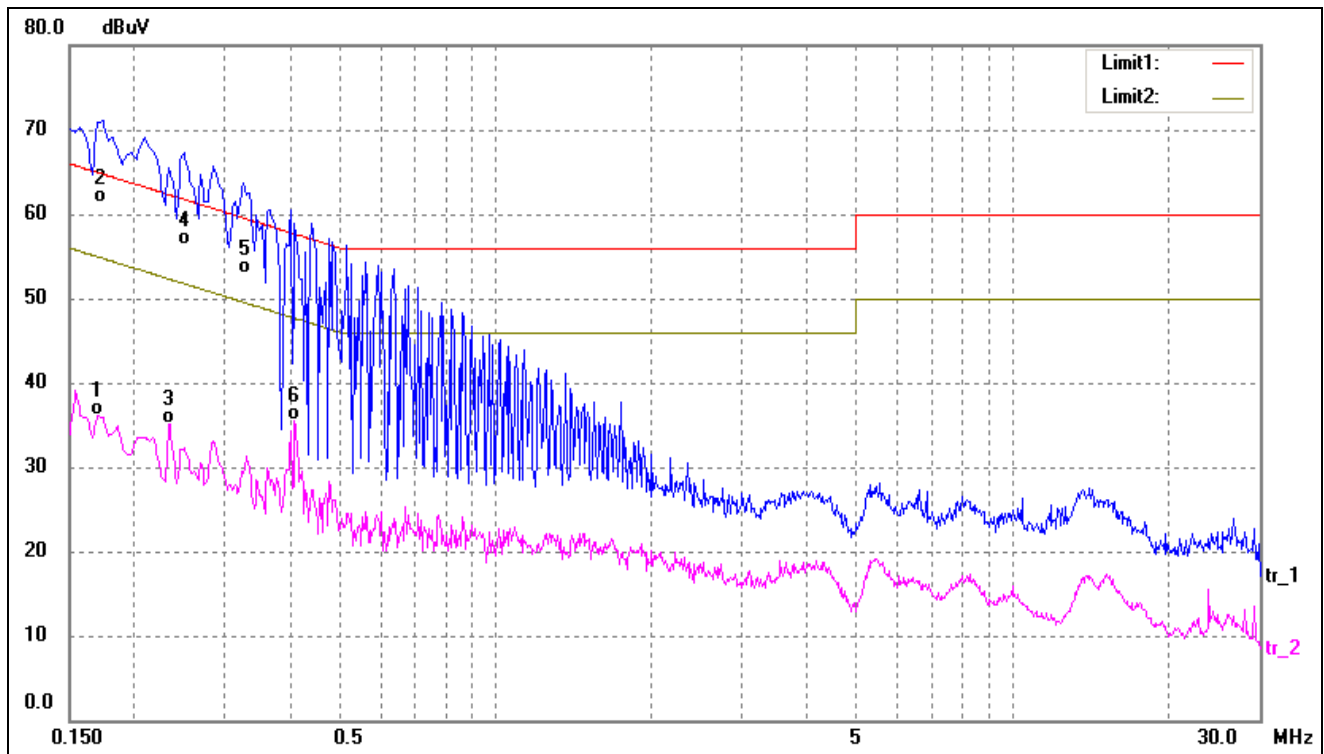

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	25.99	10.11	36.10	54.96	-18.86	AVG
2*	0.1740	51.11	10.11	61.22	64.77	-3.55	QP
3	0.2340	25.04	10.14	35.18	52.31	-17.13	AVG
4	0.2500	46.16	10.16	56.32	61.76	-5.44	QP
5	0.3260	42.72	10.20	52.92	59.55	-6.63	QP
6	0.4100	25.16	10.25	35.41	47.65	-12.24	AVG

## 6. Power Spectral Density

---

### 6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ( $< 1 \text{ MHz}$ , or  $< 500 \text{ kHz}$ ) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ kHz}$  is available on nearly all spectrum analyzers.

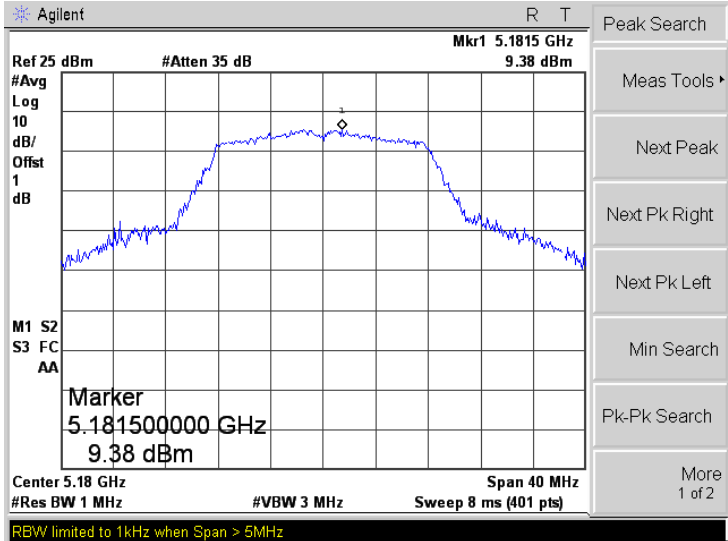
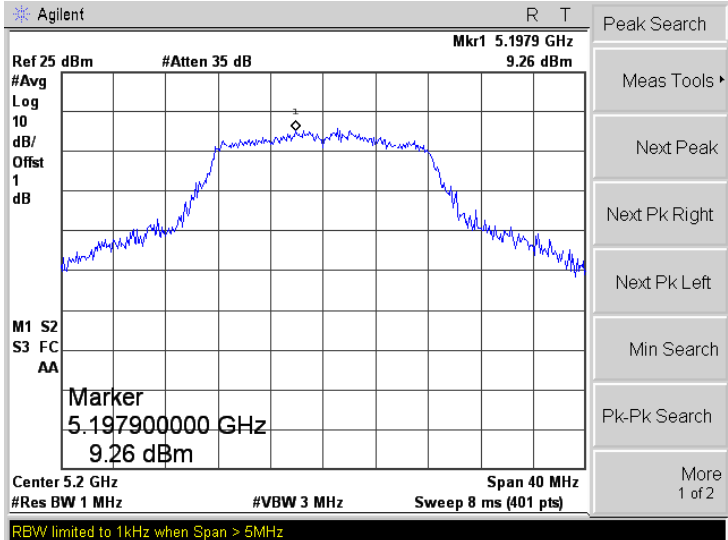
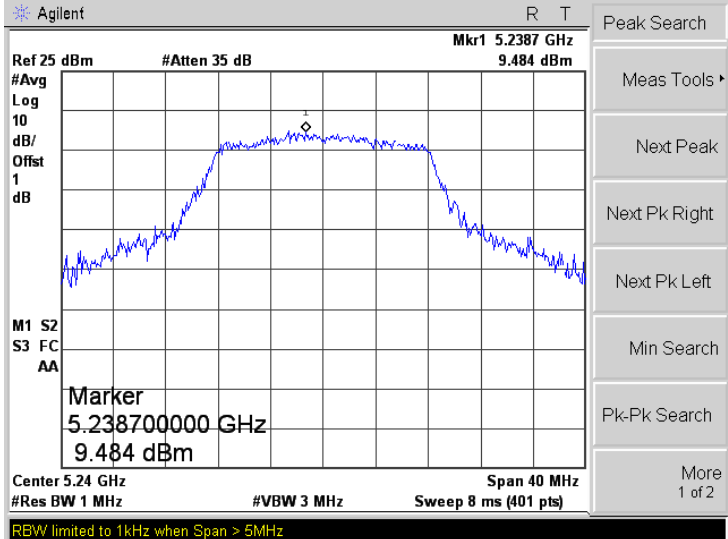
### 6.3 Summary of Test Results/Plots




U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	9.380	11
	5200	9.260	11
	5240	9.484	11
802.11n-HT20	5180	9.465	11
	5200	9.895	11
	5240	8.633	11
802.11n-HT40	5190	6.552	11
	5230	6.103	11
802.11ac-HT80	5210	3.336	11



U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	5.447	2.22	7.667	30
	5785	4.844	2.22	7.064	30
	5825	5.640	2.22	7.860	30
802.11n-HT20	5745	4.477	2.22	6.697	30
	5785	4.209	2.22	6.429	30
	5825	4.247	2.22	6.467	30
802.11n HT40	5755	1.010	2.22	3.230	30
	5795	1.650	2.22	3.870	30
802.11ac VH80	5775	-1.868	2.22	0.352	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					




➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

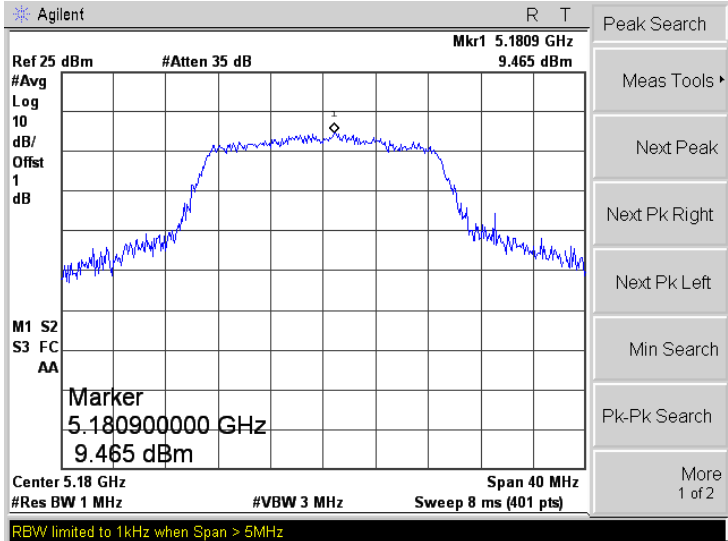
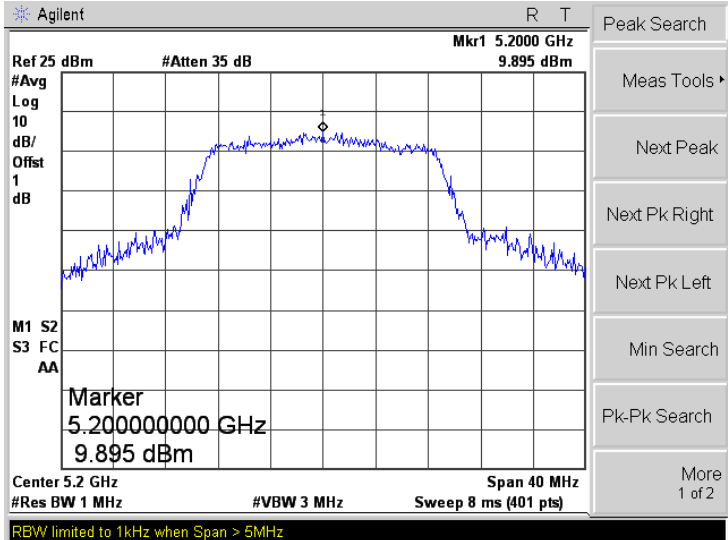
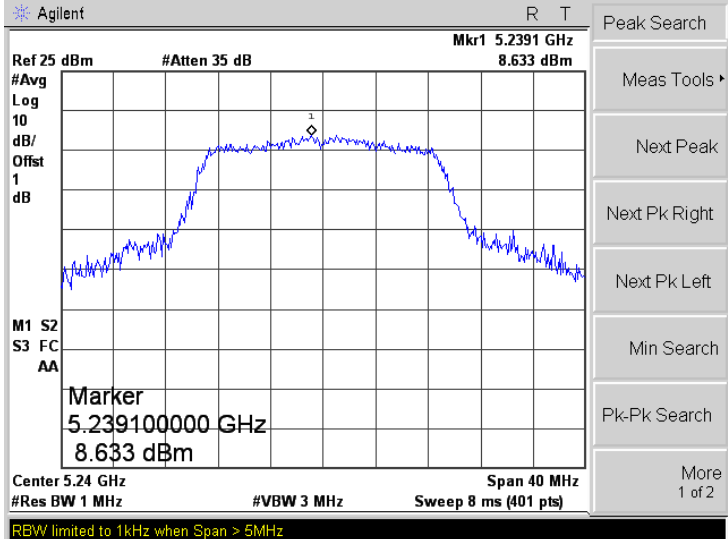
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

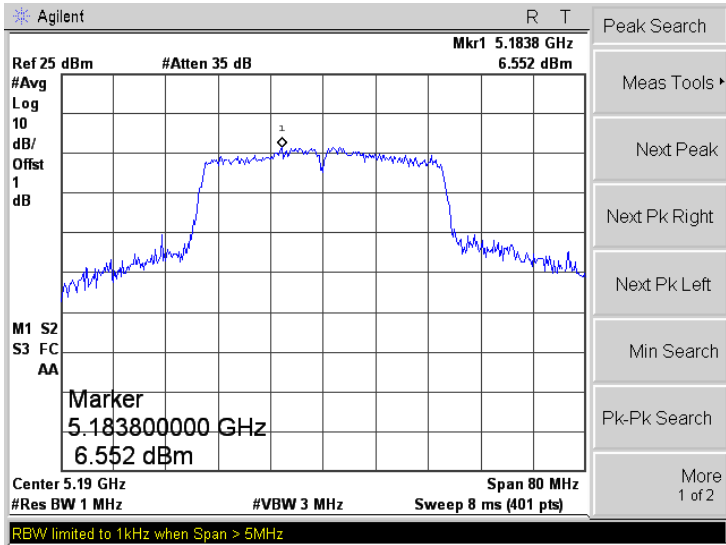
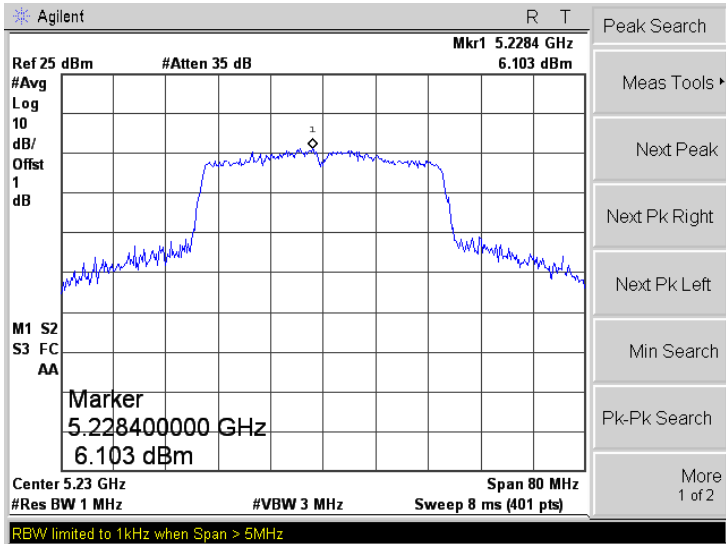
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

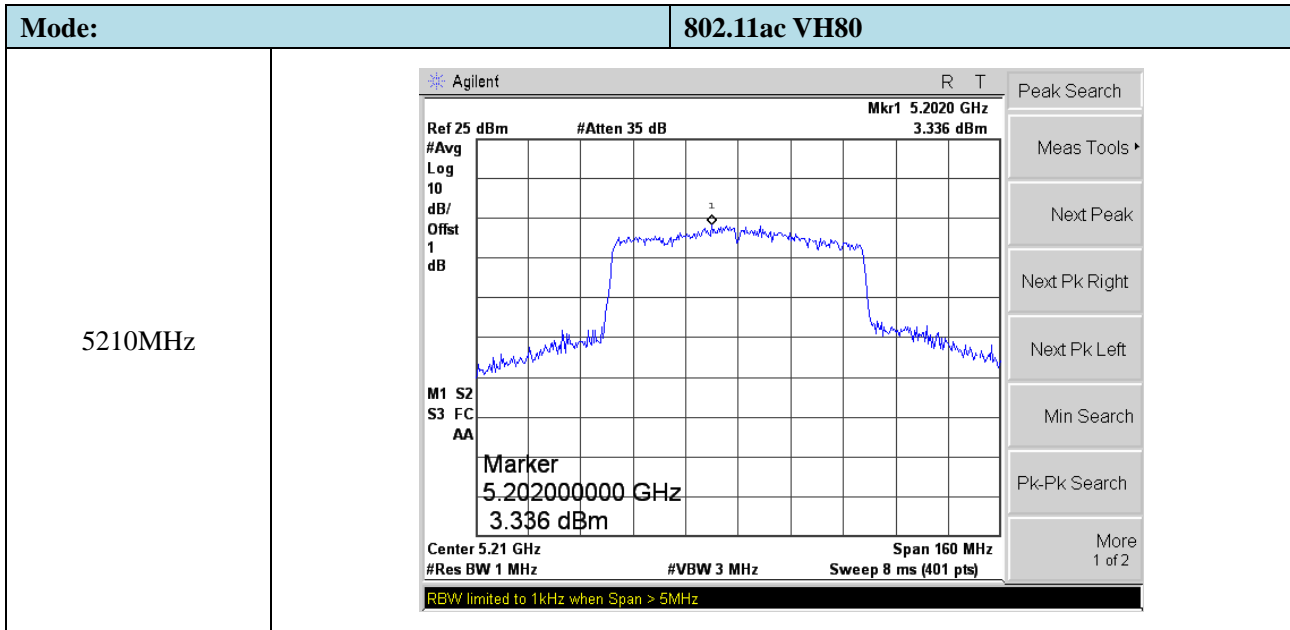


➤ 5725-5850MHz

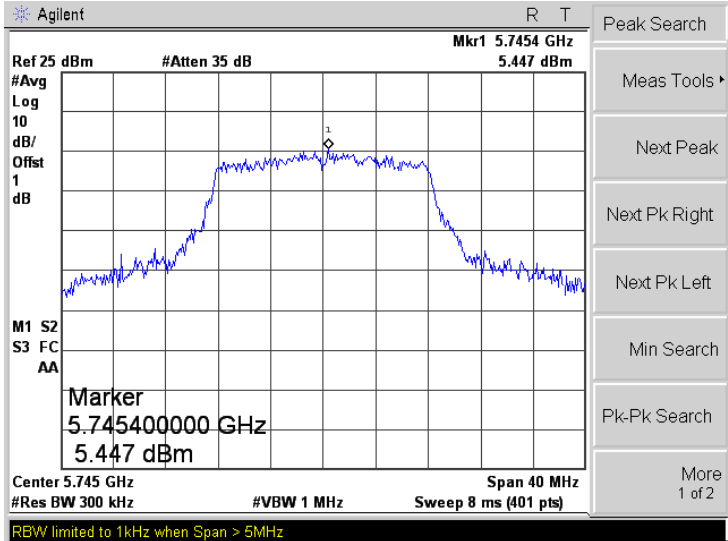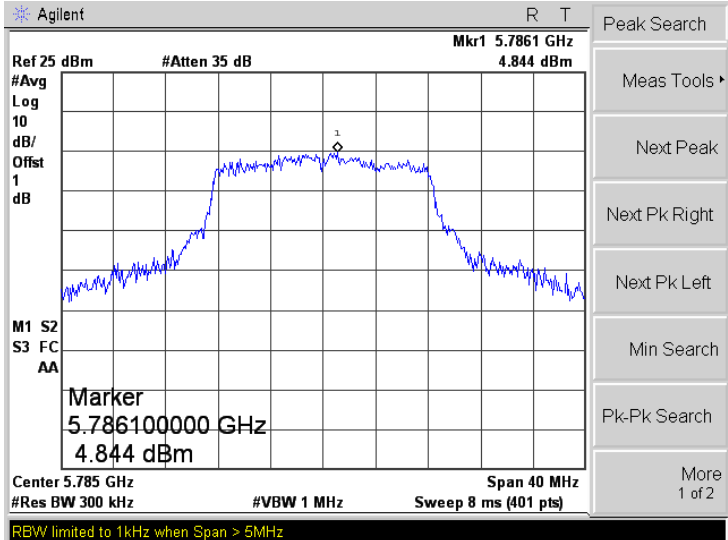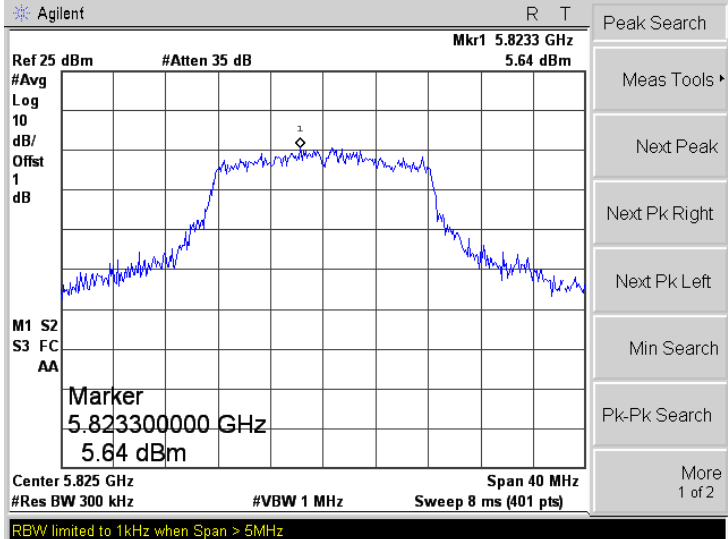Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

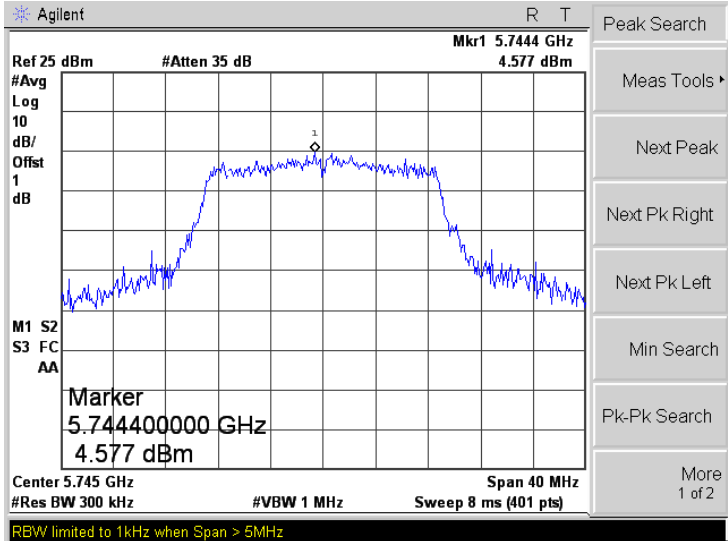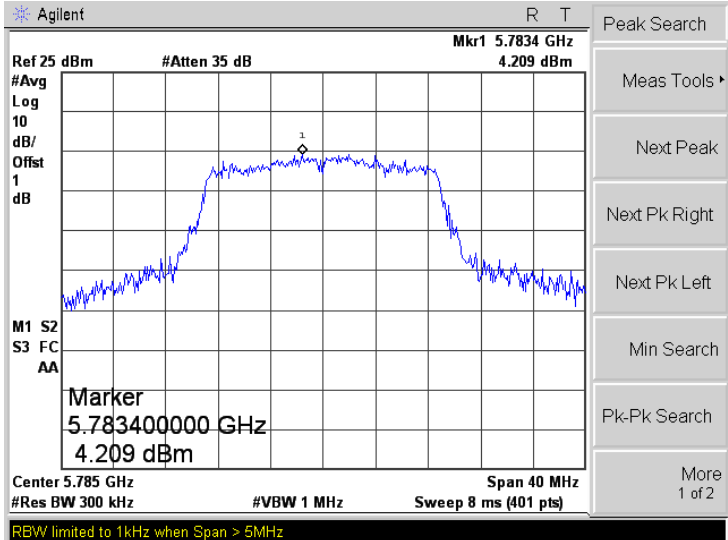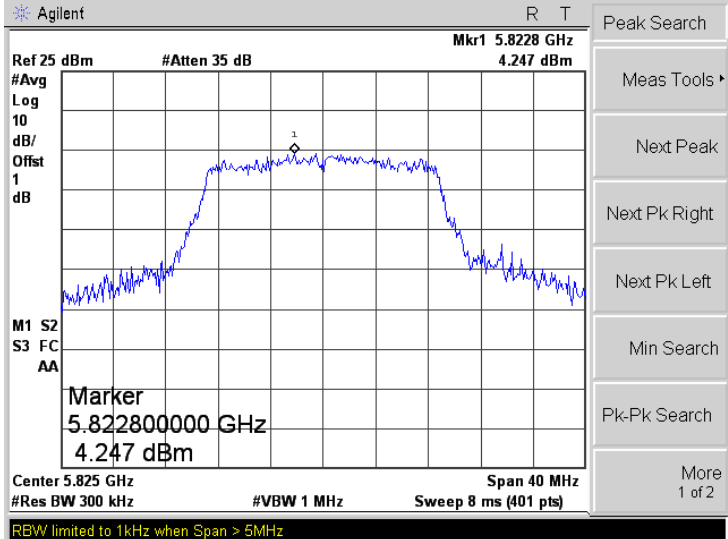Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

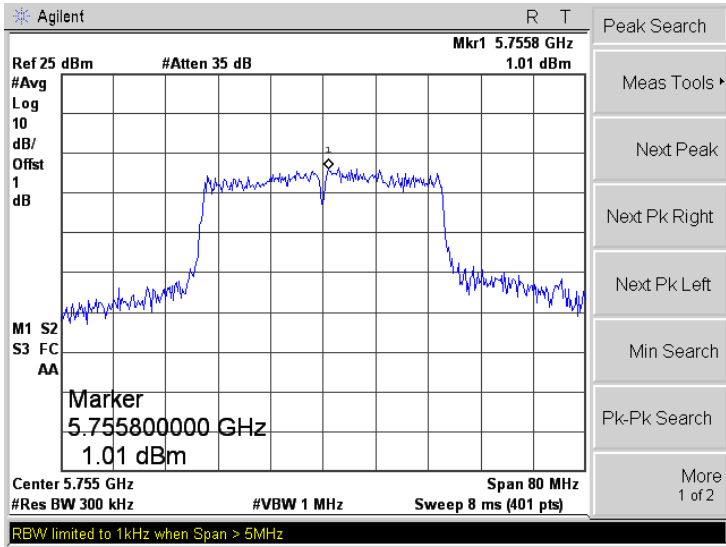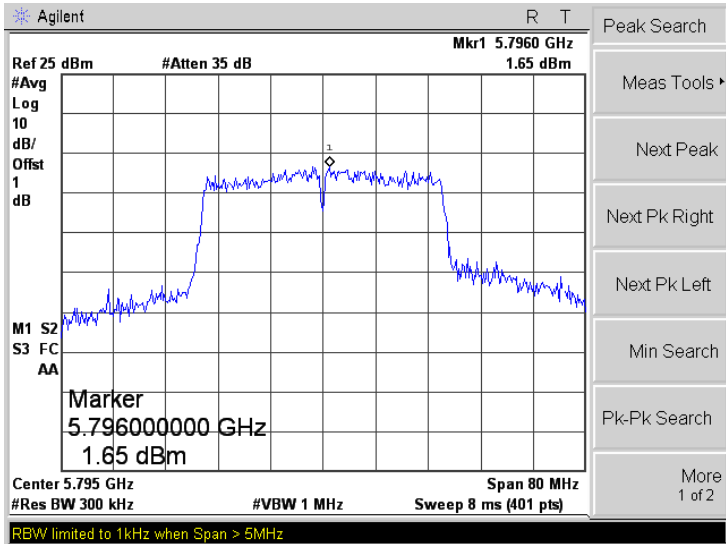Mode:	802.11n-HT40
5755MHz	
5795MHz	

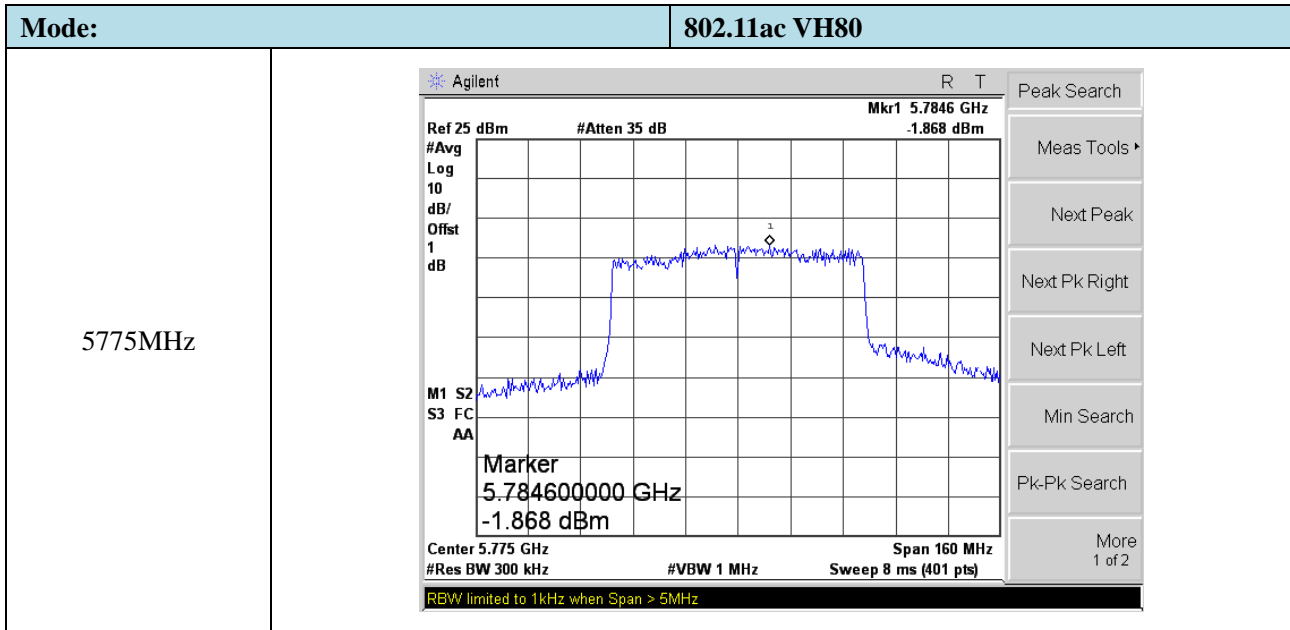



## 7. Emission Bandwidth and Occupied Bandwidth

---

### 7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

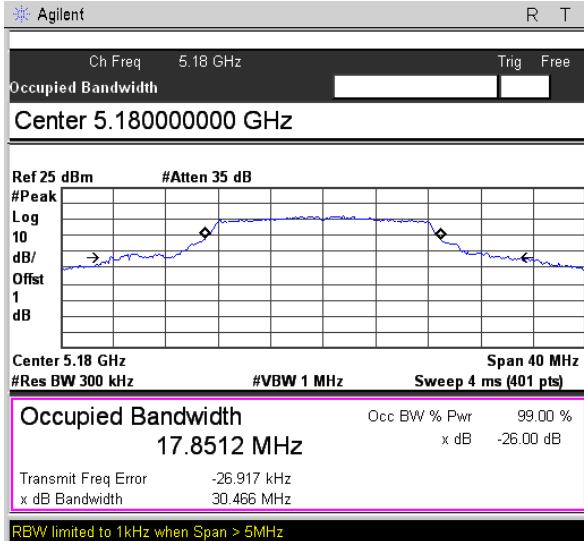
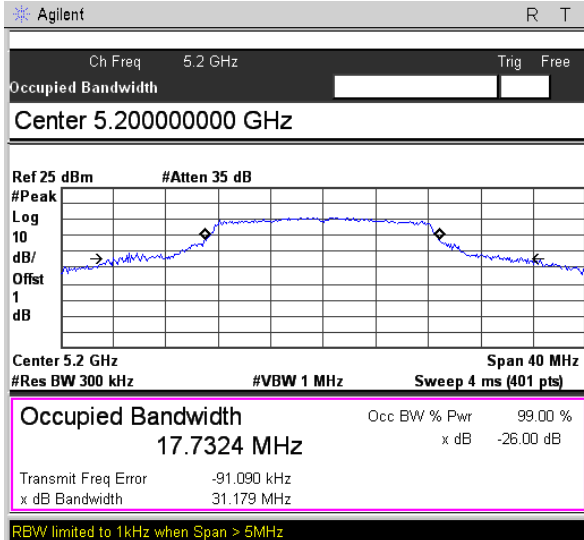
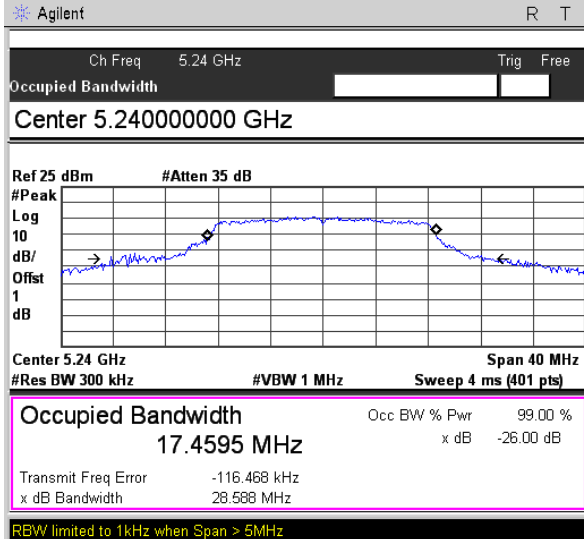
1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 * \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

### 7.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Result
802.11a	5180	30.466	17.8512	Pass
	5200	31.179	17.7324	Pass
	5240	28.588	17.4595	Pass
802.11n-HT20	5180	27.825	18.3900	Pass
	5200	30.309	18.5569	Pass
	5240	25.640	18.3837	Pass
802.11n-HT40	5190	65.492	37.1928	Pass
	5230	64.795	36.9558	Pass
802.11ac-HT80	5210	11.593	75.8874	Pass



U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.427	17.5035	≥500
	5785	16.329	17.3813	≥500
	5825	16.309	17.4569	≥500
802.11n-HT20	5745	17.309	17.2886	≥500
	5785	17.584	18.4305	≥500
	5825	17.594	18.2218	≥500
802.11n-HT40	5755	36.057	37.0800	≥500
	5795	36.004	36.8758	≥500
802.11ac-HT80	5775	76.028	76.0539	≥500


➤ 5150-5250MHz

Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	




---

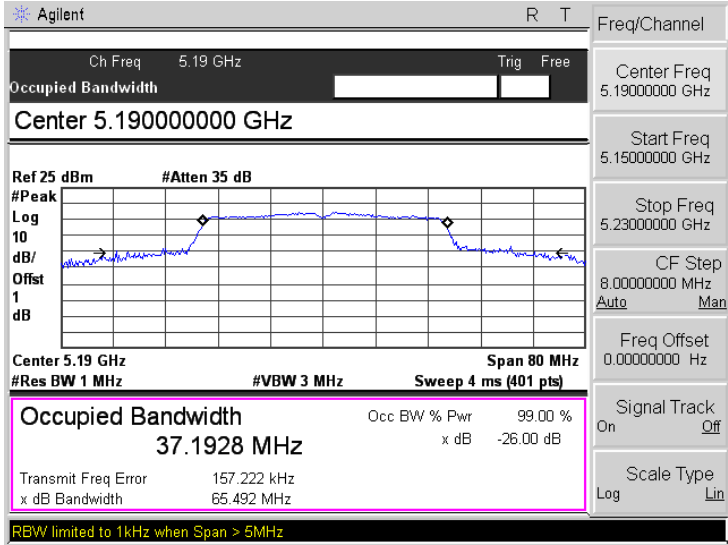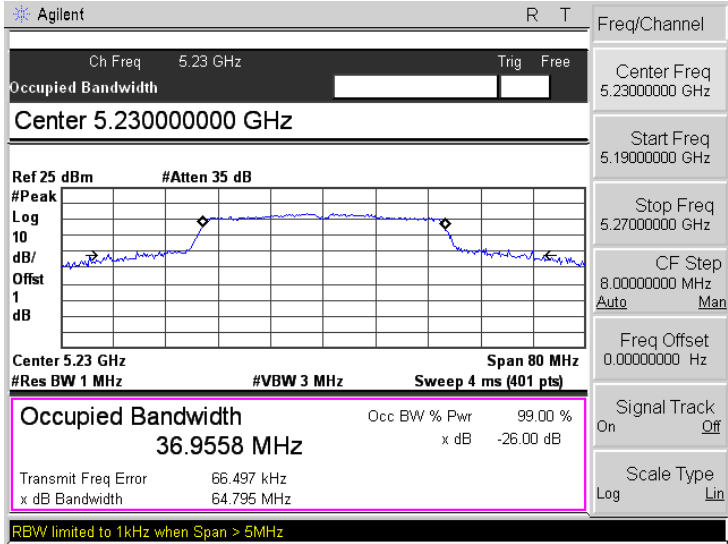Report No.: WTE19X02008847W-1Page 29 of 79FCC Part 15E




Mode:	802.11n-HT40
5190 MHz	
5230 MHz	


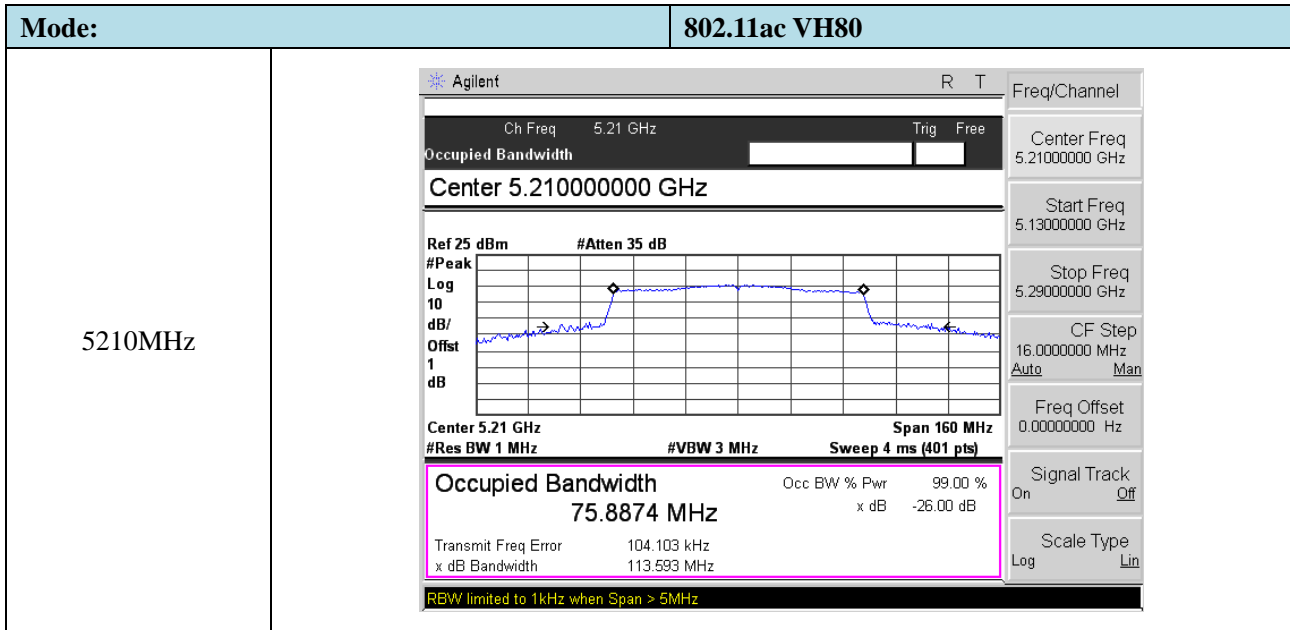



➤ 5725-5850MHz

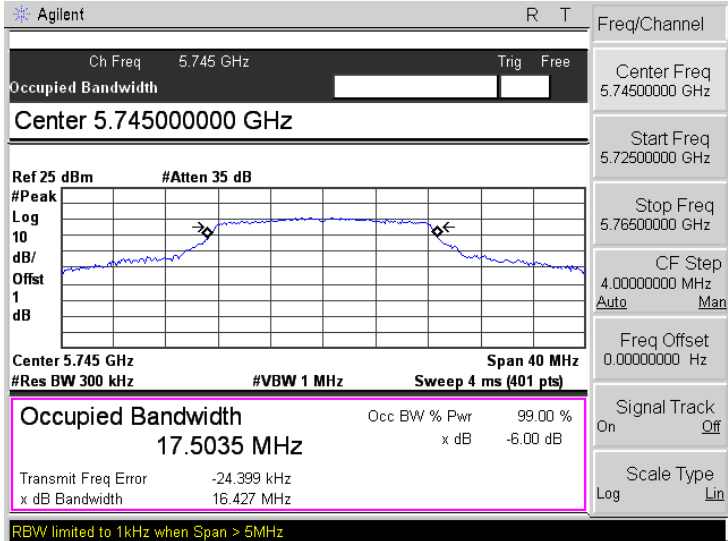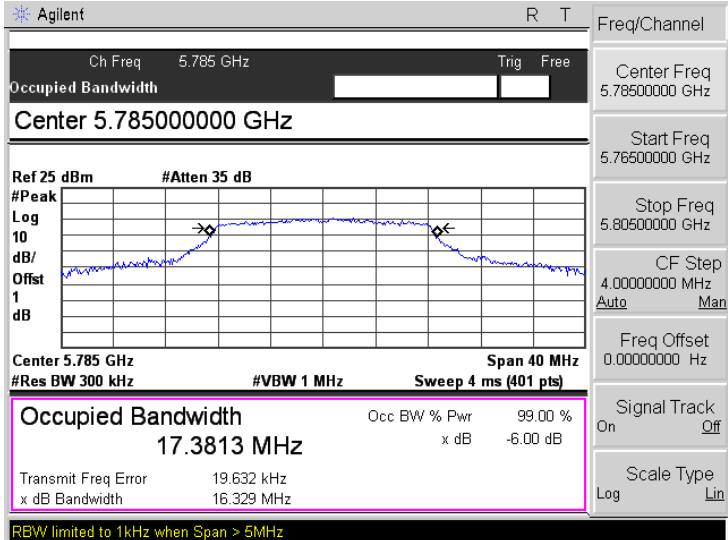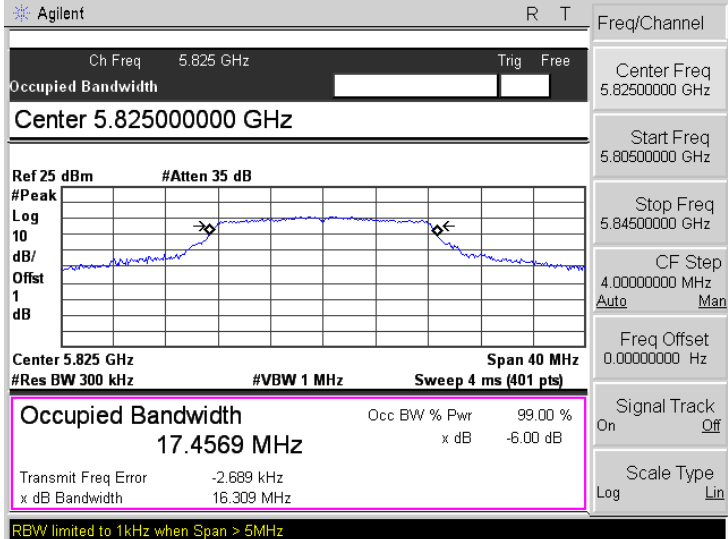Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

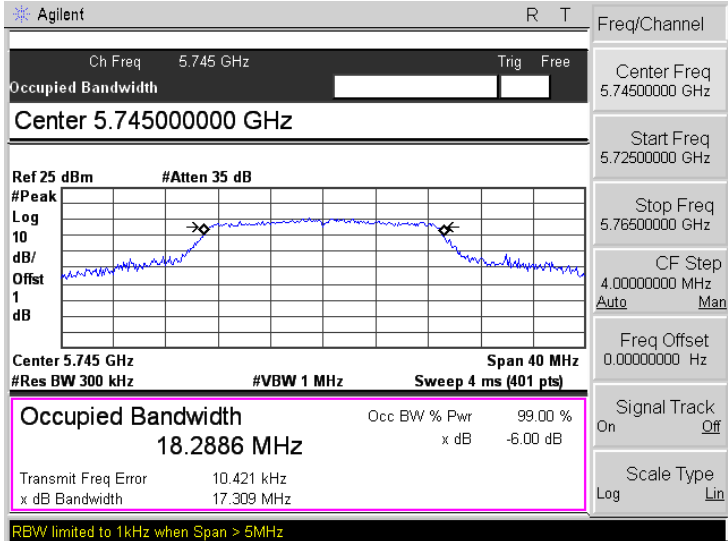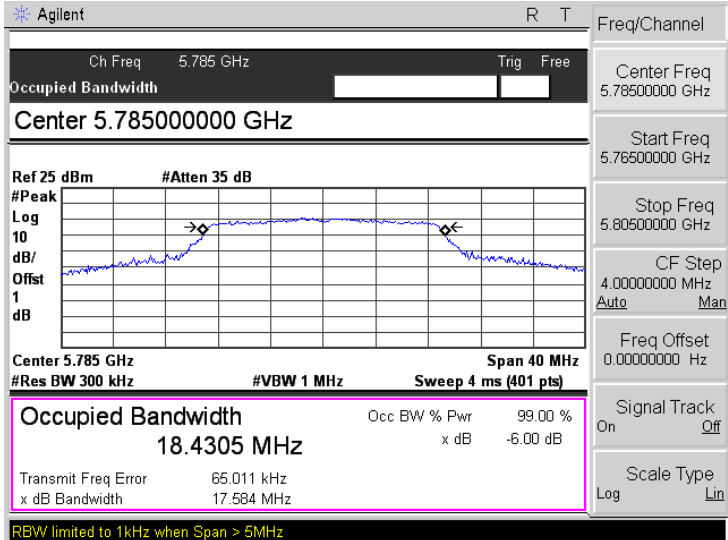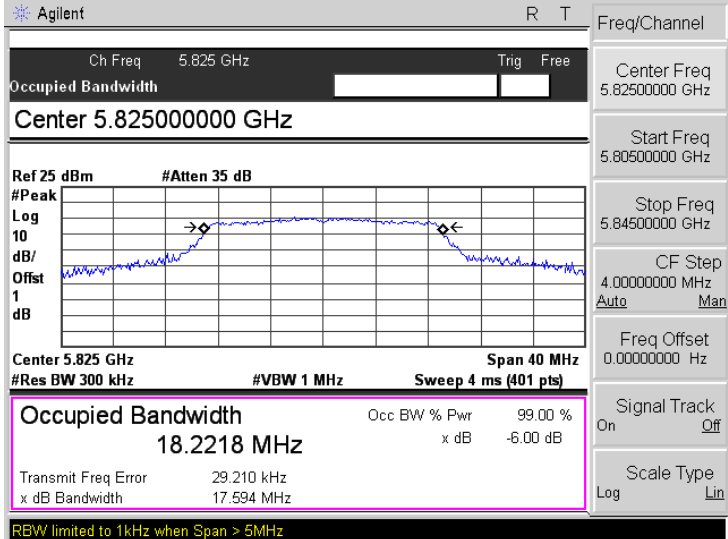

Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

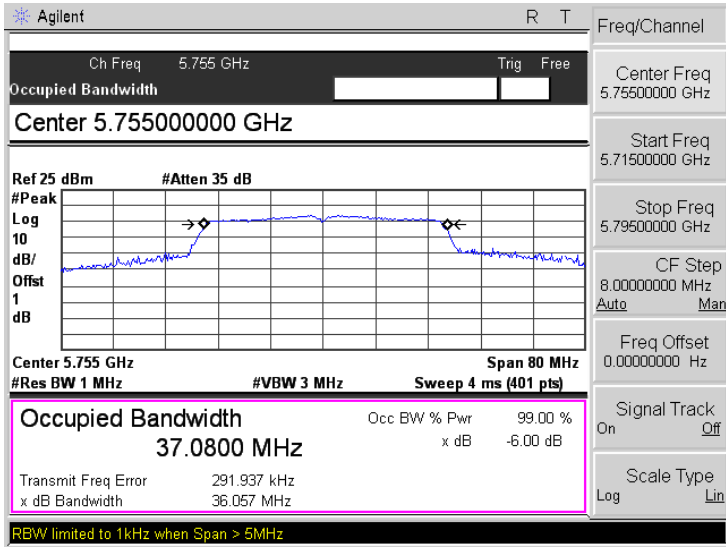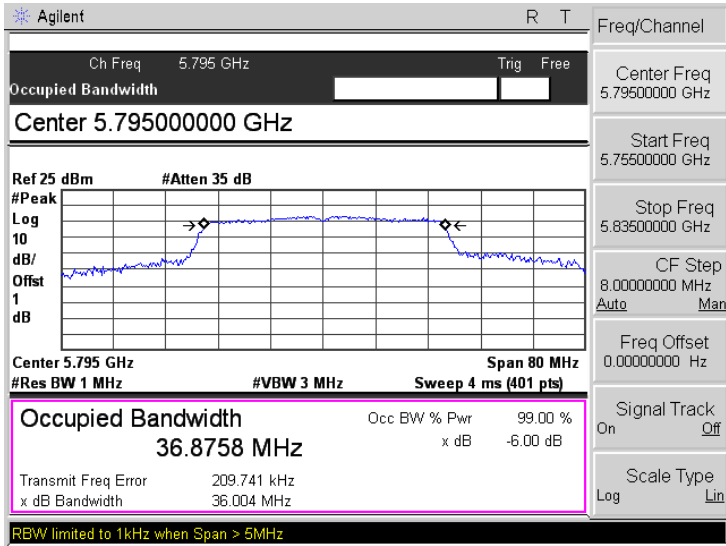Mode:	802.11n-HT40
5755MHz	
5795MHz	

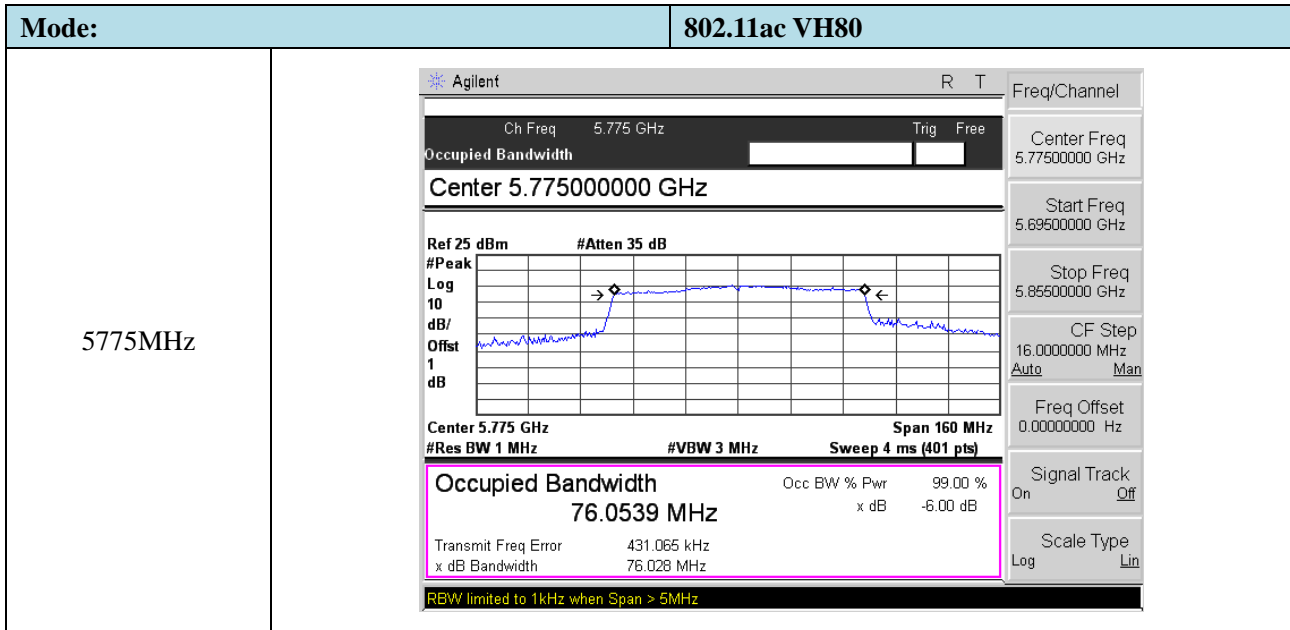

## 8. Maximum Conducted Output Power

---

### 8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq 3$  MHz.
- (iv) Number of points in sweep  $\geq 2 \text{ Span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.

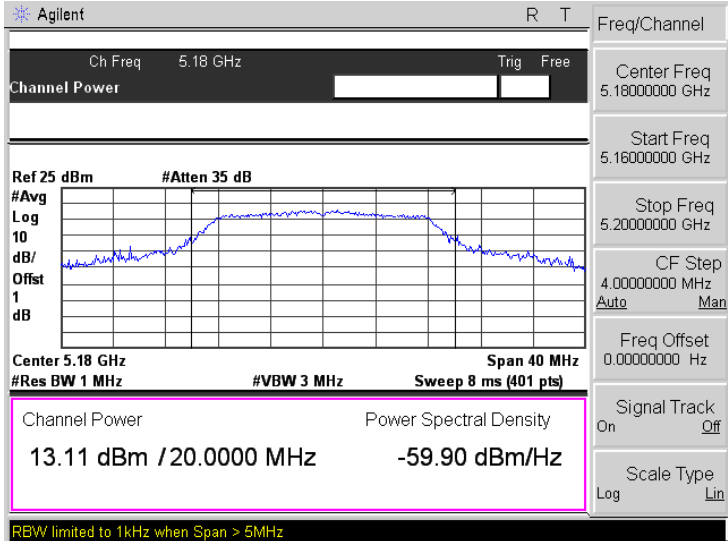
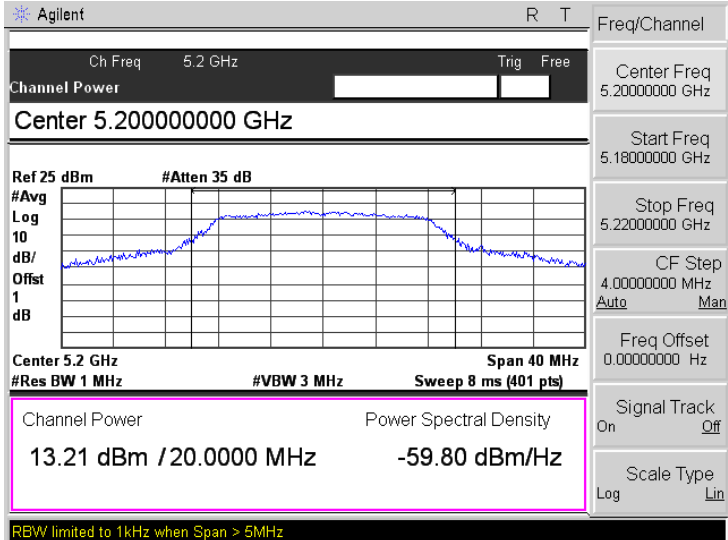
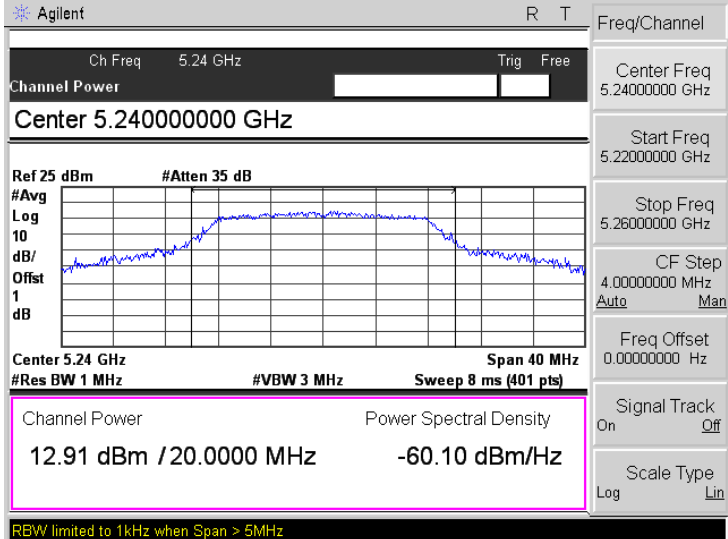
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.




### 8.3 Summary of Test Results/Plots



<b>U-NII-1:5150-5250MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	13.11	20.464	250
	5200	13.21	20.941	250
	5240	12.91	19.543	250
802.11n-HT20	5180	13.94	24.774	250
	5200	13.35	21.627	250
	5240	12.72	18.707	250
802.11n-HT40	5190	12.65	18.408	250
	5230	12.49	17.742	250
802.11ac VH80	5210	12.18	16.520	250

<b>U-NII-3: 5725-5850MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	12.60	18.197	1000
	5785	12.33	17.100	1000
	5825	13.12	20.512	1000
802.11n-HT20	5745	12.22	16.672	1000
	5785	12.28	16.904	1000
	5825	12.89	19.454	1000
802.11n-HT40	5755	12.71	18.664	1000
	5795	12.43	17.498	1000
802.11ac VH80	5775	12.00	15.849	1000


➤ 5150-5250MHz

Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

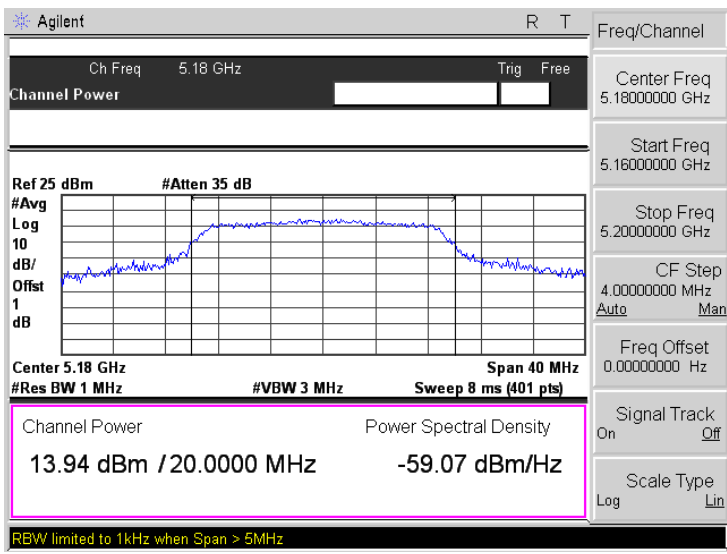
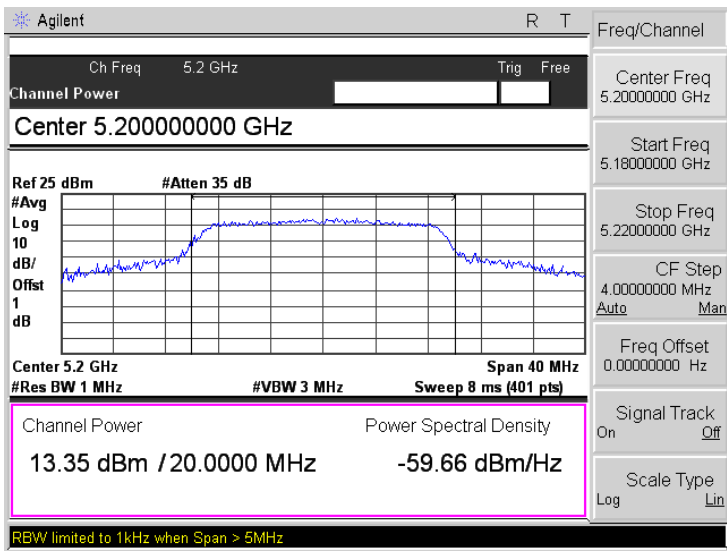
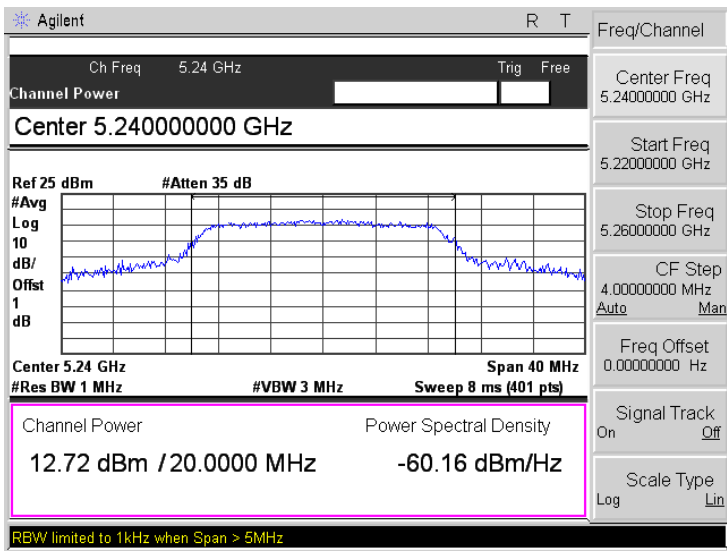
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	


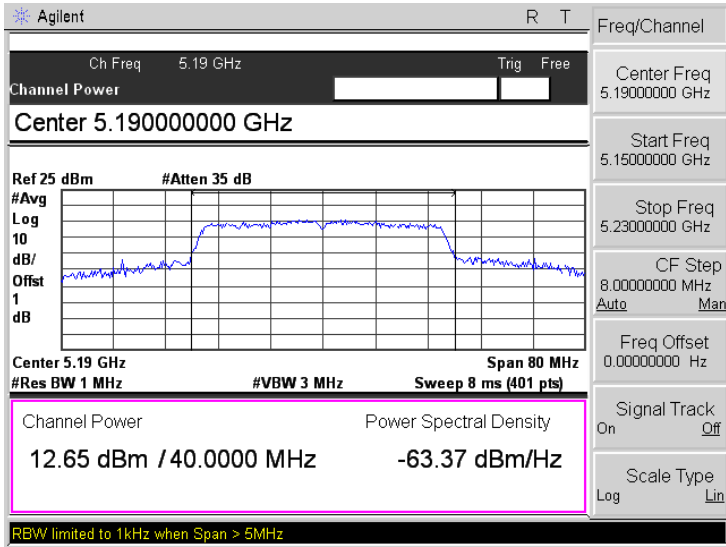
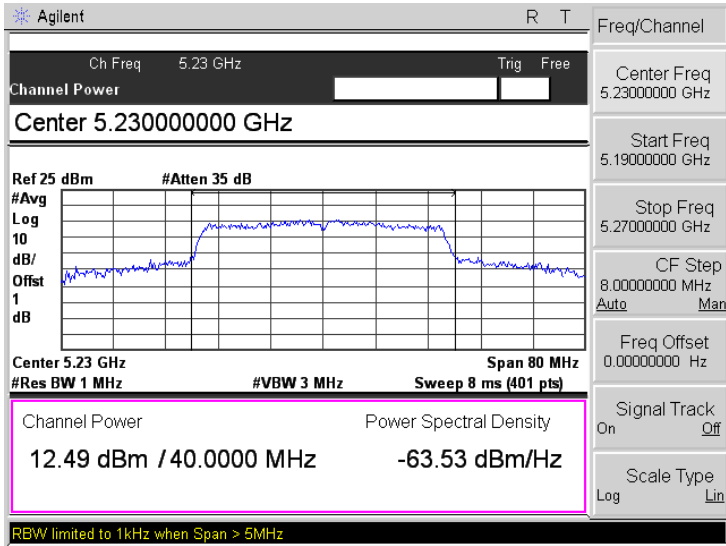
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	





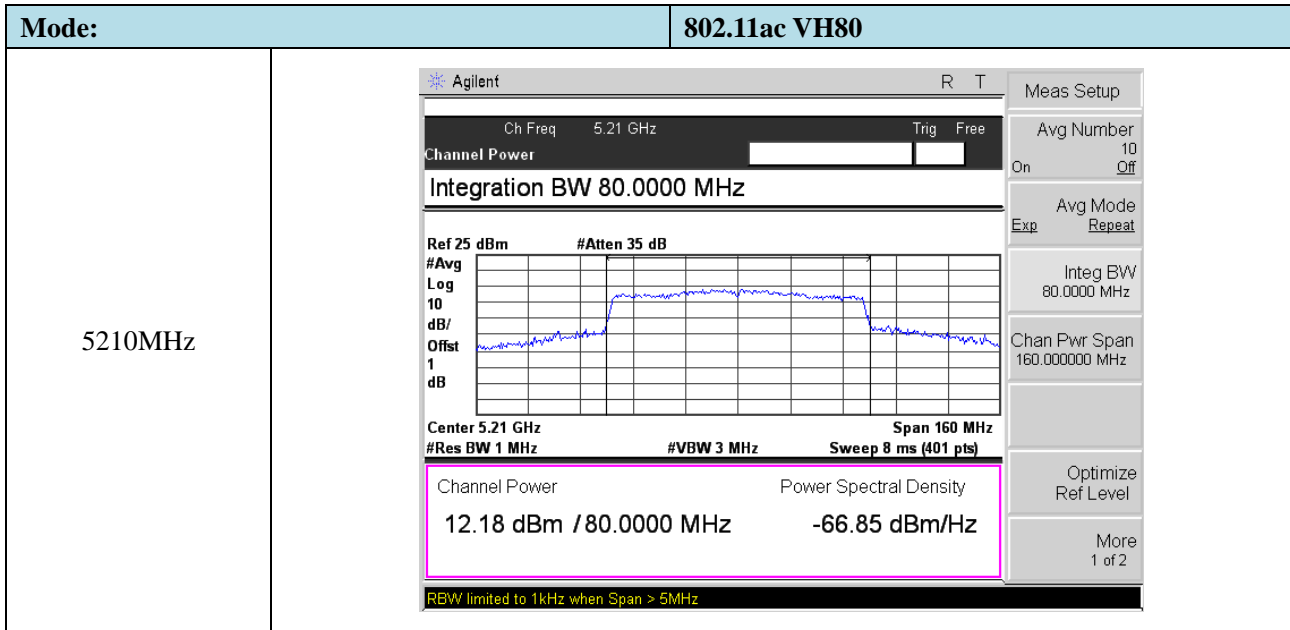


➤ 5725-5850MHz

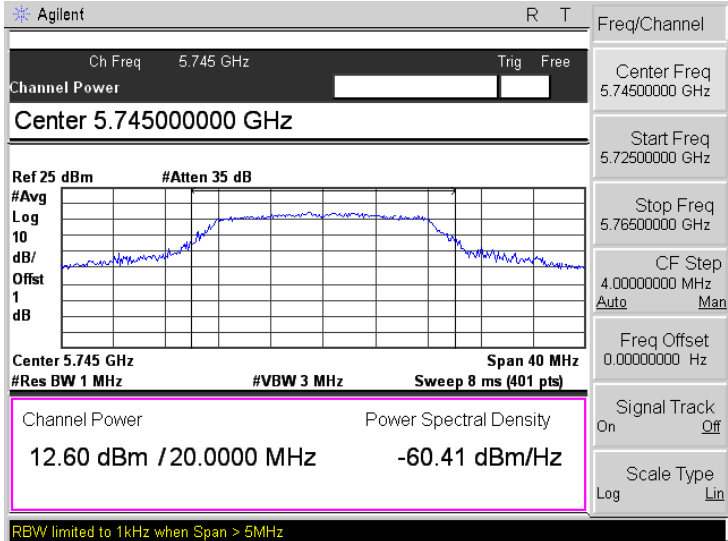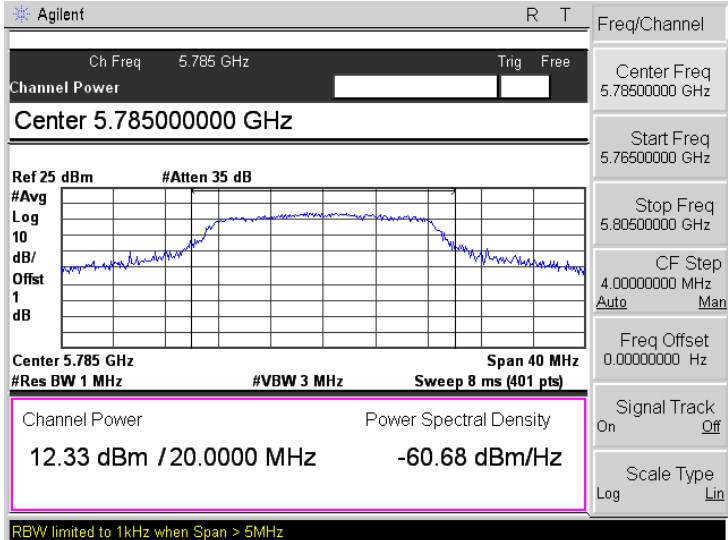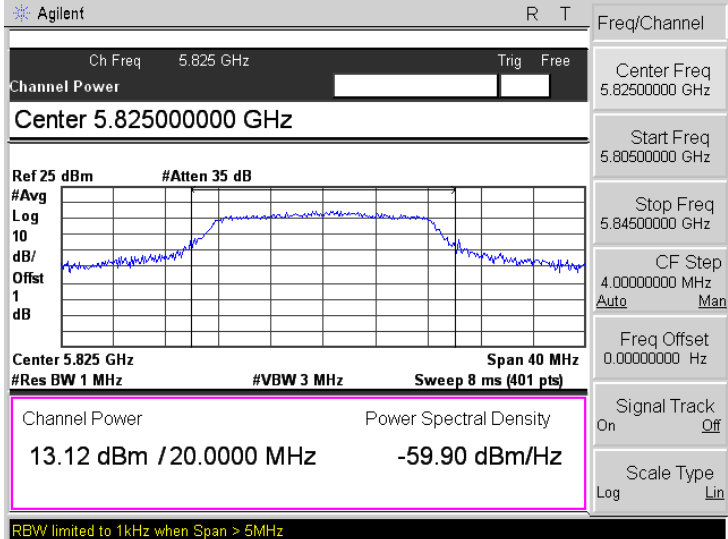Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

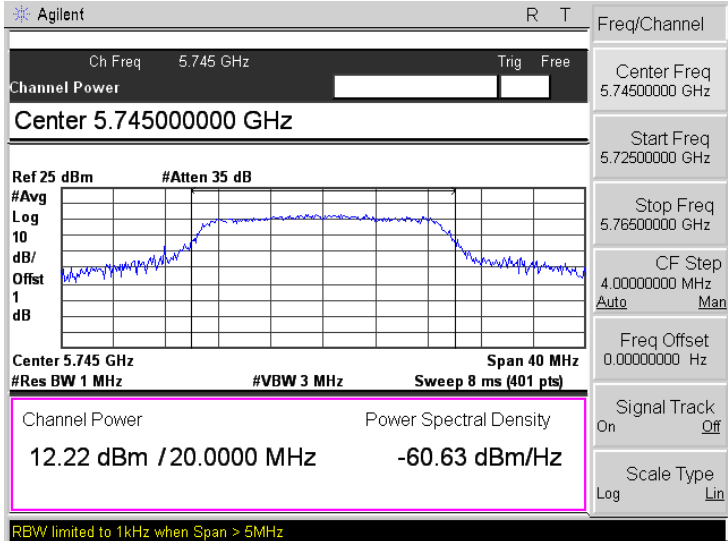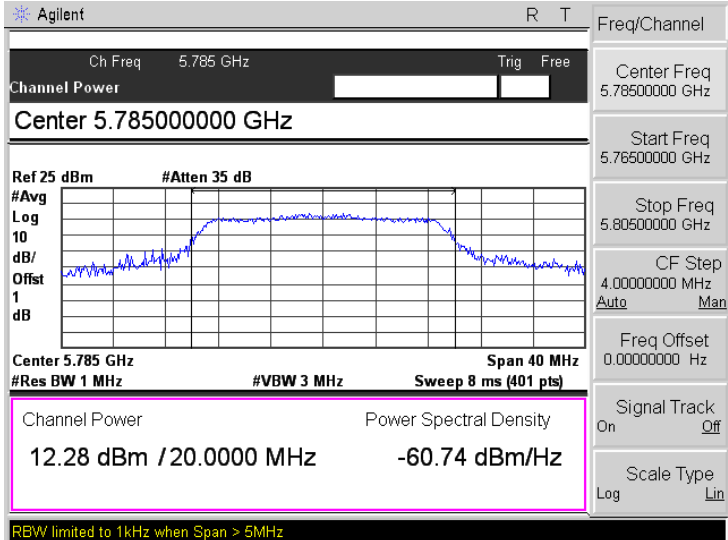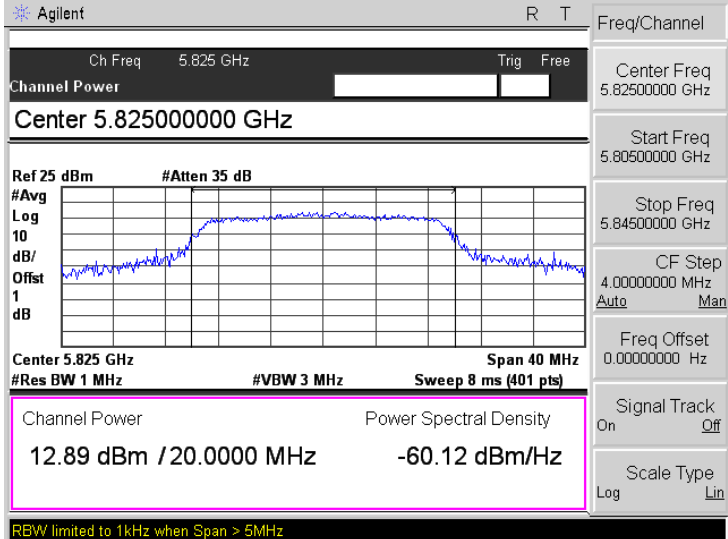Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

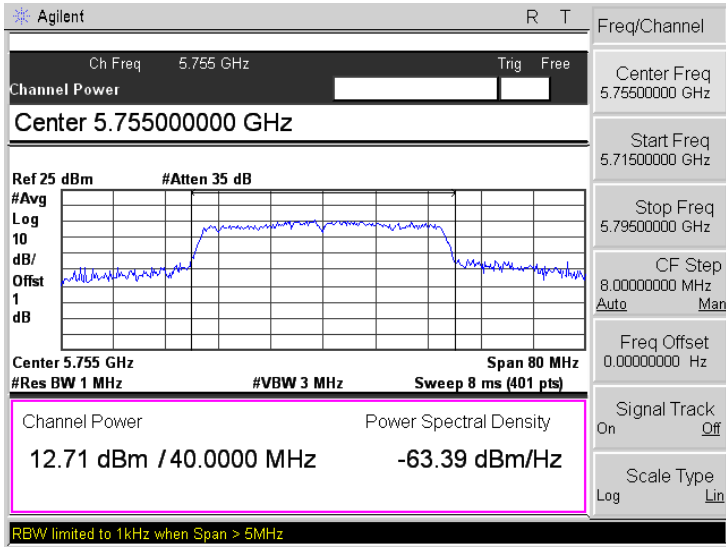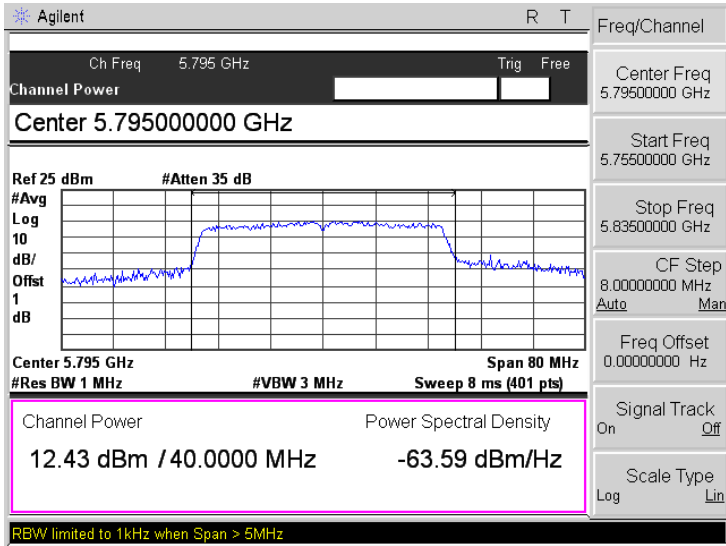Mode:	802.11n-HT40
5755MHz	
5795MHz	

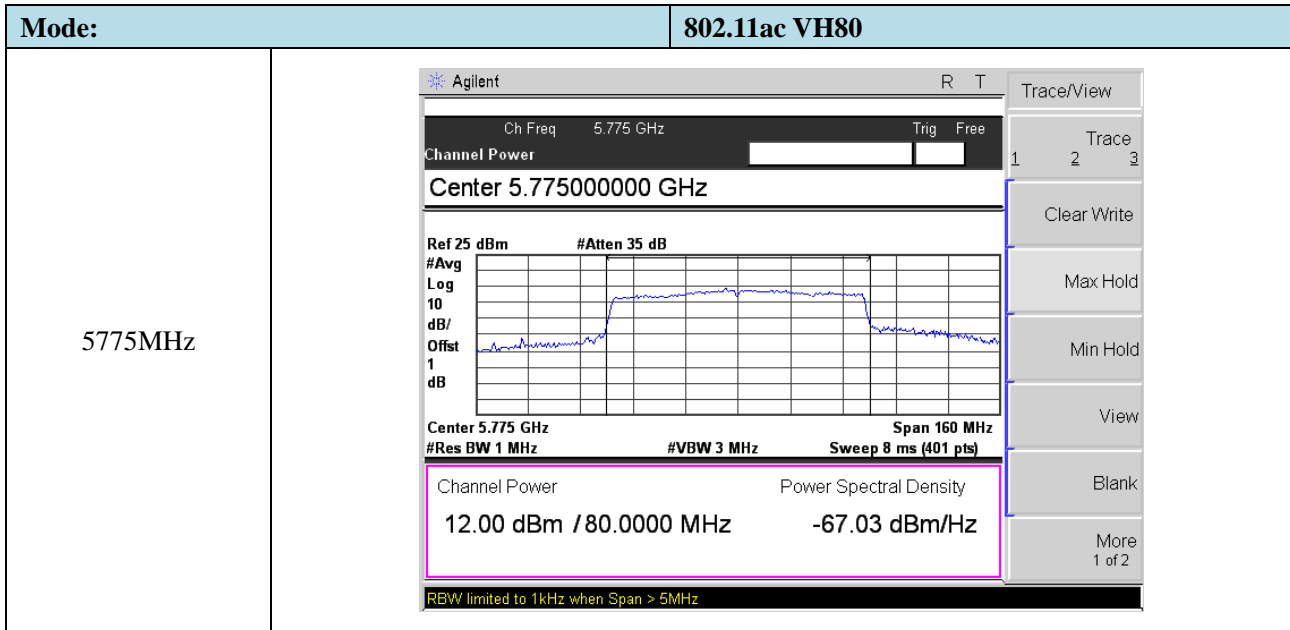

## 9. Radiated Spurious Emissions

---

### 9.1 Standard Applicable

According to §15.407(b), Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.  
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

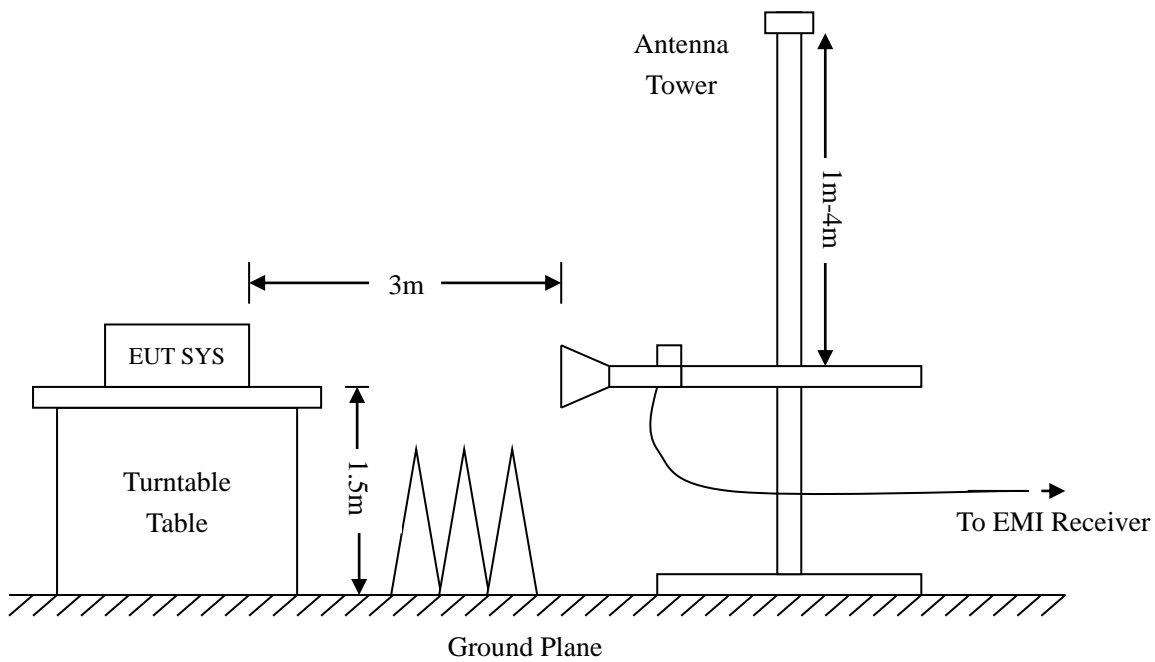
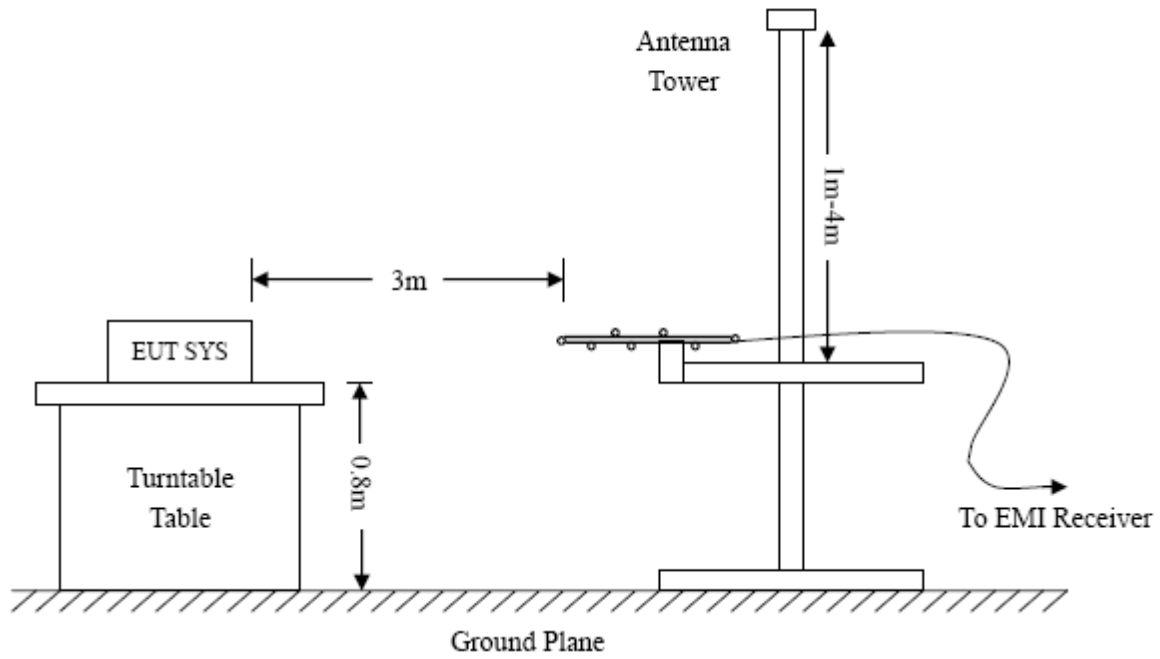
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

### 9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



### 9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

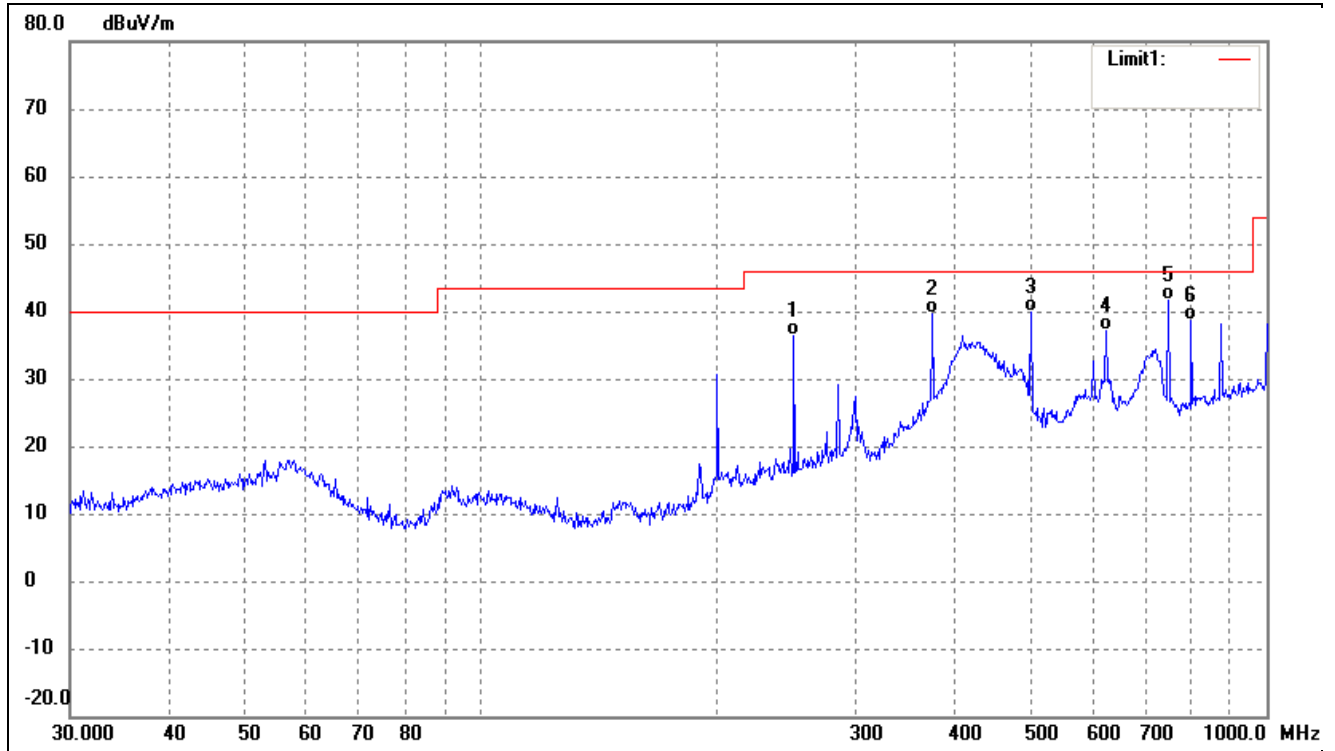
### 9.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*



- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	250.3011	46.05	-9.79	36.26	46.00	-9.74	240	100	QP
2	375.9384	46.74	-7.11	39.63	46.00	-6.37	96	100	QP
3	501.1789	45.39	-5.42	39.97	46.00	-6.03	229	100	QP
4	625.0779	40.02	-2.89	37.13	46.00	-8.87	93	100	QP
5	750.1082	43.59	-1.98	41.61	46.00	-4.39	50	100	QP
6	801.7862	39.34	-0.75	38.59	46.00	-7.41	271	100	QP

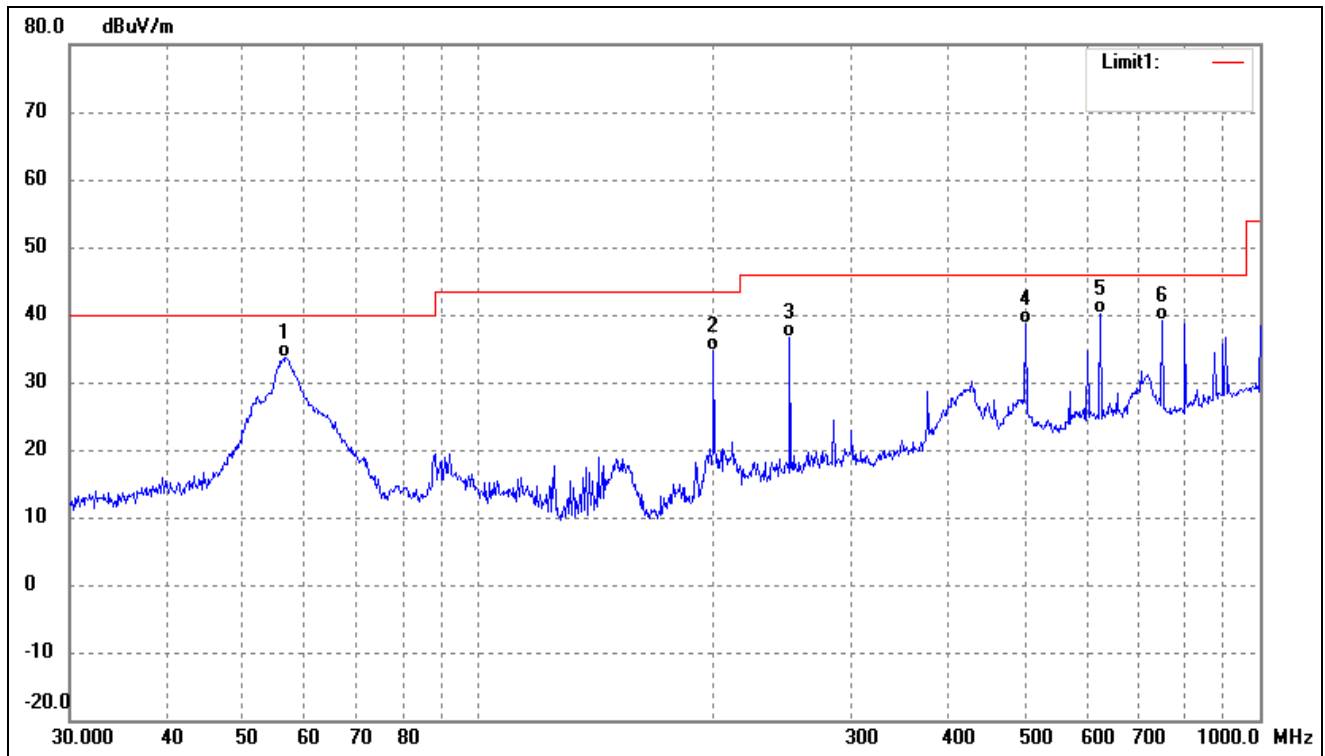
802.11a

Test Channel

5180MHz(Worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.5929	46.23	-12.60	33.63	40.00	-6.37	338	100	QP
2	199.9856	47.79	-13.20	34.59	43.50	-8.91	93	100	QP
3	250.3012	46.54	-9.79	36.75	46.00	-9.25	257	100	QP
4	501.1790	43.98	-5.42	38.56	46.00	-7.44	99	100	QP
5	625.0780	43.11	-2.89	40.22	46.00	-5.78	91	100	QP
6	750.1083	41.17	-1.98	39.19	46.00	-6.81	192	100	QP

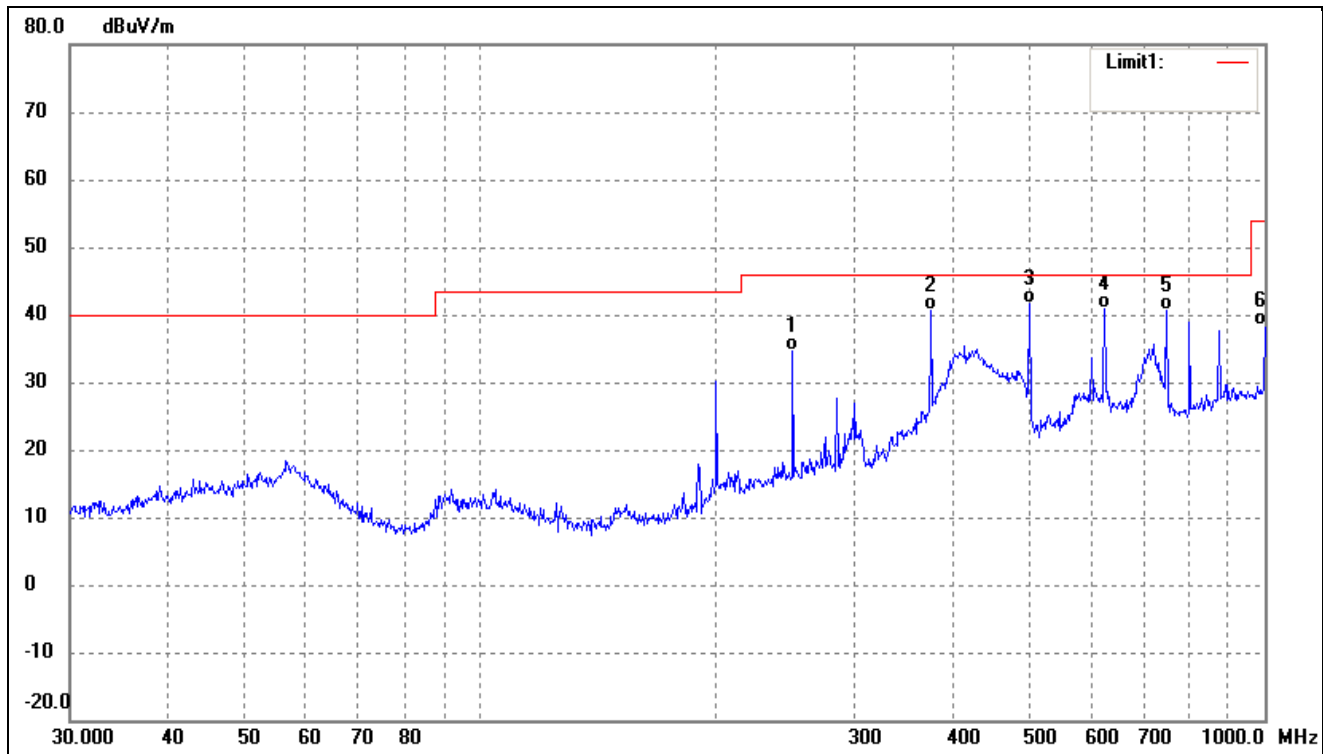
802.11n-HT20

Test Channel

5180MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	250.3012	44.51	-9.79	34.72	46.00	-11.28	123	100	QP
2	375.9385	47.64	-7.11	40.53	46.00	-5.47	257	100	QP
3	501.1790	47.12	-5.42	41.70	46.00	-4.30	97	100	QP
4	625.0780	43.67	-2.89	40.78	46.00	-5.22	113	100	QP
5	750.1083	42.62	-1.98	40.64	46.00	-5.36	106	100	QP
6	1000.0000	36.27	2.20	38.47	54.00	-15.53	123	100	QP

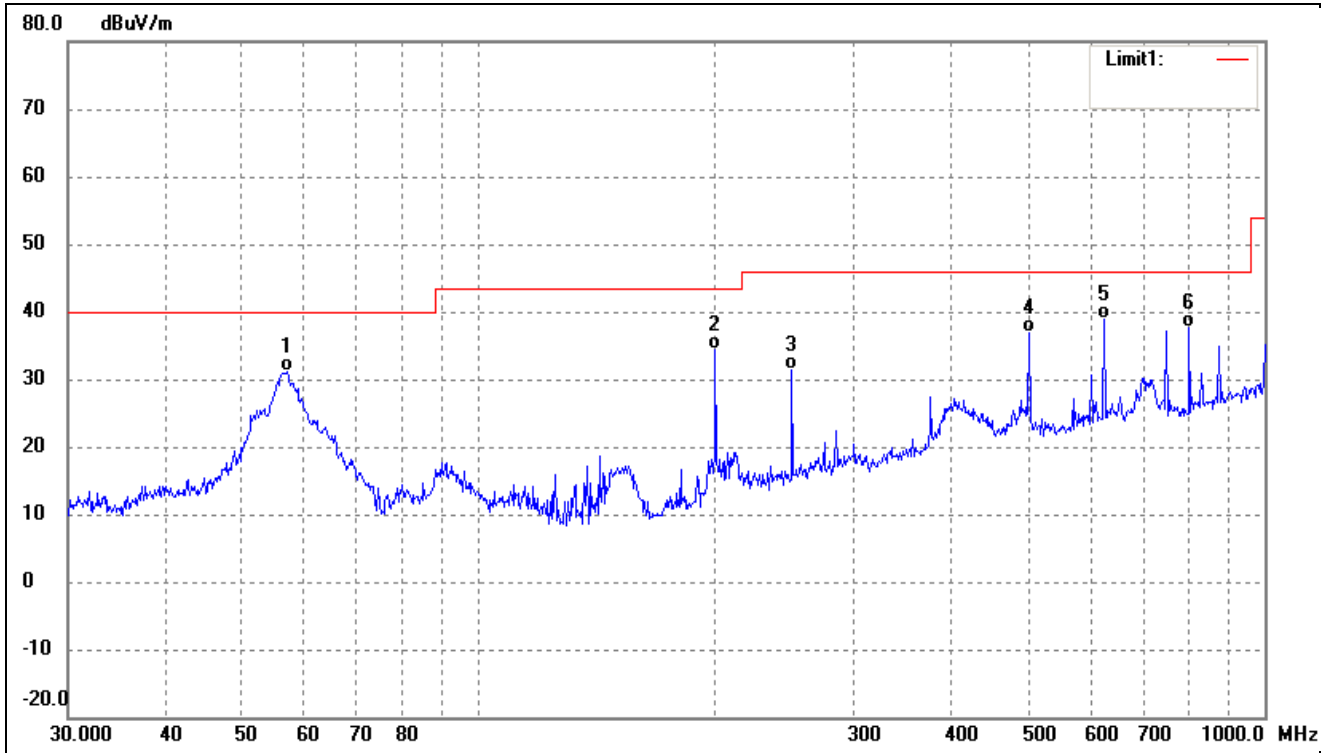
802.11n-HT20

Test Channel

5180MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.9912	43.84	-12.75	31.09	40.00	-8.91	76	100	QP
2	199.9856	47.56	-13.20	34.36	43.50	-9.14	258	100	QP
3	250.3012	41.06	-9.79	31.27	46.00	-14.73	70	100	QP
4	501.1790	42.41	-5.42	36.99	46.00	-9.01	221	100	QP
5	625.0780	41.84	-2.89	38.95	46.00	-7.05	154	100	QP
6	801.7863	38.47	-0.75	37.72	46.00	-8.28	275	100	QP

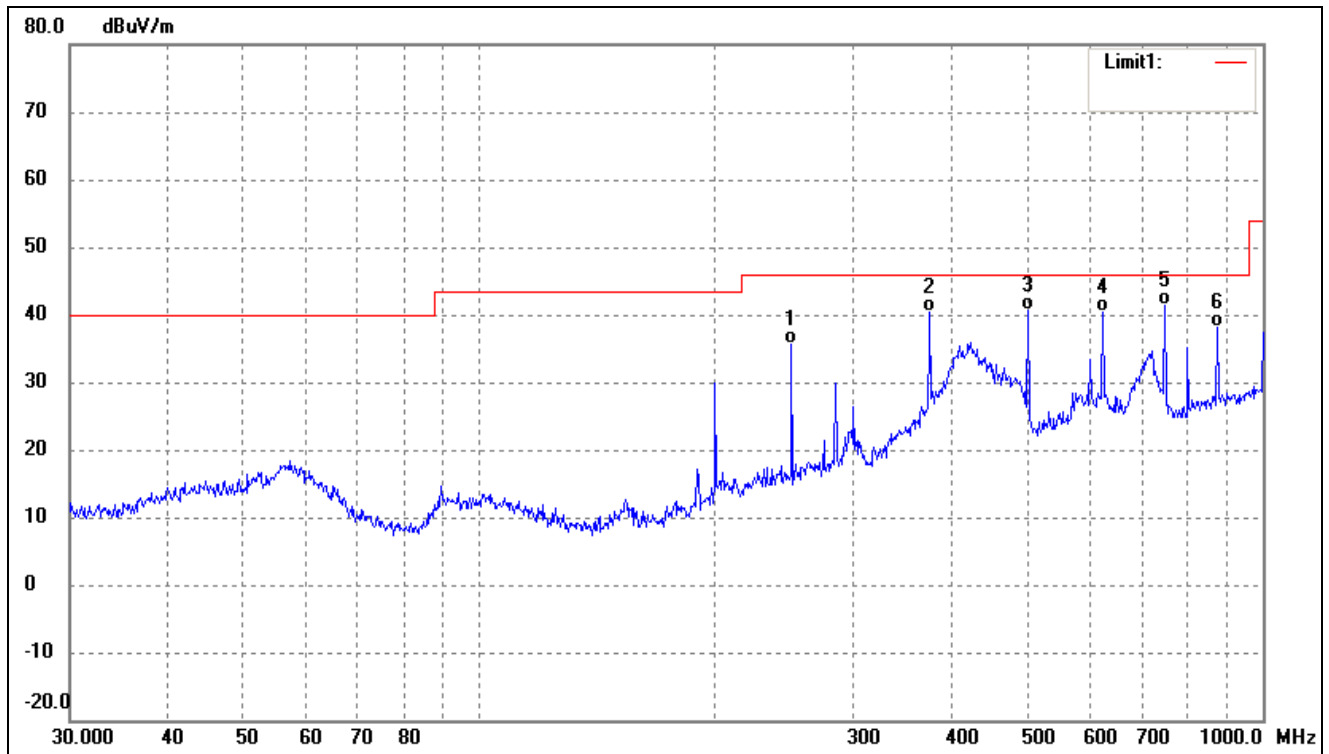
802.11n-HT40

Test Channel

5190MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	250.3011	45.30	-9.79	35.51	46.00	-10.49	174	100	QP
2	375.9384	47.53	-7.11	40.42	46.00	-5.58	118	100	QP
3	501.1789	46.15	-5.42	40.73	46.00	-5.27	124	100	QP
4	625.0779	43.23	-2.89	40.34	46.00	-5.66	123	100	QP
5	750.1082	43.29	-1.98	41.31	46.00	-4.69	351	100	QP
6	875.2469	37.53	0.51	38.04	46.00	-7.96	130	100	QP

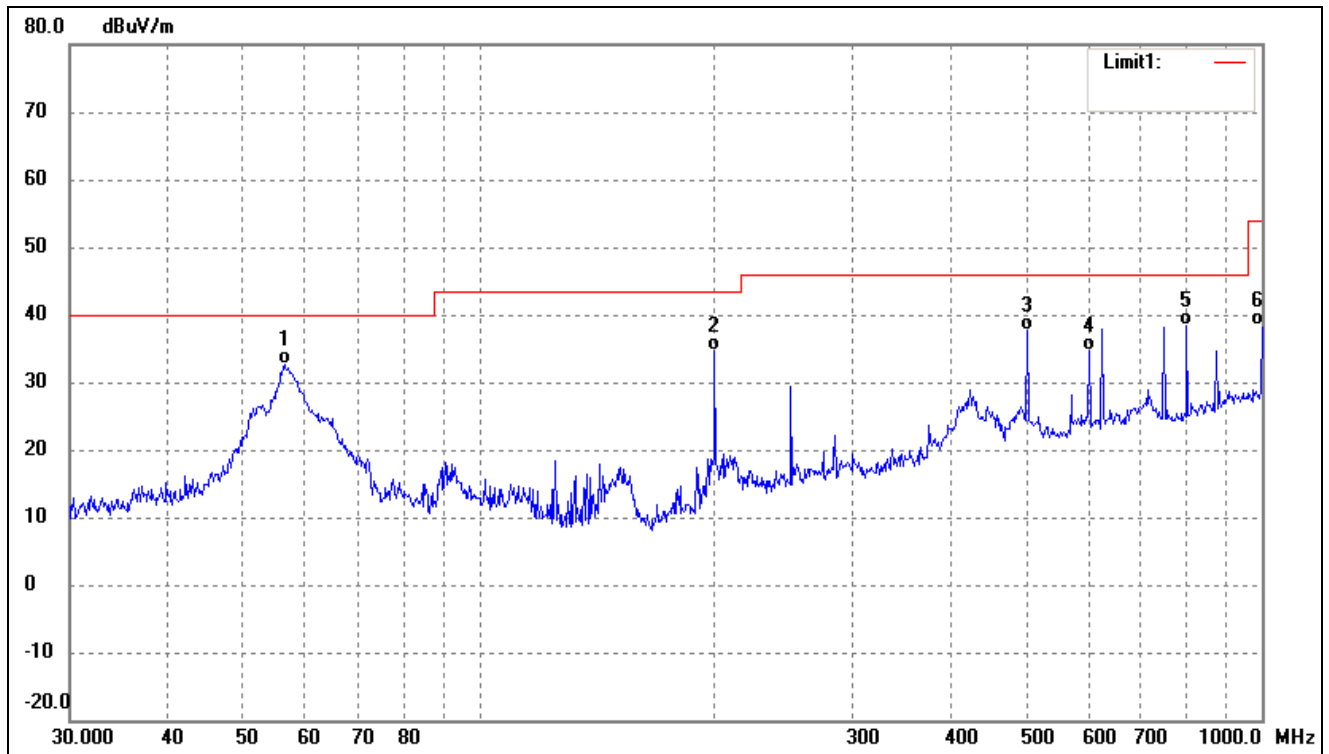
802.11n-HT40

Test Channel

5190MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.3948	45.07	-12.52	32.55	40.00	-7.45	50	100	QP
2	199.9856	47.90	-13.20	34.70	43.50	-8.80	117	100	QP
3	501.1790	43.07	-5.42	37.65	46.00	-8.35	73	100	QP
4	601.4265	37.84	-3.32	34.52	46.00	-11.48	115	100	QP
5	801.7863	39.06	-0.75	38.31	46.00	-7.69	349	100	QP
6	1000.0000	36.11	2.20	38.31	54.00	-15.69	114	100	QP

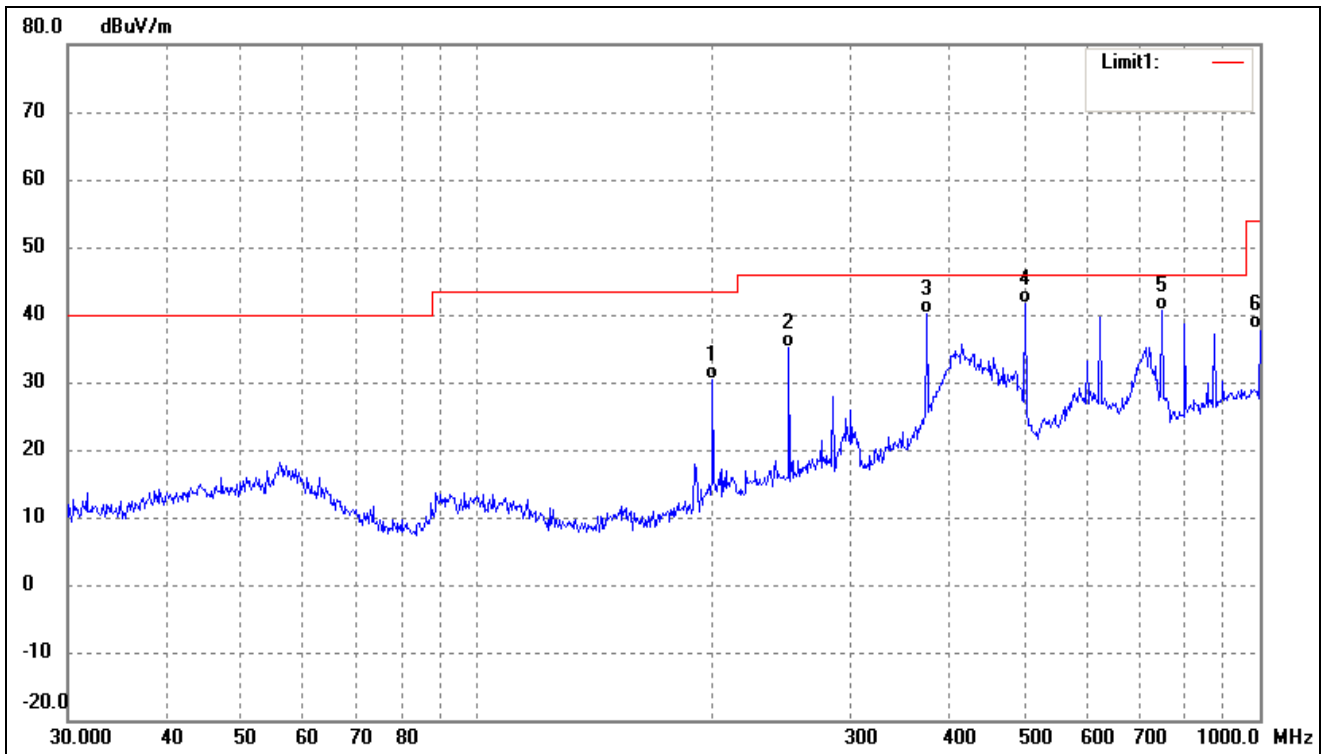
802.11ac-HT80

Test Channel

5210MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	199.9856	43.56	-13.20	30.36	43.50	-13.14	169	100	QP
2	250.3012	44.81	-9.79	35.02	46.00	-10.98	158	100	QP
3	375.9385	47.35	-7.11	40.24	46.00	-5.76	69	100	QP
4	501.1790	47.00	-5.42	41.58	46.00	-4.42	111	100	QP
5	750.1083	42.68	-1.98	40.70	46.00	-5.30	61	100	QP
6	1000.0000	35.56	2.20	37.76	54.00	-16.24	136	100	QP

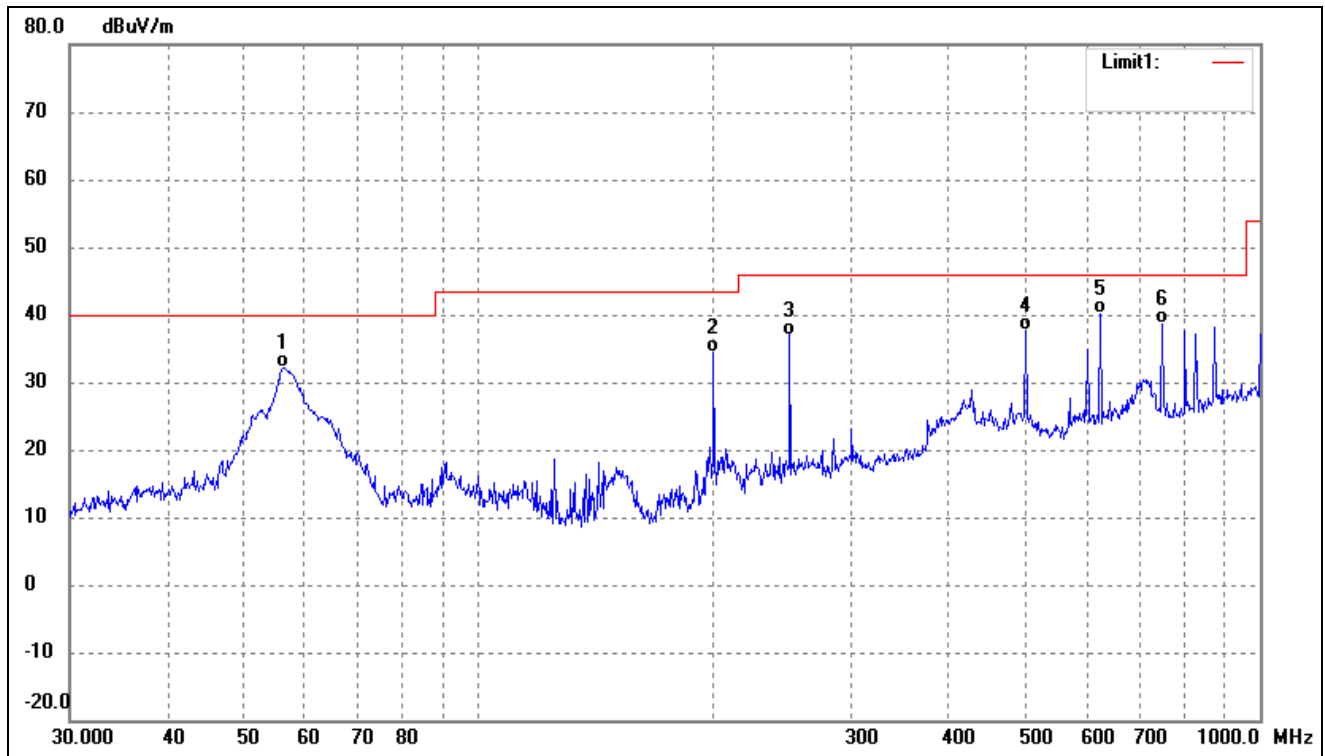
802.11ac-HT80

Test Channel

5210MHz(worst case)

Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.1974	44.57	-12.44	32.13	40.00	-7.87	73	100	QP
2	199.9856	47.47	-13.20	34.27	43.50	-9.23	165	100	QP
3	250.3012	46.79	-9.79	37.00	46.00	-9.00	149	100	QP
4	501.1790	43.02	-5.42	37.60	46.00	-8.40	136	100	QP
5	625.0780	43.02	-2.89	40.13	46.00	-5.87	355	100	QP
6	750.1083	40.52	-1.98	38.54	46.00	-7.46	331	100	QP



➤ 5725-5850MHz


802.11a

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

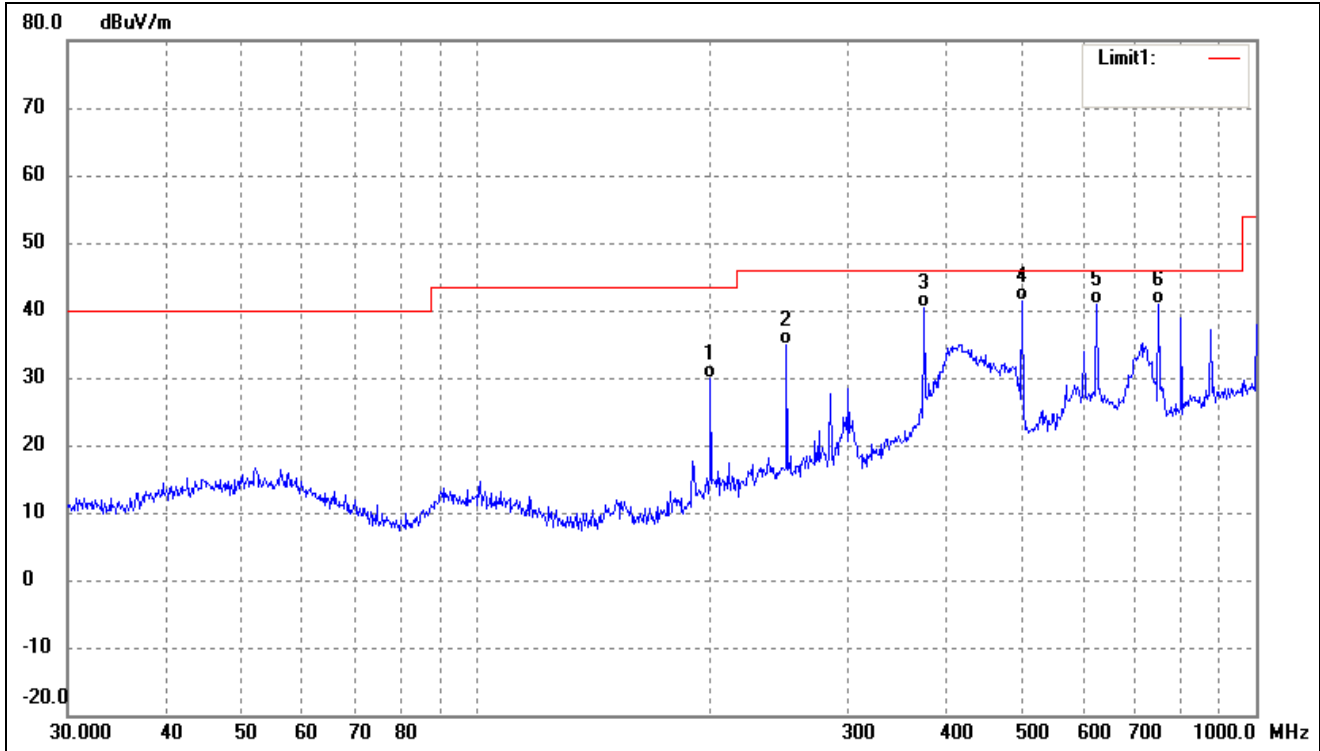

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	199.9856	43.18	-13.20	29.98	43.50	-13.52	123	100	QP
2	250.3012	44.59	-9.79	34.80	46.00	-11.20	154	100	QP
3	375.9385	47.57	-7.11	40.46	46.00	-5.54	99	100	QP
4	501.1790	46.91	-5.42	41.49	46.00	-4.51	130	100	QP
5	625.0780	43.68	-2.89	40.79	46.00	-5.21	272	100	QP
6	750.1083	42.80	-1.98	40.82	46.00	-5.18	291	100	QP

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

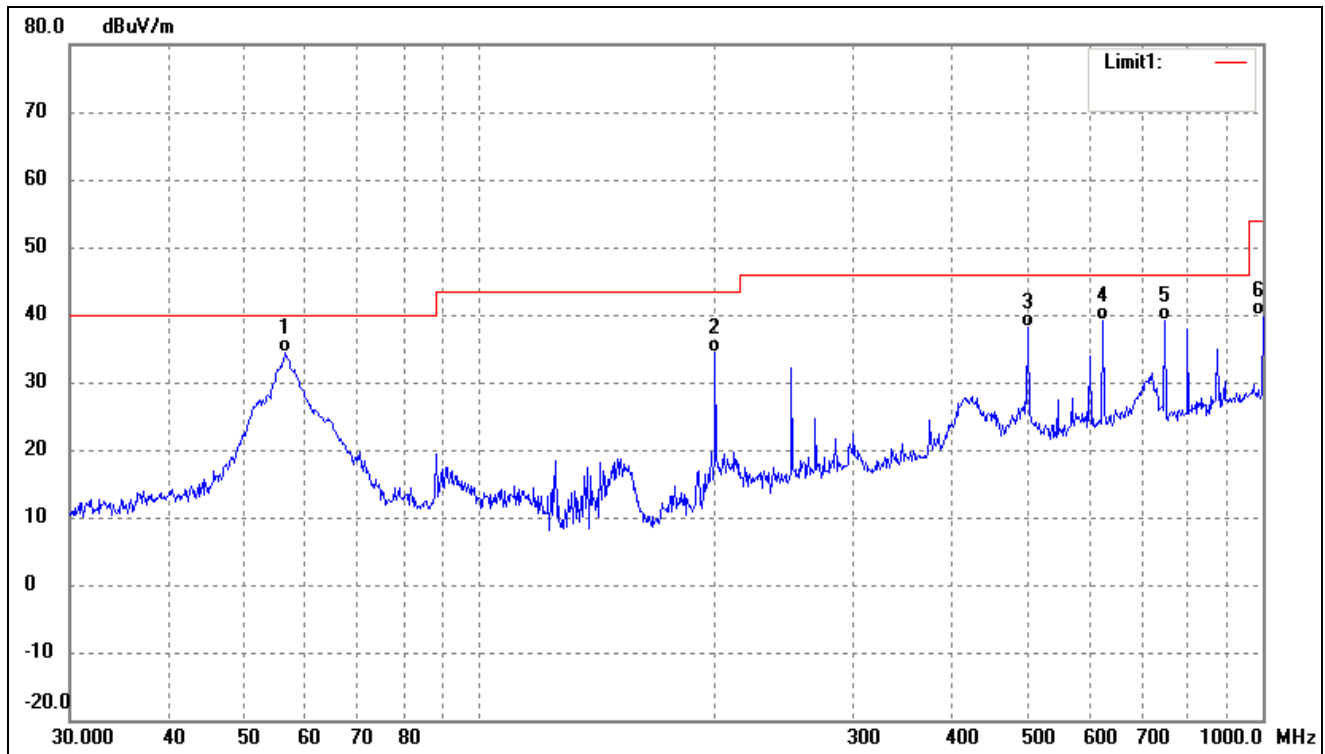

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.5929	46.99	-12.60	34.39	40.00	-5.61	90	100	QP
2	199.9856	47.54	-13.20	34.34	43.50	-9.16	151	100	QP
3	501.1790	43.55	-5.42	38.13	46.00	-7.87	122	100	QP
4	625.0780	42.09	-2.89	39.20	46.00	-6.80	98	100	QP
5	750.1083	41.20	-1.98	39.22	46.00	-6.78	60	100	QP
6	1000.0000	37.79	2.20	39.99	54.00	-14.01	337	100	QP

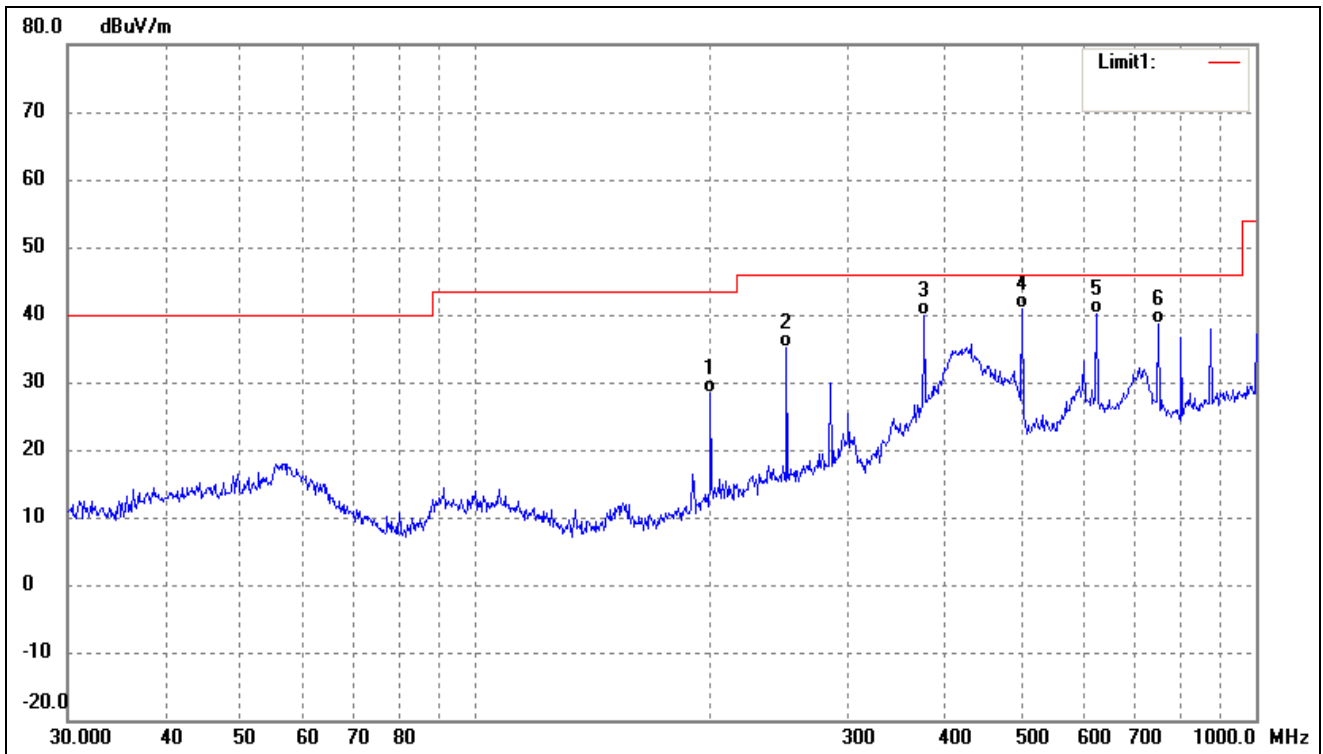
802.11n-HT20

Test Channel

5745MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	199.9856	41.58	-13.20	28.38	43.50	-15.12	357	100	QP
2	250.3012	45.02	-9.79	35.23	46.00	-10.77	95	100	QP
3	375.9385	46.90	-7.11	39.79	46.00	-6.21	183	100	QP
4	501.1790	46.33	-5.42	40.91	46.00	-5.09	103	100	QP
5	625.0780	42.92	-2.89	40.03	46.00	-5.97	352	100	QP
6	750.1083	40.58	-1.98	38.60	46.00	-7.40	274	100	QP

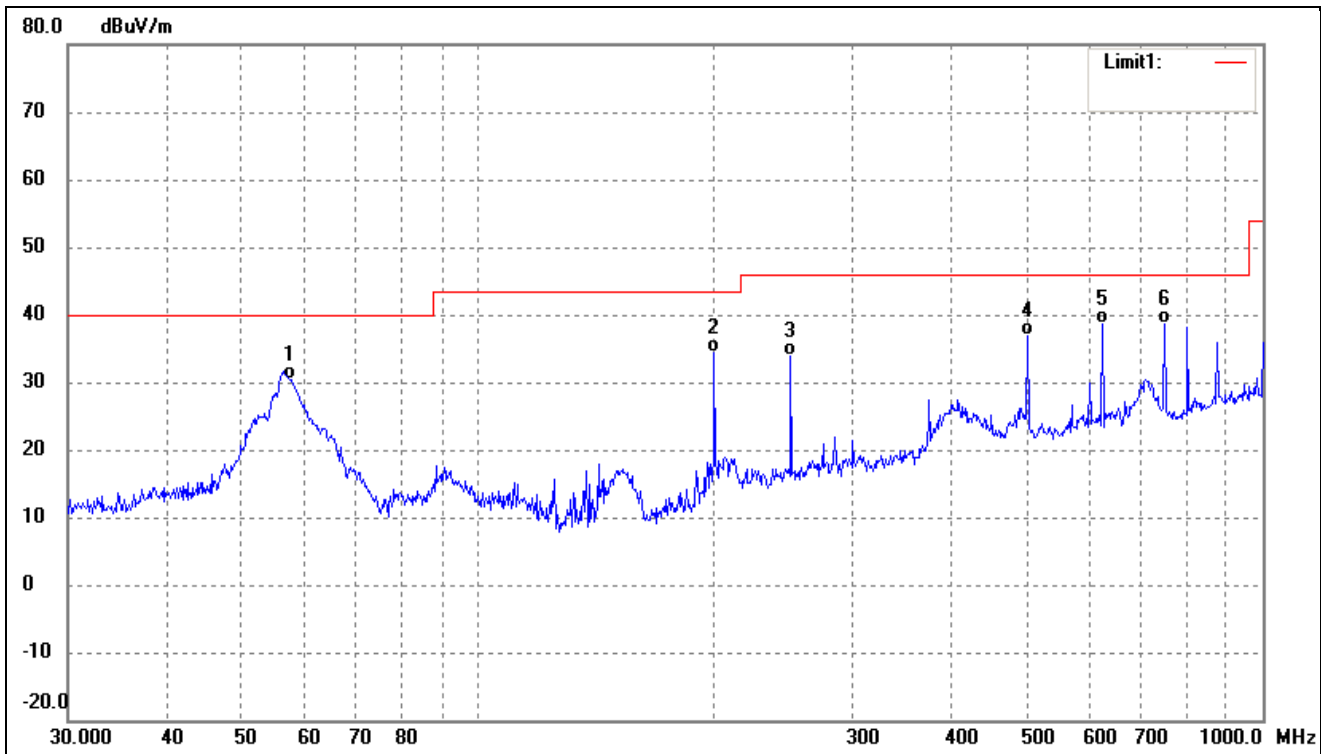
802.11n-HT20

Test Channel

5745MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	57.5939	43.39	-12.99	30.40	40.00	-9.60	291	100	QP
2	199.9856	47.47	-13.20	34.27	43.50	-9.23	90	100	QP
3	250.3012	43.55	-9.79	33.76	46.00	-12.24	92	100	QP
4	501.1790	42.28	-5.42	36.86	46.00	-9.14	96	100	QP
5	625.0780	41.51	-2.89	38.62	46.00	-7.38	325	100	QP
6	750.1083	40.51	-1.98	38.53	46.00	-7.47	245	100	QP

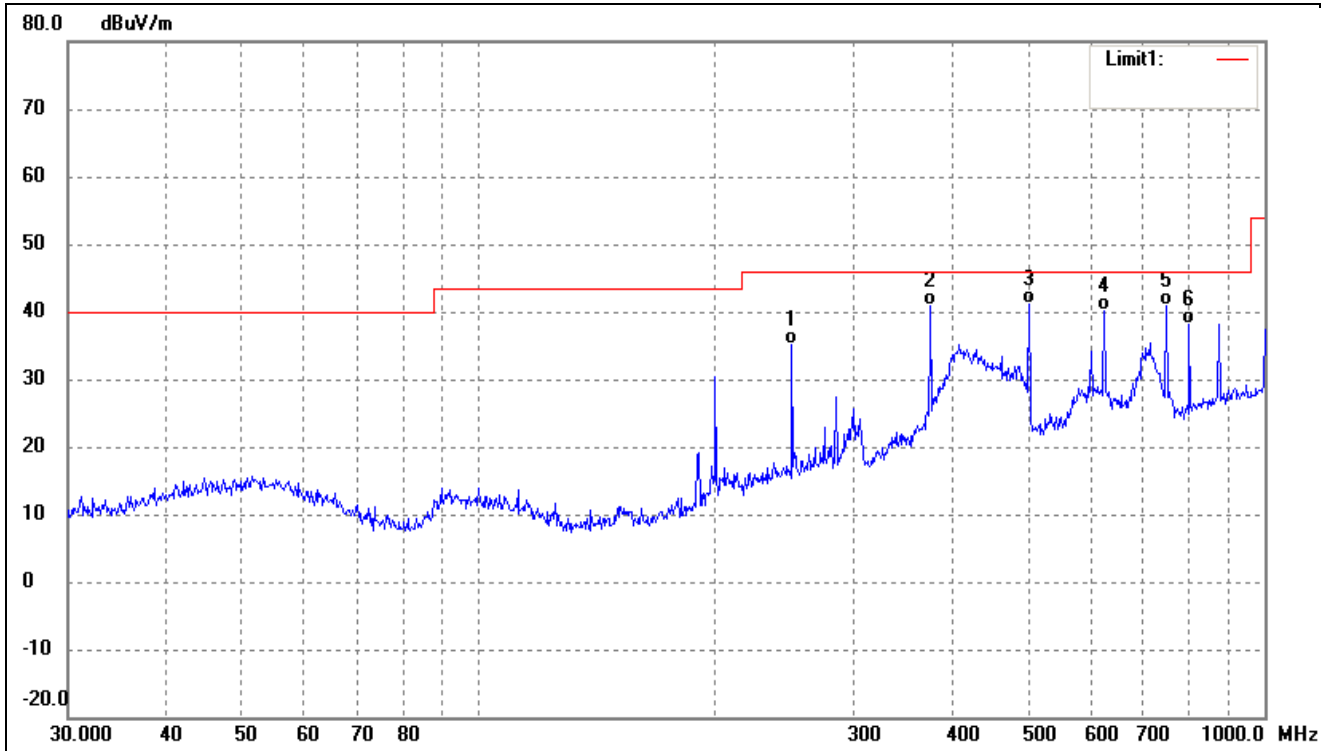
802.11n-HT40

Test Channel

5755MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	250.3012	44.80	-9.79	35.01	46.00	-10.99	138	100	QP
2	375.9385	47.99	-7.11	40.88	46.00	-5.12	110	100	QP
3	501.1790	46.62	-5.42	41.20	46.00	-4.80	71	100	QP
4	625.0780	43.06	-2.89	40.17	46.00	-5.83	240	100	QP
5	750.1083	42.80	-1.98	40.82	46.00	-5.18	247	100	QP
6	801.7863	38.99	-0.75	38.24	46.00	-7.76	153	100	QP

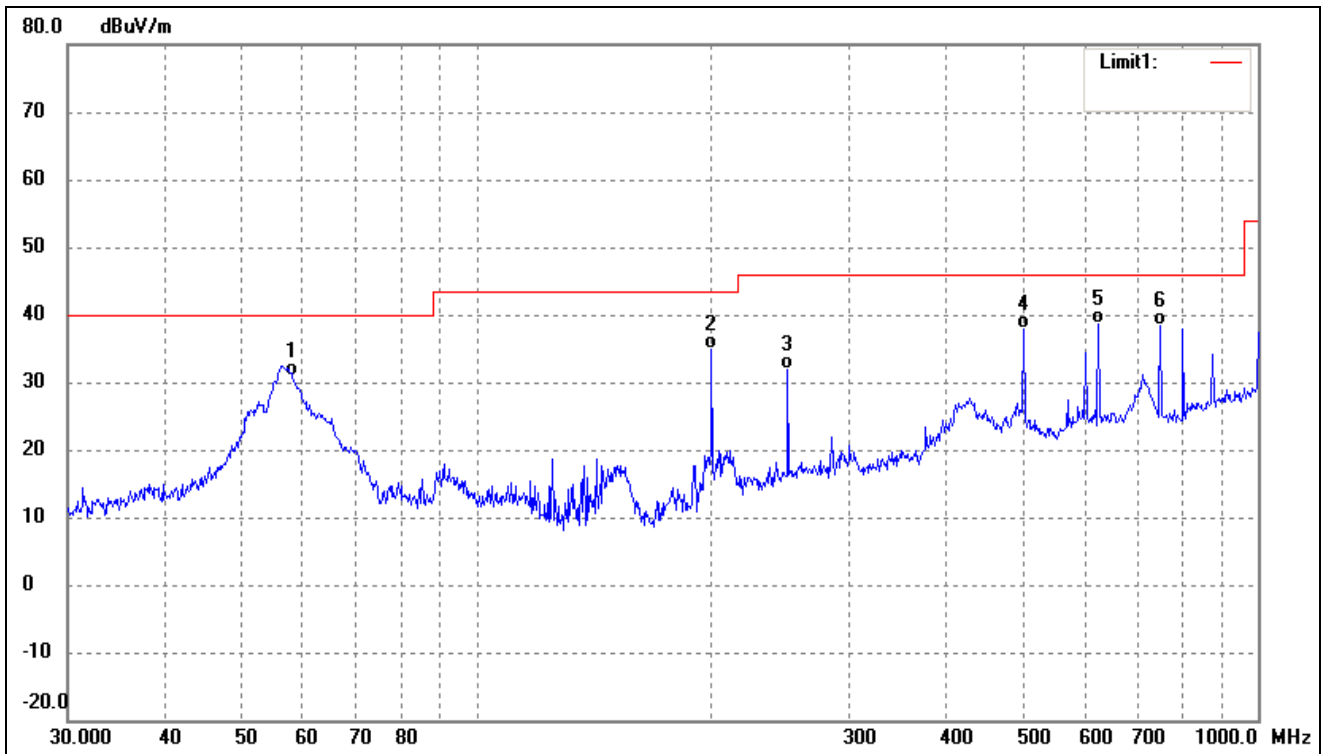
802.11n-HT40

Test Channel

5755MHz(worst case)

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	58.2030	44.06	-13.17	30.89	40.00	-9.11	326	100	QP
2	199.9856	47.98	-13.20	34.78	43.50	-8.72	178	100	QP
3	250.3012	41.58	-9.79	31.79	46.00	-14.21	51	100	QP
4	501.1790	43.30	-5.42	37.88	46.00	-8.12	327	100	QP
5	625.0780	41.40	-2.89	38.51	46.00	-7.49	158	100	QP
6	750.1083	40.28	-1.98	38.30	46.00	-7.70	318	100	QP

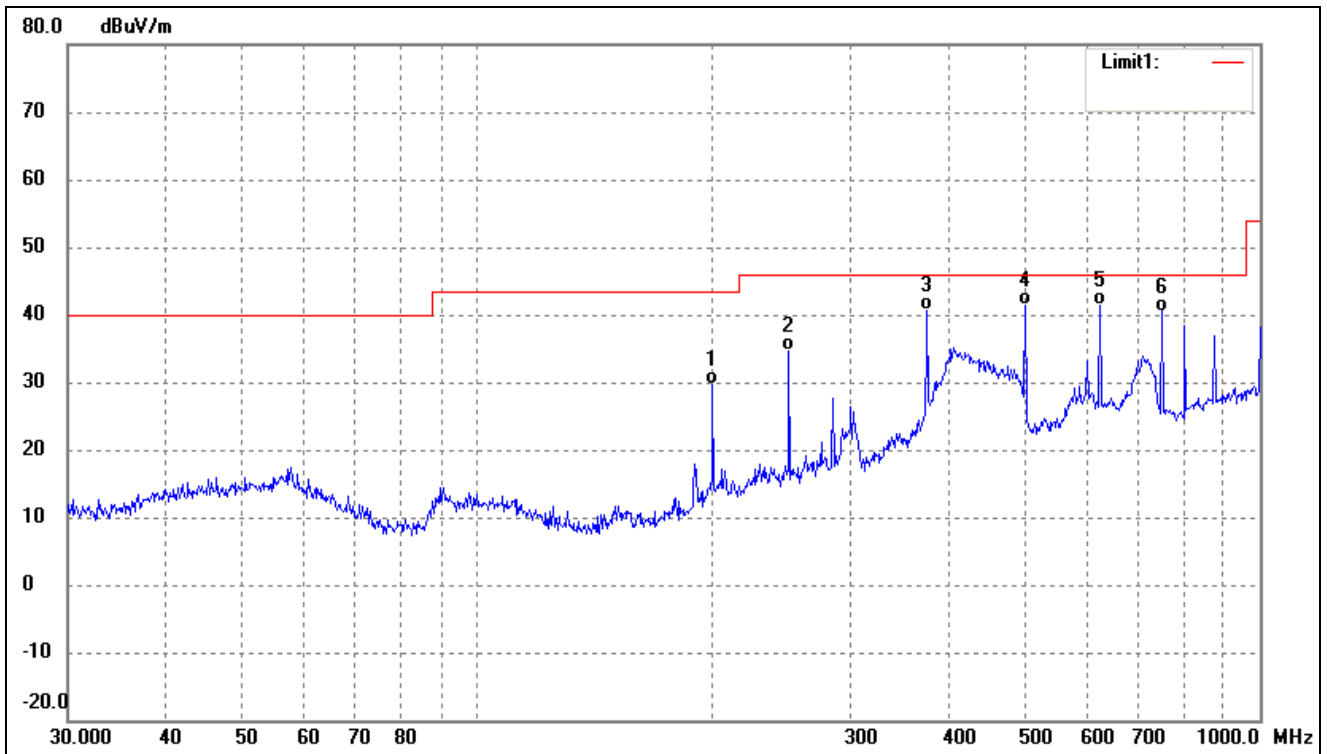
802.11ac-HT80

Test Channel

5775MHz(worst case)

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	199.9856	42.80	-13.20	29.60	43.50	-13.90	128	100	QP
2	250.3012	44.43	-9.79	34.64	46.00	-11.36	165	100	QP
3	375.9385	47.74	-7.11	40.63	46.00	-5.37	72	100	QP
4	501.1790	46.72	-5.42	41.30	46.00	-4.70	148	100	QP
5	625.0780	44.22	-2.89	41.33	46.00	-4.67	64	100	QP
6	750.1083	42.48	-1.98	40.50	46.00	-5.50	128	100	QP

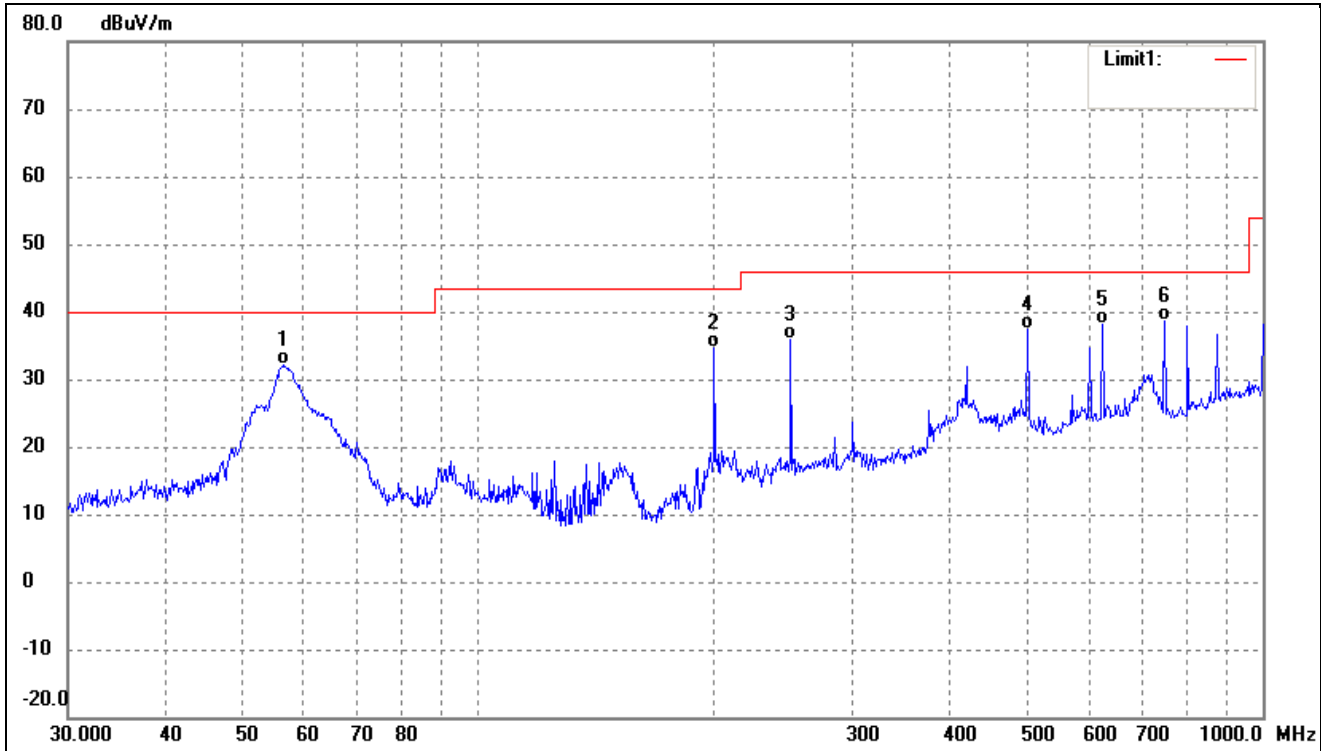
802.11ac-HT80

Test Channel

5775MHz(worst case)

Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.5929	44.78	-12.60	32.18	40.00	-7.82	98	100	QP
2	199.9856	47.77	-13.20	34.57	43.50	-8.93	173	100	QP
3	250.3012	45.66	-9.79	35.87	46.00	-10.13	76	100	QP
4	501.1790	42.88	-5.42	37.46	46.00	-8.54	112	100	QP
5	625.0780	41.00	-2.89	38.11	46.00	-7.89	167	100	QP
6	750.1083	40.69	-1.98	38.71	46.00	-7.29	183	100	QP




## ➤ Spurious Emission above 1GHz

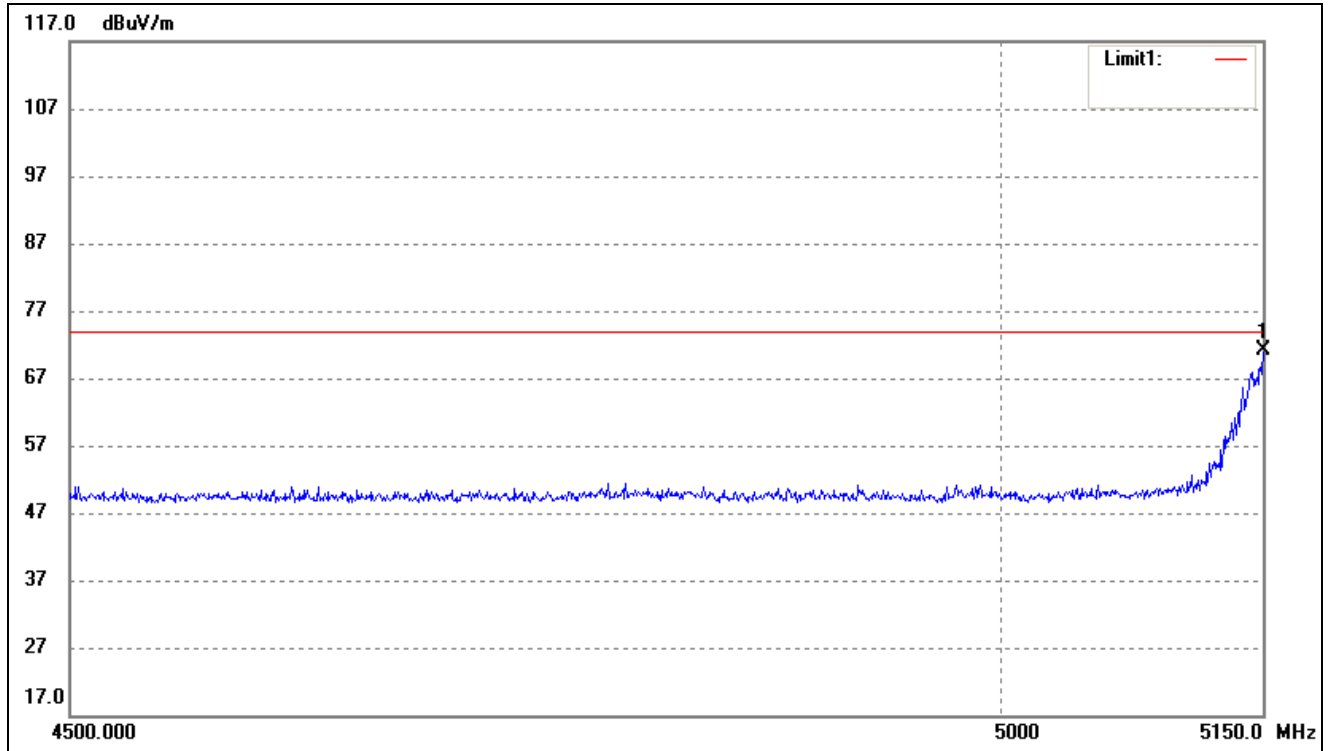802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	74.06	-2.99	71.07	74.00	-2.93	157	100	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

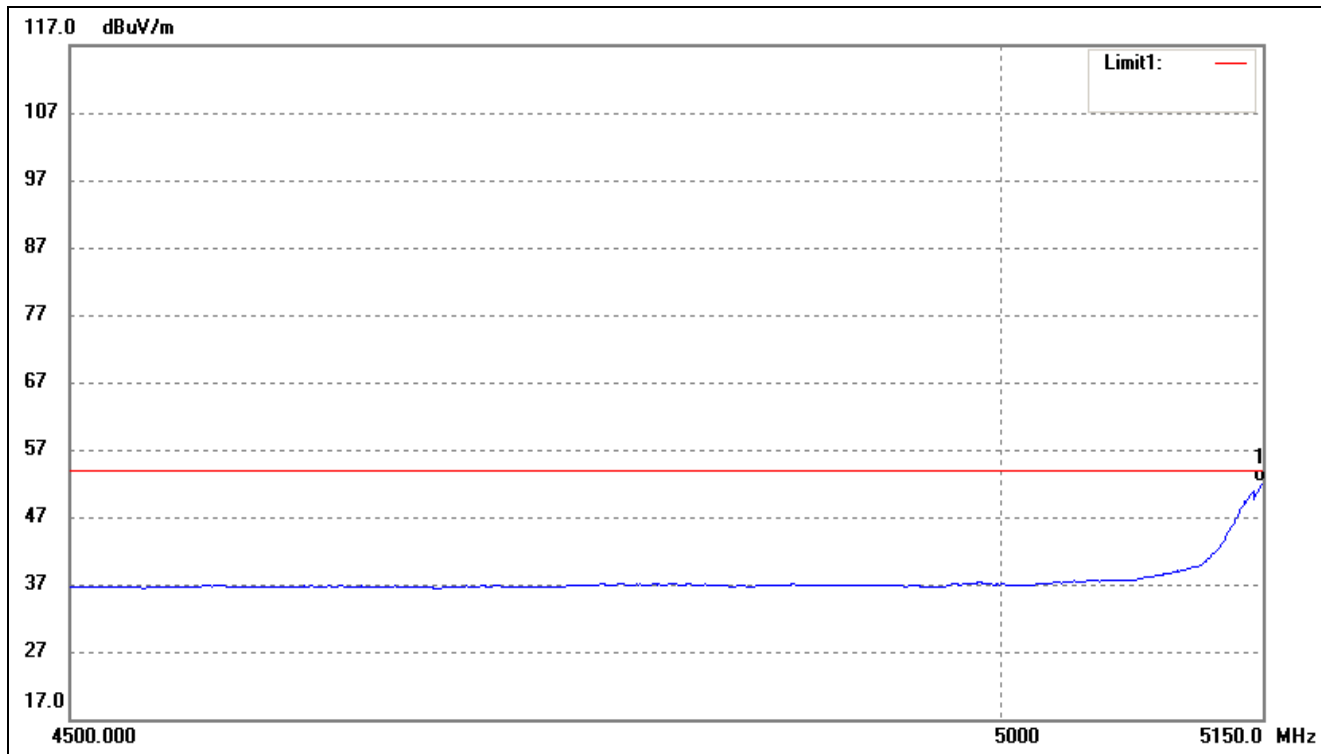

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	55.13	-2.99	52.14	54.00	-1.86	56	100	AVG


802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

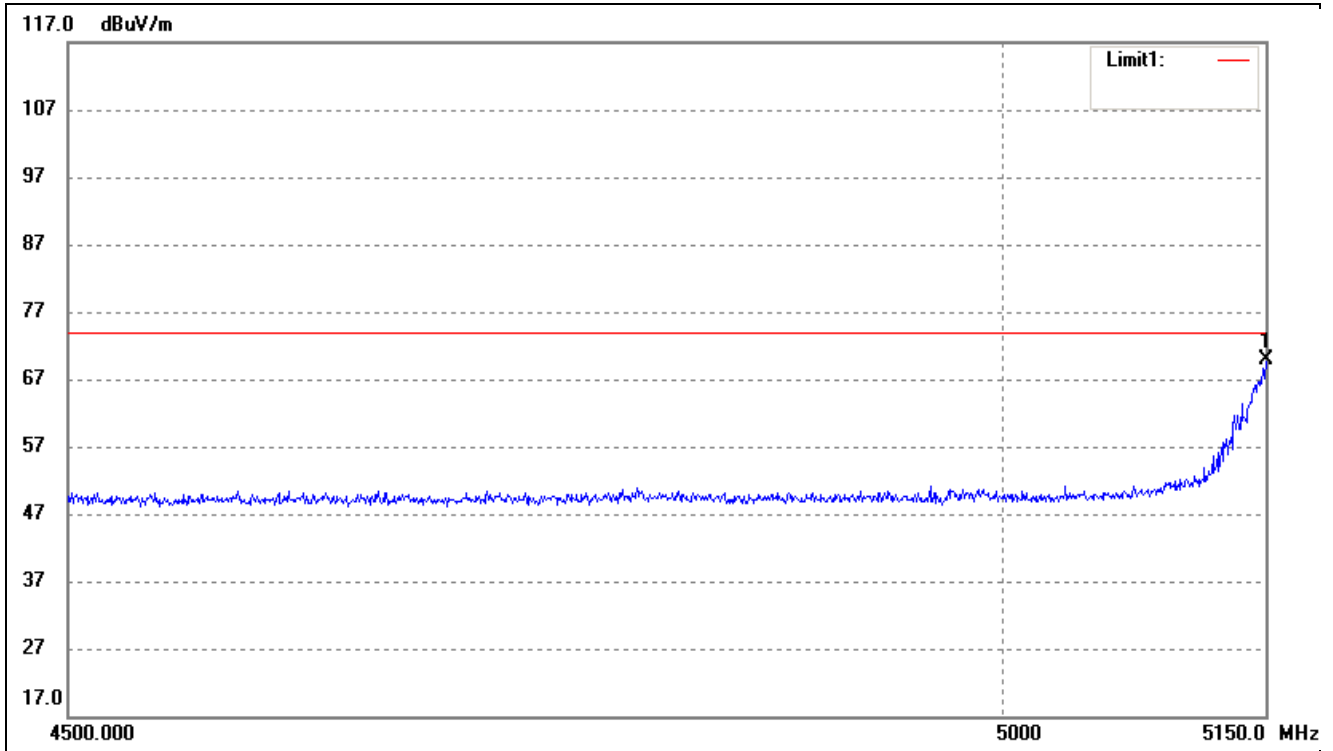

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	72.80	-2.99	69.81	74.00	-4.19	94	100	peak


## 802.11n-HT20- Restricted Bandedge

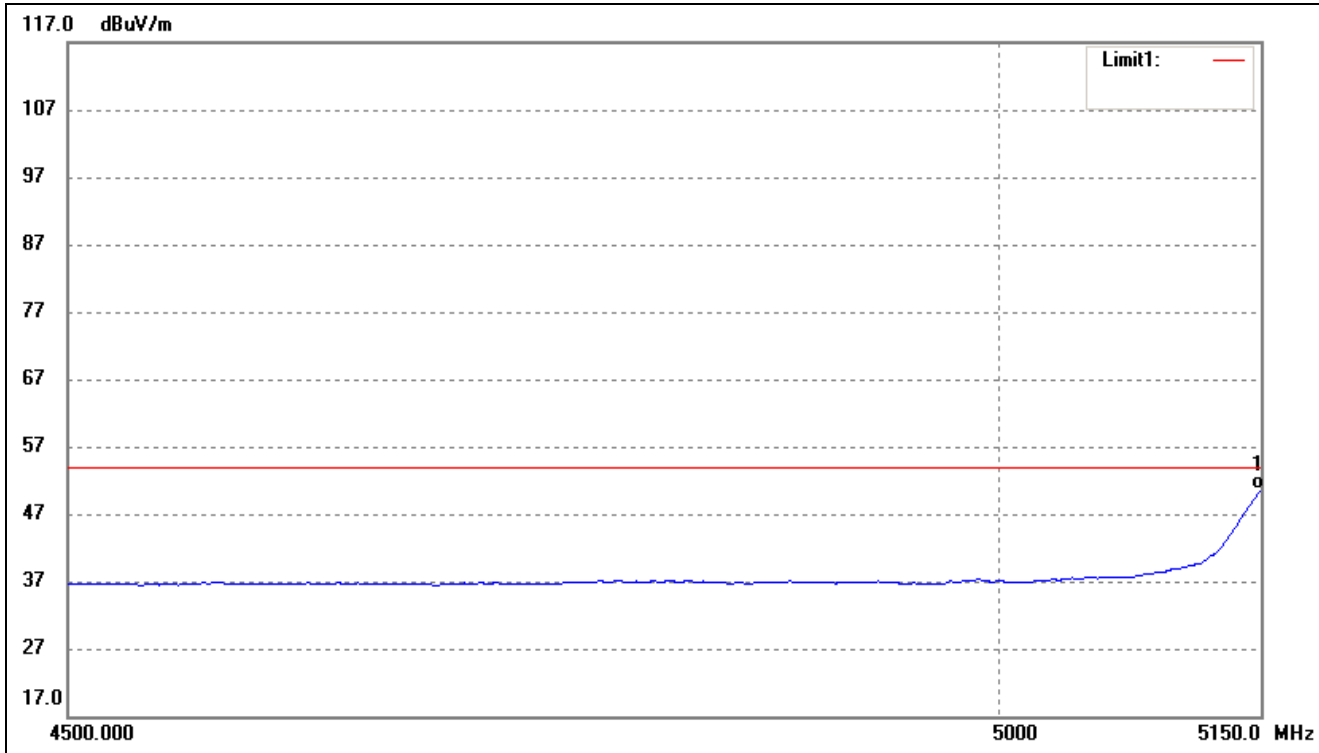Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	53.68	-2.99	50.69	54.00	-3.31	127	100	AVG


802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

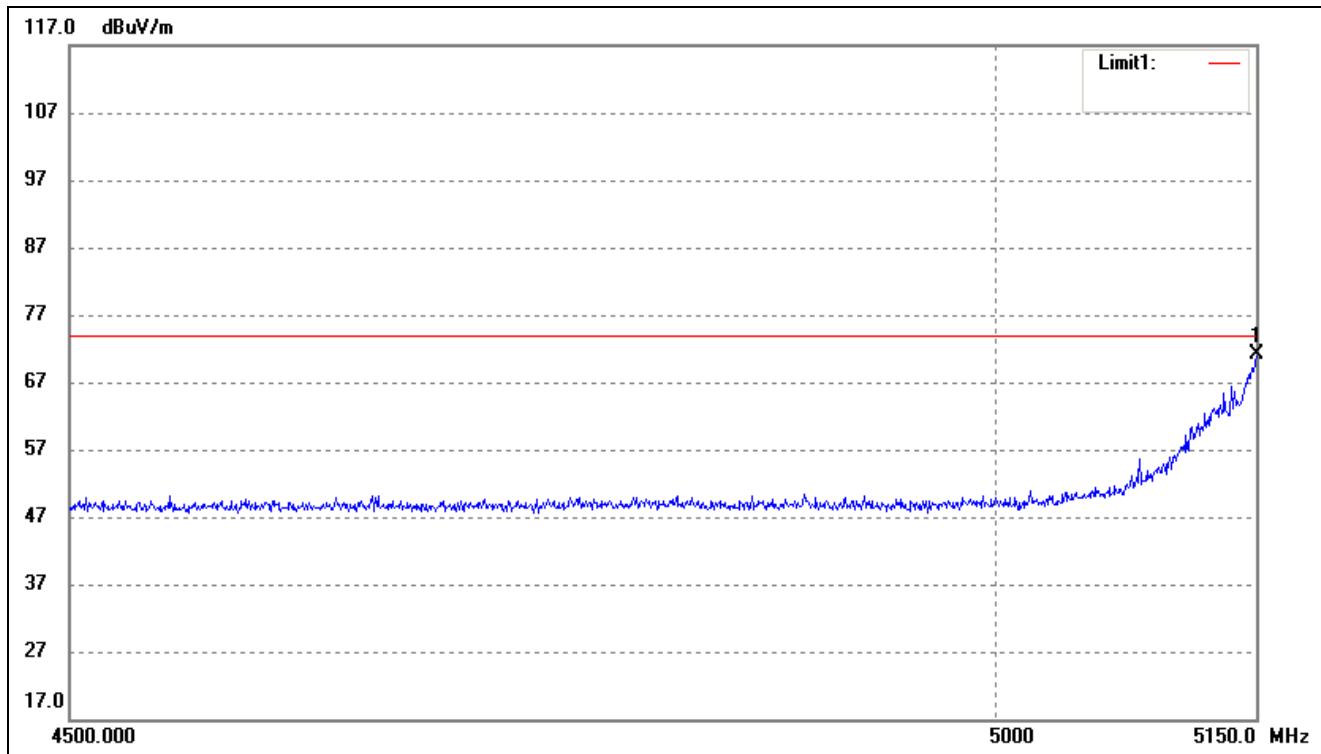

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	74.13	-2.99	71.14	74.00	-2.86	122	100	peak

## 802.11n-HT40- Restricted Bandedge

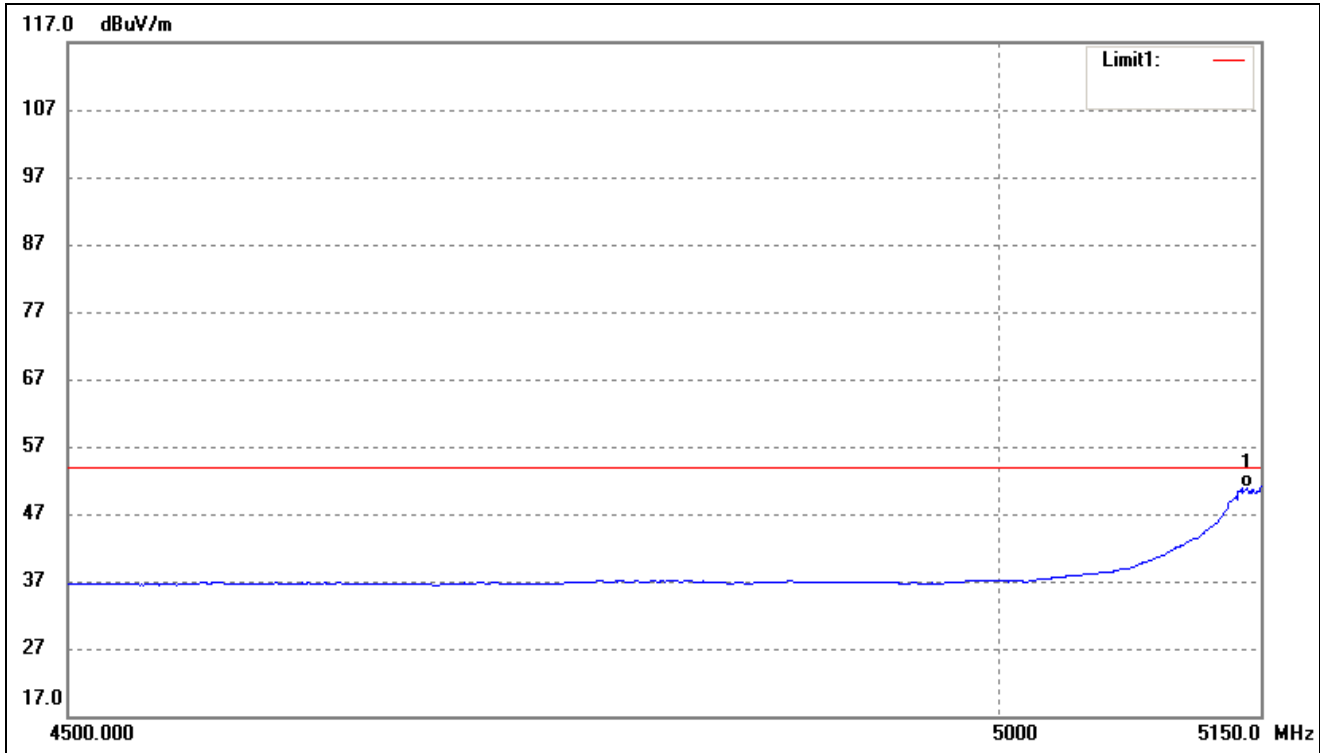
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5142.363	53.82	-3.01	50.81	54.00	-3.19	332	100	AVG


## 802.11ac-HT80- Restricted Bandedge

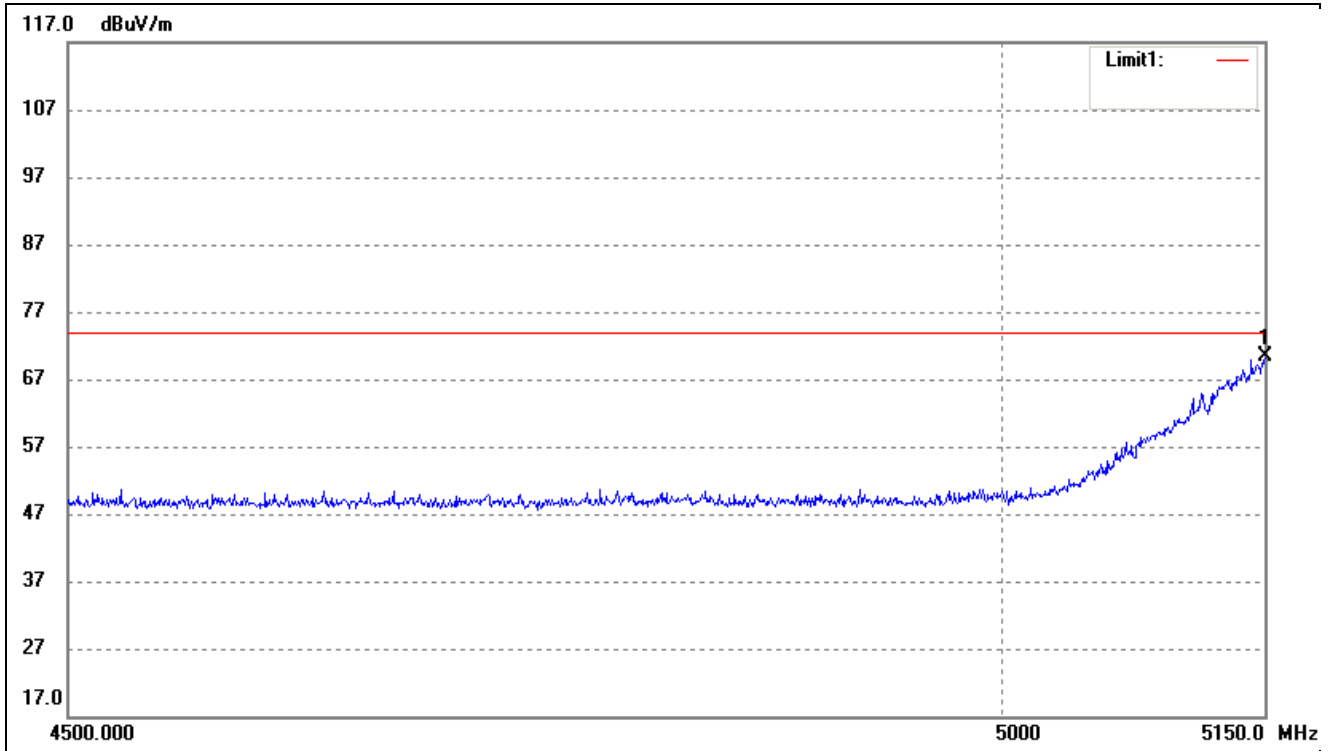Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	73.32	-2.99	70.33	74.00	-3.67	78	100	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

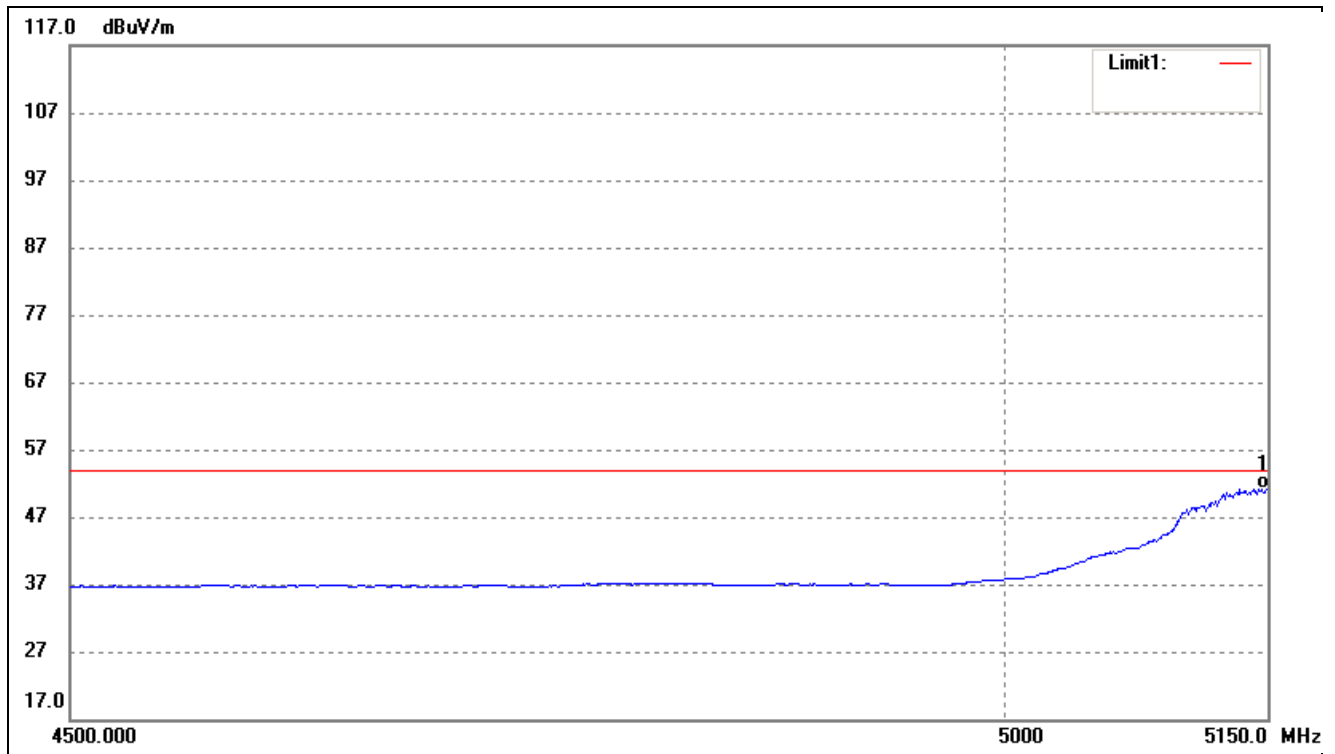

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5150.000	54.24	-2.99	51.25	54.00	-2.75	185	100	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.



- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	53.32	7.11	60.43	74	-13.57	H	PK
10360	39.42	7.11	46.53	54	-7.47	H	AV
10360	54.25	7.11	61.36	74	-12.64	V	PK
10360	38.62	7.11	45.73	54	-8.27	V	AV
High Channel (5240MHz)							
10480	54.15	7.10	61.25	74	-12.75	H	PK
10480	37.65	7.10	44.75	54	-9.25	H	AV
10480	52.51	7.10	59.61	74	-14.39	V	PK
10480	37.65	7.10	44.75	54	-9.25	V	AV
Low Channel (5745MHz)							
11490	55.25	9.02	64.27	74	-9.73	H	PK
11490	34.78	9.02	43.80	54	-10.2	H	AV
11490	53.98	9.02	63.00	74	-11.00	V	PK
11490	35.02	9.02	44.04	54	-9.96	V	AV
High Channel (5825MHz)							
11610	54.98	8.94	63.92	74	-10.08	H	PK
11610	35.30	8.94	44.24	54	-9.76	H	AV
11610	55.21	8.94	64.15	74	-9.85	V	PK
11610	36.05	8.94	44.99	54	-9.01	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-31.25	-27
Highest	Above 5350	-33.42	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-32.85	-27
	5715 to 5725	-41.61	-17
Highest	5850 to 5860	-36.27	-17
	Above 5860	-33.95	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	52.65	7.11	59.76	74	-14.24	H	PK
10360	37.15	7.11	44.26	54	-9.74	H	AV
10360	53.11	7.11	60.22	74	-13.78	V	PK
10360	35.61	7.11	42.72	54	-11.28	V	AV
High Channel (5240MHz)							
10480	53.02	7.10	60.12	74	-13.88	H	PK
10480	35.22	7.10	42.32	54	-11.68	H	AV
10480	54.05	7.10	61.15	74	-12.85	V	PK
10480	36.31	7.10	43.41	54	-10.59	V	AV
Low Channel (5745MHz)							
11490	54.11	9.02	63.13	74	-10.87	H	PK
11490	35.29	9.02	44.31	54	-9.69	H	AV
11490	54.72	9.02	63.74	74	-10.26	V	PK
11490	34.21	9.02	43.23	54	-10.77	V	AV
High Channel (5825MHz)							
11610	52.78	8.94	61.72	74	-12.28	H	PK
11610	33.52	8.94	42.46	54	-11.54	H	AV
11610	53.02	8.94	61.96	74	-12.04	V	PK
11610	35.36	8.94	44.30	54	-9.70	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.58	-27
Highest	Above 5350	-36.02	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.54	-27
	5715 to 5725	-40.25	-17
Highest	5850 to 5860	-39.36	-17
	Above 5860	-40.14	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz,5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	57.21	7.11	64.32	74	-9.68	H	PK
10380	38.31	7.11	45.42	54	-8.58	H	AV
10380	52.48	7.11	59.59	74	-14.41	V	PK
10380	35.92	7.11	43.03	54	-10.97	V	AV
High Channel (5230MHz)							
10460	54.02	7.1	61.12	74	-12.88	H	PK
10460	34.52	7.1	41.62	54	-12.38	H	AV
10460	53.54	7.1	60.64	74	-13.36	V	PK
10460	37.05	7.1	44.15	54	-9.85	V	AV
Low Channel (5755MHz)							
11510	56.32	9.04	65.36	74	-8.64	H	PK
11510	37.28	9.04	46.32	54	-7.68	H	AV
11510	55.21	9.04	64.25	74	-9.75	V	PK
11510	35.65	9.04	44.69	54	-9.31	V	AV
High Channel (5795MHz)							
11590	54.21	8.96	63.17	74	-10.83	H	PK
11590	35.21	8.96	44.17	54	-9.83	H	AV
11590	52.32	8.96	61.28	74	-12.72	V	PK
11590	36.21	8.96	45.17	54	-8.83	V	AV

## ➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.20	-27
Highest	Above 5350	-35.21	-27
Note: the data just list the worst cases			

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-34.01	-27
	5715 to 5725	-31.53	-17
Highest	5850 to 5860	-32.11	-17
	Above 5860	-39.11	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	57.21	7.11	64.32	74	-9.68	H	PK
10420	38.21	7.11	45.32	54	-8.68	H	AV
10420	53.32	7.11	60.43	74	-13.57	V	PK
10420	34.65	7.11	41.76	54	-12.24	V	AV
5775MHz							
11550	55.21	9.00	64.21	74	-9.79	H	PK
11550	34.02	9.00	43.02	54	-10.98	H	AV
11550	53.65	9.00	62.65	74	-11.35	V	PK
11550	34.21	9.00	43.21	54	-10.79	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.02	-27
Highest	Above 5350	-34.29	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-36.21	-27
	5715 to 5725	-29.36	-17
Highest	5850 to 5860	-31.21	-17
	Above 5860	-34.97	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 10. Frequency Stability

### 10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### 10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### 10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	12.00	-30	138	0.0265
100%		-20	147	0.0283
100%		-10	147	0.0283
100%		0	106	0.0204
100%		+10	131	0.0252
100%		+20	155	0.0298
100%		+30	135	0.0260
100%		+40	126	0.0242
100%		+50	117	0.0225
Low Battery power	10.8	+20	138	0.0265
High Battery power	13.2	+20	147	0.0283

U-NII-1: 5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	12.00	-30	110	0.0190
100%		-20	169	0.0292
100%		-10	155	0.0268
100%		0	102	0.0176
100%		+10	108	0.0187
100%		+20	175	0.0303
100%		+30	133	0.0230
100%		+40	159	0.0275
100%		+50	160	0.0277
Low Battery power	10.8	+20	110	0.0190
High Battery power	13.2	+20	169	0.0292

\*\*\*\*\* END OF REPORT \*\*\*\*\*