

# Zhejiang Kezheng Electronic Product Inspection

Building 5, No. 316, Jianghong South Road Binjiang District, Hangzhou 310052, China  
TEL: +86-571-88366800

## TEST REPORT



**Report No.**..... : **2019-9064**

**FCC ID**..... : **2ABUP-FT0317A**

**Applicant**..... : Shenzhen Funpower General Technology Co., Ltd.

**Address**..... : Room 201B, Habor Venture Building, No.1041 Houhai Avenue, Shekou, Nanshan District, Shenzhen City, PRC.

**Manufacturer**..... : Shenzhen Funpower General Technology Co., Ltd.

**Address**..... : Room 201B, Habor Venture Building, No.1041 Houhai Avenue, Shekou, Nanshan District, Shenzhen City, PRC.

**Product Name**..... : **Remote Control Transmitter**

**Trade Mark**..... : N/A

**Model/Type reference**..... : FT0317A

**Listed Model(s)**..... : N/A

**Standard**..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.231**

**Date of Receipt**..... : Sep.16, 2019

**Date of Test Date**..... : Sep.16, 2019-Oct.12, 2019

**Date of issue**..... : Oct.12, 2019

**Test result**..... : **Pass**

**Compiled by:**  
(Printed name+signature) Liu Wei

**Supervised by:**  
(Printed name+signature) Chen Yiyun

**Approved by:**  
(Printed name+signature) Wang Weixiong



*Liu Wei*

*Chen Yiyun*

*Wang Weixiong*

**Testing Laboratory Name**..... : **Zhejiang Kezheng Electronic Product Inspection**

**Address**..... : Building 5, No. 316, Jianghong South Road Binjiang District, Hangzhou 310052, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Kezheng. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Kezheng within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TABLE OF CONTENTS	Page
<b>1. TEST SUMMARY.....</b>	<b>3</b>
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
<b>2.N/A: MEANS THIS TEST ITEM IS NOT APPLICABLE.....</b>	<b>4</b>
1.4. MEASUREMENT UNCERTAINTY.....	5
1.5. ENVIRONMENTAL CONDITIONS.....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. CLIENT INFORMATION.....	6
2.2. GENERAL DESCRIPTION OF EUT.....	6
2.3. TEST MODE.....	6
2.4. MEASUREMENT INSTRUMENTS LIST.....	7
2.3. TEST SOFTWARE.....	7
<b>3. TEST ITEM AND RESULTS.....</b>	<b>8</b>
3.1. ANTENNA REQUIREMENT.....	8
3.2. CONDUCTED EMISSION.....	9
3.3. 20dB OCCUPIED BANDWIDTH.....	10
3.4. DEACTIVATION TIME.....	12
3.5. SPURIOUS EMISSION (RADIATED).....	14
<b>4. EUT TEST PHOTOS.....</b>	<b>20</b>
<b>5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....</b>	<b>21</b>

## 1. TEST SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.231:** Periodic operation in the band 40.66–40.70 MHz and above 70 MHz.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

### 1.2. Report version

Revised No.	Date of issue	Description
01	Oct.12, 2019	Original

### 1.3. Test Description

FCC Rules Part 15.231			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna requirement	15.203	Pass	Archer Lin
Conducted Emissions	15.207	N/A	N/A
Radiated Spurious Emissions	15.205/15.209(a)/15.231(b)/15.35(c)	Pass	Archer Lin
Deactivation Time	15.231(a)(1)	Pass	Archer Lin
Duty Cycle	15.231	Pass	Archer Lin
Occupied Bandwidth	15.231(c)	Pass	Archer Lin

Note: 1. The measurement uncertainty is not included in the test result.

2.N/A: means this test item is not applicable

## 1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Zhejiang Kezheng Electronic Product Inspection quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for Zhejiang Kezheng Electronic Product Inspection.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.23dB	(1)
Radiated Emission 30~1000MHz	3.36 dB	(1)
Radiated Emissio 1~18GHz	4.74 dB	(1)
Radiated Emissio 18-40GHz	5.20 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

**Note (1):** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 1.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Shenzhen Funpower General Technology Co., Ltd.
Address:	Room 201B,Habor Venture Building, No.1041 Houhai Avenue, Shekou,Nanshan District,Shenzhen City,PRC.
Manufacturer:	Shenzhen Funpower General Technology Co., Ltd.
Address:	Room 201B,Habor Venture Building, No.1041 Houhai Avenue, Shekou,Nanshan District,Shenzhen City,PRC.

### 2.2. General Description of EUT

Product Name:	Remote Control Transmitter
Model/Type reference:	FT0317A
Trademark:	N/A
Listed models:	N/A
Model Difference:	N/A
Power supply:	N/A
Power supply(Battery):	DC 3V(2x1.5V AAA battery)
Hardware version:	V1.0
Software version:	V1.0
<b>RF Specification</b>	
Operation frequency:	433.92MHz(433.845MHz-433.995MHz)
Modulation Type:	ASK
Modulation connector:	<input checked="" type="checkbox"/> Without external <input type="checkbox"/> External
Occupied bandwidth	>25KHz
Product type:	<input checked="" type="checkbox"/> Wideband deceive <input type="checkbox"/> Narrowband deceive
Channel number:	1
Antenna type:	PCB antenna
Antenna gain:	10dBi

### 2.3. Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode	Description	Remark
1	TX	DC 3V

## 2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	Sept. 09, 2020
2	Vector Signal Generator	Agilent	N5182A	MY50142520	Sept. 09, 2020
3	Analog Signal Generator	HP	83752A	3344A00337	Sept. 09, 2020
4	Power Sensor	Agilent	E9304A	MY50390009	Sept. 09, 2020
5	Power Sensor	Agilent	E9300A	MY41498315	Sept. 09, 2020
6	Wideband Radio Communication Tester	R&S	CMU200	115297	Sept. 09, 2020
7	Climate Chamber	Angul	AGNH80L	1903042120	Sept. 09, 2020
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	Sept. 09, 2020
9	RF Control Unit	Tonscend	JS0806-2	/	Sept. 09, 2020

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR	102525	Sept. 09, 2020
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	Sept. 09, 2020
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	Sept. 09, 2020
4	Spectrum Analyzer	HP	8593E	3831U02087	Sept. 09, 2020
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	Sept. 09, 2020
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	Sept. 09, 2020
7	Horn Antenna	R&S	Sep-60	69483	Sept. 09, 2020
8	Spectrum Analyzer	R&S	FSV40-N	101798	Sept. 09, 2020
9	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	Sept. 09, 2020
10	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	Sept. 09, 2020
11	Pre-Amplifier	EMCI	EMC051835SE	980662	Sept. 09, 2020
12	Power Meter	Agilent	E4419B	GB41293710	Sept. 09, 2020

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

## 2.3. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

### 3. TEST ITEM AND RESULTS

#### 3.1. Antenna requirement


##### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

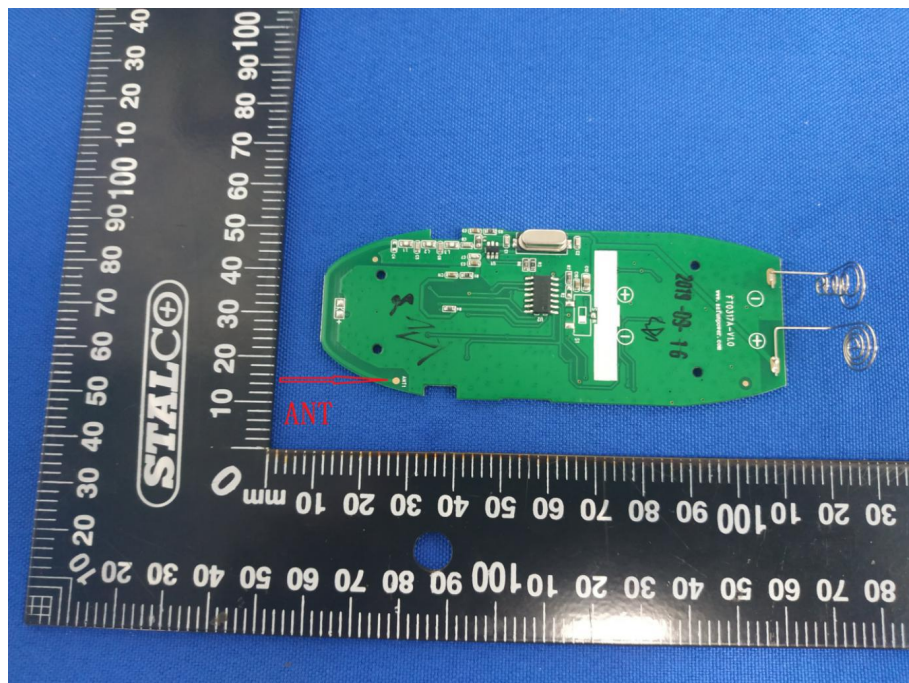



## 3.2. Conducted Emission

### Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Configuration

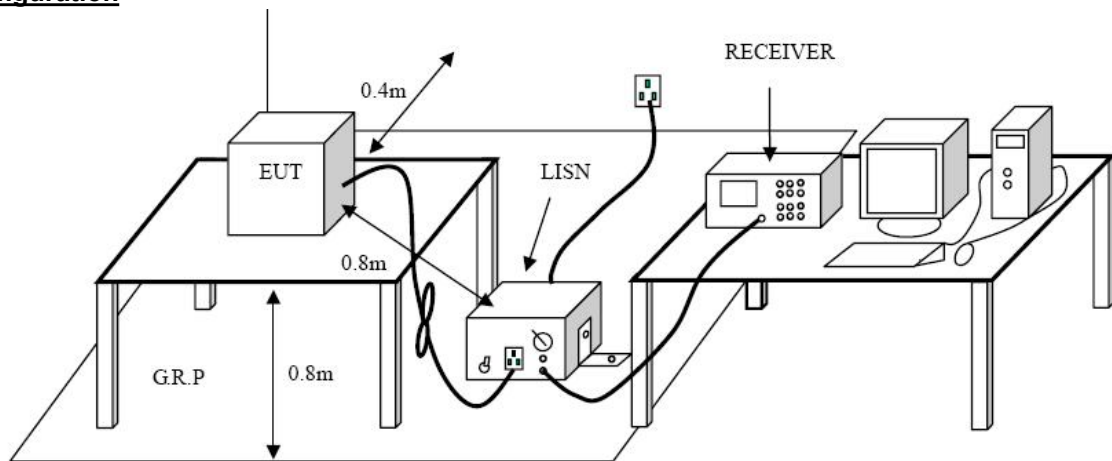

### Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment.  
The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

### Test Mode:

Please refer to the clause 2.3.

### Test Results


☐ Passed ☒ Not Applicable

### 3.3. 20dB Occupied Bandwidth

#### Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency

#### Test Configuration

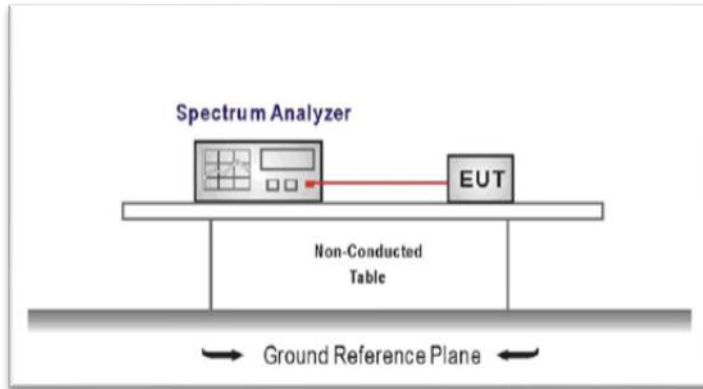


#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a operation channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.3.

#### Test Results

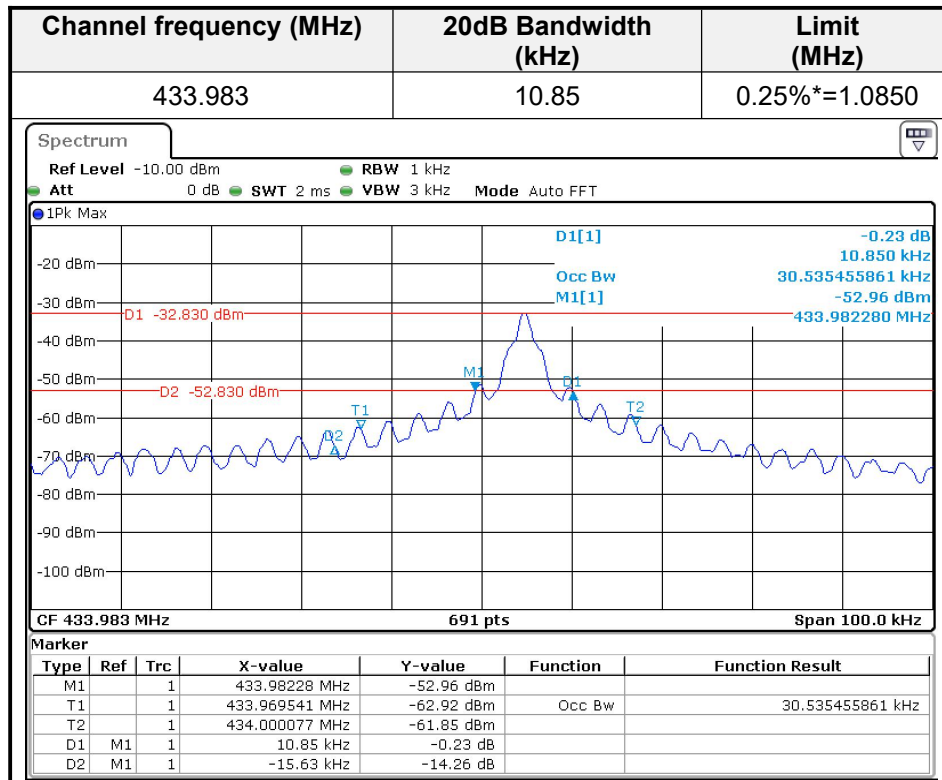


### 3.4. Deactivation Time

#### Limit

A manually operated transmitter shall employ a switch that will auto-matically deactivate the transmitter within not more than 5 seconds of being released.

#### Test Configuration

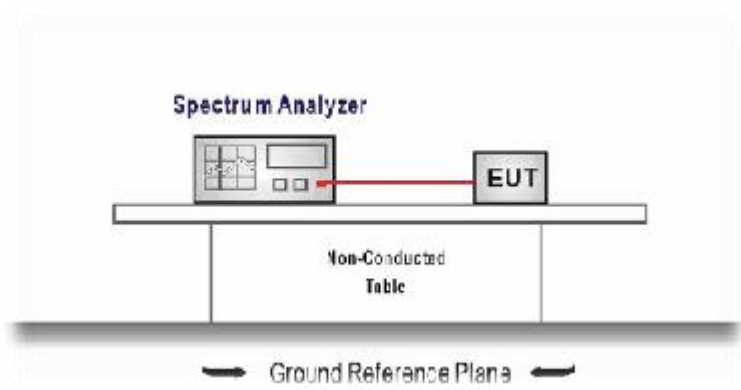


#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Frequency=Center carrier frequency  
RBW=100KHz, VBW=300KHz, Span= 0,  
Sweep time= 10 second, Detector function = peak, Trace = single
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.3.

#### Test Results

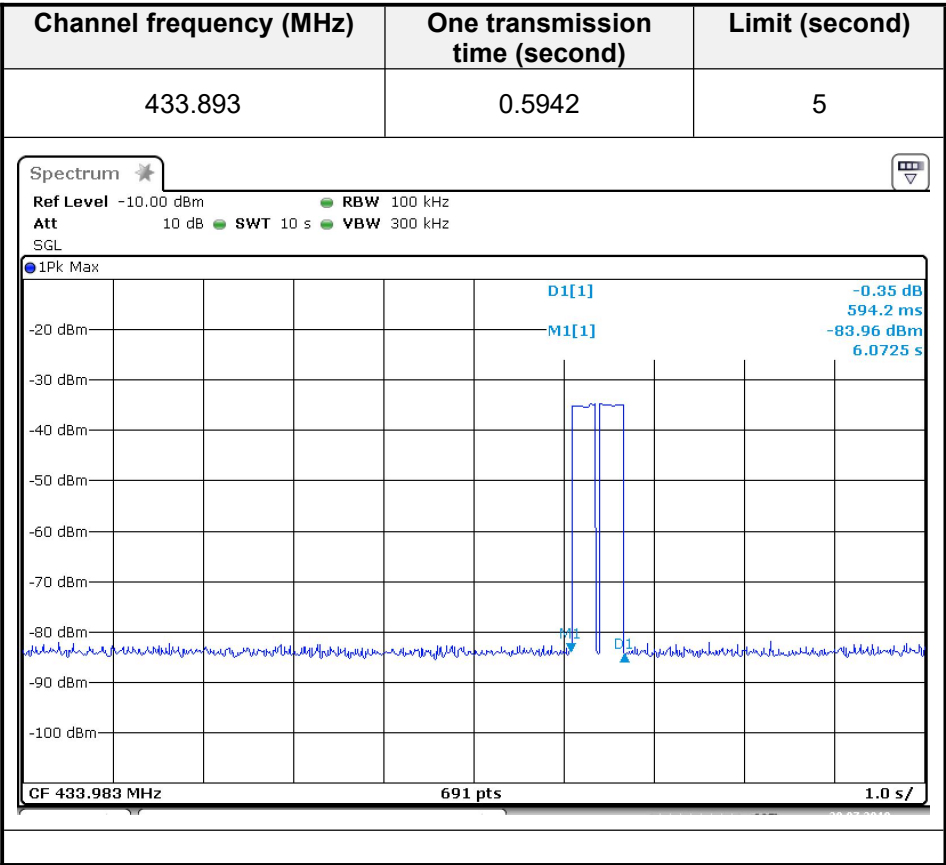

### 3.5. Spurious Emission (radiated)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

**Radiated Emission Limits (9 kHz~1000 MHz)**

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	$2400/F(\text{KHz})$	300
0.490~1.705	$24000/F(\text{KHz})$	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated **average value** under this section shall not exceed the following

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
260 - 470 MHz	3,750 to 12,500 **	375 to 1,250 **


\*\* linear interpolations

F is 433.983MHz


Field strength of fundamental:  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3420$

Field strength of harmonics:  $\mu\text{V/m}$  at 3 meters =  $4.16667(F) - 708.3342$


#### Test Configuration

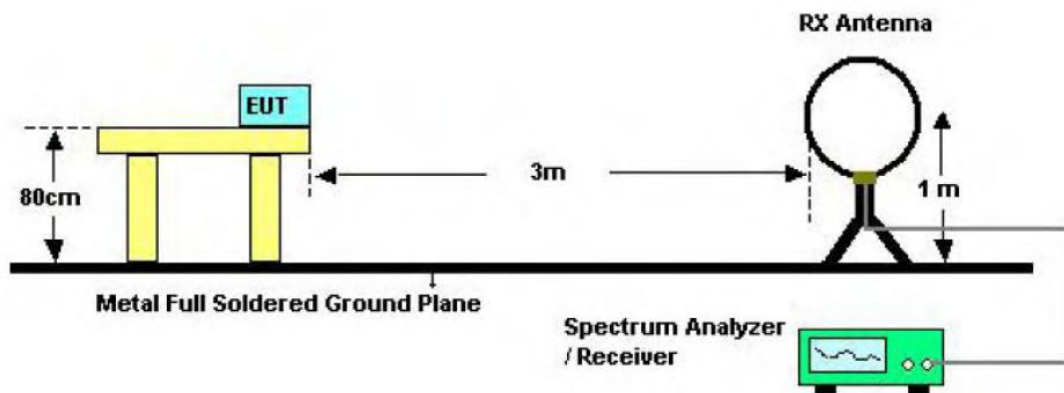

Below 30MHz Test Setup

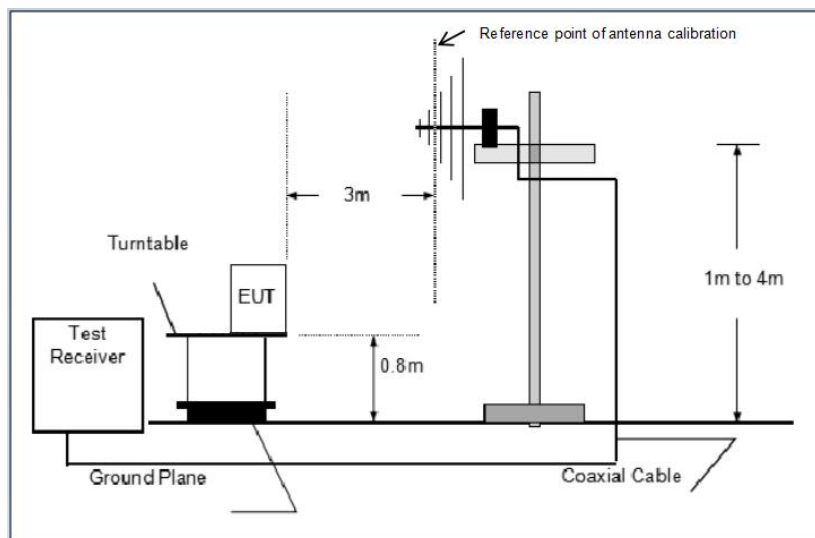

Below 1000MHz Test Setup

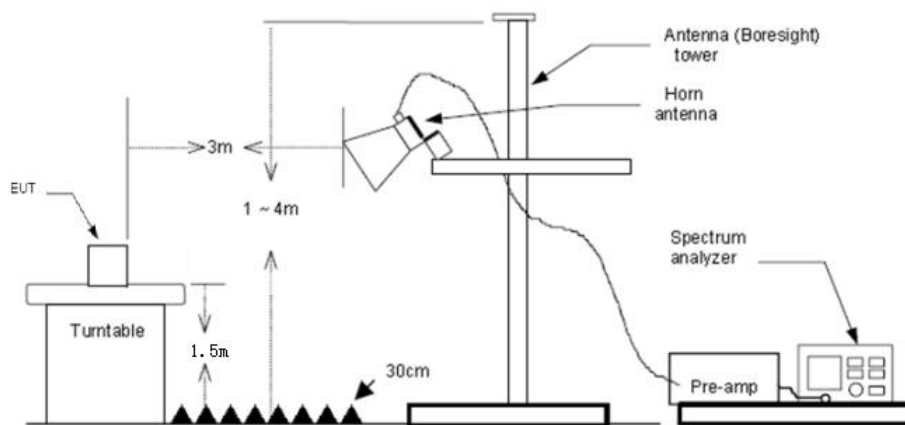

Above 1GHz Test Setup

### **Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=10Hz RMS detector for Average value.

**Test Mode**

Please refer to the clause 2.3.

**Test Result****9 KHz~30 MHz , 30MHz-1GHz and 1GHz~6GHz**

From 9 KHz~30 MHz, 30MHz-1GHz and 1GHz~6GHz: Conclusion: PASS


Note:

- 1) Final level = Reading level + Correct Factor  
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Frequency (MHz)	Transmission cease Time (s)	Limit: not more than 5 seconds of being released (s)	Conclusion
433.983	0.5942	5	PASS

$T_{on}$ (ms)	$T_{on}+T_{off}$ (ms)
$14 \times 0.8841 + 27 \times (1.4783 - 1.1884) = 20.2047$	53.333
Duty cycle factor (dB) = $20 \log (T_{on} / (T_{on} + T_{off}))$ (dB) = -8.43(dB)	



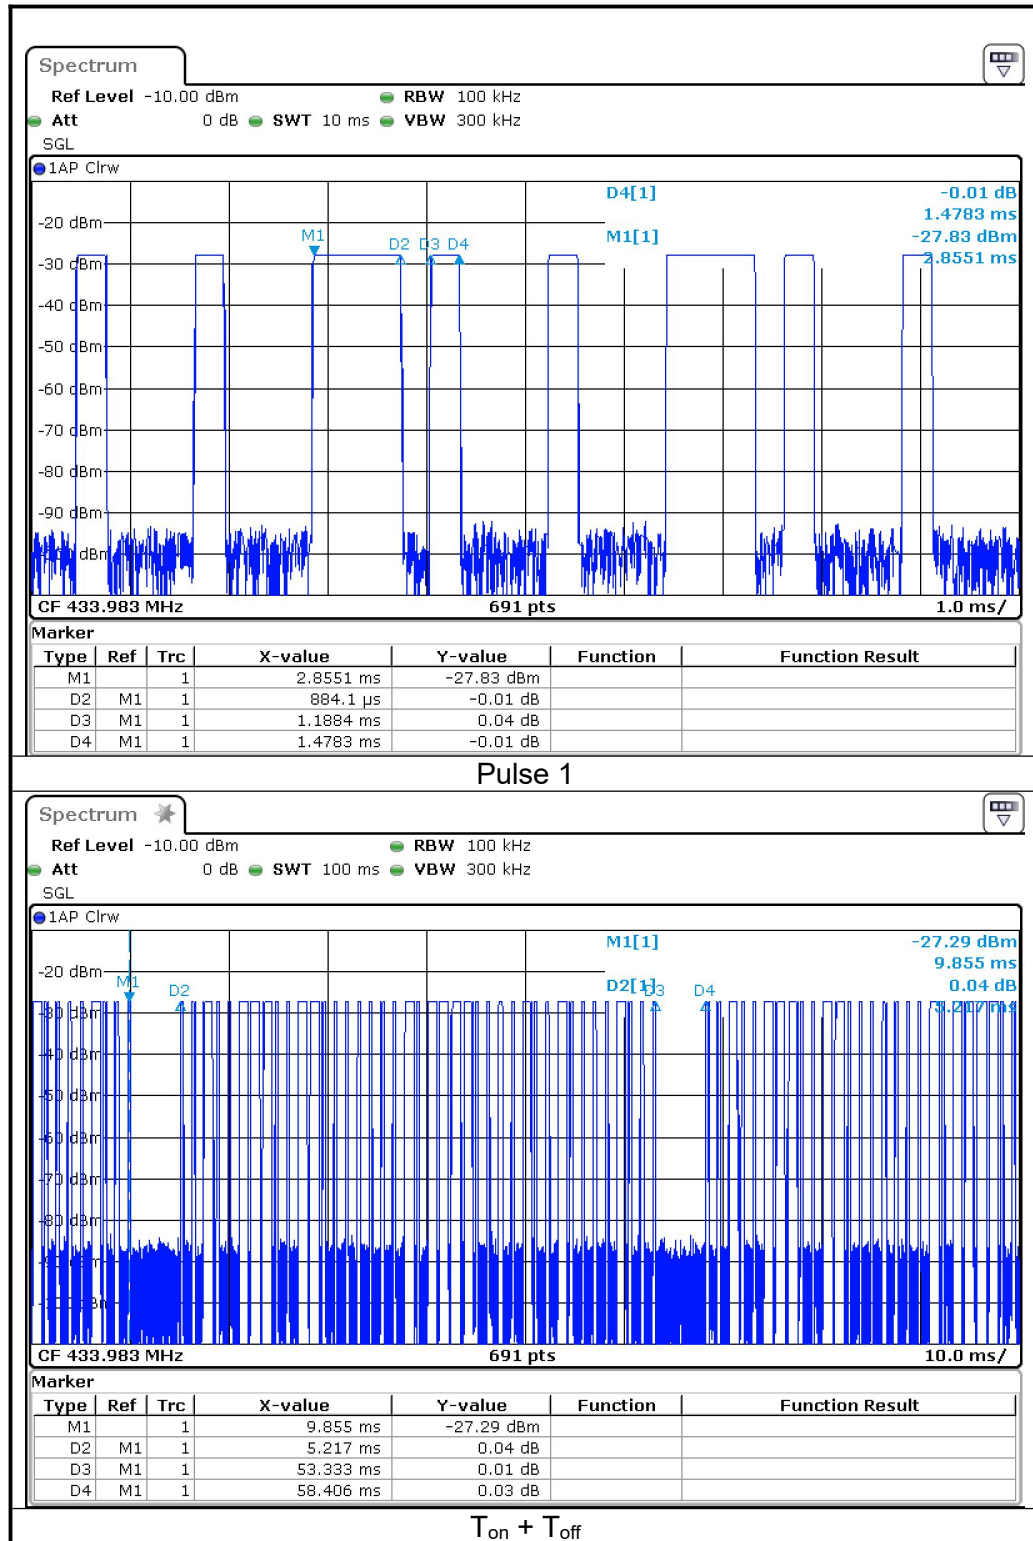

■ 30MHz~ 1000MHz

Test Channel				433.983MHz			
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Final level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
102.0729	25.63	-16.12	9.51	43.50	-33.99	Vertical	QP
217.0110	30.82	-16.23	14.59	46.00	-31.41	Vertical	QP
325.4817	31.12	-13.19	17.93	46.00	-28.07	Vertical	QP
433.9830	93.15	-10.15	83.00	100.83	-17.83	Vertical	Peak
663.4729	25.36	-7.86	17.50	46.00	-28.50	Vertical	QP
868.2164	35.78	-5.03	30.75	80.83	-50.08	Vertical	Peak
217.0110	38.20	-17.22	20.98	46.00	-25.02	Horizontal	QP
325.4817	48.89	-14.69	34.20	46.00	-11.80	Horizontal	QP
379.7810	31.70	-12.83	18.87	46.00	-27.13	Horizontal	QP
420.4329	46.00	-12.47	33.53	46.00	-12.47	Horizontal	QP
433.9830	97.94	-12.57	85.37	100.83	-15.46	Horizontal	Peak
868.2164	49.62	-7.87	41.75	80.83	-39.08	Horizontal	Peak

Frequency (MHz)	Peak Level (dBuV/m)	Duty cycle factor(dB)	AV Level (dBuV/m)	FCC Limit (dBμV/m)	Margin (dB)	Polarization
433.9830	83.00	-8.43	74.57	80.83	-6.26	Vertical
868.2164	30.75	-8.43	22.32	60.83	-38.51	Vertical
433.9830	78.94	-8.43	70.51	80.83	-10.32	Horizontal
868.2164	56.23	-8.43	47.8	60.83	-13.03	Horizontal

Note:Duty cycle factor =  $20\log(\text{Duty cycle})$ , Duty cycle =  $T_{on} / (T_{on} + T_{off})$

## ■ 1GHz~ 6GHz

Test Channel				433.983MHz			
Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Final level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1302.400	57.61	-17.70	39.91	74.00	-34.09	Vertical	Peak
1736.800	62.76	-16.44	46.32	74.00	-27.68	Vertical	
2170.000	62.85	-15.53	47.32	74.00	-26.68	Vertical	
2603.600	66.01	-14.95	51.06	74.00	-22.94	Vertical	
3037.600	63.09	-14.41	48.68	74.00	-25.32	Vertical	
3472.000	56.66	-13.22	43.44	74.00	-30.56	Vertical	
1302.000	56.01	-17.70	38.31	74.00	-35.69	Horizontal	
1736.800	52.82	-16.44	36.38	74.00	-37.62	Horizontal	
2169.600	54.83	-15.53	39.30	74.00	-34.70	Horizontal	
2604.000	61.58	-14.95	46.63	74.00	-27.37	Horizontal	
3038.000	58.22	-14.40	43.82	74.00	-30.18	Horizontal	
3906.000	52.42	-12.02	40.40	74.00	-33.60	Horizontal	

Frequency (MHz)	Peak Level (dBuV/m)	Duty cycle factor	AV Level (dBuV/m)	FCC Limit (dBμV/m)	Margin (dB)	Polarization
1302.400	39.91	-8.43	31.48	60.83	-29.35	Vertical
1736.800	46.32	-8.43	37.89	60.83	-22.94	Vertical
2170.000	47.32	-8.43	38.89	60.83	-21.94	Vertical
2603.600	51.06	-8.43	42.63	60.83	-18.20	Vertical
3037.600	48.68	-8.43	40.25	60.83	-20.58	Vertical
3472.000	43.44	-8.43	35.01	60.83	-25.82	Vertical
1302.000	38.31	-8.43	29.88	60.83	-30.95	Horizontal
1736.800	36.38	-8.43	27.95	60.83	-32.88	Horizontal
2169.600	39.30	-8.43	30.87	60.83	-29.96	Horizontal
2604.000	46.63	-8.43	38.20	60.83	-22.63	Horizontal
3038.000	43.82	-8.43	35.39	60.83	-25.44	Horizontal
3906.000	40.40	-8.43	31.97	60.83	-28.86	Horizontal

Note: Duty cycle factor =  $20\log(\text{Duty cycle})$ , Duty cycle =  $T_{on} / (T_{on} + T_{off})$

## **4.EUT TEST PHOTOS**

Reference to the document No.: Test Photos.

## 5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Reference to the document No.: External Photos and Internal Photos.

\*\*\*\*\*THE END\*\*\*\*\*