# FCC PART 15 SUBPART C TEST REPORT

for

### WiFi Module

Model No.: WiFi-04

FCC ID: 2ABUR-WIFI-04

of

Applicant: AIFA TECHNOLOGY CORP.

Address: No.230, Sec. 2, Bade Rd., Fengshan Dist., Kaohsiung City 83053, Taiwan (R.O.C.)

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01





Report No.: W6M21601-15579 -C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C. TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com

Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

# **TABLE OF CONTENTS**

1	GE	ENERAL INFORMATION	2
	1.1	Notes	2
	1.2	TESTING LABORATORY	3
	1.2.	.1 Location	3
	1.2.	.2 Details of accreditation status	3
	1.3	DETAILS OF APPROVAL HOLDER	3
	1.4	APPLICATION DETAILS	4
	1.5	GENERAL INFORMATION OF TEST ITEM	4
	1.6	TEST STANDARDS	5
2	TE	CHNICAL TEST	6
	2.1	SUMMARY OF TEST RESULTS	6
	2.2	TEST ENVIRONMENT	6
	2.3	TEST EQUIPMENT LIST	7
	2.4	GENERAL TEST PROCEDURE	9
3	TE	ST RESULTS (ENCLOSURE)	11
	3.1	PEAK OUTPUT POWER (TRANSMITTER)	12
	3.2	EQUIVALENT ISOTROPIC RADIATED POWER	18
	3.3	RF Exposure Compliance Requirements	18
	3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	18
	3.5	Spurious Emissions (TX)	20
	3.6	RADIATED EMISSION ON THE BAND EDGE	23
	3.7	MINIMUM 6 dB BANDWIDTH	27
	3.8	PEAK POWER SPECTRAL DENSITY	33
	3.9	RADIATED EMISSION FROM RECEIVER PART	39
	3.10	Power Line Conducted Emission	40
A	PPENI	DIX	41

FCC ID: 2ABUR-WIFI-04

### 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that is performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

## Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

The test sample is able to work according IEEE 802.11 b/g/n.

This report is related to FCC Part 15 C (DSSS and OFDM device).

#### **Tester:**

July 20, 2016	1	Rick Chen	RICK	Chen.
Date	WTS-Lab.	Name	Sig	nature

#### Technical responsibility for area of testing:

July 20, 2016		Kevin Wang	Kevir Wan	
Date	WTS	Name	Signa	ture

FCC ID: 2ABUR-WIFI-04 **1.2 Testing laboratory** 

#### 1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228 FAX:886-2-2791-5046

#### Company

Worldwide Testing Services(Taiwan) Co., Ltd. 6F, NO. 58, LANE 188, RUEY-KUANG RD. NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877 Fax : 886-2-66068879

#### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

### Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd.:

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.
Telephone:	./.
Fax:	./.

## 1.3 Details of approval holder

Name: AIFA TECHNOLOGY CORP.

Street: No.230, Sec. 2, Bade Rd., Fengshan Dist.,

Town: Kaohsiung City 83053,

Country: Taiwan (R.O.C.)
Telephone: 886-7-7777128
Fax: 886-7-7777407

FCC ID: 2ABUR-WIFI-04 1.4 **Application details** 

Date of receipt of test item: February 01, 20	10
---	----

Date of receipt of test item:	February 01, 2016
Date of test:	from February 02, 2016 to July 19, 2016
1.5 General information o	f Test item
Type of test item:	WiFi Module
Model Number:	WiFi-04
Brand Name:	AIFA
Multi-listing model number:	./.
Photos:	see Appendix
Technical data	
Frequency band:	2.4 GHz – 2.4835 GHz
11b, 11g, 11n 20MHz	
Frequency (ch 1 or A):	2.412 GHz
Frequency (ch 6 or B):	2.437 GHz
Frequency (ch 11 or C):	2.462 GHz
Number of Channels:	11b, 11g, 11n 20MHz: 11
Operation modes:	duplex
Modulation Type:	DSSS / OFDM
Fixed point-to-point operation:	☐ Yes / ⊠ No
Type of Antenna:	On board PCB Antenna
Antenna gain:	2 dBi
Power supply:	Input 3.3 Vd.c.
Emission designator:	11b: DSSS: 16M9G1D
	11g: OFDM: 17M5D1D
	11n 20MHz: OFDM: 17M3D1D
Host device:	none
Classification :	
Fixed Device	
,	man Body distance > 20cm)
-	uman Body distance < 20cm)
Modular Radio Dev	rice

FCC ID: 2ABUR-WIFI-04

<u>Transmitter</u> <u>Unom</u>

Mode A (DSSS)

Power ( ch 1 or A): Conducted: 10.48 dBm Power ( ch 6 or B): Conducted: 10.54 dBm Power ( ch 11 or C): Conducted: 10.71 dBm

Mode B (OFDM)

Power ( ch 1 or A): Conducted: 10.31 dBm Power ( ch 6 or B): Conducted: 10.86 dBm Power ( ch 11 or C): Conducted: 11.04 dBm

Mode C (OFDM)

Power ( ch 1 or A): Conducted: 10.17 dBm Power ( ch 6 or B): Conducted: 10.76 dBm Power ( ch 11 or C): Conducted: 10.90 dBm

**Manufacturer:** (if applicable)

Name: ./.
Street: ./.
Town: ./.
Country: ./.

### 1.6 Test standards

Technical standard: FCC RULES PART 15 SUBPART C § 15.247 (2015-10)

FCC ID: 2ABUR-WIFI-04 **Technical test** 

## 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	×
or	
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	

### 2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: Input 3.3 Vd.c.

Extreme conditions parameters: ./.



Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

# 2.3 Test Equipment List

No.	Test equipment	Туре	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2016/5/20	2017/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function	on Test
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Functio	on Test
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2016/7/12	2017/7/11
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2015/9/7	2016/9/6
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2016/5/20	2017/5/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2016/5/25	2017/5/24
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2016/7/4	2017/7/3
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Functio	on Test
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Functio	on Test
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2016/6/24	2017/6/23
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2016/6/29	2017/6/28
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2016/3/23	2017/3/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2016/1/25	2017/1/24
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2016/3/28	2017/3/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2016/4/14	2017/4/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-te	st Use
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2016/2/27	2017/2/26
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2016/2/25	2017/2/24
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2016/4/13	2017/4/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function	on Test
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function	on Test
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	НР	2015/9/6	2016/9/5
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2015/9/21	2016/9/20
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Functi	on test
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2016/1/13	2017/1/12
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Functi	on test
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2016/5/23	2017/5/22
ETSTW-RE 125	5GHz Notch filter	5NSL11- 5200/E221.3-O/O	1	K&L Microwave	2015/8/11	2016/8/10



Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

ETSTW-RE 126	5GHz Notch filter	5NSL11-	1	K&L Microwave	2015/8/11	2016/8/10
ETSTW-RE 127	RF Switch Box	5800/E221.3-O/O RFS-01	None	WTS	2016/2/25	2017/2/24
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 130	Handheld RF Spectrum	N9340A	CN0147000204	Agilent	Pre-te	
ETSTW-RE 142	Analyzer Amplifier	8447D	2805A03378	Agilent	2016/4/13	2017/4/12
ETSTW-RE 143	Humidity Temperature	TES-1260	110104623	TES	2015/9/9	2016/9/8
ETSTW-RE 147	Meter	MCTD 2786B	BLB16M04005	ETC	2016/3/31	2017/3/30
ETSTW-RE 147 ETSTW-EMI 011	Bi-log Hybrid Antenna	SFC-U	101689	R&S	2016/5/4	2017/5/30
	USB Compact Modulator Universal Radio					
ETSTW-GSM 002	Communication Tester Radio Communication	CMU 200	109439	R&S	2016/3/4	2017/3/3
ETSTW-GSM 003	Analyzer	MT8820C WRCTF824/849-	6201342073	Anritsu	2016/2/3	2017/2/2
ETSTW-GSM 019	Band Reject Filter	822/851-40 /12+9SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748- 1743/1752-32/5SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5 -1875.5/1884.5- 32/5SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1- 904.25-50/8SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2015/9/16	2016/9/15
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test U	Jse NCR
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2016/4/22	2017/4/21
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2016/4/7	2017/4/6
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2016/5/13	2017/5/12
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2016/4/7	2017/4/6
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2016/4/13	2017/4/12
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version E	TS-03A1

FCC ID: 2ABUR-WIFI-04

#### 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50µH LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of  $dB\mu V$ ) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS

33  $20 dB\mu V + 10.36 dB + 6 dB = 36.36 dB\mu V/m @3m$ 

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



FCC ID: 2ABUR-WIFI-04

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = 20 log (dwell time/T)

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

# 3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	×	×	
Equivalent isotropically radiated Power	15.247(b)	×	×	
Spurious Emissions radiated – Transmitter	15.247(c):	×	×	
operating	15.209			
Band Edge Measurement	15.247(d)	×	×	
Minimum 6 dB Bandwidth	15.247(a)(2)	×	×	
Peak Power Spectral Density	15.247(e)	×	×	
Radiated Emission from Receiver Part	15.109	×	×	
Power Line Conducted Emission	15.207			

FCC ID: 2ABUR-WIFI-04


## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

#### Mode A

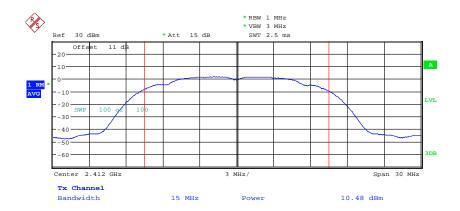


MAX OUTPUT POWER 802.11B CH01 Date: 17.MAY.2016 13:19:40




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

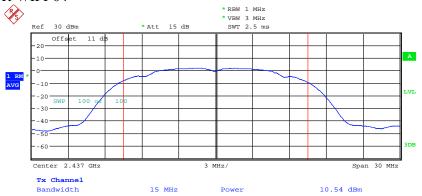

MAX OUTPUT POWER 802.11B CH06 Date: 17.MAY.2016 13:20:34

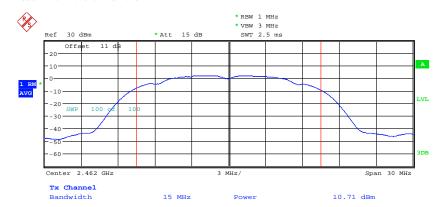


MAX OUTPUT POWER 802.11B CH11 Date: 17.MAY.2016 13:21:36




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

Mode B

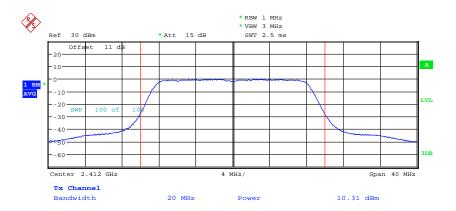

MAX OUTPUT POWER 802.11G CH01 Date: 17.MAY.2016 13:22:43

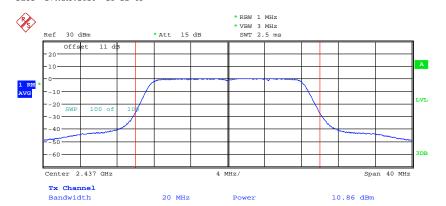


MAX OUTPUT POWER 802.11G CH06 Date: 17.MAY.2016 13:23:30




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

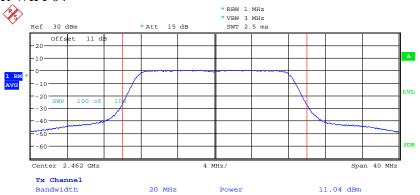

MAX OUTPUT POWER 802.11G CH11 Date: 17.MAY.2016 13:24:10

### Mode C

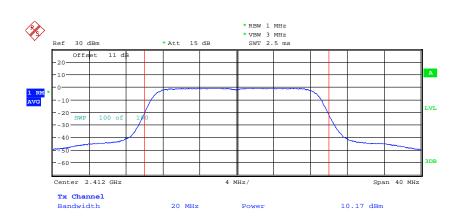


MAX OUTPUT POWER 802.11N 20MHZ CH01 Date: 17.MAY.2016 13:25:39




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

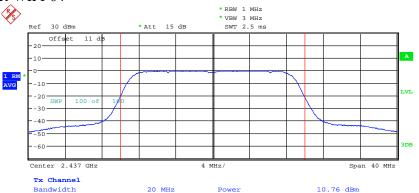

MAX OUTPUT POWER 802.11N 20MHZ CH06 Date: 17.MAY.2016 13:26:26

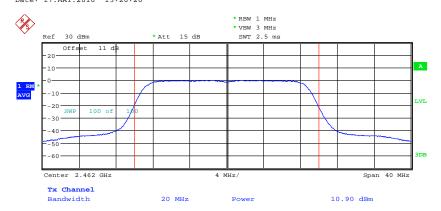

MAX OUTPUT POWER 802.11N 20MHZ CH11 Date: 17.MAY.2016 13:27:07

FCC ID: 2ABUR-WIFI-04

### Limits:

Frequency	Power
MHz	dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider \$15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050  $\,$ 

FCC ID: 2ABUR-WIFI-04

## 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = 11.04 dBm

Test equipment used: ETSTW-RE 055

## 3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a "worst case" or conservative prediction.

$$S = \frac{PG}{4 \pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG - Antenna Gain

Item	Unit	Value	Remarks
P	mW	12.7057	Peak value
D	dB		
AG	dBi	2	
G		1.5849	Calculated Value
R	cm	20	Assumed value
S	mW/cm <sup>2</sup>	0.004	Calculated value

#### Limits:

Limit for General Population / Uncontrolled Exposure						
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )					
1500 – 100.000	1.0					

FCC ID: 2ABUR-WIFI-04

### 3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq 1$  GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements) Frequency > 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements) Frequency > 1 GHz, RBW:1 MHz, VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission	Field strength	Field Strength
(MHz)	(microvolts/meter)	(dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = 20 log (dwell time/ 100ms)

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.

FCC ID: 2ABUR-WIFI-04

## 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

### Limits:

For frequencies above 1GHz (Peak measurements). Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements). Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

"If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation."

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = 20 log (dwell time/100ms)

Note: No duty cycle correction was added to the reading of EUT.



FCC ID: 2ABUR-WIFI-04

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

#### Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

### Summary table with radiated data of the test plots

Model: WiFi-04 Date: --

Mode: -- Temperature: -- °C Engineer: --

Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
			-			1		

Frequency (MHz)	(dB	ding uV)	Factor (dB)	(dBu	(2 @ 3 m V/m)	Limit (dBu	V/m)	Margin (dB)	Table Degree	Ant. High (cm)
` ′	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.	, ,	(Deg.)	
		1				-		-		
		1				1		1		
		1				1		1		
		1				1		1		
		1				-		-		

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

Frequency (MHz)	ding uV) Ave.	Factor (dB) Corr.	(@3m V/m) Ave.	`	@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	 		 			-		



FCC ID: 2ABUR-WIFI-04

Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement: 30-1000 MHz =  $\pm 4.69$  dB, 1-18 GHz =  $\pm 4.78$  dB, 18-40 GHz=  $\pm 2.44$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams in appendix.

**TEST RESULT** (**Transmitter**): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142,

ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018


FCC ID: 2ABUR-WIFI-04

## 3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

#### Mode A

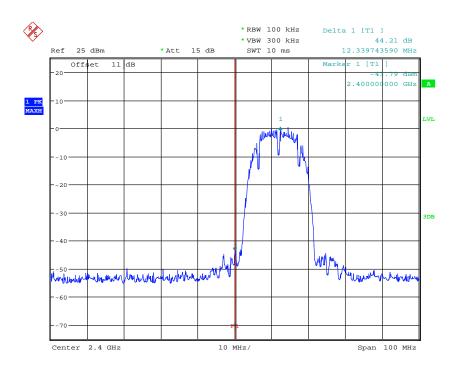


BANDEDGE 802.11B CH01
Date: 17.MAY.2016 13:20:02




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

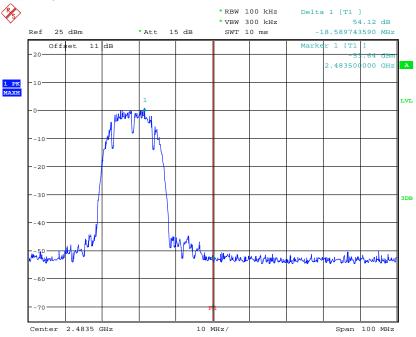

BANDEDGE 802.11B CH11
Date: 17.MAY.2016 13:21:58

#### Mode B

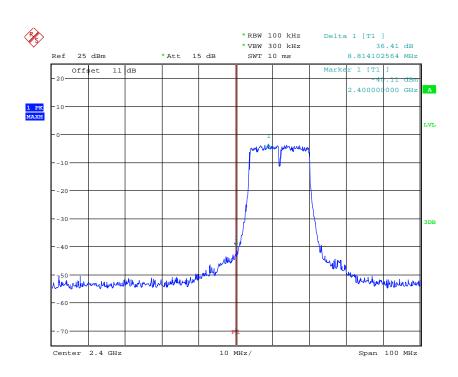


BANDEDGE 802.11G CH01
Date: 17.MAY.2016 13:23:05




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

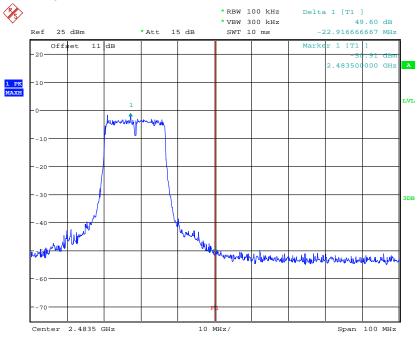

BANDEDGE 802.11G CH11
Date: 17.MAY.2016 13:24:32

#### Mode C

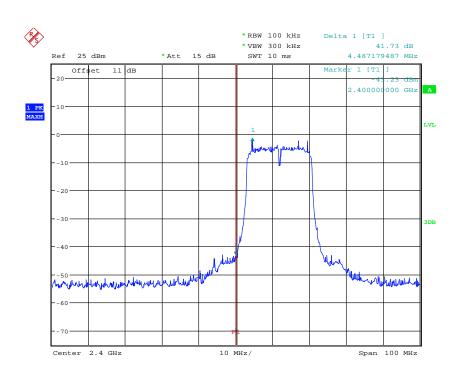


BANDEDGE 802.11N 20MHZ CH01 Date: 17.MAY.2016 13:26:01



Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

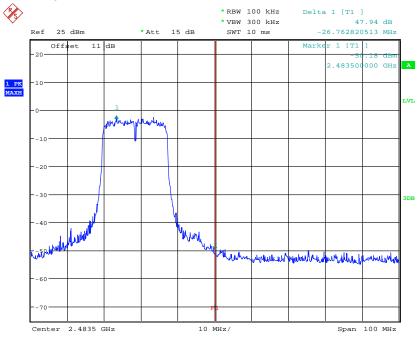

BANDEDGE 802.11N 20MHZ CH11 Date: 17.MAY.2016 13:27:29

### Limit:

Frequency Range / MHz	Limit
902 –928	
2400 – 2483.5	- 20 dB
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050


FCC ID: 2ABUR-WIFI-04

### 3.7 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission.

The 6 dB bandwidth is the frequency difference between the two markers.

### Mode A

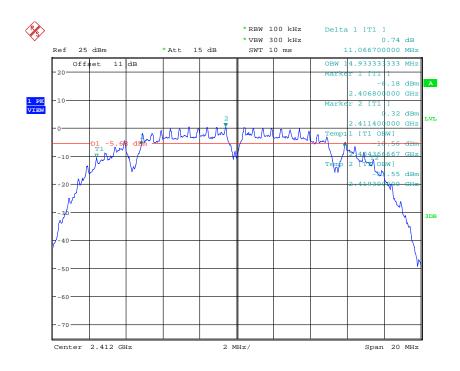


6DB BANDWIDTH 802.11B CH01 Date: 17.MAY.2016 13:19:48




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

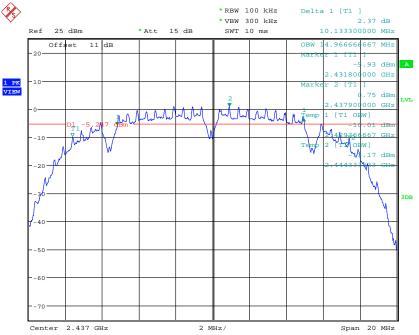

6DB BANDWIDTH 802.11B CH06 Date: 17.MAY.2016 13:20:42

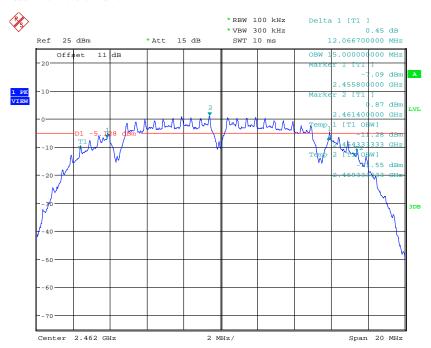


6DB BANDWIDTH 802.11B CH11
Date: 17.MAY.2016 13:21:44




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

Mode B

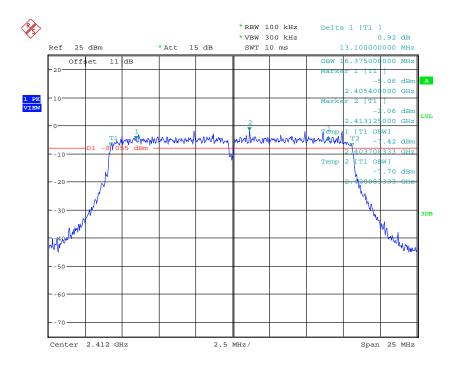

6DB BANDWIDTH 802.11G CH01 Date: 17.MAY.2016 13:22:51

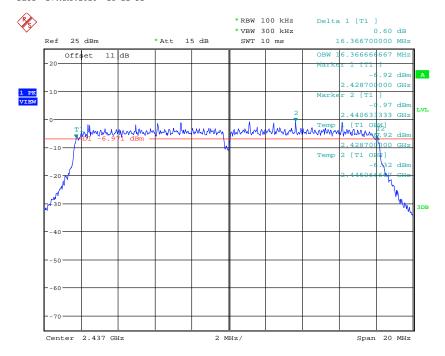


6DB BANDWIDTH 802.11G CH06
Date: 17.MAY.2016 13:23:38




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

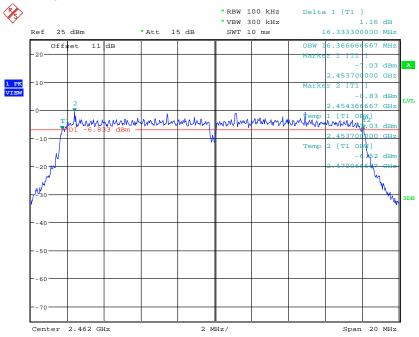

6DB BANDWIDTH 802.11G CH11 Date: 17.MAY.2016 13:24:18

### Mode C

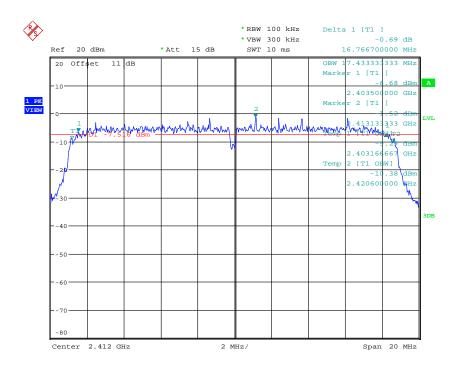


6DB BANDWIDTH 802.11N 20MHZ CH01 Date: 17.MAY.2016 13:25:47




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

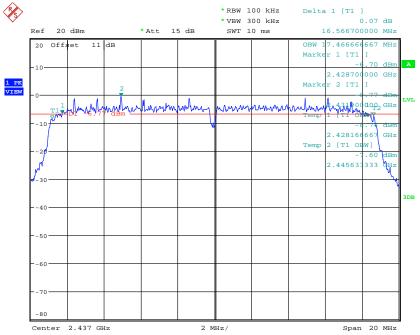

6DB BANDWIDTH 802.11N 20MHZ CH06 Date: 17.MAY.2016 13:26:34

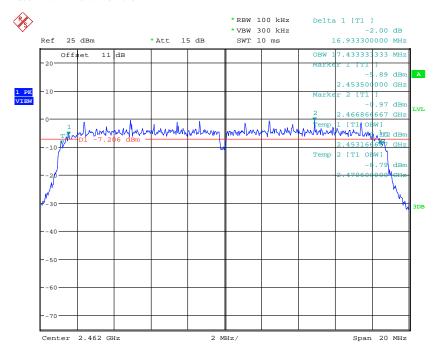

6DB BANDWIDTH 802.11N 20MHZ CH11 Date: 17.MAY.2016 13:27:15



Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

### **Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050

FCC ID: 2ABUR-WIFI-04

## 3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Mode A




POWER DENSITY 802.11B CH01
Date: 17.MAY.2016 13:19:57




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

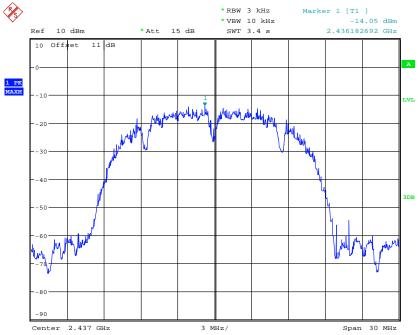

POWER DENSITY 802.11B CH06
Date: 17.MAY.2016 13:20:51

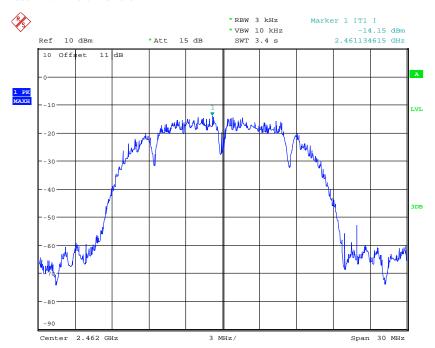


POWER DENSITY 802.11B CH11 Date: 17.MAY.2016 13:21:53




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

#### Mode B

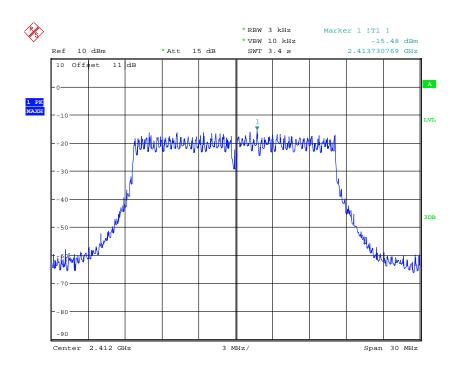


POWER DENSITY 802.11G CH01
Date: 17.MAY.2016 13:23:00

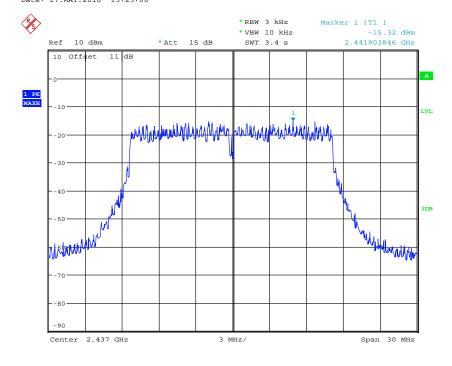

POWER DENSITY 802.11G CH06
Date: 17.MAY.2016 13:23:47


Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

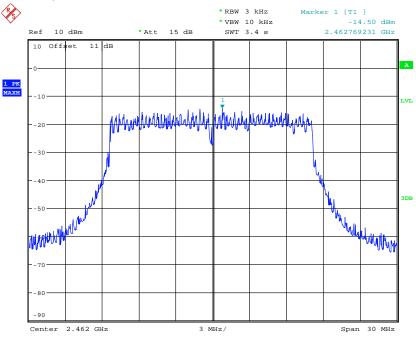

POWER DENSITY 802.11G CH11 Date: 17.MAY.2016 13:24:27

### Mode C

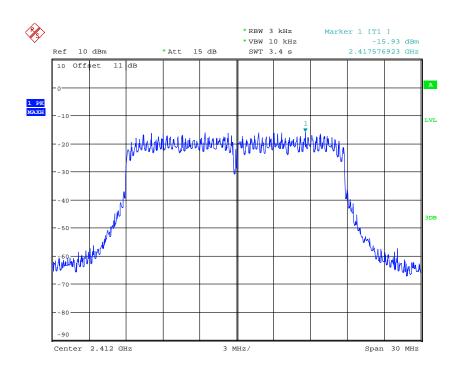


POWER DENSITY 802.11N 20MHZ CH01 Date: 17.MAY.2016 13:25:56




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

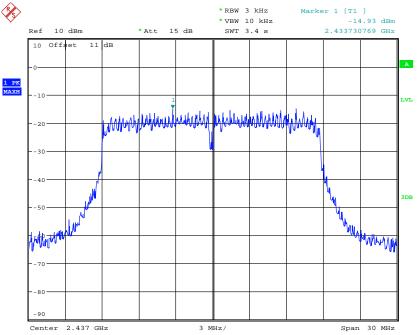

POWER DENSITY 802.11N 20MHZ CH06 Date: 17.MAY.2016 13:26:43

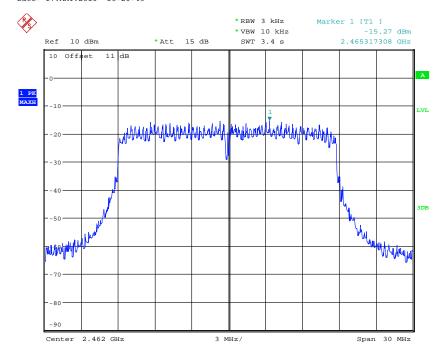

POWER DENSITY 802.11N 20MHZ CH11 Date: 17.MAY.2016 13:27:24



Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

### **Limits:**

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

### 3.9 Radiated Emission from Receiver Part

Model: WiFi-04 Date: --

Mode: -- Temperature: -- °C Engineer: --

Polarization: Horizontal Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

Frequency (MHz)	ding uV) Ave.	Factor (dB) Corr.	(2 @ 3 m V/m) Ave.	Limit (dBu Peak	@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	 		 	-			-	

Polarization: Vertical

	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
									-
Ī									

Frequency (MHz)	ding uV) Ave.	Factor (dB) Corr.	Result (dBu Peak	2 @3m V/m) Ave.	@3m V/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)

#### Note

- 1. Correction Factor = Antenna factor + Cable loss Preamplifier
- 2. The formula of measured value as: Test Result = Reading + Correction Factor
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty for 3m measurement: 30-1000 MHz =  $\pm 4.69$  dB, 1-18 GHz =  $\pm 4.78$  dB, 18-40 GHz=  $\pm 2.44$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
- 6. See attached diagrams in appendix.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018

Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

#### 3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model:	WiFi-04	Date	e:					
Mode:		Tem	perature:		°C	Eng	gineer:	
Polarization:		Hu	ımidity:		%			
Frequency	Read	ding	Factor	Re	sult	Liı	nit	Margin
	(dB	uV)	(dB)	(dB	uV)	(dB	uV)	
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)
		1		1	1		I	

Polarization	on: -
--------------	-------

Frequency	Reading (dBuV)		Factor Result (dBuV)		Liı (dB	nit uV)	Margin	
(MHz)	QP	Ave.	Corr.	QP	Ave.	QP	Ave.	(dB)

Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor

- 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
- 3. Detector function in the form: PK = Peak, QP = Quasi Peak, AV = Average
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.
- 5. Measurement uncertainty =  $\pm 1.14$  dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.
- 7. This test is not required.

#### **Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)				
	Quasi Peak	Average			
0.15-0.5	66 to 56	56 to 46			
0.5-5	56	46			
5-30	60	50			

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045

Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

## **Appendix**

### A. Photos

- 1. EUT Photos
- 2. Set Up Photo of Radiated Emission


### **B.** Measurement diagrams

**Radiated Emission** 



Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04


### **EUT Photos**

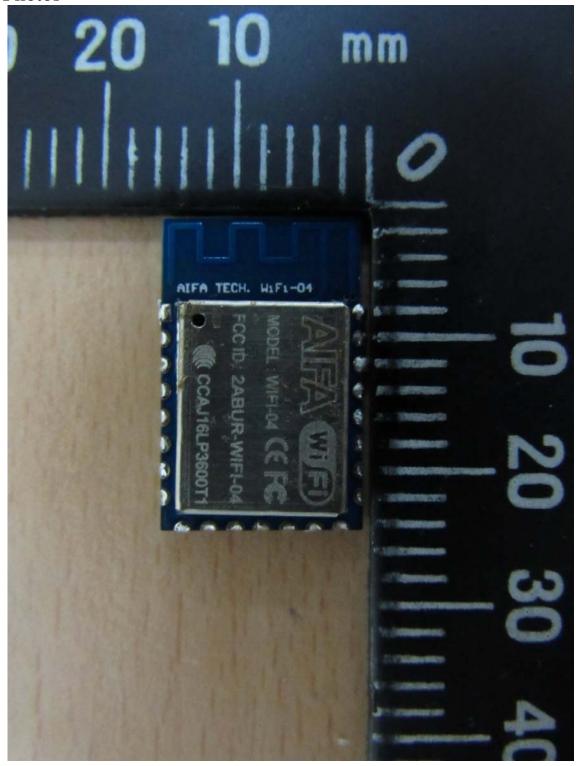




Registration number: W6M21601-15579-C-1

FCC ID: 2ABUR-WIFI-04

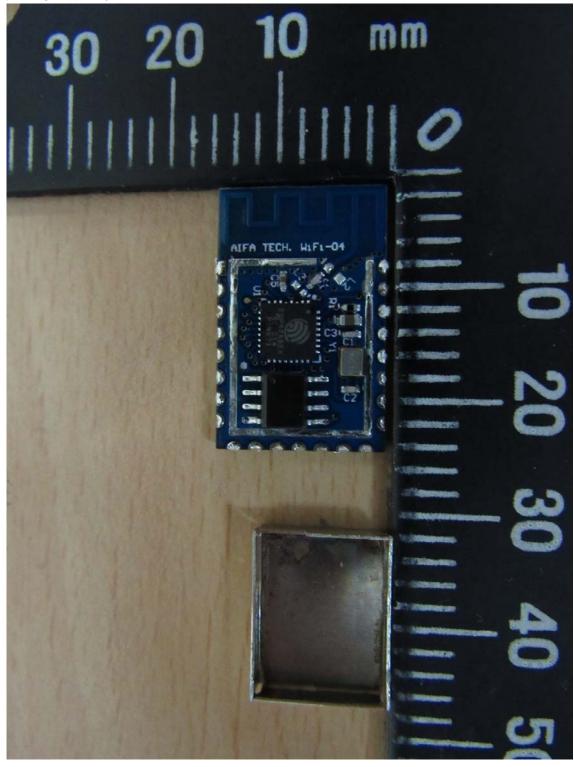




Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

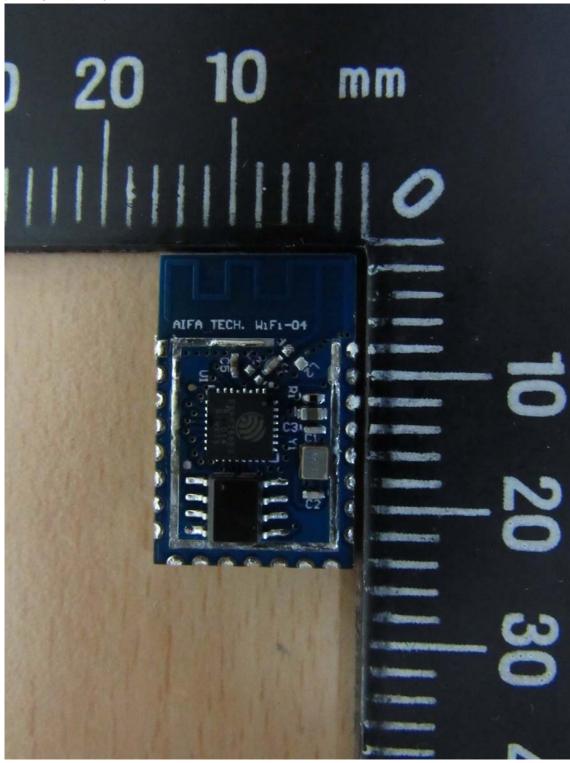



Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

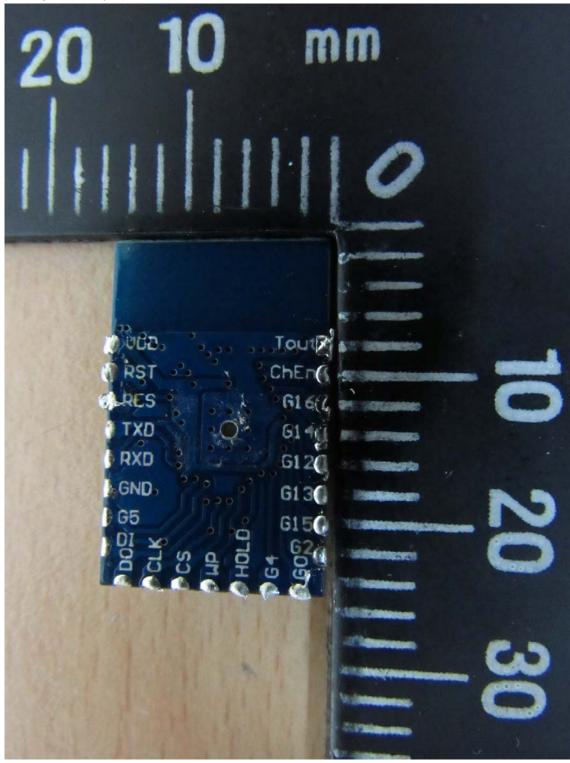



Registration number: W6M21601-15579-C-1 FCC ID: 2ABUR-WIFI-04

Set Up Photo of Radiated Emission








Measurement diagrams

Spurious Emission Radiated \_TX



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

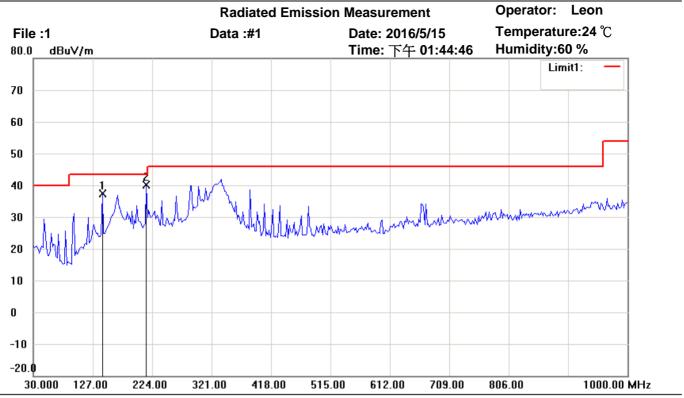

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.30	peak	-6.97	37.33	43.50	100	75	-6.17	
*	214.6692	49.92	peak	-9.73	40.19	43.50	100	90	-3.31	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

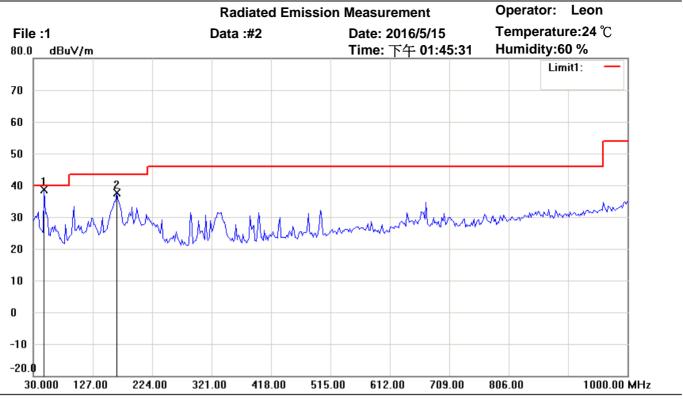

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.81	peak	-9.26	38.55	40.00	100	355	-1.45	
	166.0721	47.04	peak	-9.52	37.52	43.50	100	120	-5.98	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

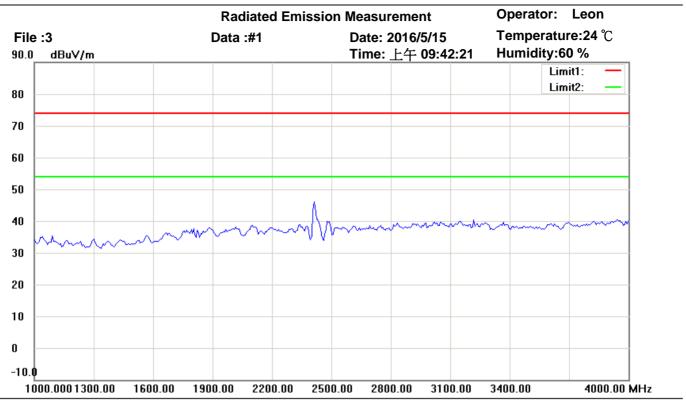

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

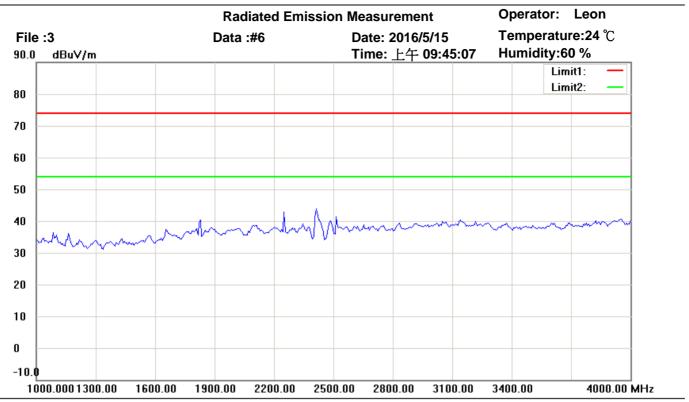

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

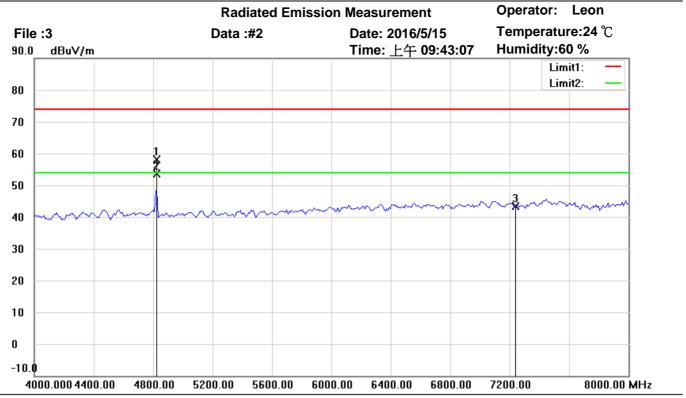

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4825.651	58.67	peak	-0.56	58.11	74.00	185	303	-15.89	
*	4825.651	54.23	AVG	-0.56	53.67	54.00	185	303	-0.33	
	7236.000	39.00	AVG	4.29	43.29	54.00	100	240	-10.71	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

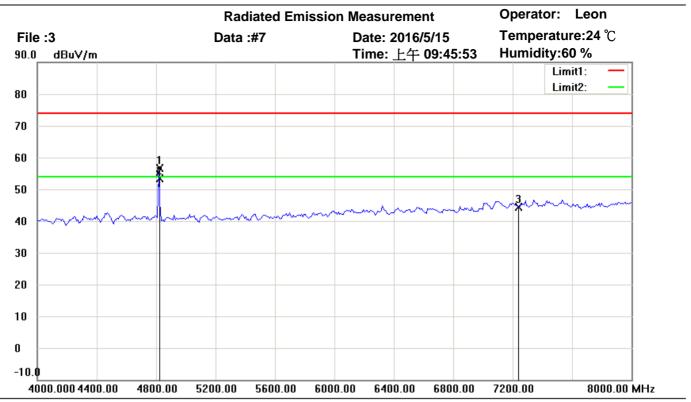

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4823.829	57.21	peak	-0.57	56.64	74.00	275	273	-17.36	
*	4823.829	53.96	AVG	-0.57	53.39	54.00	275	273	-0.61	
	7236.000	40.20	peak	4.29	44.49	74.00	100	155	-29.51	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

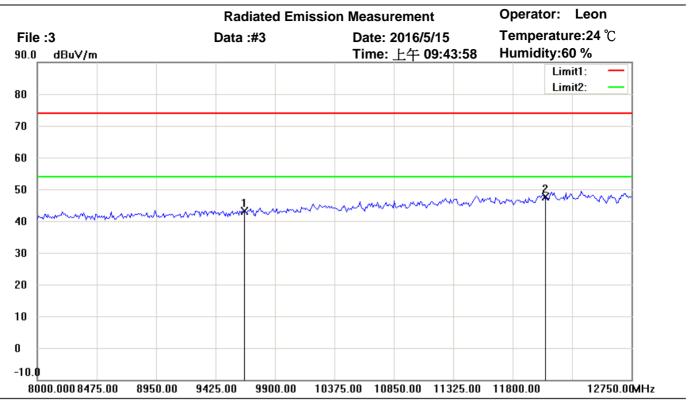

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.50	peak	7.51	43.01	74.00	100	75	-30.99	
*	12060.000	34.39	peak	13.18	47.57	74.00	100	90	-26.43	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

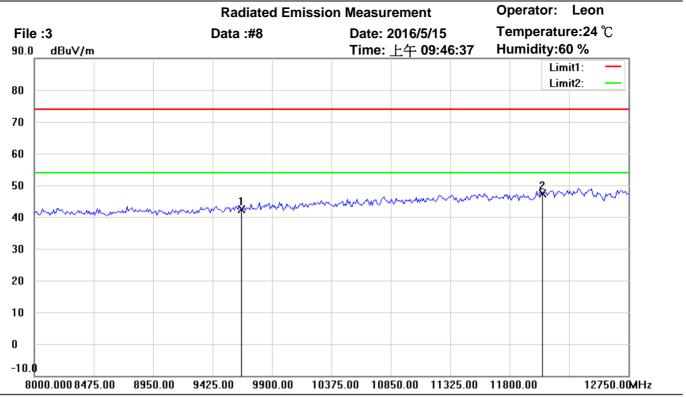

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.77	peak	7.51	42.28	74.00	100	85	-31.72	
*	12060.000	34.17	peak	13.18	47.35	74.00	100	230	-26.65	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

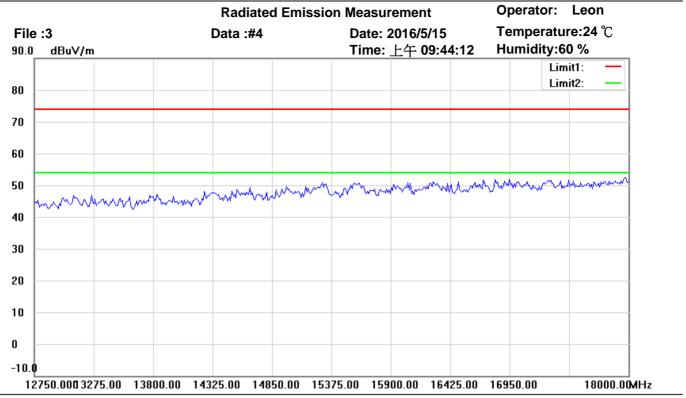

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

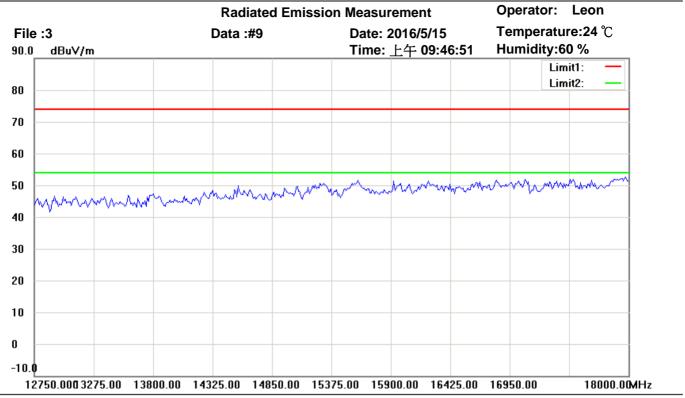

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

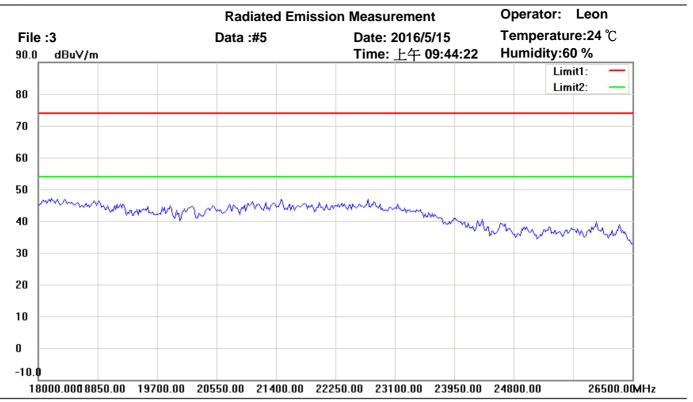

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

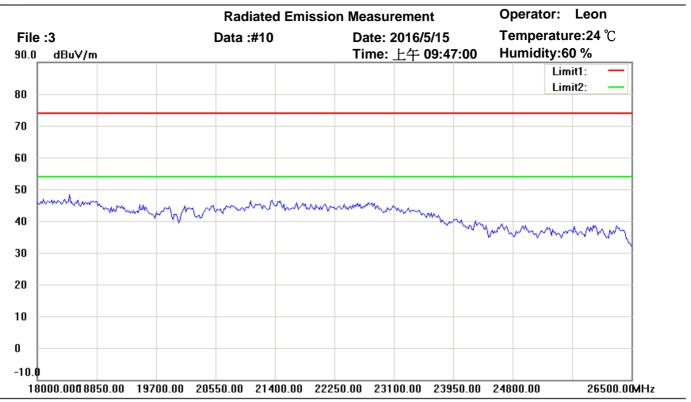

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

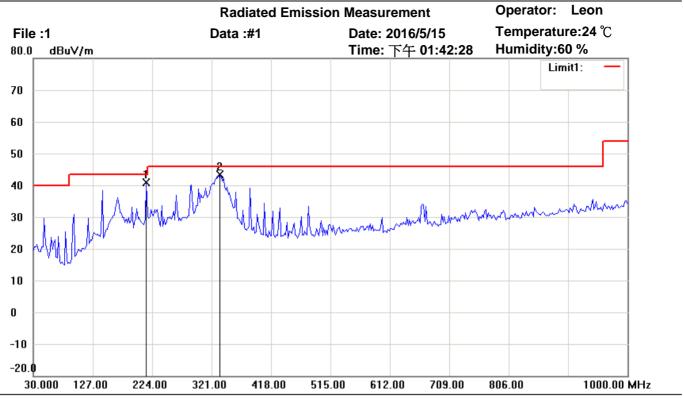

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	214.6692	50.63	peak	-9.73	40.90	43.50	100	60	-2.60	
	335.1904	48.16	peak	-4.87	43.29	46.00	100	50	-2.71	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

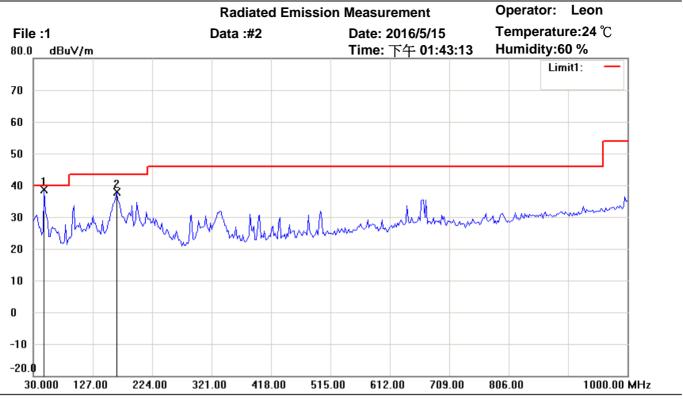

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.95	peak	-9.26	38.69	40.00	100	75	-1.31	
	166.0721	47.35	peak	-9.52	37.83	43.50	100	90	-5.67	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

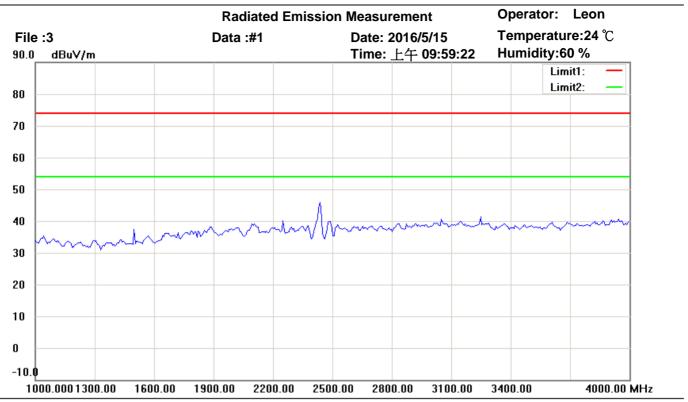

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

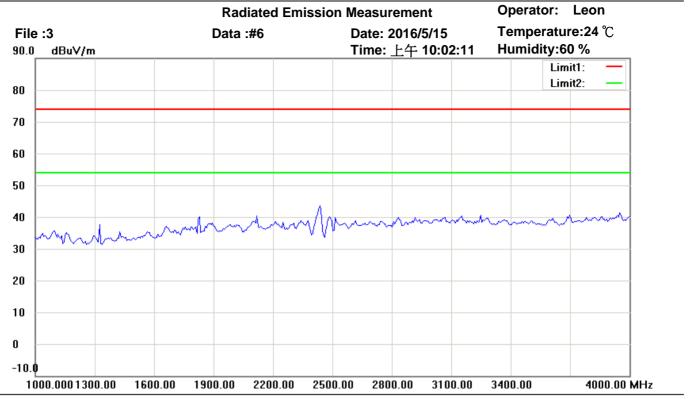

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

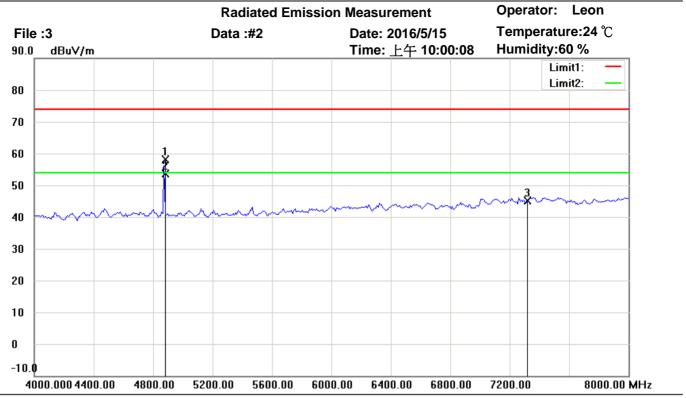

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	58.63	peak	-0.50	58.13	74.00	190	310	-15.87	
*	4873.748	54.16	AVG	-0.50	53.66	54.00	109	310	-0.34	
	7311.000	40.59	peak	4.43	45.02	74.00	100	175	-28.98	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

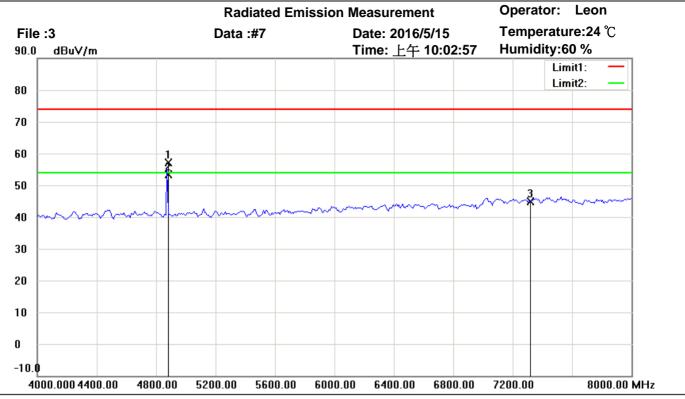

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	57.69	peak	-0.50	57.19	74.00	250	195	-16.81	
*	4873.748	53.79	AVG	-0.50	53.29	54.00	250	195	-0.71	
	7311.000	40.50	peak	4.43	44.93	74.00	100	270	-29.07	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

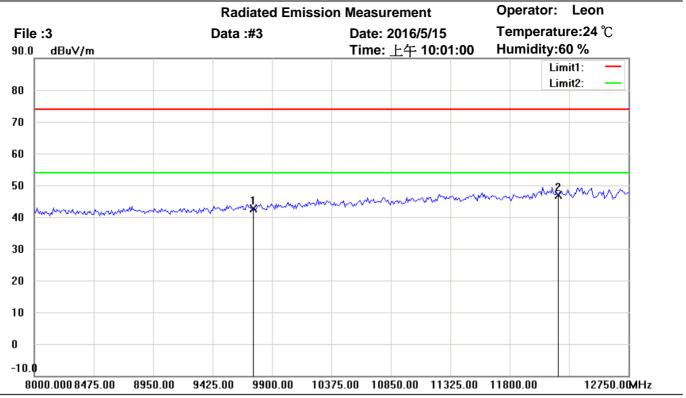

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.20	peak	7.49	42.69	74.00	100	245	-31.31	
*	12185.000	33.14	peak	13.82	46.96	74.00	100	170	-27.04	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

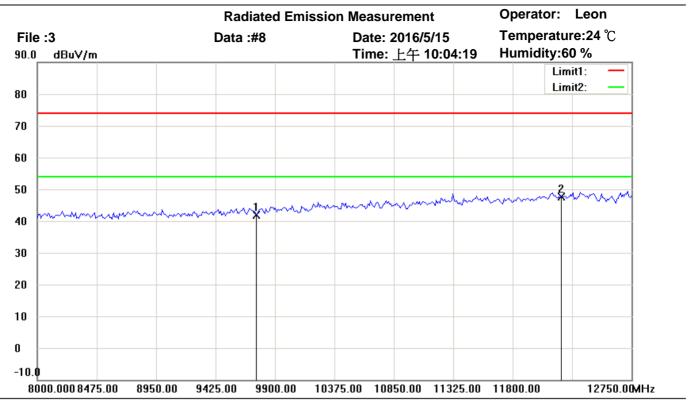

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.50	peak	7.49	41.99	74.00	100	285	-32.01	
*	12185.000	33.72	peak	13.82	47.54	74.00	100	50	-26.46	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

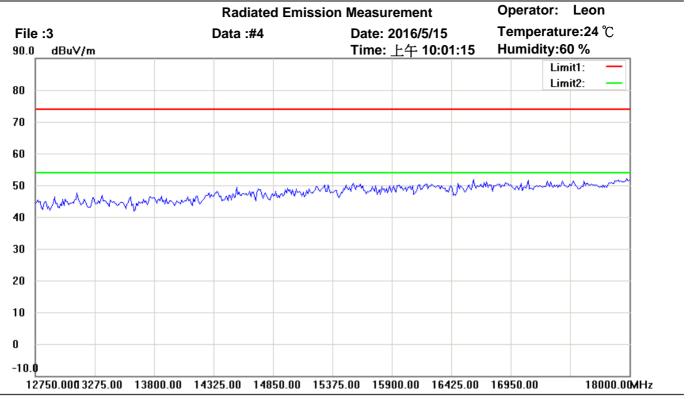

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

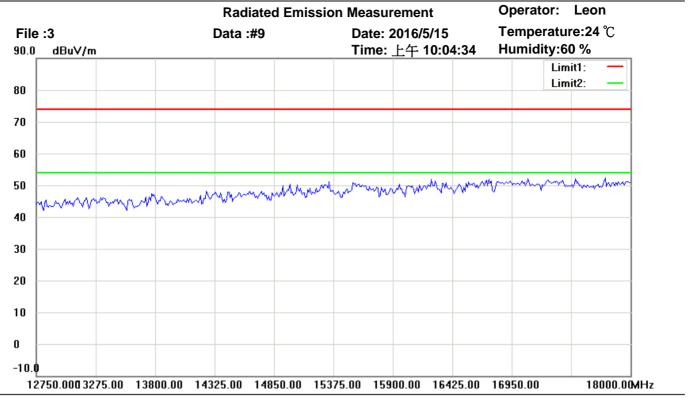

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

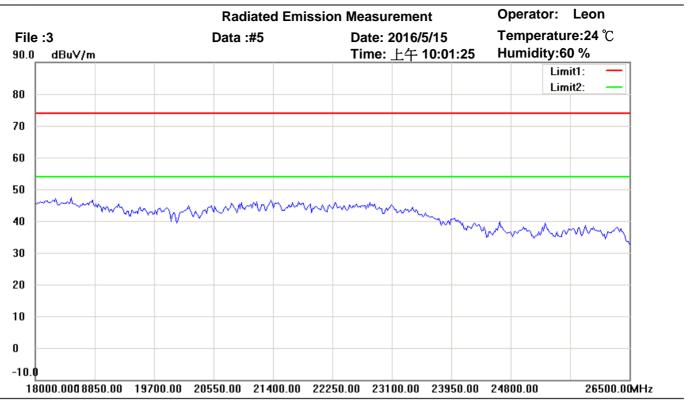

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

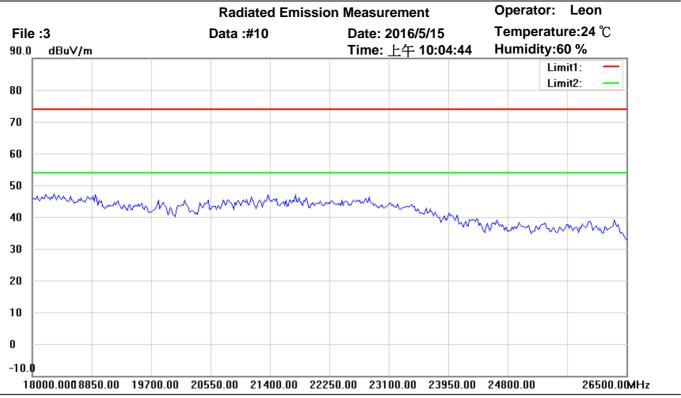

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

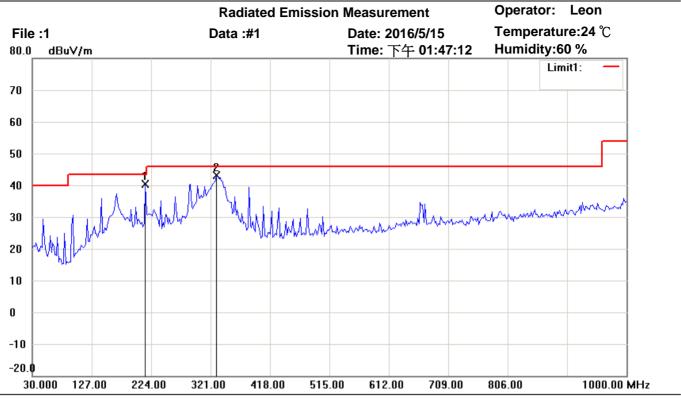

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	214.6692	49.99	peak	-9.73	40.26	43.50	100	25	-3.24	
*	331.3025	48.05	peak	-4.95	43.10	46.00	100	60	-2.90	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

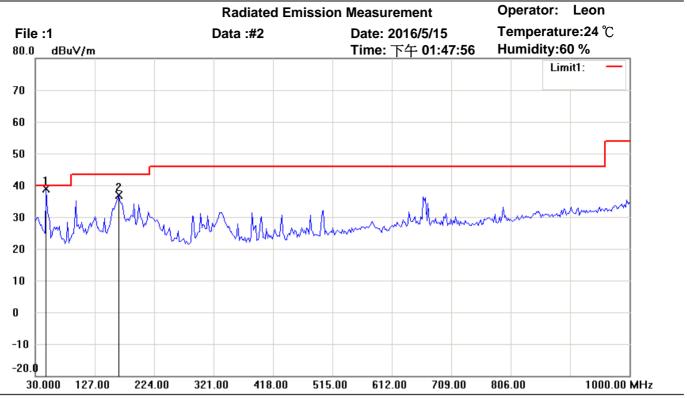

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	48.05	peak	-9.26	38.79	40.00	100	125	-1.21	
	166.0721	46.51	peak	-9.52	36.99	43.50	100	70	-6.51	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

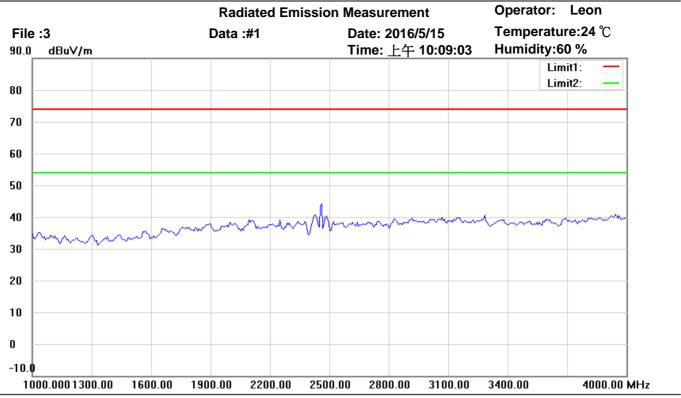

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

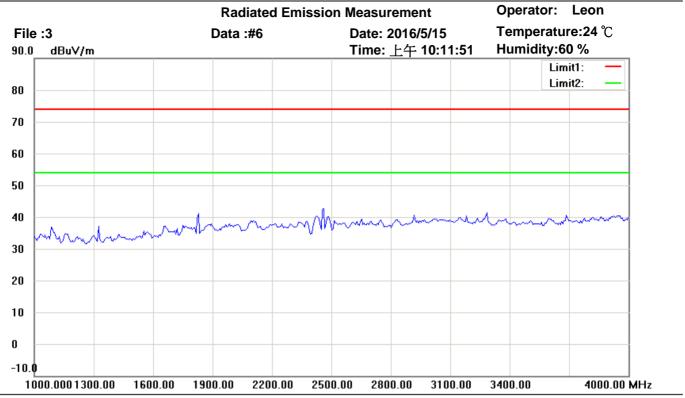

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

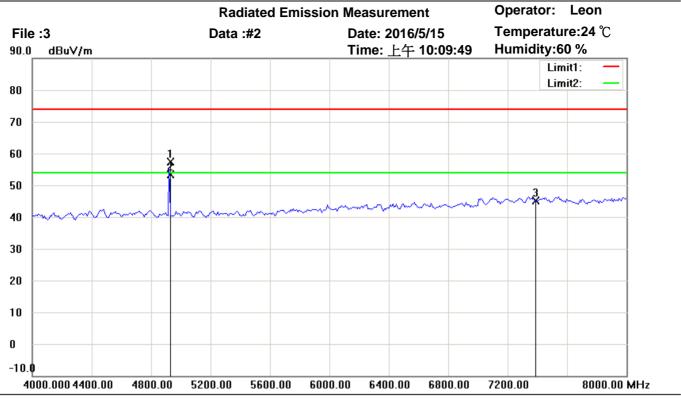

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	57.65	peak	-0.34	57.31	74.00	175	298	-16.69	
*	4921.844	53.63	AVG	-0.34	53.29	54.00	175	298	-0.71	
	7386.000	40.09	peak	4.93	45.02	74.00	100	240	-28.98	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

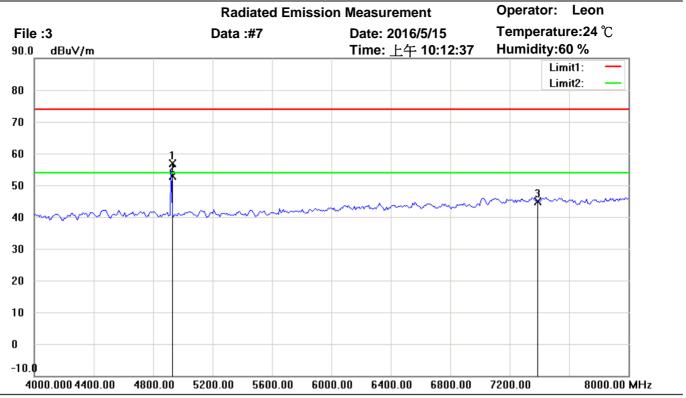

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	57.12	peak	-0.34	56.78	74.00	250	193	-17.22	
*	4921.844	53.16	AVG	-0.34	52.82	54.00	250	193	-1.18	
	7386.000	39.95	peak	4.93	44.88	74.00	100	140	-29.12	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

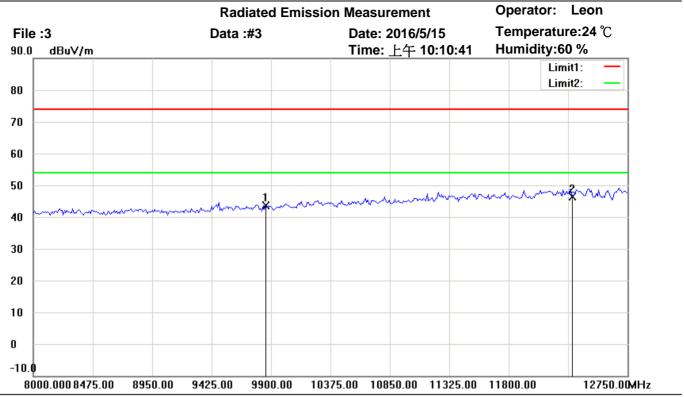

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	36.04	peak	7.68	43.72	74.00	100	245	-30.28	
*	12310.000	33.19	peak	13.25	46.44	74.00	100	190	-27.56	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

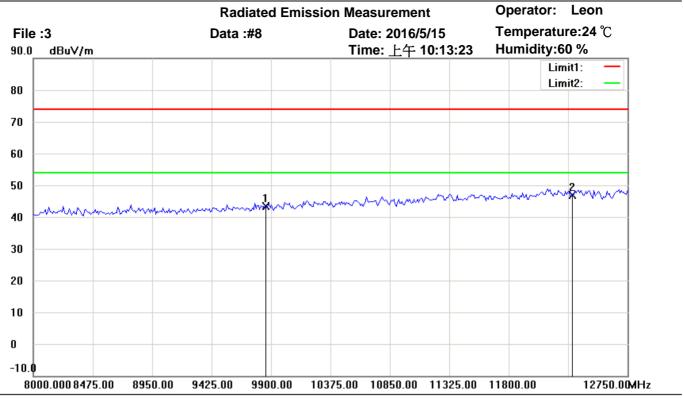

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.65	peak	7.68	43.33	74.00	100	155	-30.67	
*	12310.000	33.70	peak	13.25	46.95	74.00	100	90	-27.05	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

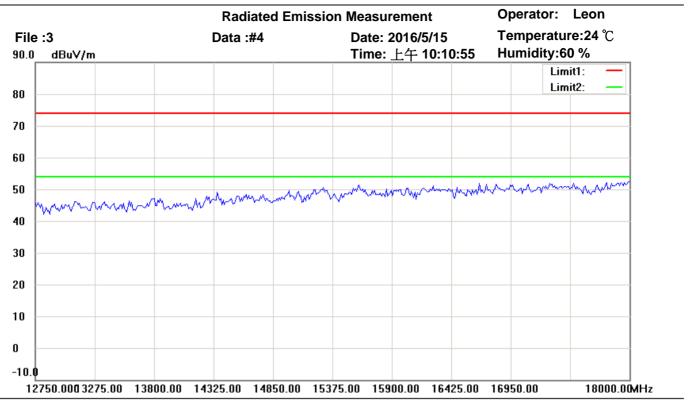

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

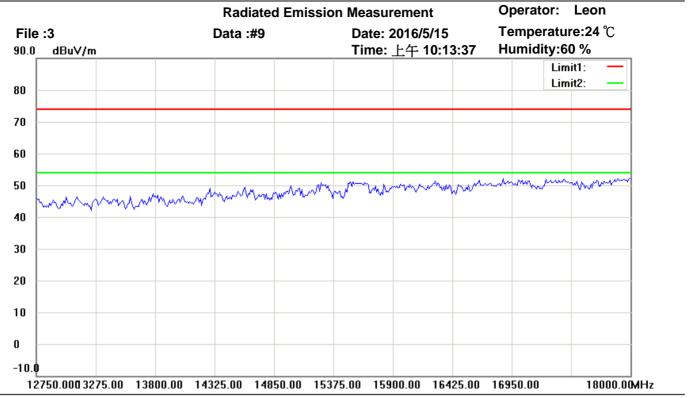

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

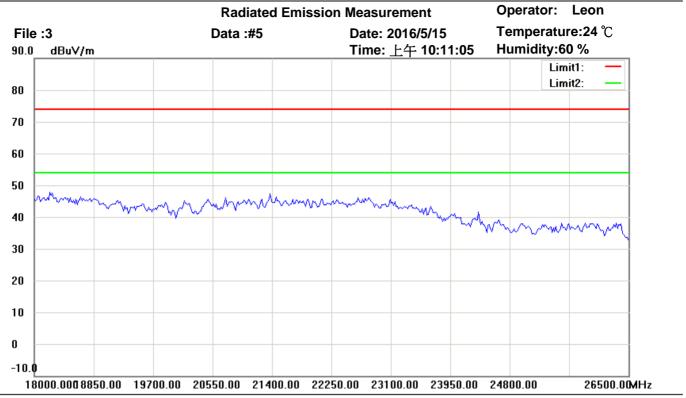

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

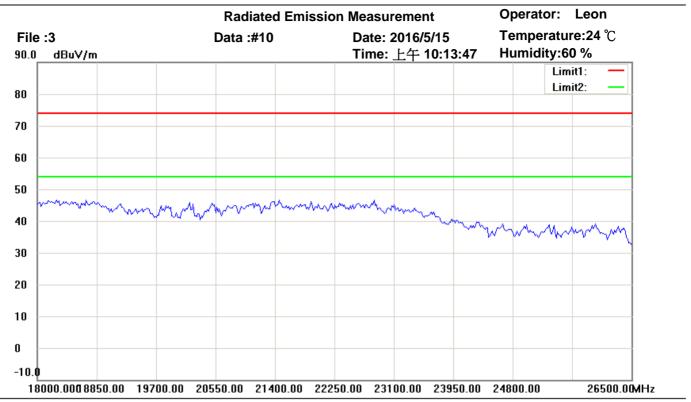

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

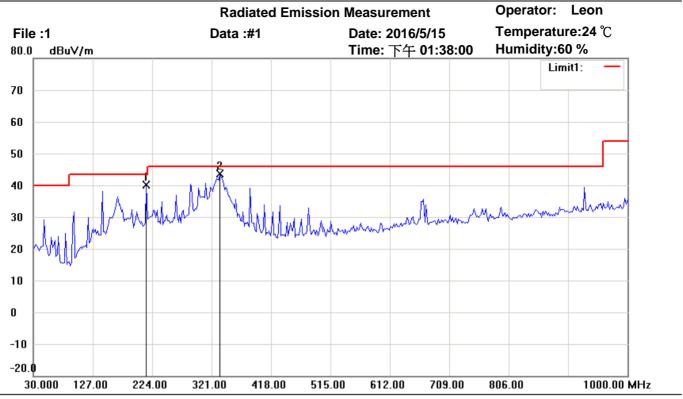

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	214.6692	49.85	peak	-9.73	40.12	43.50	100	70	-3.38	
*	335.1904	48.40	peak	-4.87	43.53	46.00	100	55	-2.47	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

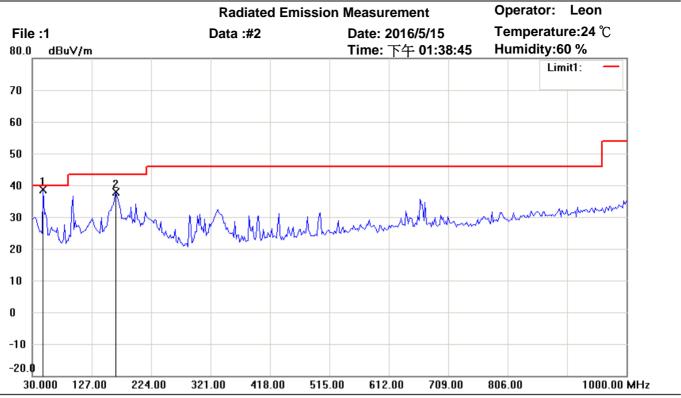

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.81	peak	-9.26	38.55	40.00	100	75	-1.45	
	166.0721	47.33	peak	-9.52	37.81	43.50	100	103	-5.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

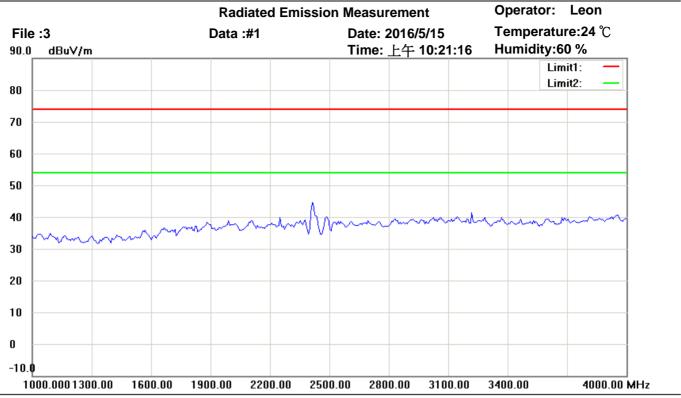

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

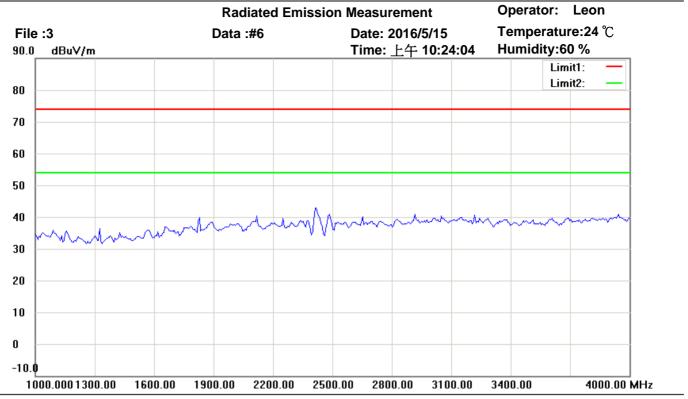

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

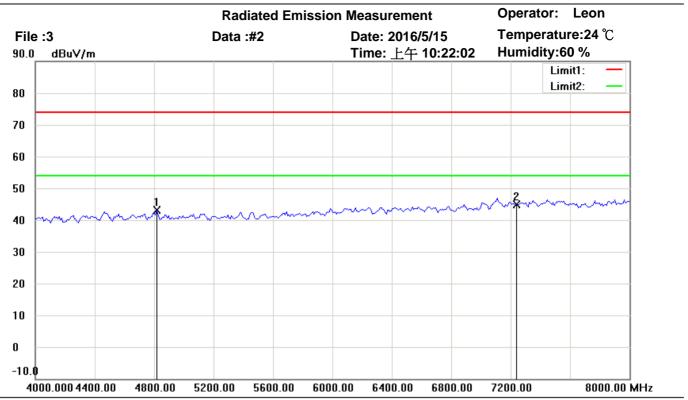

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4817.635	43.79	peak	-0.58	43.21	74.00	100	75	-30.79	
*	7236.000	40.51	peak	4.29	44.80	74.00	100	120	-29.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

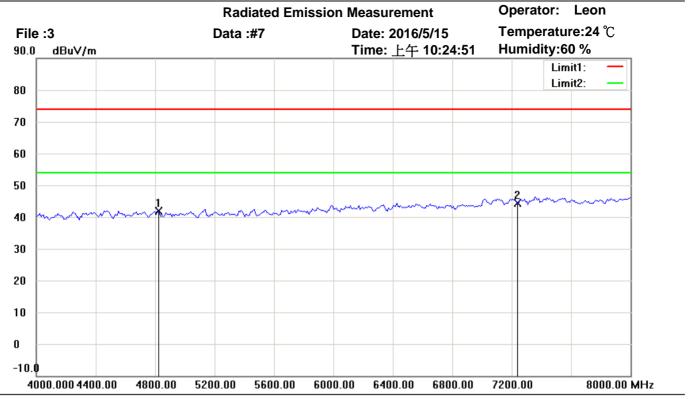

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	42.50	peak	-0.57	41.93	74.00	100	180	-32.07	
*	7236.000	40.09	peak	4.29	44.38	74.00	100	55	-29.62	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

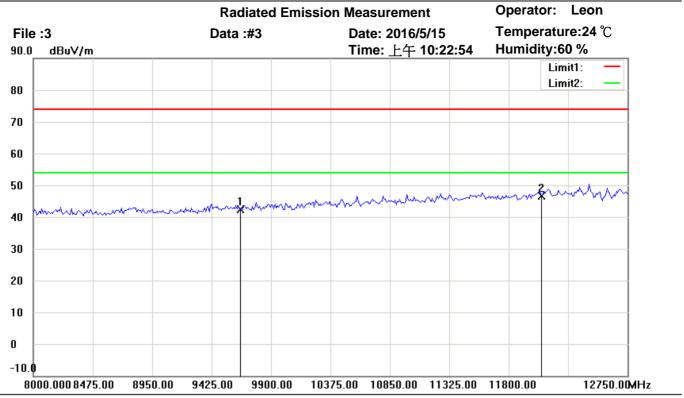

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.92	peak	7.51	42.43	74.00	100	220	-31.57	
*	12060.000	33.34	peak	13.18	46.52	74.00	100	160	-27.48	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

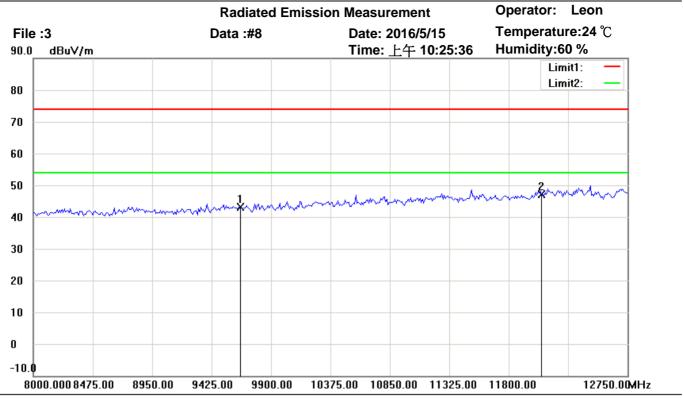

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.58	peak	7.51	43.09	74.00	100	135	-30.91	
*	12060.000	33.93	peak	13.18	47.11	74.00	100	80	-26.89	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

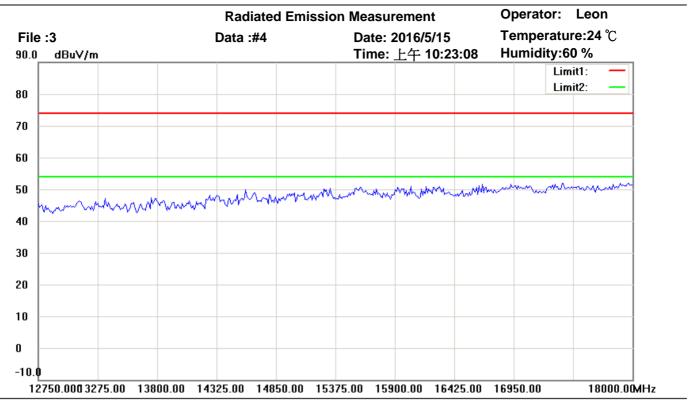

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

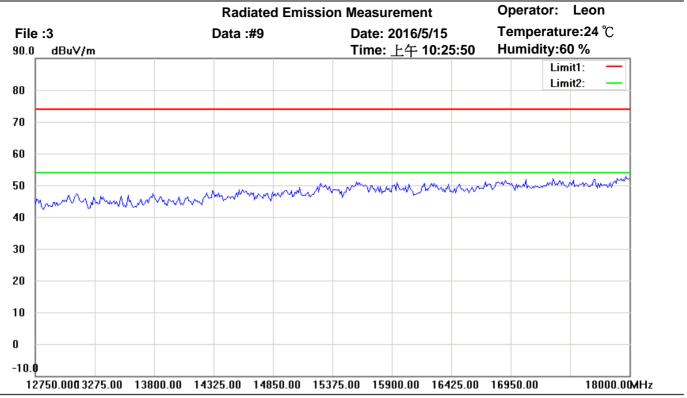

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

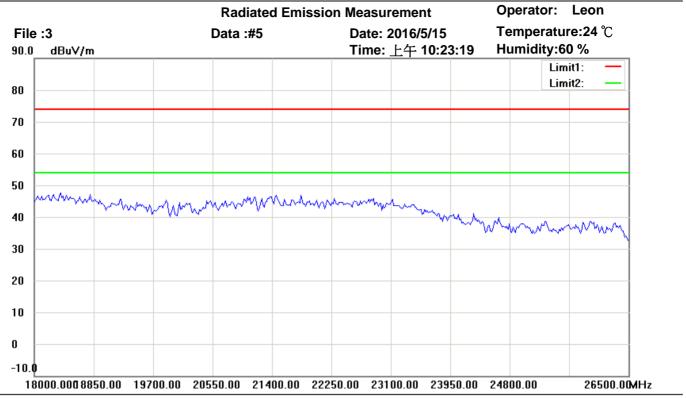

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

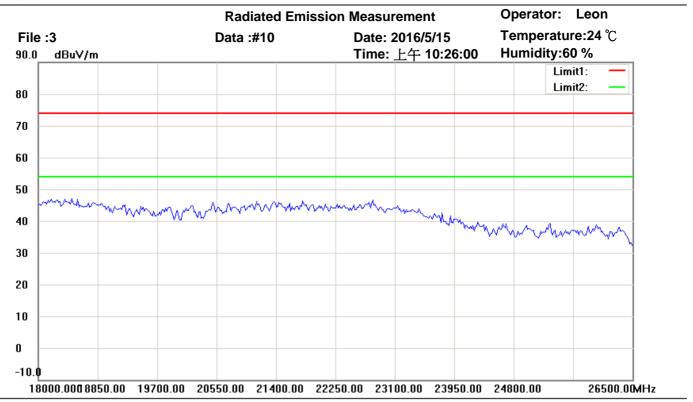

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

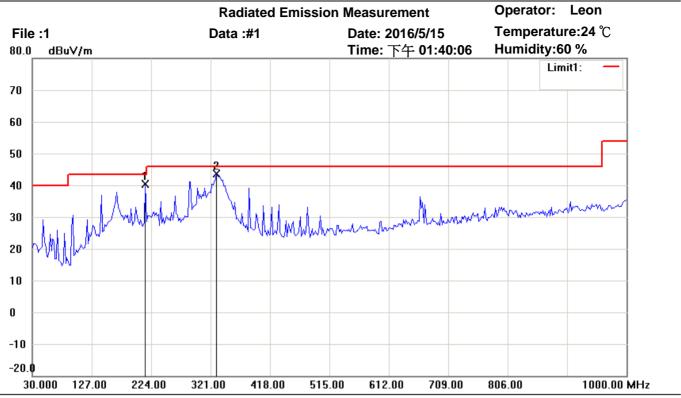

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	214.6692	50.09	peak	-9.73	40.36	43.50	100	190	-3.14	
*	331.3025	48.46	peak	-4.95	43.51	46.00	100	210	-2.49	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

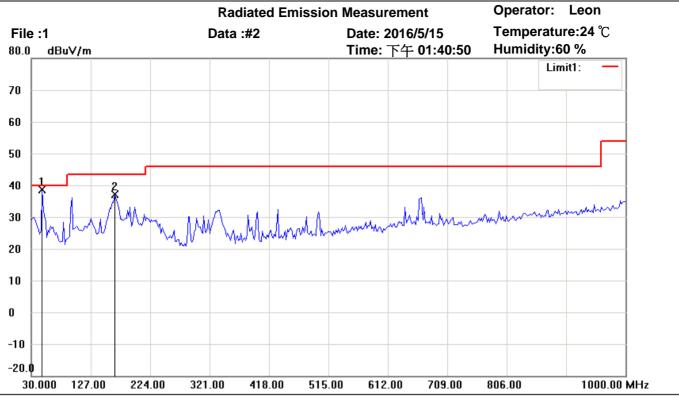

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.96	peak	-9.26	38.70	40.00	100	35	-1.30	
	166.0721	46.62	peak	-9.52	37.10	43.50	100	120	-6.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

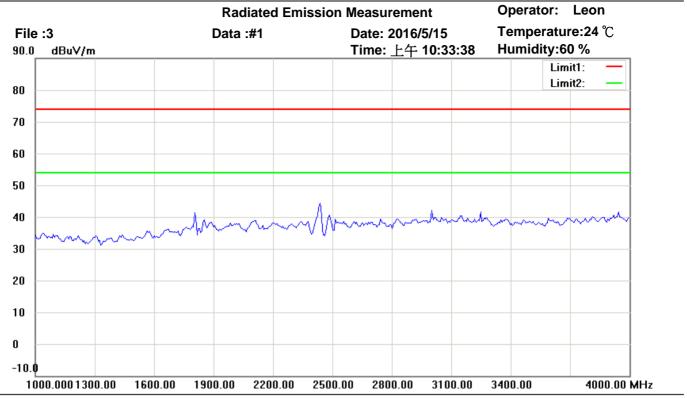

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

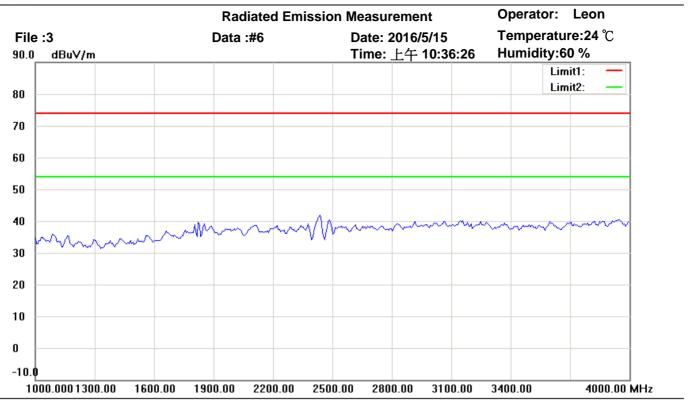

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

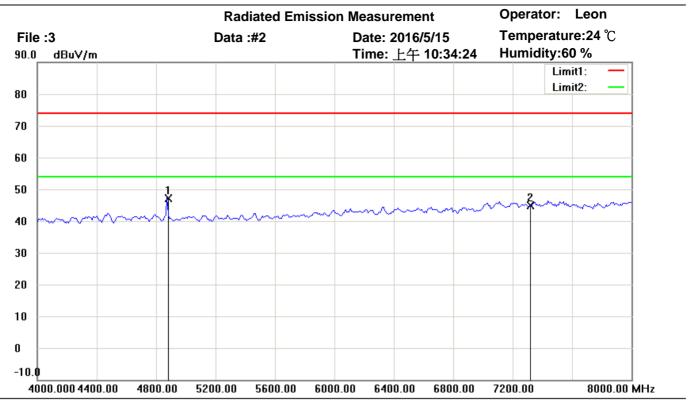

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4873.748	47.53	peak	-0.50	47.03	74.00	160	245	-26.97	
	7311.000	40.35	peak	4.43	44.78	74.00	100	85	-29.22	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

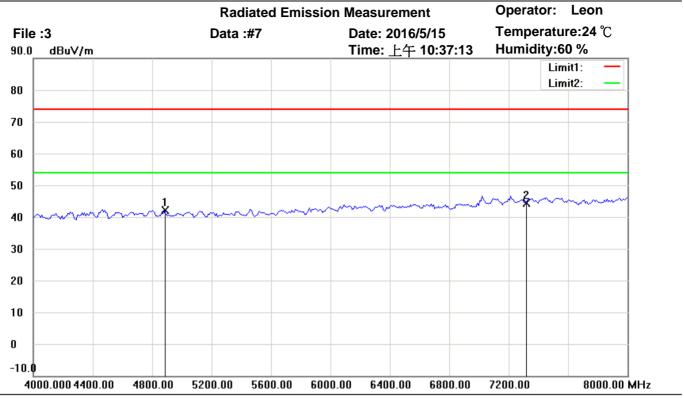

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	42.65	peak	-0.49	42.16	74.00	100	170	-31.84	
*	7311.000	40.07	peak	4.43	44.50	74.00	100	85	-29.50	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

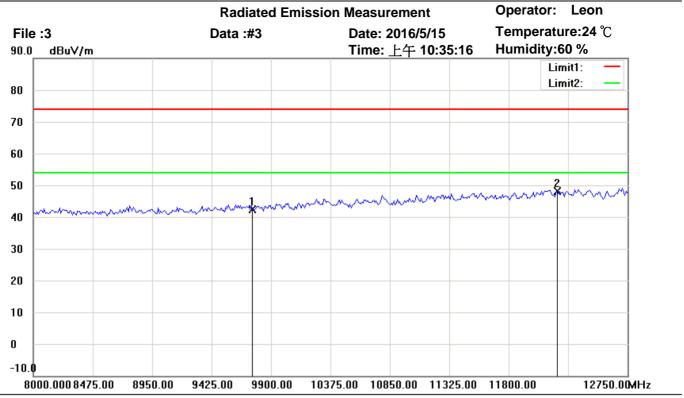

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.81	peak	7.49	42.30	74.00	100	155	-31.70	
*	12185.000	34.23	peak	13.82	48.05	74.00	100	90	-25.95	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

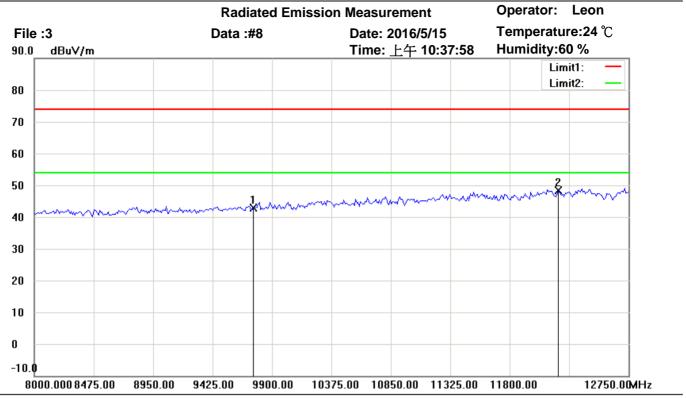

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.45	peak	7.49	42.94	74.00	100	250	-31.06	
*	12185.000	34.45	peak	13.82	48.27	74.00	100	190	-25.73	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

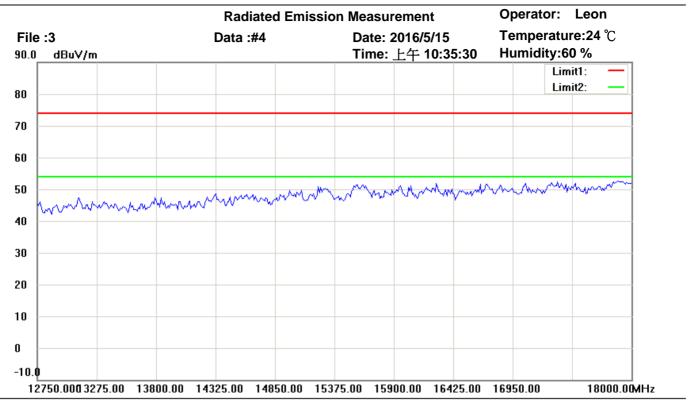

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

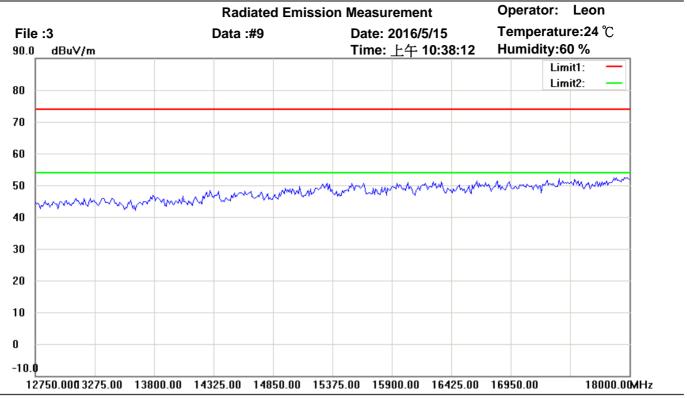

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

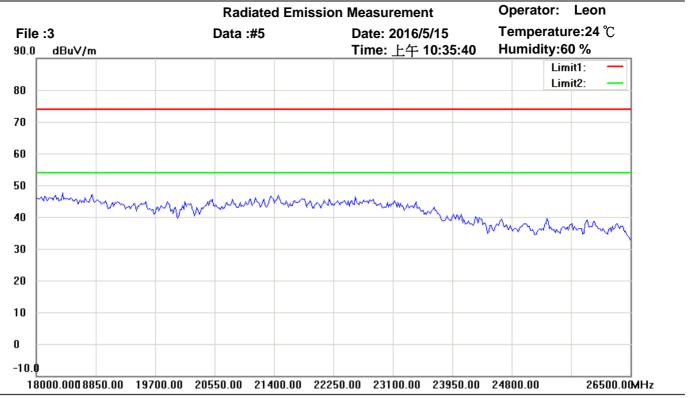

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

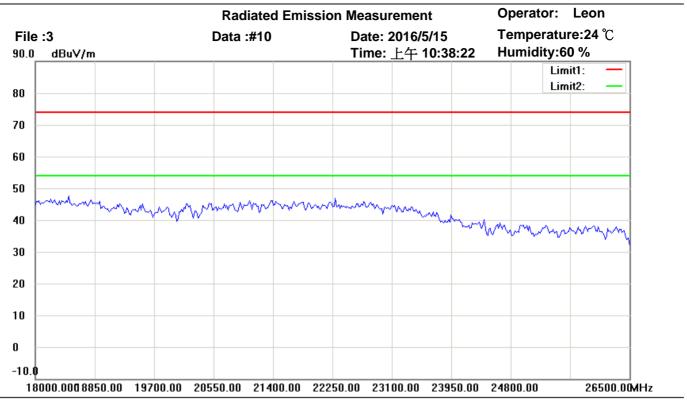

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

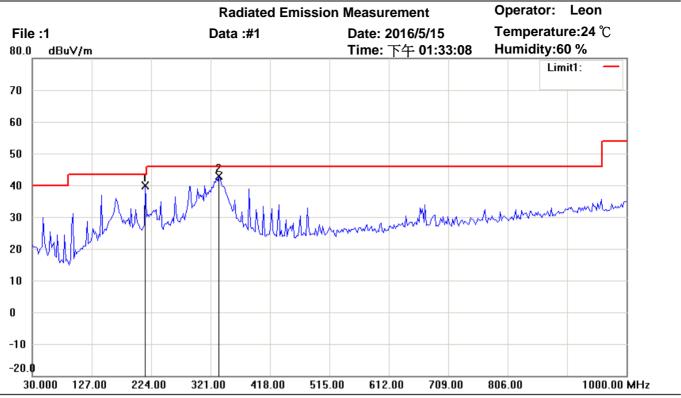

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	214.6692	49.58	peak	-9.73	39.85	43.50	100	10	-3.65	
*	335.1904	47.74	peak	-4.87	42.87	46.00	100	35	-3.13	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

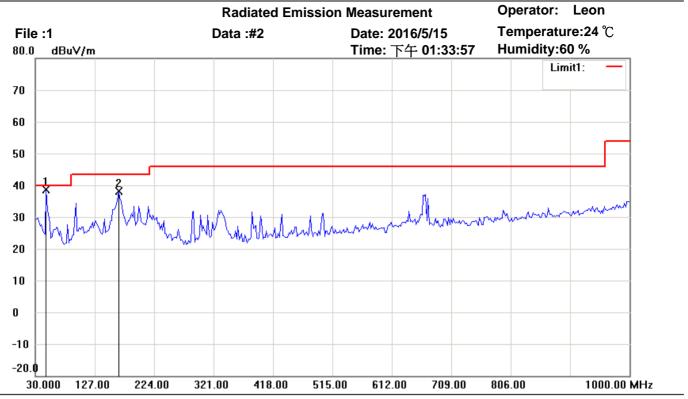

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.82	peak	-9.26	38.56	40.00	100	95	-1.44	
	166.0721	47.53	peak	-9.52	38.01	43.50	100	60	-5.49	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

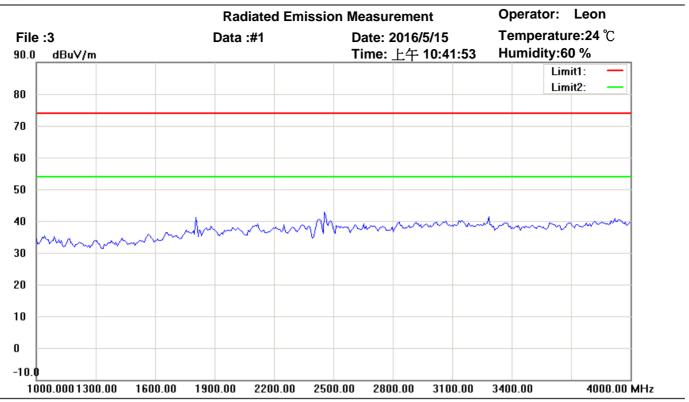

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

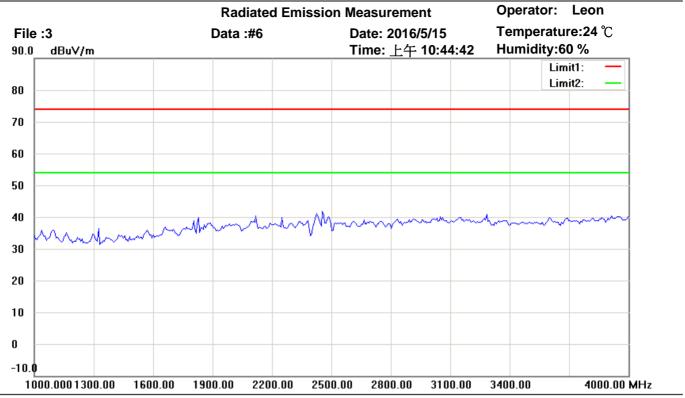

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

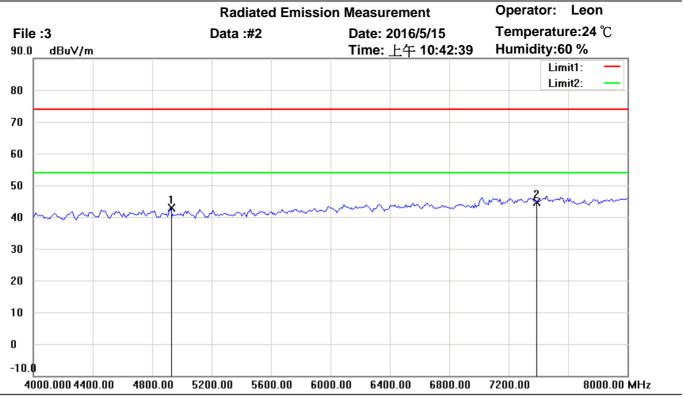

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	43.18	peak	-0.34	42.84	74.00	100	130	-31.16	
*	7386.000	39.75	peak	4.93	44.68	74.00	100	95	-29.32	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

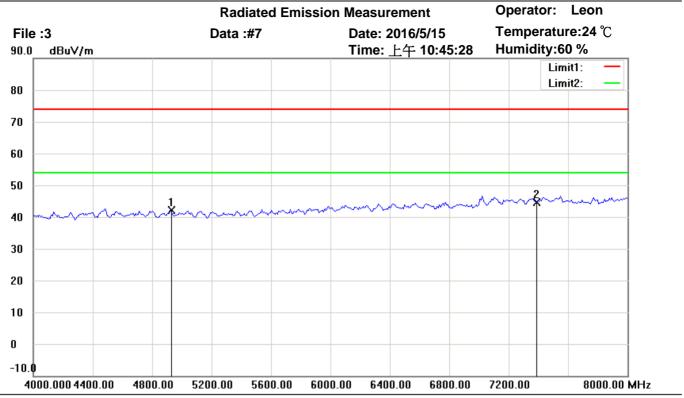

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	42.52	peak	-0.34	42.18	74.00	100	160	-31.82	
*	7386.000	39.58	peak	4.93	44.51	74.00	100	245	-29.49	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

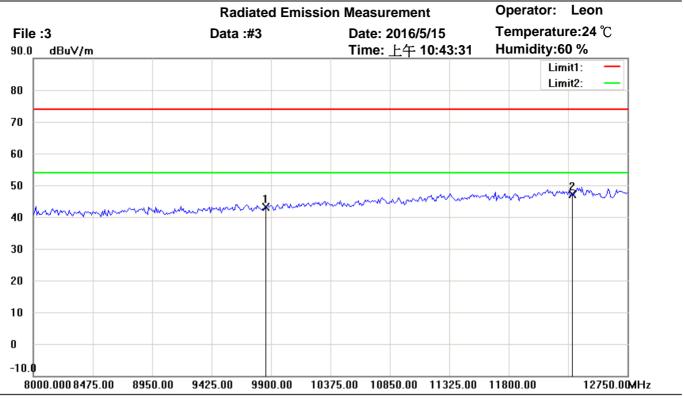

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.34	peak	7.68	43.02	74.00	100	55	-30.98	
*	12310.000	33.76	peak	13.25	47.01	74.00	100	170	-26.99	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

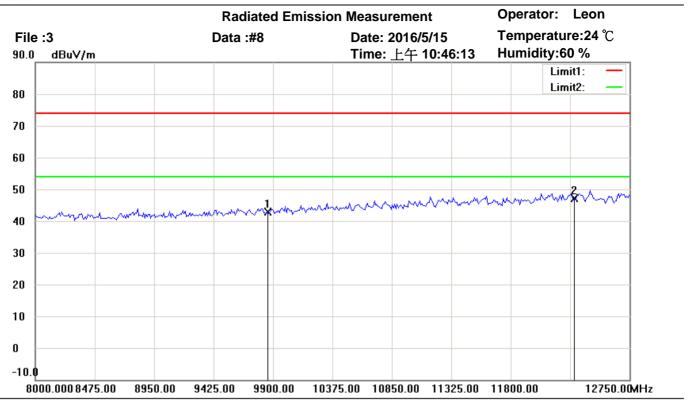

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.24	peak	7.68	42.92	74.00	100	270	-31.08	
*	12310.000	33.94	peak	13.25	47.19	74.00	100	80	-26.81	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

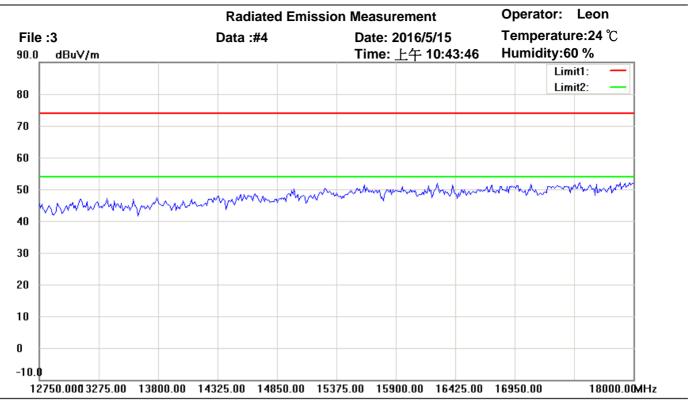

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

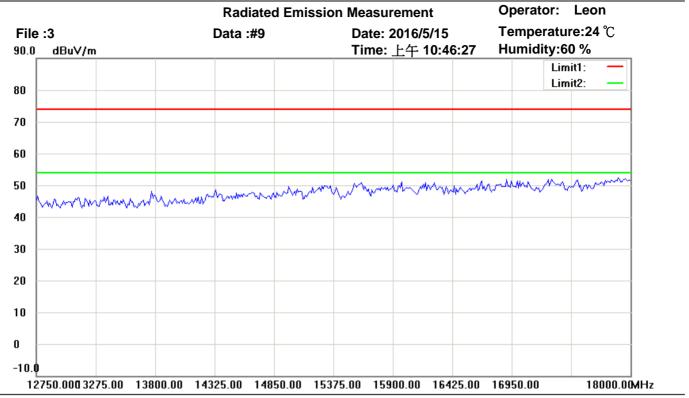

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

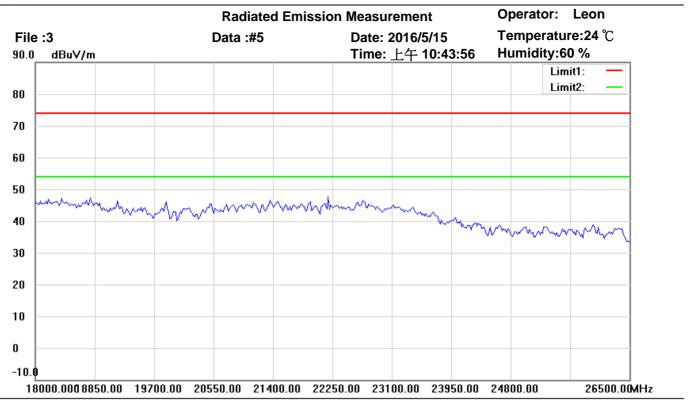

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

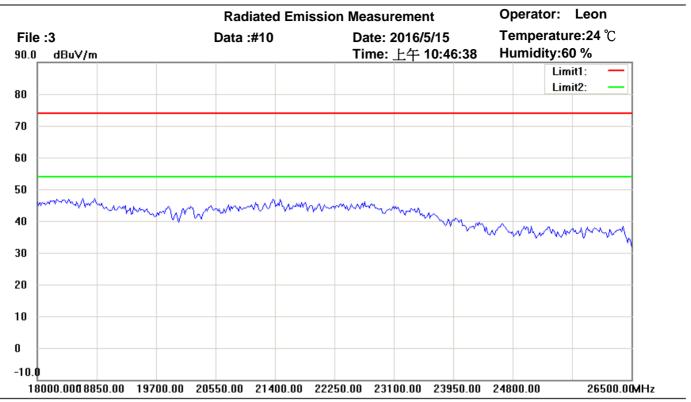

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

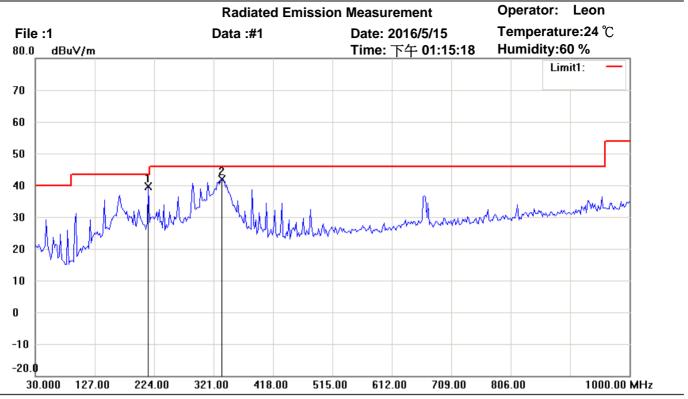

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	214.6692	49.43	peak	-9.73	39.70	43.50	100	110	-3.80	
	335.1904	46.87	peak	-4.87	42.00	46.00	100	35	-4.00	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

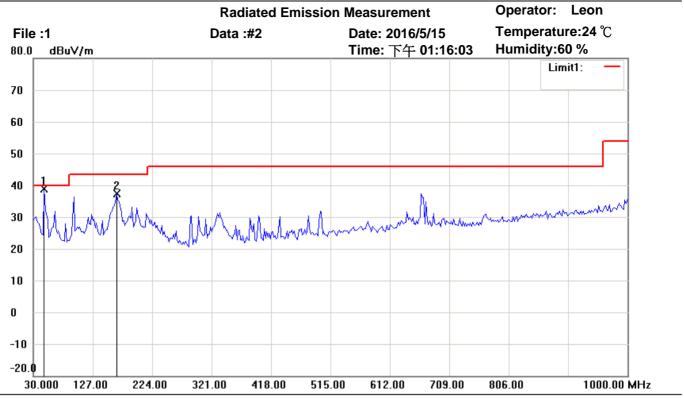

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	48.03	peak	-9.26	38.77	40.00	100	75	-1.23	
	166.0721	46.80	peak	-9.52	37.28	43.50	100	135	-6.22	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

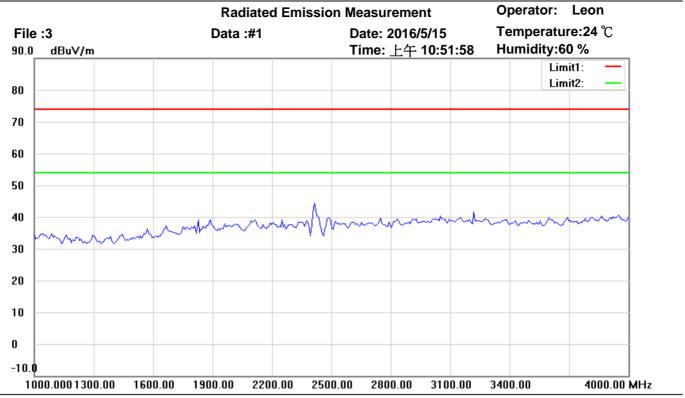

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

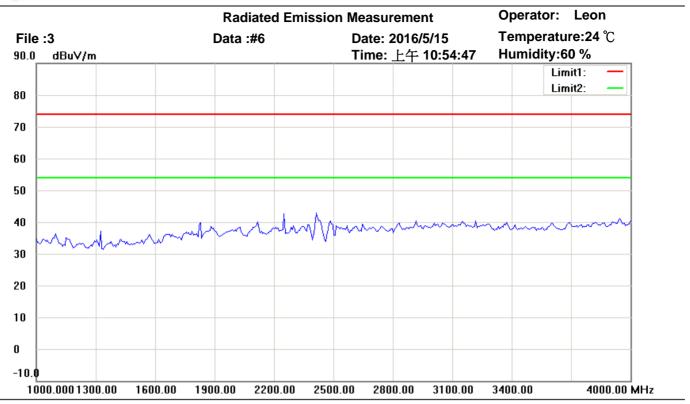

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

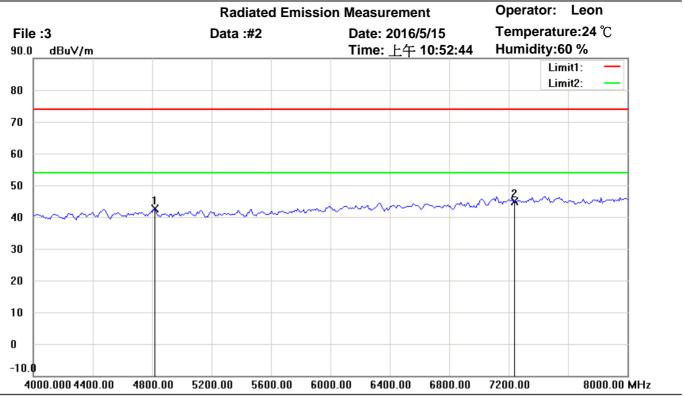

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4817.635	43.11	peak	-0.58	42.53	74.00	100	160	-31.47	
*	7236.000	40.54	peak	4.29	44.83	74.00	100	195	-29.17	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

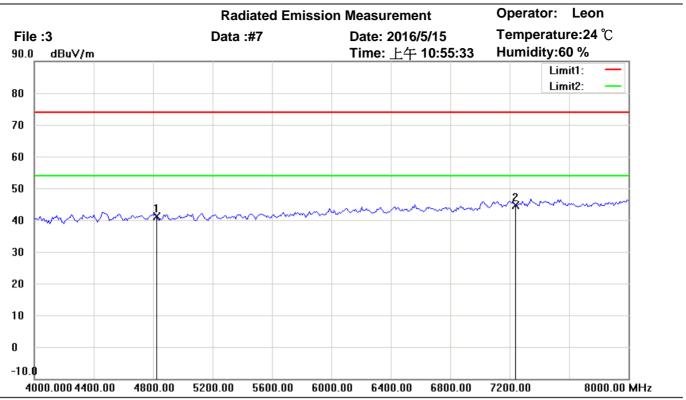

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.70	peak	-0.57	41.13	74.00	100	175	-32.87	
*	7236.000	40.39	peak	4.29	44.68	74.00	100	160	-29.32	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

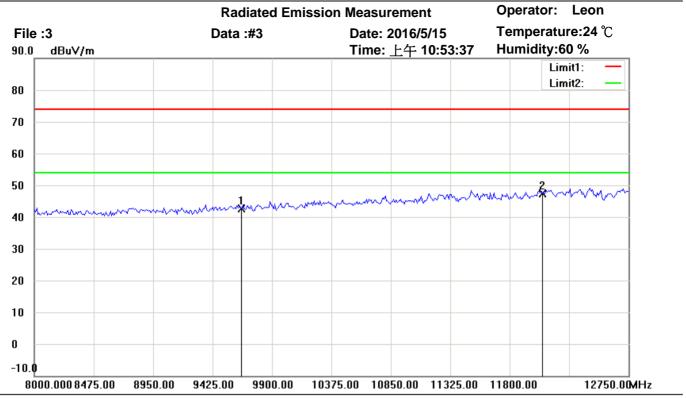

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.19	peak	7.51	42.70	74.00	100	220	-31.30	
*	12060.000	34.23	peak	13.18	47.41	74.00	100	80	-26.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

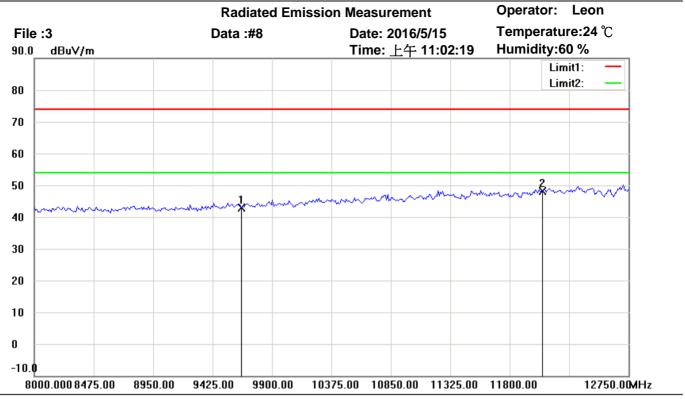

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.41	peak	7.51	42.92	74.00	100	50	-31.08	
*	12060.000	35.01	peak	13.18	48.19	74.00	100	230	-25.81	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

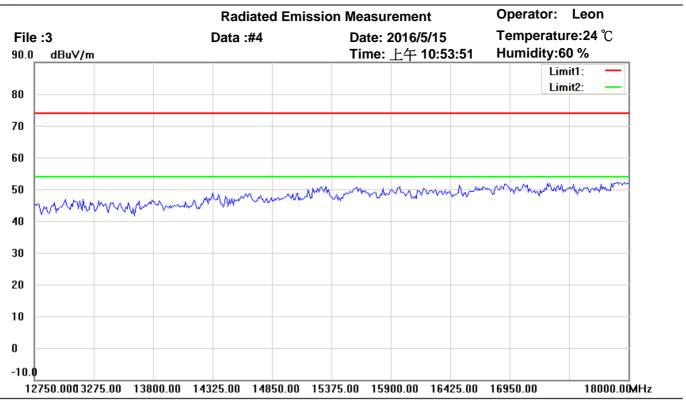

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

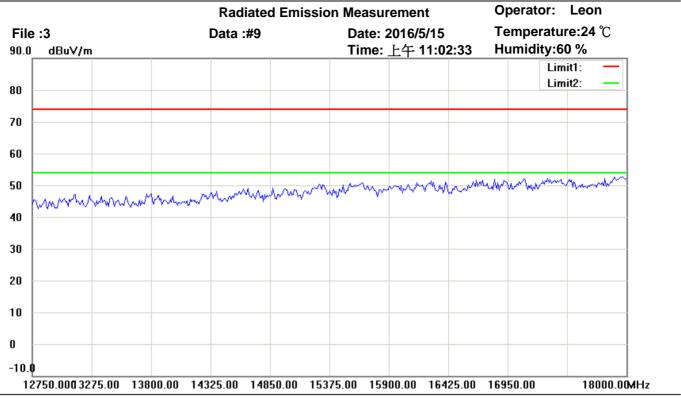

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

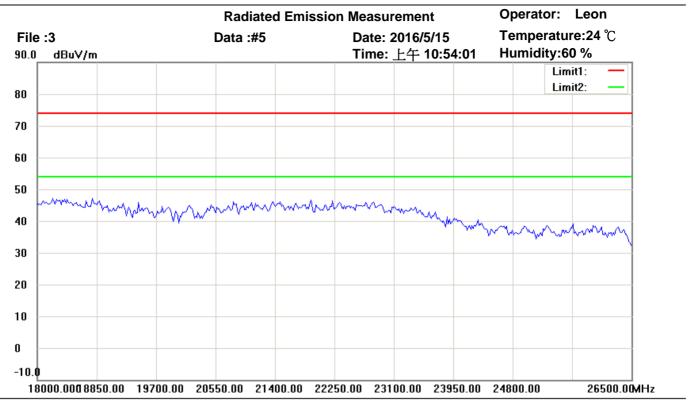

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

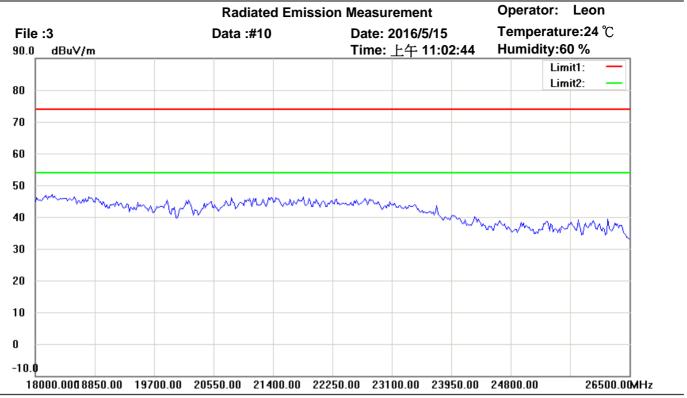

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

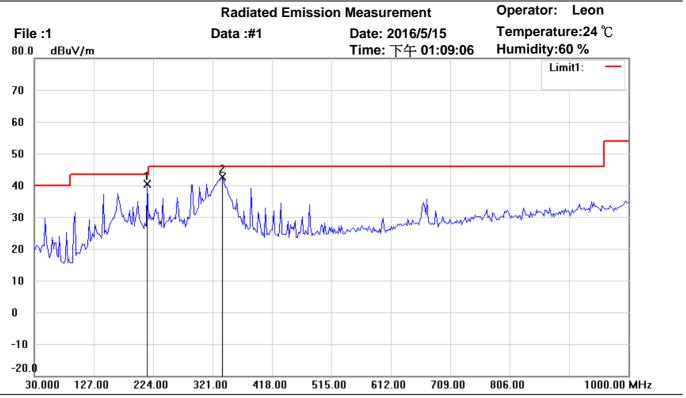

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	214.6692	50.12	peak	-9.73	40.39	43.50	100	55	-3.11	
	337.1342	47.46	peak	-4.83	42.63	46.00	100	70	-3.37	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

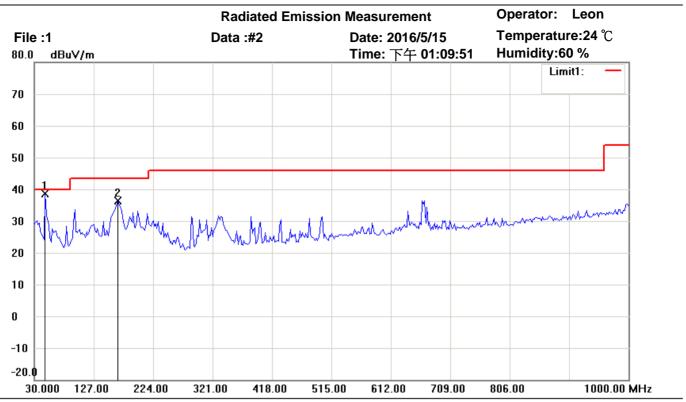

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.95	peak	-9.26	38.69	40.00	100	145	-1.31	
	166.0721	46.00	peak	-9.52	36.48	43.50	100	90	-7.02	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

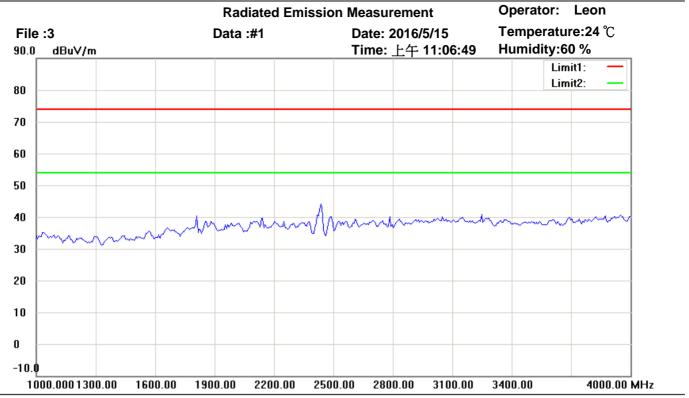

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

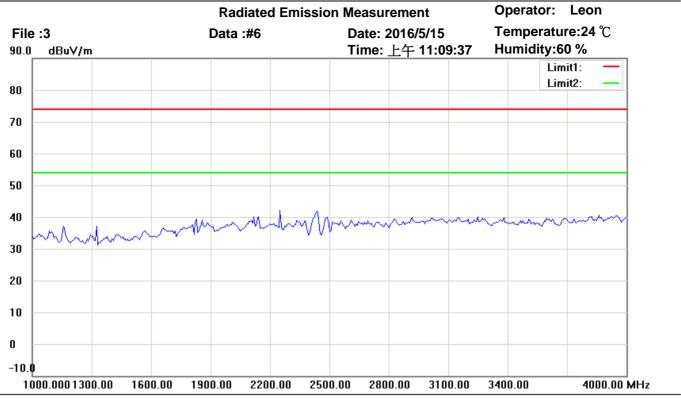

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

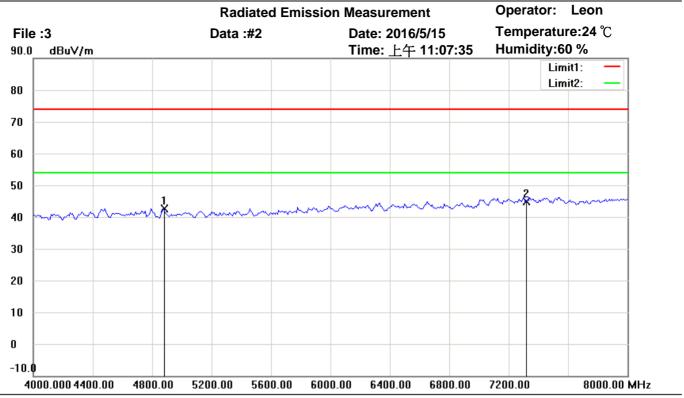

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	43.03	peak	-0.50	42.53	74.00	100	160	-31.47	
*	7311.000	40.37	peak	4.43	44.80	74.00	100	230	-29.20	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

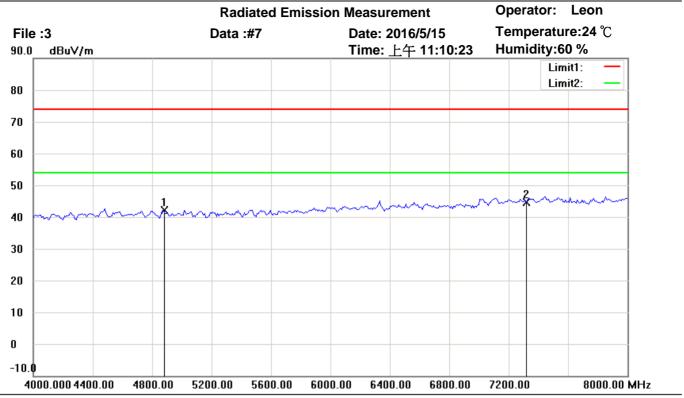

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	42.72	peak	-0.50	42.22	74.00	100	130	-31.78	
*	7311.000	40.19	peak	4.43	44.62	74.00	100	50	-29.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

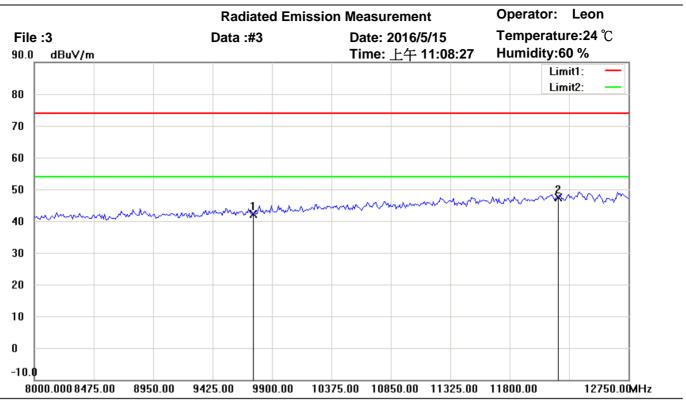

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.69	peak	7.49	42.18	74.00	100	175	-31.82	
*	12185.000	33.67	peak	13.82	47.49	74.00	100	80	-26.51	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

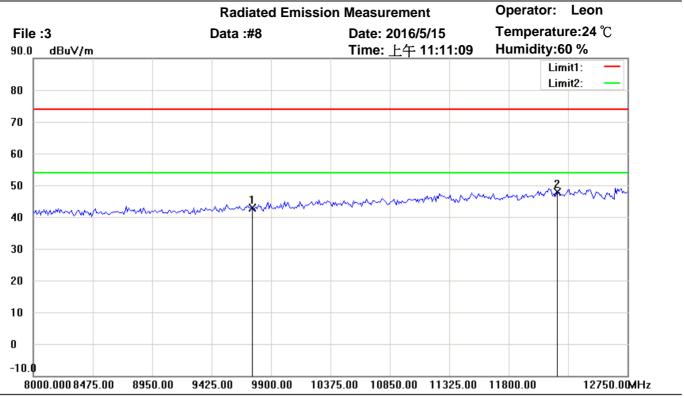

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.36	peak	7.49	42.85	74.00	100	175	-31.15	
*	12185.000	33.97	peak	13.82	47.79	74.00	100	190	-26.21	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

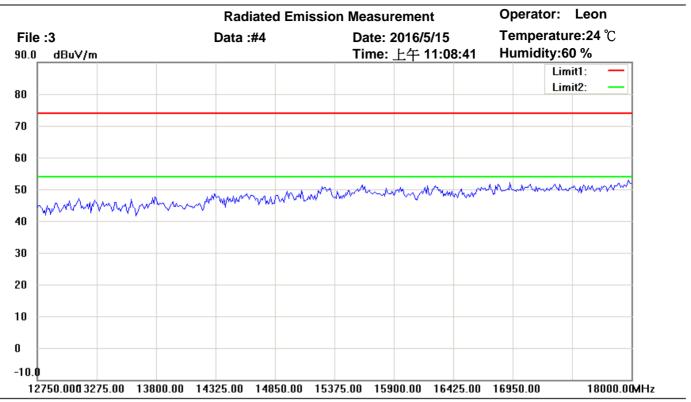

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

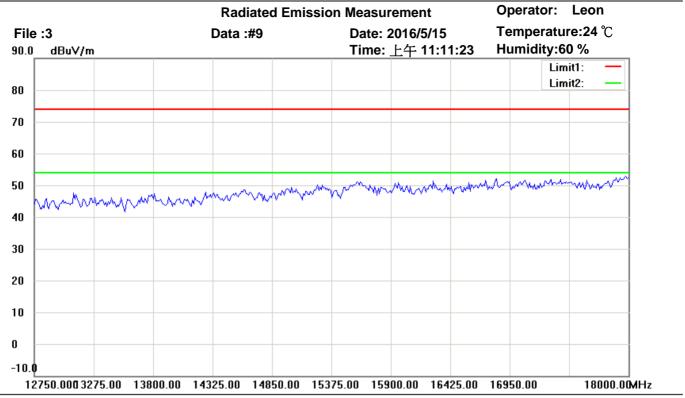

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

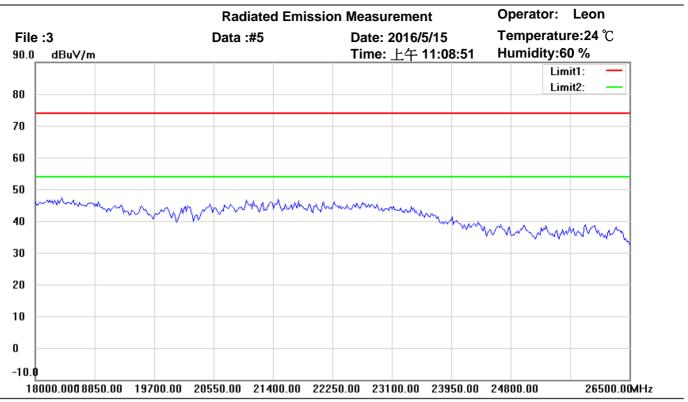

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

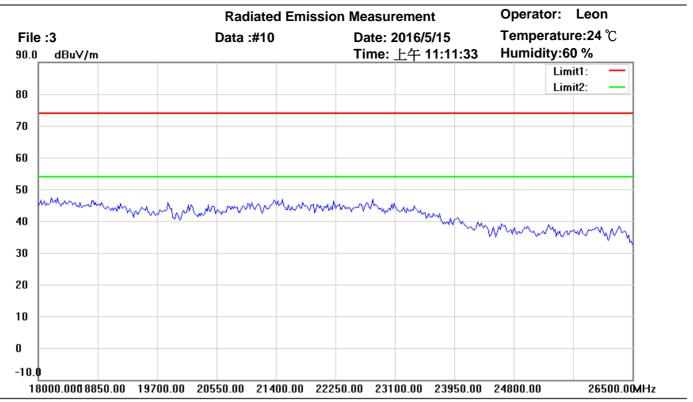

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

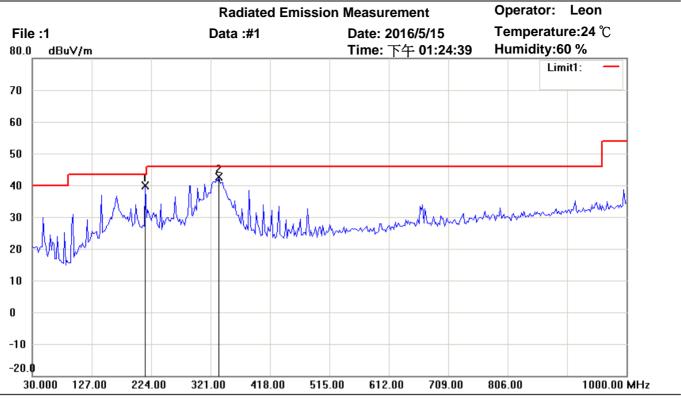

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	214.6692	49.71	peak	-9.73	39.98	43.50	100	70	-3.52	
*	335.1904	47.55	peak	-4.87	42.68	46.00	100	95	-3.32	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

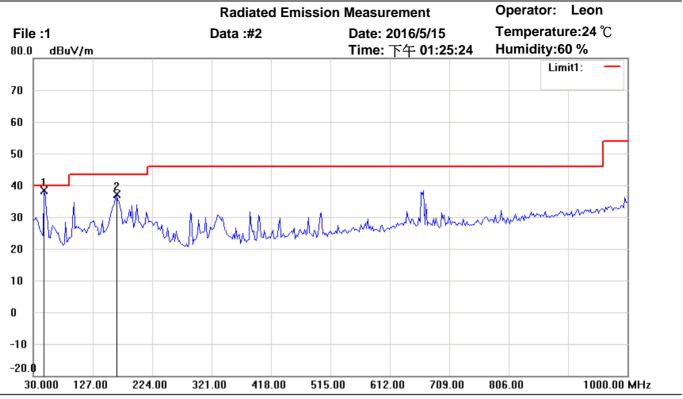

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.72	peak	-9.26	38.46	40.00	100	145	-1.54	
	166.0721	46.67	peak	-9.52	37.15	43.50	100	35	-6.35	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

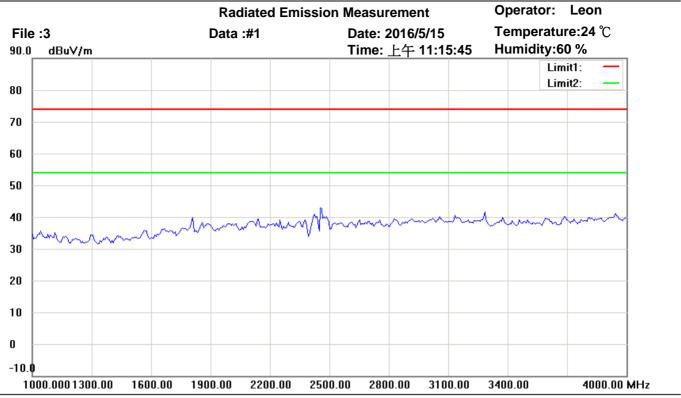

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

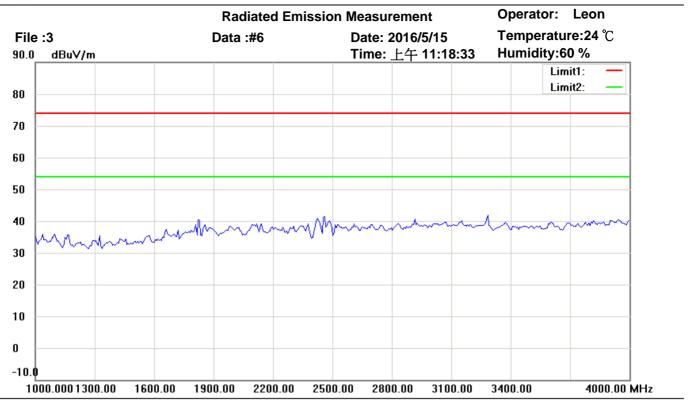

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

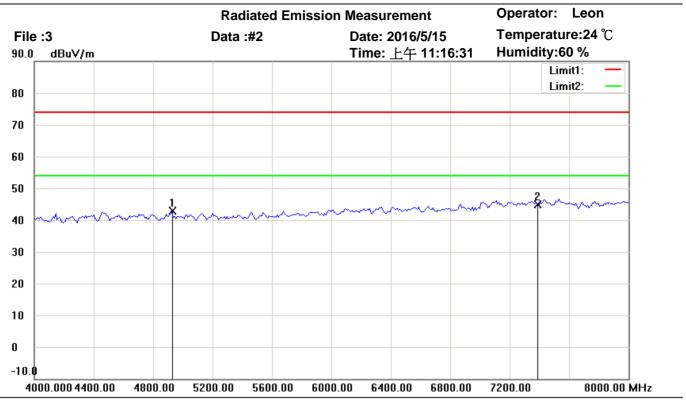

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	43.32	peak	-0.34	42.98	74.00	100	160	-31.02	
*	7386.000	39.94	peak	4.93	44.87	74.00	100	245	-29.13	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

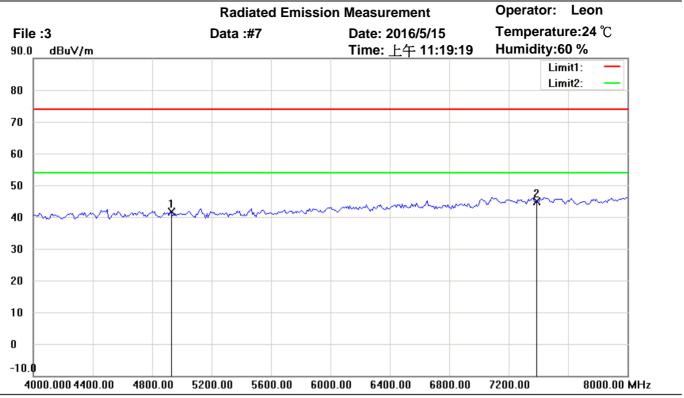

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	41.89	peak	-0.34	41.55	74.00	100	90	-32.45	
*	7386.000	39.92	peak	4.93	44.85	74.00	100	145	-29.15	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

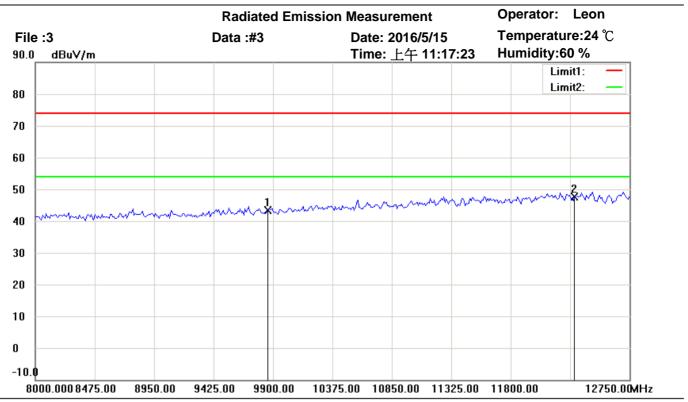

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.69	peak	7.68	43.37	74.00	100	95	-30.63	
*	12310.000	34.35	peak	13.25	47.60	74.00	100	60	-26.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

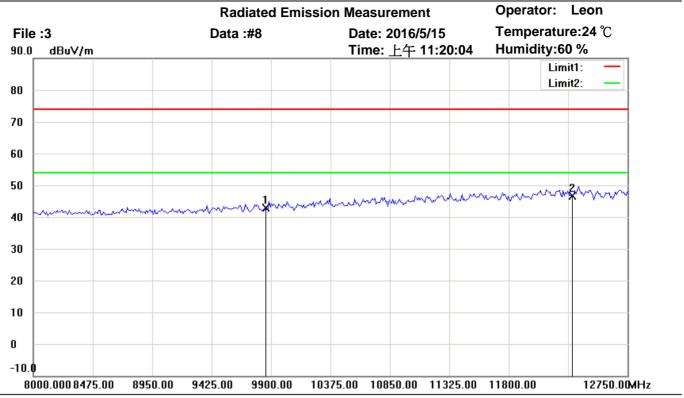

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.23	peak	7.68	42.91	74.00	100	210	-31.09	
*	12310.000	33.44	peak	13.25	46.69	74.00	100	170	-27.31	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

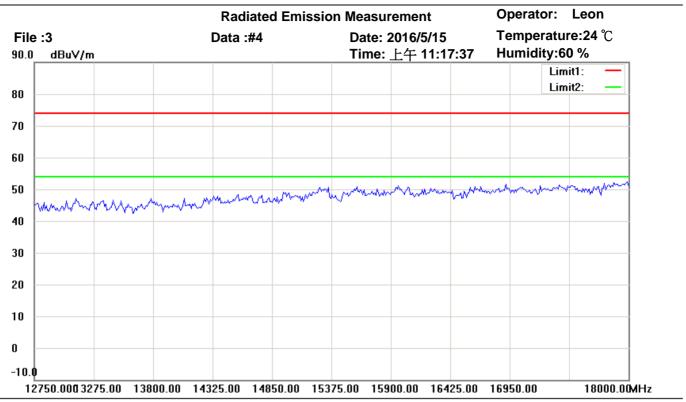

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

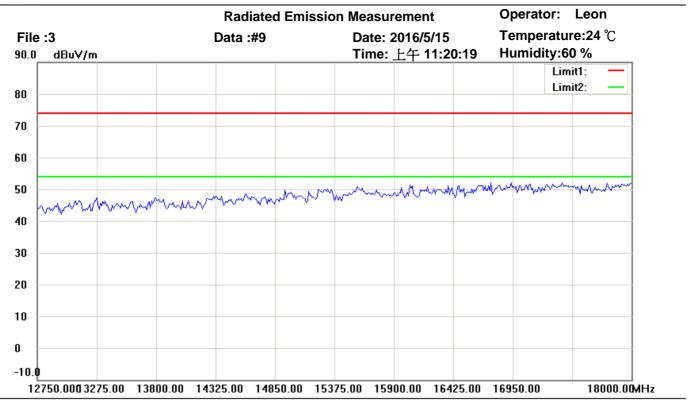

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

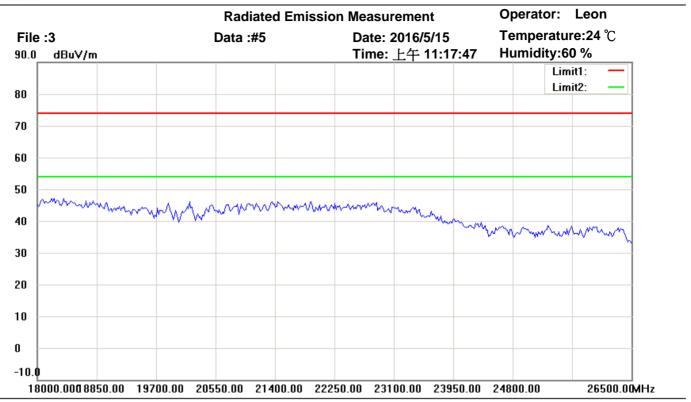

Site: Chamber


Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

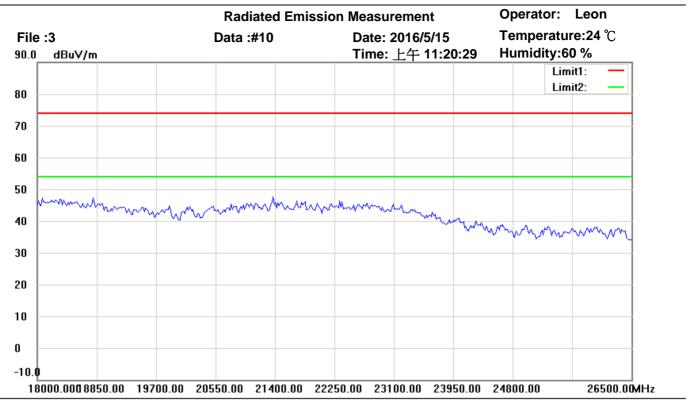

Site: Chamber

Condition: FCC\_part 15 RE-Class C\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: TX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l




Measurement diagrams

Spurious Emission Radiated \_RX



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

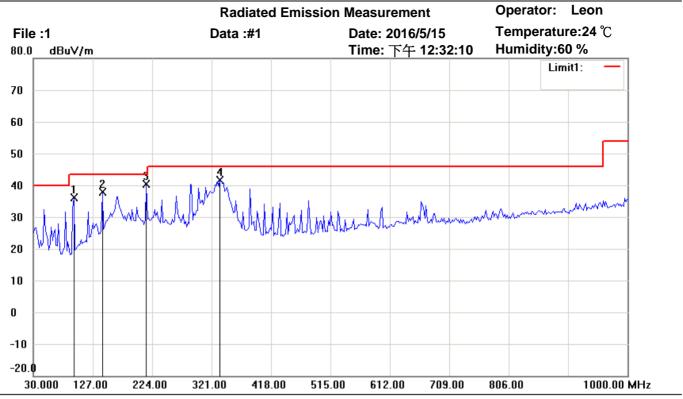

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	96.0922	47.01	peak	-10.89	36.12	43.50	100	170	-7.38	
	142.7455	44.93	peak	-6.97	37.96	43.50	100	135	-5.54	
*	214.6693	50.10	peak	-9.73	40.37	43.50	100	90	-3.13	
	335.1904	46.49	peak	-4.87	41.62	46.00	100	255	-4.38	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

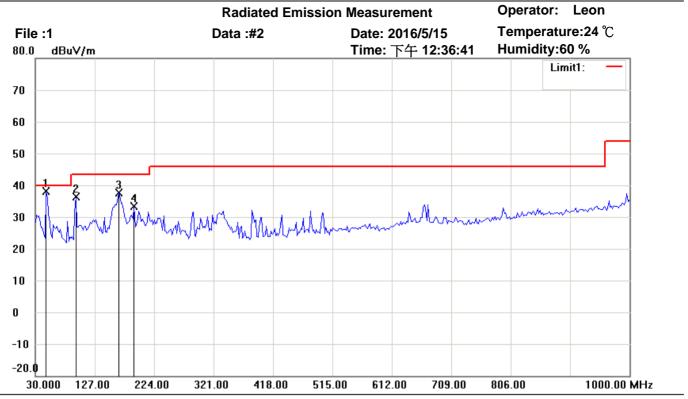

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.50	peak	-9.26	38.24	40.00	100	235	-1.76	
	96.0922	47.23	peak	-10.89	36.34	43.50	100	60	-7.16	
	166.0721	47.15	peak	-9.52	37.63	43.50	100	110	-5.87	
	191.3427	44.42	peak	-10.95	33.47	43.50	100	90	-10.03	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

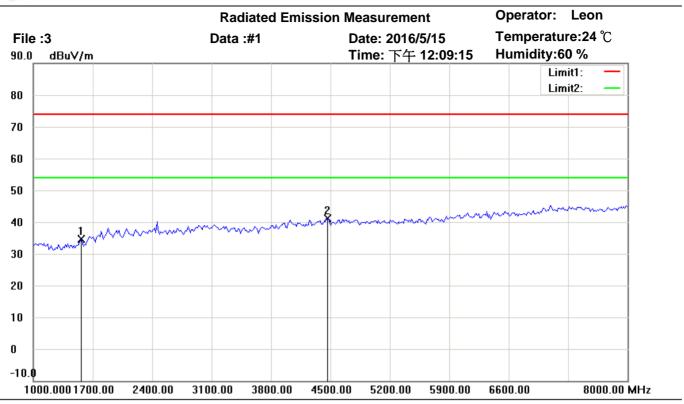

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.13	peak	-8.56	34.57	74.00	100	175	-39.43	
*	4450.902	42.08	peak	-0.88	41.20	74.00	100	80	-32.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

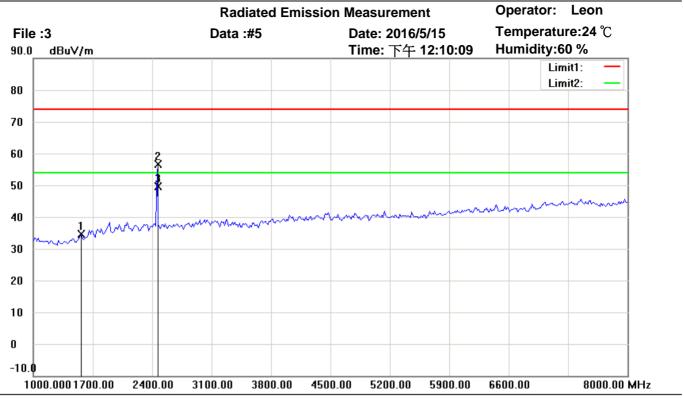

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.26	peak	-8.56	34.70	74.00	100	175	-39.30	
	2458.918	61.23	peak	-4.63	56.60	74.00	195	210	-17.40	
*	2458.918	54.36	AVG	-4.63	49.73	54.00	195	210	-4.27	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

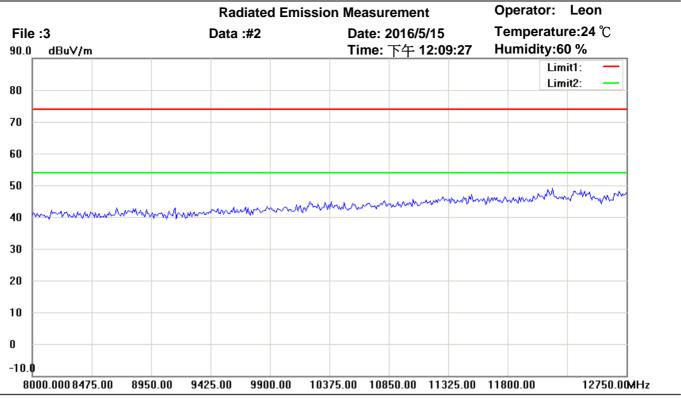

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

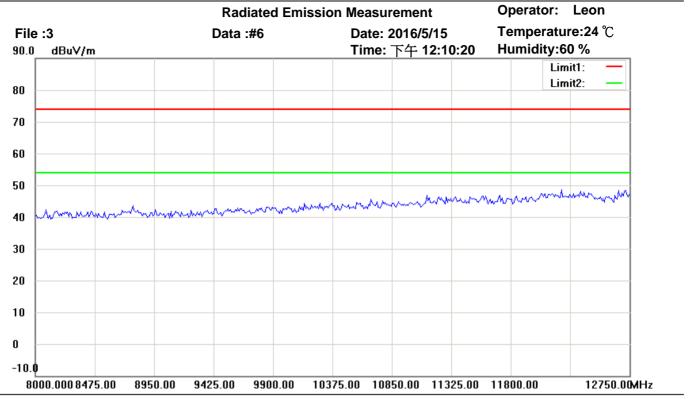

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

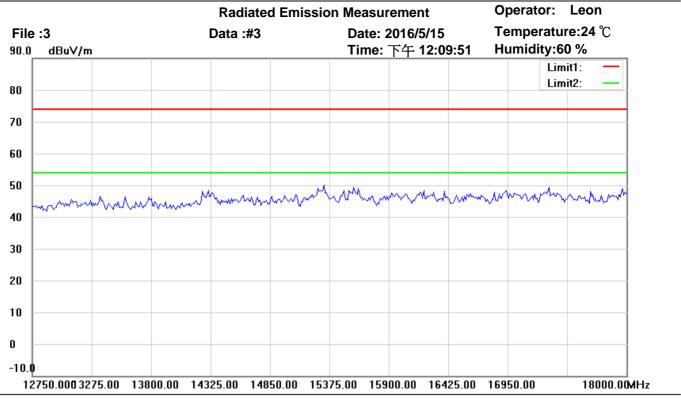

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

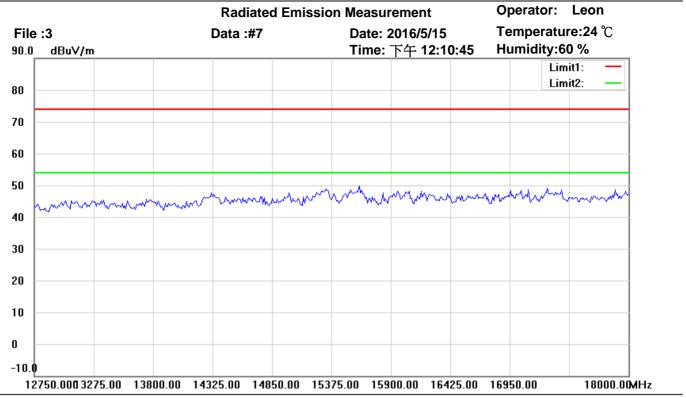

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

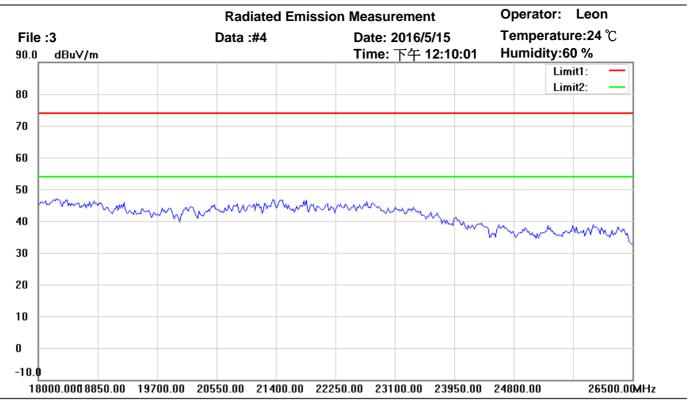

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

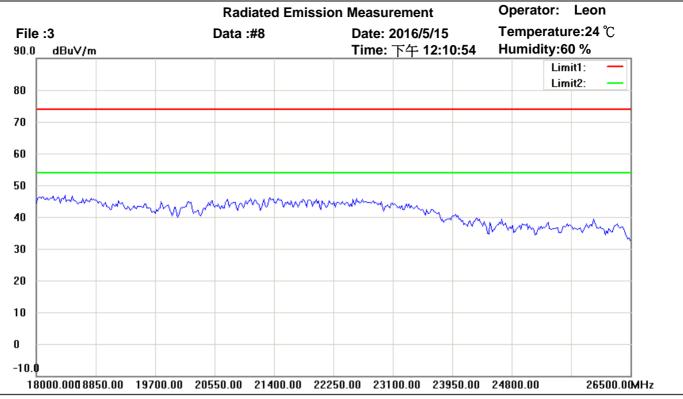

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 802.11b CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

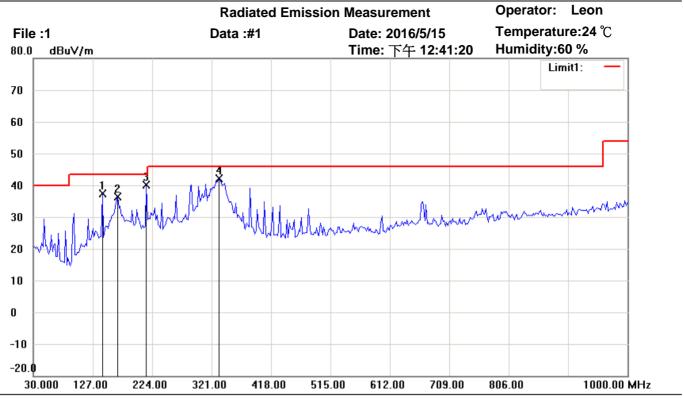

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.39	peak	-6.97	37.42	43.50	100	110	-6.08	
	168.0160	46.11	peak	-9.74	36.37	43.50	100	160	-7.13	
*	214.6692	49.85	peak	-9.73	40.12	43.50	100	40	-3.38	
	333.2465	47.02	peak	-4.91	42.11	46.00	100	175	-3.89	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

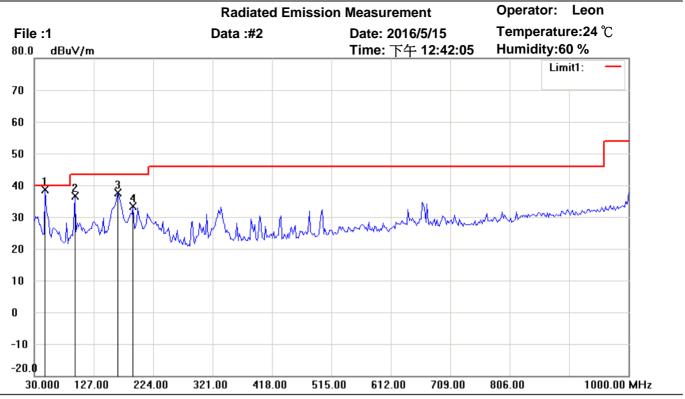

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.84	peak	-9.26	38.58	40.00	100	55	-1.42	
	96.0922	47.64	peak	-10.89	36.75	43.50	100	70	-6.75	
	166.0721	47.14	peak	-9.52	37.62	43.50	100	135	-5.88	
	191.3427	44.30	peak	-10.95	33.35	43.50	100	90	-10.15	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

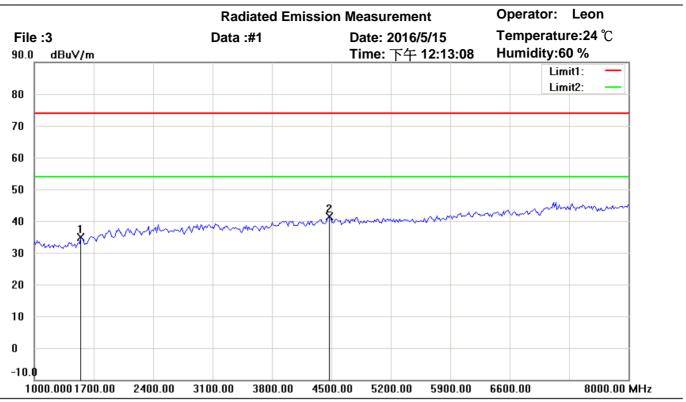

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1547.094	43.49	peak	-8.69	34.80	74.00	100	155	-39.20	
*	4464.930	42.17	peak	-0.79	41.38	74.00	100	30	-32.62	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

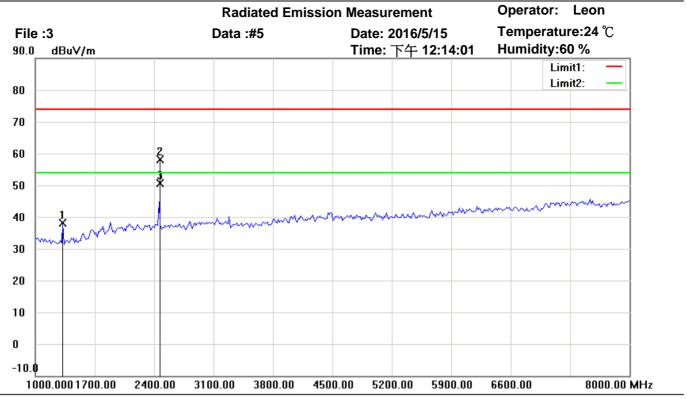

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1322.645	47.41	peak	-9.34	38.07	74.00	100	210	-35.93	
	2458.918	62.70	peak	-4.63	58.07	74.00	190	195	-15.93	
*	2458.918	55.23	AVG	-4.63	50.60	54.00	190	195	-3.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

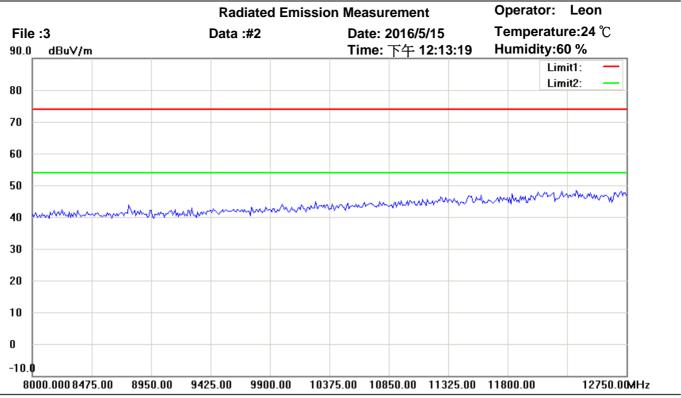

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

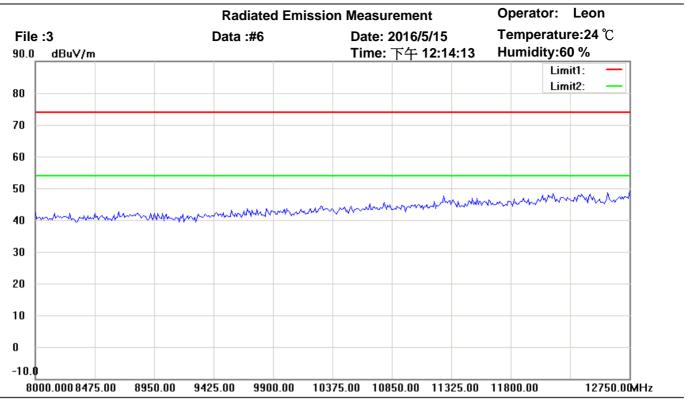

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

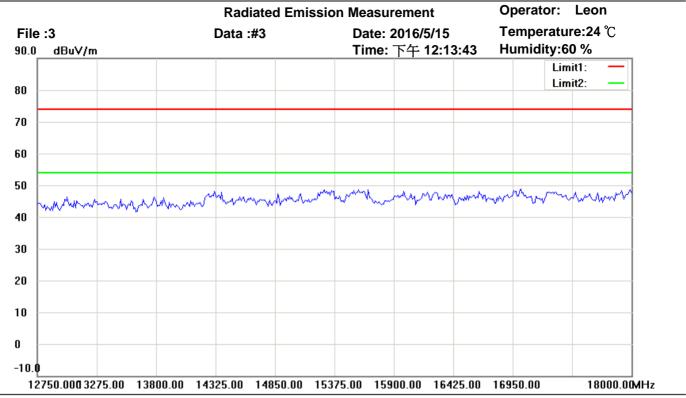

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

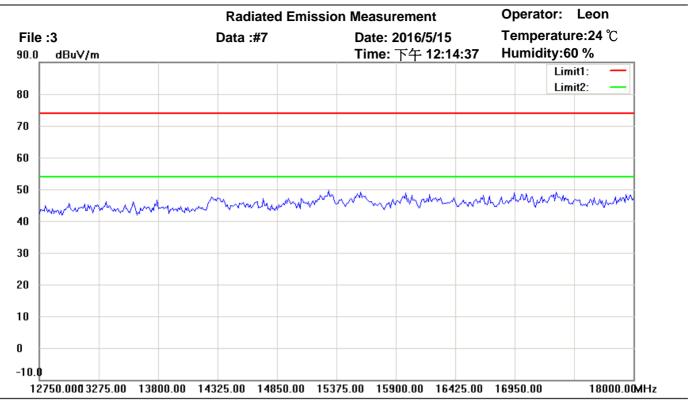

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

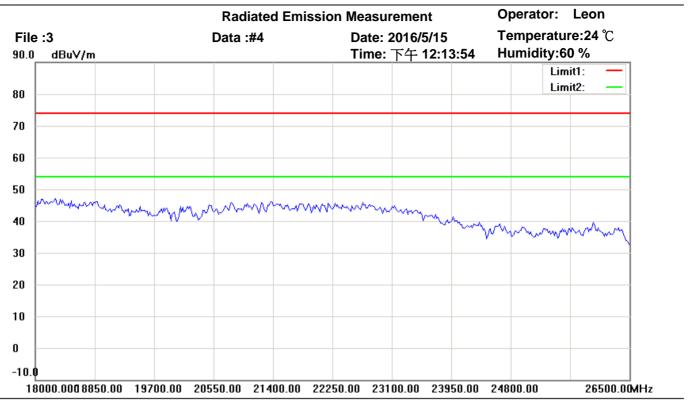

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

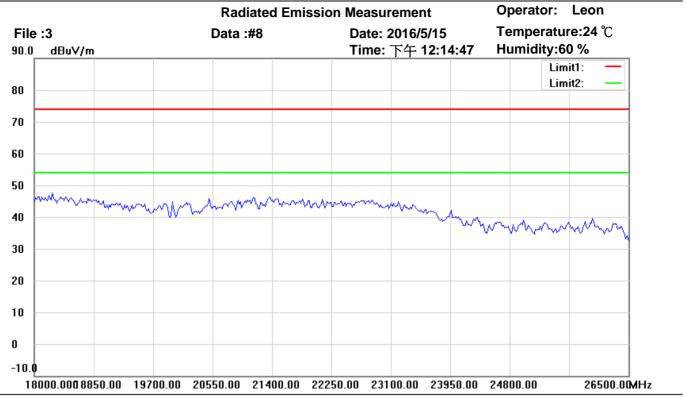

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

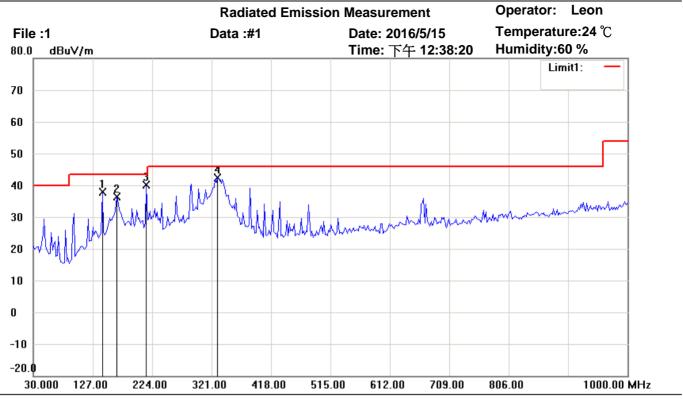

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.82	peak	-6.97	37.85	43.50	100	225	-5.65	
	166.0721	45.84	peak	-9.52	36.32	43.50	100	175	-7.18	
*	214.6692	49.94	peak	-9.73	40.21	43.50	100	80	-3.29	
	331.3025	47.36	peak	-4.95	42.41	46.00	100	110	-3.59	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

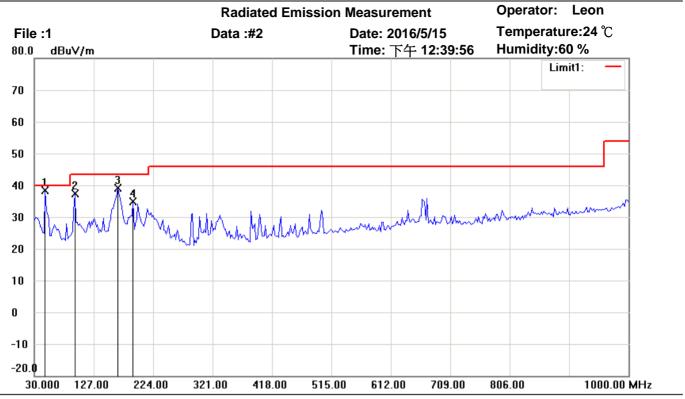

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.62	peak	-9.26	38.36	40.00	100	85	-1.64	
	96.0922	48.34	peak	-10.89	37.45	43.50	100	110	-6.05	
	166.0721	48.58	peak	-9.52	39.06	43.50	100	135	-4.44	
	191.3427	45.95	peak	-10.95	35.00	43.50	100	120	-8.50	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

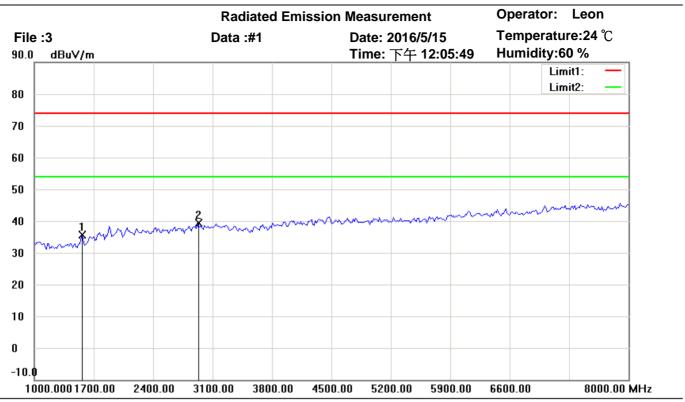

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	44.26	peak	-8.56	35.70	74.00	100	145	-38.30	
*	2921.844	42.73	peak	-3.38	39.35	74.00	100	60	-34.65	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

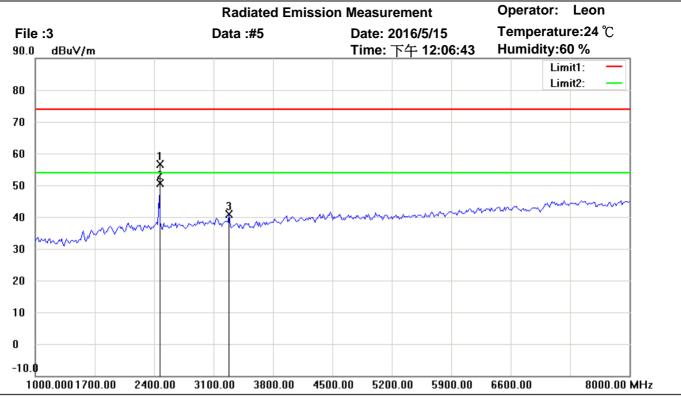

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2458.918	61.37	peak	-4.63	56.74	74.00	195	210	-17.26	
*	2458.918	55.24	AVG	-4.63	50.61	54.00	195	210	-3.39	
	3286.573	43.79	peak	-2.87	40.92	74.00	100	175	-33.08	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

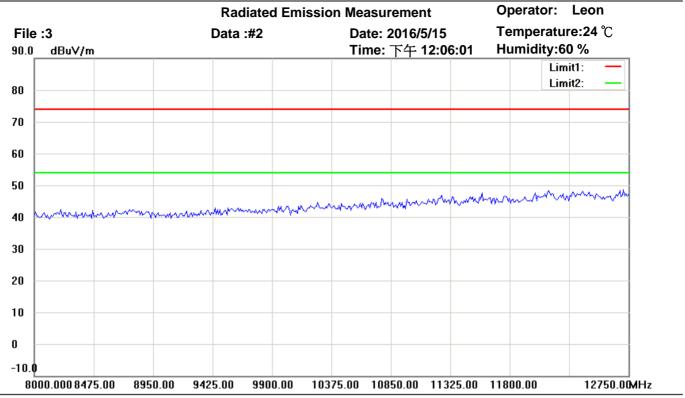

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

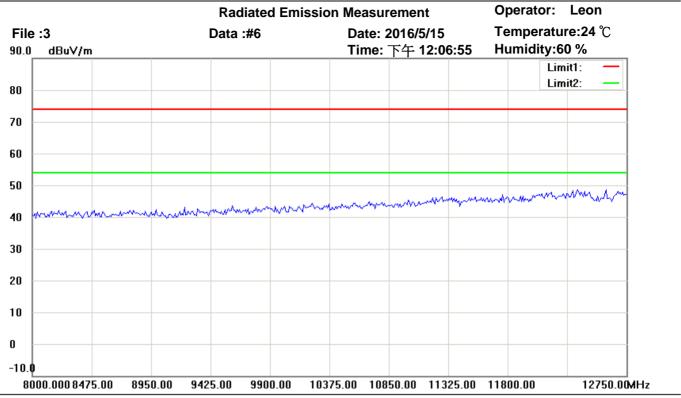

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

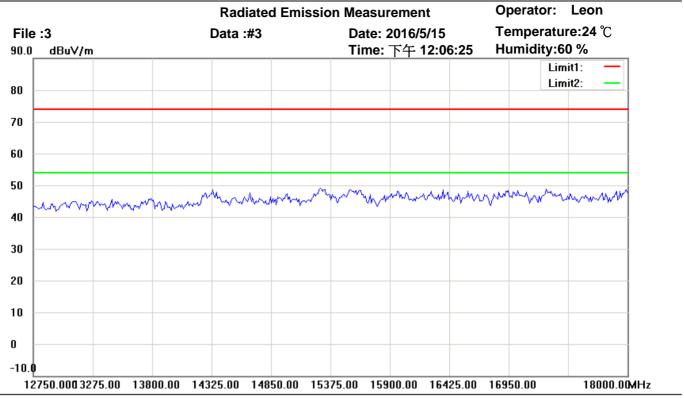

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

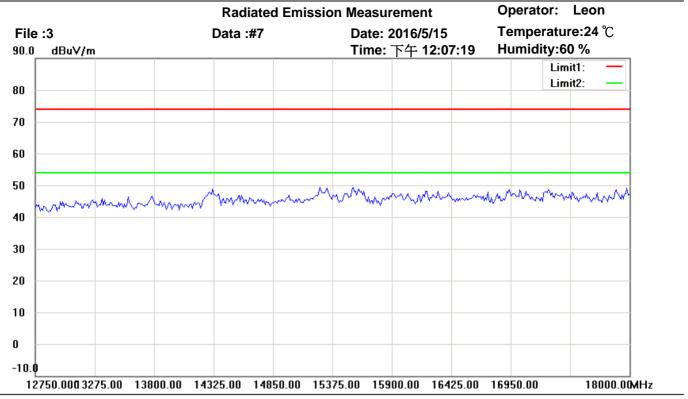

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 802.11b CH11

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

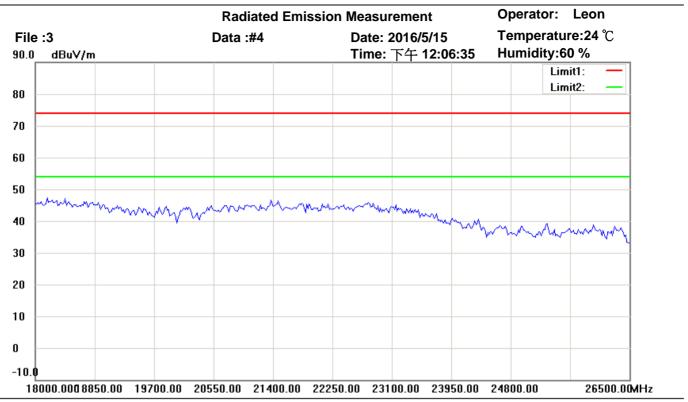

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

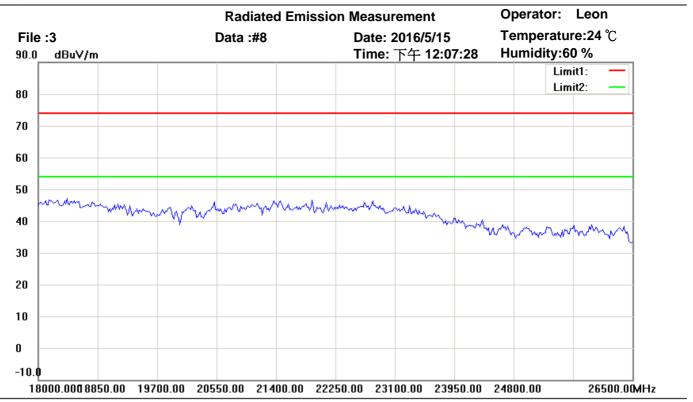

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11b CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

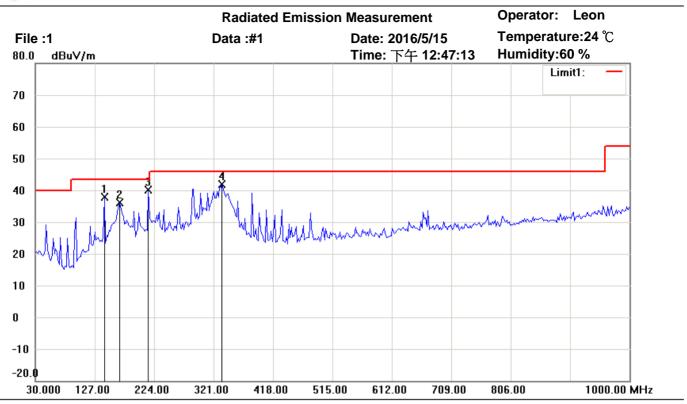

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.74	peak	-6.97	37.77	43.50	100	85	-5.73	
	168.0160	45.97	peak	-9.74	36.23	43.50	100	110	-7.27	
*	214.6692	49.89	peak	-9.73	40.16	43.50	100	175	-3.34	
	335.1904	46.73	peak	-4.87	41.86	46.00	100	210	-4.14	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

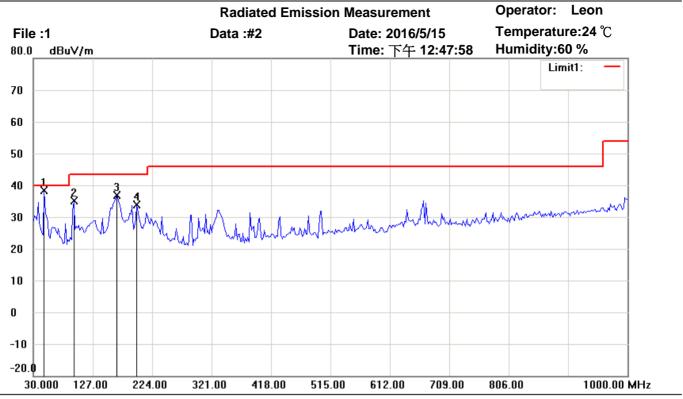

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.76	peak	-9.26	38.50	40.00	100	165	-1.50	
	96.0922	46.09	peak	-10.89	35.20	43.50	100	330	-8.30	
	166.0721	46.52	peak	-9.52	37.00	43.50	100	175	-6.50	
	199.1182	44.20	peak	-10.34	33.86	43.50	100	80	-9.64	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

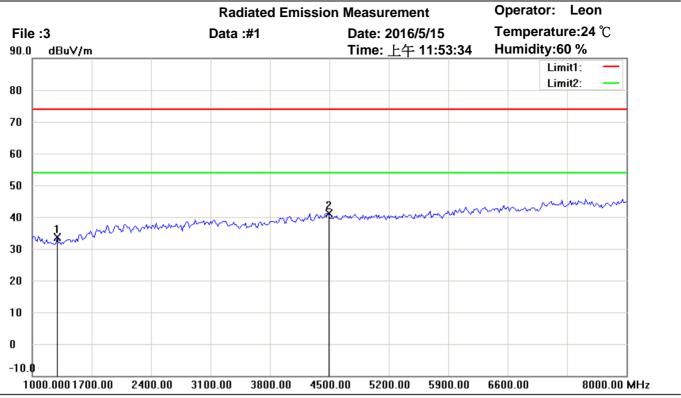

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1294.589	42.98	peak	-9.34	33.64	74.00	100	145	-40.36	
*	4478.958	41.92	peak	-0.70	41.22	74.00	100	60	-32.78	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

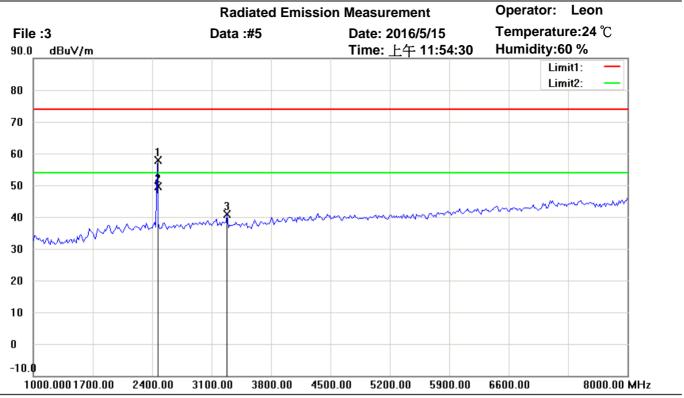

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2458.918	62.50	peak	-4.63	57.87	74.00	197	235	-16.13	
*	2458.918	54.26	AVG	-4.63	49.63	54.00	197	235	-4.37	
	3286.573	43.68	peak	-2.87	40.81	74.00	100	35	-33.19	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

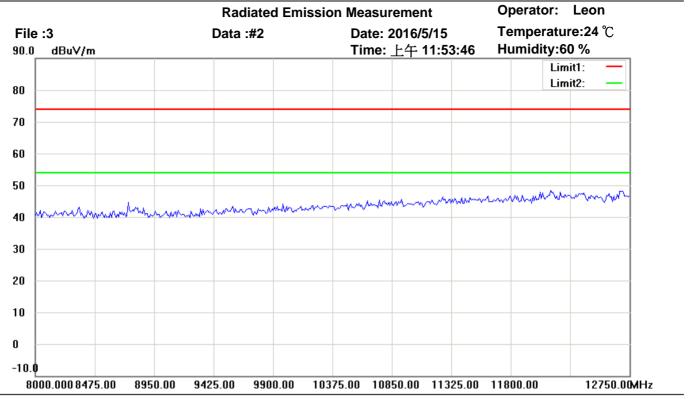

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

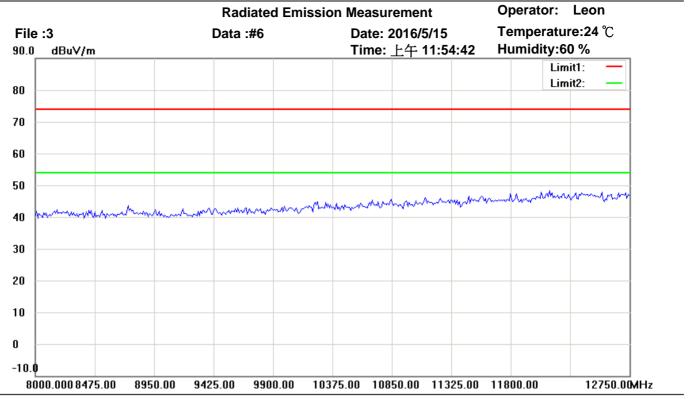

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

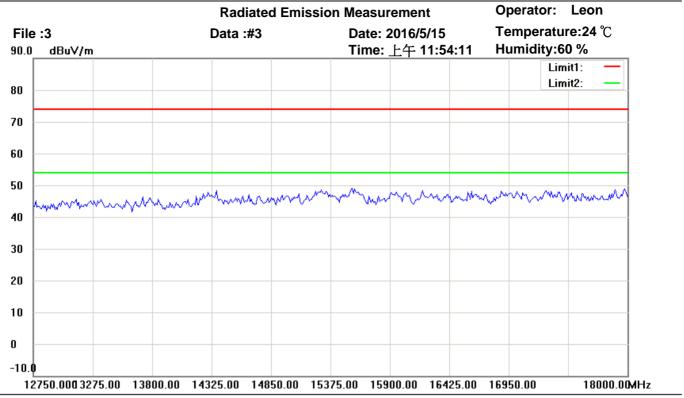

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

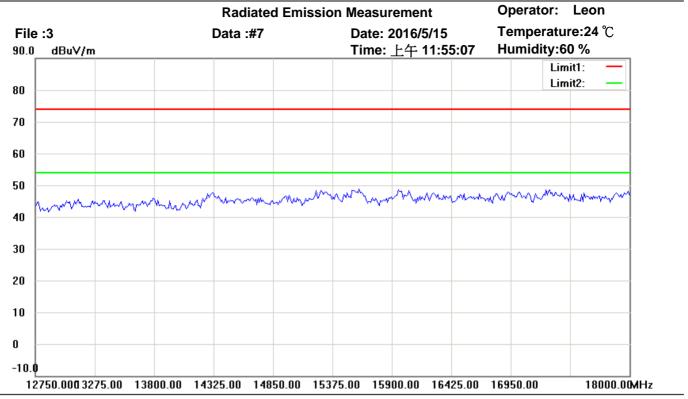

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

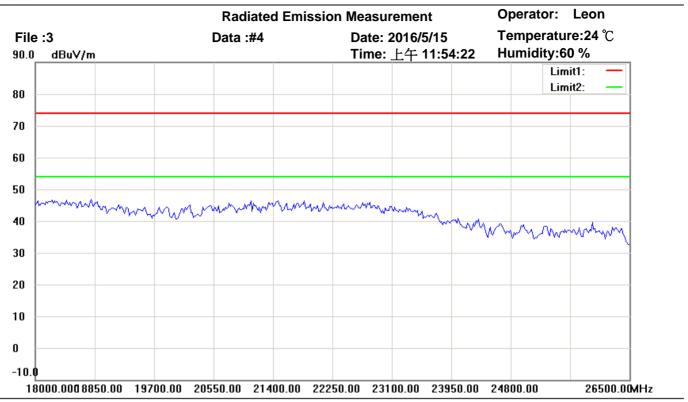

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

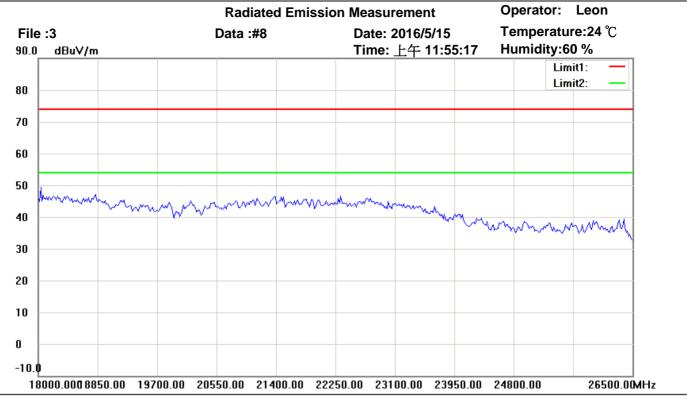

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

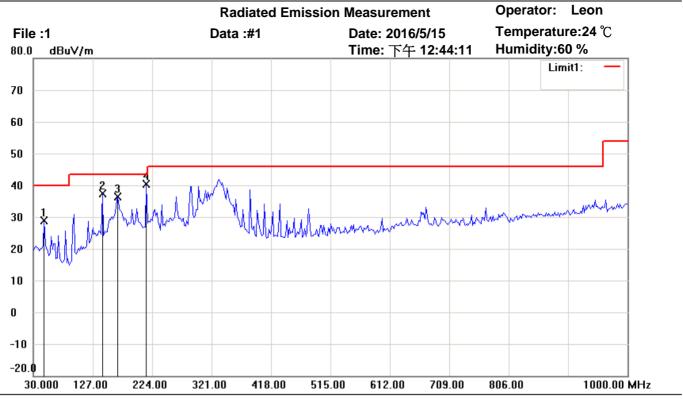

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	47.4950	38.19	peak	-9.26	28.93	40.00	100	135	-11.07	
	142.7453	44.45	peak	-6.97	37.48	43.50	100	110	-6.02	
	168.0160	46.08	peak	-9.74	36.34	43.50	100	40	-7.16	
*	214.6692	50.07	peak	-9.73	40.34	43.50	100	185	-3.16	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

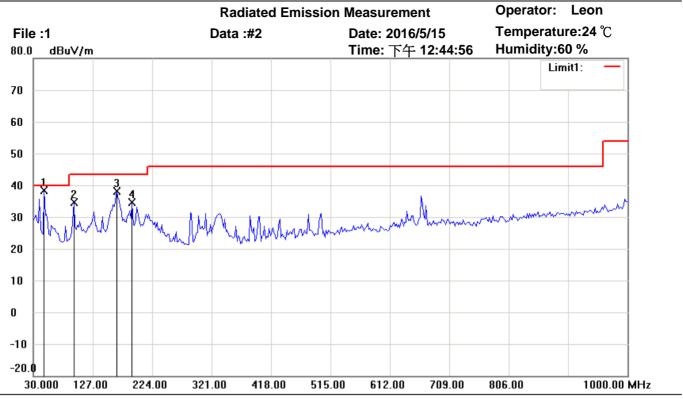

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.64	peak	-9.26	38.38	40.00	100	95	-1.62	
	96.0922	45.51	peak	-10.89	34.62	43.50	100	135	-8.88	
	166.0721	47.62	peak	-9.52	38.10	43.50	100	60	-5.40	
	191.3427	45.64	peak	-10.95	34.69	43.50	100	20	-8.81	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

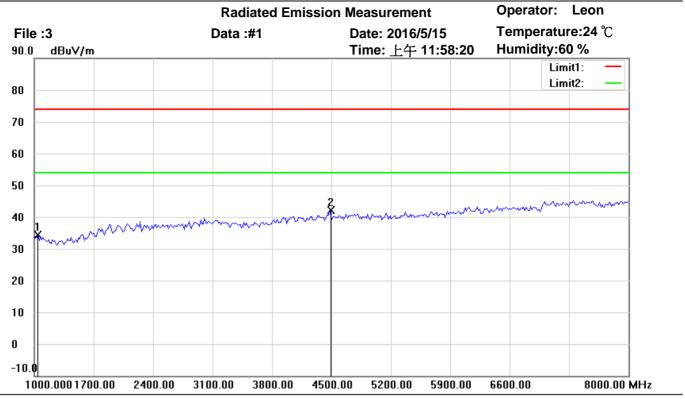

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1042.084	42.44	peak	-8.11	34.33	74.00	100	75	-39.67	
*	4478.958	42.94	peak	-0.70	42.24	74.00	100	120	-31.76	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

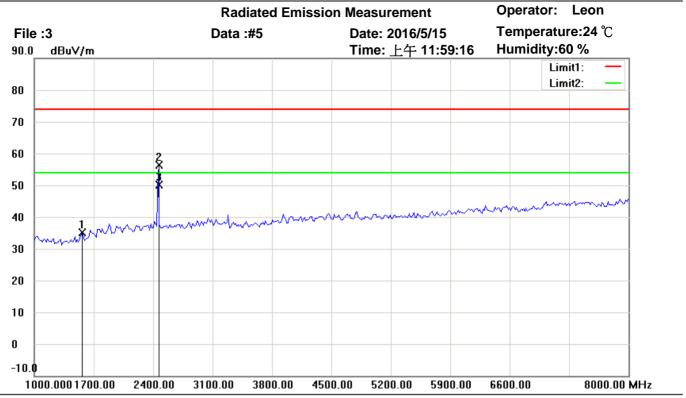

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.61	peak	-8.56	35.05	74.00	100	95	-38.95	
	2458.918	61.00	peak	-4.63	56.37	74.00	190	210	-17.63	
*	2458.918	54.77	AVG	-4.63	50.14	54.00	190	210	-3.86	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

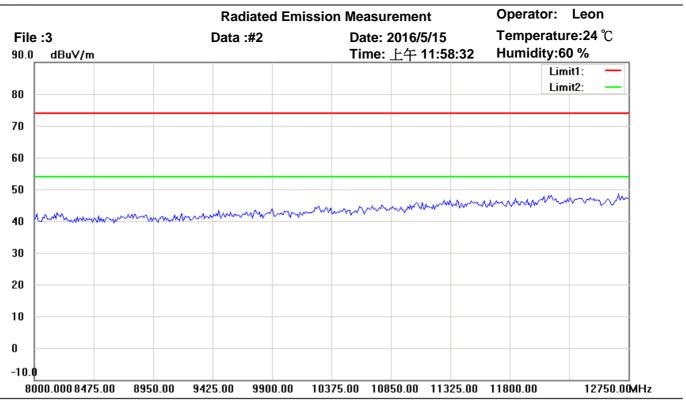

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

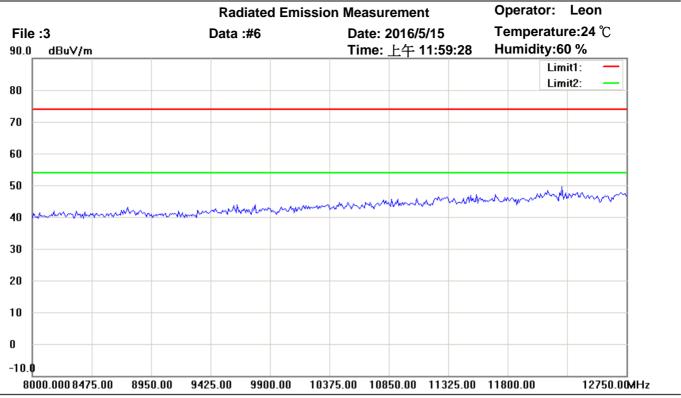

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

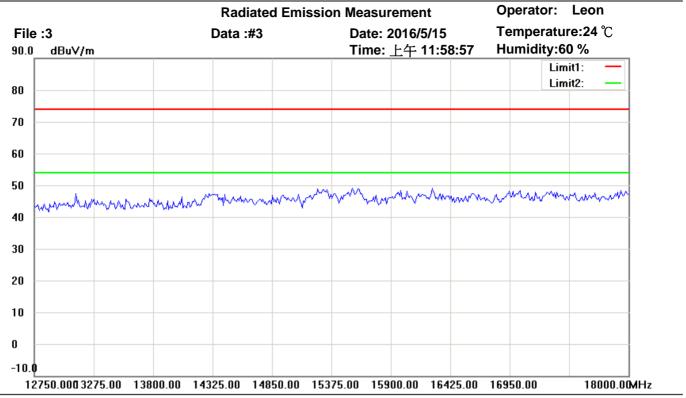

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH6

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

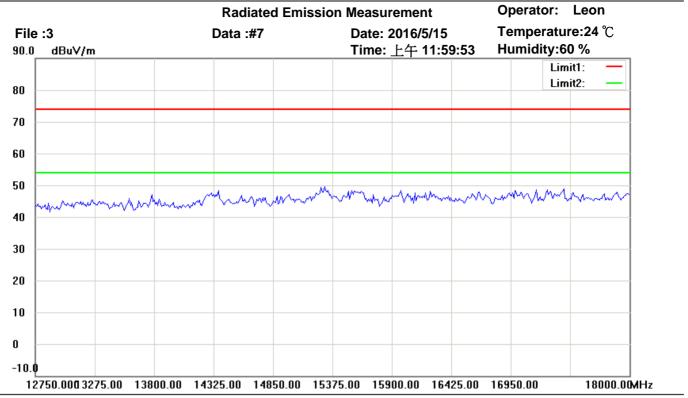

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH6

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

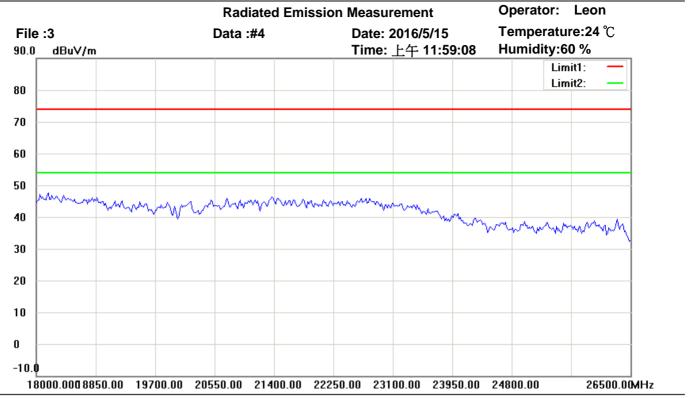

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

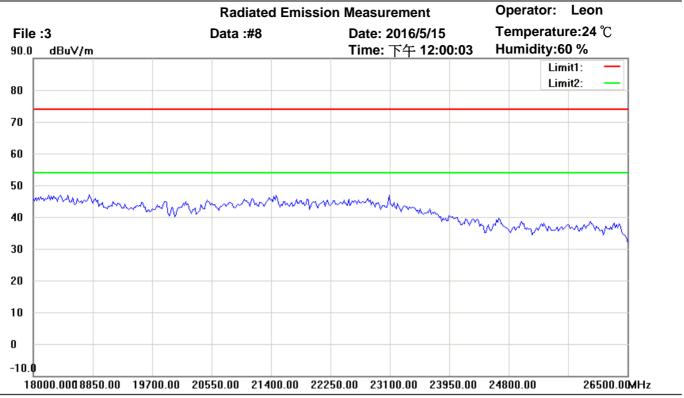

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

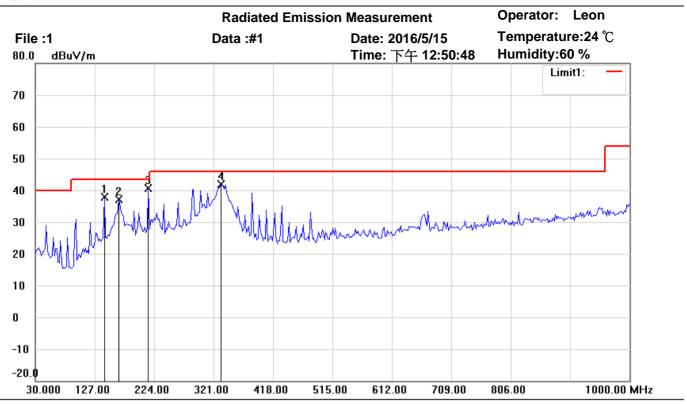

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.88	peak	-6.97	37.91	43.50	100	170	-5.59	
	166.0721	46.63	peak	-9.52	37.11	43.50	100	40	-6.39	
*	214.6692	50.26	peak	-9.73	40.53	43.50	100	60	-2.97	
	333.2465	46.89	peak	-4.91	41.98	46.00	100	135	-4.02	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

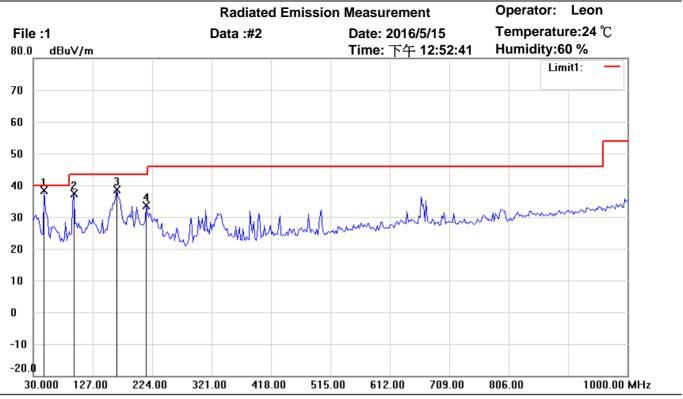

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.54	peak	-9.26	38.28	40.00	100	175	-1.72	
	96.0922	48.39	peak	-10.89	37.50	43.50	100	60	-6.00	
	166.0721	48.26	peak	-9.52	38.74	43.50	100	50	-4.76	
	214.6693	43.35	peak	-9.73	33.62	43.50	100	120	-9.88	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

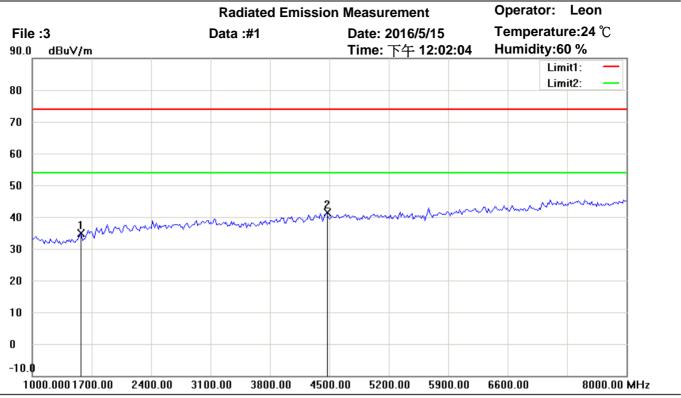

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1575.150	43.23	peak	-8.42	34.81	74.00	100	220	-39.19	
*	4464.930	42.21	peak	-0.79	41.42	74.00	100	175	-32.58	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

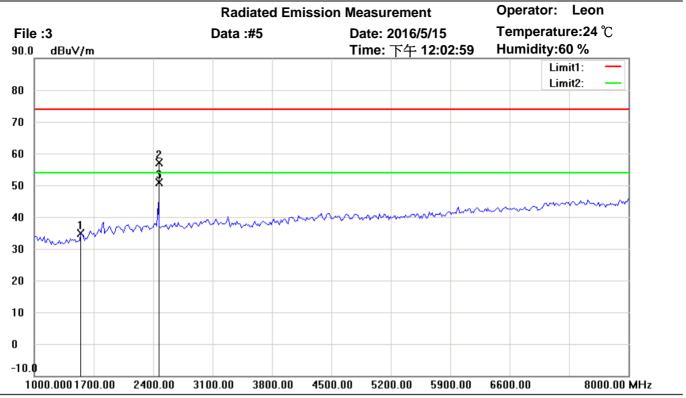

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1547.094	43.58	peak	-8.69	34.89	74.00	100	220	-39.11	
	2458.918	61.79	peak	-4.63	57.16	74.00	197	185	-16.84	
*	2458.918	55.56	AVG	-4.63	50.93	54.00	197	185	-3.07	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

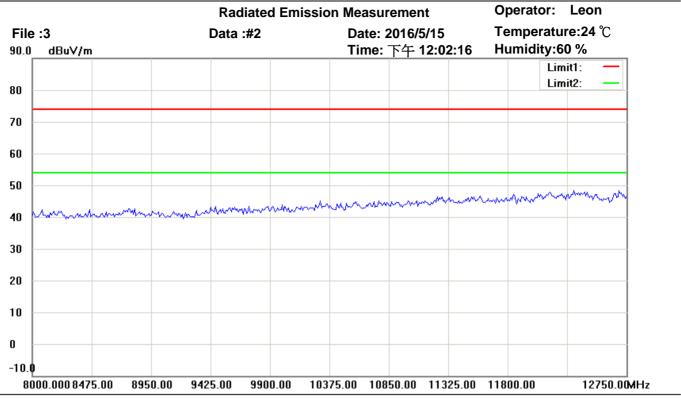

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

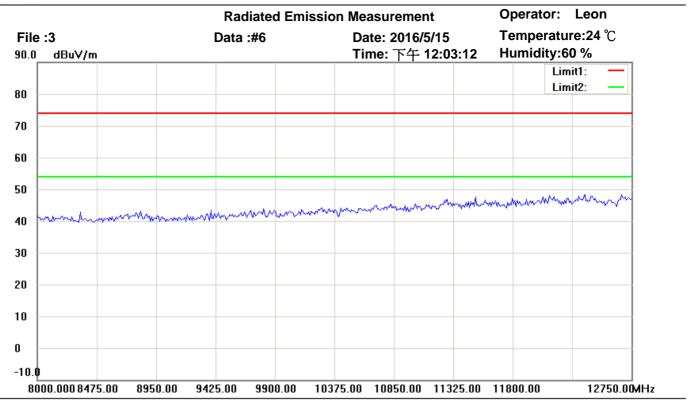

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

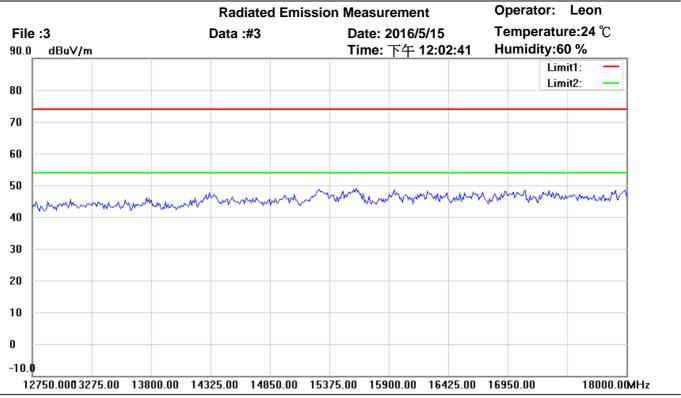

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

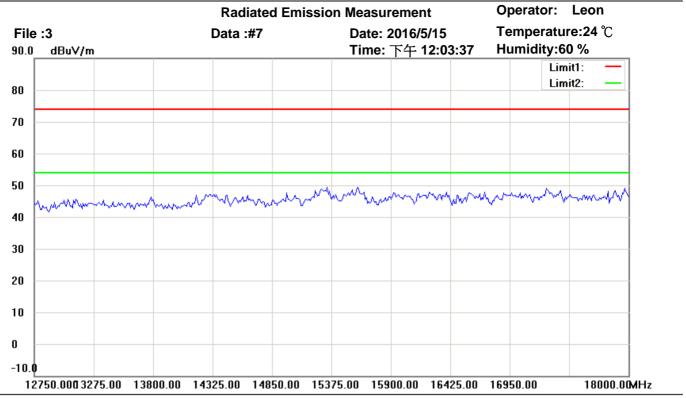

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

Test Mode: RX 802.11g CH11

NA I-	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

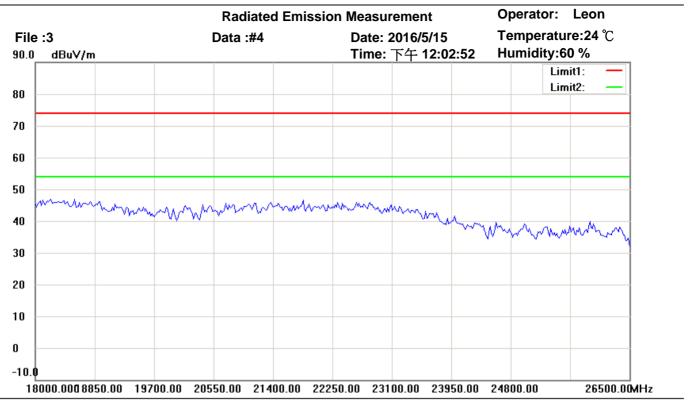

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

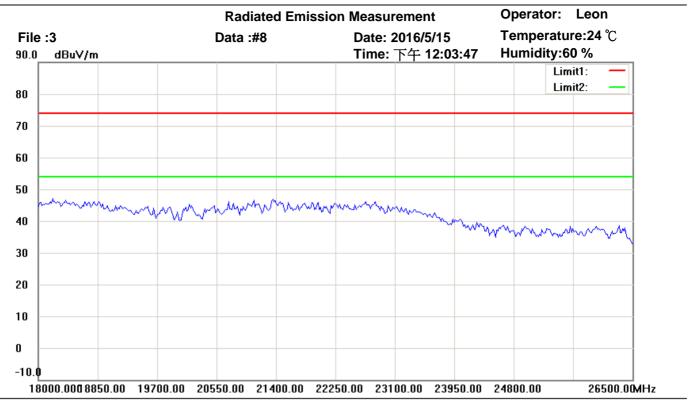

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11g CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

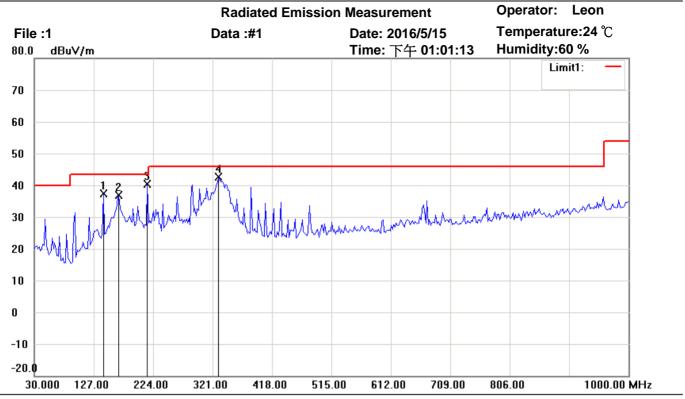

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.35	peak	-6.97	37.38	43.50	100	50	-6.12	
	168.0160	46.63	peak	-9.74	36.89	43.50	100	125	-6.61	
*	214.6692	50.01	peak	-9.73	40.28	43.50	100	90	-3.22	
	331.3025	47.69	peak	-4.95	42.74	46.00	100	175	-3.26	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

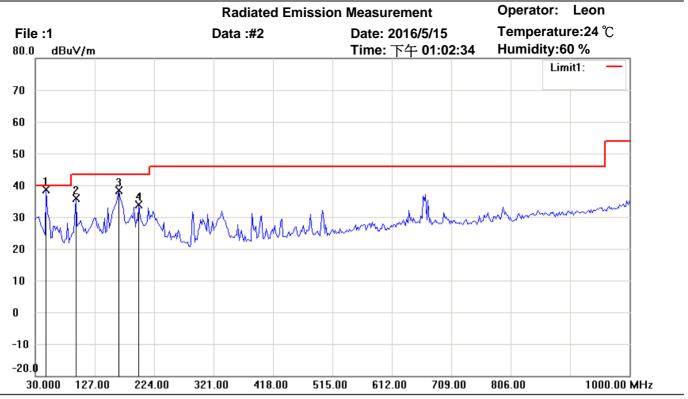

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.85	peak	-9.26	38.59	40.00	100	175	-1.41	
	96.0922	46.89	peak	-10.89	36.00	43.50	100	90	-7.50	
	166.0721	47.90	peak	-9.52	38.38	43.50	100	35	-5.12	
	199.1182	44.16	peak	-10.34	33.82	43.50	100	210	-9.68	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

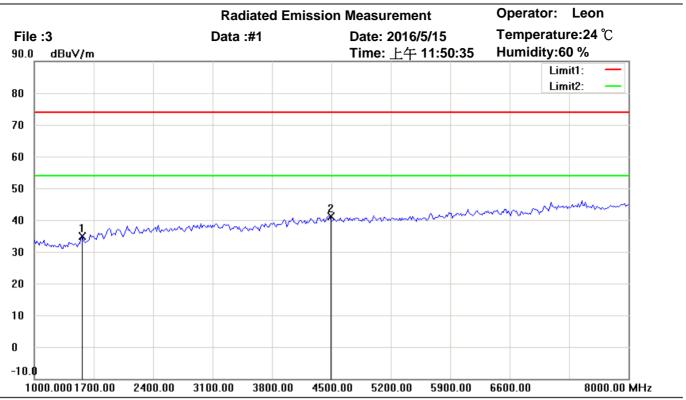

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.32	peak	-8.56	34.76	74.00	100	85	-39.24	
*	4478.958	41.79	peak	-0.70	41.09	74.00	100	120	-32.91	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

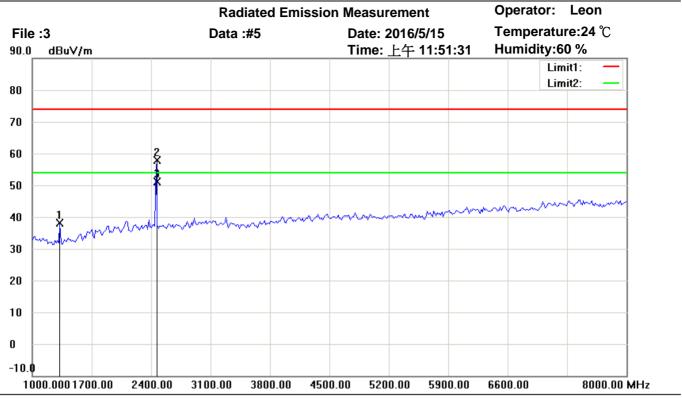

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1322.645	47.43	peak	-9.34	38.09	74.00	100	205	-35.91	
	2458.918	62.39	peak	-4.63	57.76	74.00	195	173	-16.24	
*	2458.918	55.73	AVG	-4.63	51.10	54.00	195	173	-2.90	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

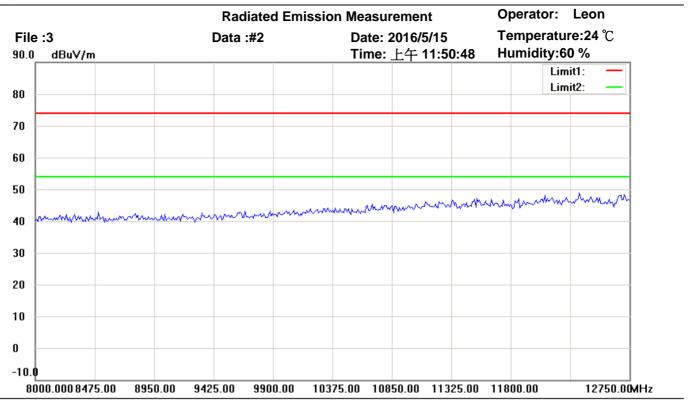

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

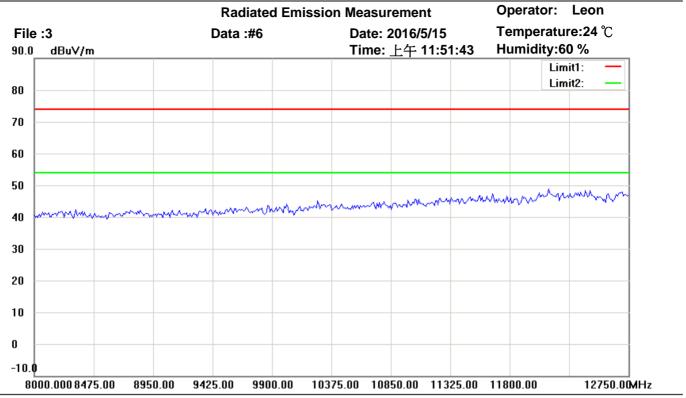

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

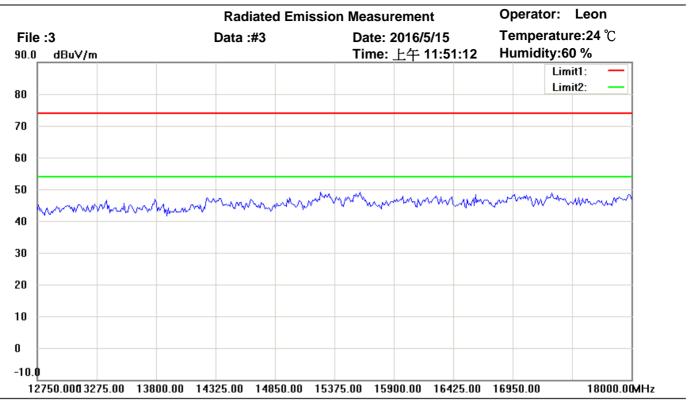

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

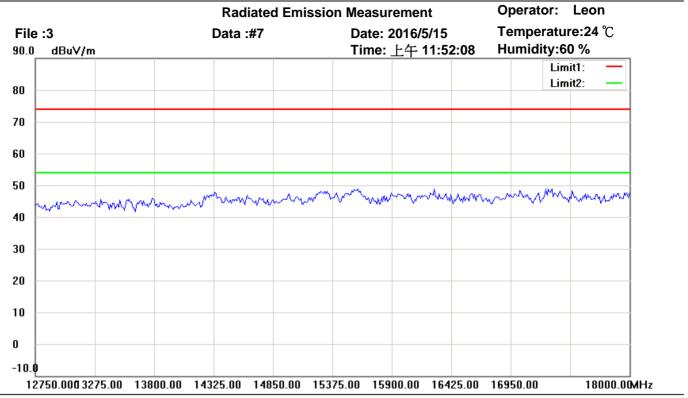

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

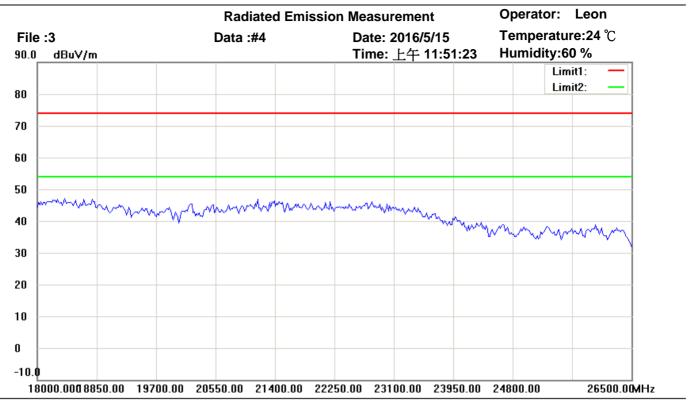

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

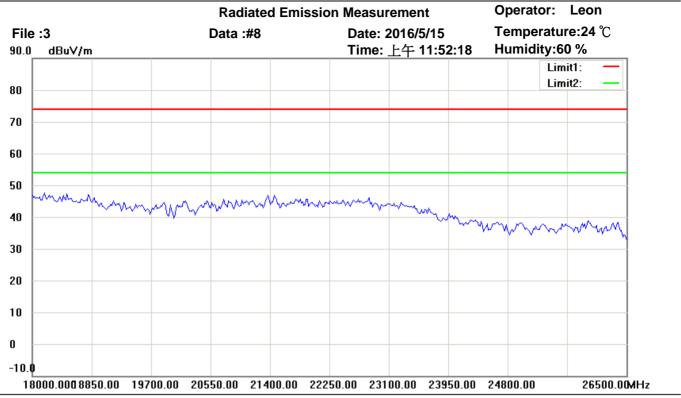

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH1

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

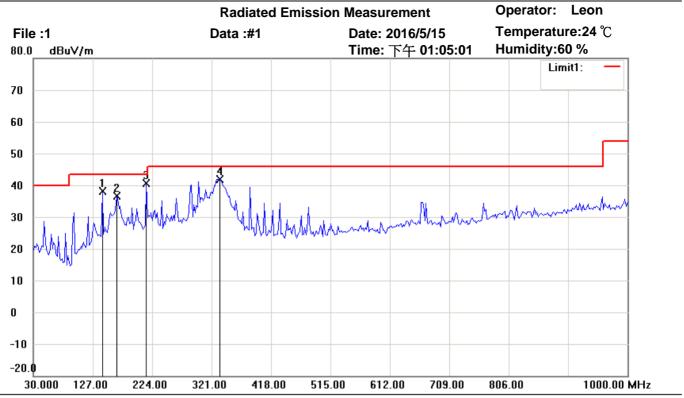

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	45.09	peak	-6.97	38.12	43.50	100	75	-5.38	
	166.0721	46.21	peak	-9.52	36.69	43.50	100	140	-6.81	
*	214.6692	50.43	peak	-9.73	40.70	43.50	100	95	-2.80	
	335.1904	46.85	peak	-4.87	41.98	46.00	100	120	-4.02	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

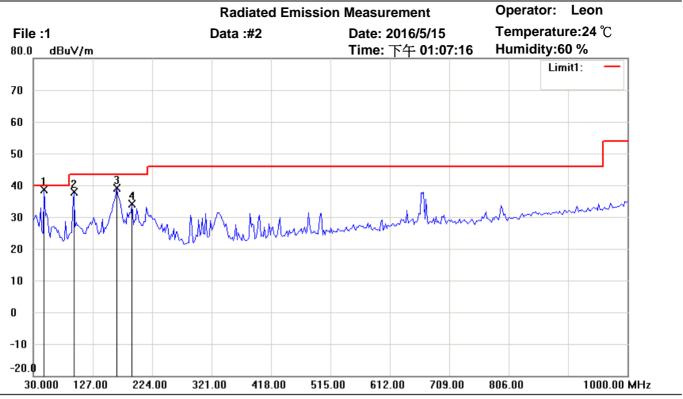

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical

Test Mode: RX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	47.89	peak	-9.26	38.63	40.00	100	45	-1.37	
	96.0922	48.77	peak	-10.89	37.88	43.50	100	110	-5.62	
	166.0721	48.53	peak	-9.52	39.01	43.50	100	175	-4.49	
	191.3427	45.12	peak	-10.95	34.17	43.50	100	60	-9.33	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

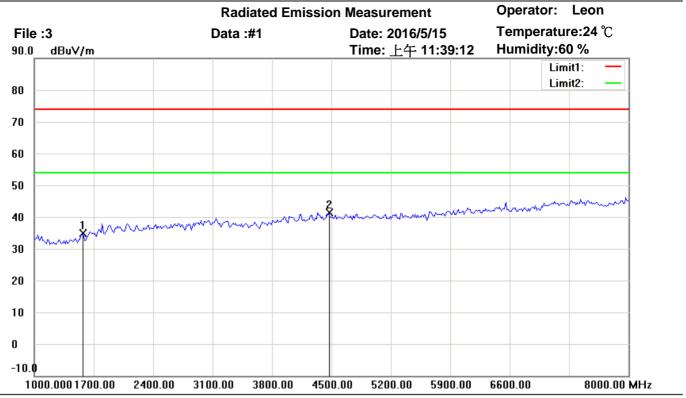

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1575.150	43.29	peak	-8.42	34.87	74.00	100	235	-39.13	
*	4464.930	42.10	peak	-0.79	41.31	74.00	100	190	-32.69	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

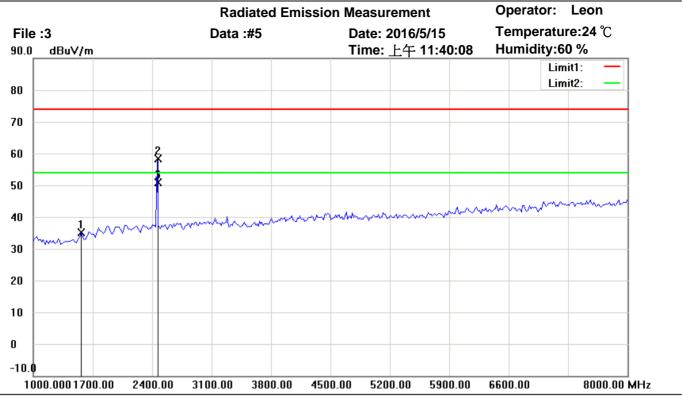

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.80	peak	-8.56	35.24	74.00	100	55	-38.76	
	2461.906	62.95	peak	-4.62	58.33	74.00	203	203	-15.67	
*	2461.906	55.62	AVG	-4.62	51.00	54.00	203	203	-3.00	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

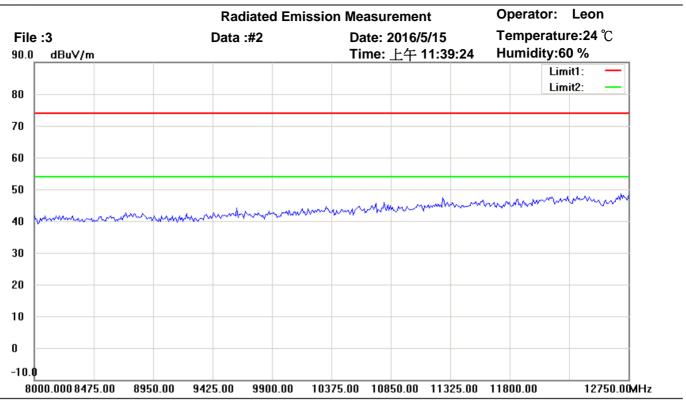

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

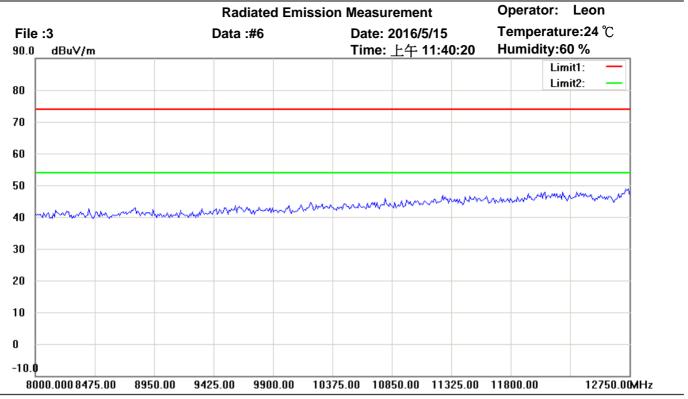

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

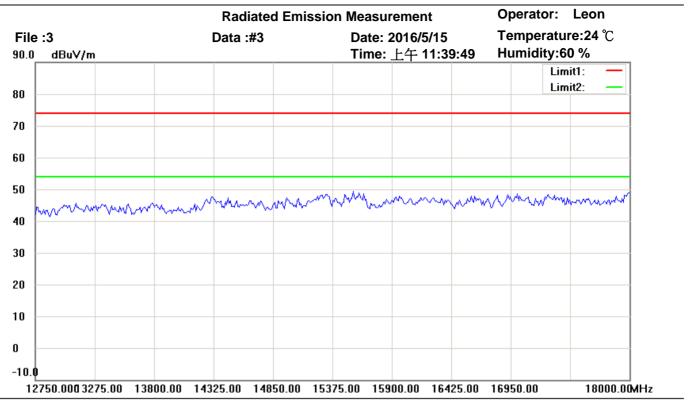

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

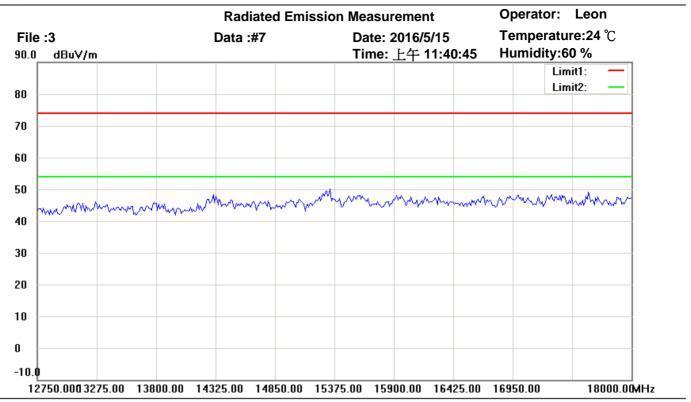

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

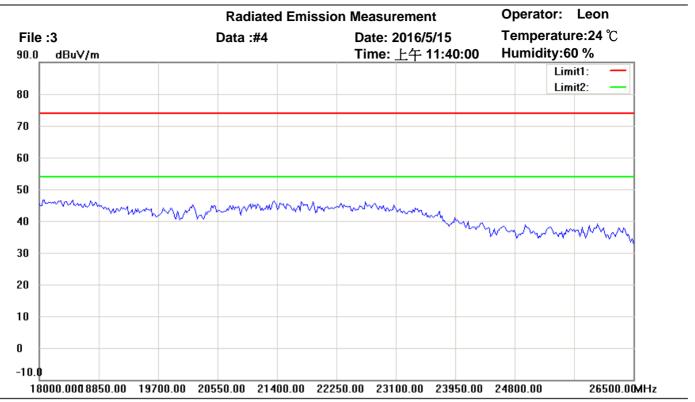

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

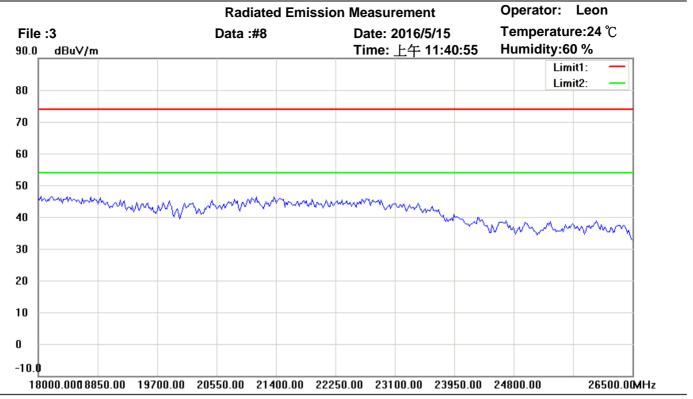

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH6

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

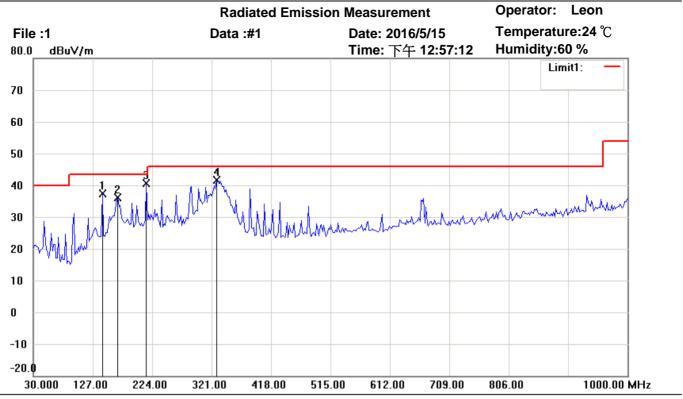

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Horizontal

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	142.7453	44.34	peak	-6.97	37.37	43.50	100	80	-6.13	
	168.0160	45.94	peak	-9.74	36.20	43.50	100	170	-7.30	
*	214.6692	50.29	peak	-9.73	40.56	43.50	100	245	-2.94	
	329.3586	46.59	peak	-4.99	41.60	46.00	100	195	-4.40	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

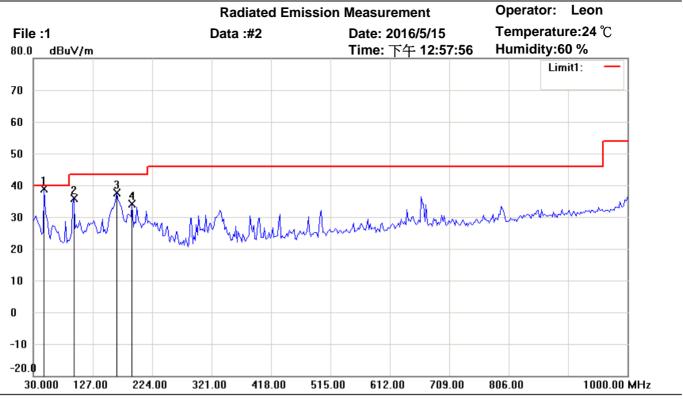

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_30-1000MHz Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	47.4950	48.08	peak	-9.26	38.82	40.00	100	135	-1.18	
	96.0922	46.81	peak	-10.89	35.92	43.50	100	40	-7.58	
	166.0721	47.18	peak	-9.52	37.66	43.50	100	170	-5.84	
	191.3427	45.04	peak	-10.95	34.09	43.50	100	155	-9.41	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

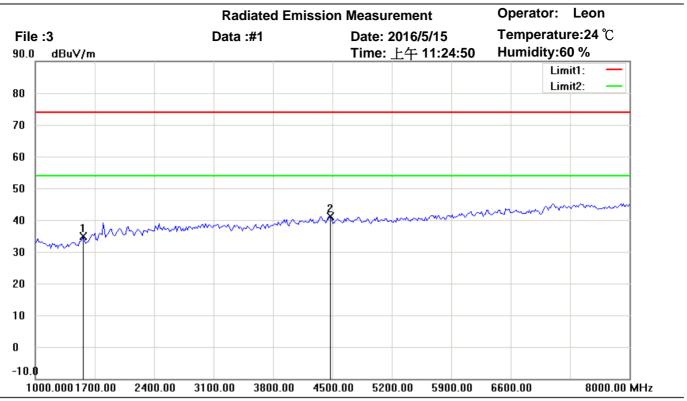

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1561.122	43.40	peak	-8.56	34.84	74.00	100	25	-39.16	
*	4464.930	41.99	peak	-0.79	41.20	74.00	100	170	-32.80	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

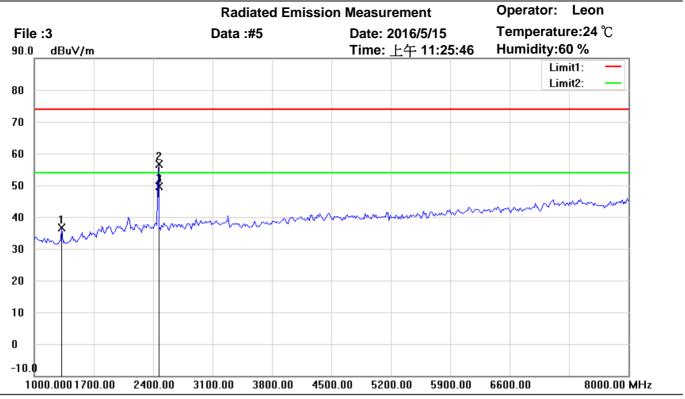

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1322.645	45.87	peak	-9.34	36.53	74.00	100	75	-37.47	
	2458.918	61.35	peak	-4.63	56.72	74.00	180	220	-17.28	
*	2458.918	54.17	AVG	-4.63	49.54	54.00	180	220	-4.46	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

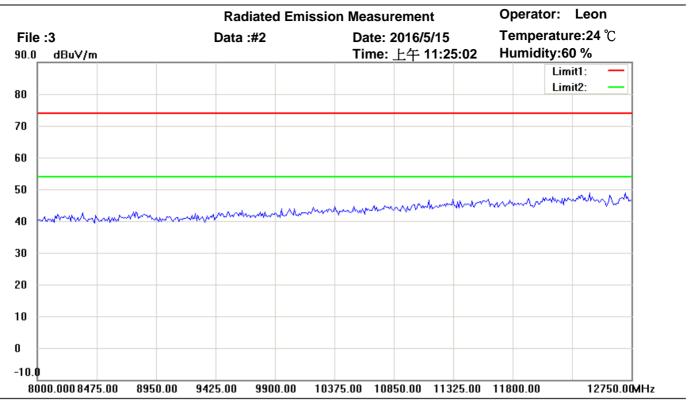

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
IVIK.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

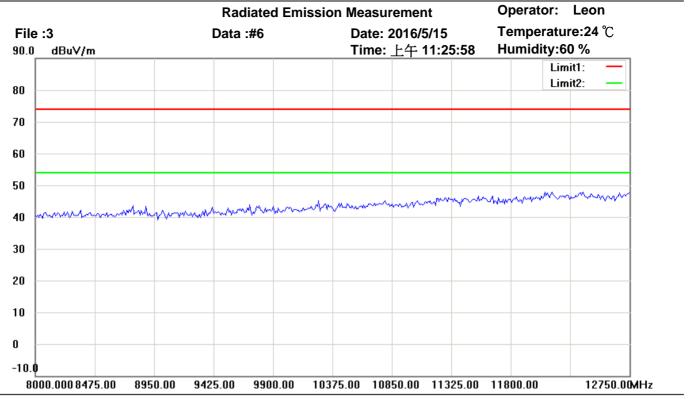

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3Vd.c. M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

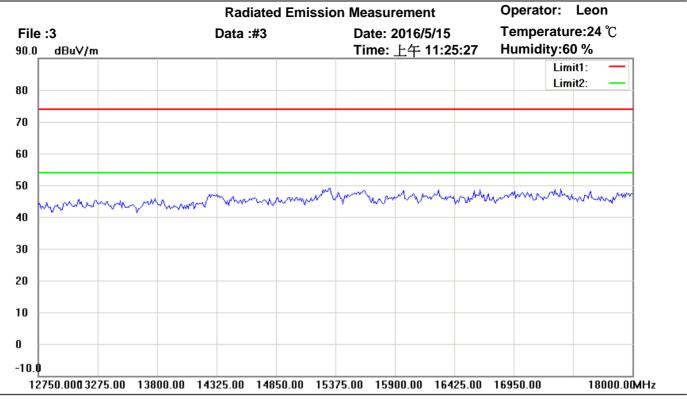

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

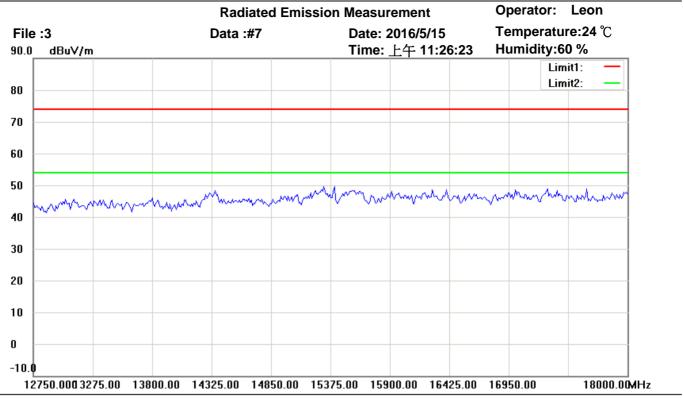

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical


EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

Mk.	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment
IVIK.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)	



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

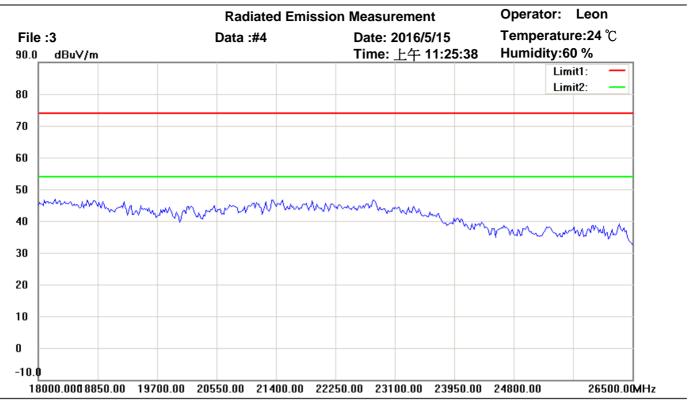

Site: Chamber


Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Horizontal

Test Mode: RX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l



Tel:+886-2-6606-8877 Fax:+886-2-6606-8875

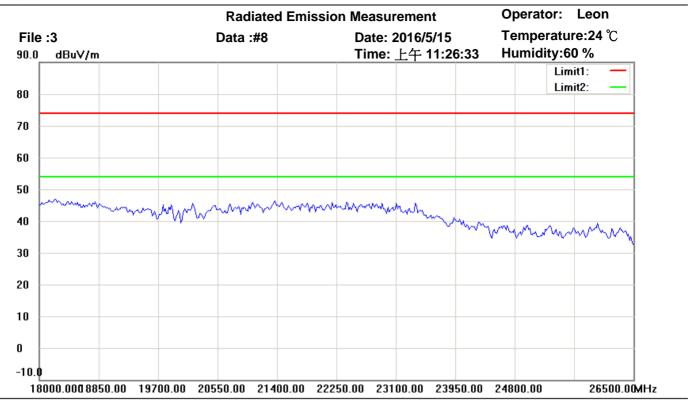

Site: Chamber

Condition: FCC\_part 15 RE-Class B\_Above 1GHz\_PK Polarization: Vertical

EUT: W6M21601-15579 Power: 3.3 Vd.c.
M/N: Distance: 3m

Test Mode: RX 802.11n 20M CH11

	Frequency	Reading	Detector	Corr. factor	Result	Limit	Ant.Pos	Tab.Pos	Margin	Comment	1
Mk.	(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(cm)	(deg.)	(dB)		l