



FCC PART 15.247 TEST REPORT

For

Ingenico Inc.

101 Federal St, Suite 700, 7th flr, Boston, Massachusetts, 02110, United States

FCC ID: 2ABY6-MOB65

Report Type: Original Report		Product Type: Mobile Payment Terminal
Test Engineer:	Winnie Yang	Winnie Yang
Report Number:	RXM19073105	5-00C
Report Date:	2019-09-06	
Reviewed By:	Oscar Ye RF Leader	Oscar. Ye
Prepared By:		88934268

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

Report No.: RXM190731055-00C

GENERAL INFORMATION	
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S) TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	
EXTERNAL I/O CABLE	,
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE	
MEASUREMENT RESULT	
FCC §15.203 – ANTENNA REQUIREMENT	
APPLICABLE STANDARD	
Antenna Connector Construction	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	
EUT Setup	
EMI TEST RECEIVER SETUP	
TEST PROCEDURE	14
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	18
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
Test Results Summary	
TEST DATA	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST PROCEDURE	
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH	
APPLICABLE STANDARD TEST PROCEDURE	
TEST DATA	

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	43
APPLICABLE STANDARD	43
TEST PROCEDURE	
TEST DATA	43
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	46
APPLICABLE STANDARD	46
TEST PROCEDURE	
TEST DATA	46
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	62
APPLICABLE STANDARD	62
TEST PROCEDURE	
TEST DATA	62
FCC §15.247(d) - BAND EDGES TESTING	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
Test Data	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Ingenico Inc.
Tested Model	Moby/6500
Product Type	Mobile Payment Terminal
Dimension	99 mm(L)*55.6 mm(W)*15.2 mm(H)
Power Supply	DC3.7V

Report No.: RXM190731055-00C

Objective

This test report is prepared on behalf of *Ingenico Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS and Part 15.225 DXX submissions with FCC ID: 2ABY6-MOB65.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 75

^{*}All measurement and test data in this report was gathered from production sample serial number: 20190731055. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-07-31)

Measurement Uncertainty

	Item	Uncertainty
AC Power Line	es Conducted Emissions	3.19dB
RF conducte	ed test with spectrum	0.9dB
RF Output Po	ower with Power meter	0.5dB
	30MHz~1GHz	6.11dB
De l'ete l'encieden	1GHz~6GHz	4.45dB
Radiated emission	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Оссир	pied Bandwidth	0.5kHz
Te	emperature	1.0℃
Humidity		6%

Report No.: RXM190731055-00C

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FCC Part 15.247 Page 5 of 75

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	•••	
•••	•••	•••	
•••	•••	78	2480
39	2441	/	/

Report No.: RXM190731055-00C

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test software: QRCT

GFSK, $\pi/4$ -DQPSK, 8DPSK Power level: Default.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

FCC Part 15.247 Page 6 of 75

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263


Report No.: RXM190731055-00C

External I/O Cable

Cable Description	Length (m)	From Port	То
USB Cable	1.0	EUT	Notebook
Power Cable	1.0	Notebook	Adapter


Block Diagram of Test Setup

For Conducted Emissions:

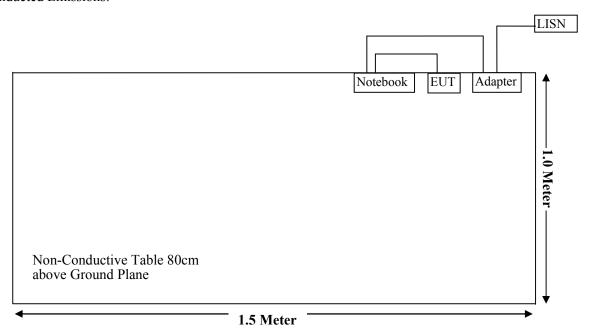

FCC Part 15.247 Page 7 of 75


For Radiated Emissions(Below 1GHz):

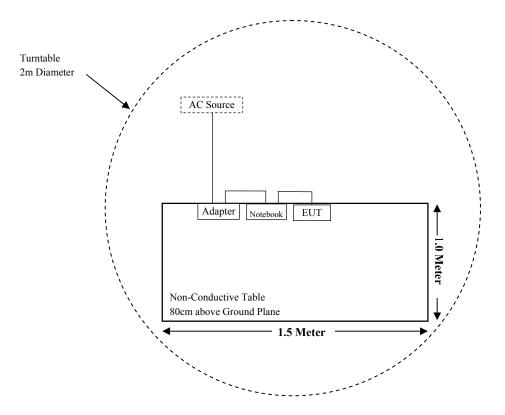

FCC Part 15.247 Page 8 of 75

Report No.: RXM190731055-00C

For Radiated Emissions(Above 1GHz):

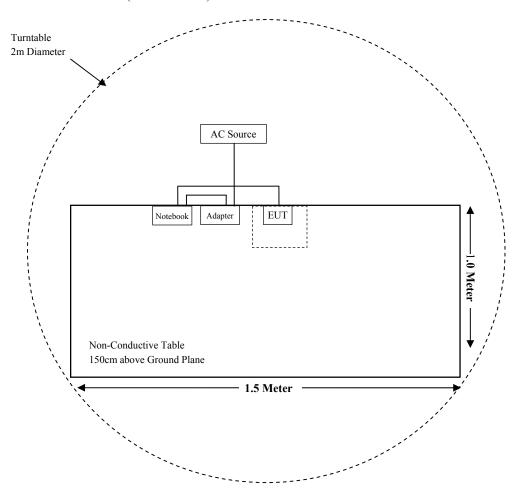

FCC Part 15.247 Page 9 of 75

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 &§2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
\$15.205, \$15.209 & \$15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Report No.: RXM190731055-00C

FCC Part 15.247 Page 10 of 75

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	Radiated En	nission Test (Cha	mber 1#)		
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrunent	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
	Radiated En	nission Test (Cha	mber 2#)		
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-05-30	2020-05-29
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	MICRO-COAX Coaxial Cable		013	2019-08-15	2020-08-14
	R	F Conducted Test			
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2019-08-05	2020-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Ingenico Inc.	RF Cable	Ingenico Inc. C01	C01	Each Time	N/A
	Cond	lucted Emission T			
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03- 101746-zn	2019-07-11	2020-07-10
Audix	Test Software	e3	V9		
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

Report No.: RXM190731055-00C

FCC Part 15.247 Page 11 of 75

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (I), §1.1310 &§2.1093 –RF EXPOSURE

Applicable Standard

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RXM190731055-00C

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/ (min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f (GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

Mode	Frequency Range		une-up ed Power	Calculated Distance	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(MHz)	(dBm)	(mW)	(mm)	value	(1-g 5/11t)	Laciusion
BT3.0	2402~2480	7.00	5.01	5	1.6	3.0	Yes
BLE	2402~2480	6.50	4.47	5	1.4	3.0	Yes

Result: No SAR test is required.

FCC Part 15.247 Page 12 of 75

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RXM190731055-00C

Antenna Connector Construction

The EUT has a PCB antenna for Bluetooth and the antenna gain is 0.5 dBi, which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.


FCC Part 15.247 Page 13 of 75

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

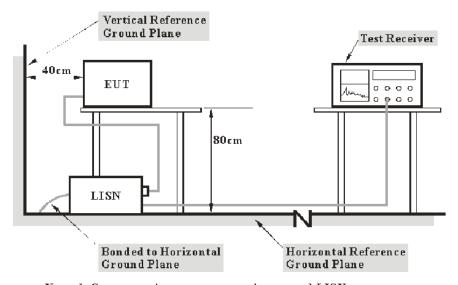

Report No.: RXM190731055-00C

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

from other units and other metal planes support units.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 14 of 75

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Report No.: RXM190731055-00C

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

The "Over Limit" column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	22℃
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Winnie Yang on 2019-08-17.

EUT operation mode: Transmitting in middle channel of 8DPSK (worst case)

FCC Part 15.247 Page 15 of 75

AC 120V/60 Hz, Line

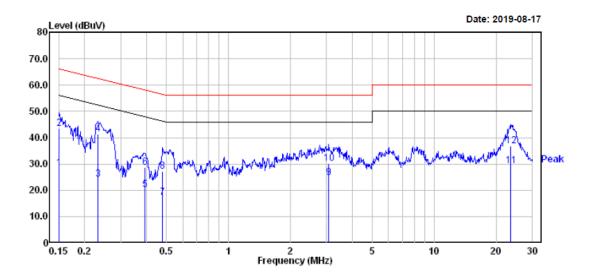


Report No.: RXM190731055-00C

		Read			Limit	0ver	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	8.50	19.82	28.32			Average
2	0.150	23.80	19.82	43.62		-22.38	_
3	0.232	4.20	19.82	24.02	52.39	-28.37	Average
4	0.232	21.60	19.82	41.42	62.39	-20.97	QP
5	0.391	0.50	19.75	20.25	48.03	-27.78	Average
6	0.391	9.00	19.75	28.75	58.03	-29.28	QP
7	0.479	-2.50	19.76	17.26	46.36	-29.10	Average
8	0.479	7.40	19.76	27.16	56.36	-29.20	QP
9	3.074	5.40	19.46	24.86	46.00	-21.14	Average
10	3.074	10.70	19.46	30.16	56.00	-25.84	QP
11	23.511	9.59	19.77	29.36	50.00	-20.64	Average
12	23.511	17.09	19.77	36.86	60.00	-23.14	QP

FCC Part 15.247 Page 16 of 75

AC 120V/60 Hz, Neutral

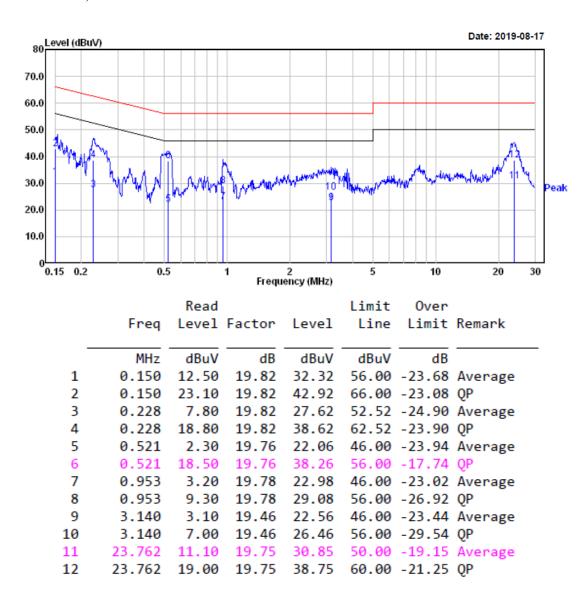

Report No.: RXM190731055-00C

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

FCC Part 15.247 Page 17 of 75

²⁾ Over Limit (dB) = Read level (dB μ V) + Factor (dB) - Limit (dB μ V)

FCC $\S15.205$, $\S15.209$ & $\S15.247(d)$ – RADIATED EMISSIONS


Report No.: RXM190731055-00C

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

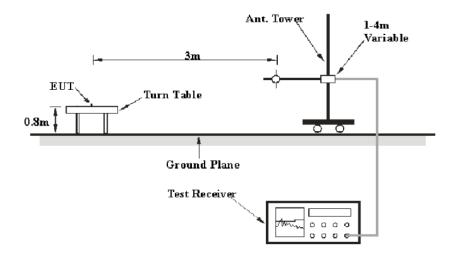

Above 1GHz:

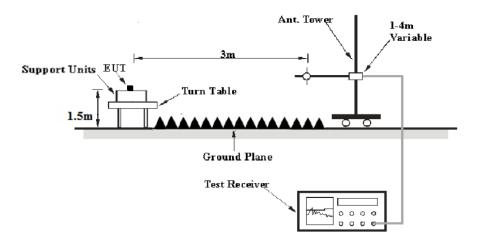

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

FCC Part 15.247 Page 18 of 75

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Report No.: RXM190731055-00C

Frequency Range RBW		Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1CHz	1MHz	3 MHz	/	PK
Above 1GHz	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V /m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The "Margin" column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

FCC Part 15.247 Page 19 of 75

Test Data

Environmental Conditions

Temperature:	24.8~25.2℃
Relative Humidity:	48~50%
ATM Pressure:	101.2~101.3kPa

The testing was performed by Winnie Yang from 2019-08-26 to 2019-08-31.


EUT operation mode: Transmitting

Spurious Emission Test:

30MHz-1GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case is the **middle channel of 8DPSK Mode in Z-axis of orientation** was recorded

Report No.: RXM190731055-00C

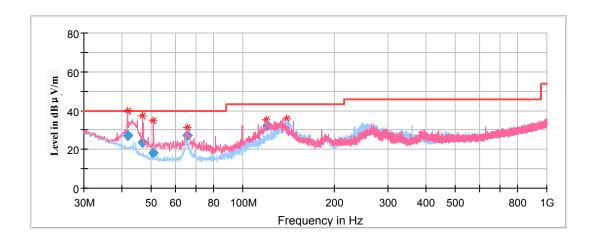

Frequency	Corrected Amplitude	Rx Antenna		Turntable	Corrected	Limit	Margin	
(MHz)	Quasi-peak (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)	
41.76	27.11	200	V	157	-12.7	40.00	12.89	
46.85	23.86	100	V	156	-14.7	40.00	16.14	
50.86	18.08	100	V	317	-17.6	40.00	21.92	
65.51	26.97	100	V	307	-17.6	40.00	13.03	
120.02	32.12	100	V	317	-11.2	43.50	11.38	
139.28	31.70	200	Н	172	-11.9	43.50	11.80	

FCC Part 15.247 Page 20 of 75

1GHz-18GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case is the **middle channel of 8DPSK Mode in Z-axis of orientation** was recorded


Report No.: RXM190731055-00C

Note:

- 1. This test was performed with the 2.4-2.5 GHz notch filter.
- 2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) Amplifier Factor (dB) Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz



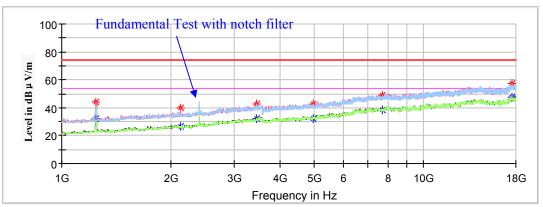


Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1241.40		31.95	150	V	22	-11.3	54.00	22.05
1241.40	44.36		150	V	22	-11.3	74.00	29.64
2125.40		26.47	150	V	341	-7.9	54.00	27.53
2125.40	39.61		150	V	341	-7.9	74.00	34.39
3454.80		32.35	200	Н	303	-3.6	54.00	21.65
3454.80	42.68		200	Н	303	-3.6	74.00	31.32
4947.40		32.34	150	Н	138	-0.4	54.00	21.66
4947.40	42.80		150	Н	138	-0.4	74.00	31.20
7704.80		38.31	200	V	120	6.5	54.00	15.69
7704.80	48.91		200	V	120	6.5	74.00	25.09
17564.80		47.53	200	Н	27	14.2	54.00	6.47
17564.80	57.28		200	Н	27	14.2	74.00	16.72

FCC Part 15.247 Page 21 of 75

Middle Channel: 2441MHz

Report No.: RXM190731055-00C

Full Spectrum

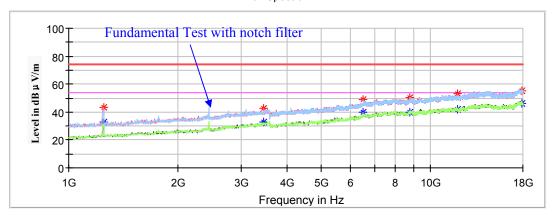


Fraguency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1248.20		32.82	200	V	338	-11.3	54.00	21.18
1248.20	43.12		200	V	338	-11.3	74.00	30.88
3454.80		33.13	150	V	245	-3.6	54.00	20.87
3454.80	42.57		150	V	245	-3.6	74.00	31.43
6504.60		39.83	200	Н	314	4.4	54.00	14.17
6504.60	48.90		200	Н	314	4.4	74.00	25.10
8782.60		39.96	150	Н	257	7.1	54.00	14.04
8782.60	50.64		150	Н	257	7.1	74.00	23.36
11880.00		41.84	150	V	209	10.0	54.00	12.16
11880.00	53.02		150	V	209	10.0	74.00	20.98
17850.40		46.13	200	Н	163	13.7	54.00	7.87
17850.40	55.02		200	Н	163	13.7	74.00	18.98

FCC Part 15.247 Page 22 of 75

High Channel: 2480MHz

Report No.: RXM190731055-00C

Full Spectrum

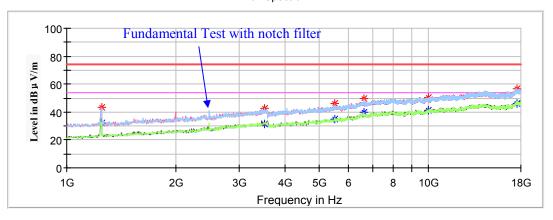


Frequency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin
(MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)
1248.20		32.21	150	V	67	-11.3	54.00	21.79
1248.20	43.55		150	V	67	-11.3	74.00	30.45
3519.40		31.78	200	Н	237	-3.5	54.00	22.22
3519.40	42.51		200	Н	237	-3.5	74.00	31.49
5508.40		35.16	150	V	244	1.4	54.00	18.84
5508.40	46.23		150	V	244	1.4	74.00	27.77
6613.40		39.81	150	Н	296	4.6	54.00	14.19
6613.40	49.32		150	Н	296	4.6	74.00	24.68
9989.60		41.44	200	V	314	8.2	54.00	12.56
9989.60	50.26		200	V	314	8.2	74.00	23.74
17602.20		46.31	150	Н	78	14.1	54.00	7.69
17602.20	56.55		150	Н	78	14.1	74.00	17.45

FCC Part 15.247 Page 23 of 75


18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8DPSK Mode in Z-axis of orientation was recorded

Report No.: RXM190731055-00C

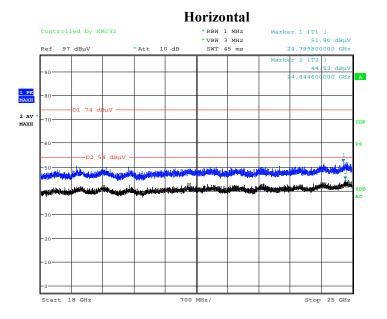

Date: 31.AUG.2019 01:51:07

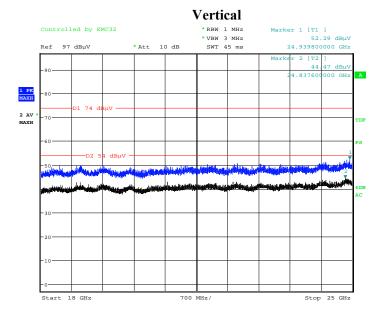

Date: 31.AUG.2019 02:02:23

FCC Part 15.247 Page 24 of 75

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8DPSK in Z-axis of orientation was recorded

Report No.: RXM190731055-00C

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB) Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V) Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Fraguency	Corrected Amplitude		Rx Antenna		Turntable	Corrected	Limit	Margin			
Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)	Degree	Factor (dB/m)	(dBµV/m)	(dB)			
			Low Char	nel: 2402M	Hz						
2390.00		40.03	150.0	Н	26.0	2.8	54.00	13.97			
2390.00	51.01		150.0	Н	26.0	2.8	74.00	22.99			
	High Channel: 2480MHz										
2483.50		41.25	150.0	Н	242.0	3.1	54.00	12.75			
2483.50	51.16		150.0	Н	242.0	3.1	74.00	22.84			

FCC Part 15.247 Page 25 of 75


Conducted Spurious Emissions at Antenna Port

BDR (GFSK): Low Channel

Report No.: RXM190731055-00C

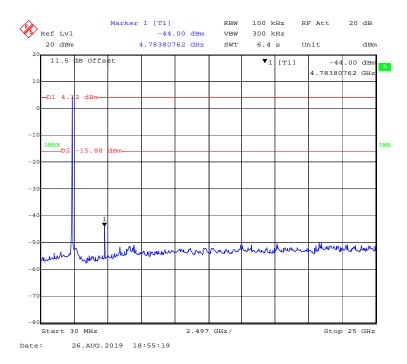


BDR (GFSK): Middle Channel

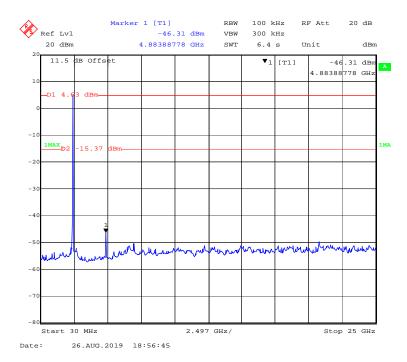


FCC Part 15.247 Page 26 of 75

BDR (GFSK): High Channel

Report No.: RXM190731055-00C

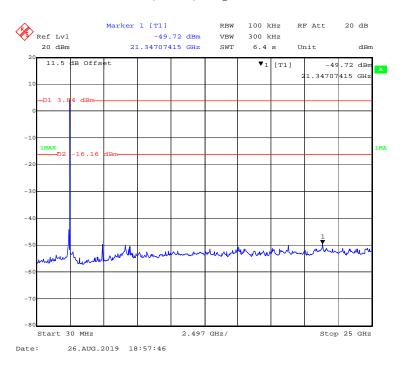


EDR (π/4-DQPSK): Low Channel

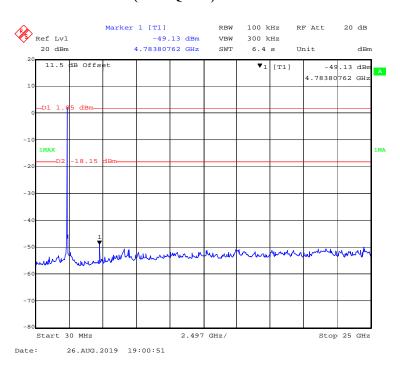


FCC Part 15.247 Page 27 of 75

EDR ($\pi/4$ -DQPSK): Middle Channel

Report No.: RXM190731055-00C

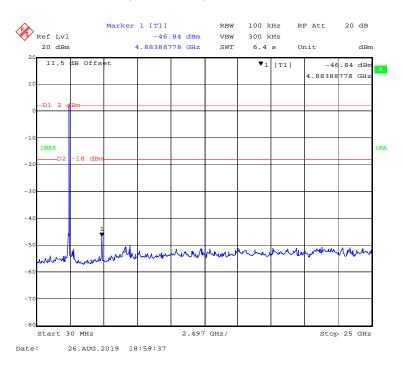


EDR ($\pi/4$ -DQPSK): High Channel

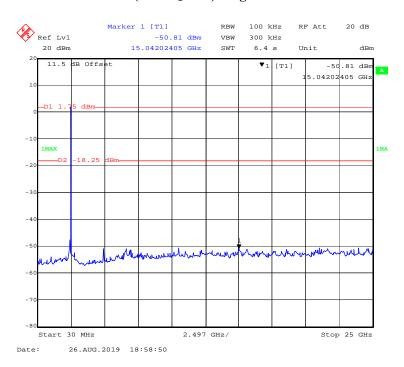


FCC Part 15.247 Page 28 of 75

EDR (8DPSK): Low Channel

Report No.: RXM190731055-00C

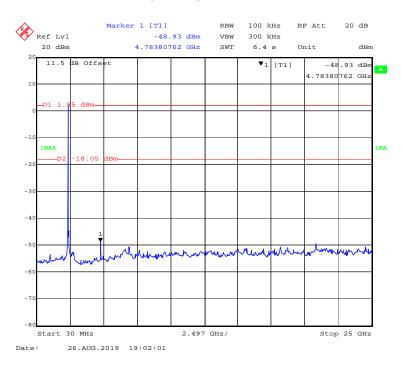


EDR (8DPSK): Middle Channel

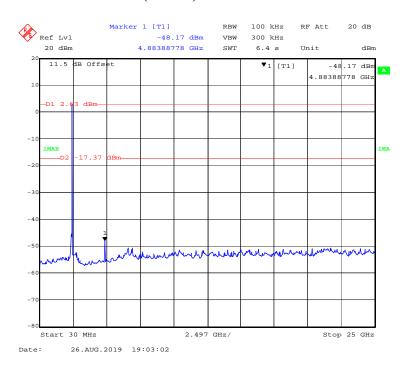

FCC Part 15.247 Page 29 of 75

EDR (8DPSK): High Channel

Report No.: RXM190731055-00C

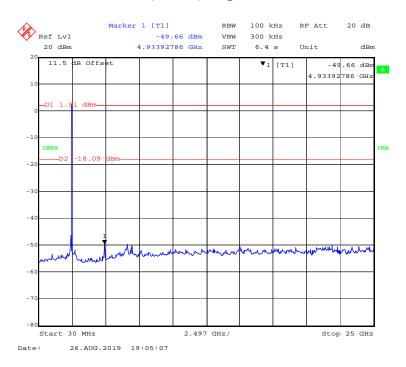

FCC Part 15.247 Page 30 of 75

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RXM190731055-00C

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth $(VBW) \ge RBW$.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data

Environmental Conditions

Temperature:	23.2 ℃
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2019-08-27.

EUT operation mode: Transmitting


Test Result: Compliant.

FCC Part 15.247 Page 31 of 75

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result	
	Low	2402	1.003	0.701	Pass	
	Adjacent	2403	1.003	0.701	Pass	
BDR	Middle	2441	1.003	0.701	Pass	
(GFSK)	Adjacent	2442	1.003	0.701	Pass	
	High	2480	1.003	0.701	D	
	Adjacent	2479	1.003	0.701	Pass	
	Low	2402	1.003	0.918	Pass	
	Adjacent	2403	1.003	0.918	Pass	
EDR	Middle	2441	1.003	0.922	Pass	
$(\pi/4\text{-DQPSK})$	Adjacent	2442	1.003		1 455	
	High	2480	1.003	0.026	Dogg	
	Adjacent	2479	1.003	0.926	Pass	
	Low	2402	1.003	0.886	Dogg	
	Adjacent	2403	1.003	0.880	Pass	
EDR	Middle	2441	1.002	0.007	D	
(8DPSK)	Adjacent	2442	1.003	0.886	Pass	
	High	2480	0.000	0.007	Dana	
	Adjacent	2479	0.999	0.886	Pass	

Note: For BDR and EDR mode, Limit = 20 dB bandwidth*2/3

BDR (GFSK): Low Channel

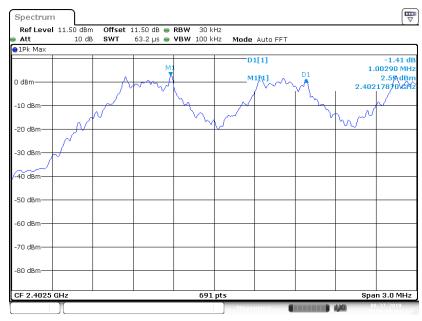


Date: 27 AUG .2019 09:56:33

FCC Part 15.247 Page 32 of 75

BDR (GFSK): Middle Channel

Report No.: RXM190731055-00C

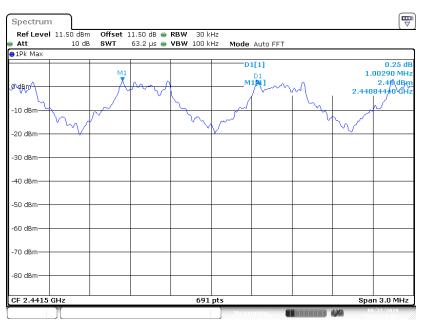

Date: 27 AUG .2019 09:54:57

BDR (GFSK): High Channel




Date: 27 AUG 2019 09:53:07

FCC Part 15.247 Page 33 of 75


EDR ($\pi/4$ -DQPSK): Low Channel

Report No.: RXM190731055-00C

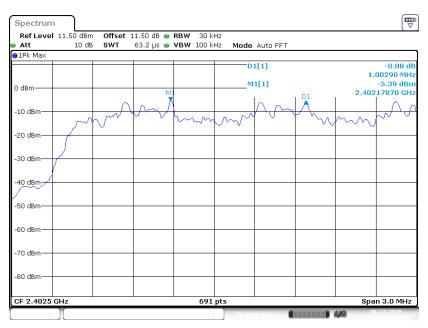

Date: 27 AUG 2019 09:47:41

EDR (π /4-DQPSK): Middle Channel

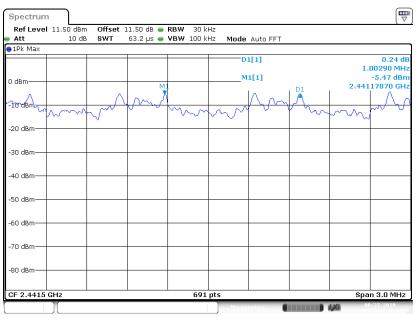


Date: 27 AUG 2019 09:50:16

FCC Part 15.247 Page 34 of 75


EDR ($\pi/4$ -DQPSK): High Channel

Report No.: RXM190731055-00C

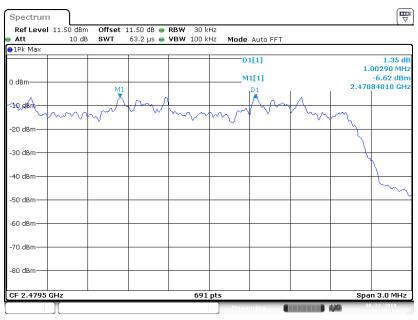

Date: 27 AUG .2019 09:52:07

EDR (8DPSK): Low Channel

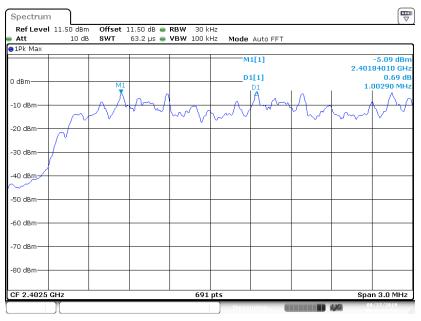


Date: 27 AUG 2019 09:46:18

FCC Part 15.247 Page 35 of 75


EDR (8DPSK): Middle Channel

Report No.: RXM190731055-00C

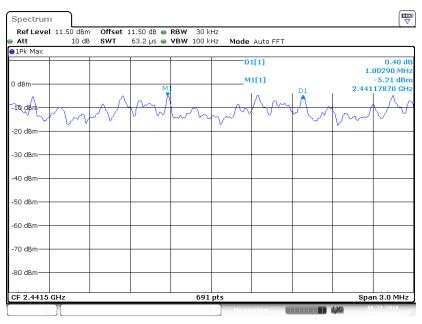

Date: 27 AUG 2019 09:45:11

EDR (8DPSK): High Channel

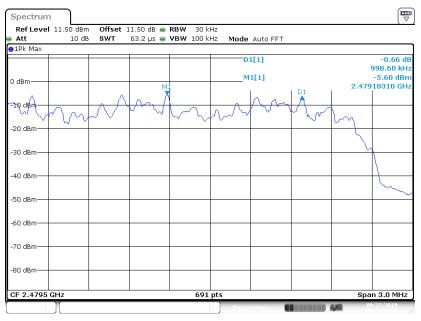

Date: 27 AUG 2019 09:43:15

FCC Part 15.247 Page 36 of 75

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RXM190731055-00C

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	23.2 ℃
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2019-08-26.

EUT operation mode: Transmitting


Test Result: Compliant.

FCC Part 15.247 Page 37 of 75

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	
	Low	2402	1.052	
BDR (GFSK)	Middle	2441	1.052	
(GI SII)	High	2480	1.052	
	Low	2402	1.377	
EDR (π/4-DQPSK)	Middle	2441	1.383	
	High	2480	1.389	
EDR (8DPSK)	Low	2402	1.329	
	Middle	2441	1.329	
	High	2480	1.329	

Report No.: RXM190731055-00C


BDR (GFSK): Low Channel

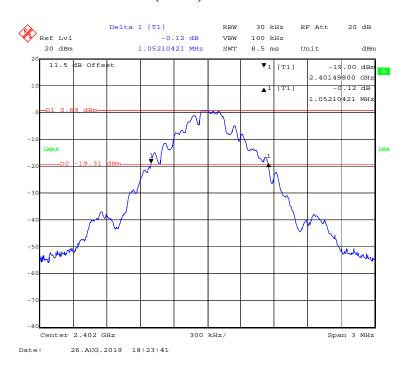


FCC Part 15.247 Page 38 of 75

BDR (GFSK): Middle Channel

Report No.: RXM190731055-00C

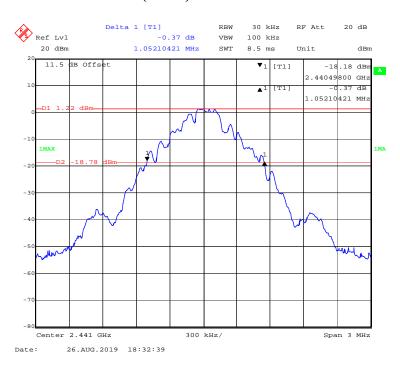


BDR (GFSK): High Channel

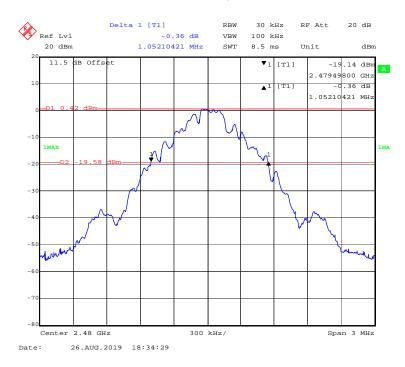


FCC Part 15.247 Page 39 of 75

EDR ($\pi/4$ -DQPSK): Low Channel

Report No.: RXM190731055-00C

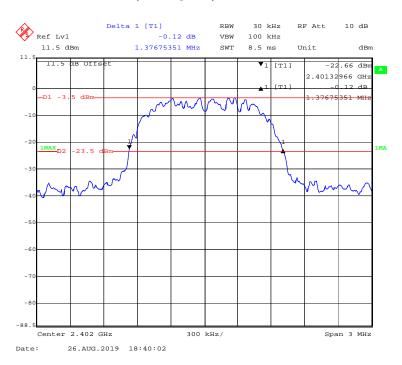


EDR(π/4-DQPSK): Middle Channel

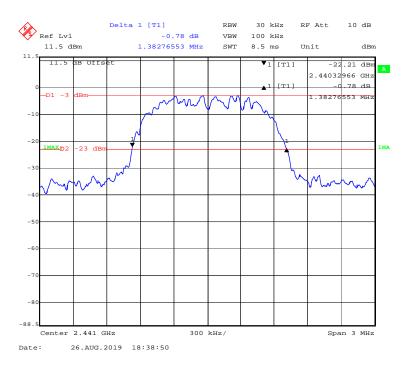


FCC Part 15.247 Page 40 of 75

EDR (π/4-DQPSK): High Channel

Report No.: RXM190731055-00C

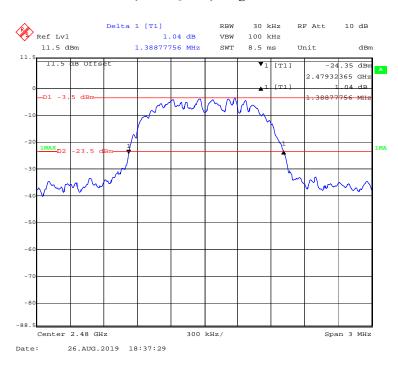


EDR (8DPSK): Low Channel

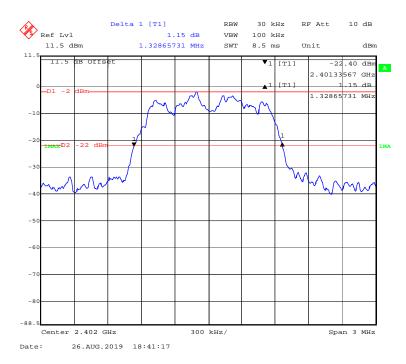


FCC Part 15.247 Page 41 of 75

EDR (8DPSK): Middle Channel

Report No.: RXM190731055-00C

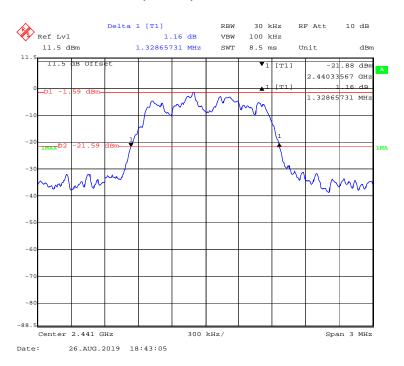

EDR (8DPSK): High Channel

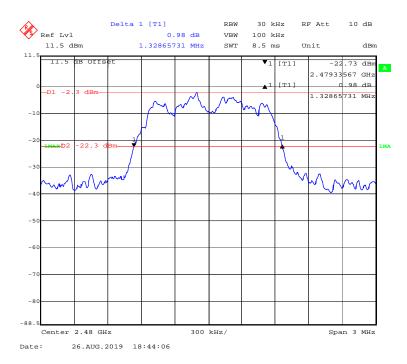

FCC Part 15.247 Page 42 of 75

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RXM190731055-00C

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. $VBW \ge RBW$.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data

Environmental Conditions

Temperature:	23.2 ℃
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2019-08-27.

EUT operation mode: Hopping


Test Result: Compliant.

FCC Part 15.247 Page 43 of 75

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

Report No.: RXM190731055-00C

BDR (GFSK): Number of Hopping Channels

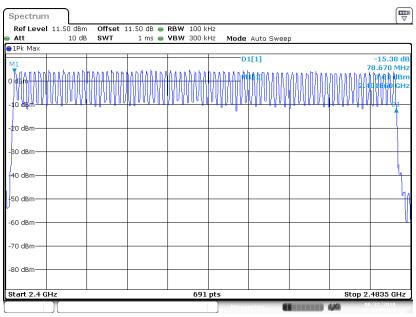


Date: 27 AUG 2019 09:59:10

FCC Part 15.247 Page 44 of 75


EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Report No.: RXM190731055-00C

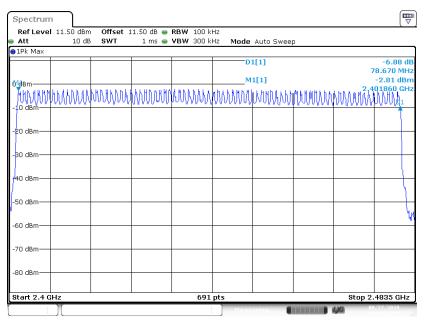

Date: 27 AUG 2019 10:00:47

EDR (8DPSK): Number of Hopping Channels

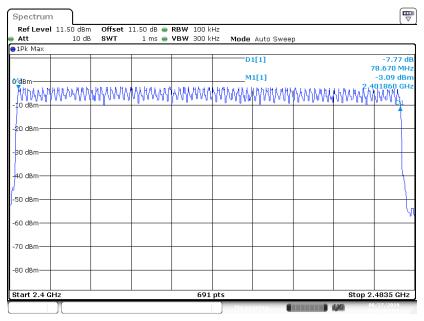

Date: 27 AUG 2019 10:02:06

FCC Part 15.247 Page 45 of 75

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RXM190731055-00C

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be \leq channel spacing and where possible RBW should be set \geq 1 / T, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data

Environmental Conditions

Temperature:	25.3℃
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Winnie Yang from 2019-08-27 to 2019-09-06.

EUT operation mode: Hopping

FCC Part 15.247 Page 46 of 75


Мо	de	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
		Low	0.413	0.132	0.4	Pass
	D.114	Middle	0.413	0.132	0.4	Pass
	DH1	High	0.413	0.132	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
		Low	1.649	0.264	0.4	Pass
BDR	DIII	Middle	1.678	0.268	0.4	Pass
(GFSK)	DH3	High	1.678	0.268	0.4	Pass
		No	ote: DH3:Dwell to	ime = Pulse time	*(1600/4/79)*31.6	6S
		Low	2.941	0.314	0.4	Pass
	DUI	Middle	2.941	0.314	0.4	Pass
	DH5	High	2.941	0.314	0.4	Pass
		No	ote: DH5:Dwell to	ime = Pulse time	*(1600/6/79)*31.6	6S
		Low	0.423	0.135	0.4	Pass
	a D.111	Middle	0.423	0.135	0.4	Pass
	2DH1	High	0.422	0.135	0.4	Pass
			te: 2DH1:Dwell t	time = Pulse time	*(1600/2/79)*31.	6S
		Low	1.683	0.269	0.4	Pass
EDR	2DH3	Middle	1.683	0.269	0.4	Pass
$(\pi/4\text{-DQPSK})$		High	1.683	0.269	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
		Low	2.941	0.314	0.4	Pass
	2DH5	Middle	2.935	0.313	0.4	Pass
		High	2.935	0.313	0.4	Pass
		No	te: 2DH5:Dwell t	time = Pulse time	*(1600/6/79)*31.	6S
	3DH1	Low	0.422	0.135	0.4	Pass
		Middle	0.423	0.135	0.4	Pass
		High	0.422	0.135	0.4	Pass
		Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
		Low	1.683	0.269	0.4	Pass
EDR	3DH3	Middle	1.683	0.269	0.4	Pass
(8DPSK)		High	1.683	0.269	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
		Low	2.935	0.313	0.4	Pass
	3DH5	Middle	2.935	0.313	0.4	Pass
		High	2.935	0.313	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

Report No.: RXM190731055-00C


FCC Part 15.247 Page 47 of 75

BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RXM190731055-00C

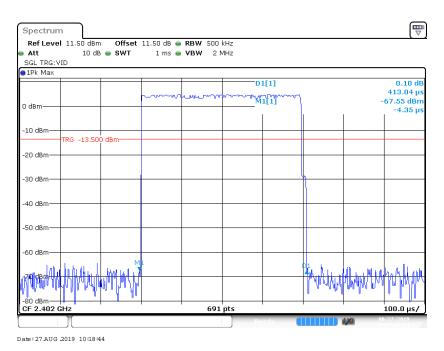


BDR (GFSK): Pulse time, Middle Channel, DH1

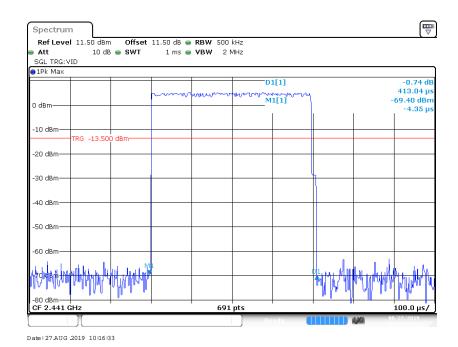

FCC Part 15.247 Page 48 of 75


BDR (GFSK): Pulse time, High Channel, DH1

Report No.: RXM190731055-00C

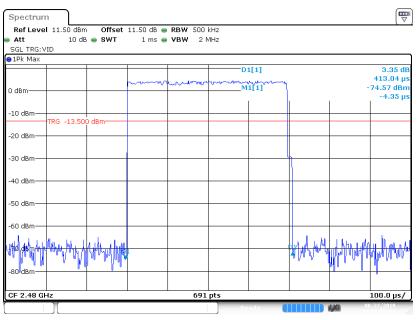

Date: 27 AUG .2019 10:17:57


BDR (GFSK): Pulse time, Low Channel, DH3

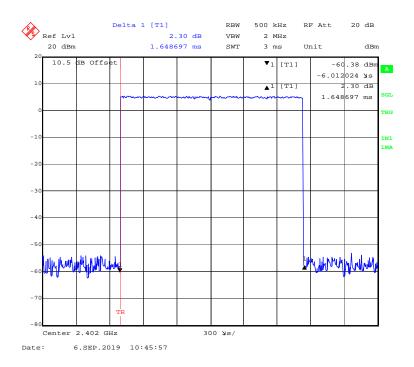


FCC Part 15.247 Page 49 of 75

BDR (GFSK): Pulse time, Middle Channel, DH3

Report No.: RXM190731055-00C

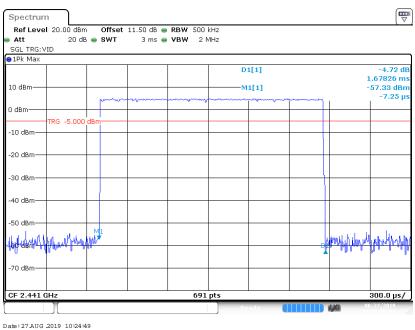

BDR (GFSK): Pulse time, High Channel, DH3

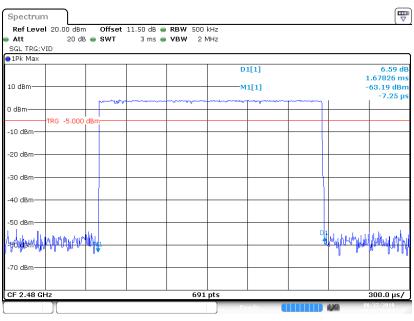


Date: 27 AUG .2019 10:25:32

Page 50 of 75 FCC Part 15.247


BDR (GFSK): Pulse time, Low Channel, DH5

Report No.: RXM190731055-00C

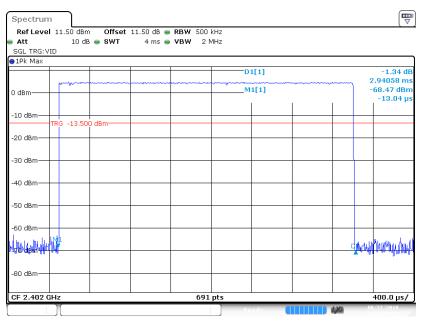

Date: 27 AUG 2019 10:36:31

BDR (GFSK): Pulse time, Middle Channel, DH5

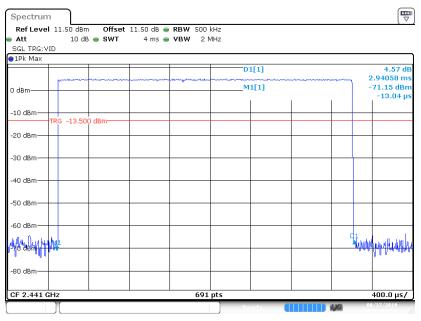


Date: 27 AUG 2019 10:35:57

FCC Part 15.247 Page 51 of 75


BDR (GFSK): Pulse time, High Channel, DH5

Report No.: RXM190731055-00C

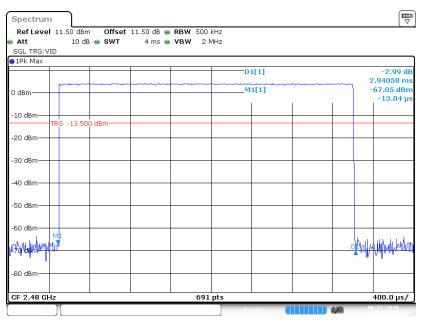

Date: 27 AUG 2019 10:35:05

EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

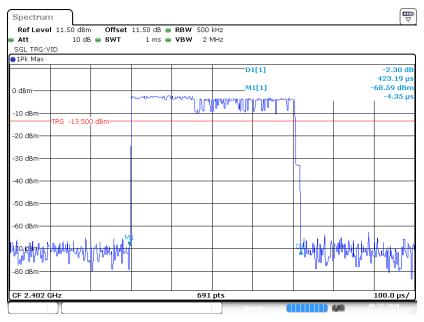


Date: 27 AUG .2019 10:13:43


FCC Part 15.247 Page 52 of 75

EDR (π/4-DQPSK):Pulse time, Middle Channel, 2DH1

Report No.: RXM190731055-00C

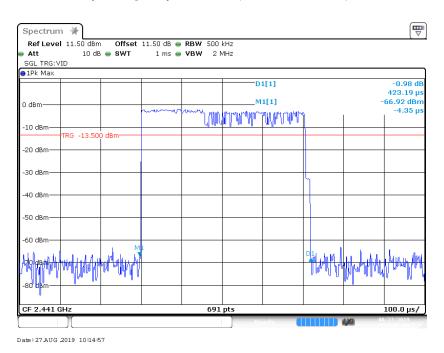


EDR (π/4-DQPSK):Pulse time, High Channel, 2DH1

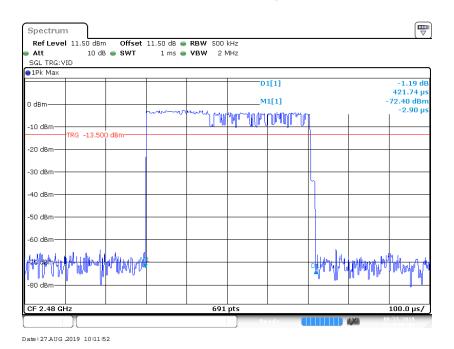


FCC Part 15.247 Page 53 of 75

EDR (π/4-DQPSK):Pulse time, Low Channel, 2DH3

Report No.: RXM190731055-00C

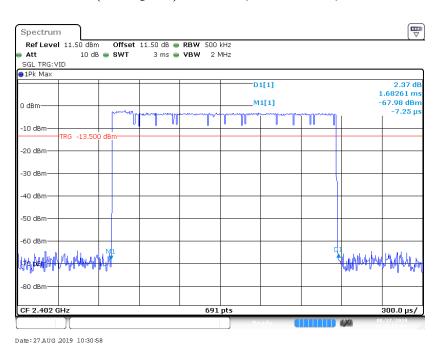

EDR (π/4-DQPSK):Pulse time, Middle Channel, 2DH3

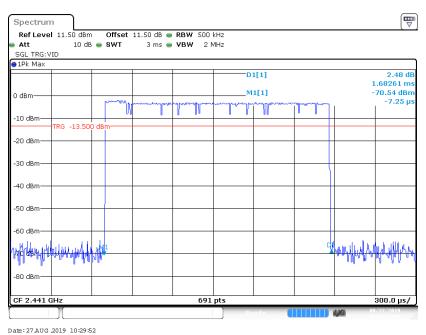


Date: 27 AUG 2019 10:29:52


FCC Part 15.247 Page 54 of 75

EDR (π/4-DQPSK):Pulse time, High Channel, 2DH3

Report No.: RXM190731055-00C

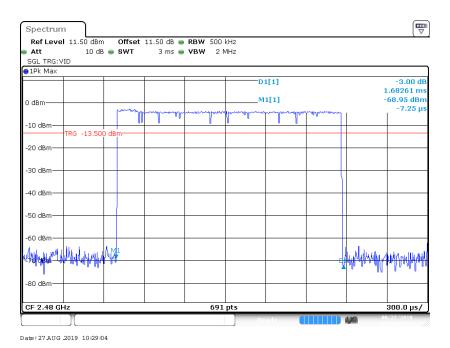


EDR (π/4-DQPSK):Pulse time, Low Channel, 2DH5

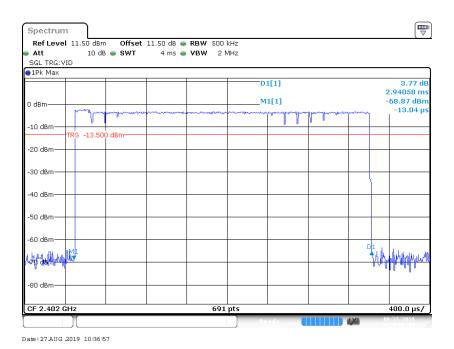


FCC Part 15.247 Page 55 of 75

EDR (π/4-DQPSK):Pulse time, Middle Channel, 2DH5

Report No.: RXM190731055-00C

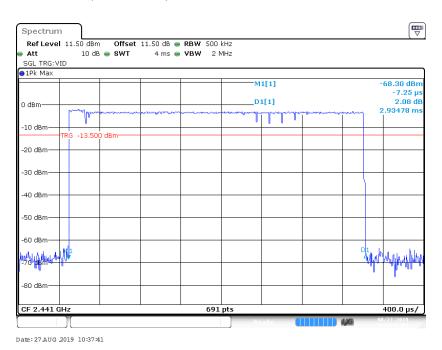

EDR (π/4-DQPSK):Pulse time, High Channel, 2DH5

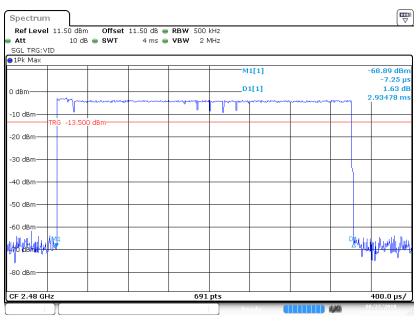


Date: 27 AUG .2019 10:38:25


FCC Part 15.247 Page 56 of 75

EDR (8DPSK): Pulse time, Low Channel, 3DH1

Report No.: RXM190731055-00C

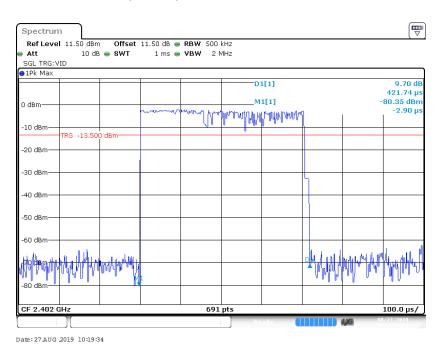

EDR (8DPSK): Pulse time, Middle Channel, 3DH1

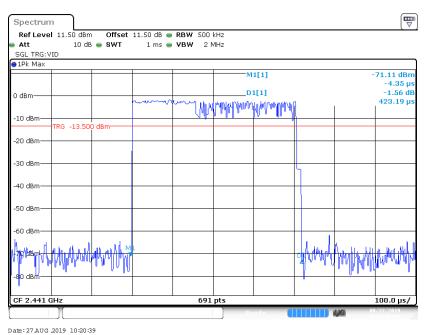


Date - 27 AUG 2019 10-20-39

FCC Part 15.247 Page 57 of 75


EDR (8DPSK): Pulse time, High Channel, 3DH1

Report No.: RXM190731055-00C

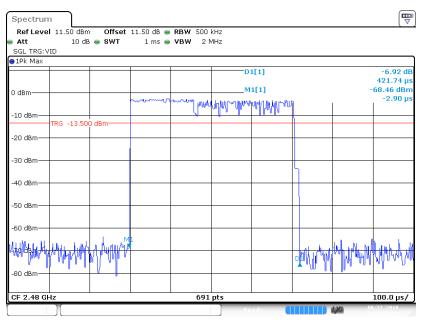

Date: 27 AUG 2019 10:21:25

EDR (8DPSK): Pulse time, Low Channel, 3DH3

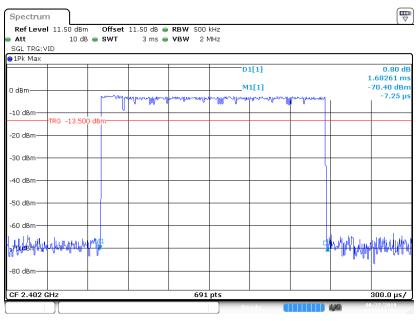


Date: 27 AUG 2019 10:31:34


FCC Part 15.247 Page 58 of 75

EDR (8DPSK): Pulse time, Middle Channel, 3DH3

Report No.: RXM190731055-00C

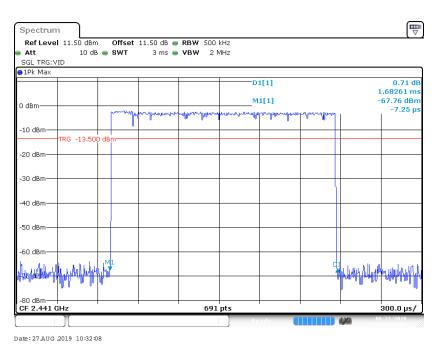

EDR (8DPSK): Pulse time, High Channel, 3DH3

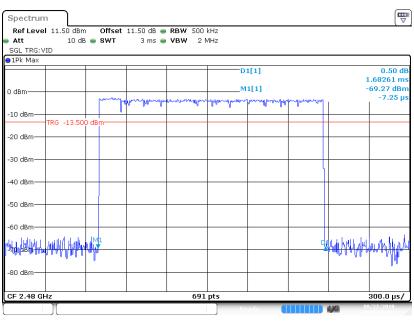


Date: 27 AUG .2019 10:32:45


FCC Part 15.247 Page 59 of 75

EDR (8DPSK): Pulse time, Low Channel, 3DH5

Report No.: RXM190731055-00C

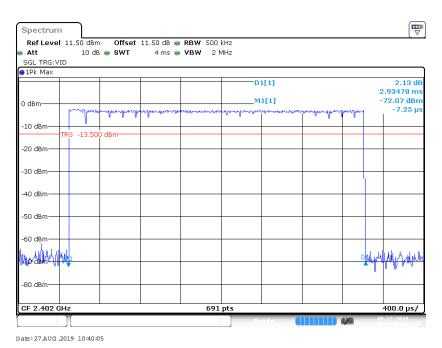

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

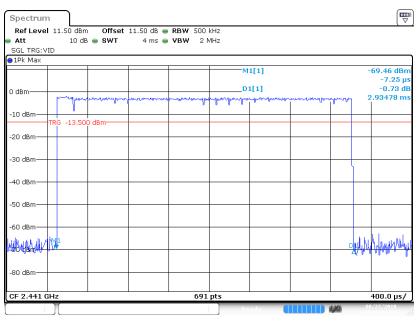


Date: 27 AUG .2019 10:39:25

FCC Part 15.247 Page 60 of 75

EDR (8DPSK): Pulse time, High Channel, 3DH5

Report No.: RXM190731055-00C

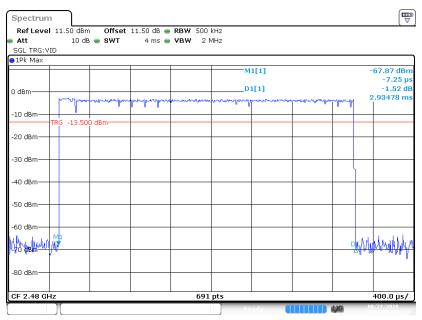

Date: 27 AUG .2019 10:38:50

FCC Part 15.247 Page 61 of 75

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RXM190731055-00C

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2019-08-26.

EUT operation mode: Transmitting

Test Result: Compliant.

FCC Part 15.247 Page 62 of 75


Mode	Frequency	Output Power		Limit
Mode	(MHz)	(dBm)	(mW)	(mW)
	2402	4.81	3.03	125
BDR (GFSK)	2441	5.40	3.47	125
(GF5K)	2480	4.56	2.86	125
EDR (π/4-DQPSK)	2402	6.15	4.12	125
	2441	6.67	4.65	125
	2480	5.90	3.89	125
EDR (8DPSK)	2402	6.41	4.38	125
	2441	6.78	4.76	125
	2480	6.02	4.00	125

Report No.: RXM190731055-00C


FCC Part 15.247 Page 63 of 75

BDR (GFSK): 2402MHz

Report No.: RXM190731055-00C

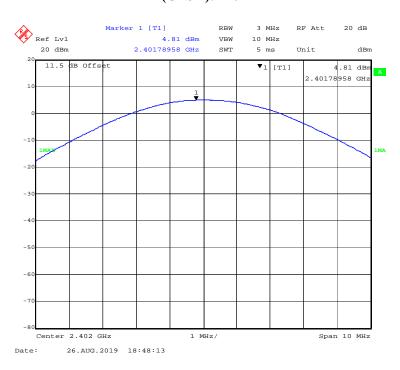


BDR (GFSK): 2441MHz

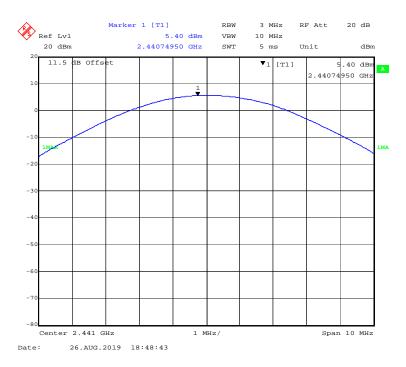


FCC Part 15.247 Page 64 of 75

BDR (GFSK): 2480MHz

Report No.: RXM190731055-00C

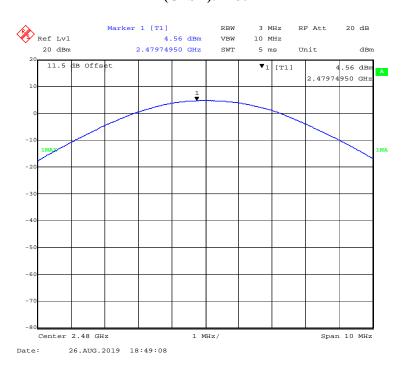


EDR($\pi/4$ -DQPSK): 2402MHz

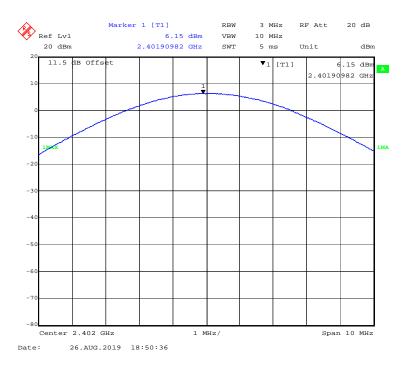


FCC Part 15.247 Page 65 of 75

EDR($\pi/4$ -DQPSK): 2441MHz

Report No.: RXM190731055-00C

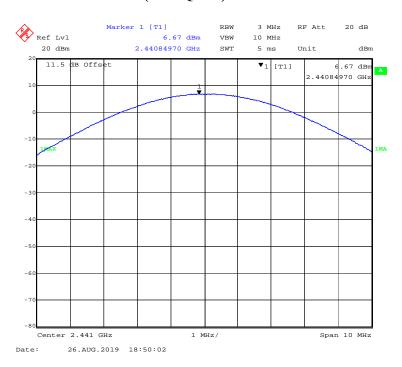


EDR($\pi/4$ -DQPSK): 2480MHz

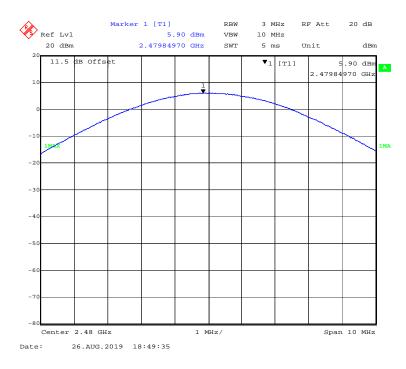


FCC Part 15.247 Page 66 of 75

EDR(8DPSK): 2402MHz

Report No.: RXM190731055-00C

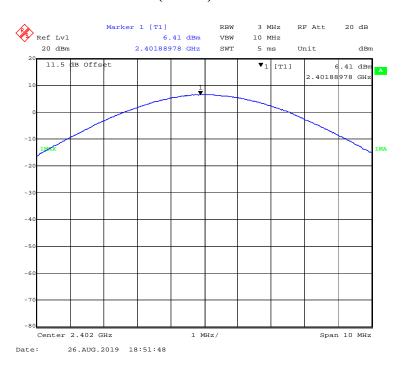


EDR(8DPSK): 2441MHz

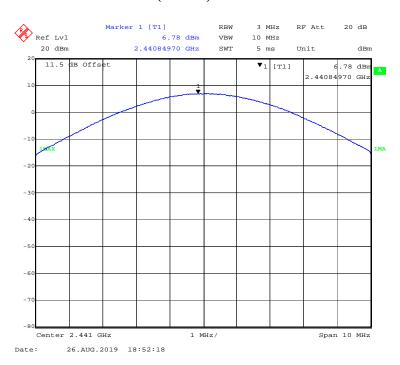

FCC Part 15.247 Page 67 of 75

EDR(8DPSK): 2480MHz

Report No.: RXM190731055-00C

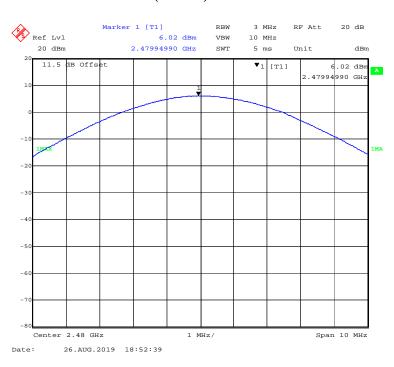

FCC Part 15.247 Page 68 of 75

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RXM190731055-00C

Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25.2℃
Relative Humidity:	48%
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2019-08-26.

EUT operation mode: Transmitting & Hopping


Test Result: Compliant.

FCC Part 15.247 Page 69 of 75


Band Edge

BDR (GFSK): Left Side - Transmitting

Report No.: RXM190731055-00C

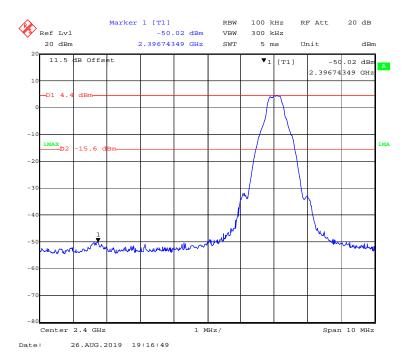


BDR (GFSK): Right Side - Transmitting

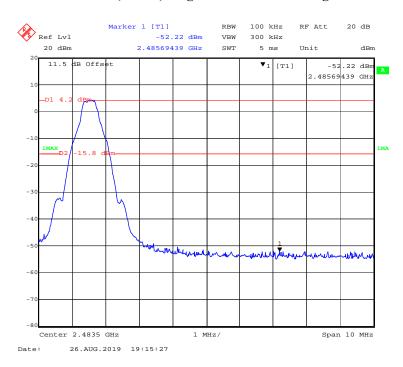

FCC Part 15.247 Page 70 of 75

EDR ($\pi/4$ -DQPSK): Left Side - Transmitting

Report No.: RXM190731055-00C

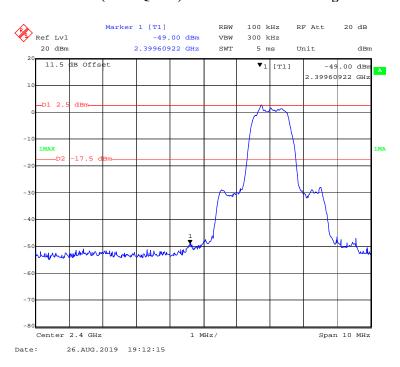


EDR ($\pi/4$ -DQPSK): Right Side - Transmitting




FCC Part 15.247 Page 71 of 75

EDR (8DPSK): Left Side - Transmitting

Report No.: RXM190731055-00C

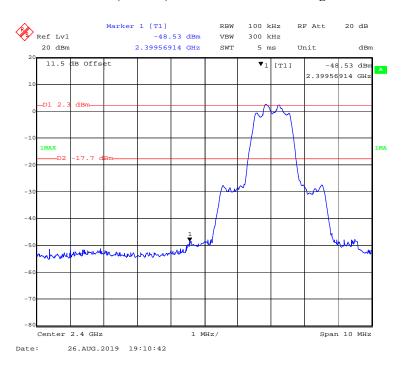


EDR (8DPSK): Right Side - Transmitting

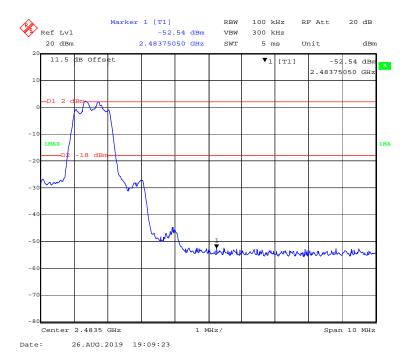


FCC Part 15.247 Page 72 of 75

BDR (GFSK): Left Side - Hopping

Report No.: RXM190731055-00C

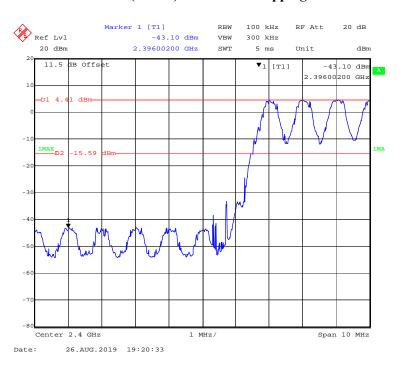


BDR (GFSK): Right Side- Hopping

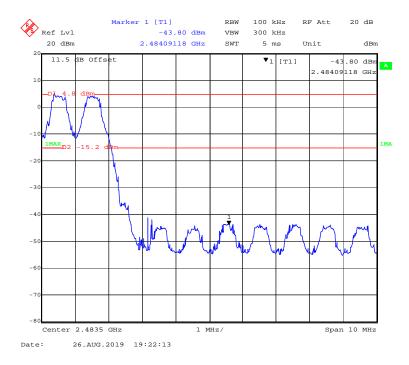


FCC Part 15.247 Page 73 of 75

EDR (π/4-DQPSK): Left Side- Hopping

Report No.: RXM190731055-00C

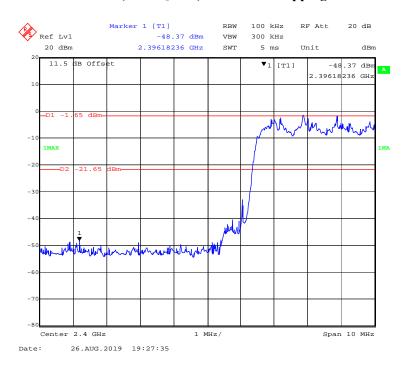


EDR ($\pi/4$ -DQPSK): Right Side-Hopping

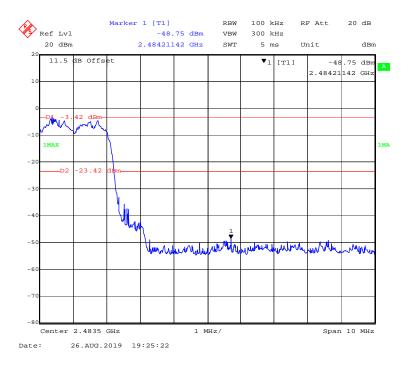


FCC Part 15.247 Page 74 of 75

EDR (8DPSK): Left Side- Hopping

Report No.: RXM190731055-00C

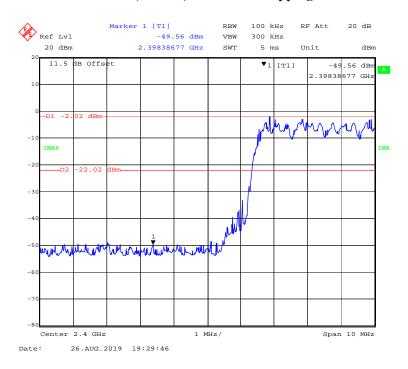

EDR (8DPSK): Right Side-Hopping

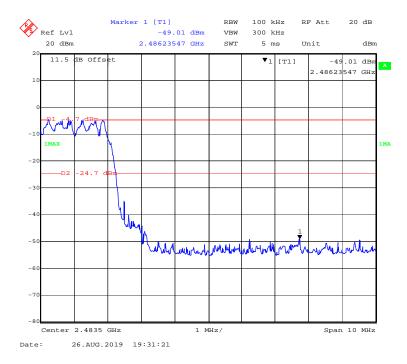

***** END OF REPORT *****

FCC Part 15.247 Page 75 of 75