

## **FCC 15.247 2.4 GHz Report**

**for**

**reIDEA Technology Inc.**

**No.41, Aly. 9, Ln. 306, Sec. 1, Binhai Rd., Tamsui Dist.,  
New Taipei City 25172, Taiwan (R.O.C.)**

<b>Brand</b>	<b>: ReIDEA</b>
<b>Product Name</b>	<b>: bPoint COMFORT</b>
<b>Model Name</b>	<b>: CB4C1</b>
<b>FCC ID</b>	<b>: 2ABYY-CB4C1</b>

## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION .....	4
<b>1. REPORT HISTORY.....</b>	<b>4</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. GENERAL INFORMATION .....</b>	<b>6</b>
3.1. Description of EUT .....	6
3.2. EUT Specifications Assessed in Current Report.....	7
3.3. Test Configuration.....	8
3.4. Tested Supporting System List.....	9
3.5. Setup Configuration .....	9
3.6. Operating Condition of EUT .....	9
3.7. Description of Test Facility .....	10
3.8. Measurement Uncertainty .....	10
<b>4. MEASUREMENT EQUIPMENT LIST.....</b>	<b>11</b>
4.1. Radiated Emission Measurement.....	11
4.2. RF Conducted Measurement.....	11
<b>5. RADIATED EMISSION MEASUREMENT .....</b>	<b>12</b>
5.1. Block Diagram of Test Setup .....	12
5.2. Radiated Emission Limits .....	13
5.3. Test Procedure .....	13
5.4. Measurement Result Explanation .....	14
5.5. Test Results.....	14
<b>6. 6dB BANDWIDTH MEASUREMENT .....</b>	<b>25</b>
6.1. Block Diagram of Test Setup .....	25
6.2. Specification Limits .....	25
6.3. Test Procedure .....	25
6.4. Test Results.....	25
<b>7. MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>27</b>
7.1. Block Diagram of Test Setup .....	27
7.2. Specification Limits .....	27
7.3. Test Procedure .....	27
7.4. Test Results.....	28
<b>8. EMISSION LIMITATIONS MEASUREMENT .....</b>	<b>30</b>
8.1. Block Diagram of Test Setup .....	30
8.2. Specification Limits .....	30
8.3. Test Procedure .....	30
8.4. Test Results.....	31
<b>9. POWER SPECTRAL DENSITY .....</b>	<b>34</b>
9.1. Block Diagram of Test Setup .....	34
9.2. Specification Limits .....	34
9.3. Test Procedure .....	34
9.4. Test Results.....	35
<b>10. DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>36</b>
APPENDIX A TEST PHOTOGRAPHS	

## TEST REPORT CERTIFICATION

Applicant : reIDEA Technology Inc.  
Manufacture : Might Electronic Co., Ltd.  
Product Name : bPoint COMFORT  
Model No. : CB4C1  
Serial No. : N/A  
Brand : ReIDEA  
Power Supply : DC 3V (Via Batteries)

Rules of Compliance and Measurement Standards:

CFR 47 FCC Part 15 Subpart C:2015

ANSI C63.10:2013

KDB 558074 D01 DTS Meas Guidance v03r05

**AUDIX Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 04. 22 ~ 26

Date of Report: 2016. 04. 27

Producer: Sabrina Wang  
(Sabrina Wang/Administrator)

Signatory: Ben Cheng  
(Ben Cheng/Manager)

## 1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2016. 04. 27	Original Report.	EM-F160261

## 2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	N/A, Note
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
Note: The EUT only employs battery power for operation, so it is unnecessary to test.		

### 3. GENERAL INFORMATION

#### 3.1. Description of EUT

Product	bPoint COMFORT
Model Number	CB4C1
FCC ID	2ABYY-CB4C1
Serial Number	N/A
Brand Name	ReIDEA
Applicant	reIDEA Technology Inc. No.41, Aly. 9, Ln. 306, Sec. 1, Binhai Rd., Tamsui Dist., New Taipei City 25172, Taiwan (R.O.C.)
Manufacturer	Might Electronic Co., Ltd. No. 40-1, Lin 2, Yuan-Shan Tsuen, Hsin-Feng Hsiang, Hsin-Chu Hsien, Taiwan R.O.C.
RF Features	Bluetooth Low Energy (BLE)
Transmit Type	1T1R
Antenna Type / Max Gain	PCB Printed Antenna / -3.16 dBi
Date of Receipt of Sample	2016. 04. 22 ~ 26

### 3.2. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1

Channel List			
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

### 3.3. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
BLE	1	N/A	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor  $10\log(1/x)$  is needed to add in conducted test items measured in average detector.

Item		Test Channel
Radiated Test Case	Radiated Band Edge <sup>Note1</sup>	00/39
	Radiated Spurious Emission (30MHz-1GHz) <sup>Note1</sup>	00/19/39
	Radiated Spurious Emission (Above 1GHz) <sup>Note1</sup>	00/19/39
Conducted Test Case	6dB Bandwidth	00/19/39
	Peak Power Spectral Density	00/19/39
	Peak Output Power	00/19/39
	Band Edge	00/39
	Spurious Emission	00/19/39

Note 1:

☐ Mobile Device

☒ Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

- ☒ Lie  
☐ Side  
☐ Stand



### 3.4. Tested Supporting System List

#### 3.4.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook PC	ASUS	N20A	N/A	FCC ID:TLZ-BT253
2.	Test Jig #1	N/A	N/A	N/A	N/A
3.	Test Jig #2	N/A	N/A	N/A	N/A

#### 3.4.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	Adapter: ACBEL, M/N AA90PM111 DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m
2.	Bus Cable: Unshielded, Undetachable, 0.10m
3.	Data Cable: Unshielded, Undetachable, 0.05m

### 3.5. Setup Configuration

#### 3.5.1. EUT Configuration for Radiated Emission



#### 3.5.2. EUT Configuration for Conducted Test Items

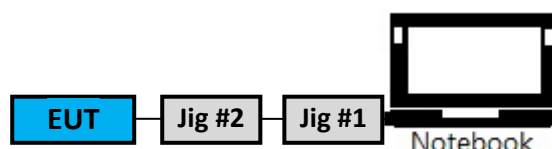

### 3.6. Operating Condition of EUT

Test program “TERA TERM” is used for enabling EUT RF function under continues transmitting and choosing data rate/ channel.

### 3.7. Description of Test Facility

Test Firm Name	:	<b>AUDIX Technology Corporation</b> <b>EMC Department</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	<b>Semi Anechoic Chamber &amp;</b> <b>Fully Anechoic Chamber</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

### 3.8. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty =  $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Radiated Emission Measurement

#### 4.1.1. Frequency Range 30MHz~1000MHz

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 23	1 Year
4.	Bilog Antenna	CHASE	CBL6112D	33821	2016. 01. 30	1 Year
5.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

#### 4.1.2. Frequency Range Above 1GHz

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2015. 08. 20	1 Year
2.	Amplifier	Sonoma	310N	187161	2015. 06. 17	1 Year
3.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2015. 07. 28	1 Year
4.	Horn Antenna	ETS-Lindgren	3117	00135902	2016. 03. 05	1 Year
5.	Horn Antenna	EMCO	3116	2653	2015. 10. 20	1 Year
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

### 4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2015. 11. 28	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2015. 10. 23	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2015. 10. 23	1 Year


## 5. RADIATED EMISSION MEASUREMENT

### 5.1. Block Diagram of Test Setup


#### 5.1.1. Block Diagram of EUT

Indicated as section 3.5

#### 5.1.2. Semi Anechoic Chamber (3m) Setup Diagram for 30-1000 MHz

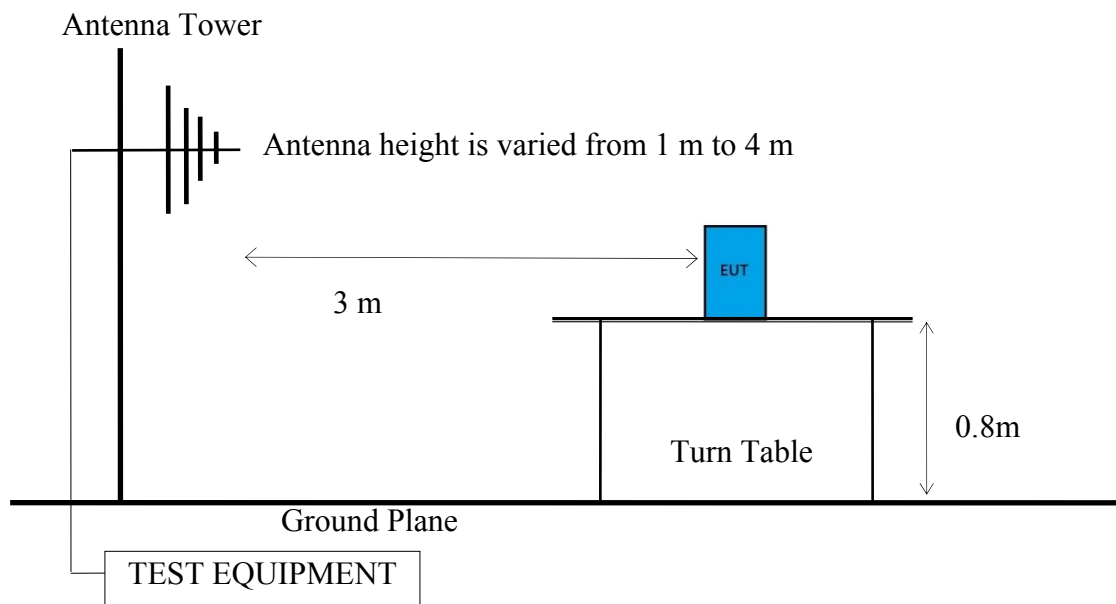

#### 5.1.3. Fully Anechoic Chamber (3m) Setup Diagram for above 1GHz

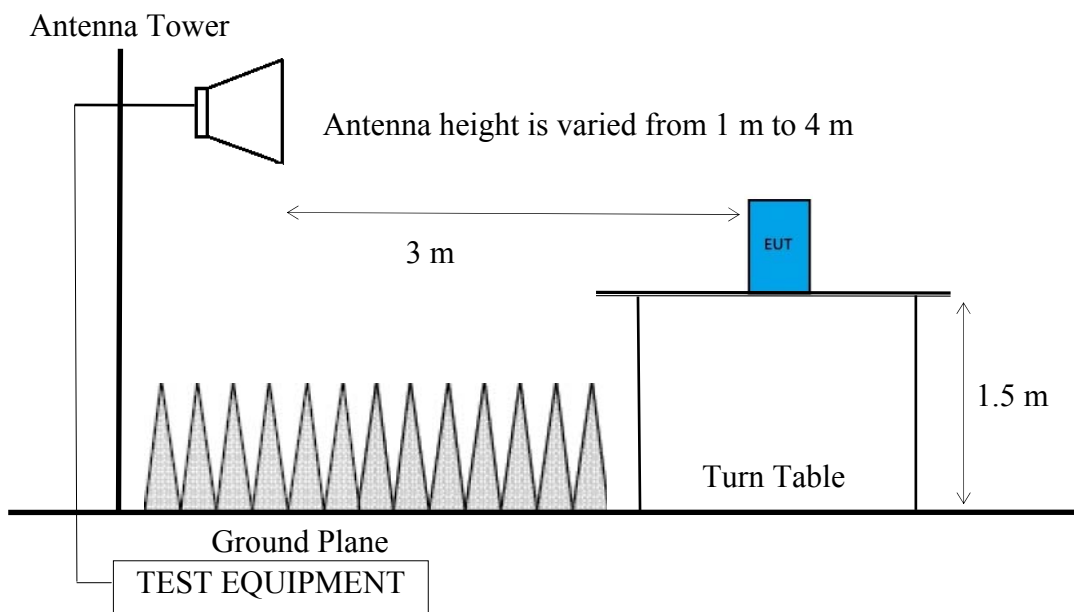

## 5.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 $\text{dB}\mu\text{V/m}$ (Peak) 54.0 $\text{dB}\mu\text{V/m}$ (Average)	

Remark : (1)  $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

## 5.3. Test Procedure

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

**Peak Detector:**

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

**Average Measurement:**

☒ **Option 1:**

- (1) RBW = 1 MHz
- (2) VBW = 1/T
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

☐ **Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

## 5.4. Measurement Result Explanation

☒ Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading

☒ Average Emission Level = Antenna Factor + Cable Loss + Meter Reading

☐ Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) =  $20\log(TX_{on}/TX_{on+off})$  presented in section 3.4

☐ EPR = Peak Emission Level - 95.2dB - 2.14dB

## 5.5. Test Results

**PASSED.**

Test Date	2016/04/26	Temp./Hum.	23°C/53%
Test Voltage	AC 120V, 60Hz		

### 5.5.1. Emissions within Restricted Frequency Bands

#### 5.5.1.1. Frequency Below 1 GHz

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
100.81	10.98	3.23	6.56	20.77	43.50	22.73	Peak
275.41	12.78	4.50	2.70	19.98	46.00	26.02	Peak
439.34	16.13	5.98	2.61	24.72	46.00	21.28	Peak
660.50	18.58	6.64	1.95	27.17	46.00	18.83	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	11.03	3.23	8.27	22.53	43.50	20.97	Peak
344.28	14.29	5.14	2.79	22.22	46.00	23.78	Peak
448.07	16.27	6.06	2.08	24.41	46.00	21.59	Peak
684.75	18.67	6.69	2.24	27.60	46.00	18.40	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
100.81	10.98	3.23	5.76	19.97	43.50	23.53	Peak
255.04	12.47	4.36	2.42	19.25	46.00	26.75	Peak
328.76	13.90	4.98	2.08	20.96	46.00	25.04	Peak
535.37	17.48	6.46	2.00	25.94	46.00	20.06	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
101.78	11.03	3.23	7.93	22.19	43.50	21.31	Peak
351.07	14.43	5.20	2.11	21.74	46.00	24.26	Peak
572.23	17.98	6.49	1.71	26.18	46.00	19.82	Peak
859.35	20.37	7.39	2.19	29.95	46.00	16.05	Peak



Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
100.81	10.98	3.23	5.42	19.63	43.50	23.87	Peak
461.65	16.46	6.17	3.51	26.14	46.00	19.86	Peak
619.76	18.41	6.55	2.28	27.24	46.00	18.76	Peak
860.32	20.37	7.39	2.09	29.85	46.00	16.15	Peak


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
101.78	11.03	3.23	8.35	22.61	43.50	20.89	Peak
384.05	15.20	5.51	3.21	23.92	46.00	22.08	Peak
622.67	18.42	6.55	2.29	27.26	46.00	18.74	Peak
861.29	20.37	7.39	2.33	30.09	46.00	15.91	Peak

### 5.5.1.2. Frequency Above 1 GHz to 10<sup>th</sup> harmonics


#### Band Edge:

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

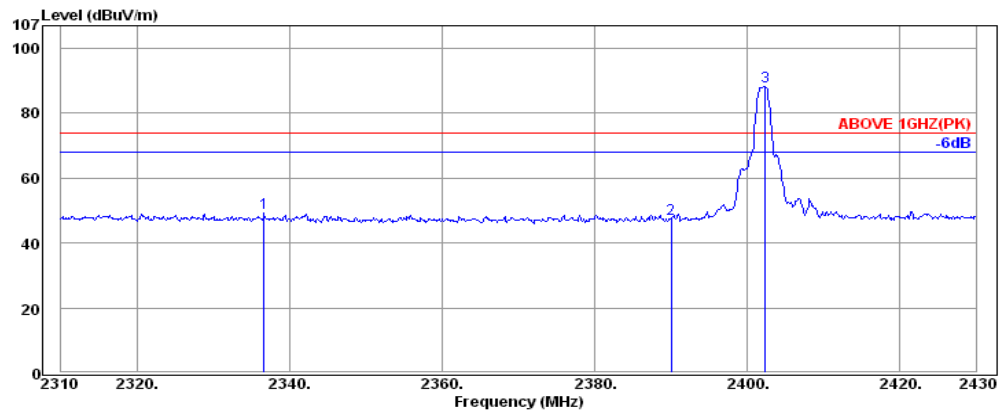

#### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2336.64	32.08	5.68	11.60	49.36	74.00	24.64	Peak
2390.04	32.16	5.72	9.74	47.62	74.00	26.38	Peak
2402.40	32.16	5.72	50.43	88.31	---	---	Peak

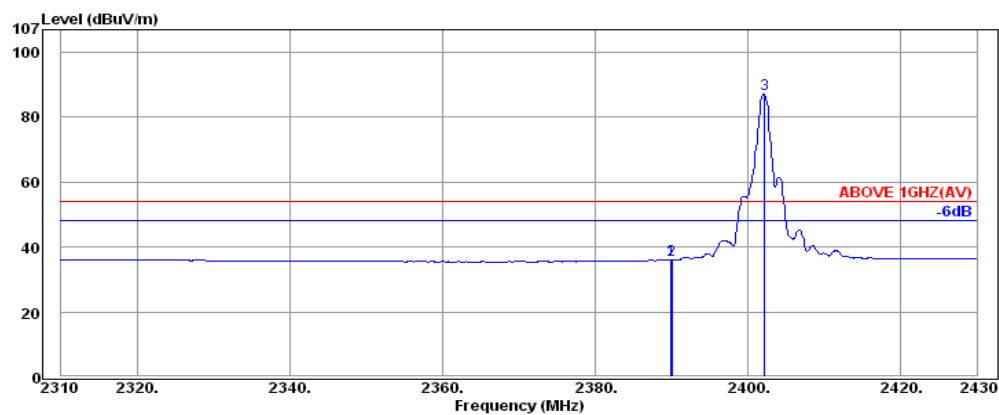

#### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.92	32.16	5.72	-1.78	36.10	54.00	17.90	Average
2390.04	32.16	5.72	-1.75	36.13	54.00	17.87	Average
2402.16	32.16	5.72	49.24	87.12	---	---	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

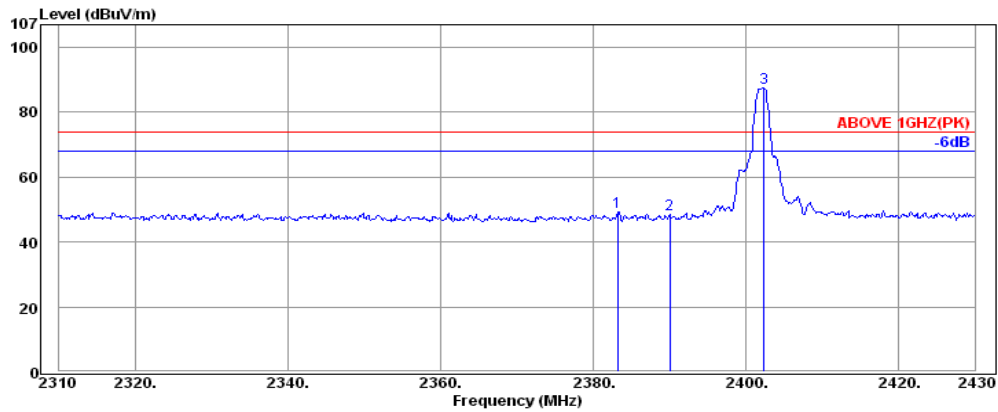

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.20	32.13	5.71	11.44	49.28	74.00	24.72	Peak
2390.04	32.16	5.72	10.64	48.52	74.00	25.48	Peak
2402.40	32.16	5.72	49.67	87.55	---	---	Peak

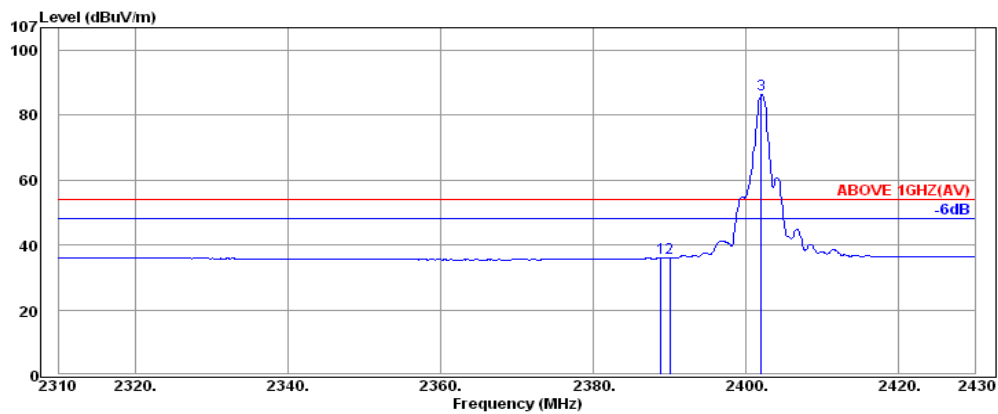

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.84	32.16	5.72	-1.83	36.05	54.00	17.95	Average
2390.04	32.16	5.72	-1.81	36.07	54.00	17.93	Average
2402.04	32.16	5.72	48.41	86.29	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

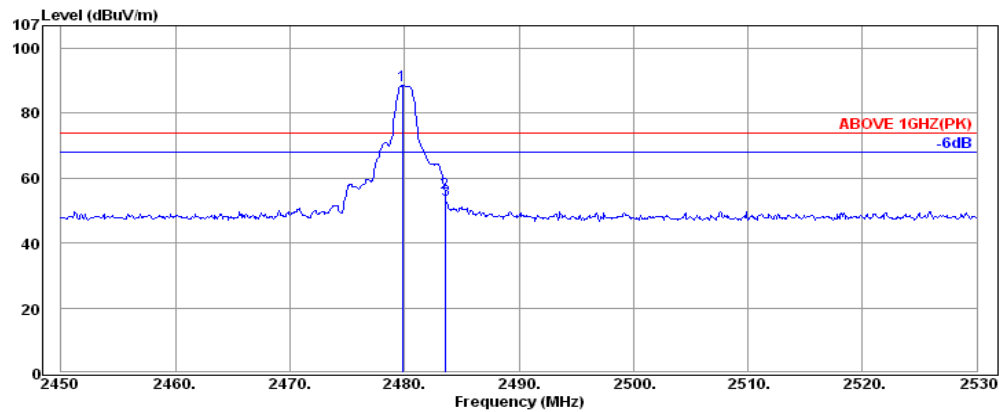

#### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	5.82	50.53	88.63	---	---	Peak
2483.52	32.28	5.82	17.33	55.43	74.00	18.57	Peak
2483.60	32.28	5.82	15.38	53.48	74.00	20.52	Peak

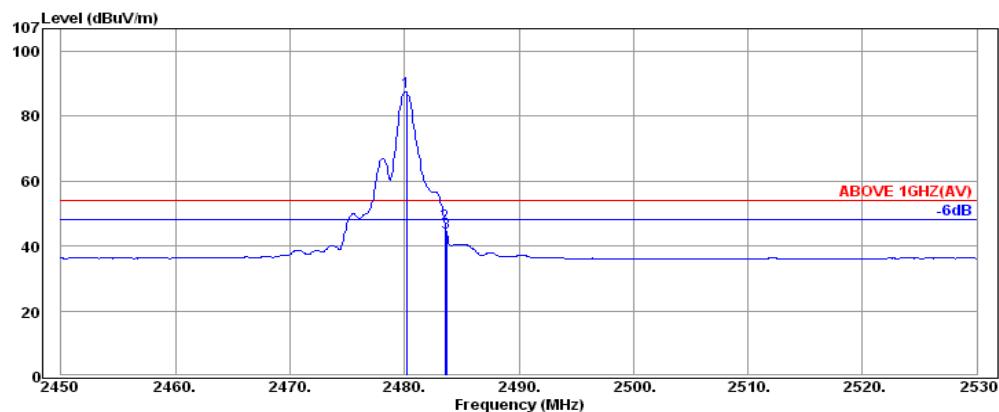

#### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.16	32.28	5.82	49.35	87.45	---	---	Average
2483.52	32.28	5.82	8.67	46.77	54.00	7.23	Average
2483.68	32.28	5.82	6.00	44.10	54.00	9.90	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

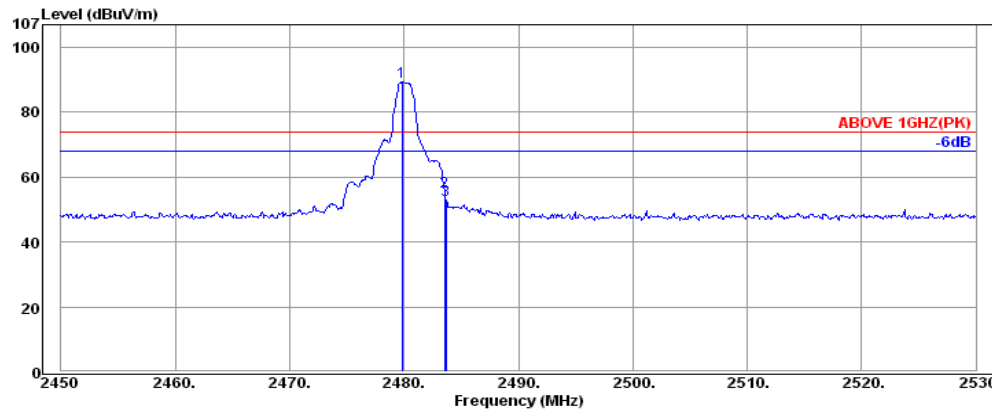

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	5.82	51.22	89.32	74.00	-15.32	Peak
2483.52	32.28	5.82	17.36	55.46	74.00	18.54	Peak
2483.68	32.28	5.82	14.82	52.92	---	---	Peak

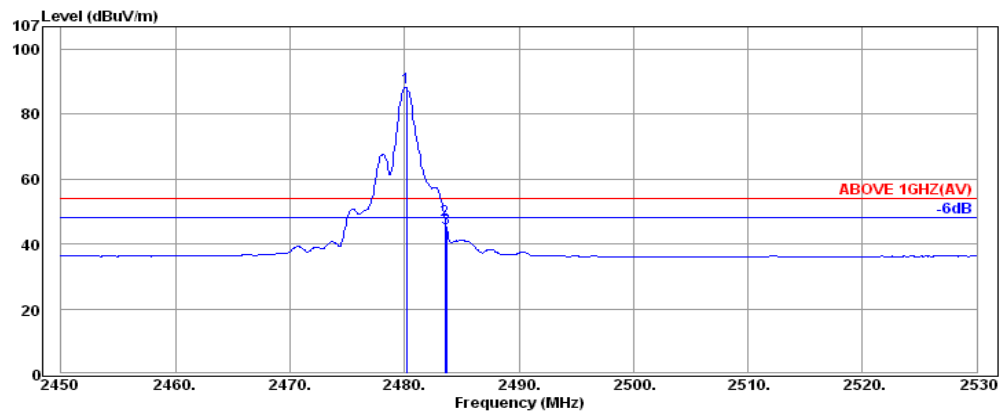

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.16	32.28	5.82	50.05	88.15	54.00	-34.15	Average
2483.52	32.28	5.82	9.31	47.41	54.00	6.59	Average
2483.68	32.28	5.82	6.63	44.73	---	---	Average

### 5.5.2. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	0.07	42.15	54.00	11.85	Peak
7205.00	35.80	9.22	-1.71	43.31	54.00	10.69	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4800.00	34.22	7.86	2.73	44.81	54.00	9.19	Peak
7205.00	35.80	9.22	-1.62	43.40	54.00	10.60	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	0.07	42.15	54.00	11.85	Peak
7205.00	35.80	9.22	-1.71	43.31	54.00	10.69	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4800.00	34.22	7.86	2.73	44.81	54.00	9.19	Peak
7205.00	35.80	9.22	-1.62	43.40	54.00	10.60	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	7.86	0.07	42.15	54.00	11.85	Peak
7205.00	35.80	9.22	-1.71	43.31	54.00	10.69	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4800.00	34.22	7.86	2.73	44.81	54.00	9.19	Peak
7205.00	35.80	9.22	-1.62	43.40	54.00	10.60	Peak


**5.5.3. Emissions in Non-restricted Frequency Bands**

Pursuant to KDB 558074 D01 DTS Meas Guidance v03r05 that emission levels below the 15.209 general radiated emissions limits is not required.



## 6. 6dB BANDWIDTH MEASUREMENT

### 6.1. Block Diagram of Test Setup

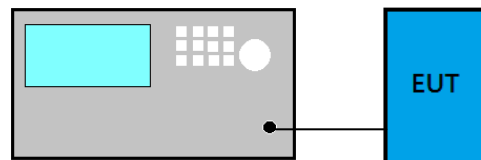

### 6.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

### 6.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

■ Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.


### 6.4. Test Results

Test Date	2016/04/22	Temp./Hum.	26°C/58%
Cable Loss	3.04dB	Test Voltage	DC 3V (Via Batteries)

#### 6.4.1. 6dB Bandwidth Result


Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)
BLE	2402	0.7025
	2440	0.6932
	2480	0.7137

## 6.4.2. Measurement Plots

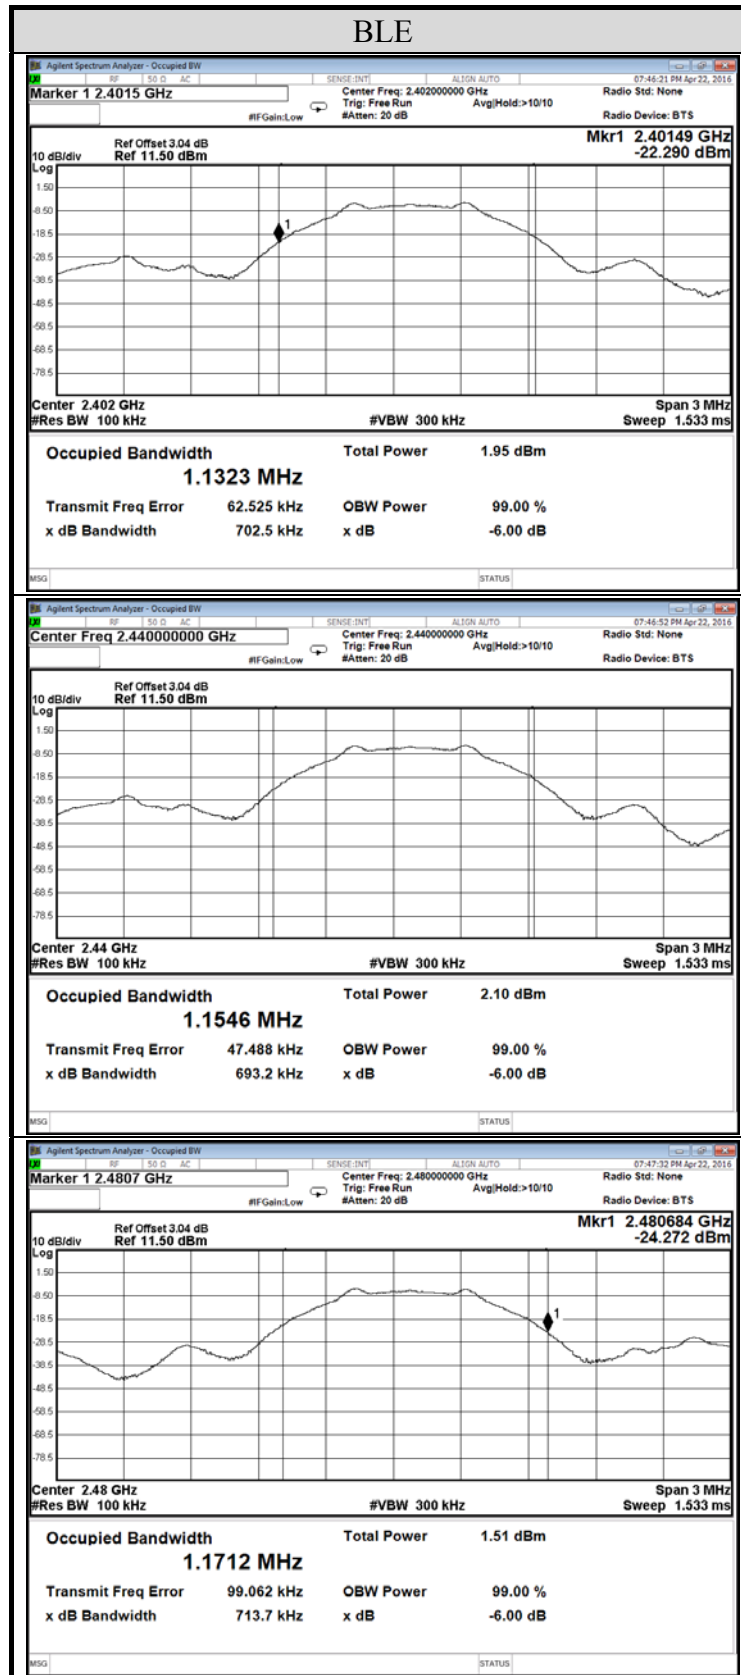

## 7. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

### 7.1. Block Diagram of Test Setup

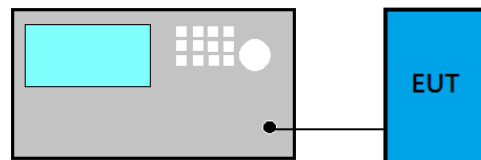

### 7.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm)

### 7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

☐ **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

☐ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5.1 is < 98%.

☒ **RBW ≥ DTS bandwidth**

- (1) Set span to at least 3 times the OBW
- (2) Set  $RBW \geq OBW$
- (3) Set the video bandwidth (VBW)  $\geq 3 \times RBW$ .
- (4) Detector = Peak
- (5) Trace mode = max hold
- (6) Sweep = auto couple.
- (7) To find the peak amplitude level.

## 7.4. Test Results


Test Date	2016/04/22	Temp./Hum.	23°C/49%
Cable Loss	3.04dB	Test Voltage	DC 3V (Via Batteries)

### 7.4.1. Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	
BLE	2402	-4.628	0.000345	< 30 dBm (1 W)
	2440	-4.438	0.000360	
	2480	-5.079	0.000311	


Note: The results have been included cable loss.

## 7.4.2. Measurement Plots

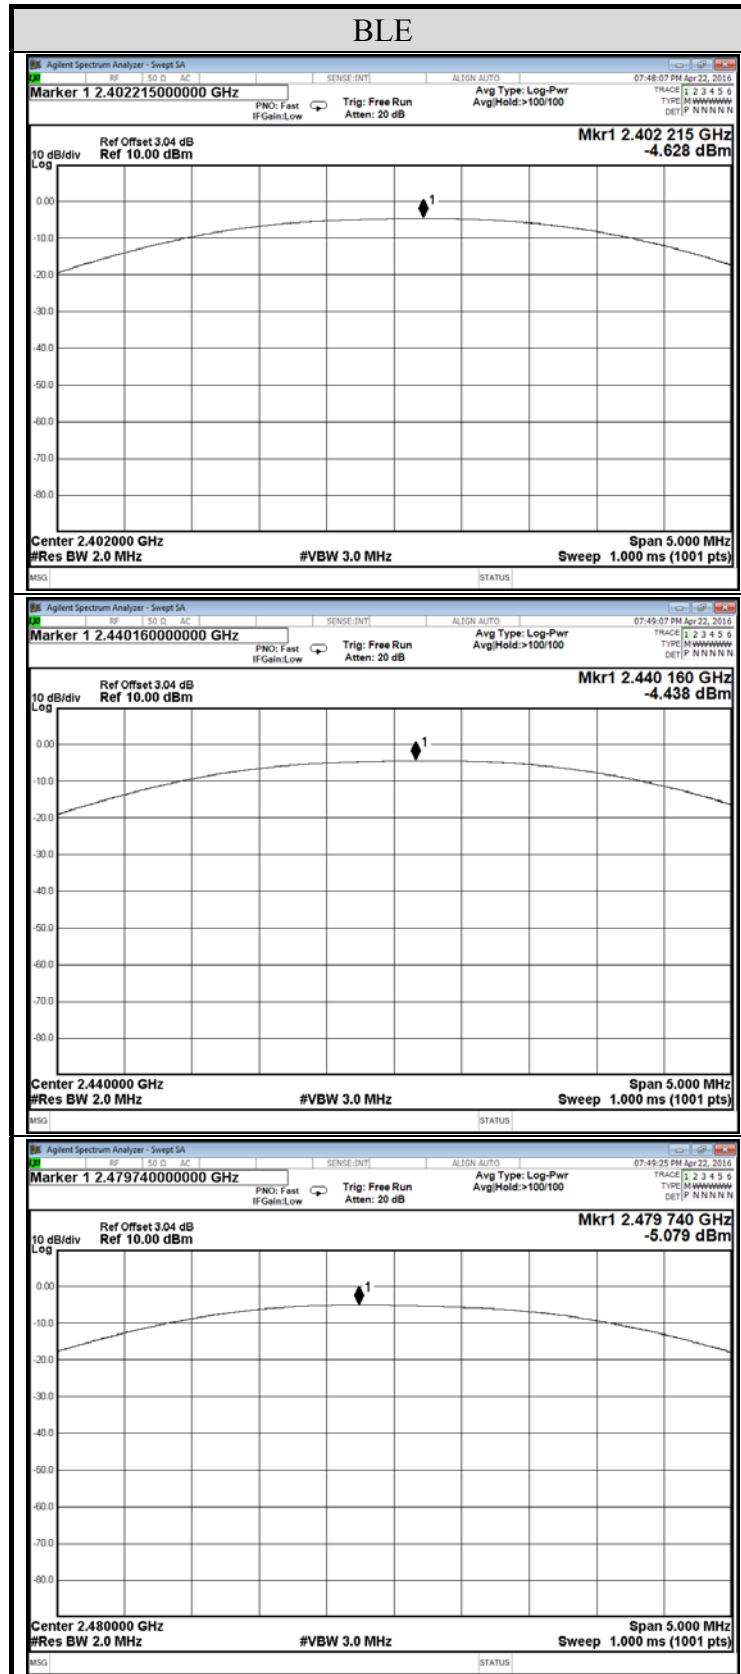

## 8. EMISSION LIMITATIONS MEASUREMENT

### 8.1. Block Diagram of Test Setup

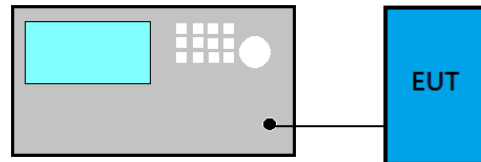

### 8.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

### 8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

#### ■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

#### ■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

## 8.4. Test Results

Test Date	2016/04/22	Temp./Hum.	26°C/58%
Mode	BLE	Frequency	TX 2402MHz
Cable Loss	3.4dB	Test Voltage	DC 3V (Via Batteries)

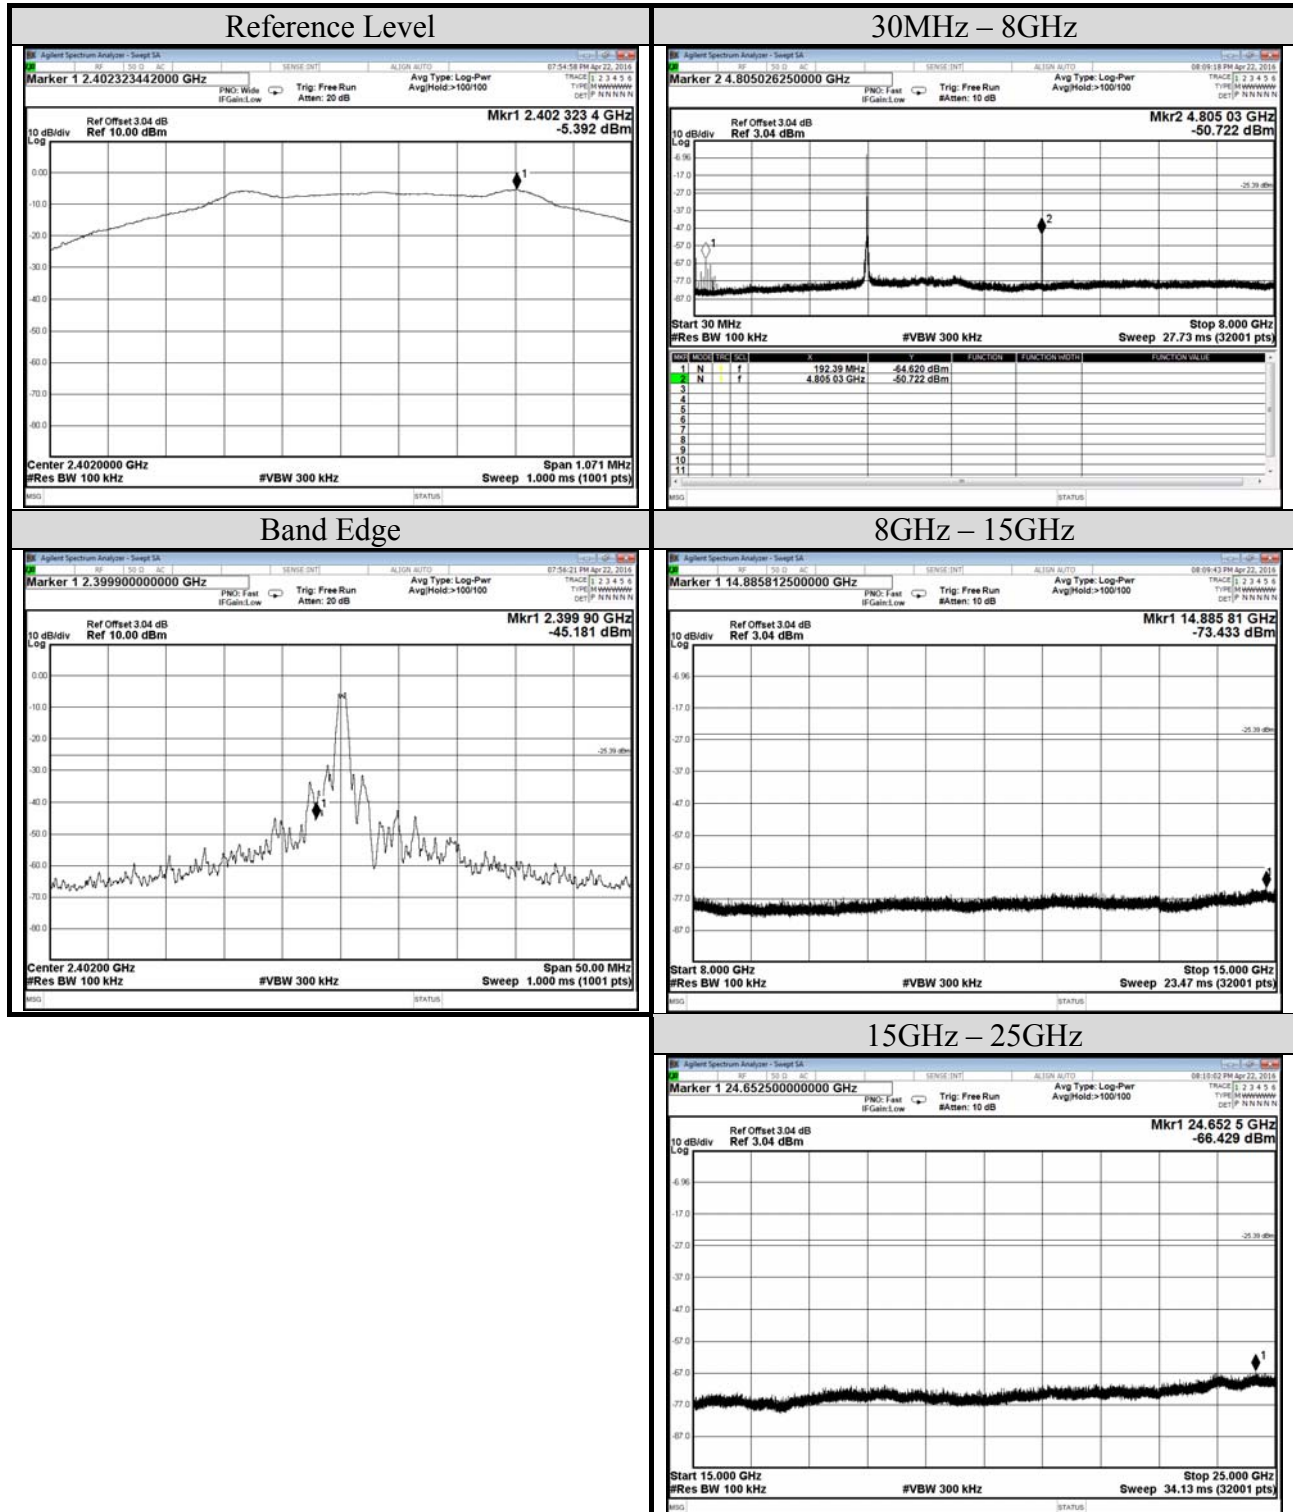

File Number: C1M1604027


Report Number: EM-F160261

This test report may be reproduced in full only. The document may only be updated by AUDIX Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

**AUDIX Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2016/04/22	Temp./Hum.	26°C/58%
Mode	BLE	Frequency	TX 2440MHz
Cable Loss	3.4dB	Test Voltage	DC 3V (Via Batteries)

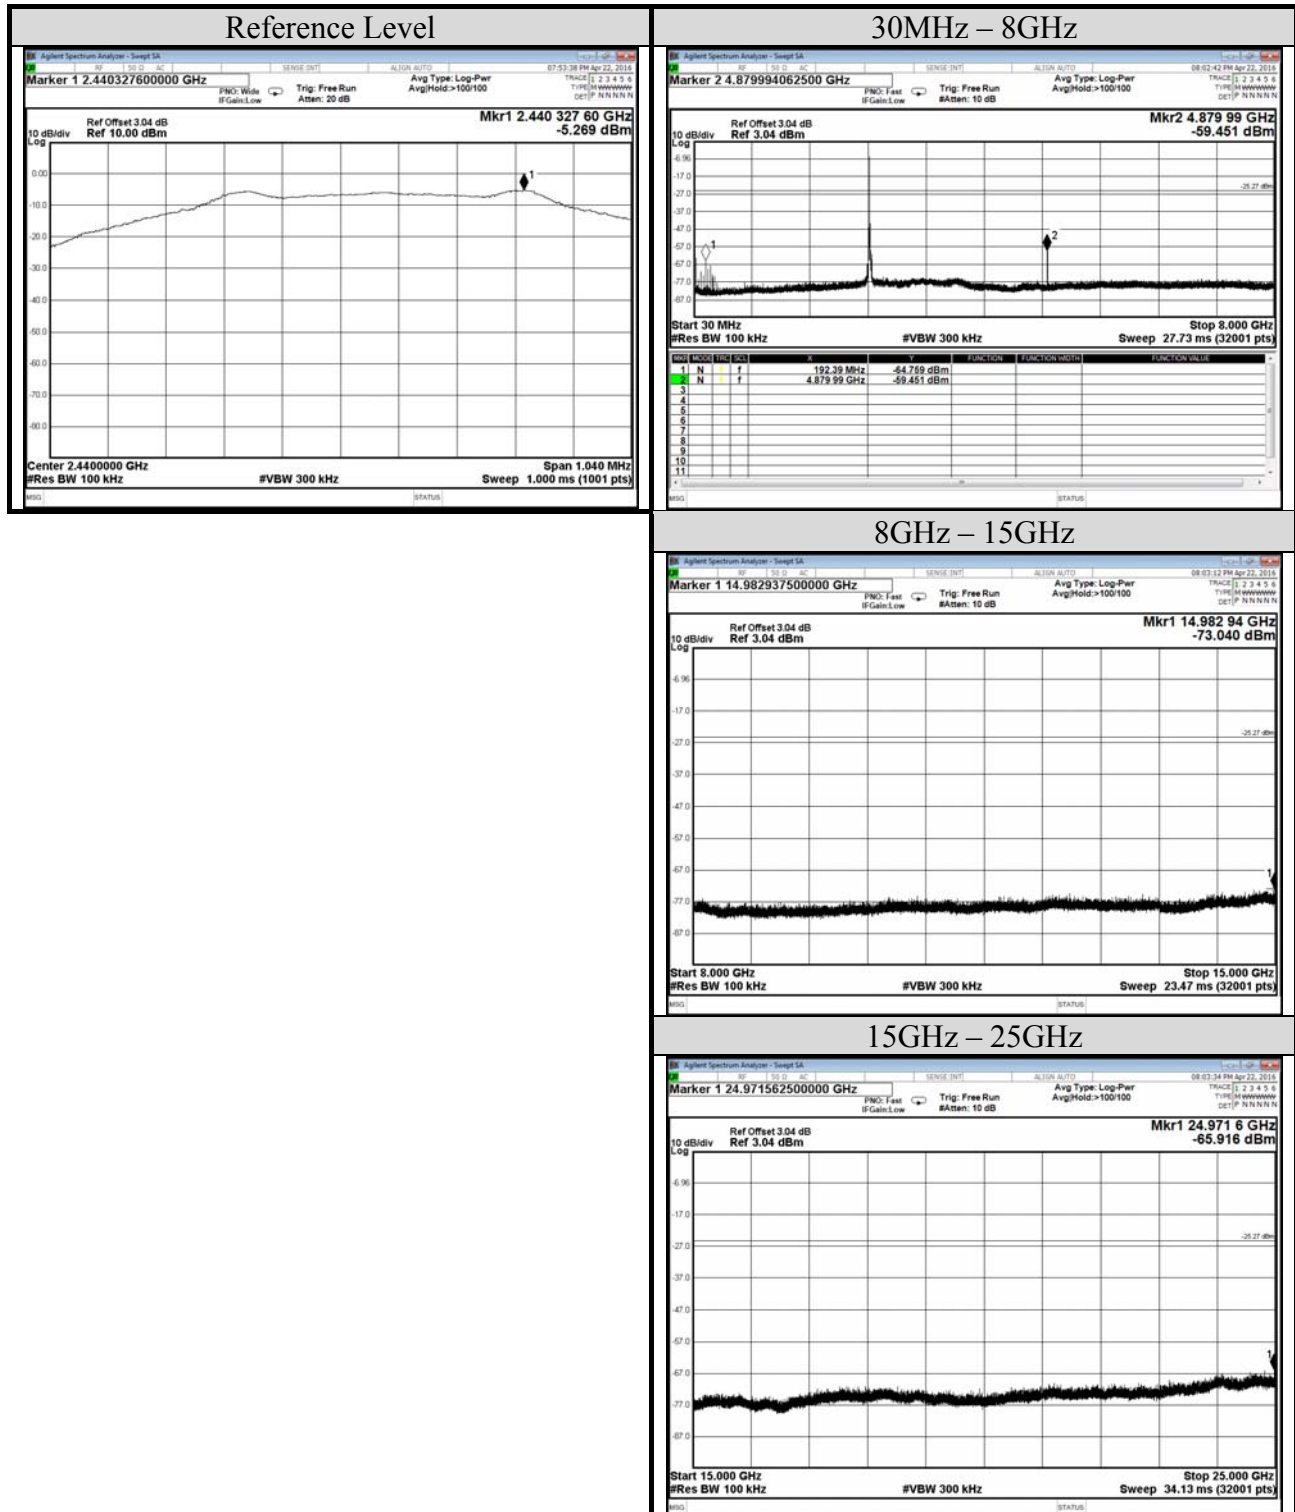




**AUDIX Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan


**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2016/04/22	Temp./Hum.	26°C/58%
Mode	BLE	Frequency	TX 2480MHz
Cable Loss	3.4dB	Test Voltage	DC 3V (Via Batteries)

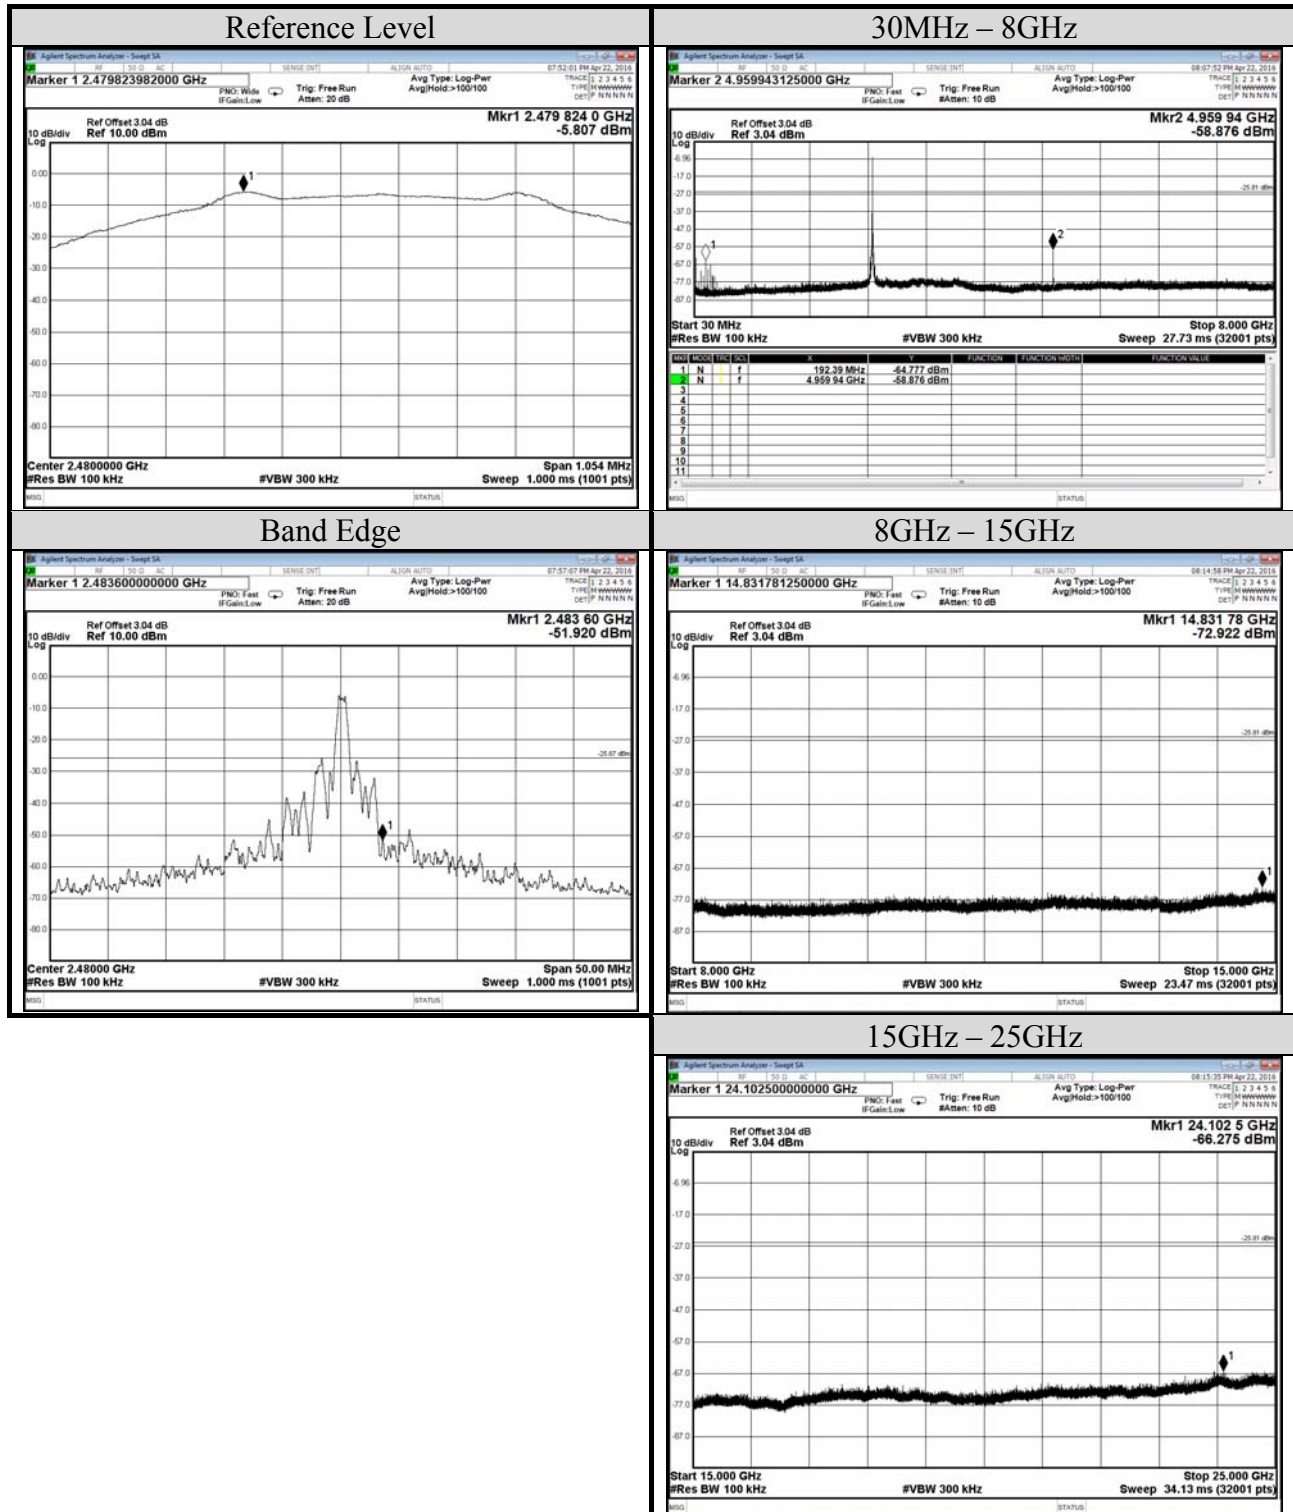

## 9. POWER SPECTRAL DENSITY

### 9.1. Block Diagram of Test Setup

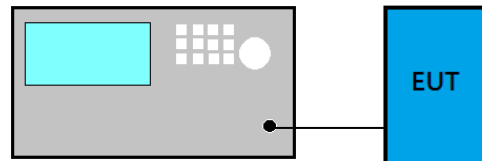

### 9.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

### 9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

#### ■ Method PKPSD (peak PSD)


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### □ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5.1. < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 9.4. Test Results

Test Date	2016/04/22	Temp./Hum.	26°C/58%
Cable Loss	3.04dB	Test Voltage	DC 3V (Via Batteries)

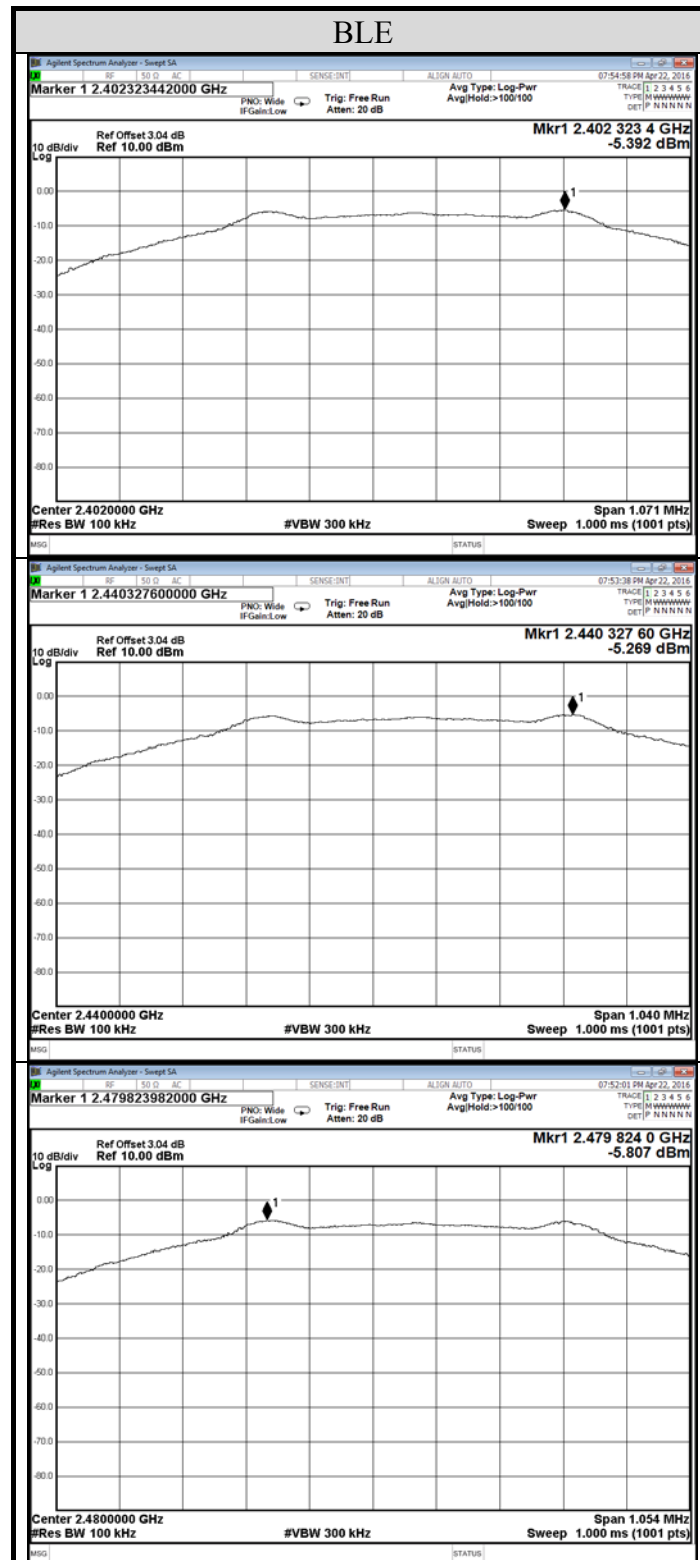

## **10.DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**