

EDMI (Shenzhen) Co., Ltd

RF Module

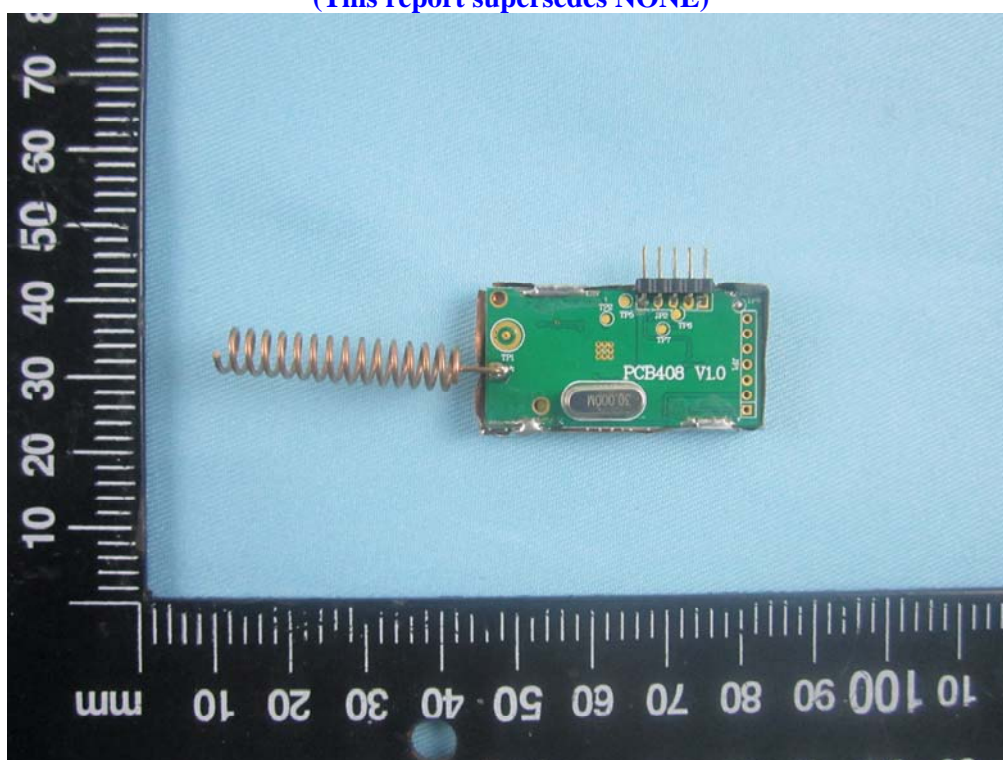
Main Model: MSi4432

Serial Model: N/A

September 29, 2014




Report No.: 14070483-FCC-H1

(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

		
Herith Shi Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.

Test result presented in this test report is applicable to the representative sample only.

EMC Test Report
To: FCC 2.1091

SIEMIC, INC.
Accessing global markets



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

SIEMIC (Shenzhen-China) Laboratories Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety

This page has been left blank intentionally.

CONTENTS

1

EXECUTIVE SUMMARY & EUT INFORMATION

5

2

TECHNICAL DETAILS.....

6

3

FCC §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

7


1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programmers was to demonstrate compliance of the EDM I (Shenzhen) Co., Ltd , RF Module and Model: MSi4432 against the current Stipulated Standards. The RF Module has demonstrated compliance with the FCC 2.1091.

EUT Information

EUT Description	: RF Module
Main Model	: MSi4432
Serial Model	: N/A
Antenna Gain	: -4dBi
Input Power	: Host output to the module: DC 3.3V
Classification Per Stipulated Test Standard	: Class B Emission Product Per FCC 2.1091

2 TECHNICAL DETAILS

Purpose	Compliance testing of RF Module with stipulated standards
Applicant / Client	EDMI (Shenzhen) Co., Ltd 5th Floor 5 Building 5, Zhong Yuntai Industrial Park, Tang Tou 1st Road, Shi Yan, Bao An, Shen Zhen, Guangdong 518108 P.R.China
Manufacturer	EDMI (Shenzhen) Co., Ltd 5th Floor 5 Building 5, Zhong Yuntai Industrial Park, Tang Tou 1st Road, Shi Yan, Bao An, Shen Zhen, Guangdong 518108 P.R.China
Laboratory performing the tests	SIEMIC (Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: China@siemic.com.cn
Test report reference number	14070483-FCC-H1
Date EUT received	September 5, 2014
Standard applied	FCC 2.1091
Dates of test (from – to)	September 29, 2014
No of Units	#1
Equipment Category	DXX
Trade Name	 EDMI
RF Operating Frequency (ies)	903-927 MHz
Number of Channels	61
Modulation	GFSK
FCC ID	2AC6H4432-A

3 FCC §2.1091 - Maximum Permissible exposure (MPE)

3.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

3.2 Test Data

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For the antenna manufacturer provide only used limited to ERP/EIRP or radiated spurious emission test. The MPE evaluation as below:

Maximum peak output power at antenna input terminal: 1.2dBm

Maximum peak output power at antenna input terminal: 1.318 (mW)

The Max Tune up power output at antenna input terminal: 3= 1.995 mW

Prediction distance: >20 (cm)

Predication frequency: 927 (MHz) lowest frequency

Antenna Gain (typical): -4 (dBi)

Antenna Gain (typical): 0.398 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0002(mW/cm²)

MPE limit for general population exposure at prediction frequency: 0.618 (mW/cm²)

$0.0002(\text{mW}/\text{cm}^2) < 0.618 (\text{mW}/\text{cm}^2)$

Result: Pass