Appendix B

Detailed Test Results

GSM850 for Body
GSM1900 for Body
WCDMA Band V for Body
WCDMA Band II for Body
WIFI for Body

Test Laboratory: SGS-SAR Lab

EVT10Q GSM850 GPRS 4TS 190CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz;Duty Cycle: 1:2.0797

Medium: MSL850;Medium parameters used: f = 837 MHz; σ = 0.984 S/m; ε_r = 55.281;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
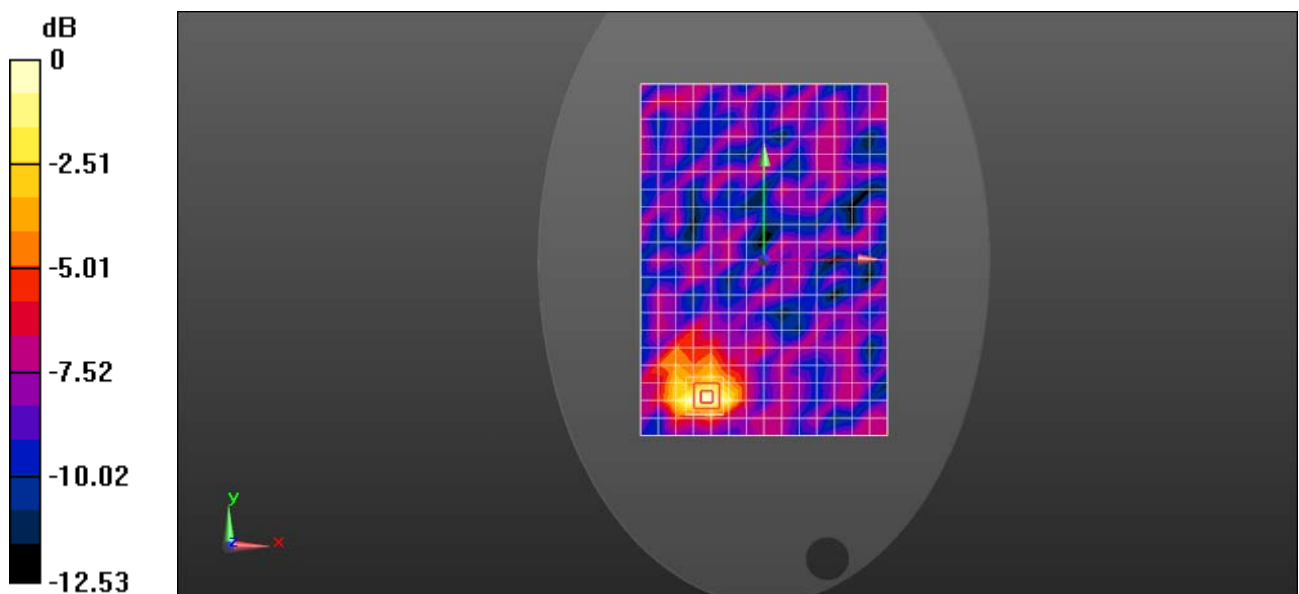Maximum value of SAR (measured) = 0.604 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 7.645 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.349 W/kg
Maximum value of SAR (measured) = 0.682 W/kg

0 dB = 0.604 W/kg = -2.19 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM850 GPRS 4TS 190CH Right side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz;Duty Cycle: 1:2.0797

Medium: MSL835;Medium parameters used: f = 837 MHz; σ = 0.984 S/m; ε_r = 55.281;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.156 W/kg

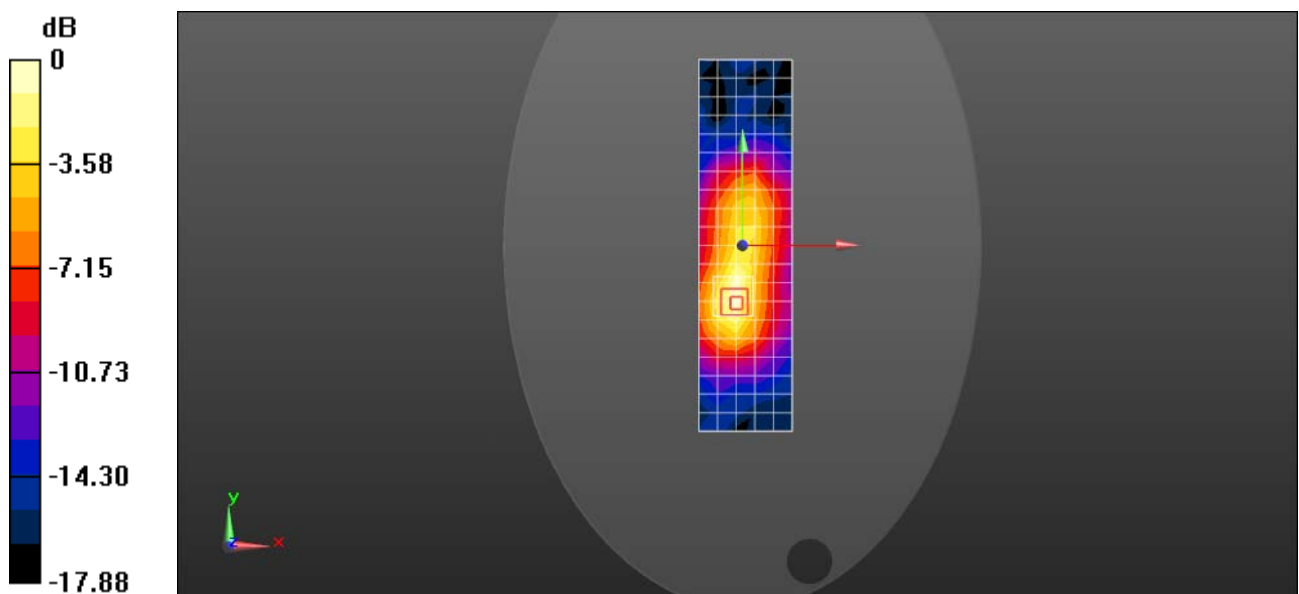### EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 9.638 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.324 W/kg
SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.075 W/kg
Maximum value of SAR (measured) = 0.152 W/kg

0 dB = 0.156 W/kg = -8.05 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM850 GPRS 4TS 190CH Top side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz;Duty Cycle: 1:2.0797

Medium: MSL835;Medium parameters used: f = 837 MHz; σ = 0.984 S/m; ε_r = 55.281;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (5x21x1): Measurement grid: dx=15mm, dy=15mm
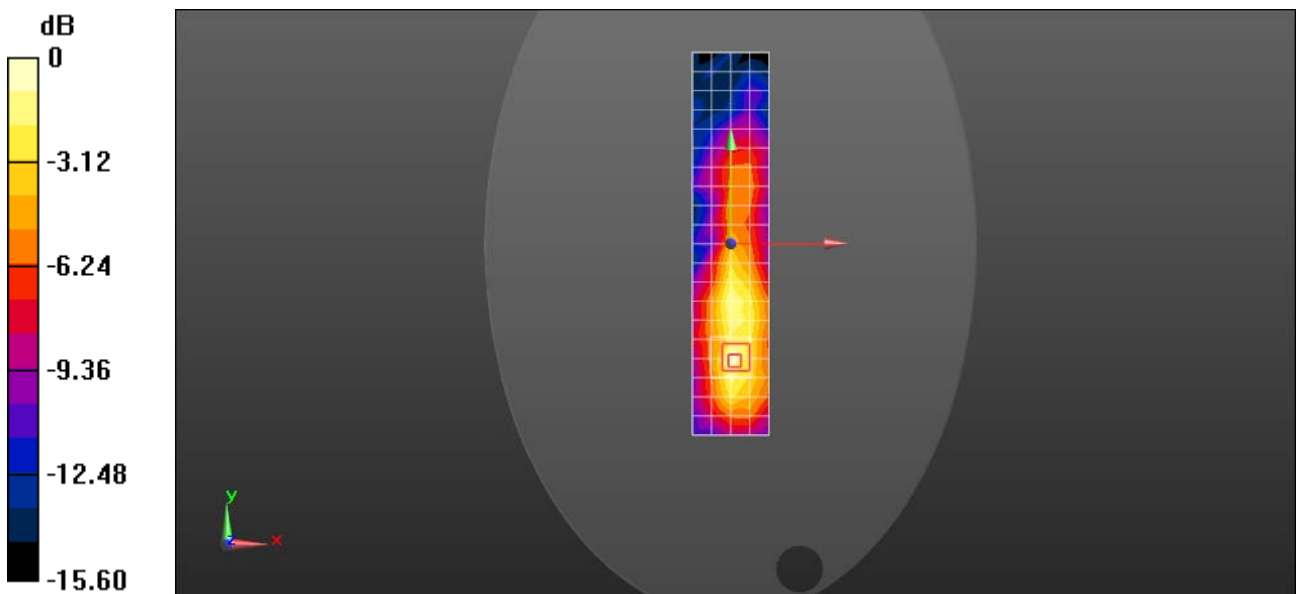Maximum value of SAR (measured) = 0.0633 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 5.098 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.031 W/kg
Maximum value of SAR (measured) = 0.0623 W/kg

0 dB = 0.0633 W/kg = -11.99 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 661CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used: f = 1880 MHz; σ = 1.516 S/m; ε_r = 51.971;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
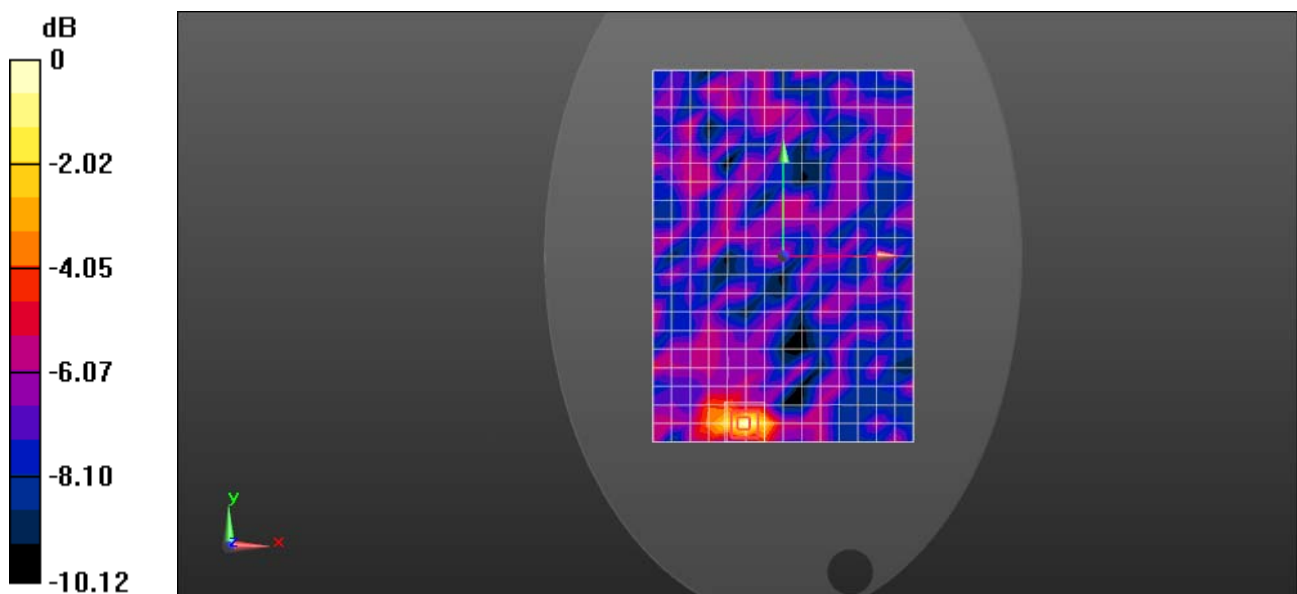Maximum value of SAR (measured) = 1.01 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 12.70 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.528 W/kg
Maximum value of SAR (measured) = 1.10 W/kg

0 dB = 1.01 W/kg = 0.03 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 512CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0);
Frequency: 1850.2 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used (interpolated): f = 1850.2 MHz; σ = 1.49 S/m;
ε_r = 52.098; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.771 W/kg

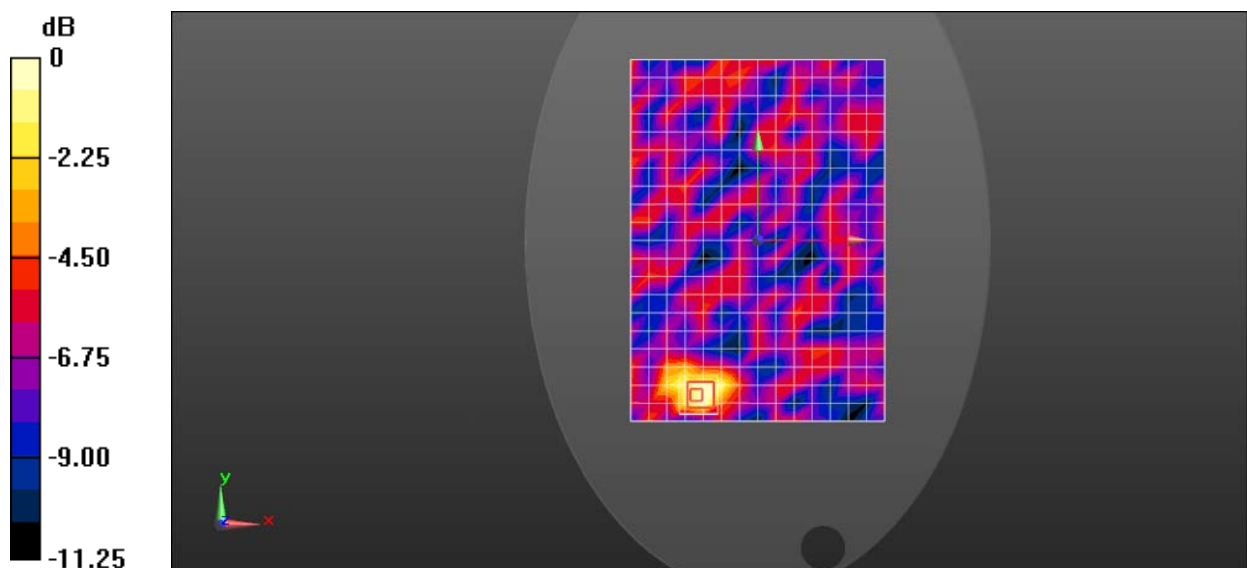**EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 7.202 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.61 W/kg
SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.540 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.08 W/kg

0 dB = 0.771 W/kg = -1.13 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 810CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1909.8 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used: f = 1910 MHz; σ = 1.559 S/m; ε_r = 52.013;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
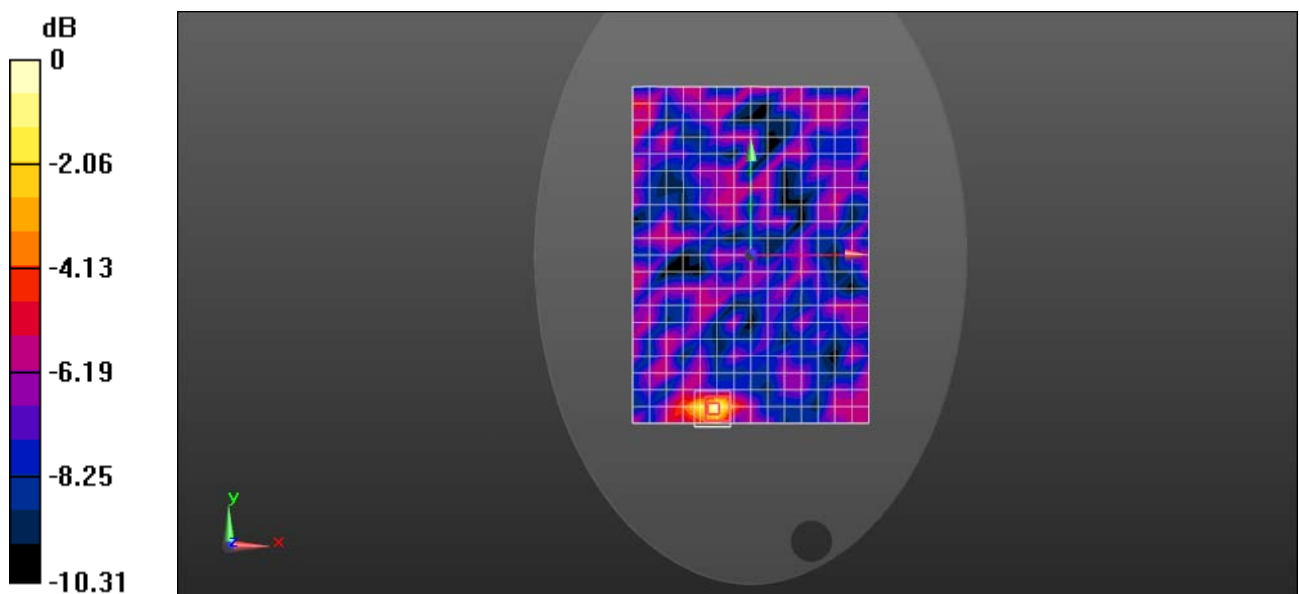Maximum value of SAR (measured) = 1.07 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 8.443 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 2.31 W/kg
SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.516 W/kg
Maximum value of SAR (measured) = 0.979 W/kg

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 661CH Top side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used: f = 1880 MHz; σ = 1.516 S/m; ε_r = 51.971;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (8x21x1): Measurement grid: dx=15mm, dy=15mm
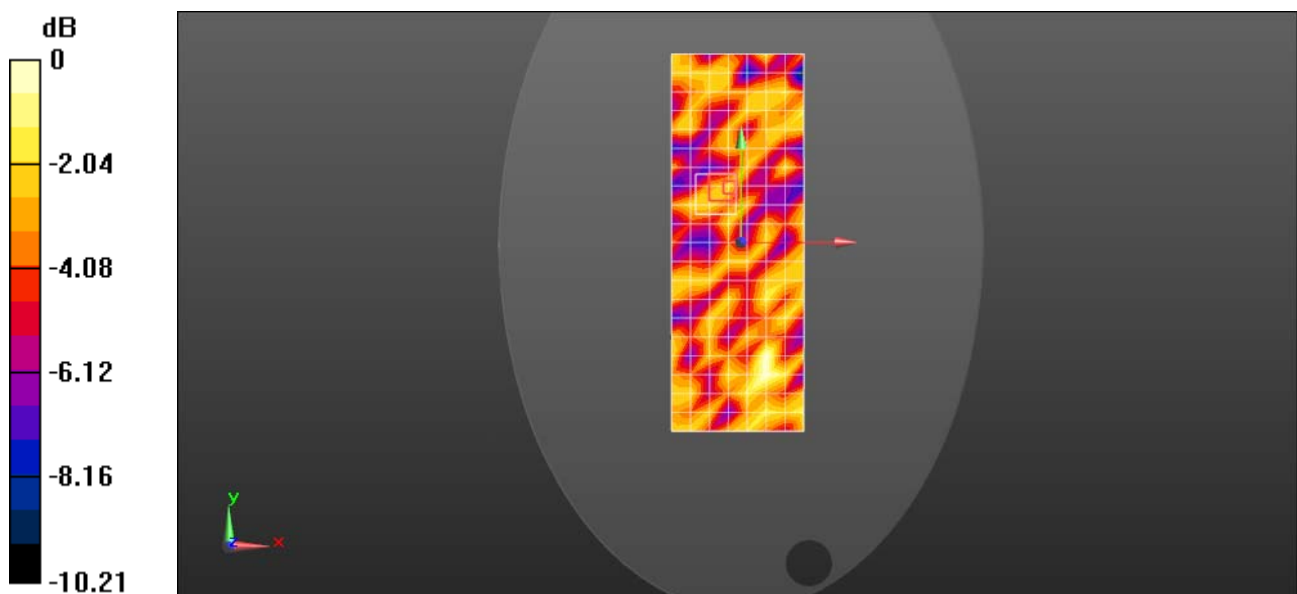Maximum value of SAR (measured) = 0.138 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 7.023 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.134 W/kg
SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.057 W/kg
Maximum value of SAR (measured) = 0.0990 W/kg

0 dB = 0.138 W/kg = -8.61 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 661CH Right side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used: f = 1880 MHz; σ = 1.516 S/m; ε_r = 51.971;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (8x21x1): Measurement grid: dx=15mm, dy=15mm
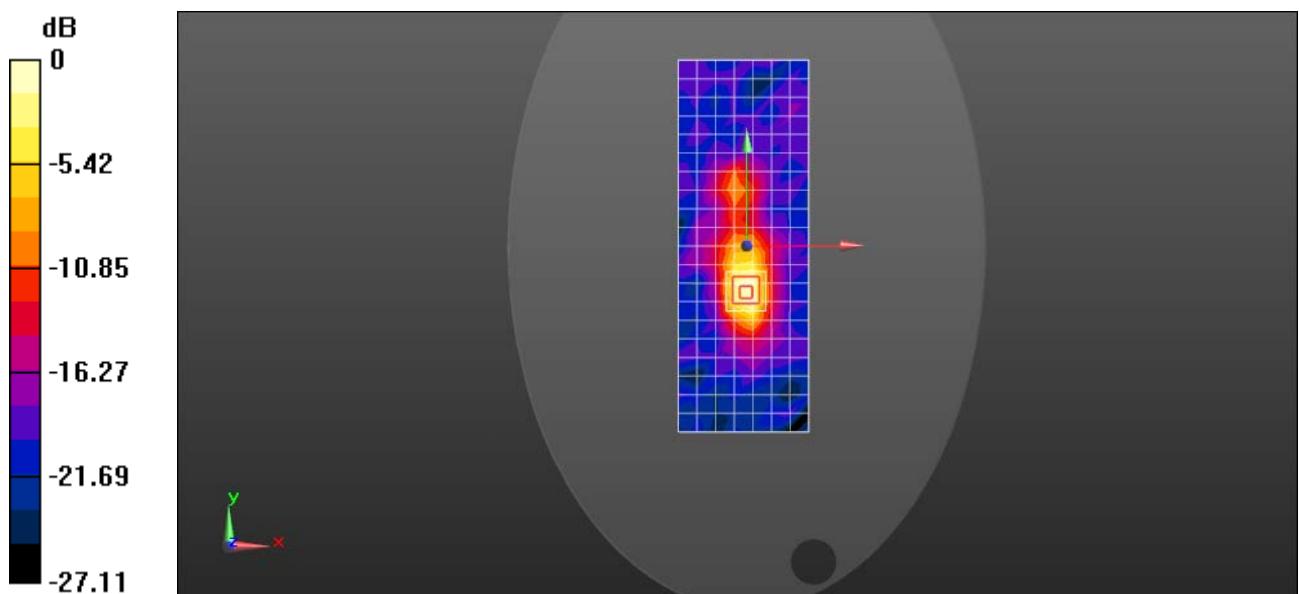Maximum value of SAR (measured) = 0.654 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 9.513 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.11 W/kg
SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.386 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

0 dB = 0.654 W/kg = -1.84 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q GSM1900 GPRS 4TS 661CH Back side 0mm-repeat

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz;Duty Cycle: 1:2.0797

Medium: MSL1900;Medium parameters used: f = 1880 MHz; σ = 1.516 S/m; ε_r = 51.971;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
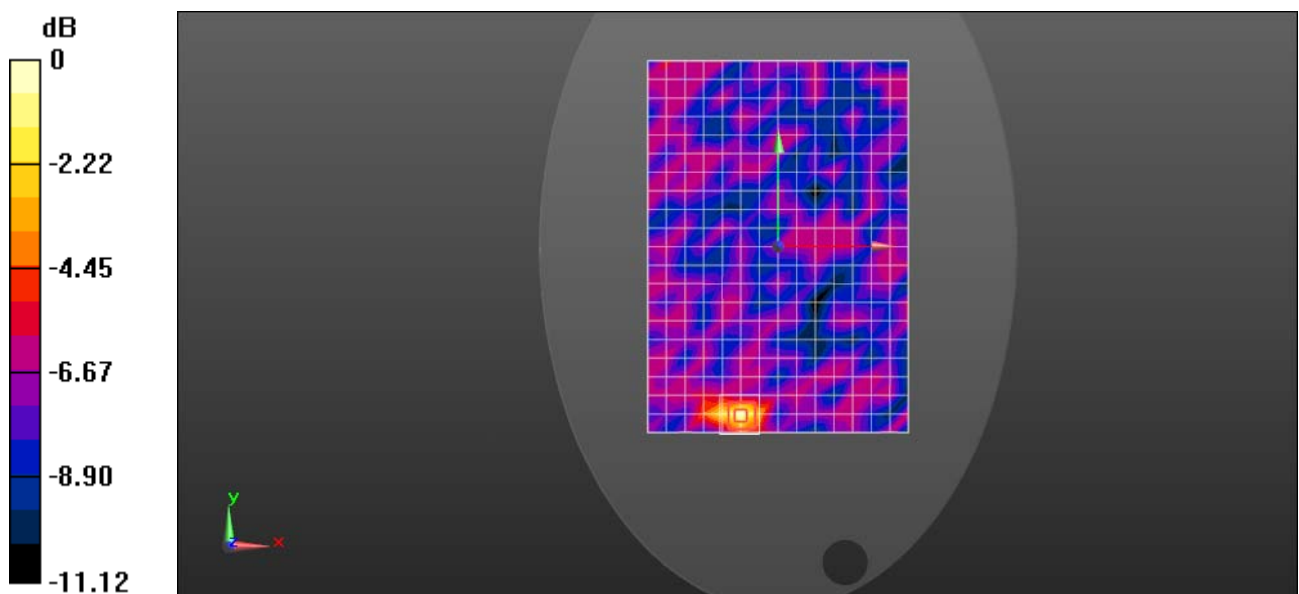Maximum value of SAR (measured) = 1.09 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 11.23 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 2.54 W/kg
SAR(1 g) = 0.994 W/kg; SAR(10 g) = 0.524 W/kg
Maximum value of SAR (measured) = 1.15 W/kg

0 dB = 1.09 W/kg = 0.36 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band V 4182CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium: MSL835;Medium parameters used (interpolated): f = 836.4 MHz; σ = 0.984 S/m; ϵ_r = 55.294; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.305 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
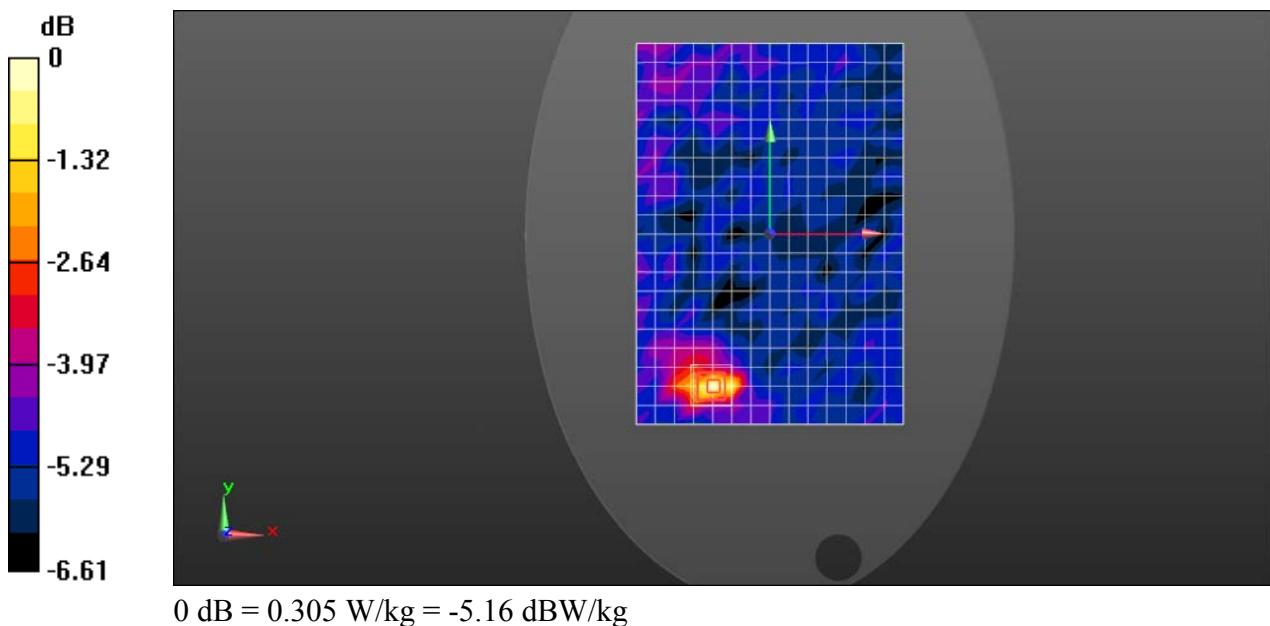Reference Value = 8.458 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.513 W/kg
SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.182 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.319 W/kg

0 dB = 0.305 W/kg = -5.16 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band V 4182CH Top side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium: MSL835;Medium parameters used (interpolated): f = 836.4 MHz; σ = 0.984 S/m; ε_r = 55.294; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0502 W/kg

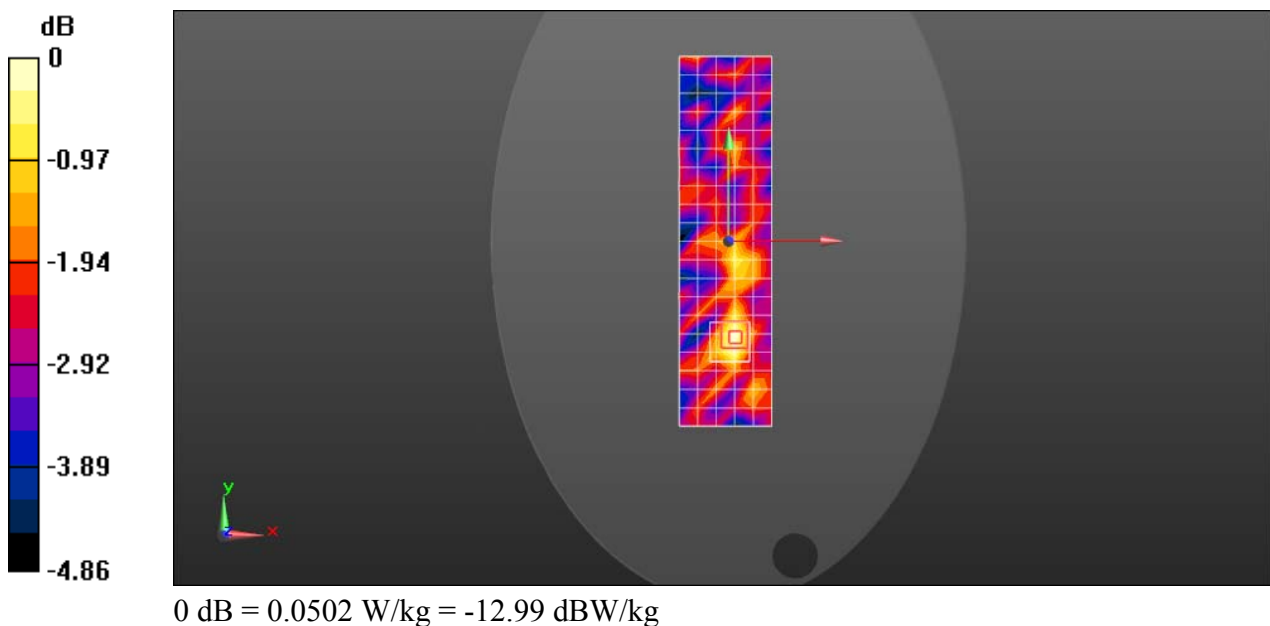**EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 6.202 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0580 W/kg
SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.035 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0454 W/kg

0 dB = 0.0502 W/kg = -12.99 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band V 4182CH Right side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium: MSL835;Medium parameters used (interpolated): f = 836.4 MHz; σ = 0.984 S/m;
ε_r = 55.294; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.75, 9.75, 9.75); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0469 W/kg

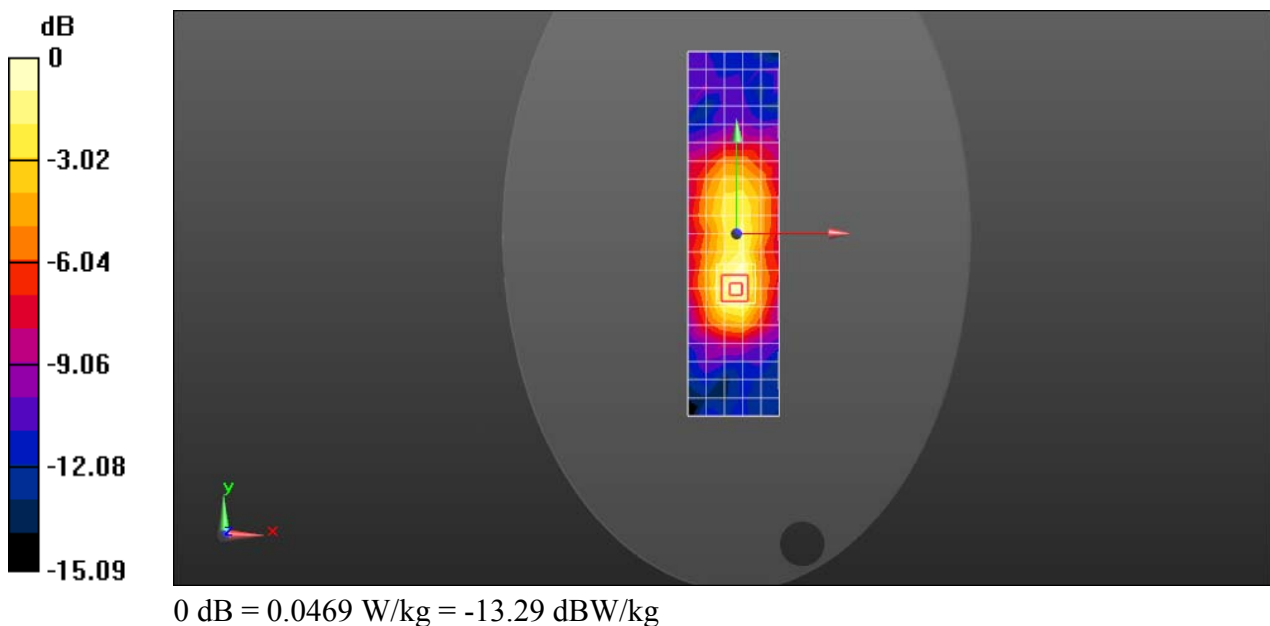**EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 5.696 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.0890 W/kg
SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.029 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0531 W/kg

0 dB = 0.0469 W/kg = -13.29 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band II 9262CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: MSL1900;Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.485 S/m; ε_r = 52.242; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.294 W/kg

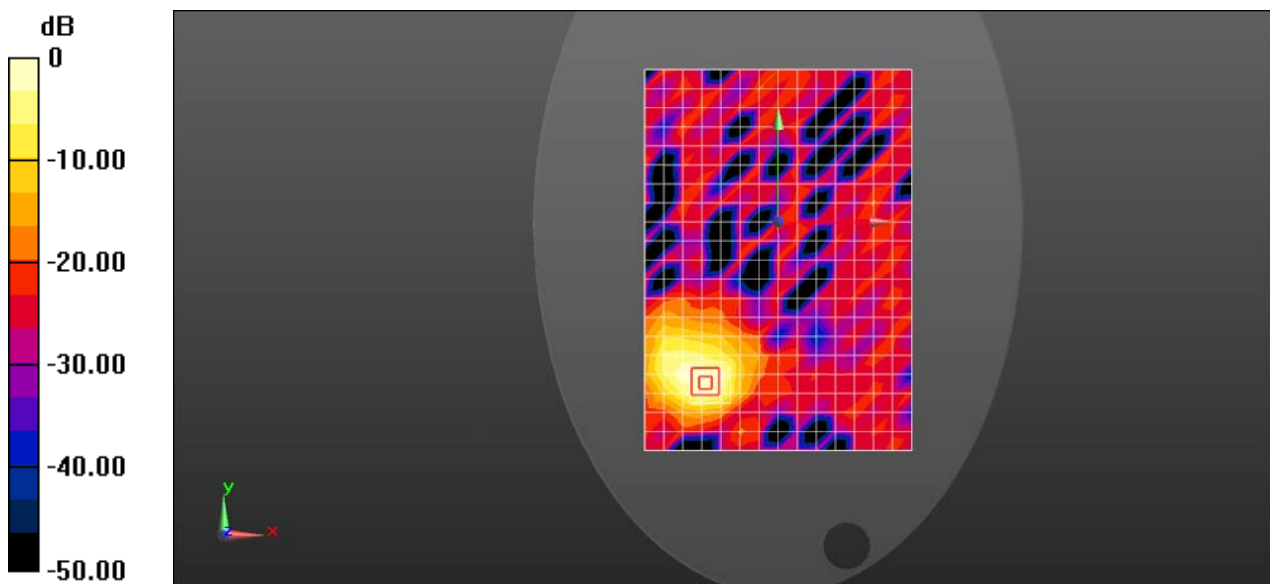**EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 3 V/m; Power Drift =0.102dB
Peak SAR (extrapolated) = 0.868 W/kg
SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.175 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.474 W/kg

0 dB = 0.294 W/kg = -5.32 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band II 9262CH Top side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: MSL1900;Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.485 S/m; ε_r = 52.242; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (5x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0282 W/kg

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
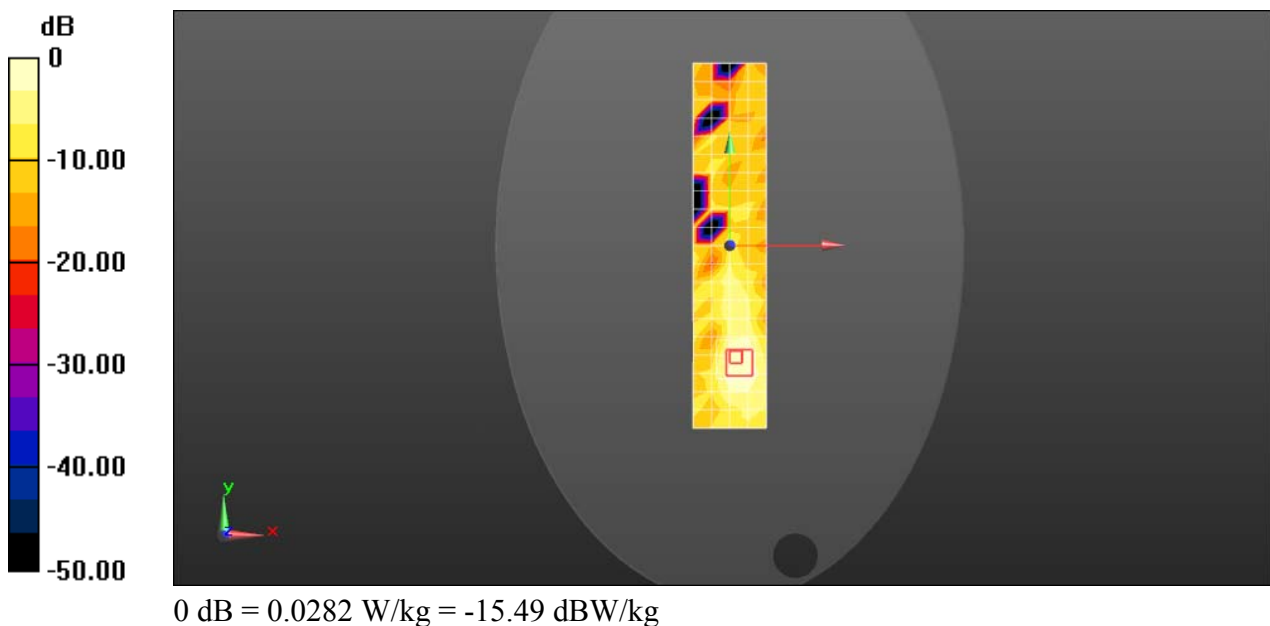Reference Value = 1.842 V/m; Power Drift =0.012 dB
Peak SAR (extrapolated) = 0.127 W/kg
SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.017 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.0407 W/kg

0 dB = 0.0282 W/kg = -15.49 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WCDMA Band II 9262CH Right side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: MSL1900;Medium parameters used (interpolated): f = 1852.4 MHz; σ = 1.485 S/m; ε_r = 52.242; ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.68, 7.68, 7.68); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.386 W/kg

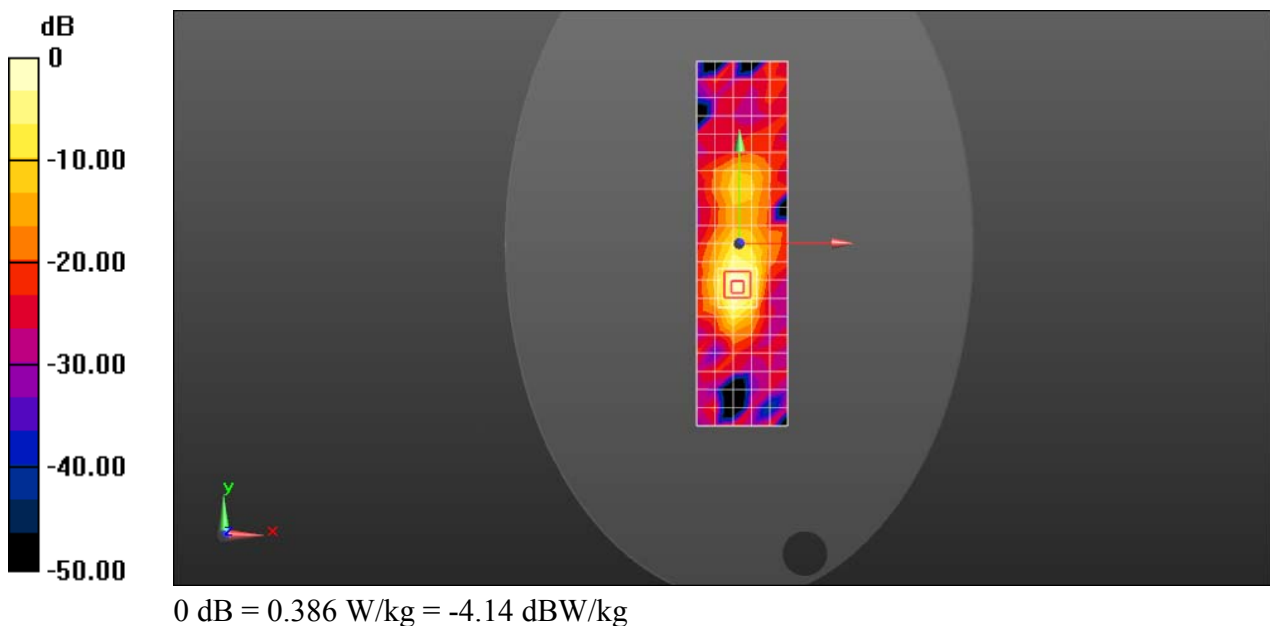**EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=8mm
Reference Value = 6.214 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.916 W/kg
SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.175 W/kg

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.486 W/kg

0 dB = 0.386 W/kg = -4.14 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 11CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: f = 2462 MHz; σ = 1.966 S/m; ε_r = 51.603;
ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
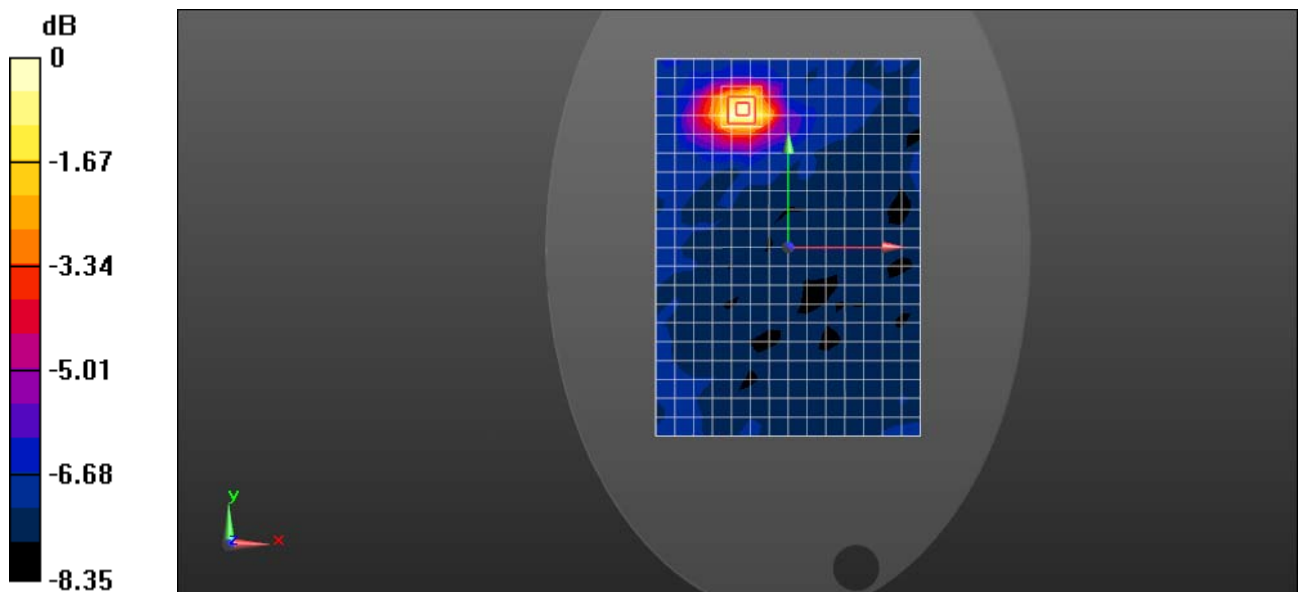Maximum value of SAR (measured) = 0.787 W/kg

EVT10Q/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.049 V/m; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 2.98 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.535 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

0 dB = 0.787 W/kg = -1.04 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 6CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: f = 2437 MHz; σ = 1.934 S/m; ε_r = 51.752; ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=12mm, dy=12mm
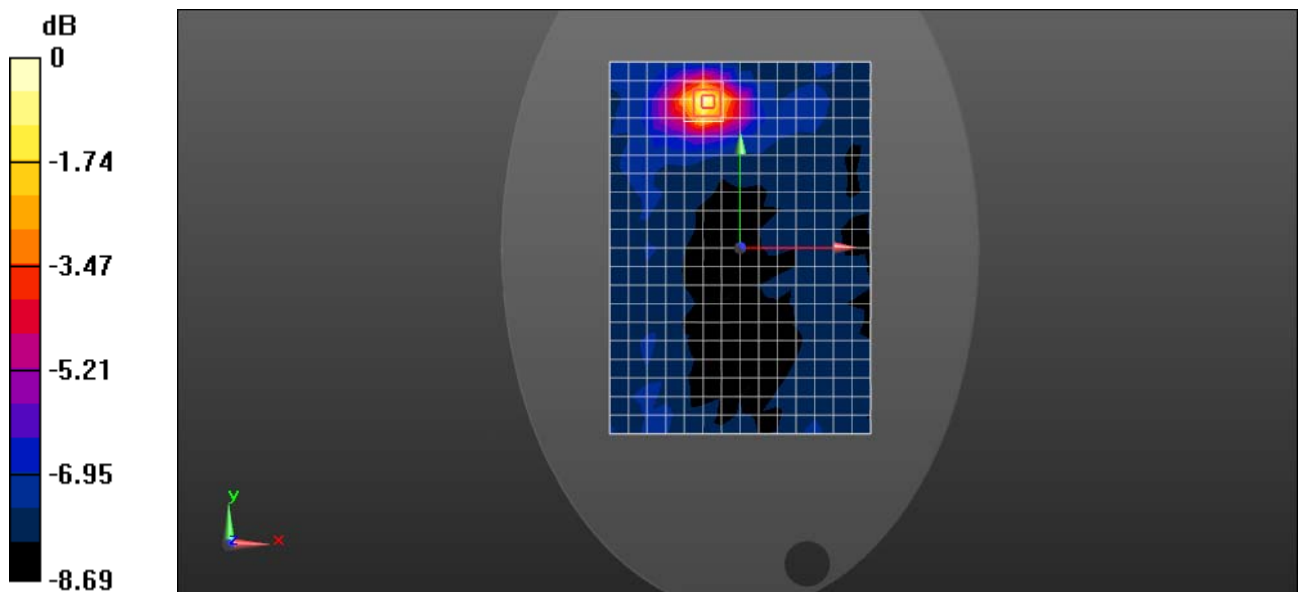Maximum value of SAR (measured) = 0.867 W/kg

EVT10Q/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.232 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.492 W/kg
Maximum value of SAR (measured) = 0.914 W/kg

0 dB = 0.867 W/kg = -0.62 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 1CH Back side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.905$ S/m; $\varepsilon_r = 51.831$;
$\rho = 1000$ kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=12mm, dy=12mm
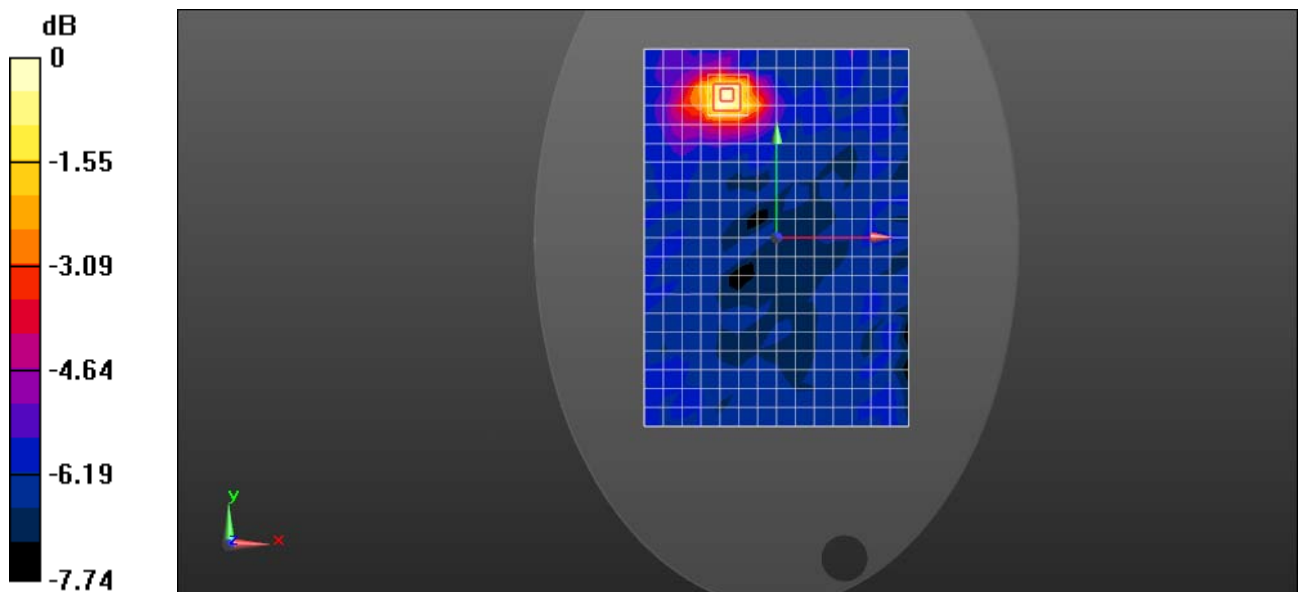Maximum value of SAR (measured) = 0.600 W/kg

EVT10Q/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.369 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.09 W/kg
SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.420 W/kg
Maximum value of SAR (measured) = 0.800 W/kg

0 dB = 0.600 W/kg = -2.22 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 11CH Left side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: f = 2462 MHz; σ = 1.966 S/m; ε_r = 51.603;
ρ = 1000 kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm
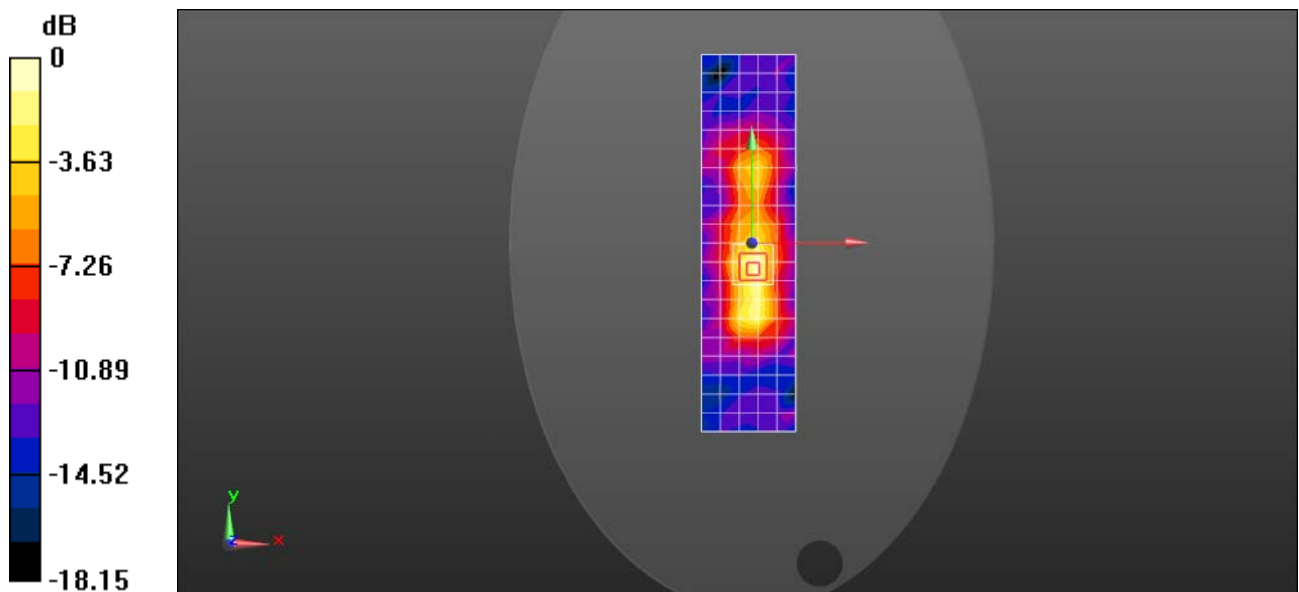Maximum value of SAR (measured) = 0.224 W/kg

EVT10Q/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.164 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.659 W/kg
SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.111 W/kg
Maximum value of SAR (measured) = 0.258 W/kg

0 dB = 0.224 W/kg = -6.50 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 11CH Top side 0mm

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: f = 2462 MHz; σ = 1.966 S/m; ε_r = 51.603;
ρ = 1000 kg/m^3
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Area Scan (6x21x1): Measurement grid: dx=15mm, dy=15mm
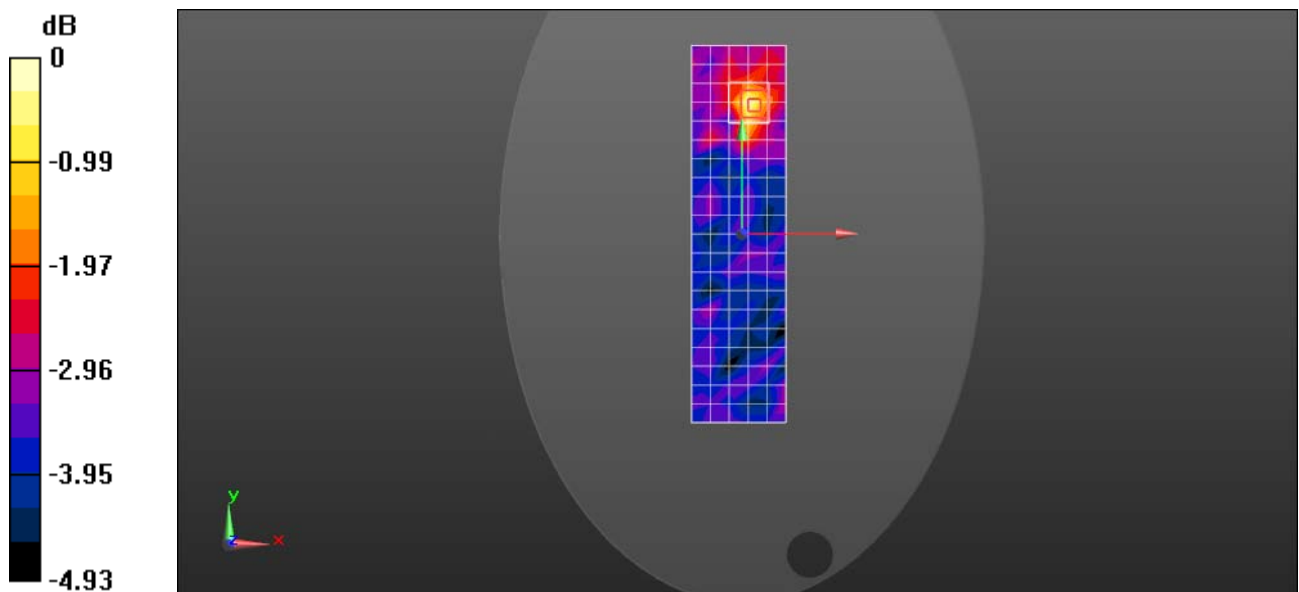Maximum value of SAR (measured) = 0.114 W/kg

EVT10Q/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.593 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.116 W/kg

0 dB = 0.114 W/kg = -9.45 dBW/kg

Test Laboratory: SGS-SAR Lab

EVT10Q WIFI 802.11b 11CH Back side 0mm-repeat

DUT: EVT10Q; Type: Eviant 10 3G; Serial: N/A

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL2450;Medium parameters used: f = 2462 MHz; σ = 1.966 S/m; ε_r = 51.603;

ρ = 1000 kg/m^3

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.13, 7.13, 7.13); Calibrated: 2013-12-10;
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 31.0
- Electronics: DAE4 Sn1303; Calibrated: 2014-04-23
- Phantom: ELI V5.0; Type: ELI; Serial: 1128
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

EVT10Q/Body/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm
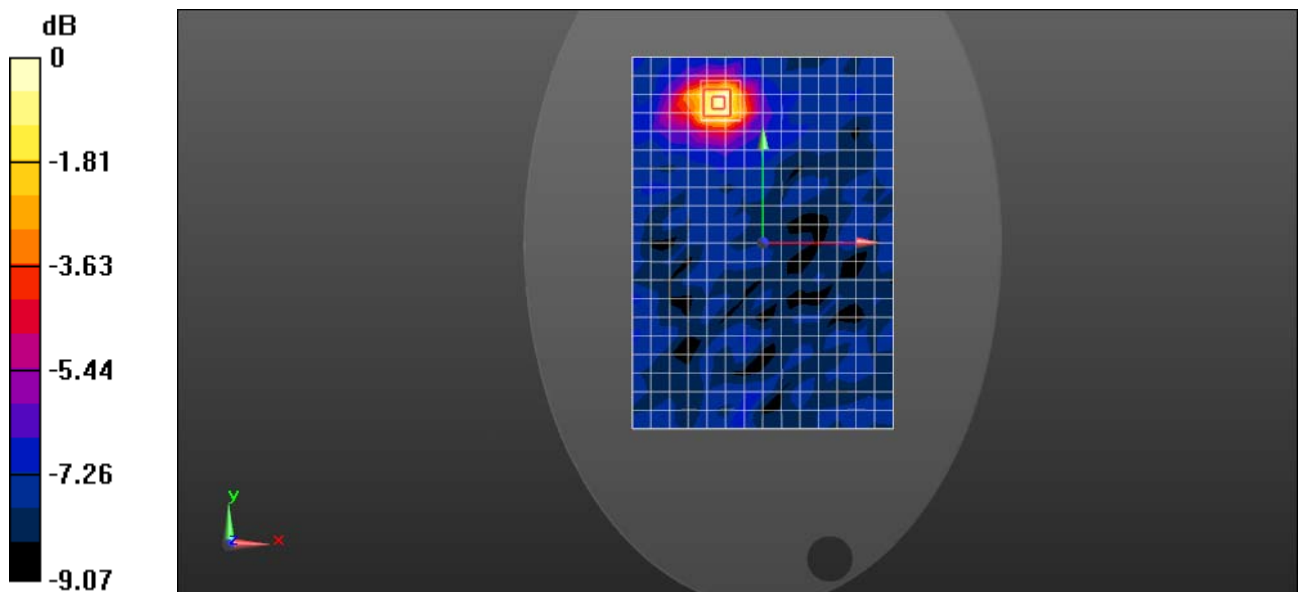Reference Value = 8.041 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 2.63 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.545 W/kg
Maximum value of SAR (measured) = 1.11 W/kg

EVT10Q/Body/Area Scan (15x21x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.904 W/kg

0 dB = 1.11 W/kg = 0.46 dBW/kg