

FCC Part 15B

Measurement and Test Report

For

UNISTAR TELECOM CO., LIMITED

**7A01, Tianjing Building, Tian'an High-tech Plaza, Futian District,
Shenzhen, China**

FCC ID: 2AC9P-F1S

Test Rule(s): FCC Part 15 Subpart B

Product Description: Smart phone

Tested Model: F1S

Report No.: STR14108034I-3

Tested Date: 2014-10-12 to 2014-10-22

Issued Date: 2014-10-24

Tested By: Silin Chen / Engineer

Reviewed By: Lahm Peng / EMC Manager

Approved & Authorized By: Jandy So / PSQ Manager

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY	7
3.2 TEST EQUIPMENT LIST AND DETAILS	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS	8
3.6 SUMMARY OF TEST RESULTS/PLOTS	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
4. RADIATED EMISSIONS.....	13
4.1 MEASUREMENT UNCERTAINTY	13
4.2 TEST EQUIPMENT LIST AND DETAILS	13
4.3 TEST PROCEDURE.....	13
4.4 TEST RECEIVER SETUP	14
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
4.6 ENVIRONMENTAL CONDITIONS	14
4.7 SUMMARY OF TEST RESULTS/PLOTS	14

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: UNISTAR TELECOM CO., LIMITED
Address of applicant: 7A01, Tianjing Building, Tian'an High-tech Plaza, Futian District, Shenzhen, China
Manufacturer: UNISTAR TELECOM CO., LIMITED
Address of manufacturer: 7A01, Tianjing Building, Tian'an High-tech Plaza, Futian District, Shenzhen, China

General Description of EUT	
Product Name:	Smart phone
Trade Name:	KATA, UTTA, BAARNO
Model No.:	F1S
Adding Model:	U1, B2, F1, F1U, F1BS, F1SU, F1SBS, AX56
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The other model listed in the report has different appearance only of F1S without circuit and electronic construction changed, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC 5.0V
Rated Current:	1A
Rated Power:	/
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	24MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the UNISTAR TELECOM CO., LIMITED in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging And Playing	Connect to Adapter, Earphone
TF1S	Downloading	Connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.05	Shielded	With Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E23	EB12648265
Adaptor	Astruml	SAPA05010EUU	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone	1.2	Unshielded	Without Ferrite

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.


3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

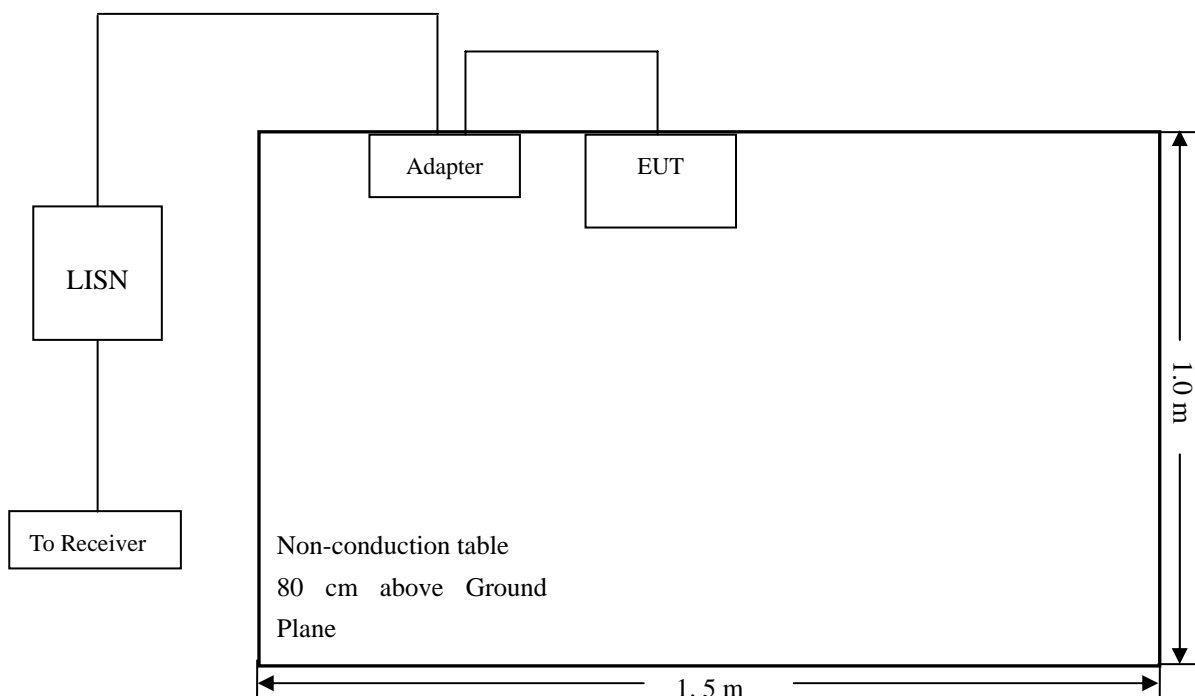

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-6.90 dB at 3.4380 MHz in the **Neutral** mode, **Peak** detector, **0.15-30MHz**

3.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Smart phone
 Tested Model: F1S
 Operating Condition: Charging and Playing
 Comment: Adapter:DC5V

Test Specification: Neutral

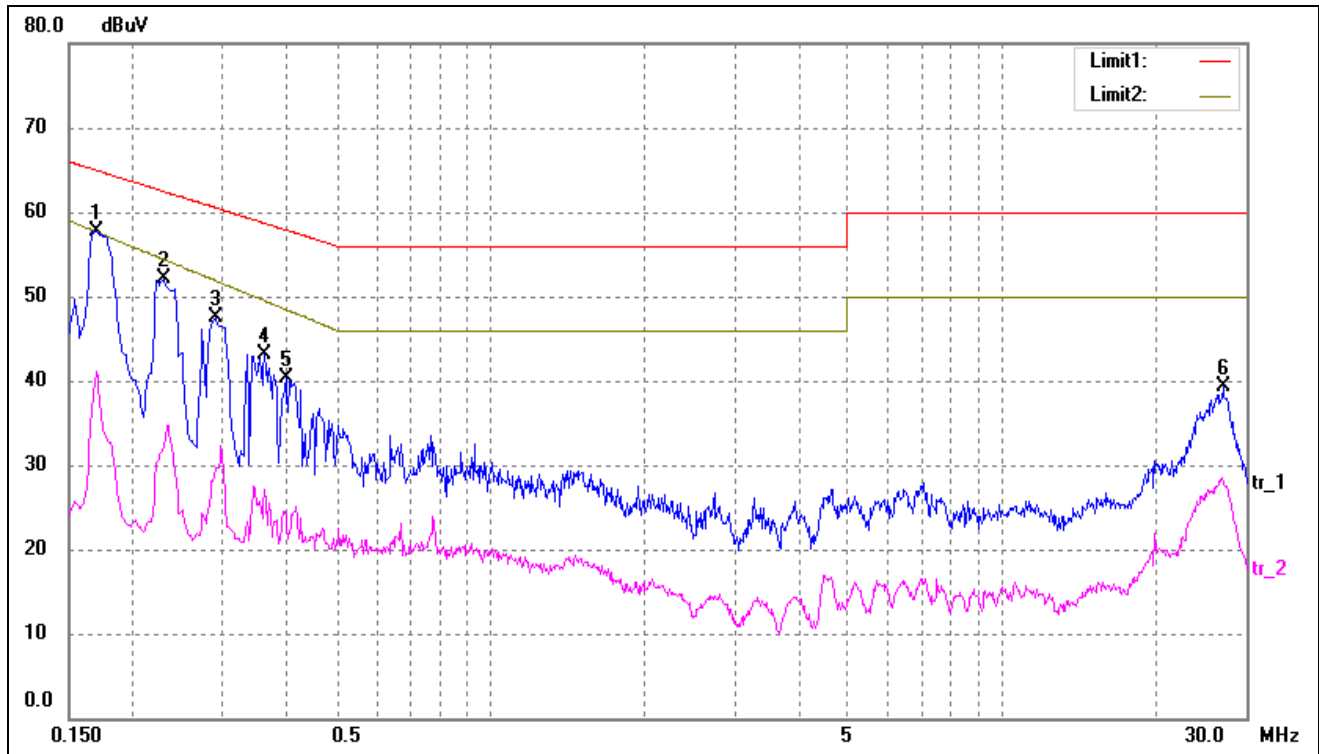

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	48.16	9.50	57.66	64.96	-7.30	peak
2	0.2300	42.66	9.50	52.16	62.45	-10.29	peak
3	0.2900	37.96	9.50	47.46	60.52	-13.06	peak
4	0.3620	33.59	9.50	43.09	58.68	-15.59	peak
5	0.3980	30.72	9.50	40.22	57.89	-17.67	peak
6	27.0580	26.31	13.00	39.31	60.00	-20.69	peak

Test Specification: Line

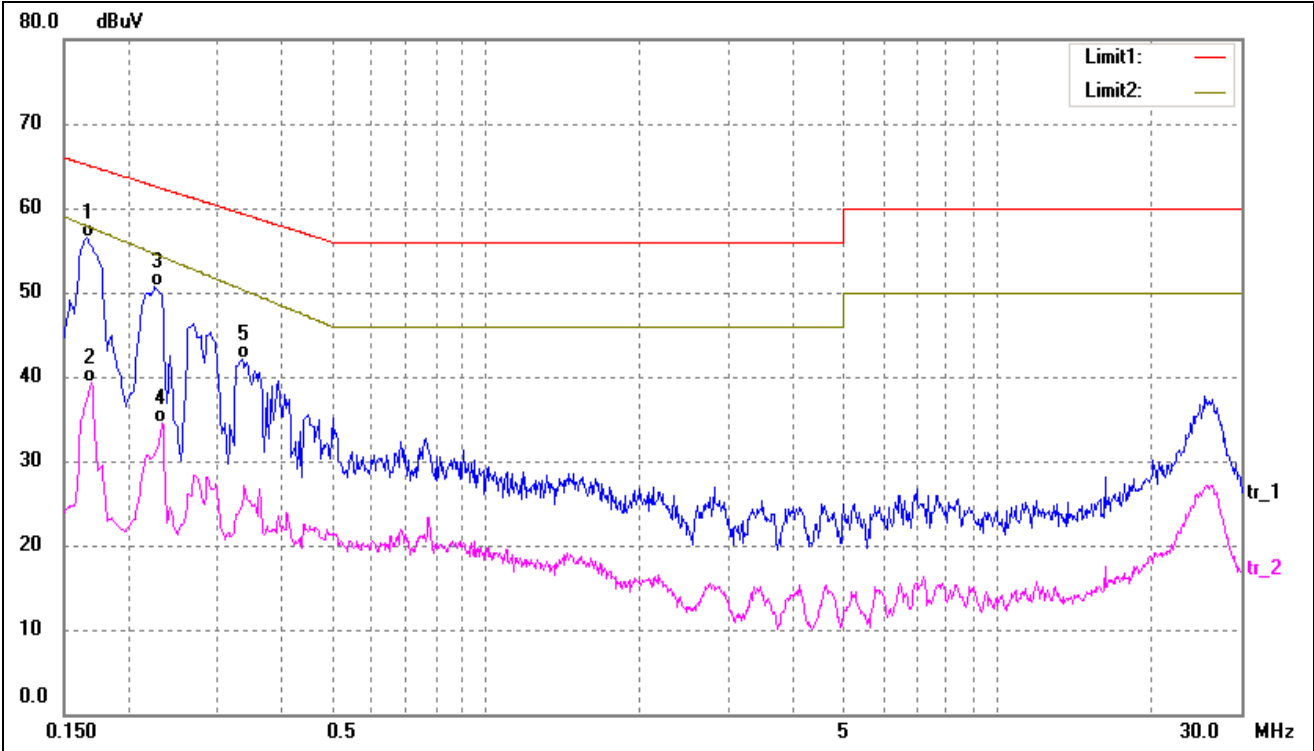


No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1*	0.1660	46.99	9.50	56.49	65.15	-8.66	QP
2	0.1700	29.90	9.50	39.40	57.64	-18.24	AVG
3	0.2260	41.15	9.50	50.65	62.59	-11.94	QP
4	0.2340	25.09	9.50	34.59	54.19	-19.60	AVG
5	0.3339	32.63	9.50	42.13	59.35	-17.22	QP

Plot of Conducted Emissions Test Data


EUT: Smart phone
 Tested Model: F1S
 Operating Condition: Downloading
 Comment: USB 5V

Test Specification: Neutral

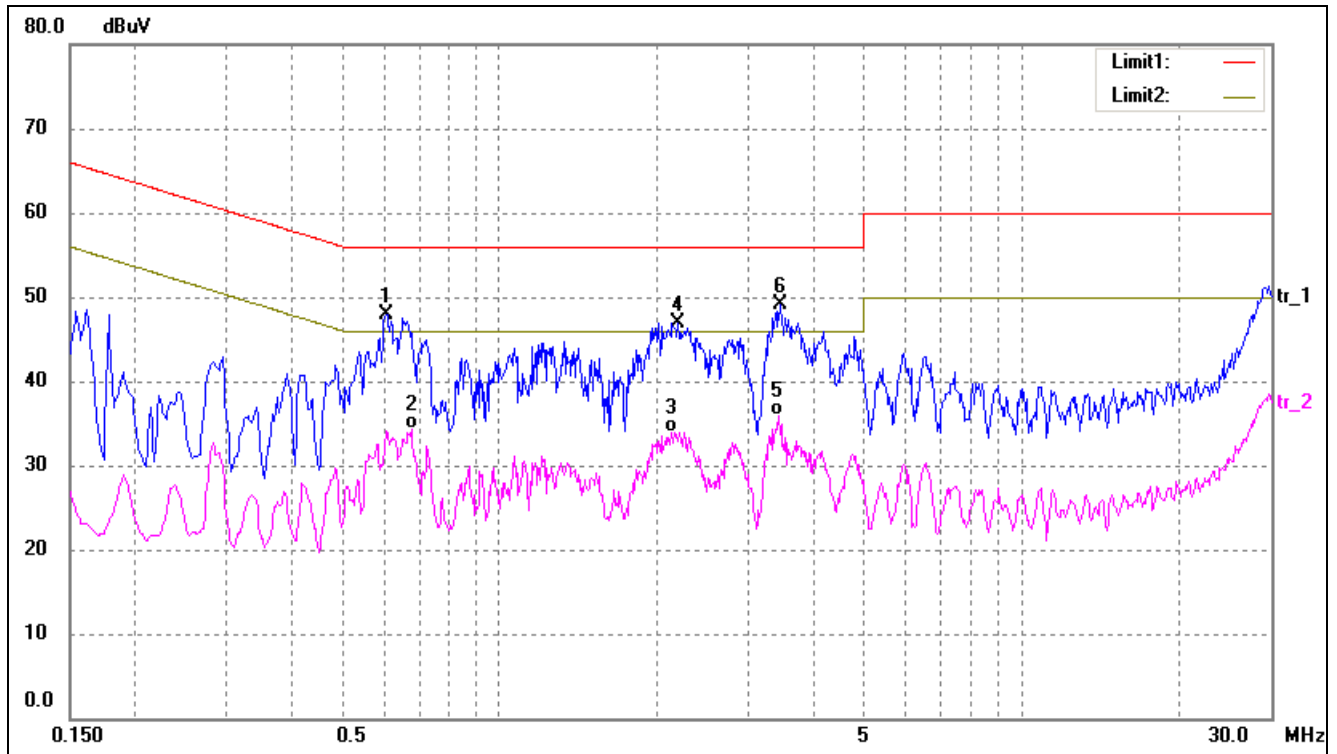

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6060	38.31	9.61	47.92	56.00	-8.08	peak
2	0.6780	24.55	9.68	34.23	46.00	-11.77	AVG
3	2.1380	23.93	10.00	33.93	46.00	-12.07	AVG
4	2.1940	36.95	10.00	46.95	56.00	-9.05	peak
5	3.4220	25.88	10.00	35.88	46.00	-10.12	AVG
6*	3.4380	39.10	10.00	49.10	56.00	-6.90	peak

Test Specification: Line

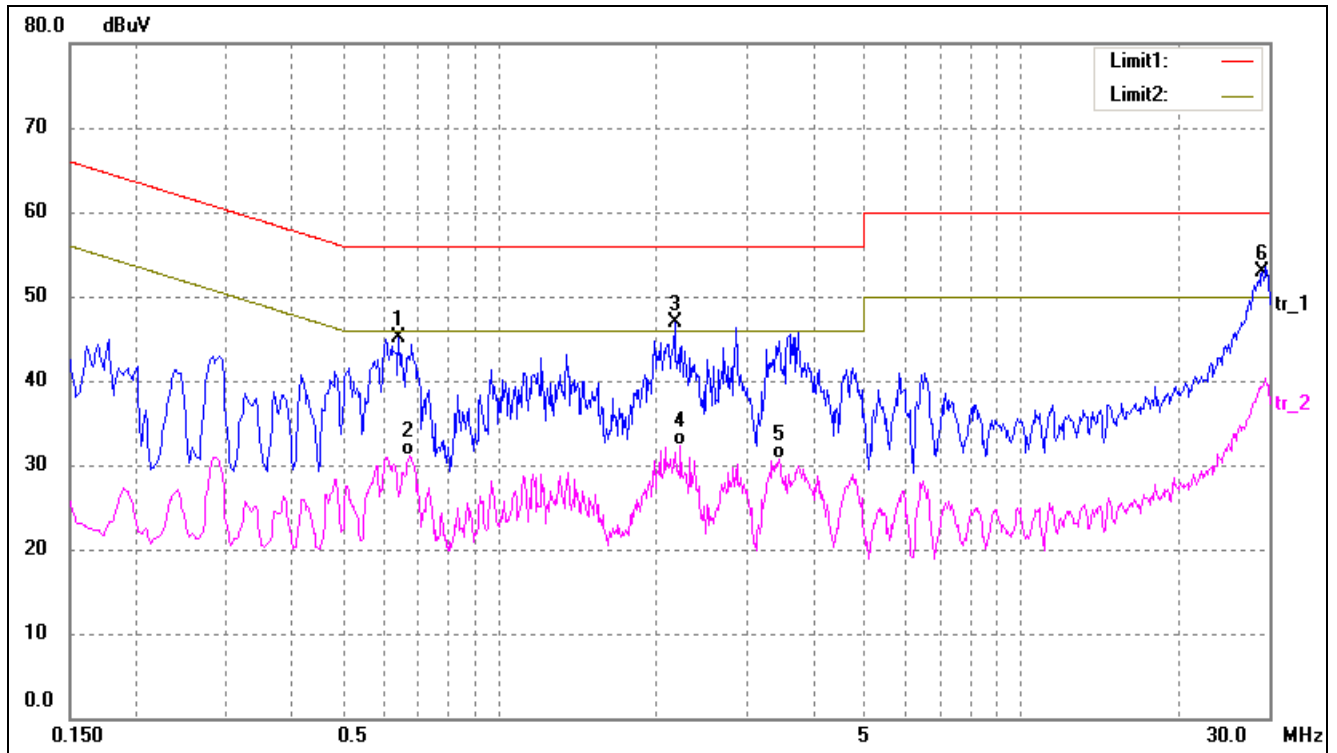

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6420	35.48	9.64	45.12	56.00	-10.88	peak
2	0.6740	21.42	9.67	31.09	46.00	-14.91	AVG
3	2.1780	36.87	10.00	46.87	56.00	-9.13	peak
4	2.2300	22.26	10.00	32.26	46.00	-13.74	AVG
5	3.4420	20.65	10.00	30.65	46.00	-15.35	AVG
6*	29.1860	39.85	13.00	52.85	60.00	-7.15	peak

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

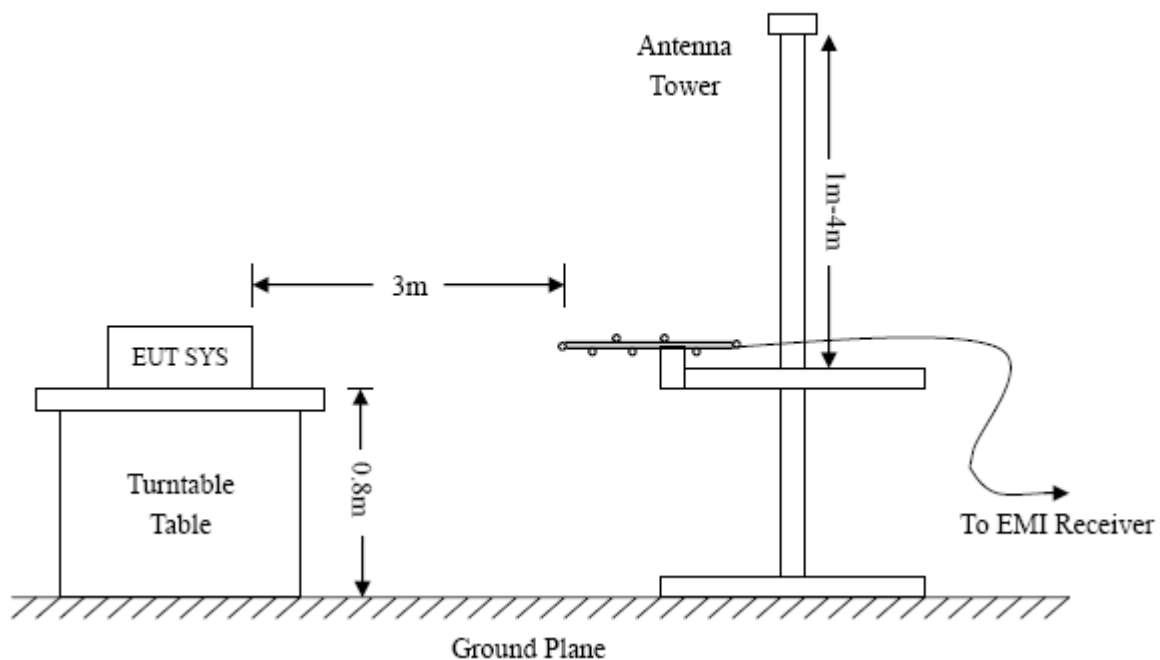

4.4 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$


4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-4.06 dB at 361.7139 MHz in the Vertical polarization, Downloading mode, 9 kHz to 6 GHz, 3Meters

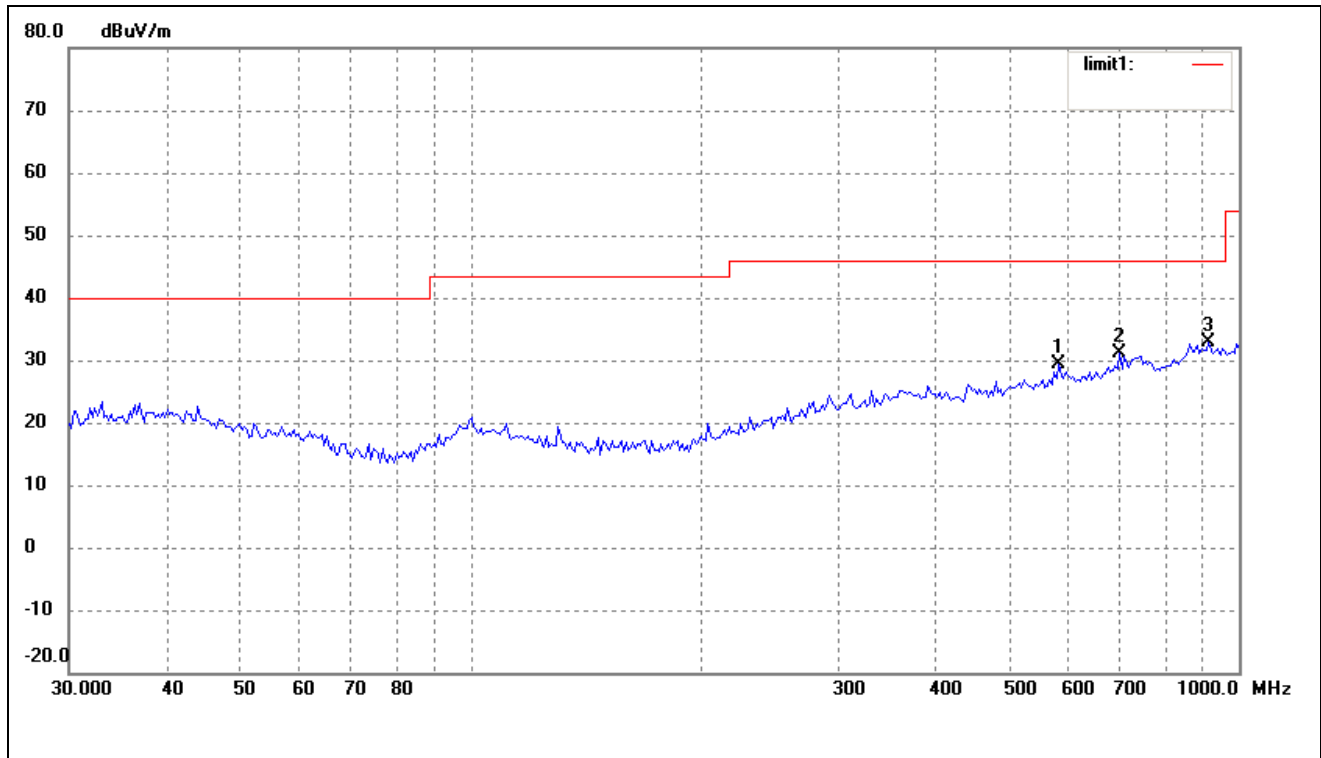
Plot of Radiated Emissions Test Data*EUT:* Smart phone*Tested Model:* F1S*Operating Condition:* Charging And Playing*Comment:* AC 120V/60Hz; Adapter DC 5V/2A*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	582.7425	16.84	12.60	29.44	46.00	-16.56	360	100	peak
2	699.3046	17.52	13.66	31.18	46.00	-14.82	360	100	peak
3	912.8620	16.35	16.51	32.86	46.00	-13.14	360	100	peak

Test Specification: Vertical

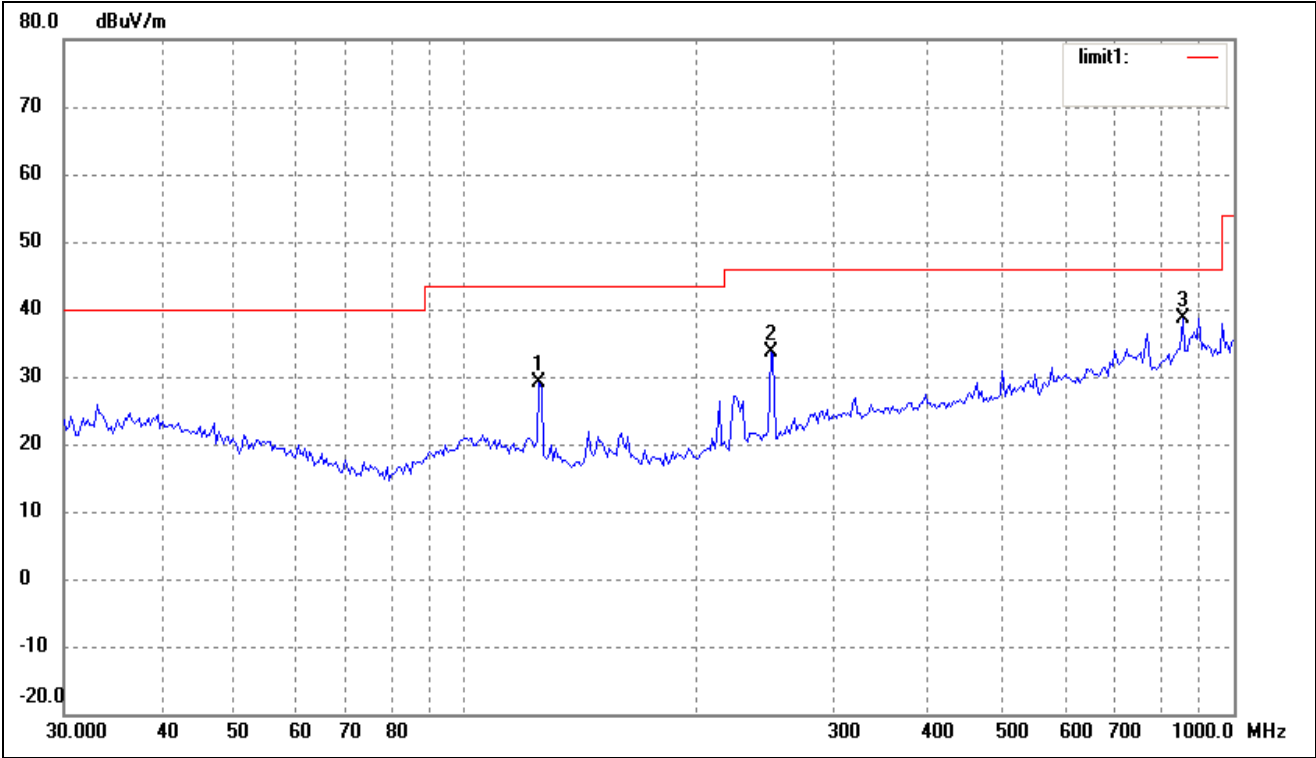


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	124.5690	24.55	4.53	29.08	43.50	-14.42	162	100	peak
2	249.4250	26.28	7.27	33.55	46.00	-12.45	200	100	peak
3	857.0247	20.75	17.97	38.72	46.00	-7.28	154	100	peak

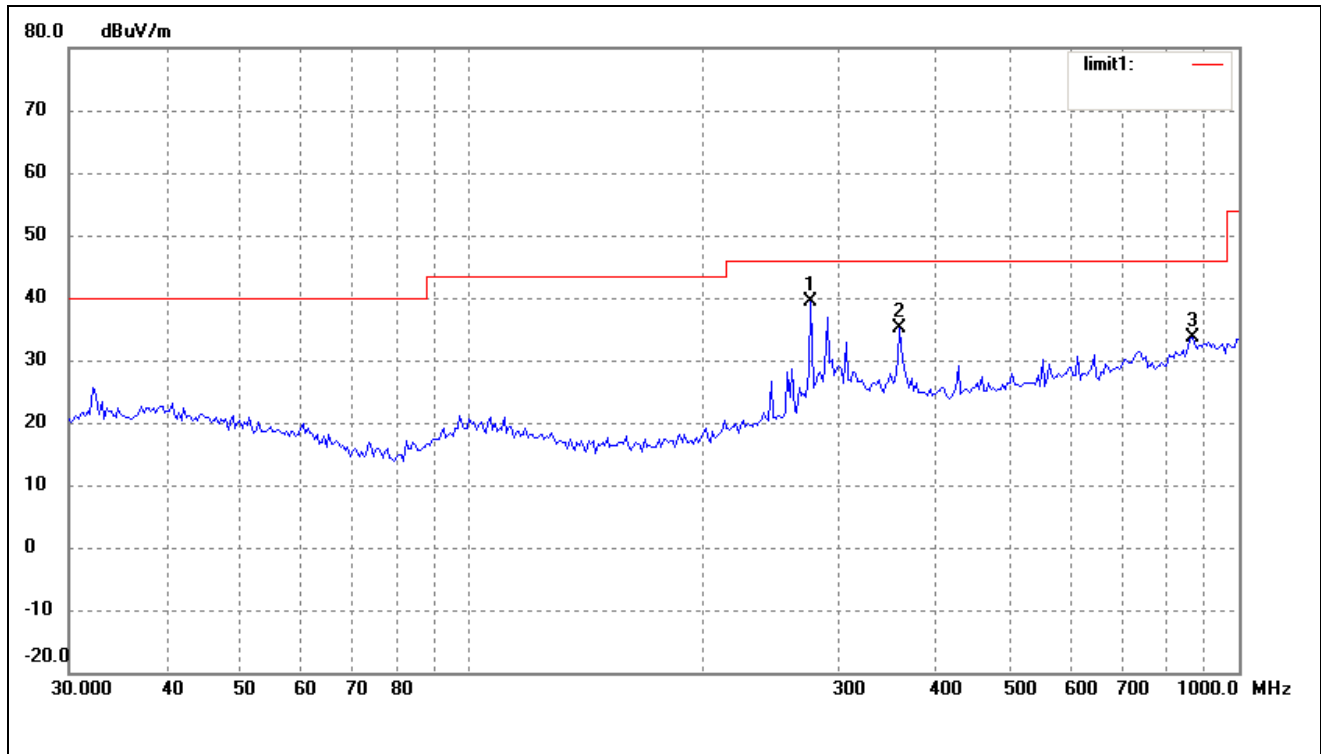Plot of Radiated Emissions Test Data*EUT:* Smart phone*Tested Model:* F1S*Operating Condition:* Downloading*Comment:* AC 120V/60Hz; Adapter DC 5V/2A*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	277.0935	31.21	8.13	39.34	46.00	-6.66	360	100	peak
2	361.7139	25.80	9.26	35.06	46.00	-10.94	360	100	peak
3	869.1302	17.21	16.46	33.67	46.00	-12.33	360	100	peak

Test Specification: Vertical

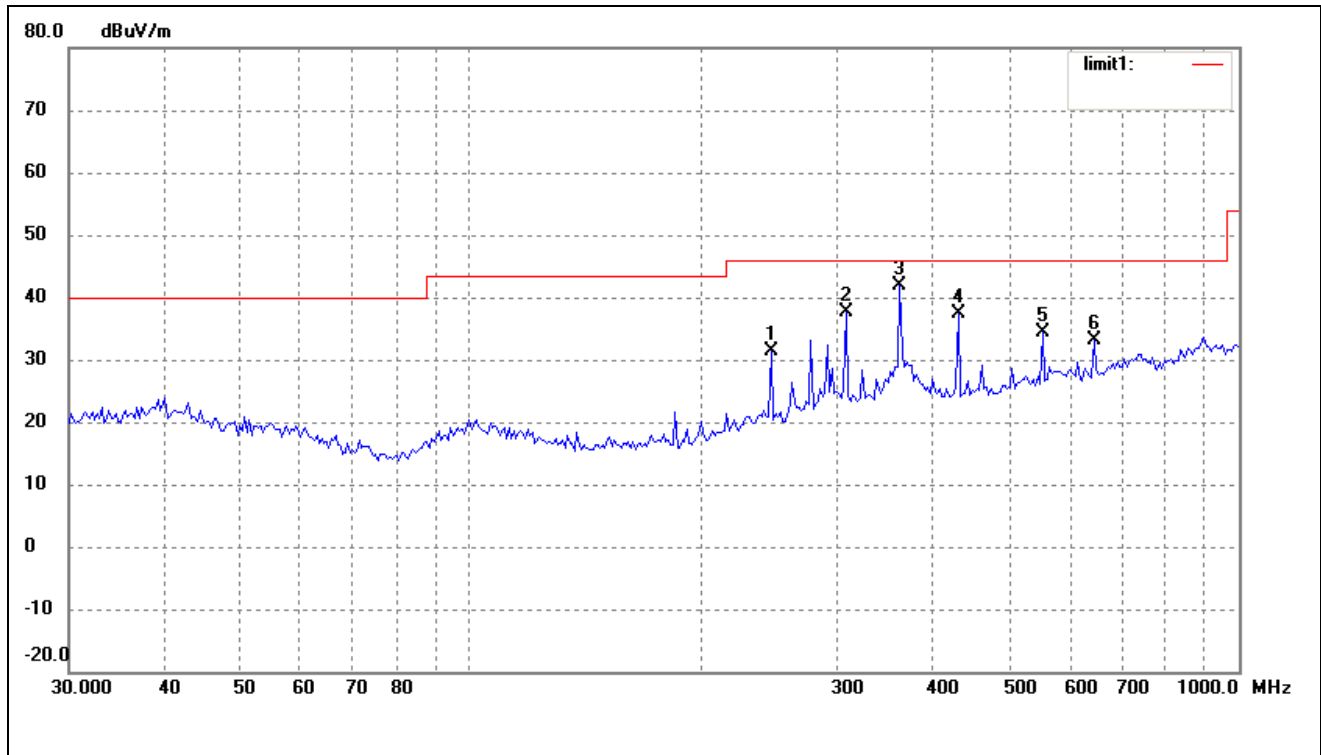

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	245.9509	24.98	6.47	31.45	46.00	-14.55	360	100	peak
2	307.8313	28.46	9.20	37.66	46.00	-8.34	360	100	peak
3	361.7139	32.68	9.26	41.94	46.00	-4.06	360	100	peak
4	431.0316	27.70	9.74	37.44	46.00	-8.56	360	100	peak
5	554.8254	22.97	11.42	34.39	46.00	-11.61	360	100	peak
6	647.3856	20.82	12.37	33.19	46.00	-12.81	360	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

***** END OF REPORT *****