

# **FCC Test Report**

FCC ID : 2ACCD-OTT-AWDH-01

Equipment : 802.11 b/g/n Half Mini Card

Model No. : DNXA-116

Brand Name : WNC

Applicant : HYUNDAI MEDIA Co.,Ltd

Address : 1F Soonhan B/D(Annex), 214, Galmachi-ro,

Jungwon-gu, Seongnam-si, Gyeonggi-do,

462-807 Republic of Korea

Standard : 47 CFR FCC Part 15.247

Received Date : Apr. 17, 2014

Tested Date : Apr. 23 ~ May 05, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

lac-MRA



Report No.: FR441702 Page : 1 of 62



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62



## **Release Record**

Report No.	Version	Description	Issued Date
FR441702	Rev. 01	Initial issue	Jun. 30, 2014

Report No.: FR441702 Page: 3 of 62



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.154MHz 46.28 (Margin -9.50dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2487.00MHz 53.38 (Margin -0.62dB) - AV	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11b: 17.52 11g: 27.00 HT20: 26.83 HT40: 21.77	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR441702 Page: 4 of 62



## 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	· · · I I I I I I I I I I I I I I I I I			Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15			
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

#### 1.1.2 Antenna Details

Ant. No.	Model	Туре	Gain (dBi)	Connector
1	N2420DS	dipole	2.32	UFL

#### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host

#### 1.1.4 Accessories

N/A

Report No.: FR441702 Page : 5 of 62



## 1.1.5 Channel List

Frequency	band (MHz)	2400~2483.5		
802.11 b /	g / n HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

## 1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, V2.3					
	Mode	Duty cycle (%)	Duty factor (dB)			
	11b	99.71%	0.01			
Duty Cycle and Duty Factor	11g	97.94%	0.09			
	HT20	98.35%	0.07			
	HT40	96.85%	0.14			

Report No.: FR441702 Page: 6 of 62




## 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	11.5
11b	2437	12.5
11b	2462	11.5
11g	2412	11.5
11g	2437	17.5
11g	2462	11
HT20	2412	11
HT20	2437	17
HT20	2462	10.5
HT40	2422	7.5
HT40	2437	10.5
HT40	2452	7.5

## 1.2 Local Support Equipment List

	Support Equipment List							
No.	No. Equipment Brand Model S/N FCC ID Signal cable / Length (m)							
1	Notebook	DELL	E6430		DoC			

## 1.3 Test Setup Chart

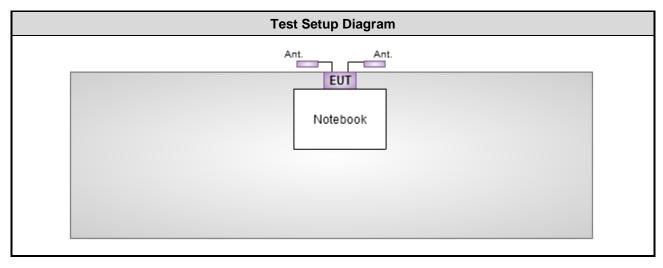

Report No.: FR441702 Page: 7 of 62



## 1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (	Conduction room 1 / (CO01-WS)						
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014			
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015			
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015			
Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission							
Test Site	966 chamber 2 / (03CH02-WS)							
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015			
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014			
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014			
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014			
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014			
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014			
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014			
Note: Calibration Inter	rval of instruments listed	d above is one year.						

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014			
Note: Calibration Interval of instruments listed above is two year.								

Report No.: FR441702 Page: 8 of 62



Test Item	RF Conducted								
Test Site	(TH01-WS)	(TH01-WS)							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015				
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014				
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014				
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014				
Note: Calibration Interval of instruments listed above is one year.									

#### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Frequency error	±34.134 Hz						
Temperature	±0.6 °C						
Conducted emission	±2.670 dB						
AC conducted emission	±2.92 dB						
Radiated emission ≤ 1GHz	±3.26 dB						
Radiated emission > 1GHz	±4.94 dB						

Report No.: FR441702 Page: 9 of 62



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 75%	Alex Tsai
Radiated Emissions 03CH02-WS		20°C / 68%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	22°C / 63%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	
Fundamental Emission Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

Report No.: FR441702 Page: 10 of 62



## 3 Transmitter Test Results

#### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup




Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR441702 Page: 11 of 62




#### 3.1.4 Test Result of Conducted Emissions

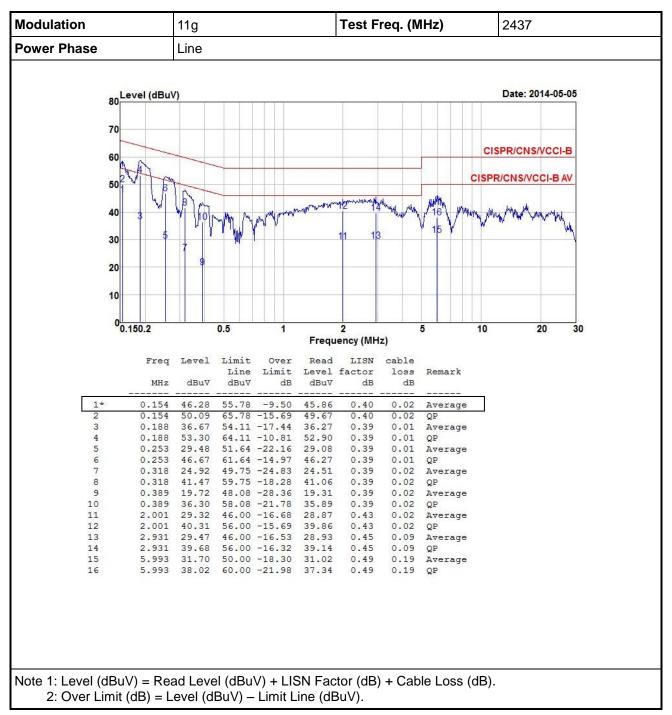

Report No.: FR441702 Page: 12 of 62



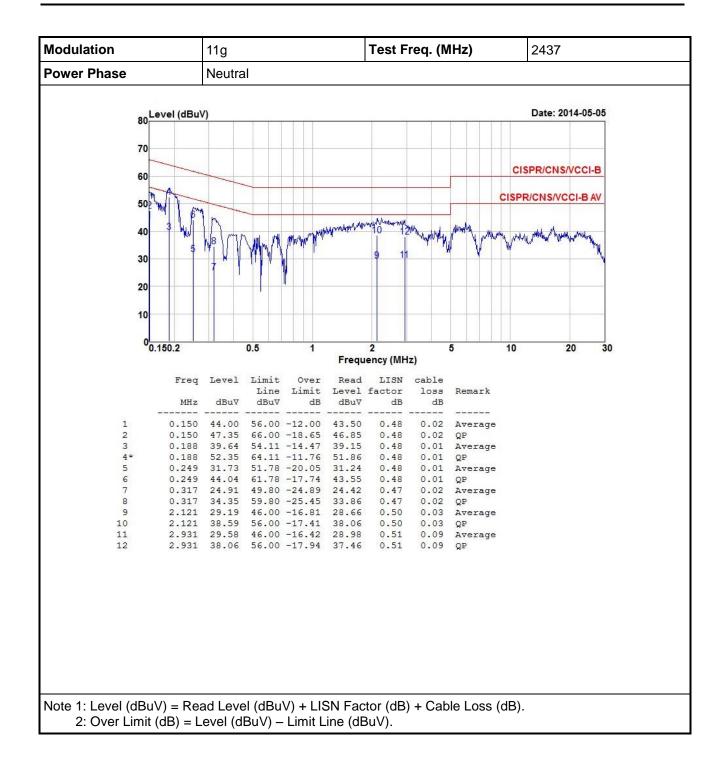

Report No.: FR441702 Page: 13 of 62



## 3.2 6dB and Occupied Bandwidth


#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### 3.2.3 Test Setup




Report No.: FR441702 Page: 14 of 62



## 3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	N	Eron (MU=)		6dB Bandwidth (MHz)			
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	2	2412	10.09	10.09			500
11b	2	2437	10.09	10.09			500
11b	2	2462	10.09	10.09			500
11g	2	2412	16.35	16.35			500
11g	2	2437	16.35	16.35			500
11g	2	2462	16.35	16.35			500
HT20	2	2412	17.33	17.57			500
HT20	2	2437	17.04	17.57			500
HT20	2	2462	17.28	17.57			500
HT40	2	2422	36.41	36.41			500
HT40	2	2437	36.41	36.41			500
HT40	2	2452	36.41	35.83			500

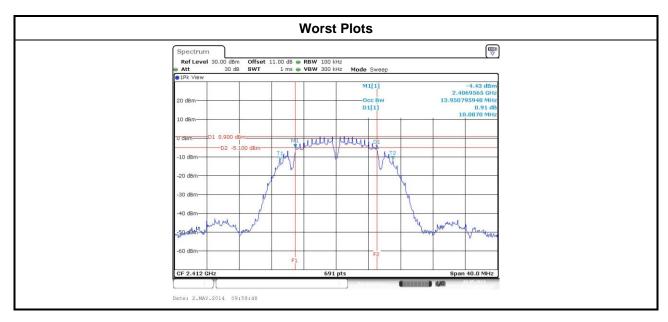

Report No.: FR441702 Page: 15 of 62



Modulation	N	Freq.				
Mode	N <sub>TX</sub>	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	14.04	14.04		
11b	2	2437	14.04	14.04		
11b	2	2462	13.93	13.97		
11g	2	2412	17.08	16.86		
11g	2	2437	17.11	17.11 16.93		
11g	2	2462	17.04	16.86		
HT20	2	2412	18.05	18.02		
HT20	2	2437	18.09	18.09		
HT20	2	2462	18.09	18.02		
HT40	2	2422	37.77	37.71		
HT40	2	2437	38.03	37.84		
HT40	2	2452	38.03	37.77		



Report No.: FR441702 Page : 16 of 62



### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Cor	duct	ed power shall not exceed 1Watt.
$\boxtimes$	Ante	enna gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna gain > 6dBi
		Non Fixed, point to point operations.  The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
		Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
		Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

#### 3.3.2 Test Procedures

Maximum Peak Conducted Output Power

#### □ Spectrum analyzer

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

#### Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

#### Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



Report No.: FR441702 Page: 17 of 62



## 3.3.4 Test Result of Maximum Output Power

Modulation Mode	N <sub>TX</sub>	Freq.	Peak		d output p 3m)	ower	Total Power	Total Power	Limit (dBm)
Wode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(mW) (dBm)	
11b	2	2412	13.21	12.68			39.476	15.96	30.00
11b	2	2437	15.11	13.82			56.533	17.52	30.00
11b	2	2462	12.99	12.44			37.446	15.73	30.00
11g	2	2412	20.04	19.36			187.223	22.72	30.00
11g	2	2437	24.22	23.74			500.833	27.00	30.00
11g	2	2462	19.42	18.28			154.796	21.90	30.00
HT20	2	2412	19.63	18.63			164.779	22.17	30.00
HT20	2	2437	24.22	23.37			481.511	26.83	30.00
HT20	2	2462	19.05	18.77			155.688	21.92	30.00
HT40	2	2422	16.04	15.75			77.763	18.91	30.00
HT40	2	2437	19.14	18.35			150.426	21.77	30.00
HT40	2	2452	15.95	15.15			72.089	18.58	30.00

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conduc		age) outpu Bm)	t power	Total Power	Total Power	Limit
Wiode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	2	2412	10.97	10.46			23.620	13.73	30.00
11b	2	2437	13.03	11.58			34.479	15.38	30.00
11b	2	2462	10.85	10.21			22.657	13.55	30.00
11g	2	2412	11.83	10.95			27.686	14.42	30.00
11g	2	2437	17.01	16.52			95.109	19.78	30.00
11g	2	2462	10.89	10.23			22.818	13.58	30.00
HT20	2	2412	11.32	10.28			24.218	13.84	30.00
HT20	2	2437	16.89	16.19			90.456	19.56	30.00
HT20	2	2462	10.56	9.93			21.216	13.27	30.00
HT40	2	2422	7.03	6.72			9.746	9.89	30.00
HT40	2	2437	10.63	9.73			20.958	13.21	30.00
HT40	2	2452	7.01	6.28			9.270	9.67	30.00

Note: Conducted average output power is for reference only.

Report No.: FR441702 Page: 18 of 62



### 3.4 Power Spectral Density

#### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 3kHz, VBW = 10kHz.
  - Detector = Peak, Sweep time = auto couple.
  - 3. Trace mode = max hold, allow trace to fully stabilize.
  - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 100kHz, VBW = 300 kHz.
  - 2. Detector = RMS, Sweep time = auto couple.
  - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
  - 4. Perform the measurement over a single sweep.
  - 5. Use the peak marker function to determine the maximum amplitude level.

#### 3.4.3 Test Setup




Report No.: FR441702 Page: 19 of 62



## 3.4.4 Test Result of Power Spectral Density

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	-11.03	8.00
11b	2	2437	-10.09	8.00
11b	2	2462	-11.53	8.00
11g	2	2412	-11.59	8.00
11g	2	2437	-6.83	8.00
11g	2	2462	-12.26	8.00
HT20	2	2412	-13.18	8.00
HT20	2	2437	-6.82	8.00
HT20	2	2462	-13.30	8.00
HT40	2	2422	-19.97	8.00
HT40	2	2437	-16.38	8.00
HT40	2	2452	-19.31	8.00

Note: Test result is bin-by-bin summing measured value of each TX port.

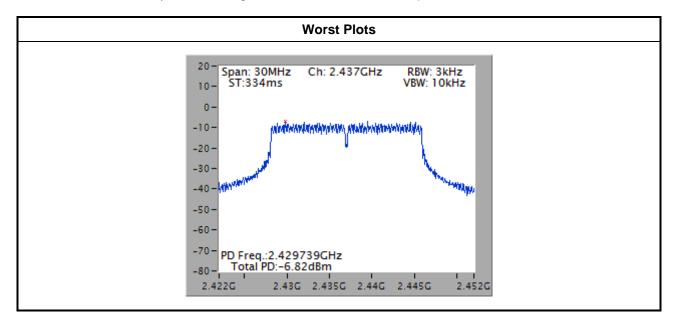

Report No.: FR441702 Page: 20 of 62



### 3.5 Unwanted Emissions into Restricted Frequency Bands

#### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR441702 Page: 21 of 62




## 3.5.3 Test Setup

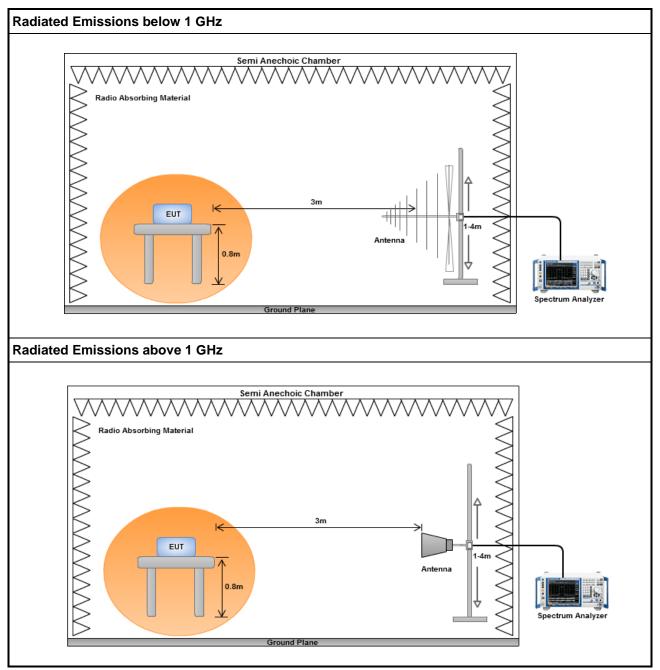

Report No.: FR441702 Page: 22 of 62



### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

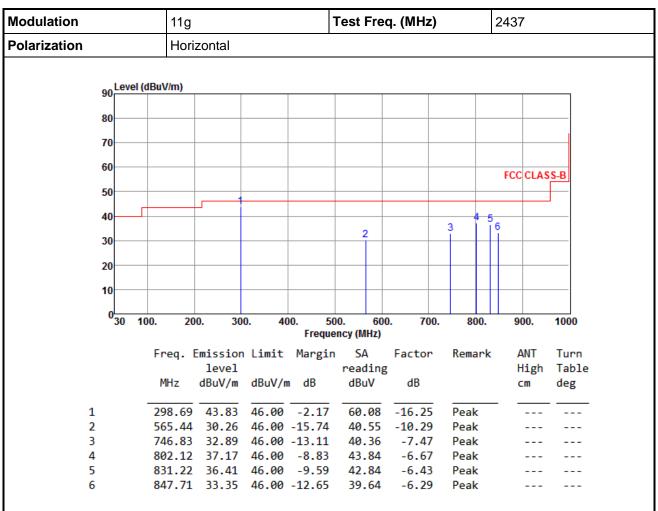

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR441702 Page: 23 of 62



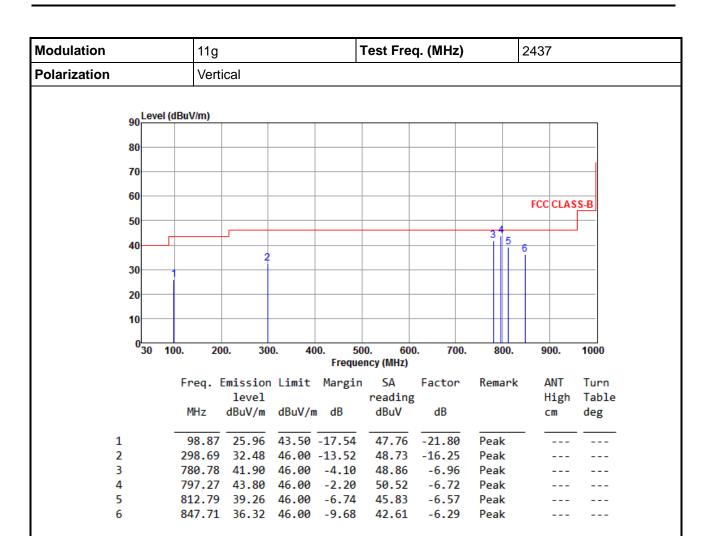

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR441702 Page: 24 of 62



### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

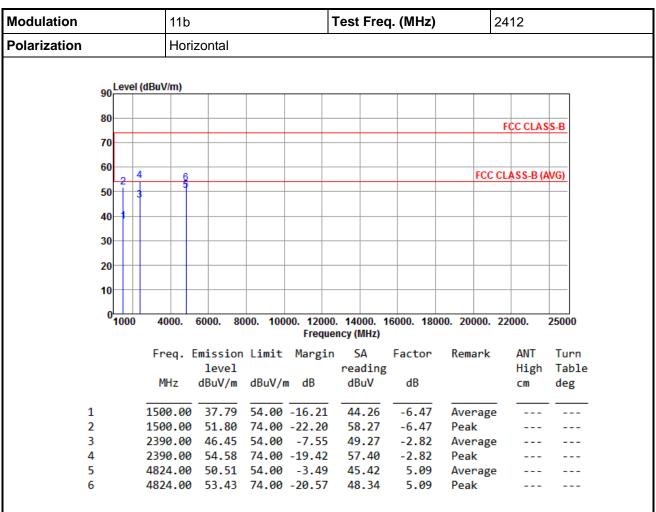

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR441702 Page: 25 of 62



5

Modulation			11b			-	Test Fred	q. (MHz)	2	412	
Polarization			Vert	ical					•		_
	00	Level	(dBuV/m)								
	90										
	80									FCC CLAS	SS_B
	70									100000	
	60		g						FCC C	LASS-B (A	AVG)
	50	2 4	1								
	40										
		11									
	30										
	20										-
	10										
	0	1000	4000.	6000. 80	000. 100			6000. 180	00. 20000. 2	2000.	25000
							ncy (MHz)				
			Freq.		Limit	Margin	SA	Factor	Remark	ANT	Turn
			MHz	level dBuV/m	dBuV/	m dB	reading dBuV	dB		High cm	Table
			11112	ubuv/III	ubuv/I	ıı ub	ubuv	ub		CIII	deg
1	L		1500.00	34.92	54.00	-19.08	41.39	-6.47	Average		
2			1500.00			-26.27	54.20	-6.47	Peak		
3	3		2390.00	37.43	54.00	-16.57	40.25	-2.82	Average		

-2.82

5.09

5.09

Peak

Peak

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain


2390.00 49.76 74.00 -24.24 52.58 4824.00 52.92 54.00 -1.08 47.83 4824.00 55.22 74.00 -18.78 50.13

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 26 of 62



Modulation	11b	Te	est Freq.	(MHz)	24	37		
Polarization	Horizontal							
Lovel (dPu)	//m)							
90 Level (dBu	VIII)							

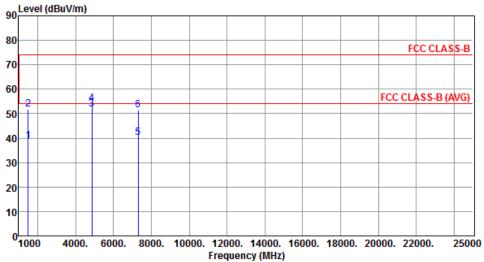


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	20.04	<u></u>	15 16		<u> </u>	A		
1	1500.00	38.84	54.00	-15.16	45.31	-6.47	Average		
2	1500.00	51.68	74.00	-22.32	58.15	-6.47	Peak		
3	4874.00	51.78	54.00	-2.22	46.60	5.18	Average		
4	4874.00	54.21	74.00	-19.79	49.03	5.18	Peak		
5	7311.00	40.30	54.00	-13.70	29.56	10.74	Average		
6	7311.00	51.41	74.00	-22.59	40.67	10.74	Peak		

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 27 of 62



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		

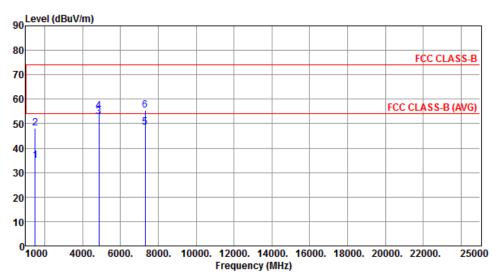


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	34.80	54.00	-19.20	41.27	-6.47	Average		
2	1500.00	48.12	74.00	-25.88	54.59	-6.47	Peak		
3	4874.00	52.81	54.00	-1.19	47.63	5.18	Average		
4	4874.00	54.97	74.00	-19.03	49.79	5.18	Peak		
5	7311.00	48.56	54.00	-5.44	37.82	10.74	Average		
6	7311.00	55.61	74.00	-18.39	44.87	10.74	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 28 of 62



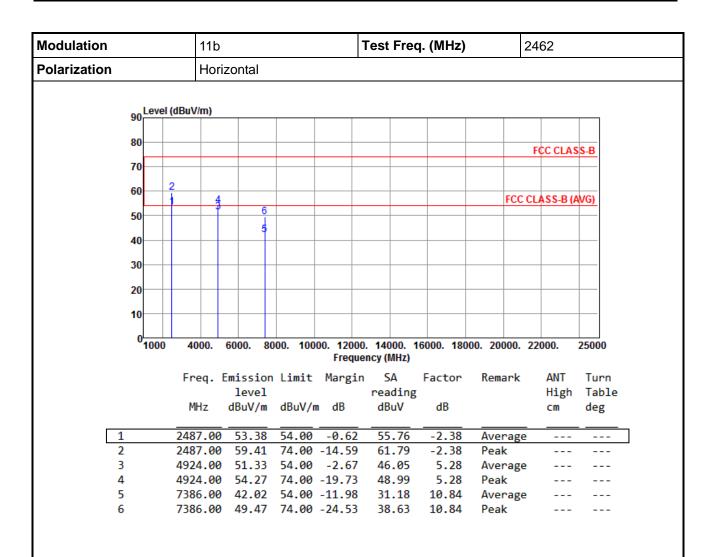


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 29 of 62



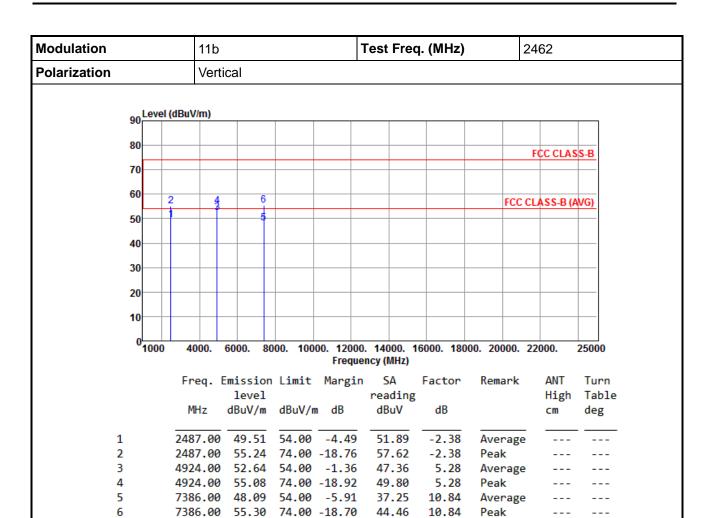


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 30 of 62



### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

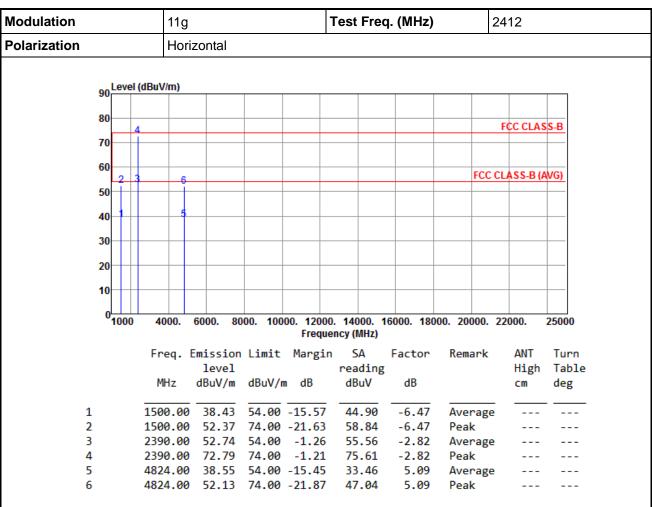

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 31 of 62



5

Modulation			11g				Test Fred	q. (MHz)	2	412	
Polarization			Verti	ical		•			•		
	90	Level	(dBuV/m)								
	80										
	00									FCC CLAS	S-B
	70	- 4	1								-
	60										
	00	Щ,	6						FCC C	LASS-B (A	WG)
	50	2 .									
	40		5								
	40	11									
	30										
	20										
	10										
	0	4000	4000	C000 00	100 400	00 4200	14000 4	C000 400	00 20000 2	2000	25000
		1000	4000.	6000. 80	100. 100		). 14000. 1 ency (MHz)	0000. 180	00. 20000. 2	2000.	25000
			Freq. E	mission	Limit	Margir	s SA	Factor	Remark	ANT	Turn
				level		_	reading			High	Table
			MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		cm	deg
	1		1500.00	25 24	E4 00	10.60	41 70	- 47	A		
	1 2		1500.00 1500.00				41.78 54.70	-6.47 -6.47	Average Peak		
	2 3		2390.00				52.39	-0.47	Average		
			2330.00	49.57		4.43	72.55	2.02	Avelage		

-2.82

5.09

5.09

34.47

Peak

Peak

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

2390.00 69.68 74.00 -4.32 72.50 4824.00 39.56 54.00 -14.44 34.47 4824.00 52.47 74.00 -21.53 47.38

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 32 of 62



4000.

Modulation			11g			Test	Freq.	(MHz)	24	37	
Polarization			Horizo	ntal							
	90.	Level (dBu	V/m)								
	80								F	CC CLAS	S_B
	70	24		8						02,10	
	60		6	Ĭ					FCC CL	ASS-B (A	VG)
	50			+							
	40		5								
	30										
	20										

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	47.19	54.00	-6.81	50.01	-2.82	Average		
2	2390.00	63.61	74.00	-10.39	66.43	-2.82	Peak		
3	2483.50	47.87	54.00	-6.13	50.26	-2.39	Average		
4	2483.50	65.51	74.00	-8.49	67.90	-2.39	Peak		
5	4874.00	40.71	54.00	-13.29	35.53	5.18	Average		
6	4874.00	54.29	74.00	-19.71	49.11	5.18	Peak		
7	7311.00	46.71	54.00	-7.29	35.97	10.74	Average		
8	7311.00	61.19	74.00	-12.81	50.45	10.74	Peak		

Frequency (MHz)

8000. 10000. 12000. 14000. 16000. 18000. 20000. 22000.


25000

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 33 of 62



Modulation			11g	11g					Test Freq. (MHz)				2437		
Polarization			Vertica	al											
	90	Level (dBu	ıV/m)												
	80										F	CC CLAS	S-B		
	70			8											
	60	24	6	1							FCC CL	ASS-B (A	WG)		
	50												-		



		TeveT		reading			High	Table
	MHz	dBuV/m	dBuV/m dB	dBuV	dB		cm	deg
1	2390.00	44.52	54.00 -9.48	47.34	-2.82	Average		
2	2390.00	57.96	74.00 -16.04	60.78	-2.82	Peak		
3	2483.50	44.20	54.00 -9.80	46.59	-2.39	Average		
4	2483.50	56.77	74.00 -17.23	59.16	-2.39	Peak		
5	4874.00	41.34	54.00 -12.66	36.16	5.18	Average		
6	4874.00	54.32	74.00 -19.68	49.14	5.18	Peak		
7	7311.00	52.31	54.00 -1.69	41.57	10.74	Average		
8	7311.00	68.74	74.00 -5.26	58.00	10.74	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 34 of 62



Modulation			11g			-	Test Fred	q. (MHz)		2462	
Polarization			Hori	zontal		1			1		
	90	Level	(dBuV/m)								
	80										
	ου		2							FCC CLAS	S-B
	70										
	60			- 6							
		<u> </u>	4						FCC	CLASS-B (A	WG)
	50			5							
	40	_	3	-							
	•										
	30										
	20	-									-
	10										
	10										
	0	1000	4000.	6000. 80	00. 100	00. 12000	). 14000. 1	16000. 180	00. 20000.	22000.	25000
						Freque	ency (MHz)				
			Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
				level			reading			High	Table
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
1			2483.50	53 1/	54 00	-0.86	55.53	-2.39	Average		
2			2483.50			-2.39	74.00	-2.39	Peak		
3			4924.00				32.93	5.28	Average		
_											

5.28

10.84

10.84

Peak

Peak

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

4924.00 51.86 74.00 -22.14 46.58 7386.00 43.25 54.00 -10.75 32.41 7386.00 58.00 74.00 -16.00 47.16

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 35 of 62

Report Version: Rev. 01

5



4

5

Modulation Polarization		11	11g			Test Freq. (MHz)			2462	
		Ve	Vertical							
	90 Lev	el (dBuV/m)	)							
	80-									
	80								FCC CLAS	S-B
	70	2	6							-
	60									
	••		4					FCC	CLASS-B (A	WG)
	50	1	5							
	40		3							
	40									
	30									
	20									
	10									-
	0 <mark>100</mark>	0 4000	. 6000. 8	3000. 100		). 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
		Enea	. Emissio	n limit	-		Factor	Remark	ANT	Turn
		rreq	level		nai gili	reading		iteliai K	High	Table
		MHz		dBuV/m	ı dB	dBuV	dB		cm	deg
1	L	2483.	50 49.56	54.00	-4.44	51.95	-2.39	Average		
2	2	2483.	50 68.27		-5.73	70.66	-2.39	Peak		
		4004								

4924.00 39.16 54.00 -14.84 33.88

4924.00 52.17 74.00 -21.83 46.89 7386.00 49.15 54.00 -4.85 38.31 7386.00 65.24 74.00 -8.76 54.40

5.28

5.28

10.84

10.84

Average

Average

Peak

Peak


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 36 of 62



## 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

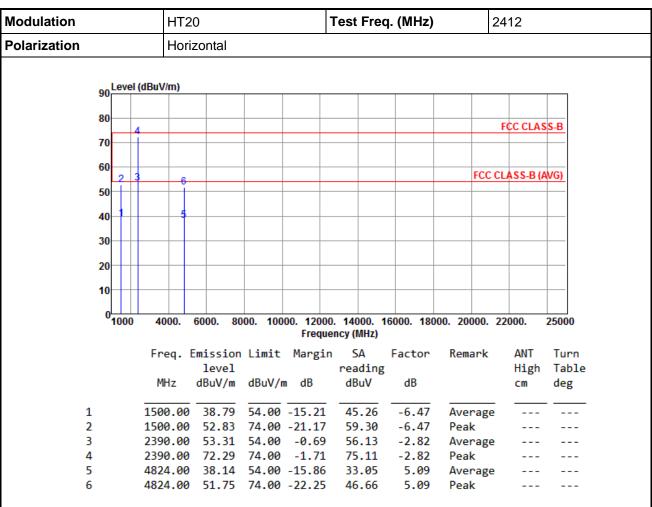

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR441702 Page: 37 of 62



Modulation	HT20	Test Freq.	(MHz)	2412	
Polarization	Vertical				
Level (dBu\	//m)				
90	<del></del>				

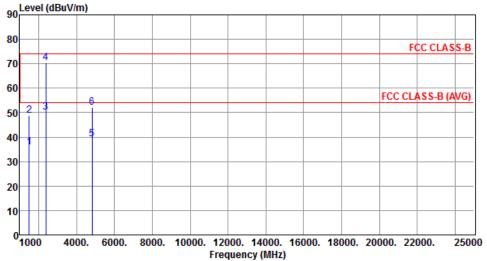

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1500.00	35.88	54.00	-18.12	42.35	-6.47	Average		
2	1500.00	48.76	74.00	-25.24	55.23	-6.47	Peak		
3	2390.00	50.12	54.00	-3.88	52.94	-2.82	Average		
4	2390.00	70.33	74.00	-3.67	73.15	-2.82	Peak		
5	4824.00	39.21	54.00	-14.79	34.12	5.09	Average		
6	4824.00	52.06	74.00	-21.94	46.97	5.09	Peak		

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 38 of 62



Modulation	HT20		Test Freq. (MHz)	2437
Polarization	Horizonta	I		
90 Level (c	BuV/m)			
80				
				FCC CLASS-B
70 24		8		
60	6	1		FCC CLASS-B (AVG)
50				
40	5			
30				
20				
10				
0 1000	4000. 6000.	8000. 10000. 1200	00. 14000. 16000. 18000. 20	000. 22000. 2500

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	47.82	54.00	-6.18	50.64	-2.82	Average		
2	2390.00		74.00	-8.19	68.63	-2.82	Peak		
3	2483.50		54.00	-5.64	50.75	-2.39	Average		
4	2483.50	64.84	74.00	-9.16	67.23	-2.39	Peak		
5	4874.00	39.92	54.00	-14.08	34.74	5.18	Average		
6	4874.00	53.28	74.00	-20.72	48.10	5.18	Peak		
7	7311.00	51.70	54.00	-2.30	40.96	10.74	Average		
8	7311.00	65.63	74.00	-8.37	54.89	10.74	Peak		

Frequency (MHz)


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 39 of 62



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		

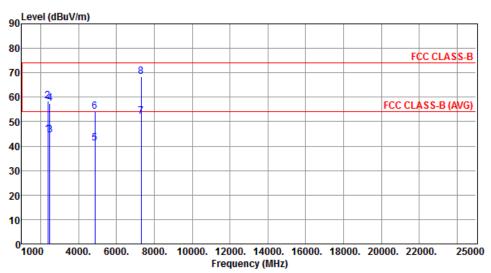


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.86	54.00	-9.14	47.68	-2.82	Average		
2	2390.00	58.42	74.00	-15.58	61.24	-2.82	Peak		
3	2483.50	44.58	54.00	-9.42	46.97	-2.39	Average		
4	2483.50	57.33	74.00	-16.67	59.72	-2.39	Peak		
5	4874.00	41.12	54.00	-12.88	35.94	5.18	Average		
6	4874.00	54.02	74.00	-19.98	48.84	5.18	Peak		
7	7311.00	51.98	54.00	-2.02	41.24	10.74	Average		
8	7311.00	68.42	74.00	-5.58	57.68	10.74	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 40 of 62



Modulation		HT20			Test	Test Freq. (MHz)			24	2462			
Polarization Horizontal													
c	//m)												
	0												
•	0	2									F	C CLAS	S.B

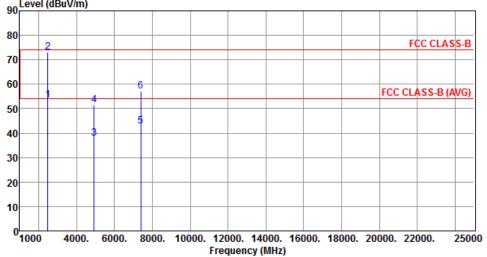


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	53.31	54.00	-0.69	55.70	-2.39	Average		
2	2483.50	72.94	74.00	-1.06	75.33	-2.39	Peak		
3	4924.00	37.81	54.00	-16.19	32.53	5.28	Average		
4	4924.00	51.44	74.00	-22.56	46.16	5.28	Peak		
5	7386.00	42.78	54.00	-11.22	31.94	10.84	Average		
6	7386.00	57.16	74.00	-16.84	46.32	10.84	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 41 of 62



Modulation		HT20			Test	Test Freq. (MHz)				2462				
Polarization		Vertica	ıl											
90 Level (dBuV/m)														
90														

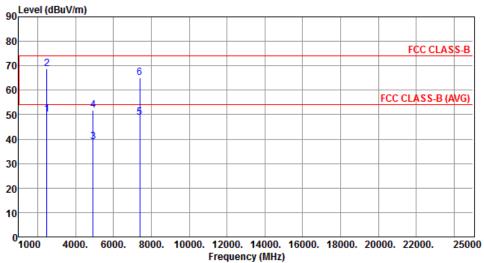


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	J	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	50.17	54.00	-3.83	52.56	-2.39	Average		
2	2483.50				70.98	-2.39	Peak		
3	4924.00	38.76	54.00	-15.24	33.48	5.28	Average		
4	4924.00	51.86	74.00	-22.14	46.58	5.28	Peak		
5	7386.00	48.82	54.00	-5.18	37.98	10.84	Average		
6	7386.00	64.94	74.00	-9.06	54.10	10.84	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 42 of 62



## 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

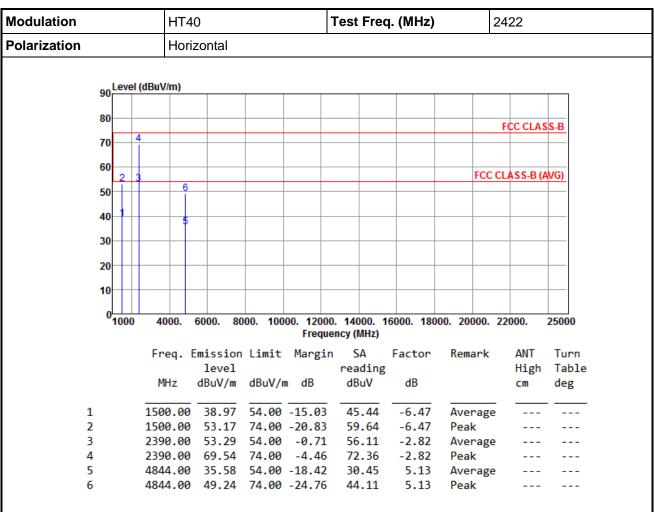

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 43 of 62



Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		

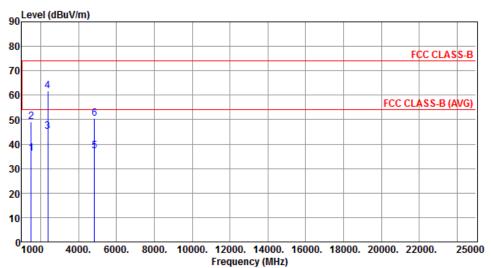


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.27	54.00	-17.73	42.74	-6.47	Average		
2	1500.00	49.05	74.00	-24.95	55.52	-6.47	Peak		
3	2390.00	45.10	54.00	-8.90	47.92	-2.82	Average		
4	2390.00	61.68	74.00	-12.32	64.50	-2.82	Peak		
5	4844.00	37.21	54.00	-16.79	32.08	5.13	Average		
6	4844.00	50.33	74.00	-23.67	45.20	5.13	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 44 of 62



Modulation	HT40	Test Freq. (MHz)	2437
Polarization	Horizontal		
l evel (dRu\	l/m)		

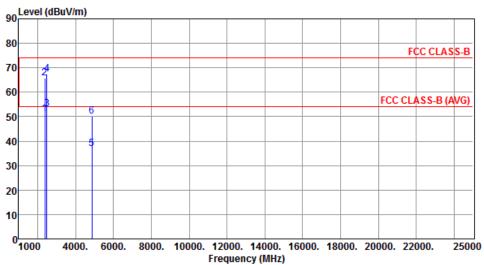


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	51.15	54.00	-2.85	53.97	-2.82	Average		
2	2390.00	65.74	74.00	-8.26	68.56	-2.82	Peak		
3	2483.50	53.14	54.00	-0.86	55.53	-2.39	Average		
4	2483.50	67.43	74.00	-6.57	69.82	-2.39	Peak		
5	4874.00	36.84	54.00	-17.16	31.66	5.18	Average		
6	4874.00	50.12	74.00	-23.88	44.94	5.18	Peak		

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 45 of 62



Modulation	HT40	Test Freq. (MH	<b>Iz)</b> 2437
Polarization	Vertical		
90 Level (d	BuV/m)		

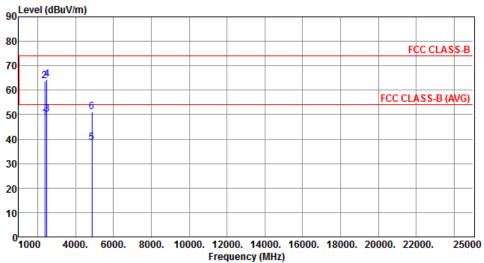

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.54	54.00	-5.46	51.36	-2.82	Average		
2	2390.00				66.48	-2.82	Peak		
3	2483.50	50.12	54.00	-3.88	52.51	-2.39	Average		
4	2483.50	64.37	74.00	-9.63	66.76	-2.39	Peak		
5	4874.00	38.50	54.00	-15.50	33.32	5.18	Average		
6	4874.00	51.27	74.00	-22.73	46.09	5.18	Peak		

\*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Page: 46 of 62 Report No.: FR441702



Modulation	HT40	Т	est Freq. (MHz)	24	452	
Polarization	Horizontal	•		•		
	·					
90 Level (d	BuV/m)					_
80					FCC CLASS-B	
70 4						
_						
60 2 3				FCC CI	LASS-B (AVG)	
50	6					
40						
40	5					
30						
20						
10						1
01000	4000. 6000. 80	000 10000 12000	14000. 16000. 180	00 20000 23	2000. 2500	] NA
1000	4000. 0000. 00		ncy (MHz)	00. 20000. 2.	2000.	,,,
	Freq. Emission	Limit Margin	SA Factor	Remark	ANT Tu	rn
	level		reading		High Ta	b1
	MHz dBuV/m	dBuV/m dB	dBuV dB		cm de	g
1	1500.00 39.42	54.00 -14.58	45.89 -6.47	Average		
	1500.00 53.48	74.00 -20.52	59.95 -6.47	Peak		
	2483.50 53.30		55.69 -2.39	Average		
	2483.50 68.15 4904.00 35.94		70.54 -2.39 30.70 5.24	Peak		
				Average		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 47 of 62

Report Version: Rev. 01



Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

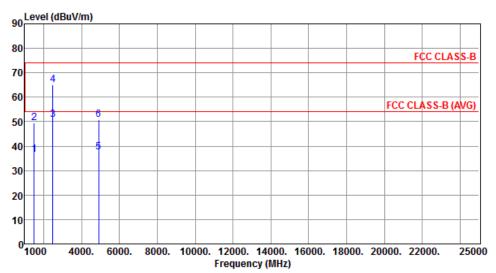

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	36.58	54.00	-17.42	43.05	-6.47	Average		
2	1500.00				55.94	-6.47	Peak		
3	2483.50	50.97	54.00	-3.03	53.36	-2.39	Average		
4	2483.50	65.13	74.00	-8.87	67.52	-2.39	Peak		
5	4904.00	37.55	54.00	-16.45	32.31	5.24	Average		
6	4904.00	50.70	74.00	-23.30	45.46	5.24	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR441702 Page: 48 of 62



# 3.6 Emissions in Non-Restricted Frequency Bands

## 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

## 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

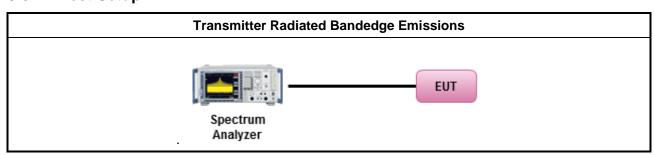

## 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding 10  $log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR441702 Page: 49 of 62




# 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands

### 802.11b

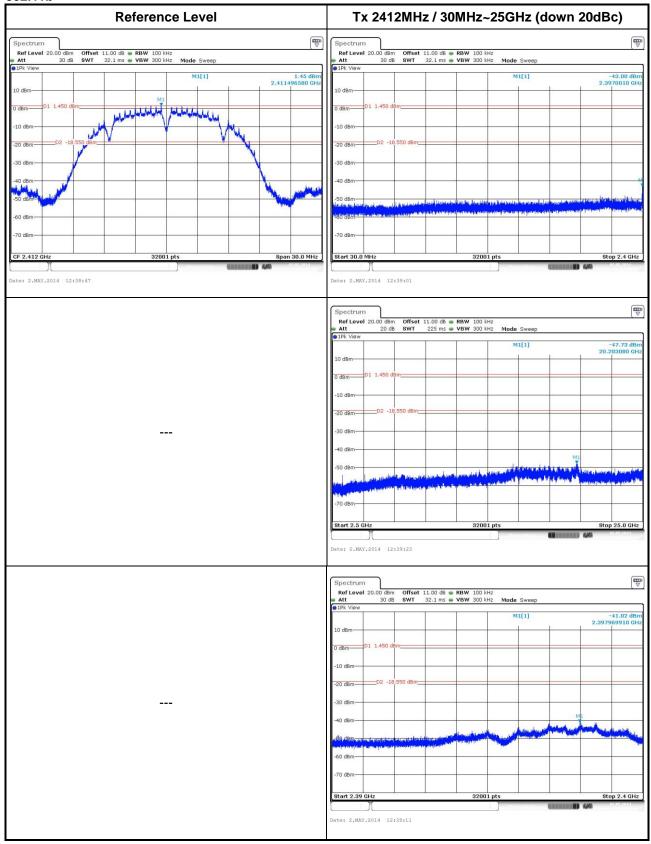


Report No.: FR441702 Report Version: Rev. 01



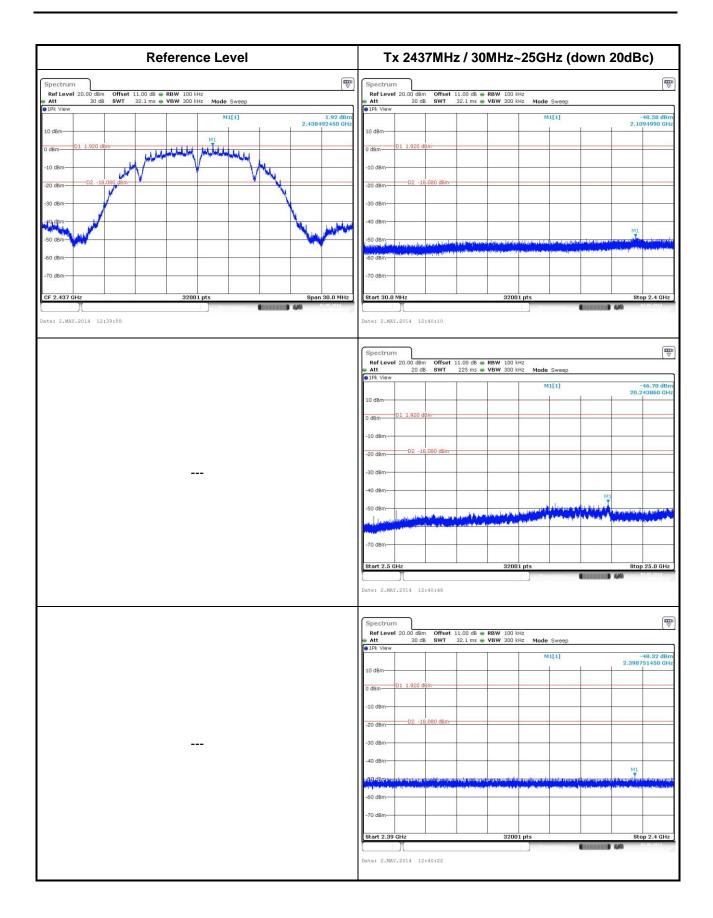


Report No.: FR441702 Page: 51 of 62



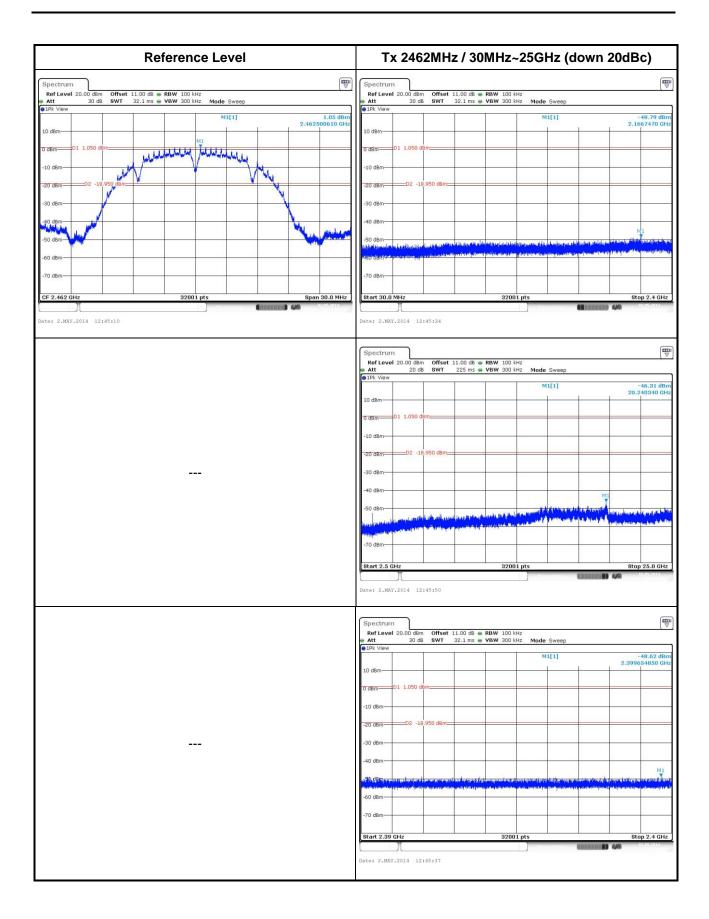

Report No.: FR441702 Page : 52 of 62




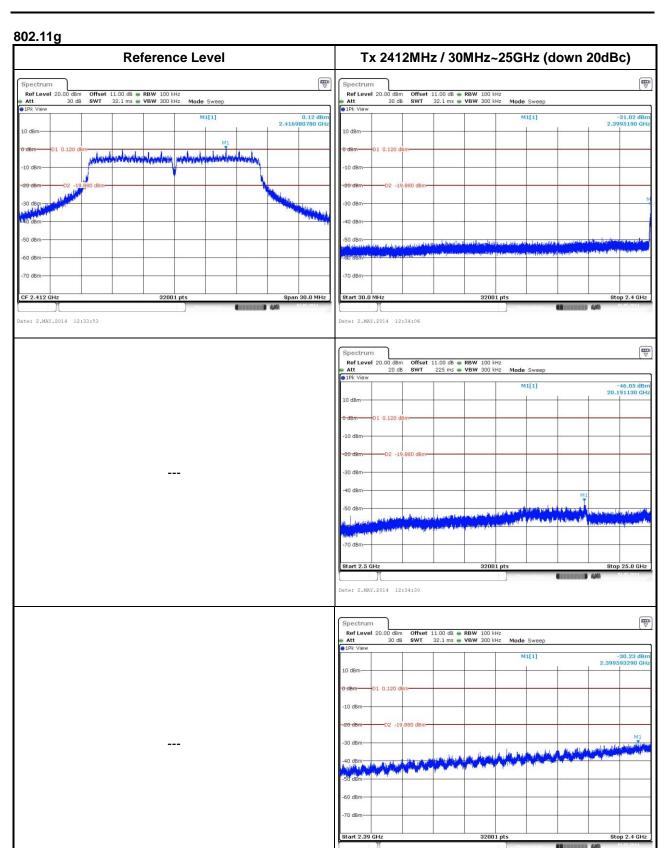

Report No.: FR441702 Page: 53 of 62


Date: 2.MAY.2014 12:34:17



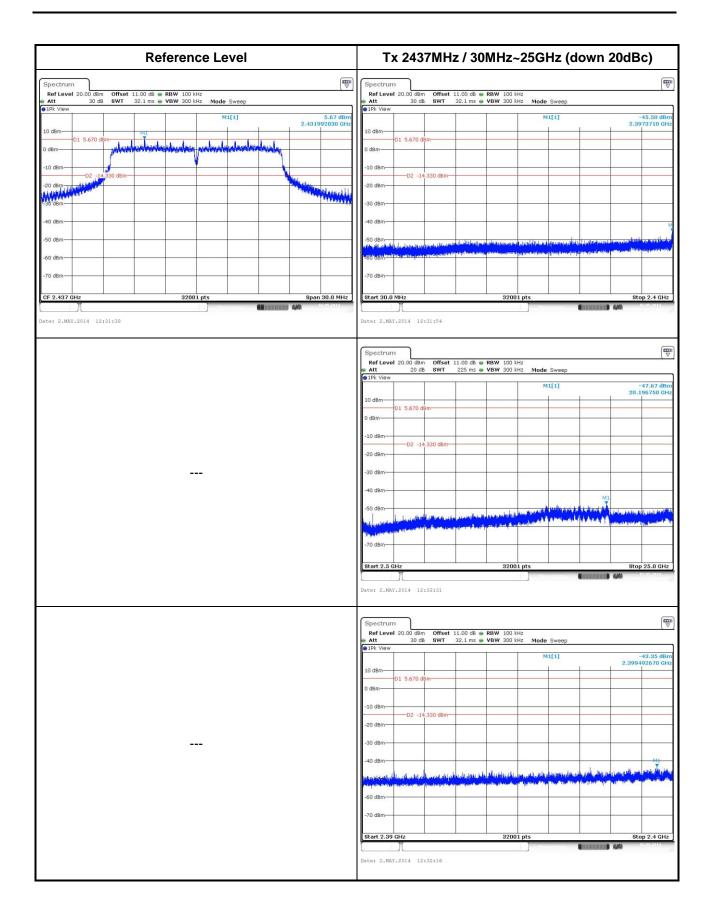

Report No.: FR441702 Page : 54 of 62




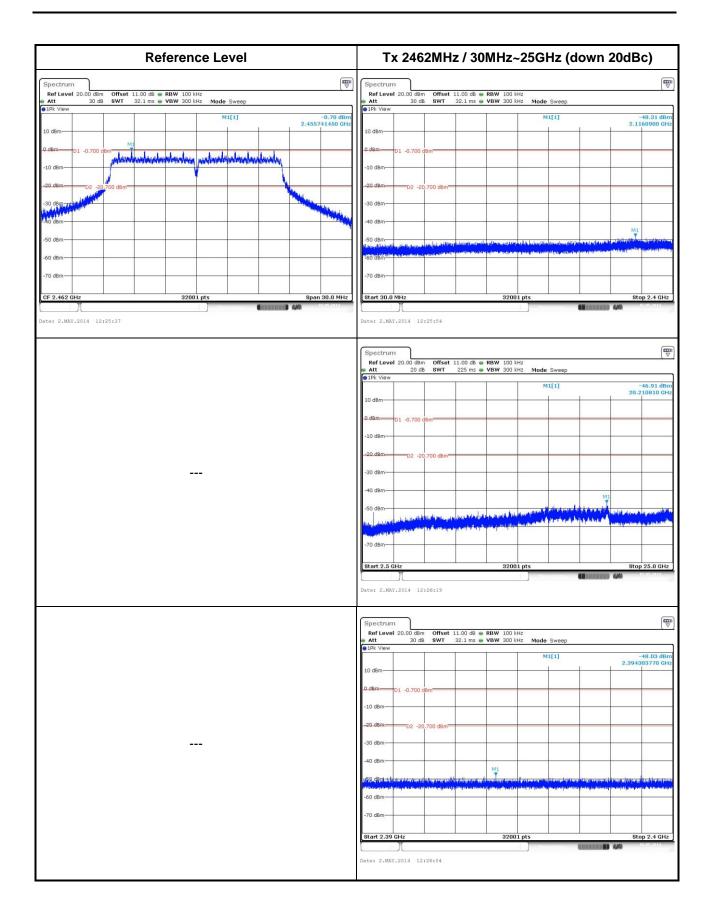

Report No.: FR441702 Page: 55 of 62




### 802.11n HT20

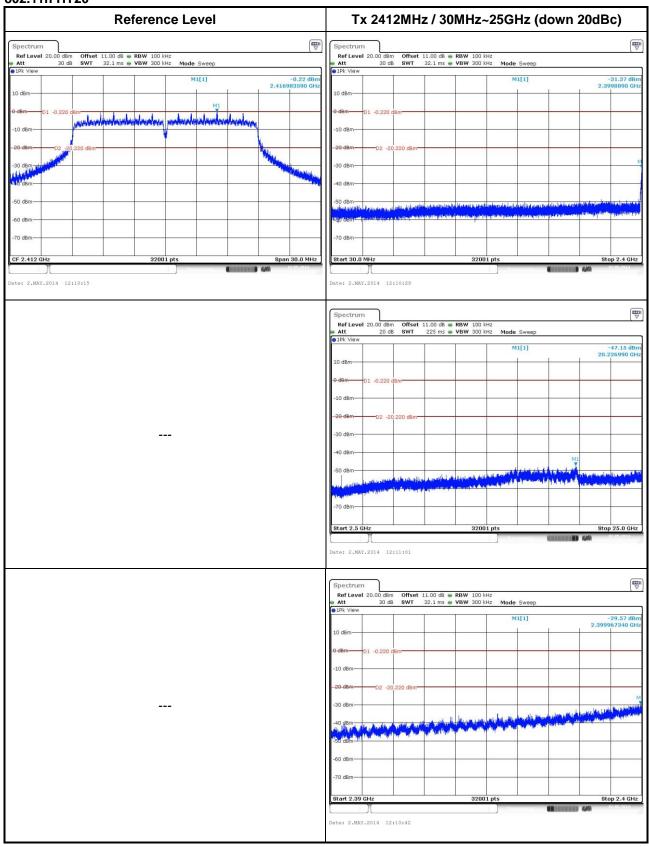


Report No.: FR441702 Page : 56 of 62



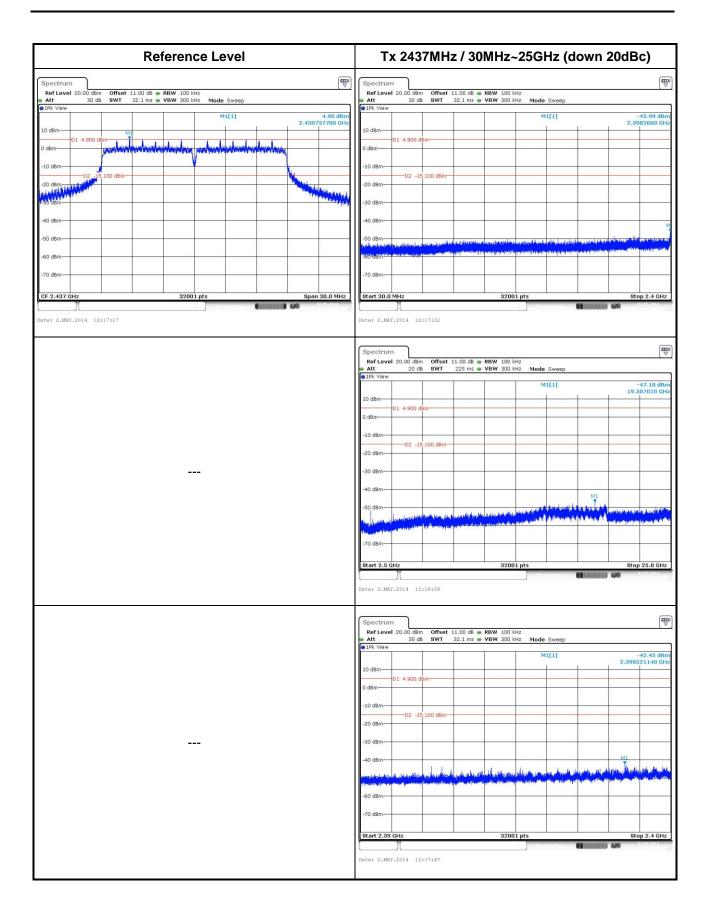

Report No.: FR441702 Page : 57 of 62




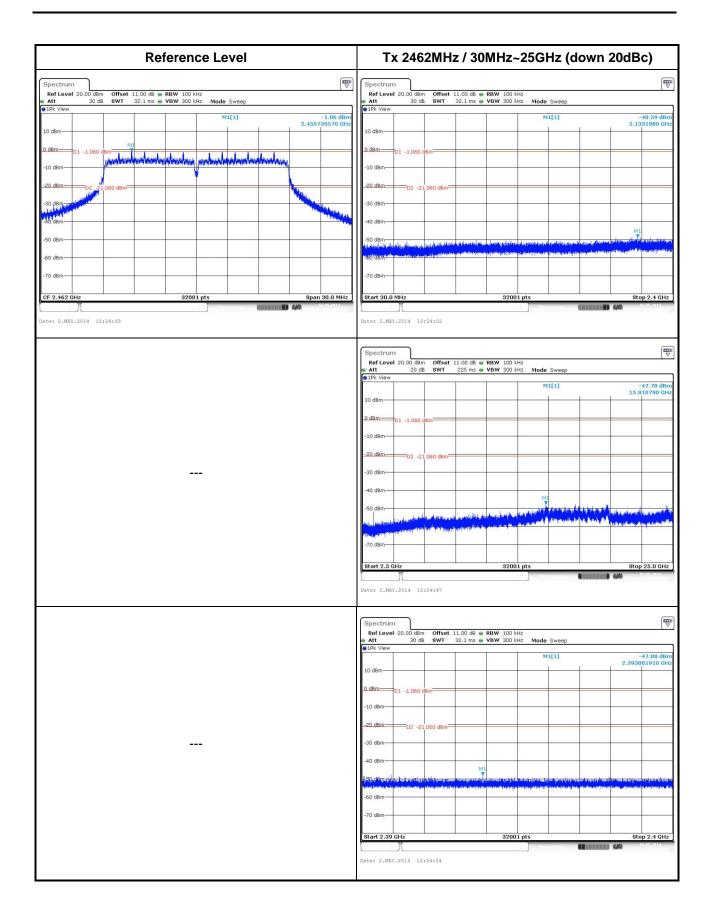

Report No.: FR441702 Page: 58 of 62




### 802.11n HT40

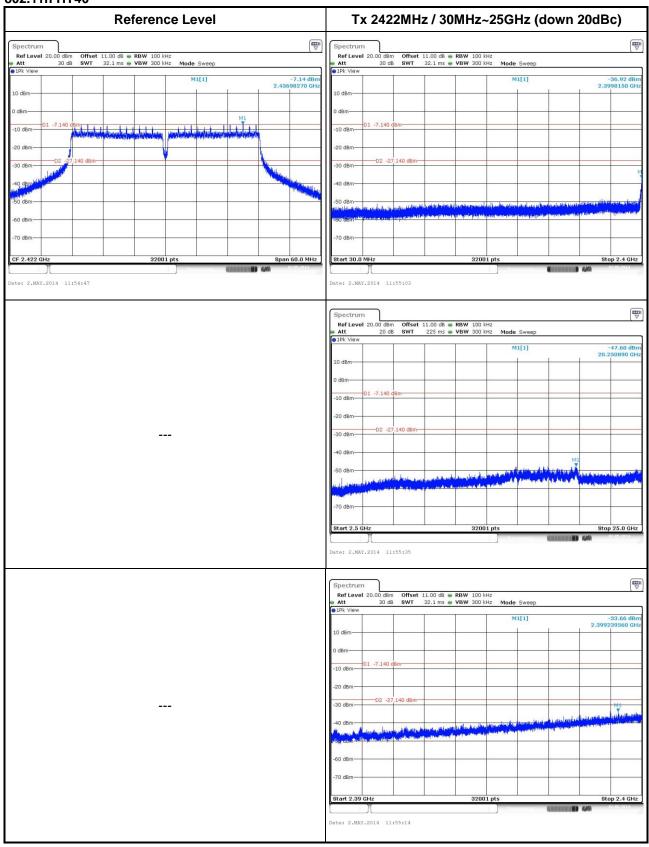


Report No.: FR441702 Page : 59 of 62



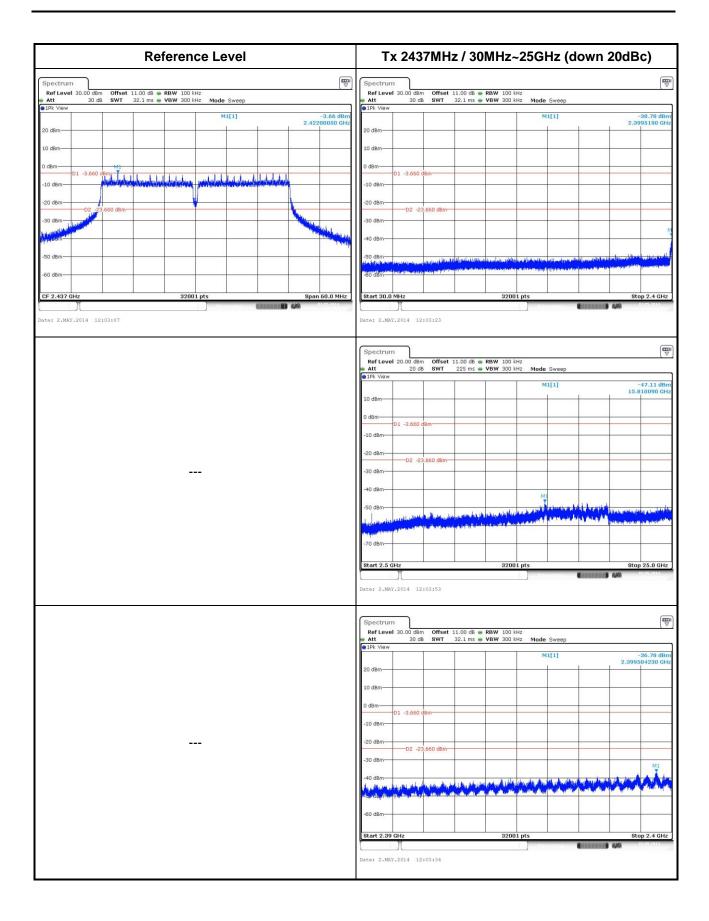

Report No.: FR441702 Page: 60 of 62



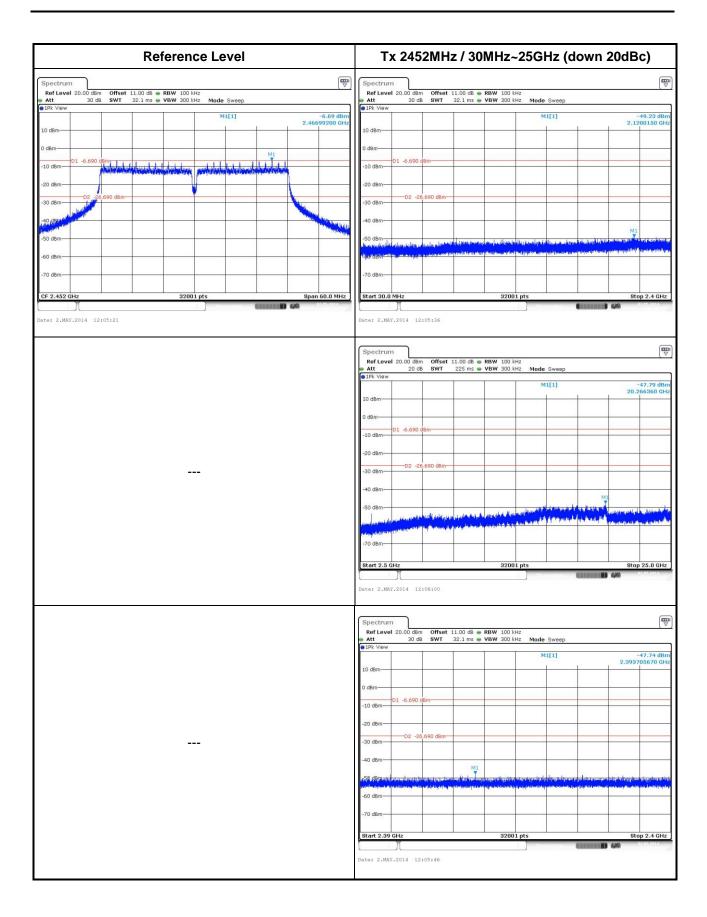

Report No.: FR441702 Page: 61 of 62



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou Kwei Shan

Tel: 886-2-2601-1640 Tel: 886-3-271-8666

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei
City, Taiwan, R.O.C.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan
Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR441702 Page: 62 of 62