



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. I16Z42280-SRD03**

**for**

**TCL Communication Ltd.**

**LTE / UMTS / GSM mobile phone**

**Model Name: 5044O**

**FCC ID: 2ACCJH063**

**with**

**Hardware Version: PIO**

**Software Version: v4HA2**

**Issued Date: 2016-12-26**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

[Tel:+86\(0\)10-62304633-2512](tel:+86(0)10-62304633-2512), [Fax:+86\(0\)10-62304633-2504](tel:+86(0)10-62304633-2504)

Email: [cttl\\_terminals@catr.cn](mailto:cttl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
I16Z42280-SRD03	Rev.0	1st edition	2016-12-26

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. TESTING LOCATION .....	5
1.2. TESTING ENVIRONMENT .....	5
1.3. PROJECT DATA .....	5
1.4. SIGNATURE .....	5
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE .....	7
3.4. NORMAL ACCESSORY SETTING .....	7
3.5. GENERAL DESCRIPTION .....	9
<b>4. REFERENCE DOCUMENTS .....</b>	<b>10</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	10
4.2. REFERENCE DOCUMENTS FOR TESTING .....	10
<b>5. TEST RESULTS .....</b>	<b>11</b>
5.1. SUMMARY OF TEST RESULTS .....	11
5.2. STATEMENTS .....	11
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>12</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>13</b>
7.1. PEAK OUTPUT POWER - CONDUCTED .....	13
7.2. FREQUENCY BAND EDGES .....	13
7.3. CONDUCTED EMISSION .....	13
7.4. RADIATED EMISSION .....	13
7.5. 6dB BANDWIDTH .....	13
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	13
7.7. AC POWERLINE CONDUCTED EMISSION .....	14
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>15</b>
A.1. MEASUREMENT METHOD .....	15
A.2. PEAK OUTPUT POWER - CONDUCTED .....	16
A.3. FREQUENCY BAND EDGES - CONDUCTED .....	17



A.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	19
A.5. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	28
A.6. 6dB BANDWIDTH.....	37
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	40
A.8. AC POWERLINE CONDUCTED EMISSION .....	43

## **1. Test Laboratory**

### **1.1. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(BDA))

Address: No. 18 Jia Kangding Street, BDA District, Beijing, P. R.  
China 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2016-11-23

Testing End Date: 2016-12-15

### **1.4. Signature**



---

Wu Le

(Prepared this test report)



---

Sun Zhenyu

(Reviewed this test report)



---

Li Zhuofang

(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: China  
Telephone: 0086-21-31363544  
Fax: 0086-21-61460602

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	LTE / UMTS / GSM mobile phone
Model Name	5044O
FCC ID	2ACCJH063
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery

#### **3.2. Internal Identification of EUT**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	PIO	v4HA2
EUT2	/	PIO	v4HA2

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

AE ID*	Description	SN
AE1	Battery	16TCT-BA-1280
AE2	Battery	16TCT-BA-1269
AE3	Battery	16TCT-BA-1175
AE4	Battery	16TCT-BA-1270
AE5	Battery	16TCT-BA-1279
AE6	Battery	16TCT-BA-1281
AE7	Battery	/
AE8	USB Cable	15TCT-DC-0208
AE9	USB Cable	16TCT-DC-0017
AE10	USB Cable	16TCT-DC-0459
AE11	Travel charger	16TCT-CH-1359
AE12	Travel charger	16TCT-CH-1360
AE13	Travel charger	16TCT-CH-1176
AE14	Travel charger	16TCT-CH-1180
AE15	Travel charger	16TCT-CH-1318
AE16	Travel charger	16TCT-CH-1313
AE17	Travel charger	16TCT-CH-1274
AE18	Travel charger	16TCT-CH-1271
AE19	Travel charger	16TCT-CH-0744
AE20	Travel charger	16TCT-CH-0742
AE21	Travel charger	16TCT-CH-1592



AE22                      Travel charger                      16TCT-CH-1590

AE1/AE2/AE3/AE4/AE5/AE6

Model	CAB2000070C1
Manufacturer	BYD
Capacitance	2000mAh
Nominal voltage	3.8V

AE7

Model	CAB2000071C7
Manufacturer	VEKEN
Capacitance	2000mAh
Nominal voltage	3.8V

AE8

Model	CDA3122005C2
Manufacturer	SHENHUA
Length of cable	/

AE9

Model	CDA3122005C1
Manufacturer	JUWEI
Length of cable	/

AE10

Model	CDA3122005C8
Manufacturer	PUAN
Length of cable	/

AE11/AE12

Model	CBA3068AGAC1
Manufacturer	BYD
Length of cable	/

AE13/AE14

Model	CBA3068AGAC3
Manufacturer	yingju
Length of cable	/

AE15/AE16

Model	CBA3068AGAC4
Manufacturer	Aohai
Length of cable	/

AE17/AE18

Model	CBA0066AGAC3
Manufacturer	yingju
Length of cable	/

AE19/AE20

Model	CBA0066AGAC1
Manufacturer	BYD





Length of cable	/
AE21AE22	
Model	CBA0066AGAC5
Manufacturer	PUAN
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. Normal Accessory setting**

Fully charged battery is used during the test.

### **3.5. General Description**

The Equipment Under Test (EUT) is a model of LTE / UMTS / GSM mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

#### **4. Reference Documents**

##### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

##### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	2015
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of Test Results

Abbreviations used in this clause:

**P** Pass, The EUT complies with the essential requirements in the standard.

**F** Fail, The EUT does not comply with the essential requirements in the standard

**NA** Not Applicable, The test was not applicable

**NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Peak Output Power - Conducted	15.247 (b)(1)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
Conducted Emission	15.247 (d)	<b>P</b>
Radiated Emission	15.247, 15.205, 15.209	<b>P</b>
Frequency Band Edges	15.247 (d)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

This model is a variant product which model name is 5044A; all the test result has been derived from test report of 5044A.

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2017-10-25
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2017-07-10
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2017-03-01
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	Rohde & Schwarz	1 year	2017-03-02
2	Loop antenna	HFH2-Z2	829324/007	Rohde & Schwarz	3 years	2017-12-16
3	BiLog Antenna	VULB9163	9163-514	Schwarzbeck	3 years	2017-11-24
4	Dual-Ridge Waveguide Horn Antenna	3117	00139065	ETS-Lindgren	3 years	2017-09-21
5	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2017-06-17
6	Vector Signal Analyzer	FSV	101047	Rohde & Schwarz	1 year	2017-06-28

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

**Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges

**Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Conducted Emission

**Measurement Uncertainty:**

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Radiated Emission

**Measurement Uncertainty:**

Frequency Range	Uncertainty (k=2)
< 1 GHz	4.86dB
> 1 GHz	5.26dB

### 7.5. 6dB Bandwidth

**Measurement Uncertainty:**

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

**Measurement Uncertainty:**

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.38dB
-------------------------------	--------


## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **A.1.2. Radiated Emission Measurements**


The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

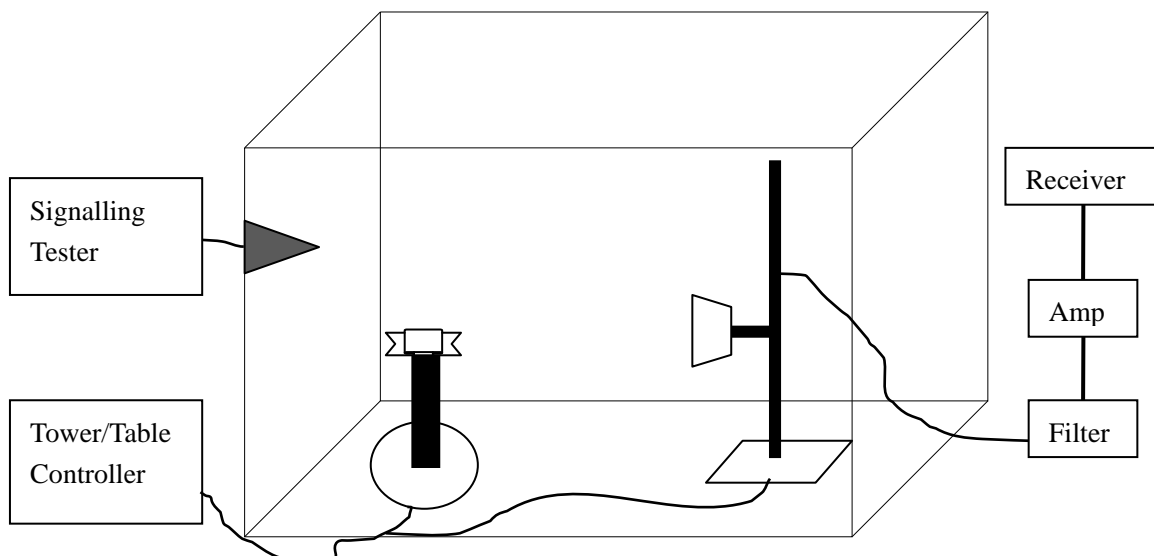

## A.2. Peak Output Power - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

**Measurement Results:**

**For GFSK**

Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
0	2402	-1.21	P
19	2440	0.31	P
39	2480	-1.32	P

**Conclusion: PASS**



### A.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

**Measurement Result:**

**For GFSK**

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
0	2402	Hopping OFF	Fig.1	-46.25	P
39	2480	Hopping OFF	Fig.2	-48.80	P

**Conclusion: PASS**

Test graphs as below

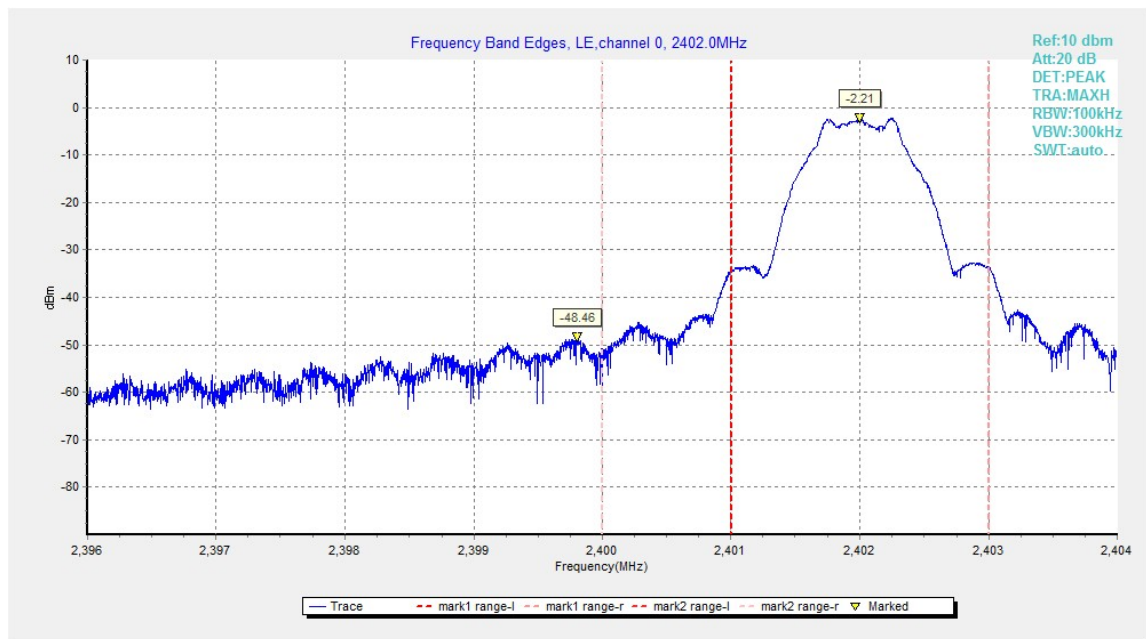


Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

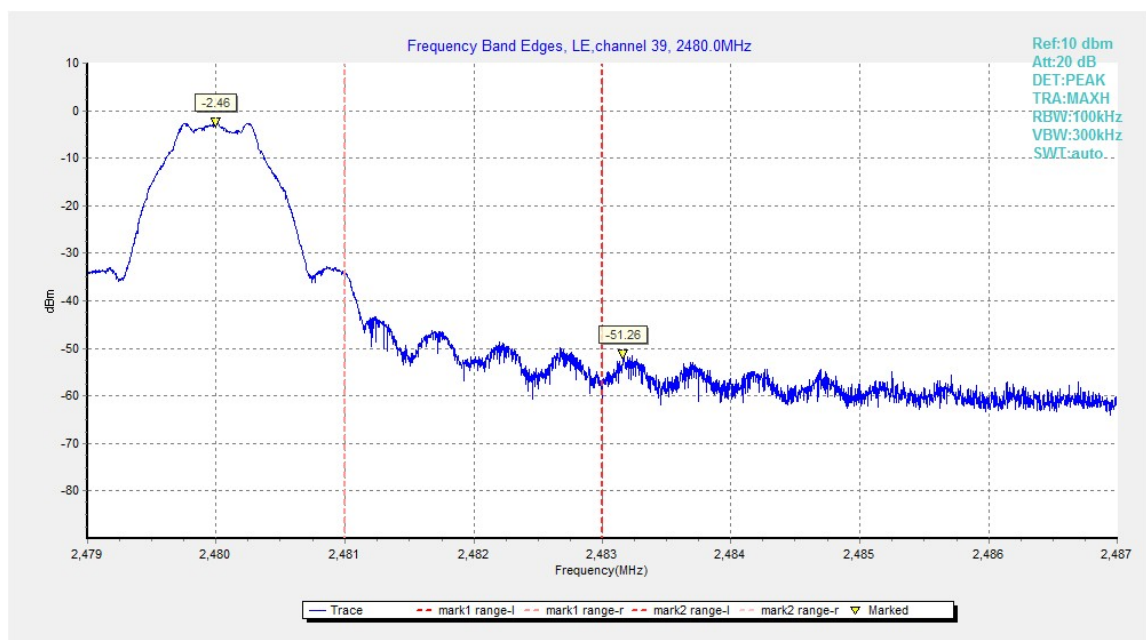


Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

#### A.4. Transmitter Spurious Emission - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.11.2 and clause 11.11.3

**Measurement Procedure – Reference Level**

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

**Measurement Procedure - Unwanted Emissions**

1. Set RBW = 100 kHz.
  2. Set VBW = 300 kHz.
  3. Set span to encompass the spectrum to be examined.
  4. Detector = peak.
  5. Trace Mode = max hold.
  6. Sweep = auto couple.
  7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:**  
**For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
0	2402	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
39	2480	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**

**Test graphs as below**

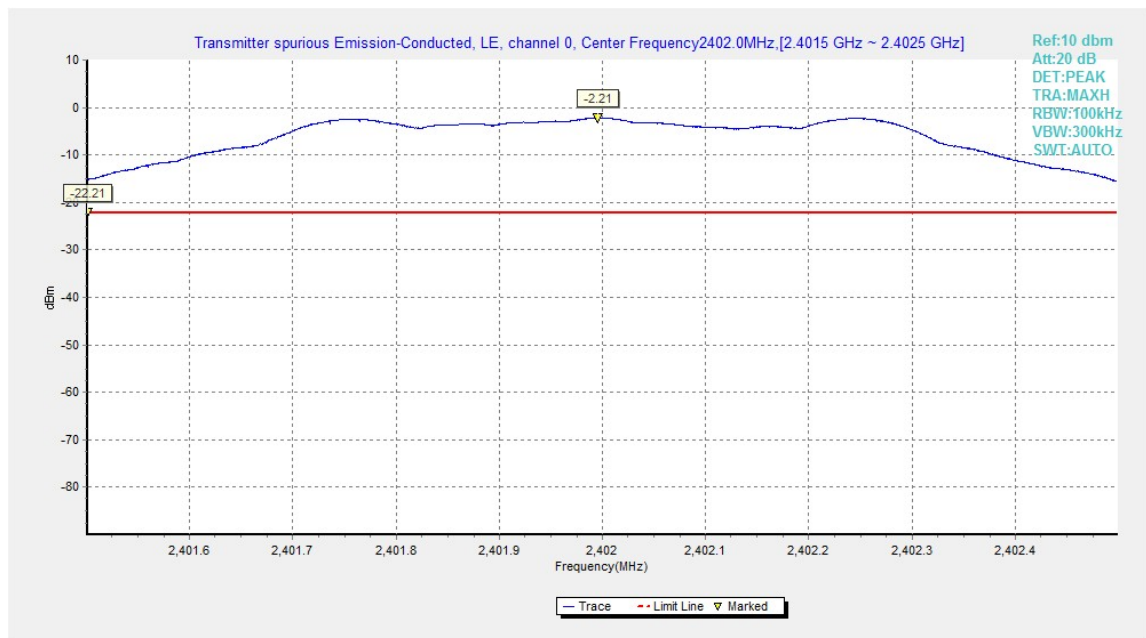


Fig.3. Transmitter Spurious Emission - Conducted: GFSK,2402MHz

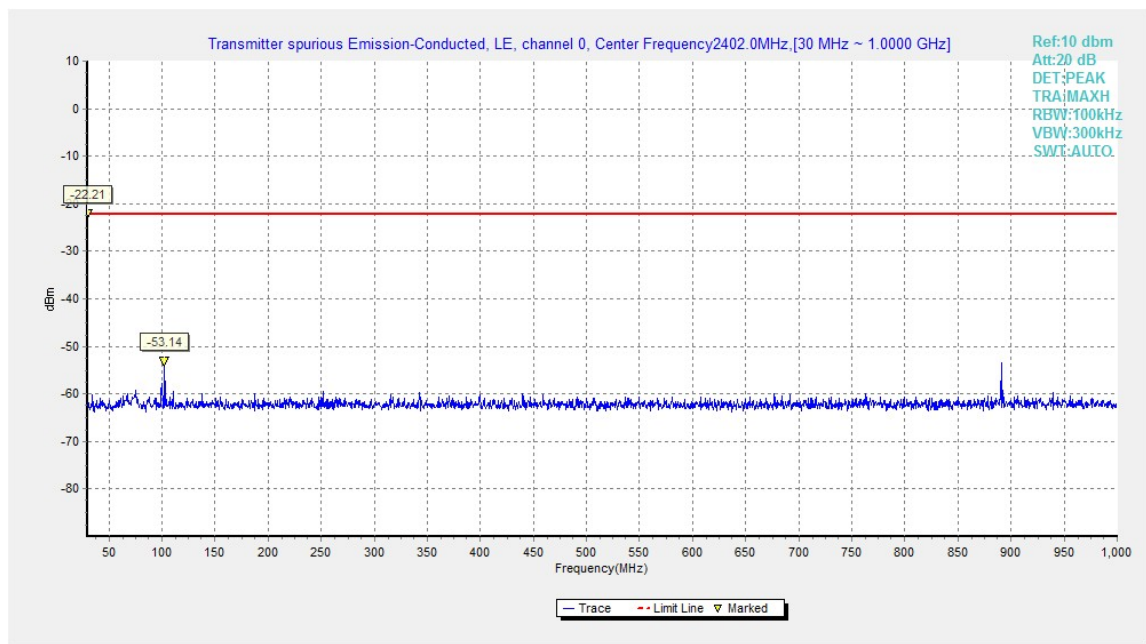


Fig.4. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 30MHz - 1GHz

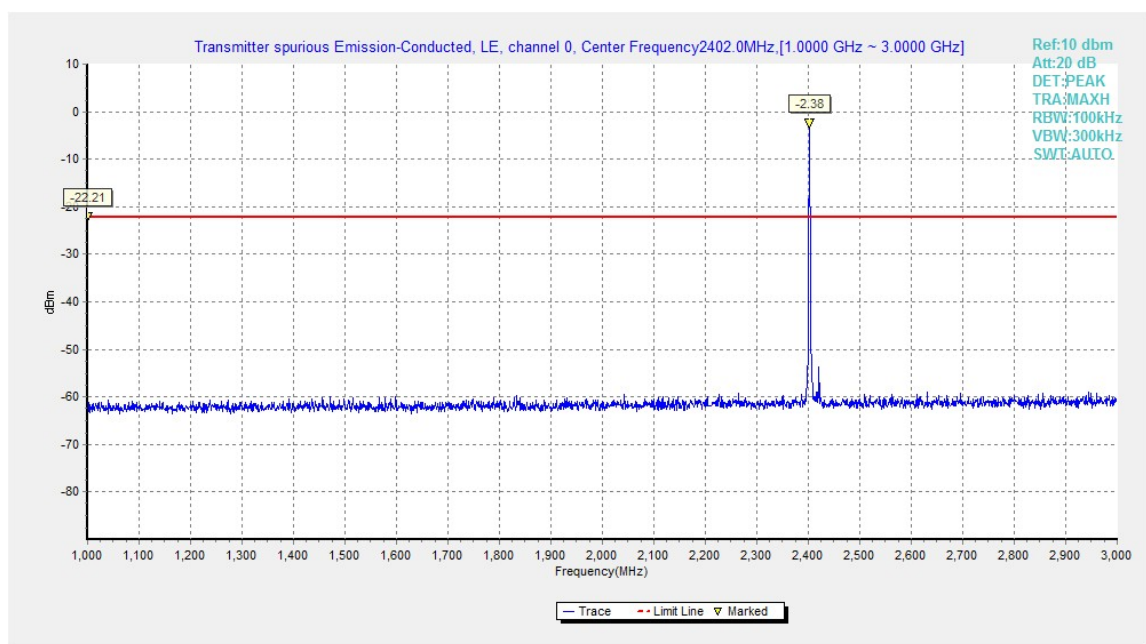


Fig.5. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz, 1GHz - 3GHz

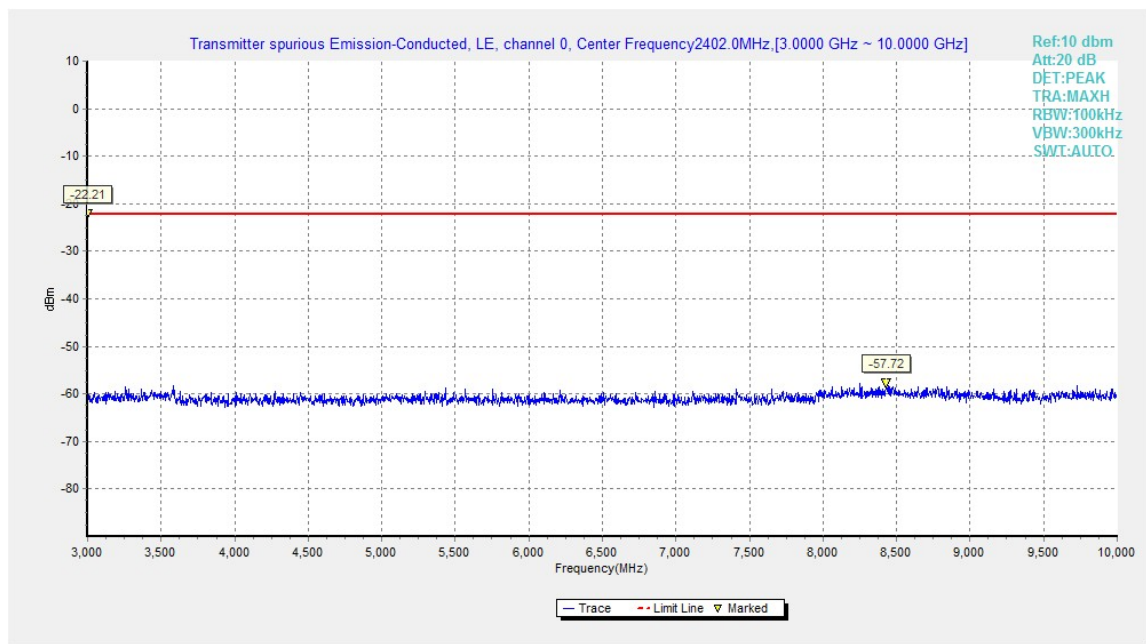


Fig.6. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,3GHz - 10GHz

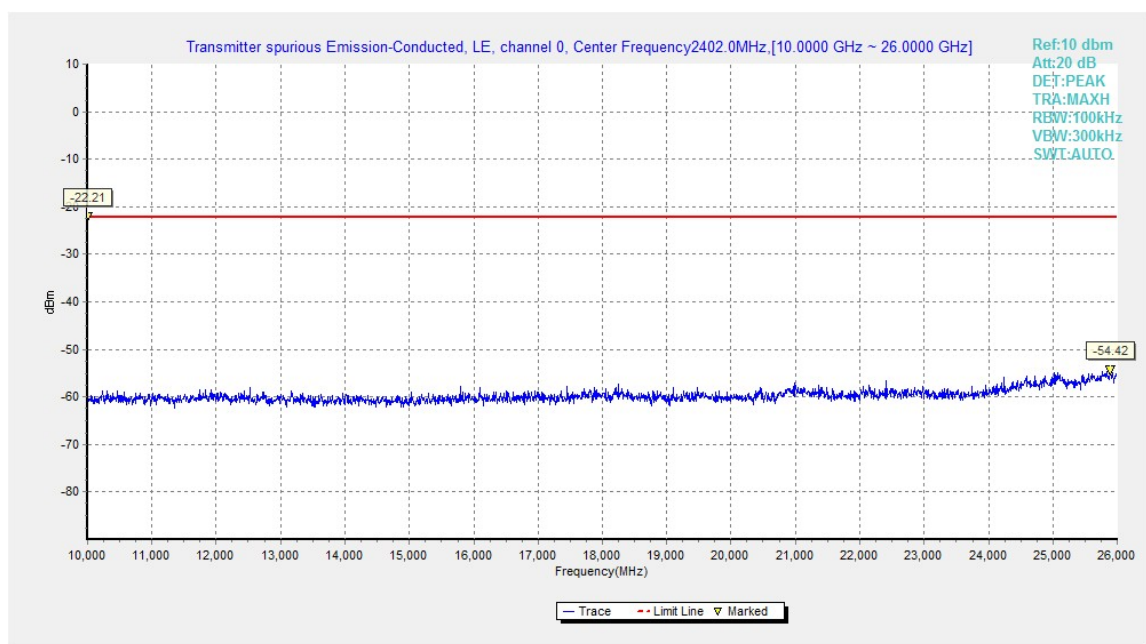


Fig.7. Transmitter Spurious Emission - Conducted: GFSK, 2402 MHz,10GHz - 26GHz



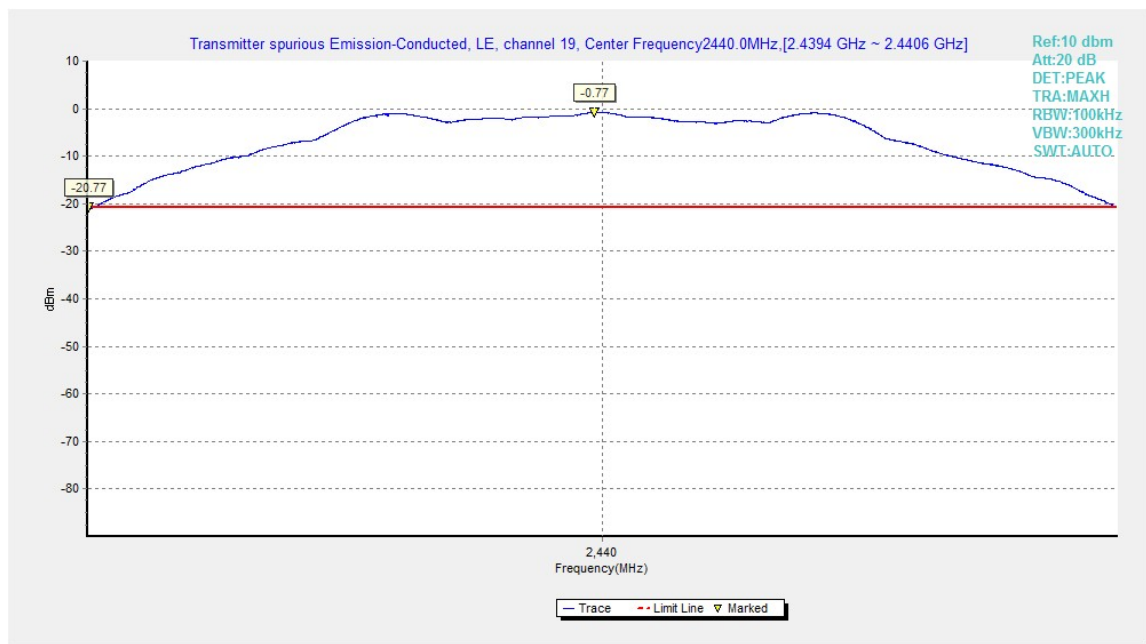


Fig.8. Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

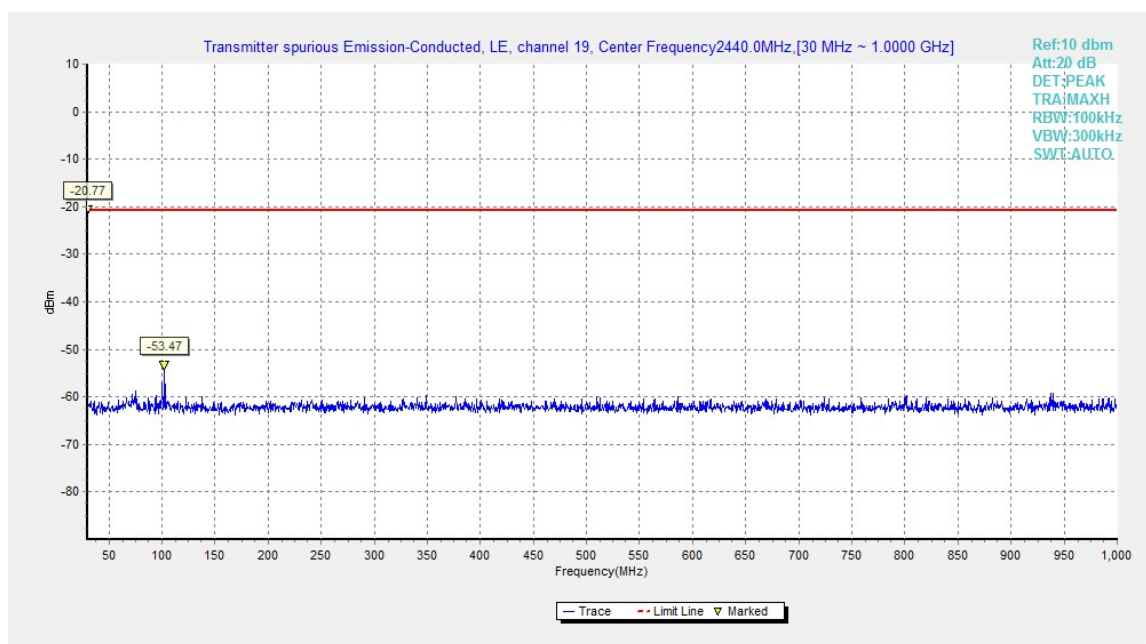


Fig.9. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

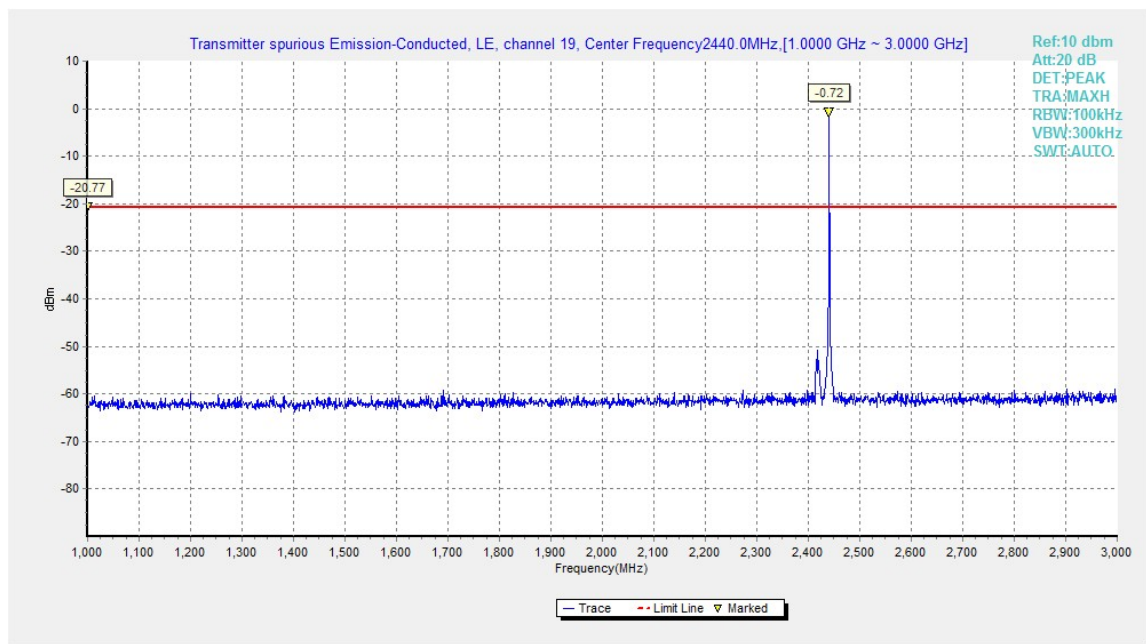


Fig.10. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

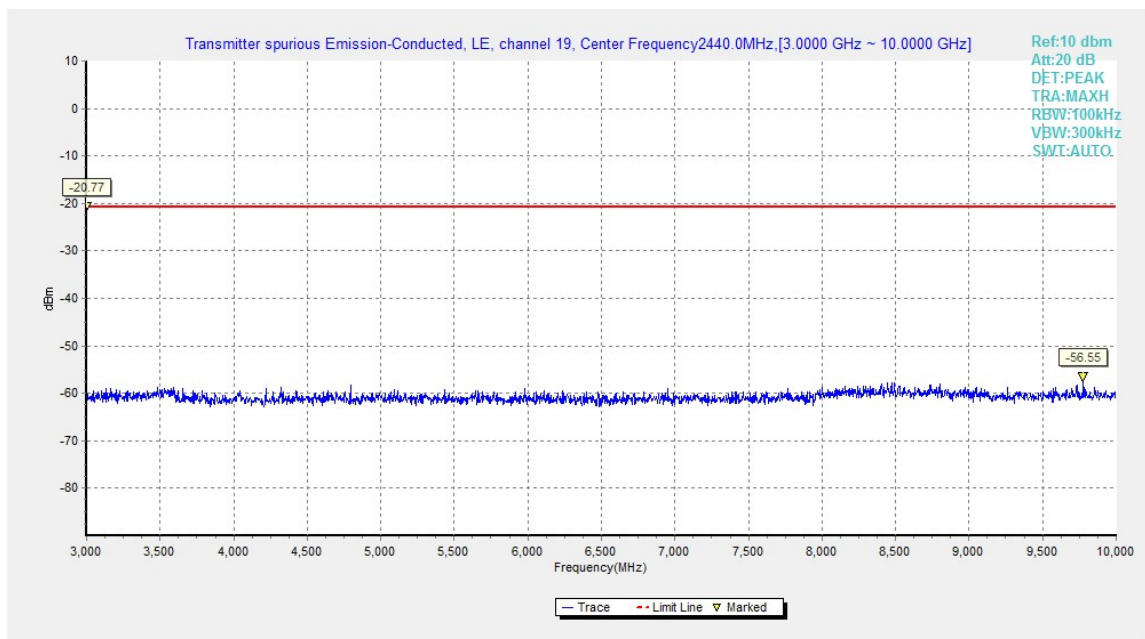


Fig.11. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz



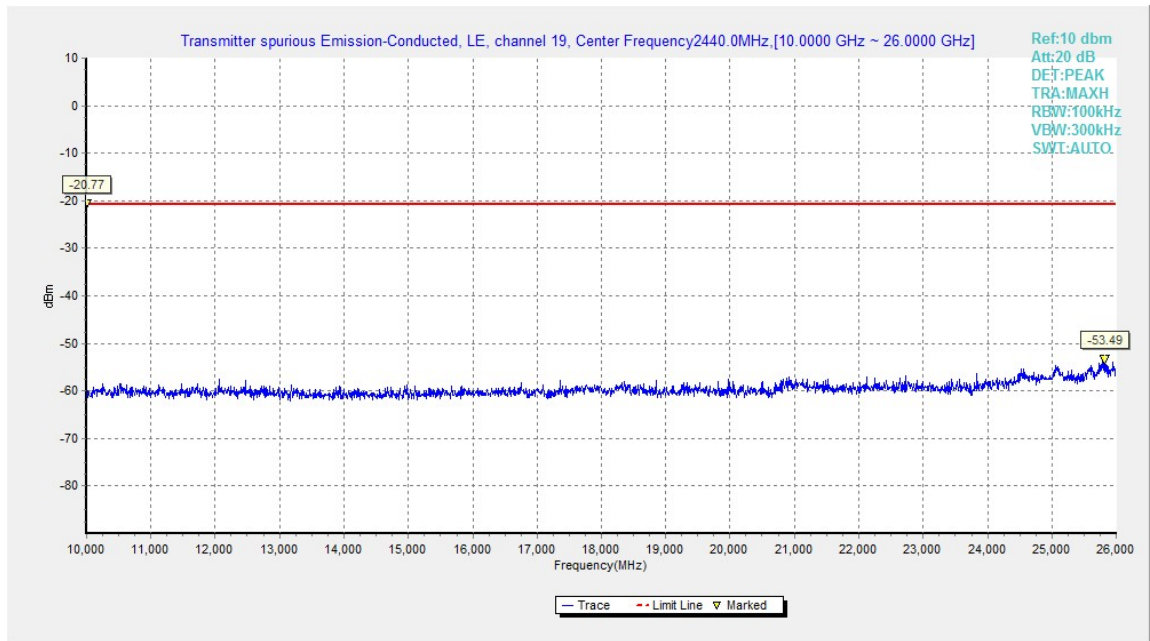


Fig.12. Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

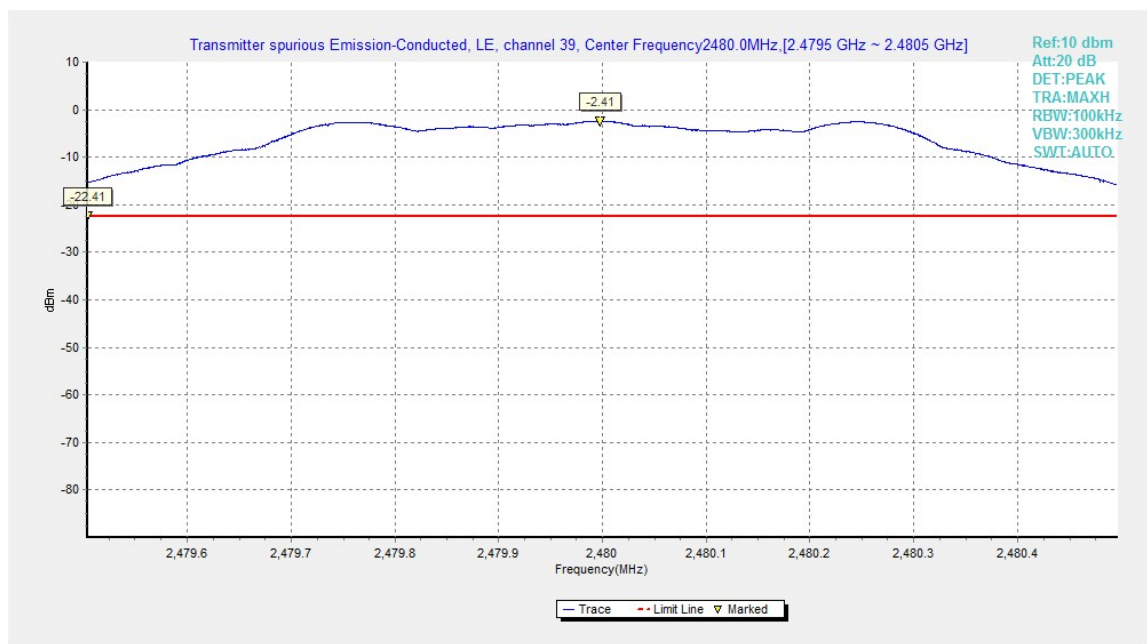


Fig.13. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz

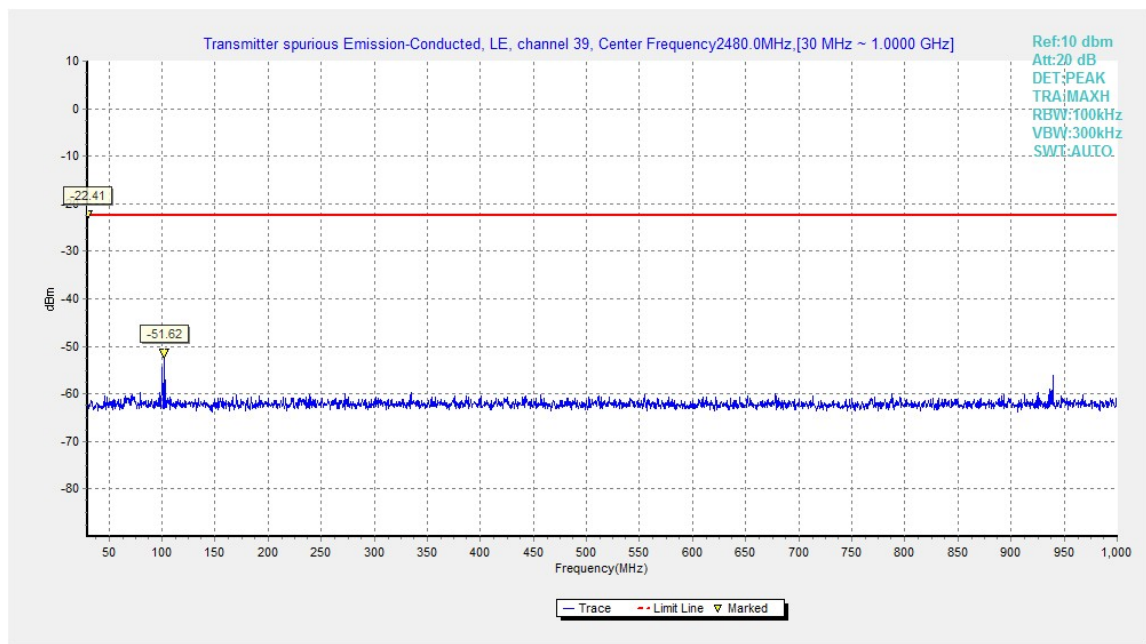


Fig.14. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 30MHz - 1GHz

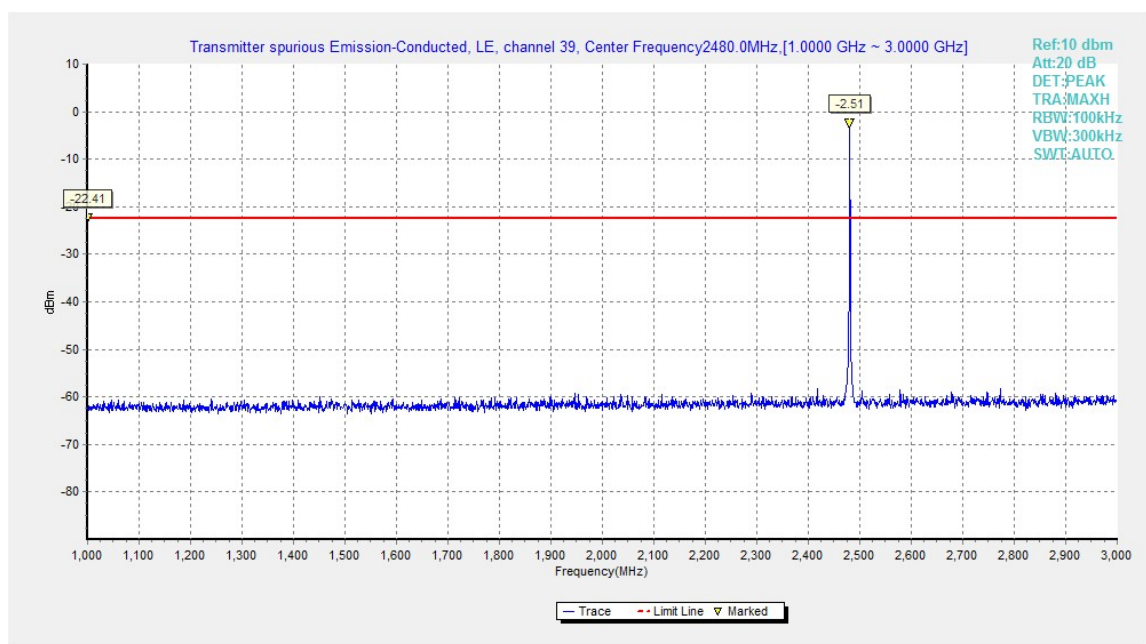


Fig.15. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 1GHz - 3GHz

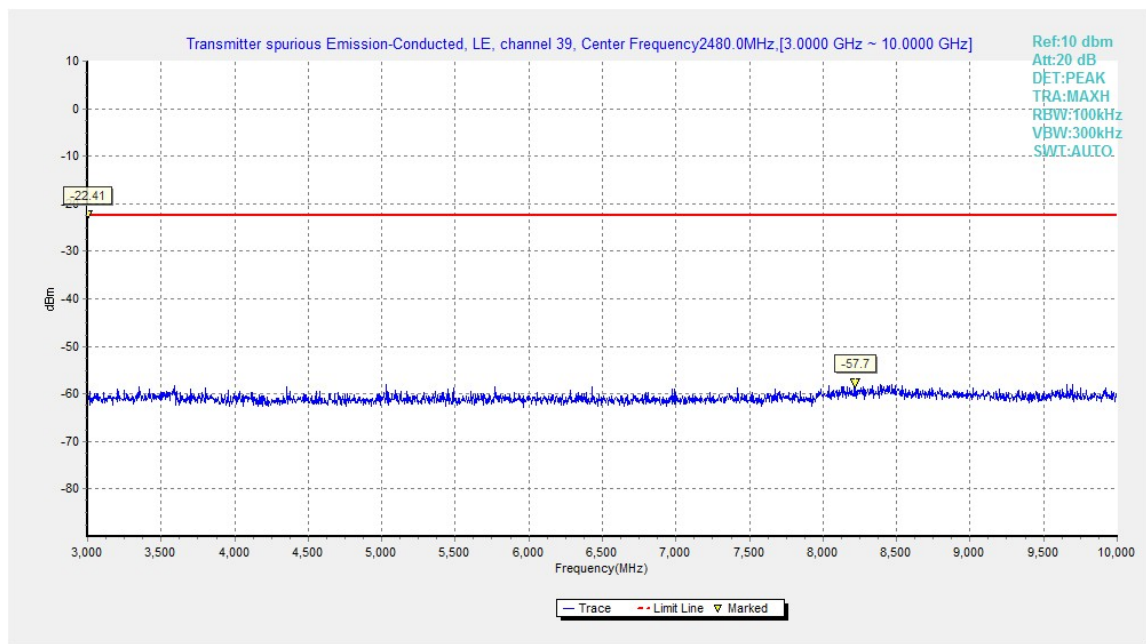


Fig.16. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 3GHz - 10GHz

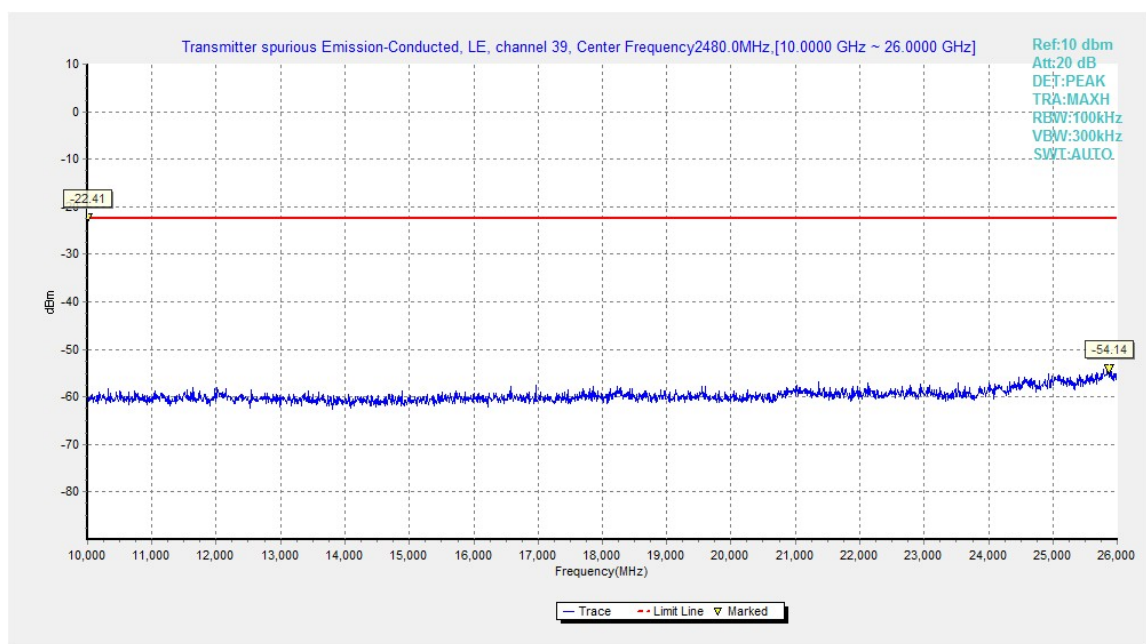


Fig.17. Transmitter Spurious Emission - Conducted: GFSK, 2480 MHz, 10GHz - 26GHz

## A.5. Transmitter Spurious Emission - Radiated

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

### Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

### Measurement Results:

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

### For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	1 GHz ~ 3 GHz	Fig.18	P
	3 GHz ~ 18 GHz	Fig.19	P
2441 MHz	9 kHz ~ 30 MHz	Fig.20	P
	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P

2480 MHz	1 GHz ~ 3 GHz	Fig.24	P
	3 GHz ~ 18 GHz	Fig.25	P
Power	2.38GHz~2.4GHz---L	Fig.26	P
Power	2.45GHz~2.5GHz---H	Fig.27	P
For all channels	18 GHz ~ 26.5 GHz	Fig.28	P

#### GFSK 2402MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2382.000	46.8	2.9	32.0	11.846	54.0	7.3	H
2389.030	46.8	2.9	32.0	11.982	54.0	7.2	H
4804.500	37.6	-17.3	34.5	20.418	54.0	16.4	H
7206.400	39.8	-16.4	36.1	20.096	54.0	14.2	H
9607.500	38.6	-18.2	37.0	19.908	54.0	15.4	H
12010.500	41.6	-17.4	39.3	19.710	54.0	12.4	H

#### GFSK 2440MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2386.400	46.8	2.9	32.0	11.919	54.0	7.2	H
2483.900	47.9	2.9	32.7	12.207	54.0	6.1	H
4842.000	37.3	-17.5	34.5	20.284	54.0	16.7	H
7263.000	37.5	-18.6	36.1	20.043	54.0	16.5	H
9684.400	40.3	-16.6	37.1	19.821	54.0	13.7	H
12105.500	41.5	-17.3	39.3	19.499	54.0	12.5	H

#### GFSK 2480MHz–Average

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.540	48.3	2.9	32.8	12.607	54.0	5.7	H
2486.300	47.9	2.9	32.7	12.290	54.0	6.1	H
4884.500	36.4	-18.6	34.5	20.520	54.0	17.6	H
7323.400	37.6	-18.5	36.1	20.007	54.0	16.4	H
9764.500	39.4	-17.8	37.2	19.963	54.0	14.6	H
12205.000	40.7	-17.8	39.2	19.259	54.0	13.3	H

#### GFSK 2402MHz–Peak

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2384.210	59.9	2.9	32.0	24.99	74.0	14.1	H
2389.884	60.3	2.9	32.0	25.45	74.0	13.7	H
17769.750	59.8	-13.4	41.0	32.19	74.0	14.2	H

17782.500	59.7	-13.4	41.0	32.14	74.0	14.3	V
17604.750	59.4	-13.3	41.1	31.64	74.0	14.6	V
17769.000	59.3	-13.4	41.0	31.67	74.0	14.7	V

**GFSK 2440MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2335.800	48.8	-27.7	31.4	45.07	74.0	25.2	V
2533.400	51.3	-26.8	32.8	45.32	74.0	22.7	V
17708.250	59.7	-13.2	41.0	31.90	74.0	14.3	V
17616.750	59.6	-13.2	41.1	31.69	74.0	14.4	H
17244.750	59.5	-14.2	41.2	32.53	74.0	14.5	V
17586.000	59.4	-13.5	41.1	31.79	74.0	14.6	V

**GFSK 2480MHz–Peak**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
2487.660	61.6	2.9	32.6	26.03	74.0	12.4	V
2493.680	61.1	2.9	32.5	25.71	74.0	12.9	H
17628.750	59.9	-13.1	41.1	31.88	74.0	14.1	V
17621.250	59.9	-13.1	41.1	31.90	74.0	14.1	V
17702.250	59.6	-13.2	41.0	31.77	74.0	14.4	V
17781.000	59.6	-13.4	41.0	32.03	74.0	14.4	V

**Conclusion: PASS**

**Test graphs as below:**

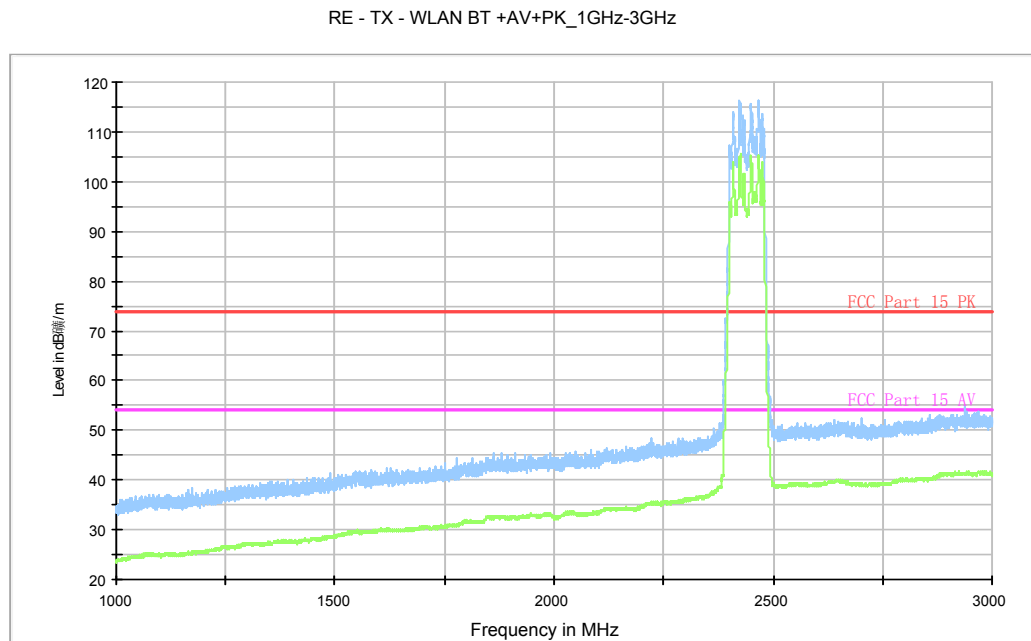


Fig.18. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 1 GHz - 3GHz

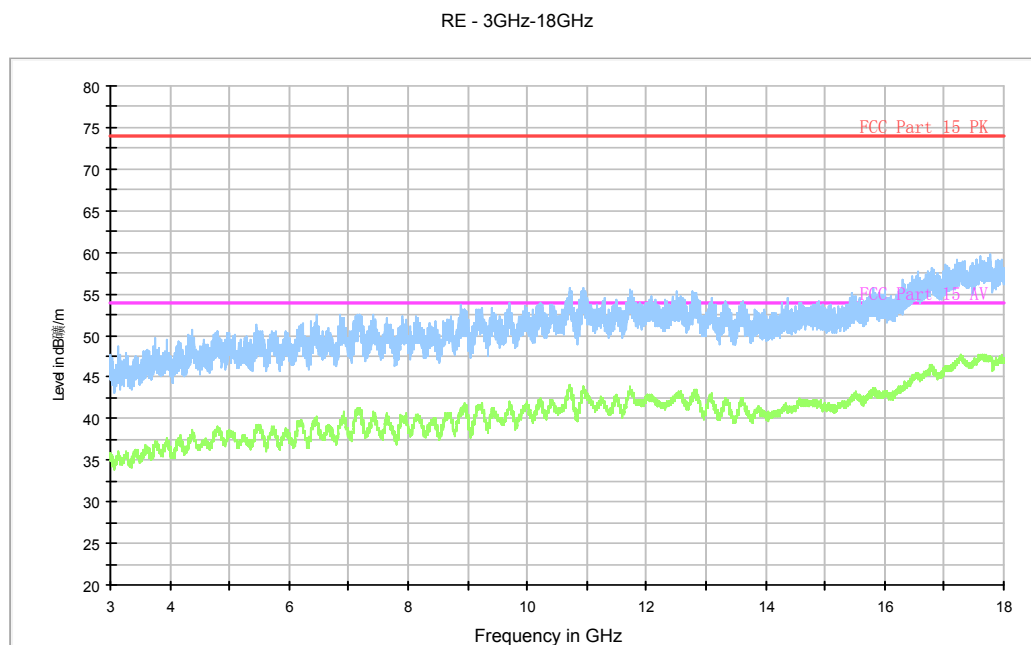


Fig.19. Transmitter Spurious Emission - Radiated: GFSK, 2402MHz, 3 GHz - 18 GHz



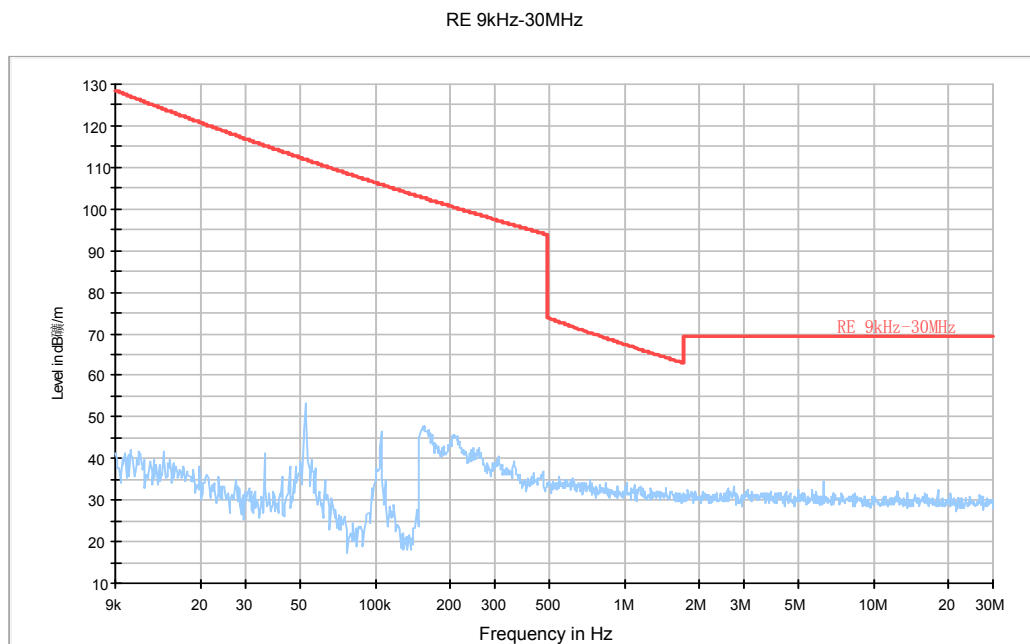


Fig.20. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 9 kHz - 30 MHz

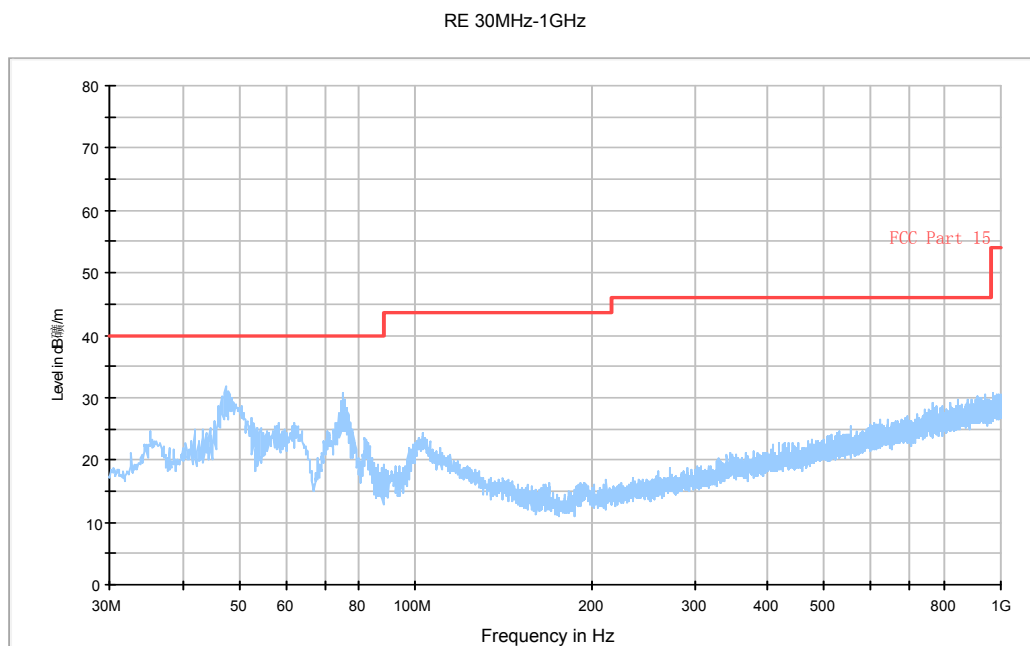


Fig.21. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 30 MHz - 1 GHz



RE - TX - WLAN BT +AV+PK\_1GHz-3GHz

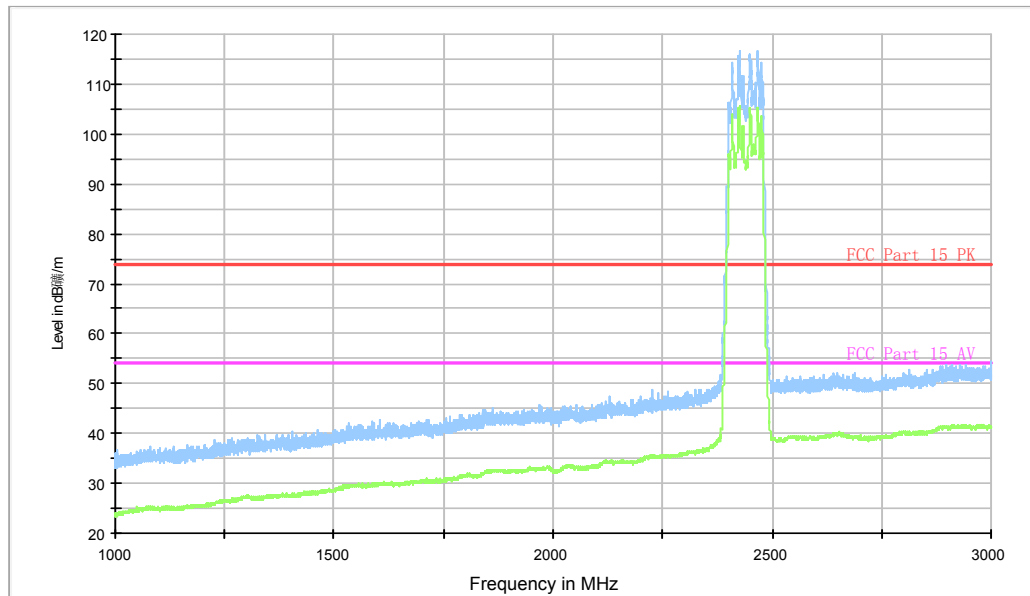


Fig.22. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 1 GHz - 3 GHz

RE - 3GHz-18GHz

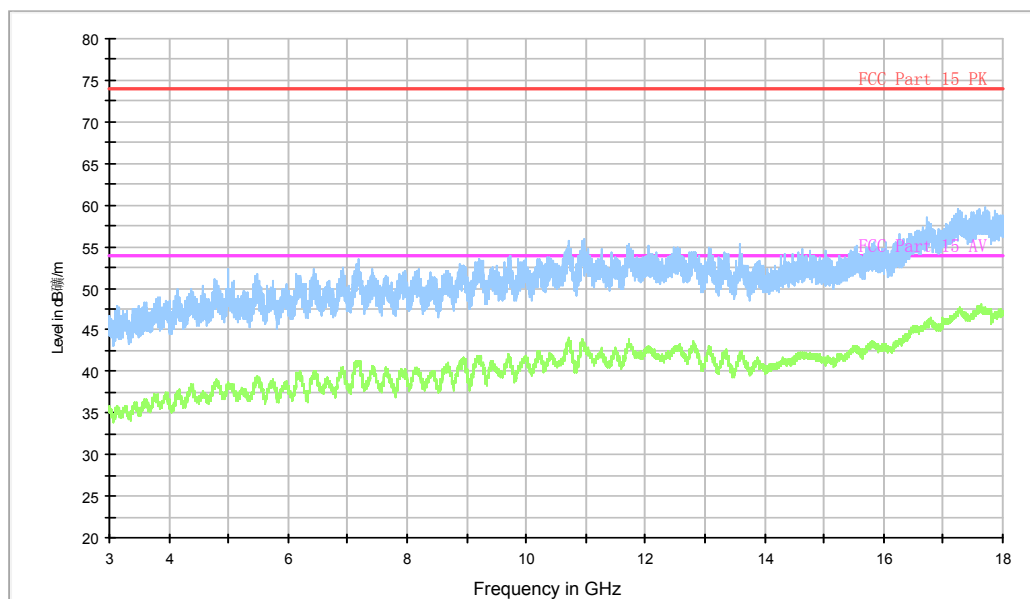


Fig.23. Transmitter Spurious Emission - Radiated: GFSK, 2440MHz, 3 GHz - 18 GHz

RE - TX - WLAN BT +AV+PK\_1GHz-3GHz

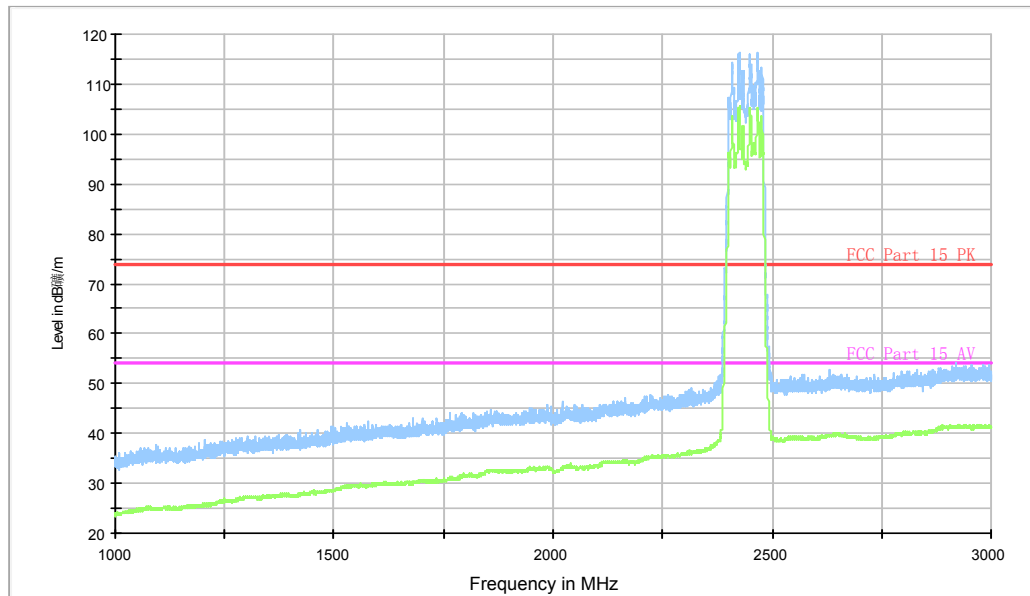


Fig.24. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 1 GHz - 3 GHz

RE - 3GHz-18GHz

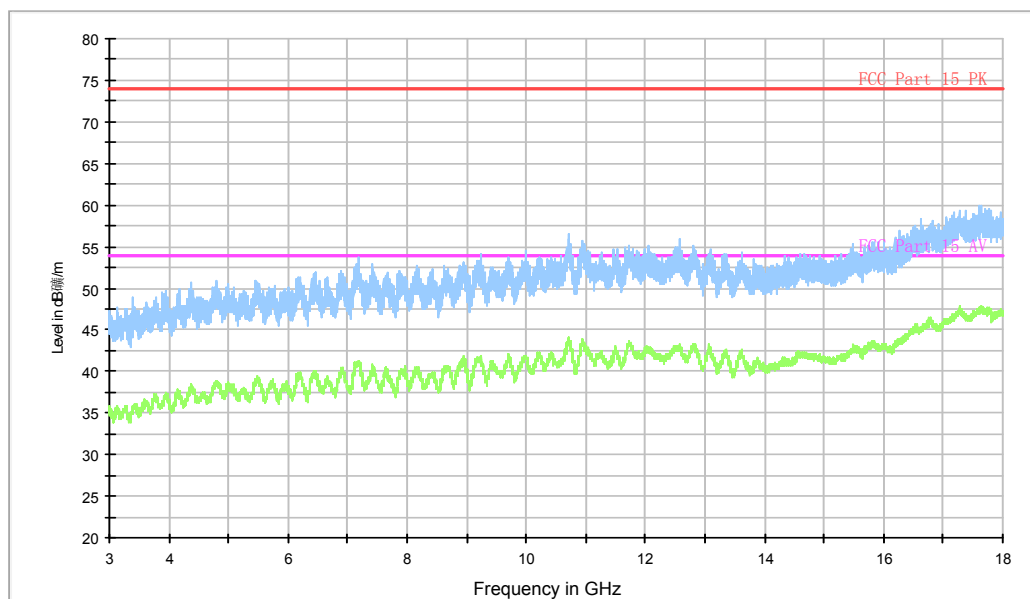


Fig.25. Transmitter Spurious Emission - Radiated: GFSK, 2480MHz, 3 GHz - 18 GHz

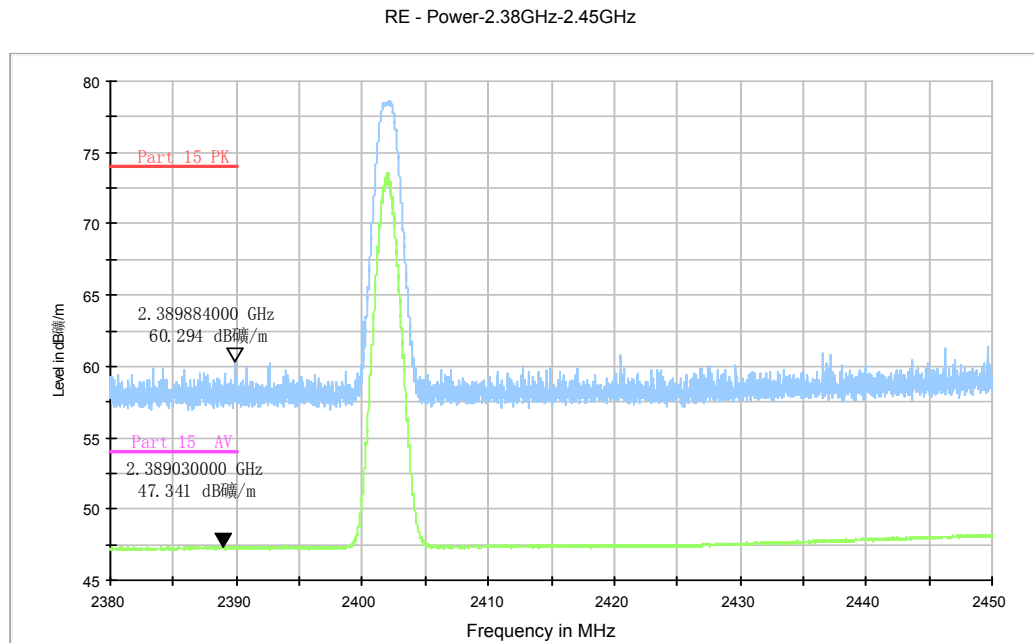


Fig.26. Transmitter Spurious Emission - Radiated (Power): GFSK low channel

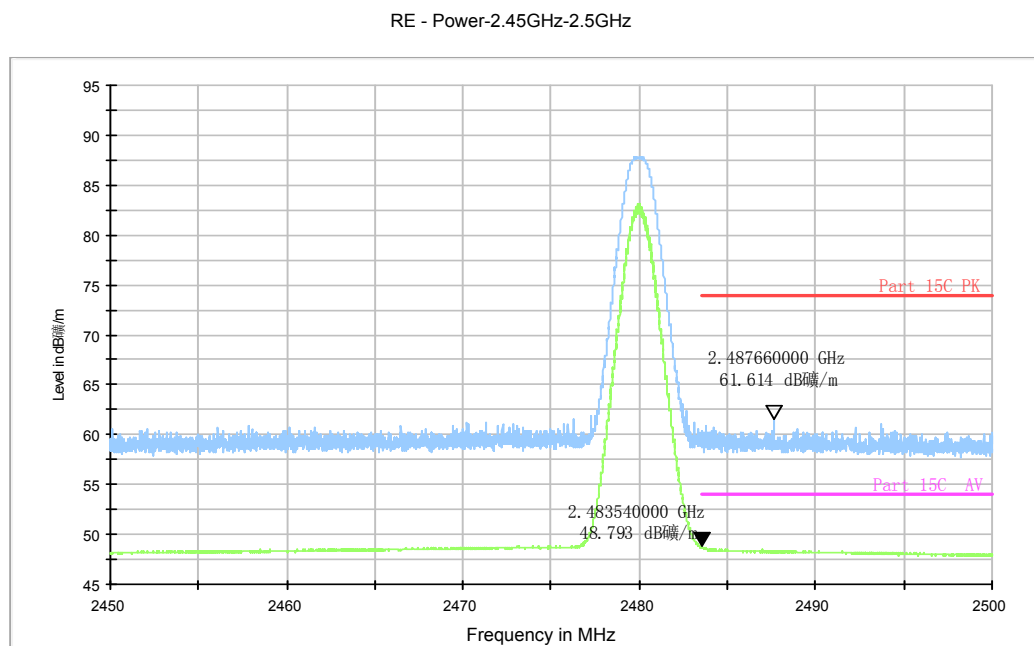


Fig.27. Transmitter Spurious Emission - Radiated (Power): GFSK high channel

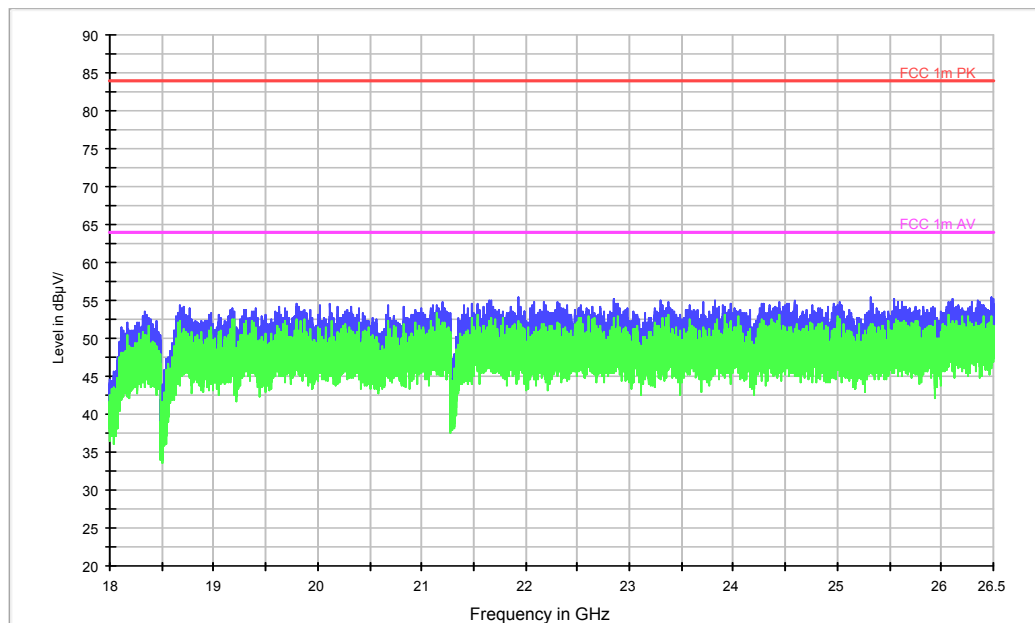


Fig.28. Transmitter Spurious Emission - Radiated: GFSK, 18 GHz - 26 GHz

## A.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
0	2402	Fig.29	682.00	P
19	2440	Fig.30	676.67	P
39	2480	Fig.31	691.33	P

**Conclusion: PASS**

Test graphs as below:

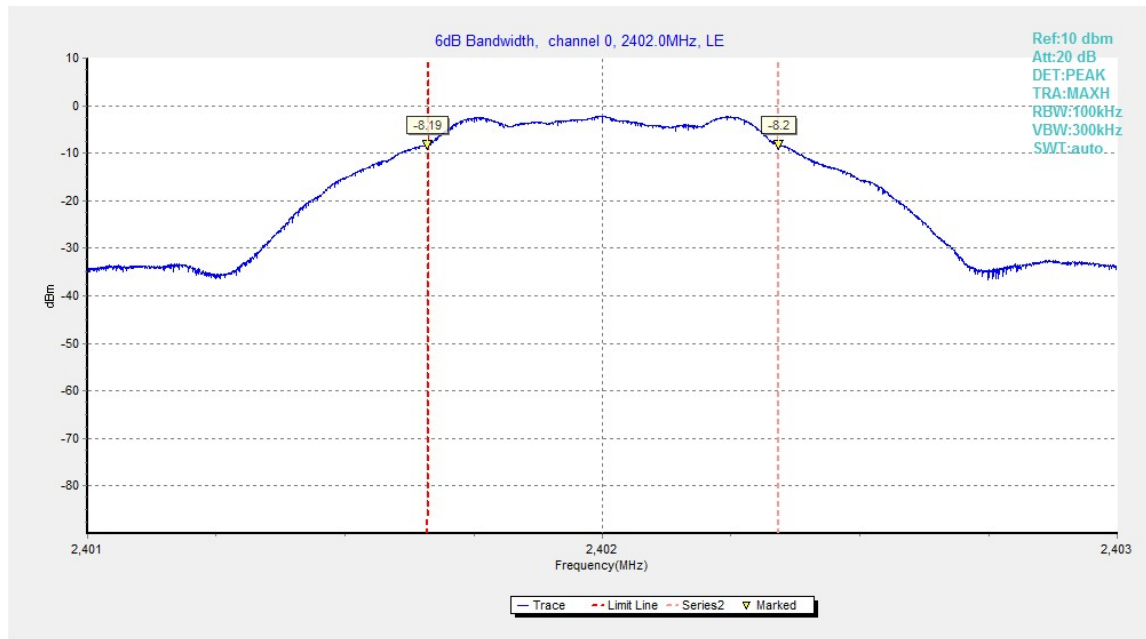


Fig.29. 6dB Bandwidth: GFSK, 2402 MHz

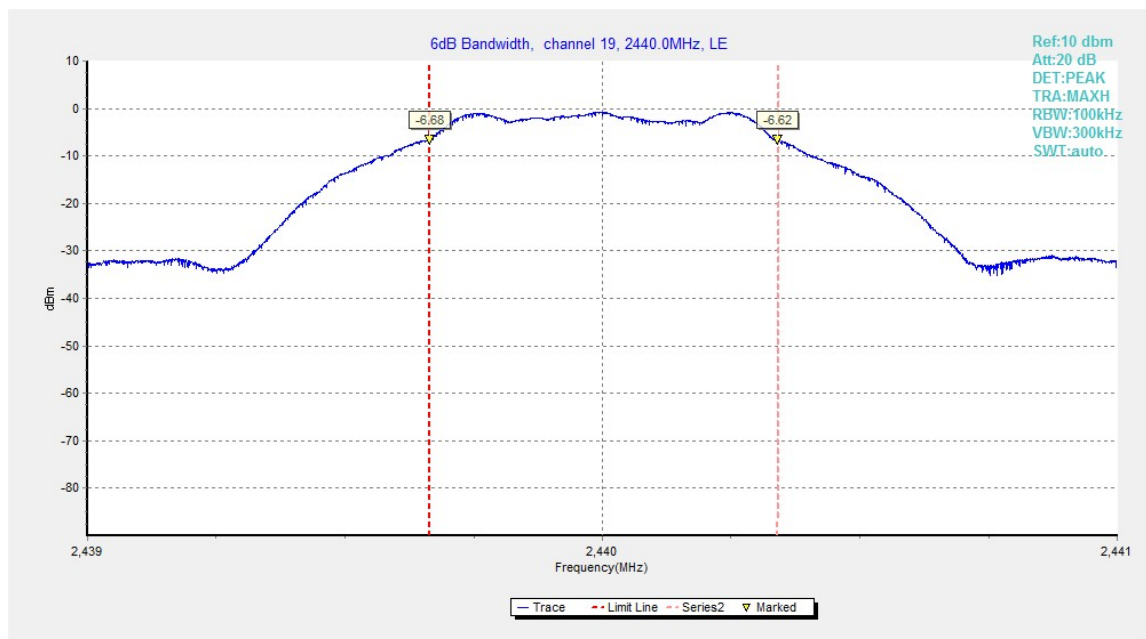


Fig.30. 6dB Bandwidth: GFSK, 2440 MHz

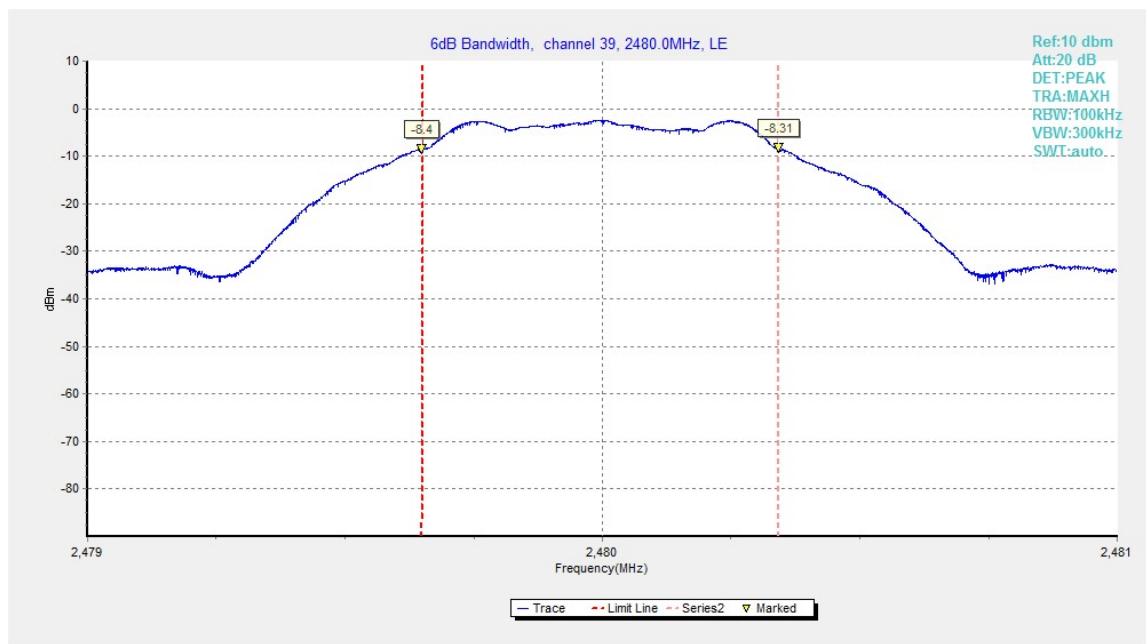


Fig.31. 6dB Bandwidth: GFSK, 2480 MHz

## A.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0 \text{ dBm/3kHz}$

### Measurement Results:

#### For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
0	2402	Fig.32	-32.16	P
19	2440	Fig.33	-30.59	P
39	2480	Fig.34	-32.27	P

Test graphs as below:



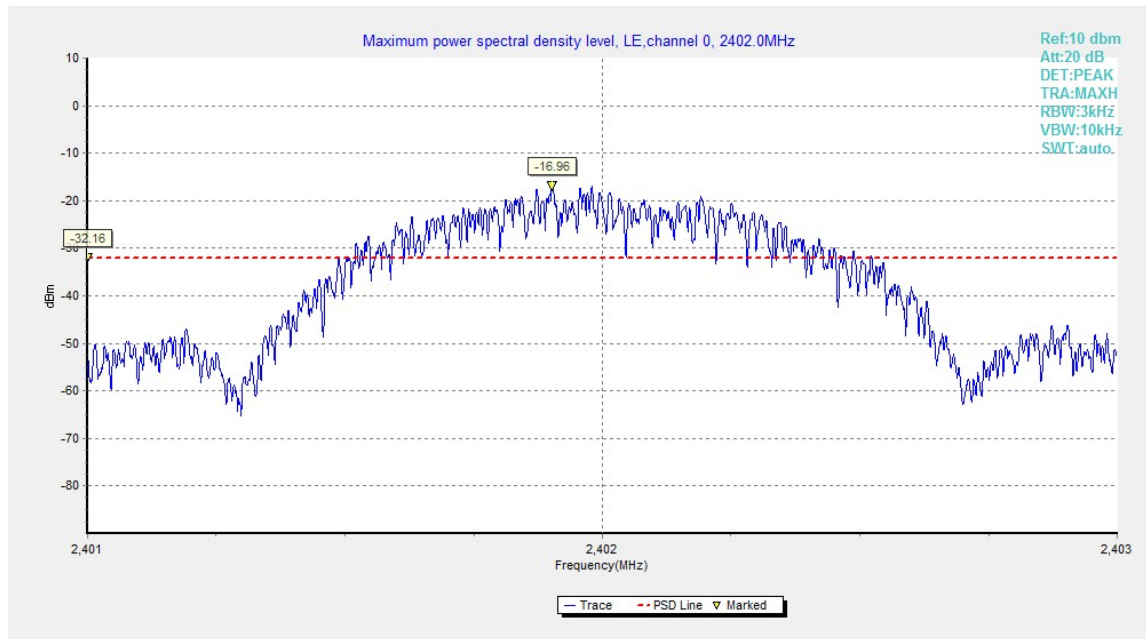


Fig.32. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

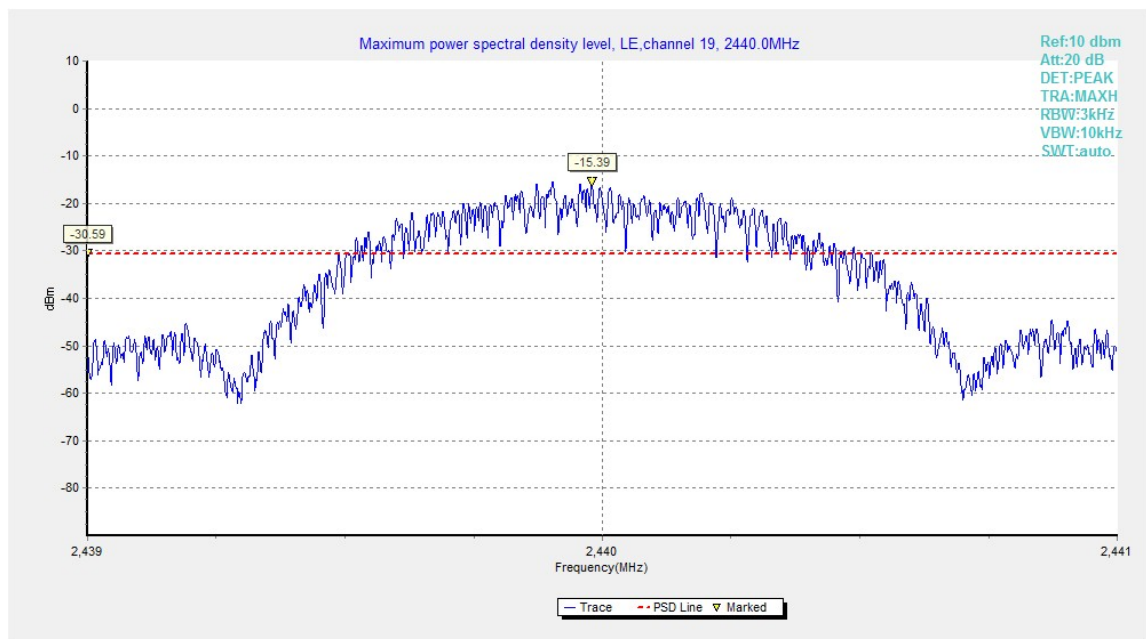


Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

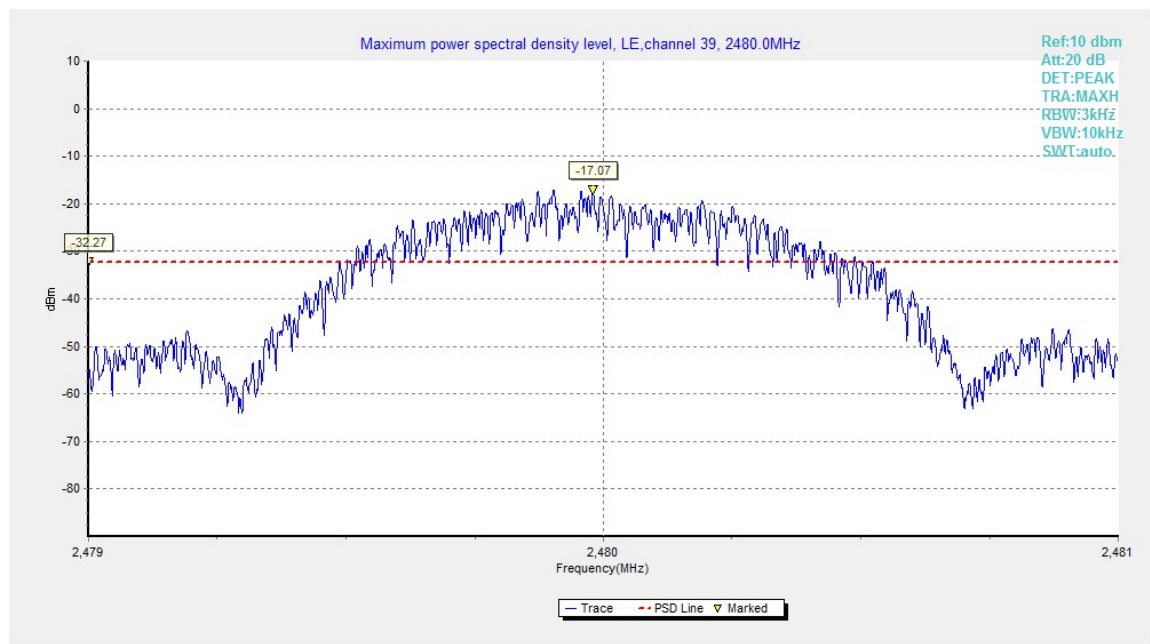


Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

## A.8. AC Powerline Conducted Emission

### Method of Measurement: See ANSI C63.10-clause 6.2

1. the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
5. If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### Test Condition

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit:

#### Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



**Bluetooth (Average Limit)**


Frequency range (MHz)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

The measurement is made according to ANSI C63.10

**Conclusion: PASS**

**Test graphs as below:**

Traffic: (Charger:CBA3068AGAC1)

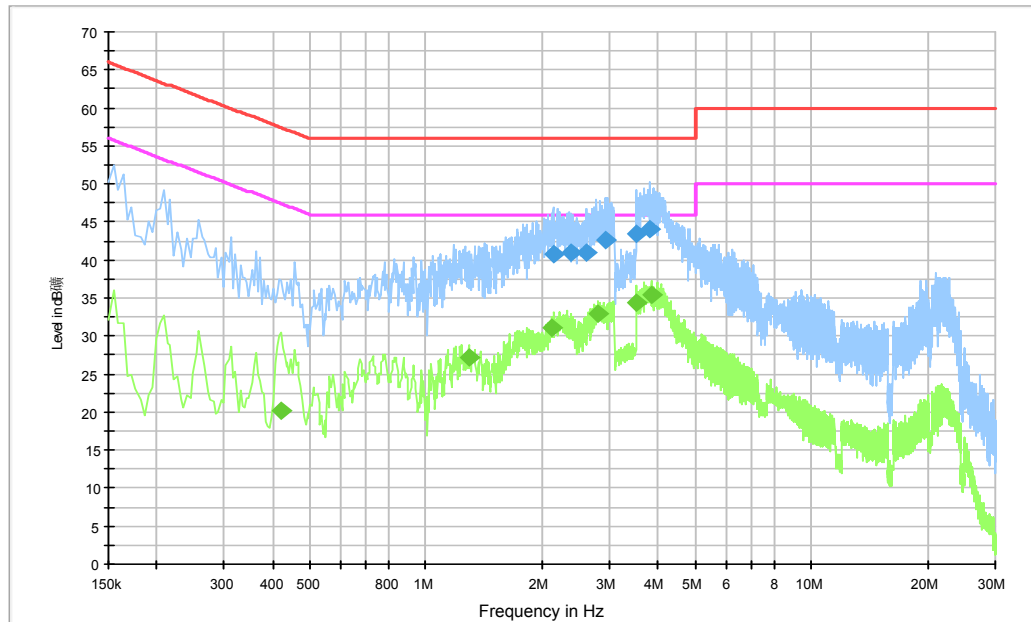


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.134500	40.9	GND	L1	10.4	15.2	56.0
2.373000	41.0	GND	L1	10.4	15.0	56.0
2.616000	41.1	GND	L1	10.4	14.9	56.0
2.908500	42.6	GND	L1	10.4	13.4	56.0
3.525000	43.4	GND	L1	10.4	12.6	56.0
3.817500	44.1	GND	L1	10.4	11.9	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.420000	20.2	GND	N	10.4	27.2	47.4
1.288500	27.2	GND	L1	10.3	18.8	46.0
2.116500	31.1	GND	L1	10.4	14.9	46.0
2.782500	33.0	GND	L1	10.4	13.0	46.0
3.525000	34.3	GND	L1	10.4	11.7	46.0
3.831000	35.4	GND	L1	10.4	10.6	46.0

Idle: (Charger:CBA3068AGAC1)

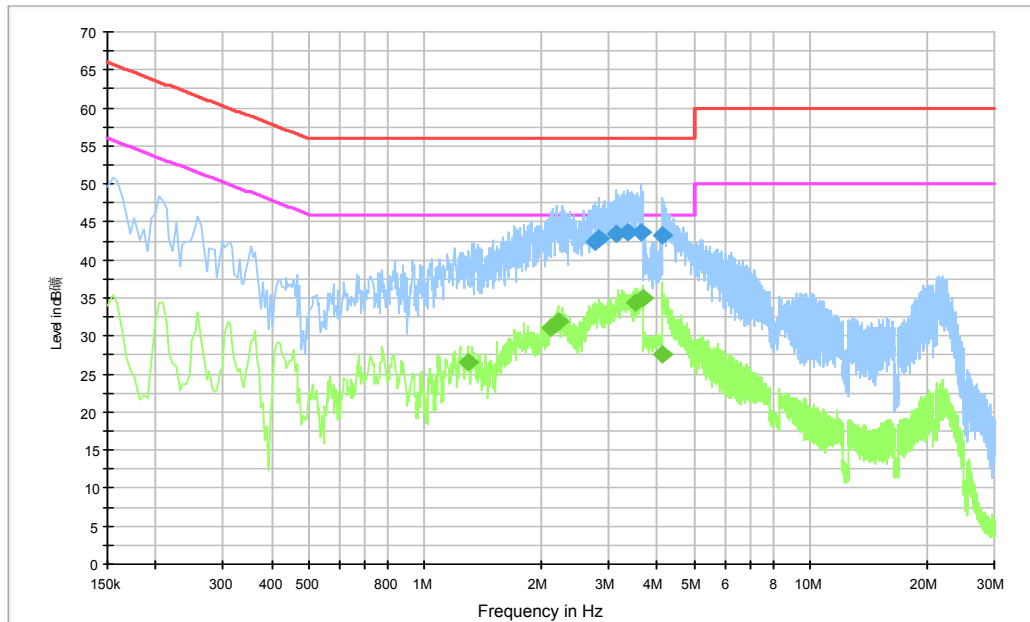


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.773500	42.4	GND	L1	10.4	13.6	56.0
2.823000	42.8	GND	L1	10.4	13.2	56.0
3.147000	43.4	GND	L1	10.4	12.6	56.0
3.340500	43.7	GND	L1	10.4	12.3	56.0
3.628500	43.7	GND	L1	10.4	12.3	56.0
4.128000	43.1	GND	L1	10.5	12.9	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.293000	26.6	GND	L1	10.3	19.4	46.0
2.121000	31.1	GND	L1	10.4	15.0	46.0
2.211000	31.8	GND	L1	10.4	14.2	46.0
3.507000	34.4	GND	L1	10.4	11.6	46.0
3.660000	35.0	GND	L1	10.4	11.0	46.0
4.128000	27.7	GND	L1	10.5	18.3	46.0

Traffic: (Charger: CBA3068AGAC3)

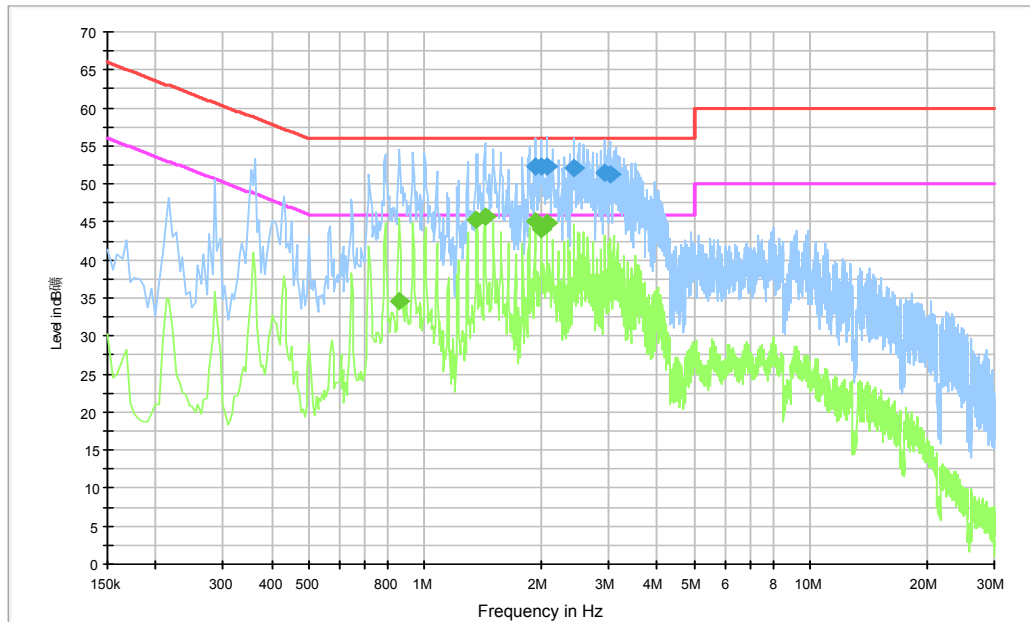


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.932000	52.3	GND	L1	10.4	3.7	56.0
2.008500	52.2	GND	L1	10.4	3.8	56.0
2.076000	52.3	GND	L1	10.4	3.7	56.0
2.436000	52.2	GND	L1	10.4	3.8	56.0
2.935500	51.4	GND	L1	10.4	4.6	56.0
3.012000	51.2	GND	L1	10.4	4.8	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.861000	34.7	GND	L1	10.3	11.3	46.0
1.360500	45.3	GND	L1	10.3	0.7	46.0
1.432500	45.7	GND	L1	10.3	0.3	46.0
1.932000	45.2	GND	L1	10.4	0.8	46.0
2.008500	44.1	GND	L1	10.4	1.9	46.0
2.076000	44.8	GND	L1	10.4	1.2	46.0

Idle: (Charger: CBA3068AGAC3)

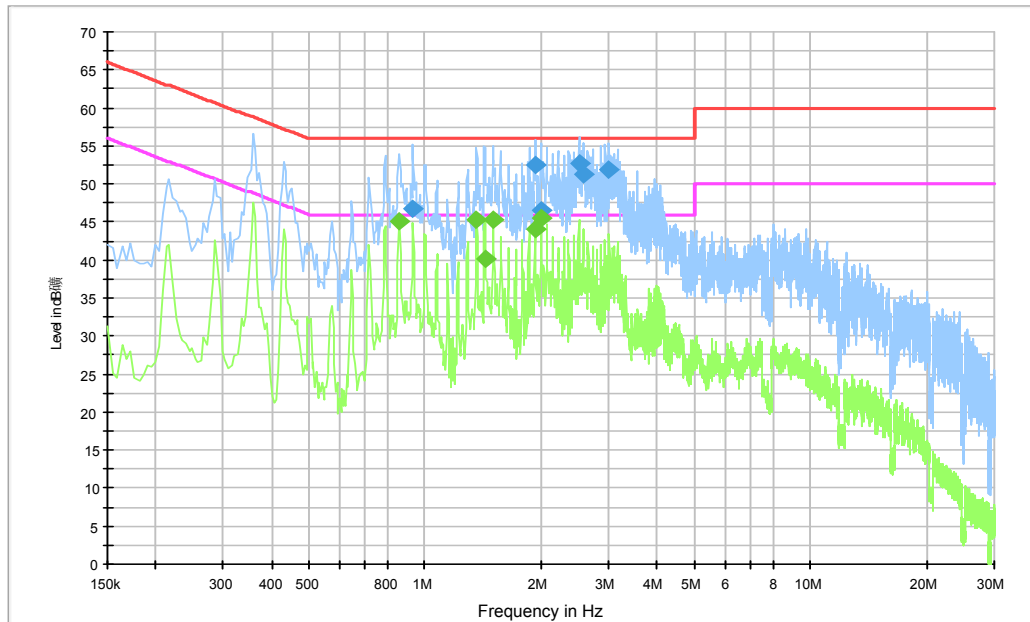

## Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.928500	46.8	GND	N	10.4	9.2	56.0
1.936500	52.5	GND	L1	10.4	3.5	56.0
1.995000	46.5	GND	N	10.5	9.5	56.0
2.508000	52.7	GND	L1	10.4	3.3	56.0
2.575500	51.3	GND	L1	10.4	4.7	56.0
3.007500	51.9	GND	L1	10.4	4.1	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.861000	45.1	GND	L1	10.3	0.9	46.0
1.360500	45.3	GND	L1	10.3	0.7	46.0
1.432500	40.1	GND	L1	10.3	5.9	46.0
1.504500	45.3	GND	L1	10.3	0.7	46.0
1.936500	44.1	GND	L1	10.4	1.9	46.0
2.004000	45.5	GND	L1	10.4	0.5	46.0



Traffic: (Charger: CBA3068AGAC4)

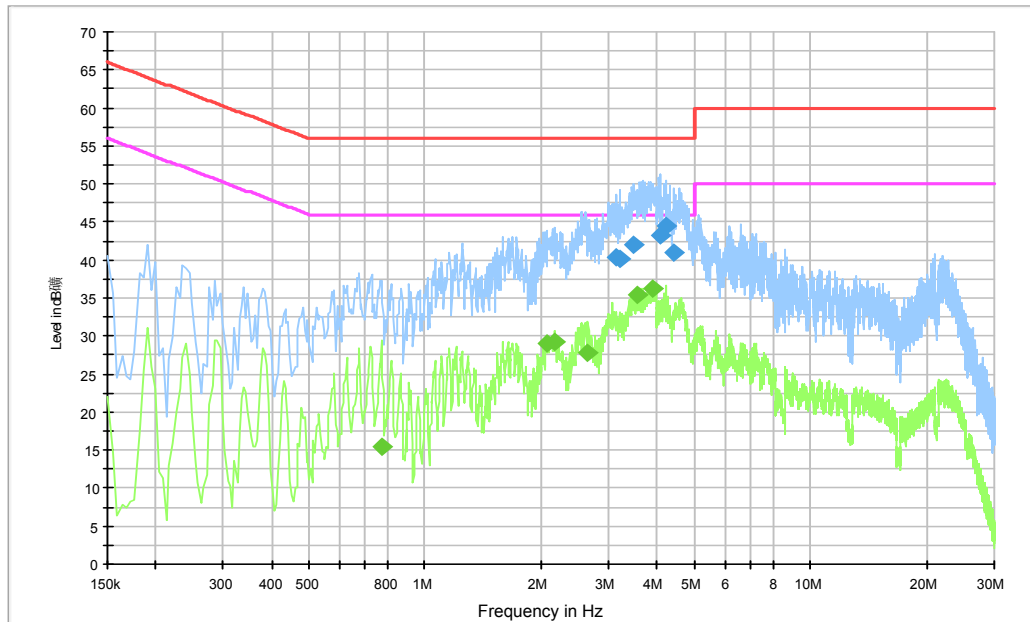


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.129000	40.4	GND	N	10.5	15.6	56.0
3.210000	40.1	GND	N	10.5	15.9	56.0
3.493500	41.9	GND	N	10.5	14.1	56.0
4.074000	43.3	GND	N	10.5	12.7	56.0
4.209000	44.4	GND	N	10.5	11.6	56.0
4.402500	41.0	GND	N	10.5	15.0	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.771000	15.4	GND	L1	10.3	30.6	46.0
2.067000	29.1	GND	L1	10.4	16.9	46.0
2.175000	29.1	GND	L1	10.4	16.9	46.0
2.652000	27.8	GND	L1	10.4	18.2	46.0
3.570000	35.4	GND	L1	10.4	10.6	46.0
3.903000	36.3	GND	L1	10.4	9.7	46.0

Idle: (Charger: CBA3068AGAC4)

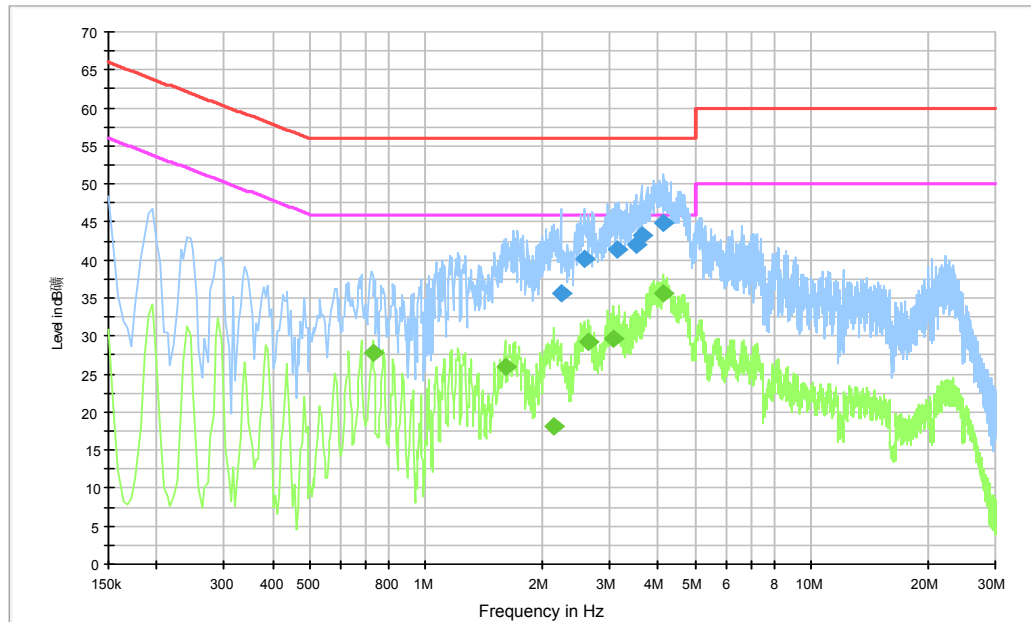


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.238000	35.6	GND	N	10.5	20.4	56.0
2.580000	40.1	GND	L1	10.4	15.9	56.0
3.115500	41.3	GND	L1	10.4	14.7	56.0
3.507000	41.9	GND	N	10.5	14.1	56.0
3.619500	43.2	GND	N	10.5	12.8	56.0
4.132500	44.8	GND	L1	10.5	11.2	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.726000	27.8	GND	L1	10.3	18.2	46.0
1.603500	26.0	GND	L1	10.3	20.0	46.0
2.139000	18.1	GND	L1	10.4	27.9	46.0
2.629500	29.3	GND	L1	10.4	16.7	46.0
3.066000	29.7	GND	L1	10.4	16.3	46.0
4.132500	35.7	GND	L1	10.5	10.3	46.0

Traffic: (Charger: CBA0066AGAC3)

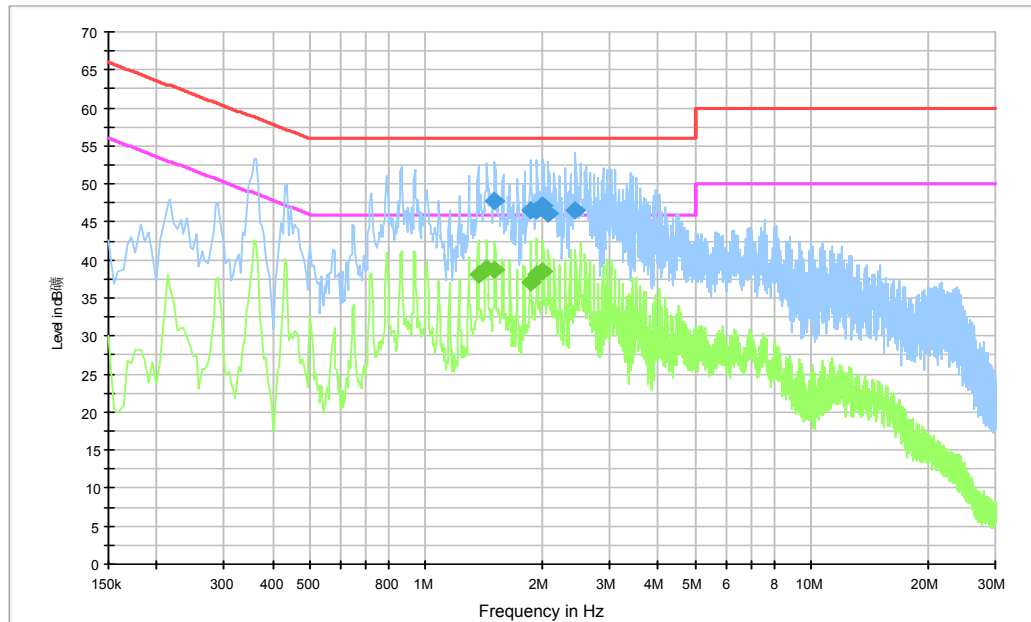


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.509000	47.8	GND	L1	10.3	8.2	56.0
1.869000	46.5	GND	L1	10.4	9.5	56.0
1.936500	46.5	GND	L1	10.4	9.5	56.0
2.013000	47.1	GND	L1	10.4	8.9	56.0
2.080500	46.1	GND	L1	10.4	9.9	56.0
2.445000	46.4	GND	L1	10.4	9.6	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.365000	38.0	GND	L1	10.3	8.0	46.0
1.437000	38.8	GND	L1	10.3	7.2	46.0
1.509000	38.7	GND	L1	10.3	7.3	46.0
1.869000	37.1	GND	L1	10.4	8.9	46.0
1.941000	38.0	GND	L1	10.4	8.0	46.0
2.013000	38.5	GND	L1	10.4	7.5	46.0

Idle: (Charger: CBA0066AGAC3)

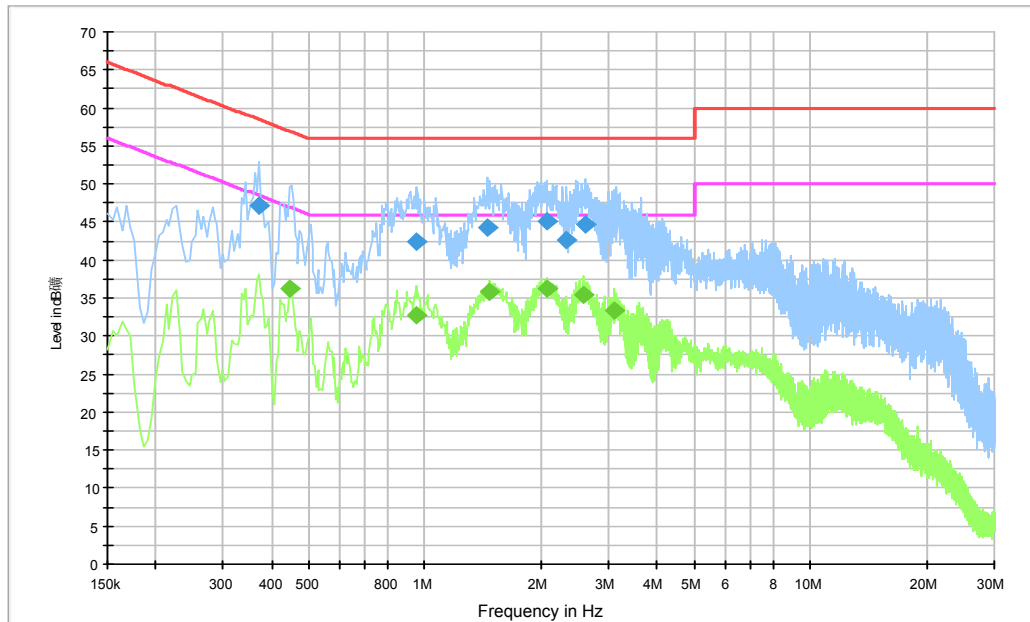


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.370500	47.2	GND	L1	10.3	11.3	58.5
0.955500	42.3	GND	L1	10.3	13.7	56.0
1.450500	44.2	GND	L1	10.3	11.8	56.0
2.076000	45.1	GND	L1	10.4	10.9	56.0
2.332500	42.6	GND	L1	10.4	13.4	56.0
2.602500	44.6	GND	L1	10.4	11.4	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.447000	36.3	GND	L1	10.3	10.6	46.9
0.955500	32.8	GND	L1	10.3	13.2	46.0
1.477500	35.8	GND	L1	10.3	10.2	46.0
2.067000	36.2	GND	L1	10.4	9.8	46.0
2.575500	35.4	GND	L1	10.4	10.6	46.0
3.093000	33.3	GND	L1	10.4	12.7	46.0

Traffic: (Charger: CBA0066AGAC1)

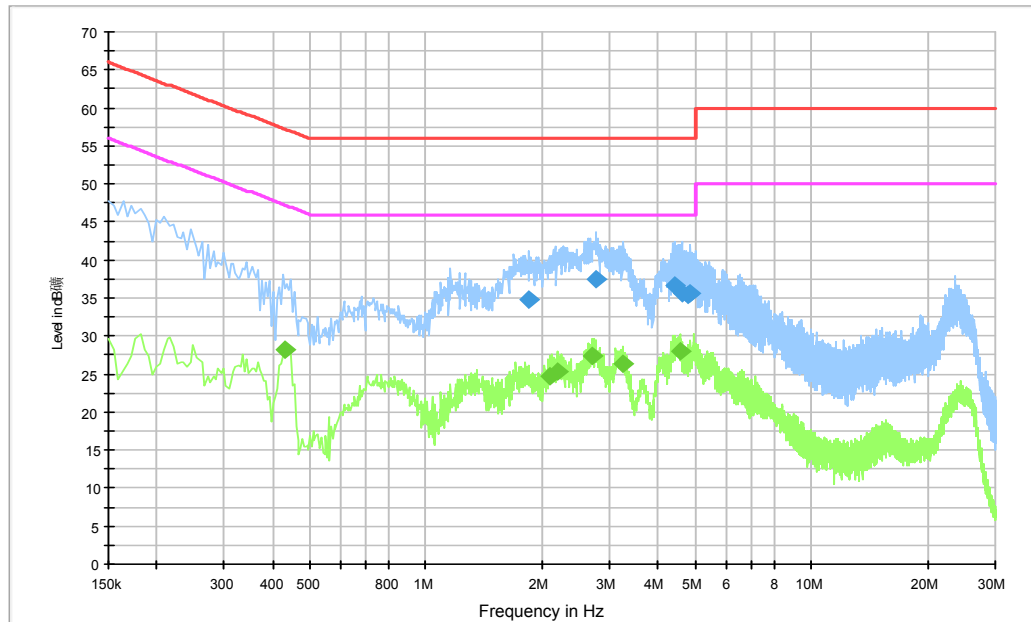


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.851000	34.7	GND	L1	10.4	21.3	56.0
2.769000	37.5	GND	N	10.5	18.5	56.0
4.434000	36.7	GND	L1	10.5	19.3	56.0
4.600500	35.6	GND	L1	10.5	20.4	56.0
4.794000	35.4	GND	L1	10.5	20.6	56.0
4.870500	35.6	GND	L1	10.5	20.4	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.429000	28.3	GND	L1	10.3	19.0	47.3
2.094000	24.8	GND	L1	10.4	21.2	46.0
2.184000	25.4	GND	L1	10.4	20.6	46.0
2.710500	27.3	GND	L1	10.4	18.7	46.0
3.246000	26.3	GND	L1	10.4	19.7	46.0
4.551000	28.0	GND	L1	10.5	18.0	46.0

Idle: (Charger: CBA0066AGAC1)

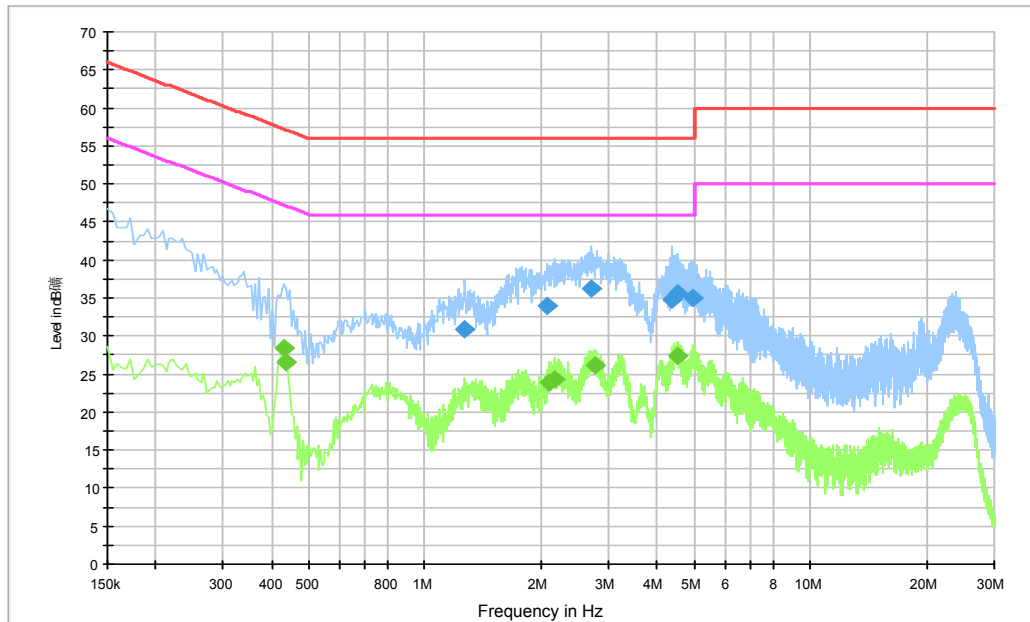


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.270500	30.9	GND	L1	10.3	25.1	56.0
2.080500	34.1	GND	N	10.5	21.9	56.0
2.701500	36.3	GND	N	10.5	19.7	56.0
4.375500	34.9	GND	L1	10.5	21.1	56.0
4.501500	35.6	GND	L1	10.5	20.4	56.0
4.960500	34.9	GND	L1	10.5	21.1	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.429000	28.3	GND	L1	10.3	18.9	47.3
0.438000	26.6	GND	L1	10.3	20.5	47.1
2.107500	23.8	GND	L1	10.4	22.2	46.0
2.175000	24.3	GND	L1	10.4	21.7	46.0
2.751000	26.1	GND	L1	10.4	19.9	46.0
4.501500	27.4	GND	L1	10.5	18.6	46.0

Traffic: (Charger: CBA0066AGAC5)

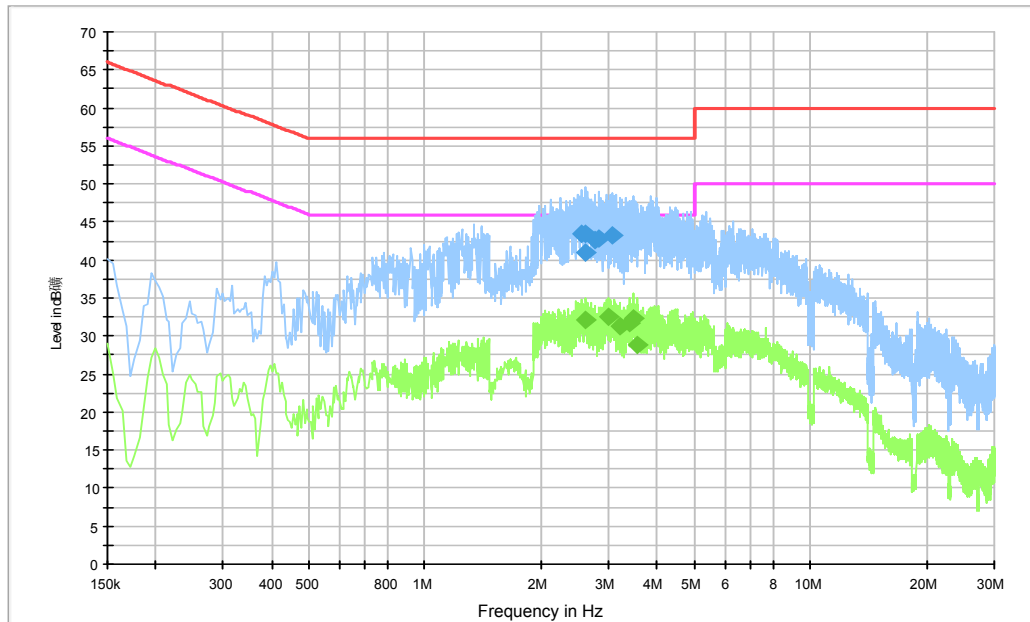


## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.553000	43.5	GND	L1	10.4	12.5	56.0
2.593500	43.4	GND	L1	10.4	12.6	56.0
2.620500	41.0	GND	L1	10.4	15.0	56.0
2.746500	42.7	GND	L1	10.4	13.3	56.0
2.823000	42.8	GND	L1	10.4	13.2	56.0
3.070500	43.3	GND	L1	10.4	12.7	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.620500	32.2	GND	L1	10.4	13.8	46.0
2.980500	32.5	GND	L1	10.4	13.5	46.0
3.196500	31.2	GND	L1	10.4	14.8	46.0
3.381000	31.6	GND	L1	10.4	14.4	46.0
3.489000	32.2	GND	L1	10.4	13.8	46.0
3.556500	28.9	GND	L1	10.4	17.1	46.0

Idle: (Charger: CBA0066AGAC5)

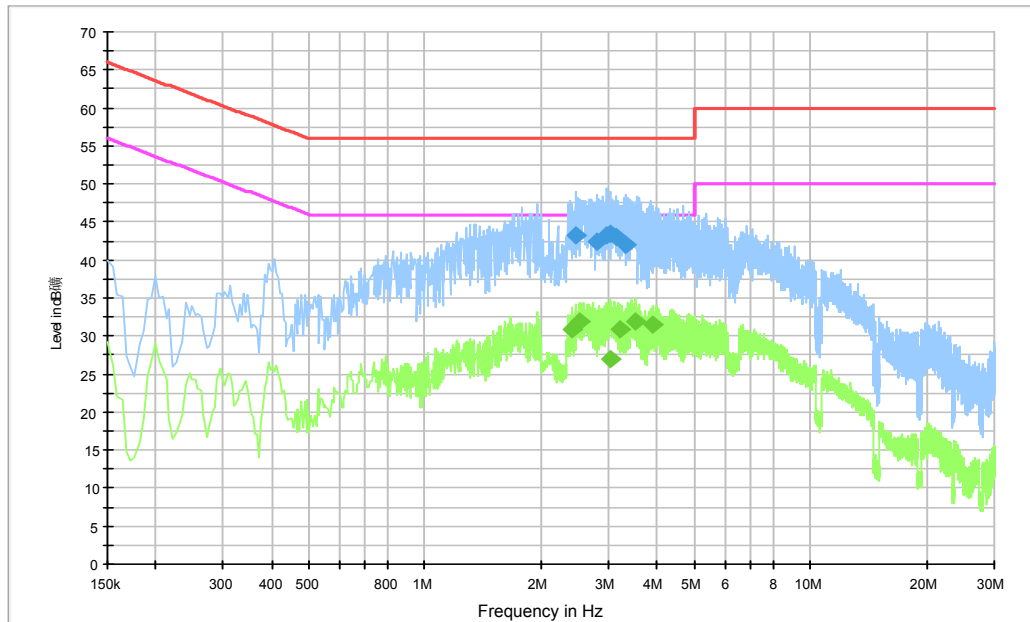

## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.476500	43.2	GND	L1	10.4	12.8	56.0
2.791500	42.5	GND	L1	10.4	13.5	56.0
2.967000	43.3	GND	L1	10.4	12.7	56.0
3.034500	43.4	GND	L1	10.4	12.6	56.0
3.129000	42.9	GND	L1	10.4	13.1	56.0
3.327000	42.0	GND	L1	10.4	14.0	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.409000	31.0	GND	L1	10.4	15.0	46.0
2.526000	32.0	GND	L1	10.4	14.0	46.0
3.043500	26.9	GND	L1	10.4	19.1	46.0
3.219000	30.8	GND	L1	10.4	15.2	46.0
3.529500	32.0	GND	L1	10.4	14.0	46.0
3.885000	31.5	GND	L1	10.4	14.5	46.0

\*\*\*END OF REPORT\*\*\*