



# FCC RF Test Report

**APPLICANT** : TCL Communication Ltd.  
**EQUIPMENT** : GSM Quad-band / UMTS Quad-band  
/ LTE hepta-band mobile phone  
**BRAND NAME** : alcatel  
**MODEL NAME** : 6055B  
**FCC ID** : 2ACCJA015  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jan. 15, 2016 and testing was completed on Apr. 02, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

*James Huang*

---

Prepared by: James Huang / Manager

*Jones Tsai*

---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Applicant .....	5
1.2	Manufacturer .....	5
1.3	Product Feature of Equipment Under Test .....	5
1.4	Product Specification of Equipment Under Test .....	5
1.5	Specification of Accessory .....	6
1.6	Modification of EUT .....	6
1.7	Testing Location .....	7
1.8	Applicable Standards .....	7
<b>2</b>	<b>TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
2.1	Carrier Frequency Channel .....	8
2.2	Pre-Scanned RF Power .....	9
2.3	Test Mode .....	10
2.4	Connection Diagram of Test System .....	11
2.5	Support Unit used in test configuration and system .....	13
2.6	EUT Operation Test Setup .....	13
2.7	Measurement Results Explanation Example .....	14
<b>3</b>	<b>TEST RESULT .....</b>	<b>15</b>
3.1	6dB Bandwidth Measurement .....	15
3.2	Output Power Measurement .....	17
3.3	Power Spectral Density Measurement .....	18
3.4	Conducted Band Edges and Spurious Emission Measurement .....	20
3.5	Radiated Band Edges and Spurious Emission Measurement .....	33
3.6	AC Conducted Emission Measurement .....	37
3.7	Antenna Requirements .....	41
<b>4</b>	<b>LIST OF MEASURING EQUIPMENT .....</b>	<b>42</b>
<b>5</b>	<b>UNCERTAINTY OF EVALUATION .....</b>	<b>43</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>		
<b>APPENDIX B. RADIATED TEST RESULTS</b>		
<b>APPENDIX C. SETUP PHOTOGRAPHS</b>		
<b>APPENDIX D. Duty Cycle Plots</b>		



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR611504C	Rev. 01	Initial issue of report	Apr. 22, 2016

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.24 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.26 dB at 11.020 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**TCL Communication Ltd.**

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

## 1.2 Manufacturer

**TCL Communication Ltd.**

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	GSM Quad-band / UMTS Quad-band / LTE hepta-band mobile phone
<b>Brand Name</b>	alcatel
<b>Model Name</b>	6055B
<b>FCC ID</b>	2ACCJA015
<b>EUT supports Radios application</b>	GSM/GPRS/EDGE/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC/ WLAN2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
<b>IMEI Code</b>	Conducted: N/A Conduction: 356132070001855 Radiation: 356132070001491
<b>HW Version</b>	PIO
<b>SW Version</b>	010 01
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	802.11b/g/n : 2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to Antenna</b>	802.11b : 19.05 dBm (0.0804 W) 802.11g : 22.47 dBm (0.1766 W) 802.11n HT20 : 22.52 dBm (0.1786 W) 802.11n HT40 : 22.71 dBm (0.1866 W)
<b>Antenna Type/Gain</b>	IFA Antenna with gain -2.5 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

## 1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	ALCATEL onetouch	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 400mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AG0C2		
AC Adapter 2	Brand Name	ALCATEL onetouch	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 350mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AG0C4		
AC Adapter 3	Brand Name	N/A	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AG4C1		
AC Adapter 4	Brand Name	alcatel	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 350mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AG0C4		
AC Adapter 5	Brand Name	alcatel	Model Name	UC13US
	Power Rating	I/P: 100-240Vac, 500mA, O/P: 5Vdc, 2000mA		
	P/N	CBA0059AGAC1		
Battery 1	Brand Name	ALCATEL onetouch	Model Name	TLp026EJ
	Power Rating	3.85Vdc, 2610mAh		
Battery 2	Brand Name	ALCATEL onetouch	Model Name	TLp026E2
	Power Rating	3.84Vdc, 2610mAh		
Battery 3	Brand Name	alcatel	Model Name	TLp026EJ
	Power Rating	3.85Vdc, 2610mAh		
Battery 4	Brand Name	alcatel	Model Name	TLp026E2
	Power Rating	3.84Vdc, 2610mAh		
USB Cable 1	Brand Name	N/A	Model Name	CDA0000043C8
	Signal Line Type	1.0m shielded without core		
USB Cable 2	Brand Name	N/A	Model Name	CDA0000043C2
	Signal Line Type	1.0m shielded without core		
Earphone 1	Brand Name	alcatel	Model Name	J22C
	Signal Line Type	1.4m non-shielded without core		
	P/N	CCB0029A10CC		
Earphone 2	Brand Name	alcatel	Model Name	J22H
	Signal Line Type	1.0m non-shielded without core		
	P/N	CCB0047A10CC		

Note: The adapter 4, 5 and battery 3, 4 are just with different logo, all the designs are identical with adapter 2, 3 and battery 1, 2.

## 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412	18.83	CH 06	18.91	18.94	19.02
CH 06	2437	19.05				
CH 11	2462	18.62				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412	22.47	CH 01	22.44	22.35	22.29	22.45	22.39	22.34	22.37
CH 06	2437	22.34								
CH 11	2462	21.86								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	22.52	CH 01	22.46	22.40	22.44	22.37	22.47	22.36	22.49
CH 06	2437	22.38								
CH 11	2462	21.25								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422	22.71	CH 03	22.62	22.57	22.55	22.70	22.61	22.68	22.64
CH 06	2437	22.59								
CH 09	2452	21.67								

## 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1 + Battery 1
<b>Remark:</b> For Radiated TCs, the tests were performed with adapter 1, earphone 1, battery 1 and USB cable 1. The adapter 2, battery 2 and USB cable 2 verify the worst case.	


## 2.4 Connection Diagram of Test System

### <802.11b/HT20/HT40 Tx Mode>

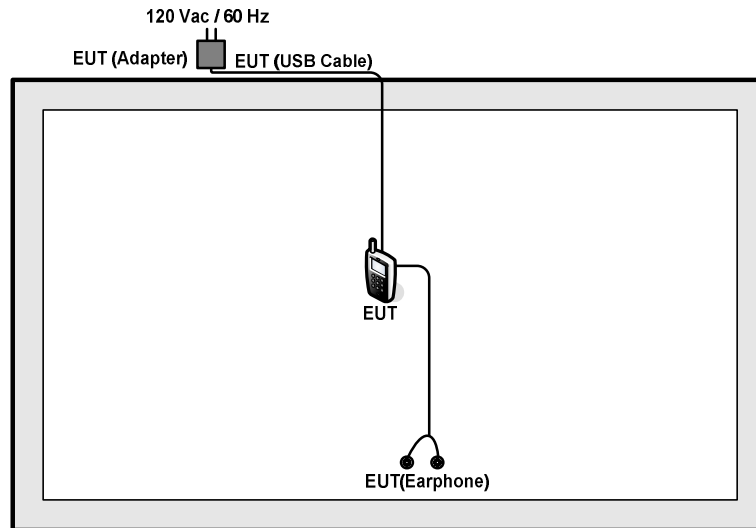

### <802.11g Tx Mode>

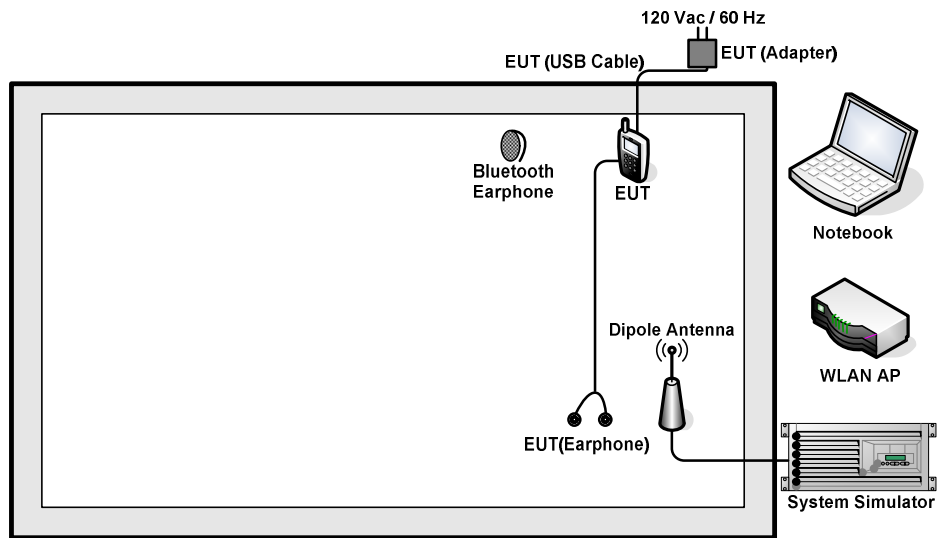

**<AC Conducted Emission Mode>**

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

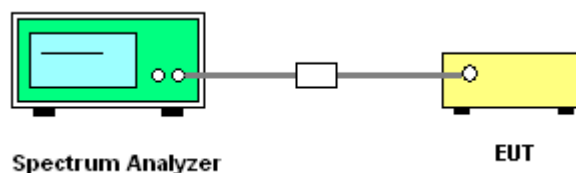



### 3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A of this test report.

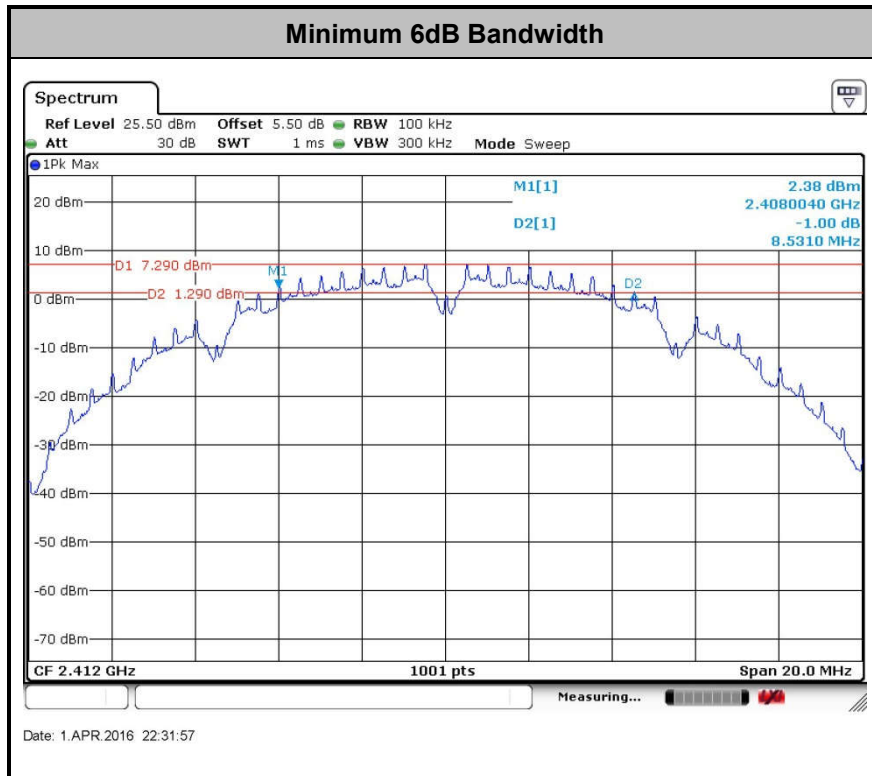



## **3.2 Output Power Measurement**

### **3.2.1 Limit of Output Power**

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### **3.2.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.2.3 Test Procedures**

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### **3.2.4 Test Setup**

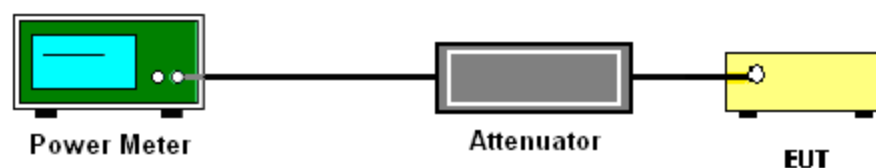

### **3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A of this test report.

### **3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

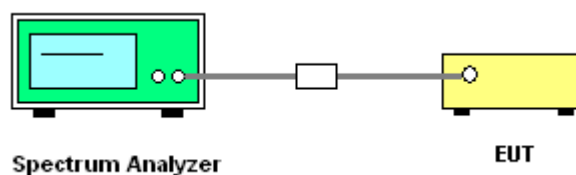



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

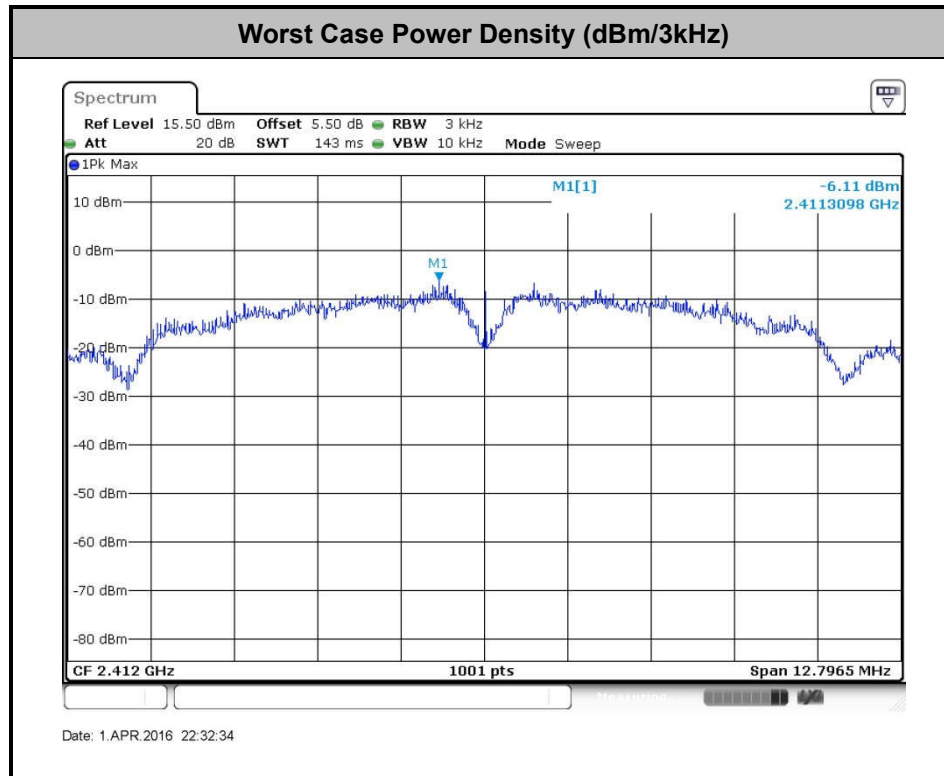

### **3.4 Conducted Band Edges and Spurious Emission Measurement**

#### **3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement**

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


#### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.4.3 Test Procedures**

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


#### **3.4.4 Test Setup**

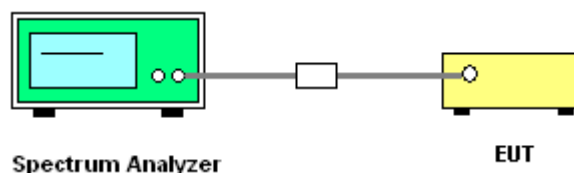






## 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

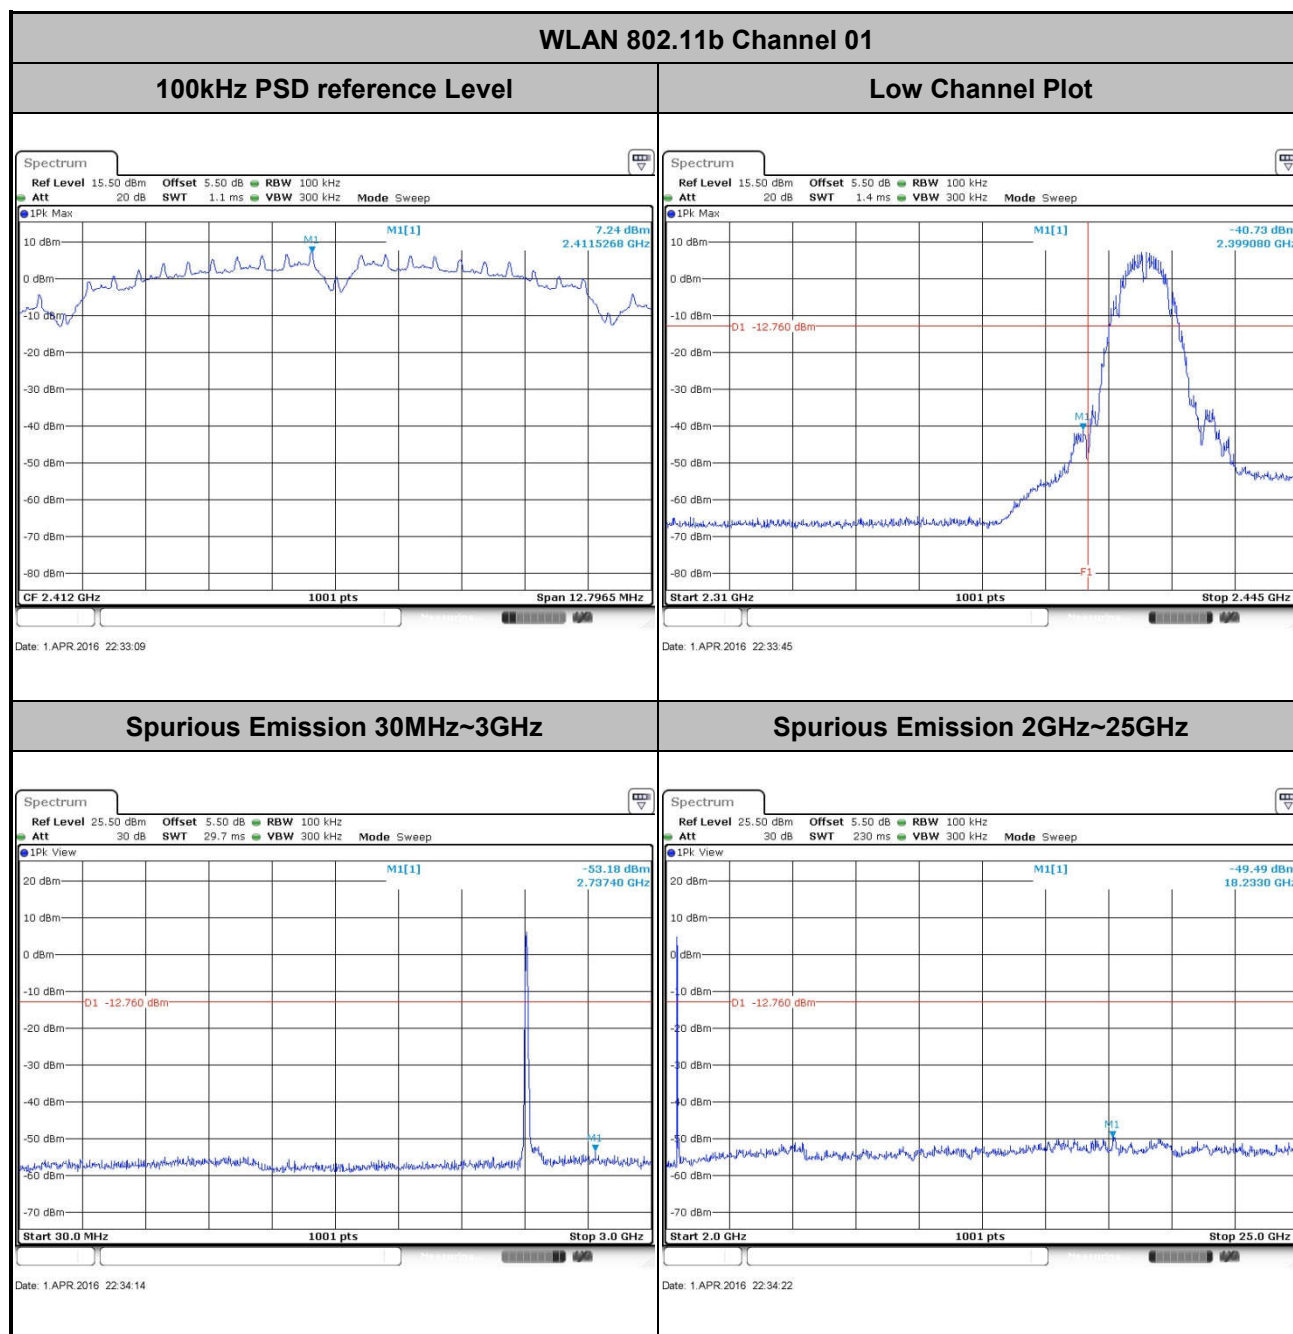







<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	24~25°C
<b>Test Band :</b>	2.4GHz Mid	<b>Relative Humidity :</b>	49~51%
<b>Test Channel :</b>	06	<b>Test Engineer :</b>	Issac Song

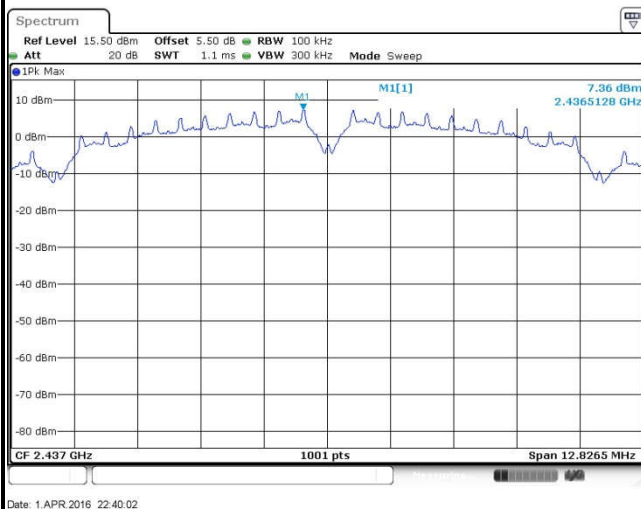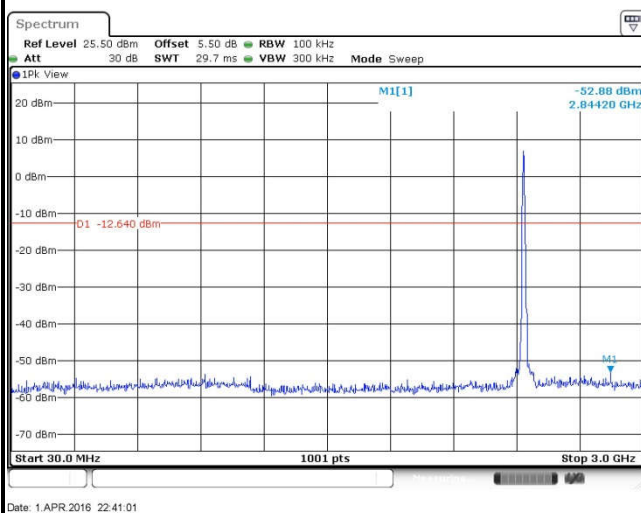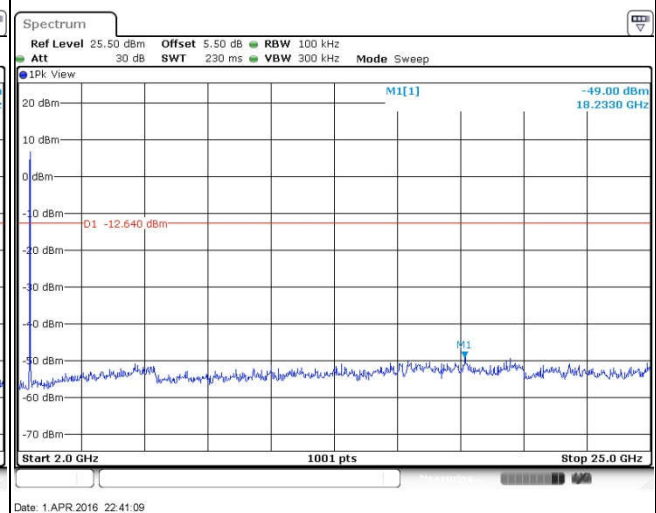**WLAN 802.11b Channel 06****100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**







Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

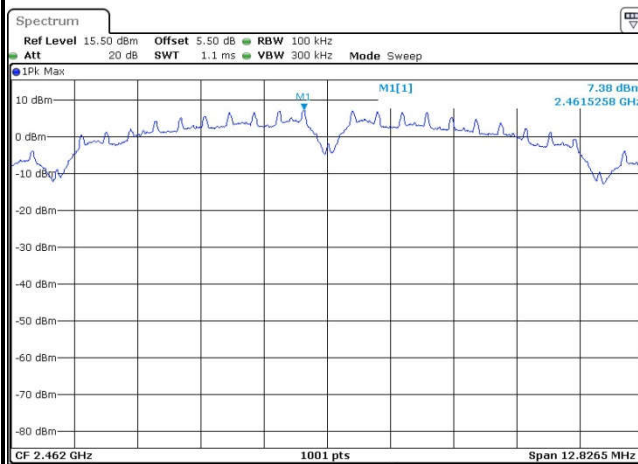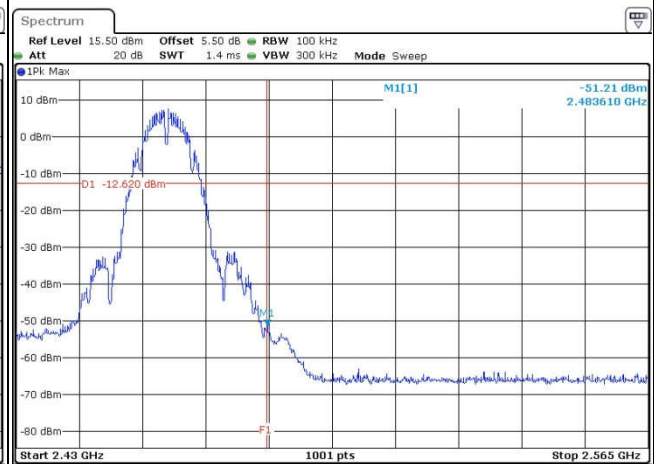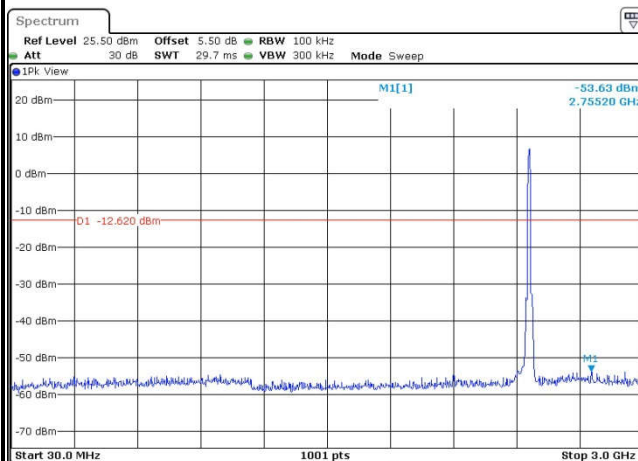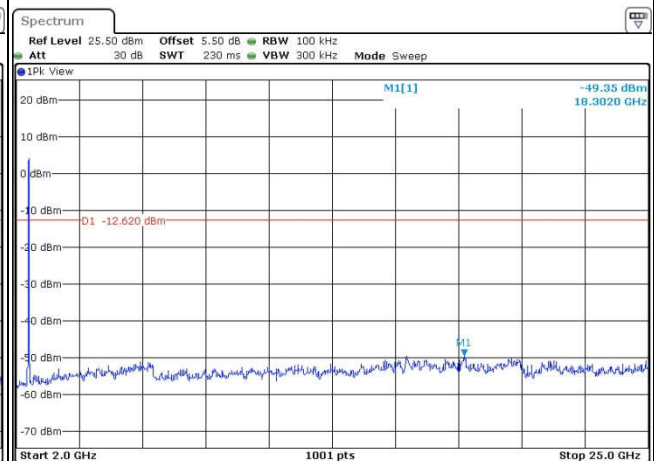**WLAN 802.11b Channel 11****100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**






Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

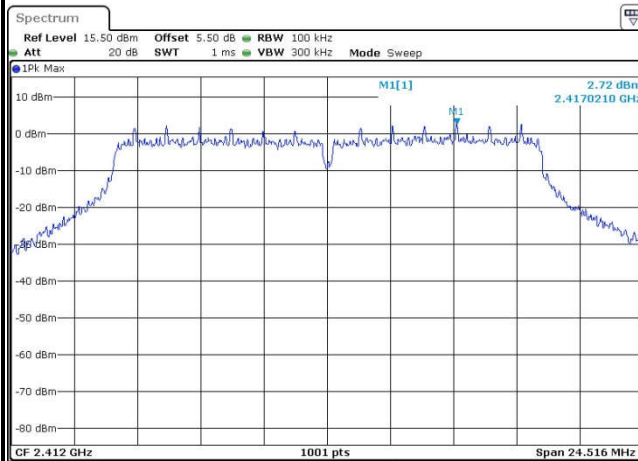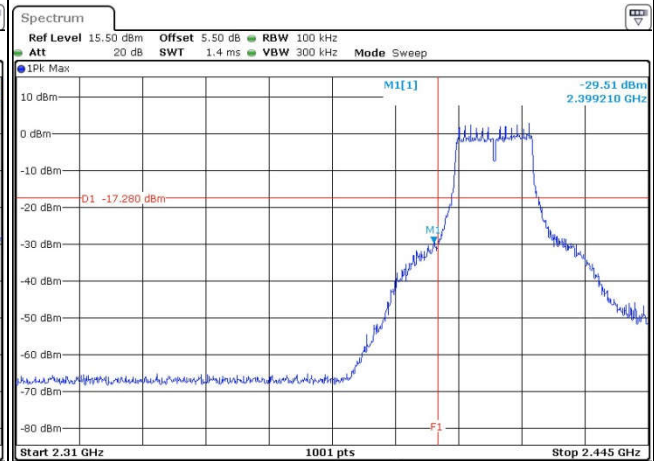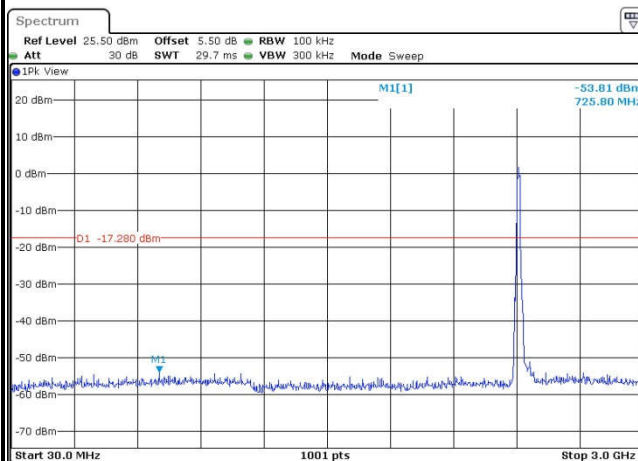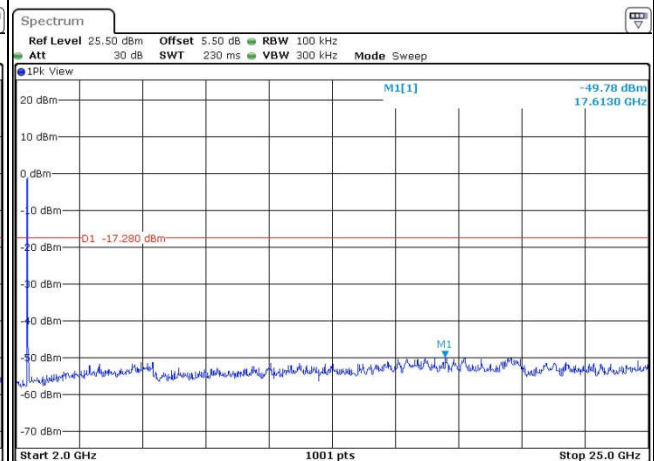**WLAN 802.11g Channel 01****100kHz PSD reference Level****Low Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

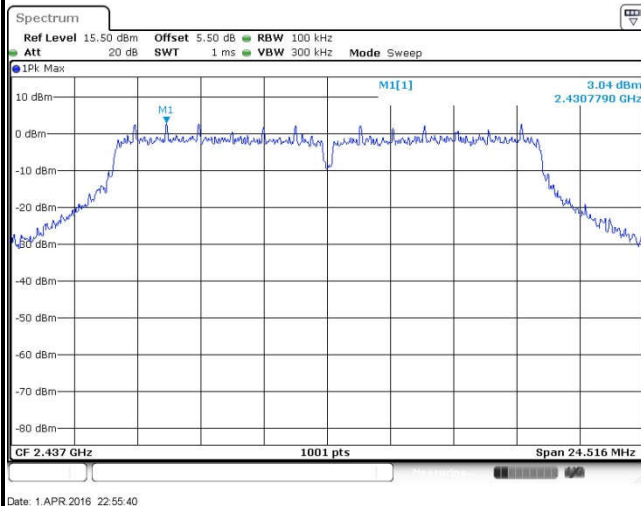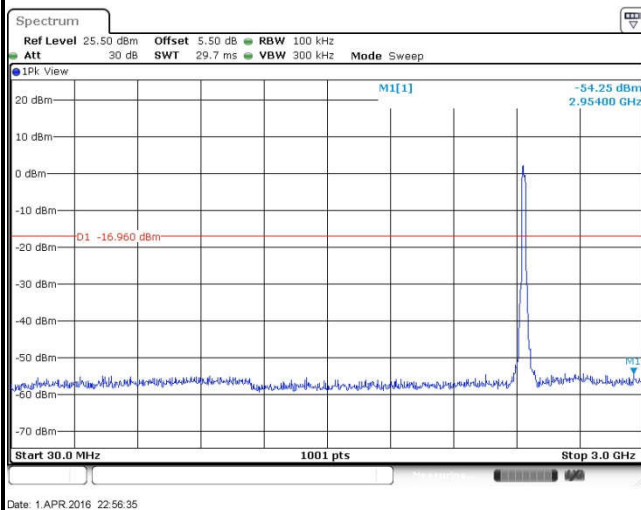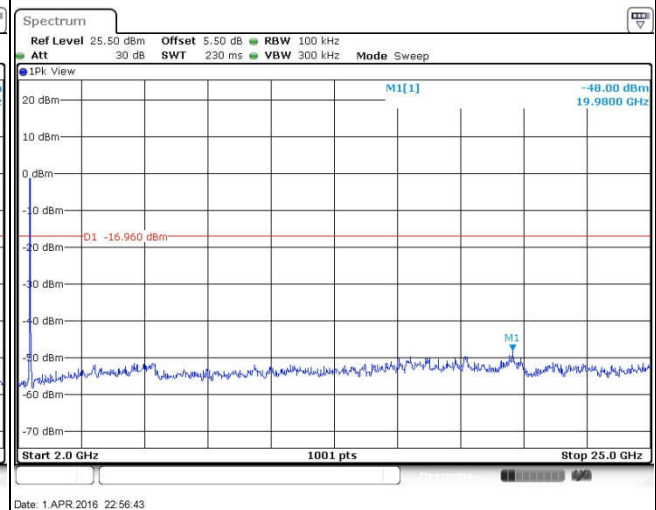
**WLAN 802.11g Channel 06****100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

## WLAN 802.11g Channel 11


## 100kHz PSD reference Level

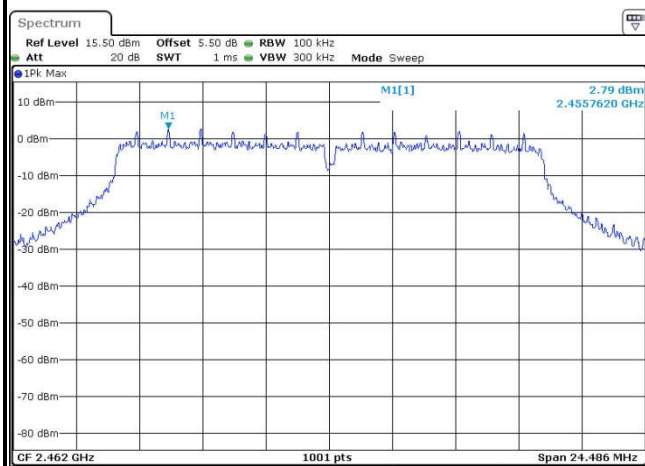


## High Channel Plot

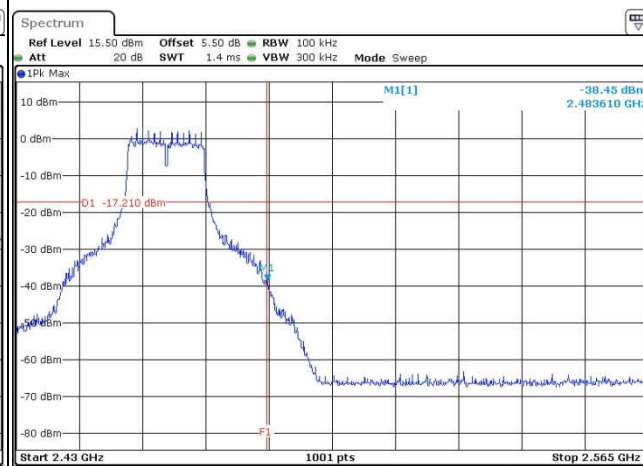

## Spurious Emission 30MHz~3GHz

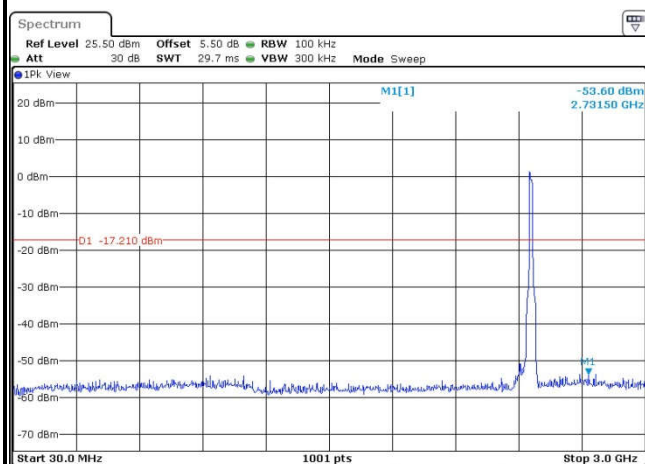

## Spurious Emission 2GHz~25GHz

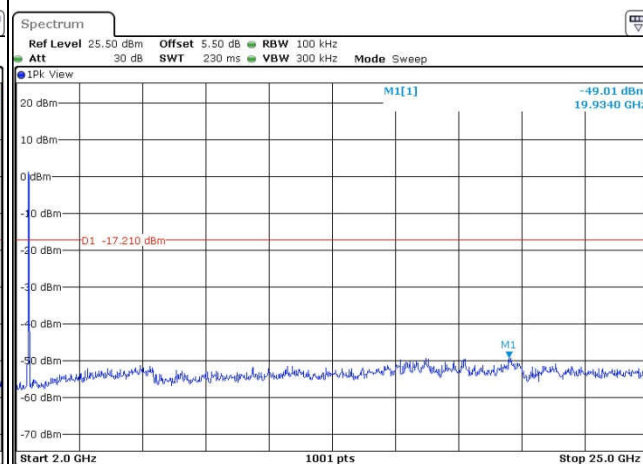





Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

## WLAN 802.11n HT20 Channel 01


## 100kHz PSD reference Level

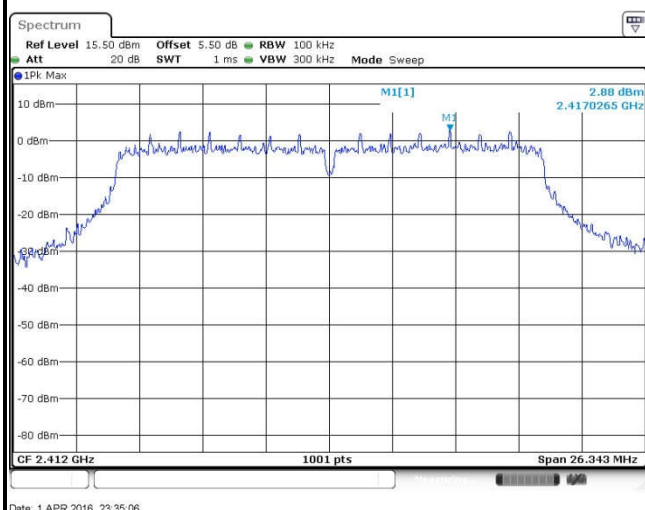


## Low Channel Plot

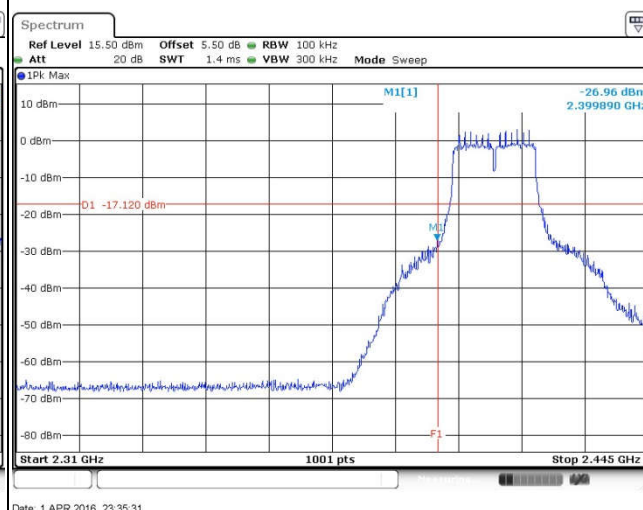

## Spurious Emission 30MHz~3GHz



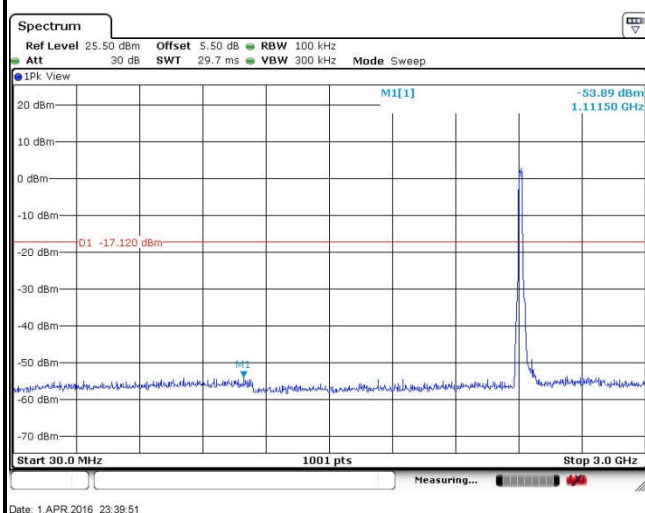


## Spurious Emission 2GHz~25GHz

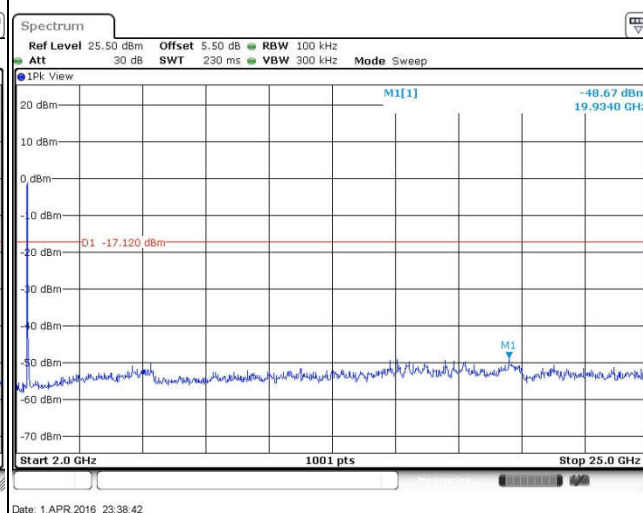




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

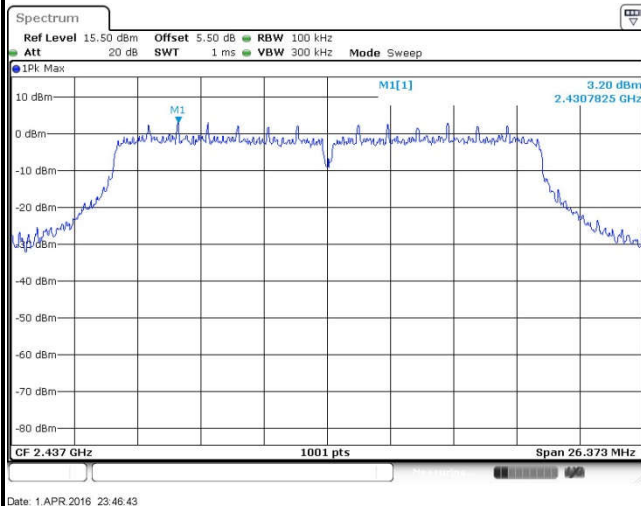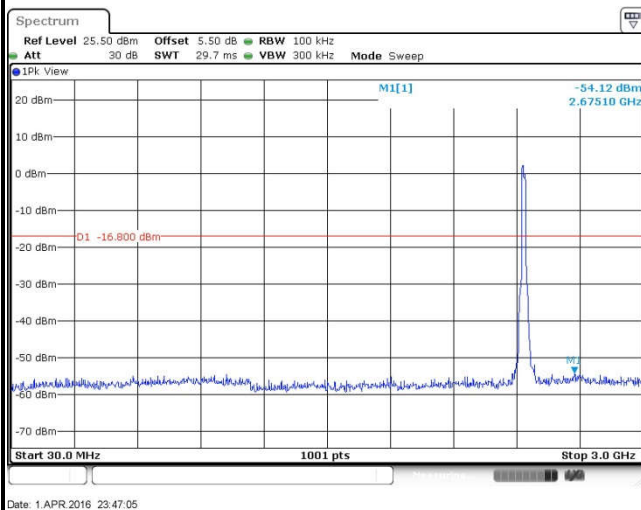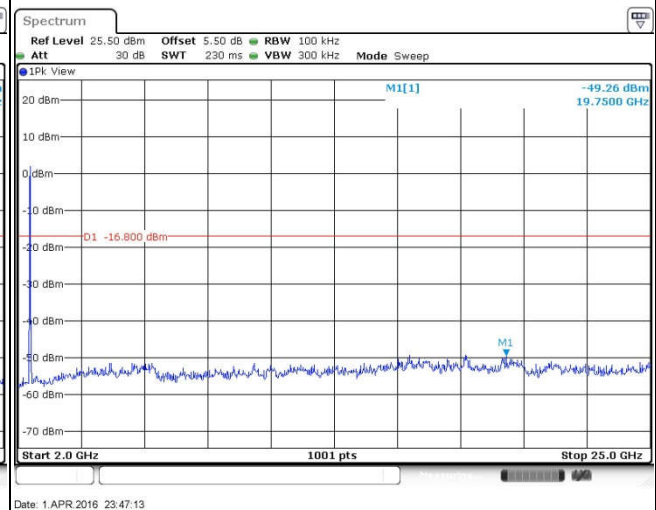**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

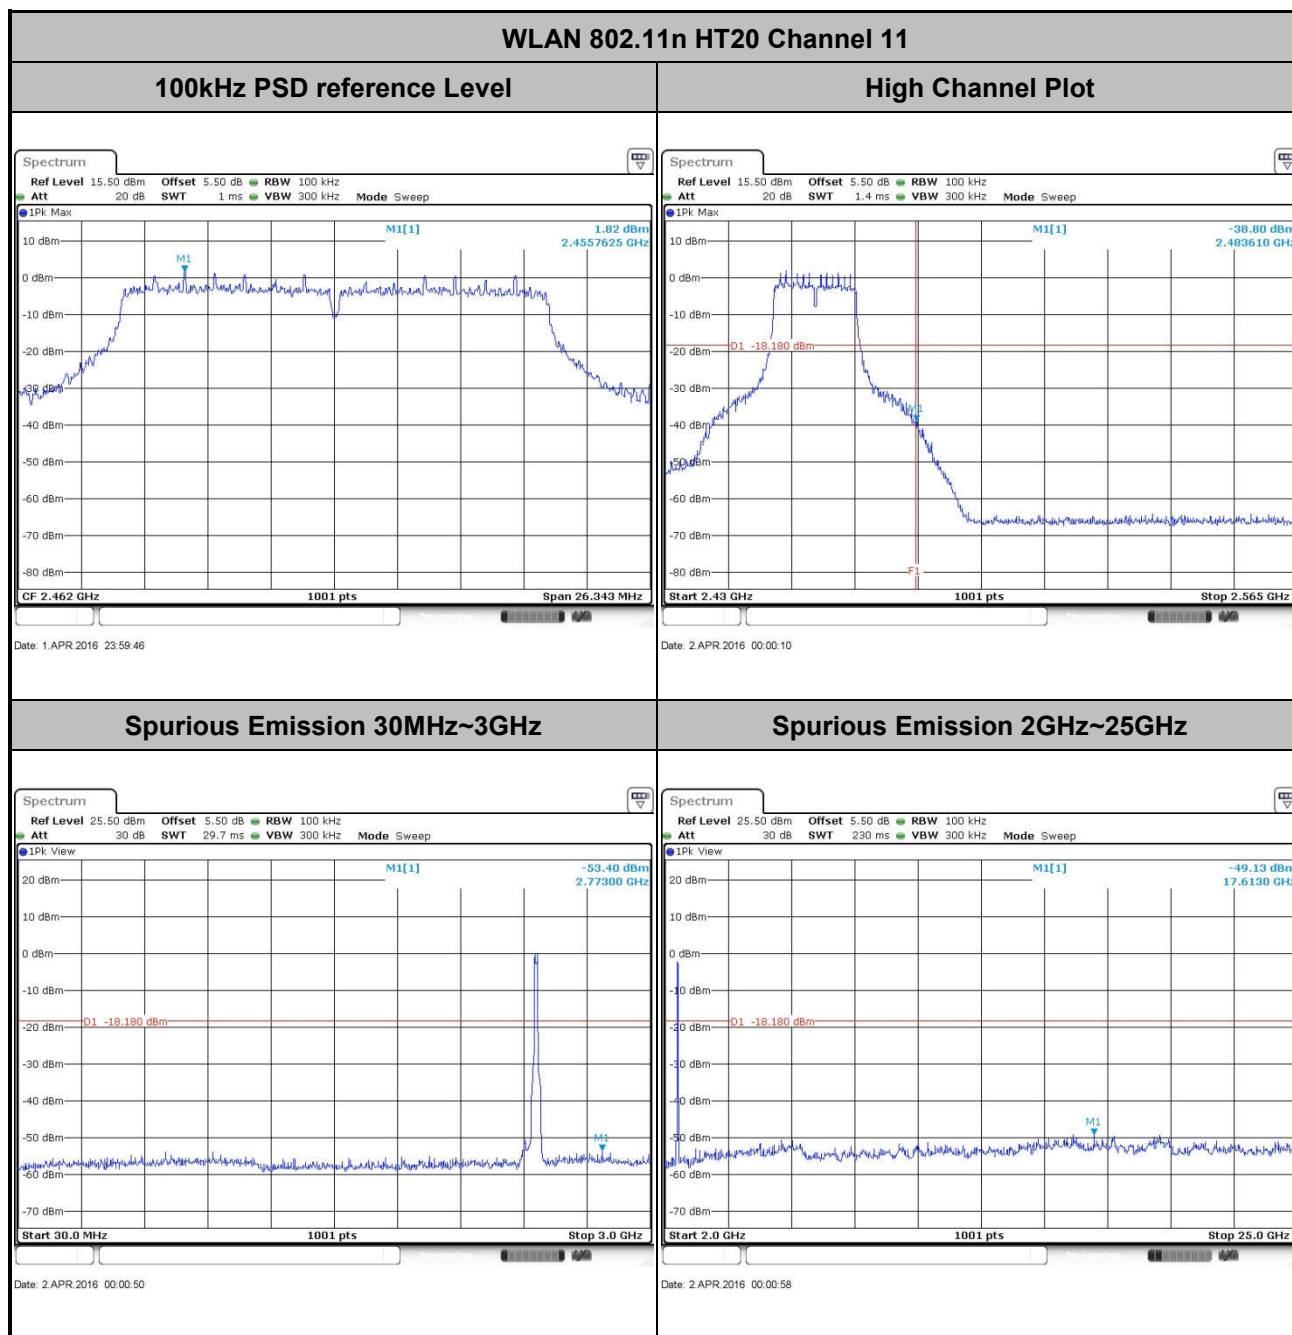



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	03	Test Engineer :	Issac Song

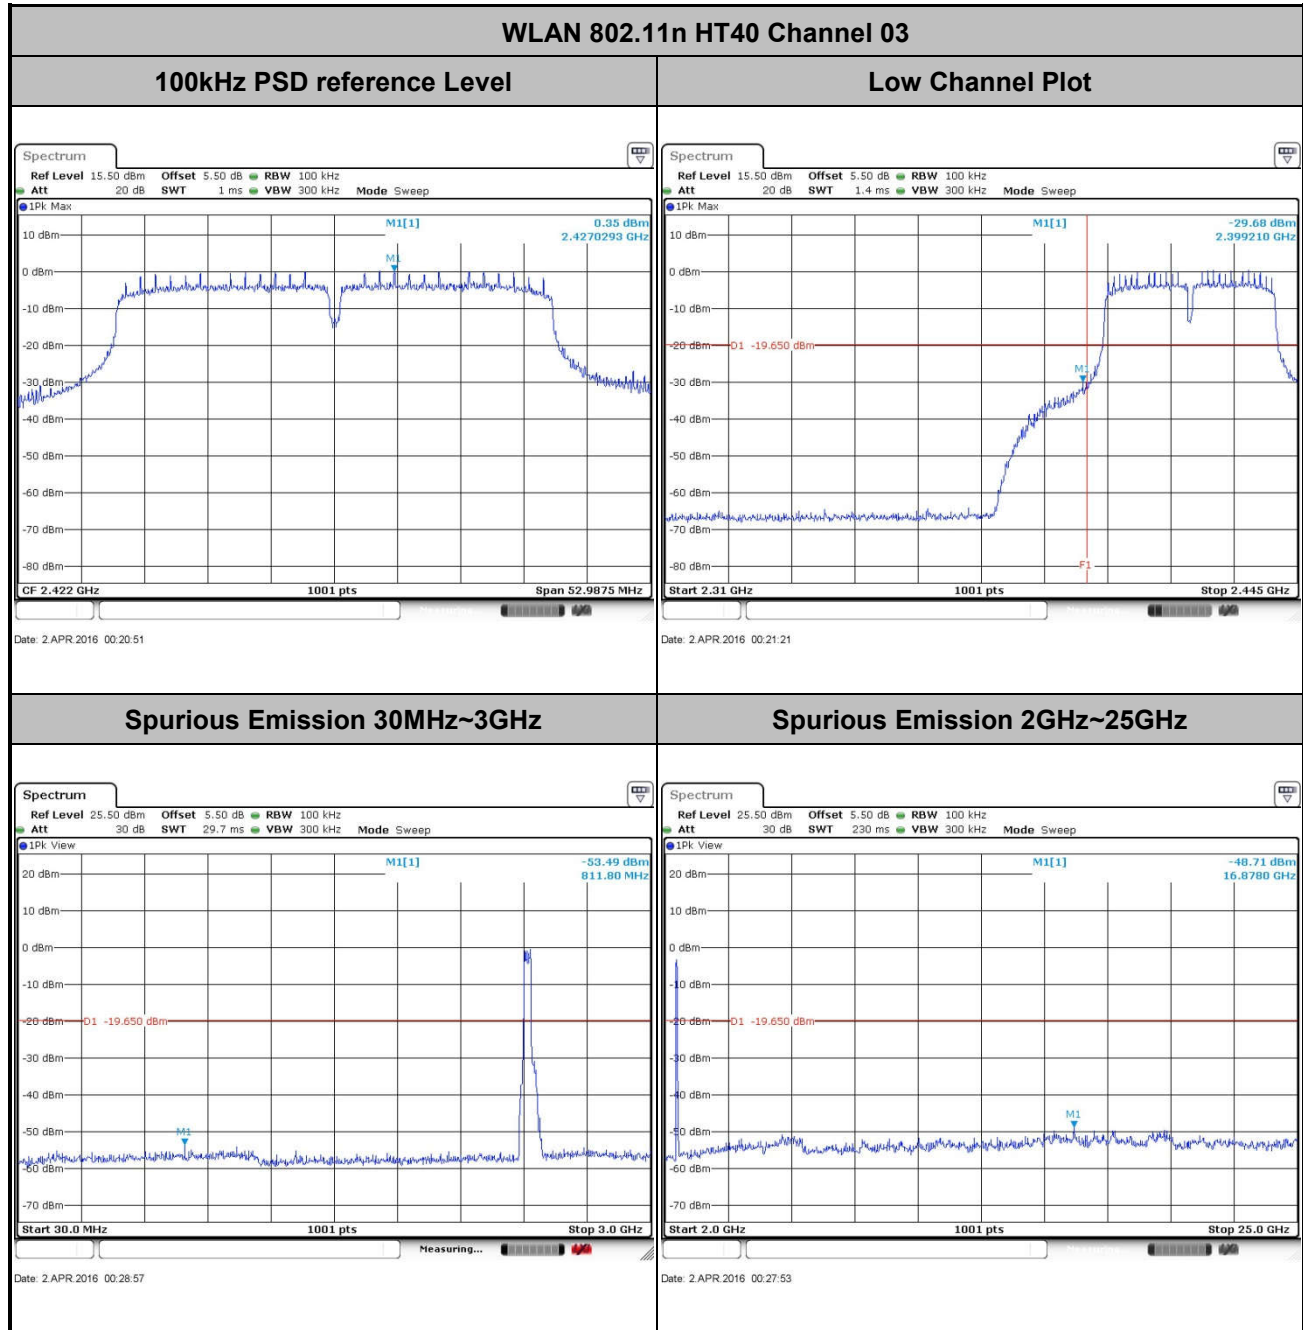





Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

## WLAN 802.11n HT40 Channel 06


## 100kHz PSD reference Level

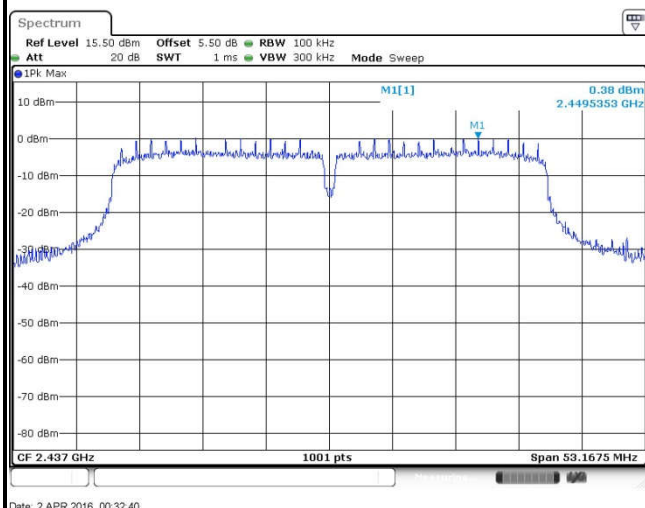

## Spurious Emission 30MHz~3GHz




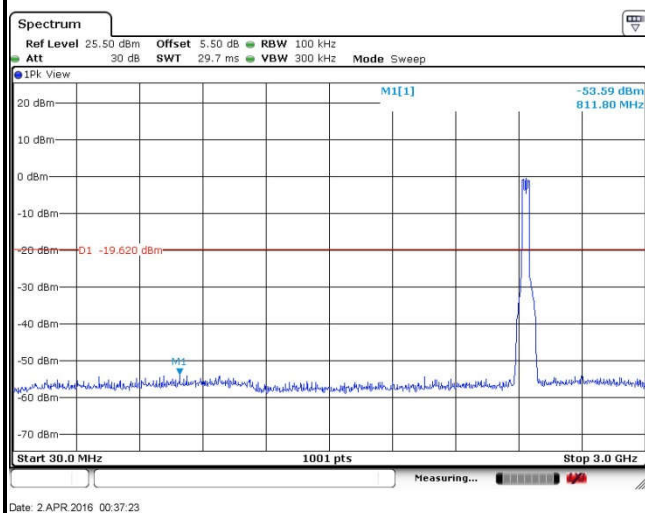


## Spurious Emission 2GHz~25GHz

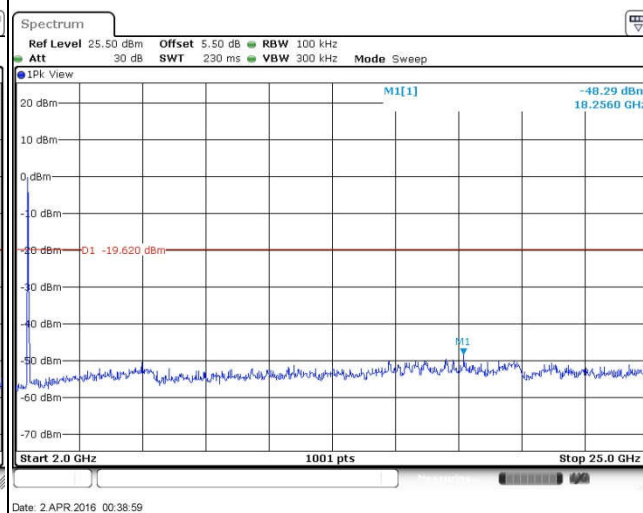



Test Mode :	802.11n HT40	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	09	Test Engineer :	Issac Song

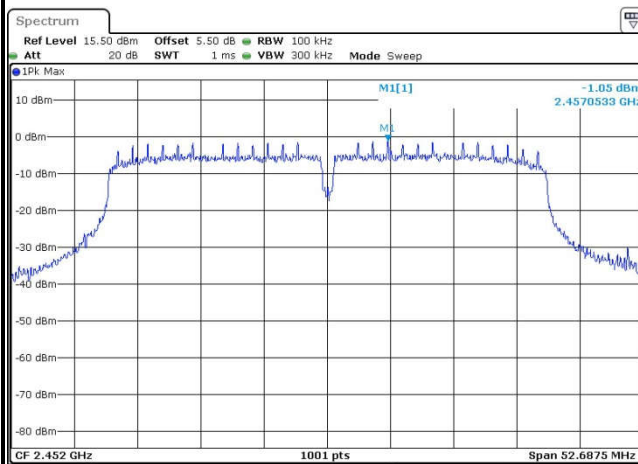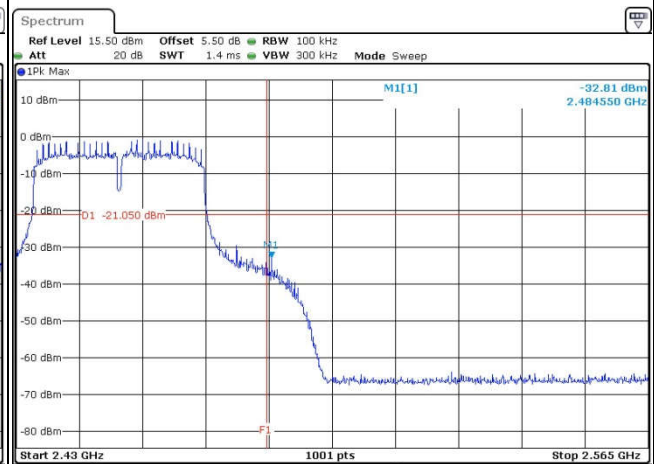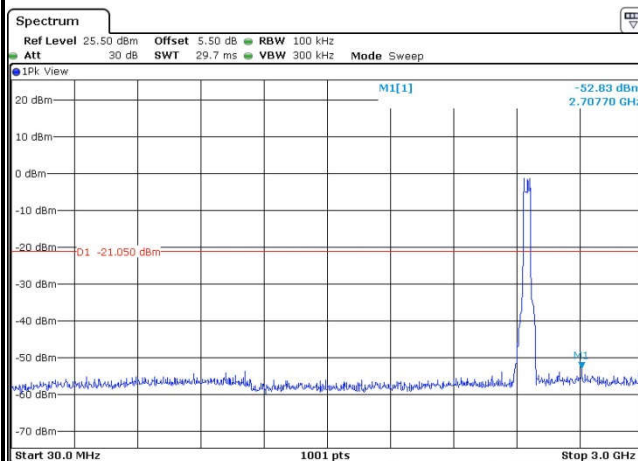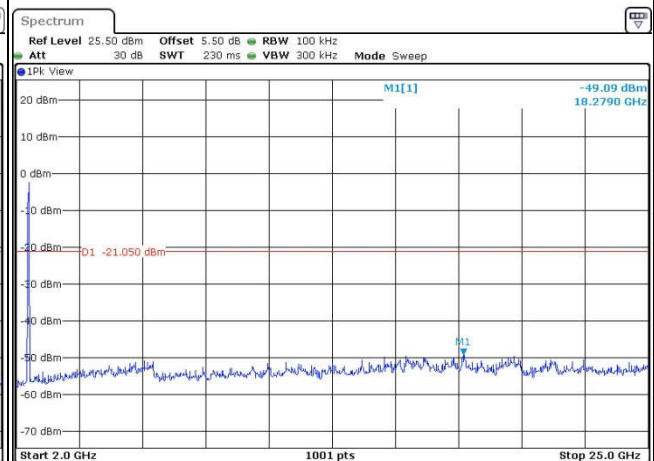**WLAN 802.11n HT40 Channel 09****100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



### **3.5 Radiated Band Edges and Spurious Emission Measurement**

#### **3.5.1 Limit of Radiated band edge and Spurious Emission Measurement**

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

<b>Frequency (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### **3.5.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

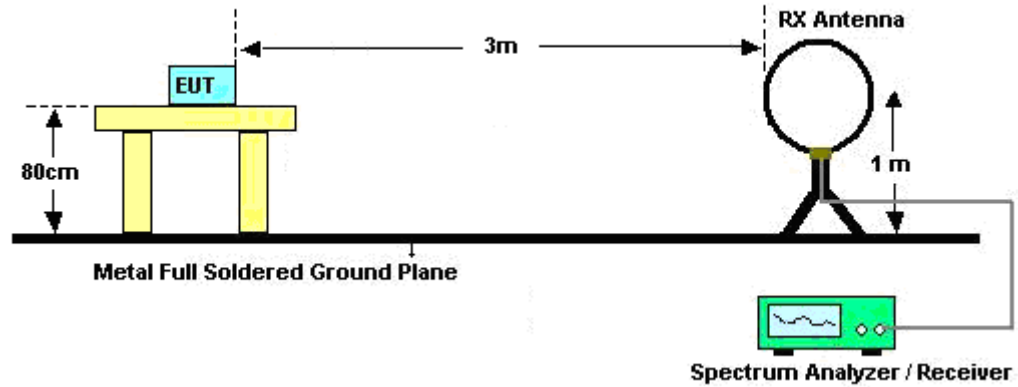

For radiated emissions from 30MHz to 1GHz

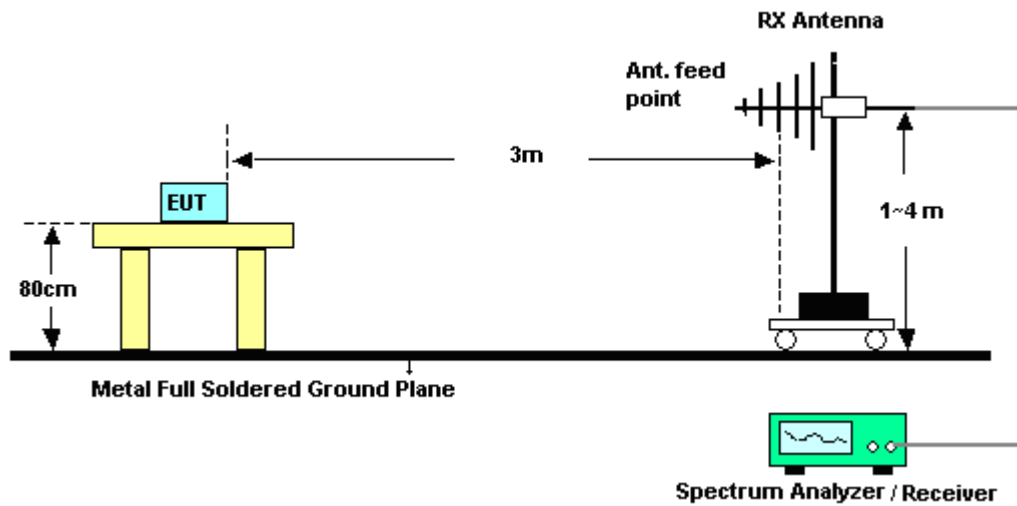

For radiated emissions above 1GHz

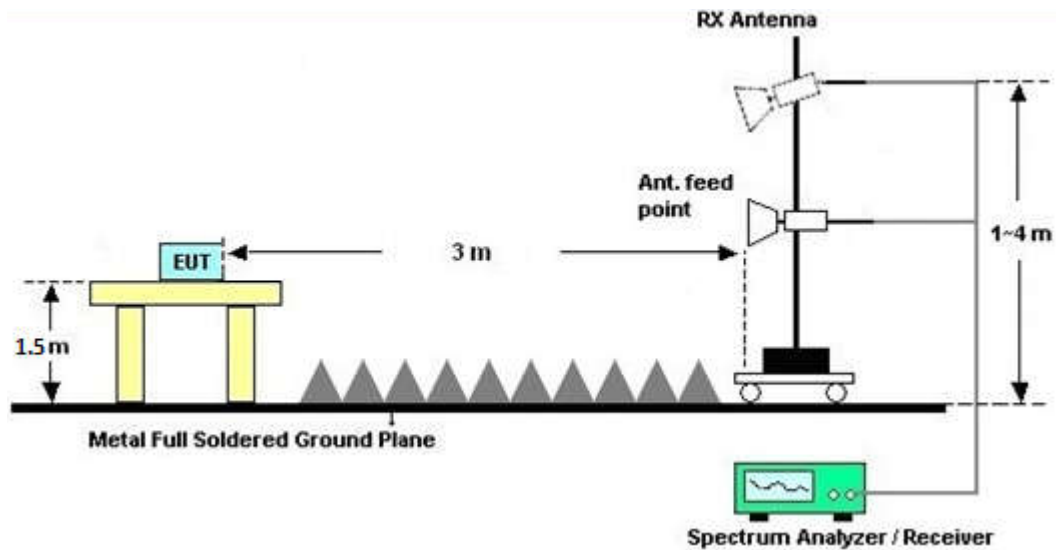

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

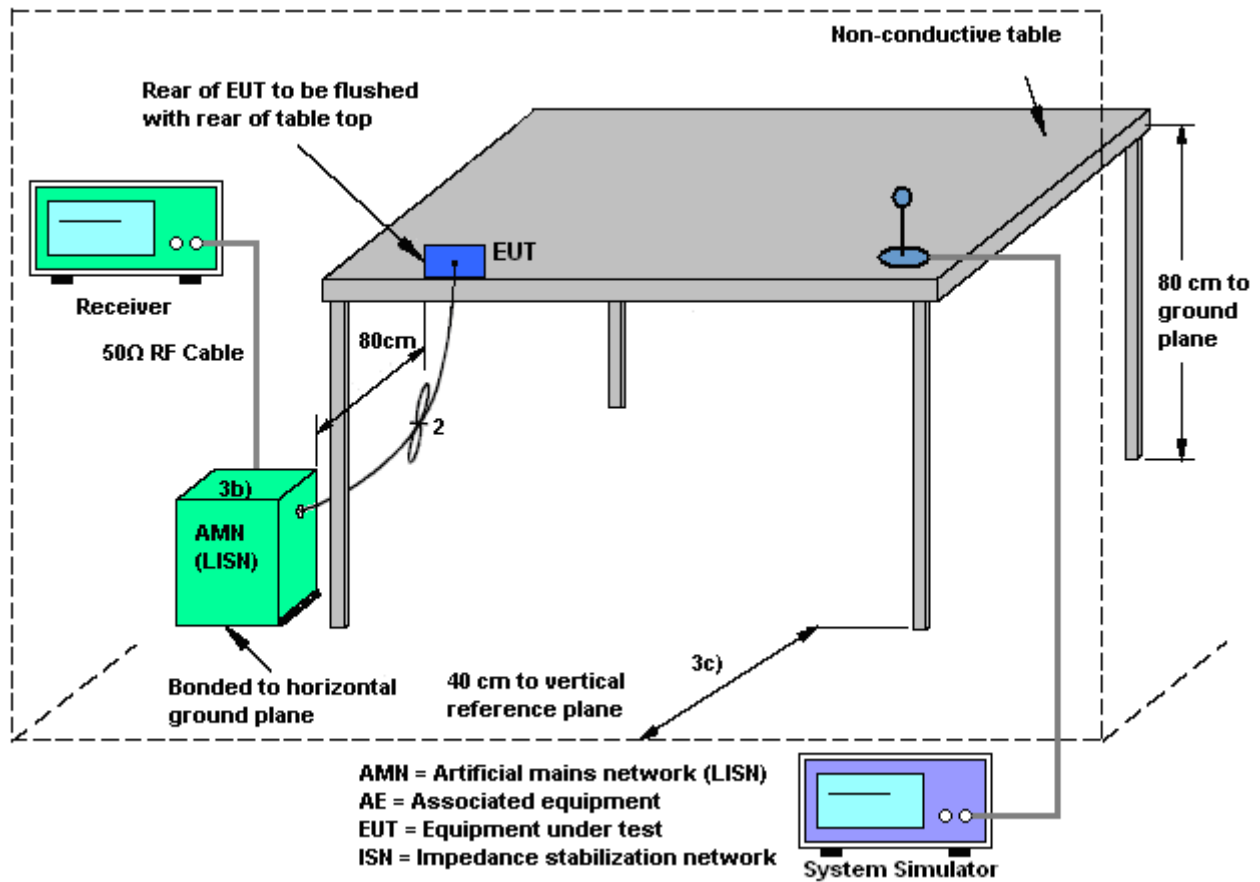



## 3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1 + Battery 1		

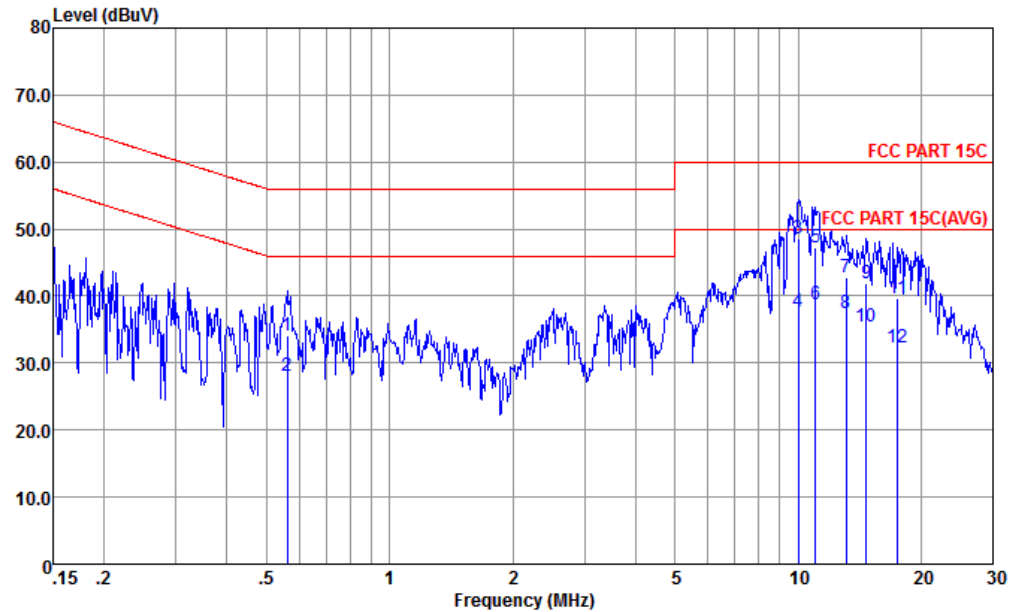


Site : CO01-KS  
Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1  
: 356132070001855

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.56	33.99	-22.01	56.00	23.60	0.23	10.16	QP
2	0.56	27.99	-18.01	46.00	17.60	0.23	10.16	Average
3	10.02	48.62	-11.38	60.00	38.10	0.25	10.27	QP
4	10.02	37.72	-12.28	50.00	27.20	0.25	10.27	Average
5	11.02	47.34	-12.66	60.00	36.80	0.25	10.29	QP
6 *	11.02	38.74	-11.26	50.00	28.20	0.25	10.29	Average
7	13.13	42.80	-17.20	60.00	32.20	0.26	10.34	QP
8	13.13	37.40	-12.60	50.00	26.80	0.26	10.34	Average
9	14.67	41.84	-18.16	60.00	31.20	0.26	10.38	QP
10	14.67	35.54	-14.46	50.00	24.90	0.26	10.38	Average
11	17.57	39.63	-20.37	60.00	28.90	0.27	10.46	QP
12	17.57	32.33	-17.67	50.00	21.60	0.27	10.46	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable 1 (Charging from Adapter 1) + Earphone 1 + Battery 1		

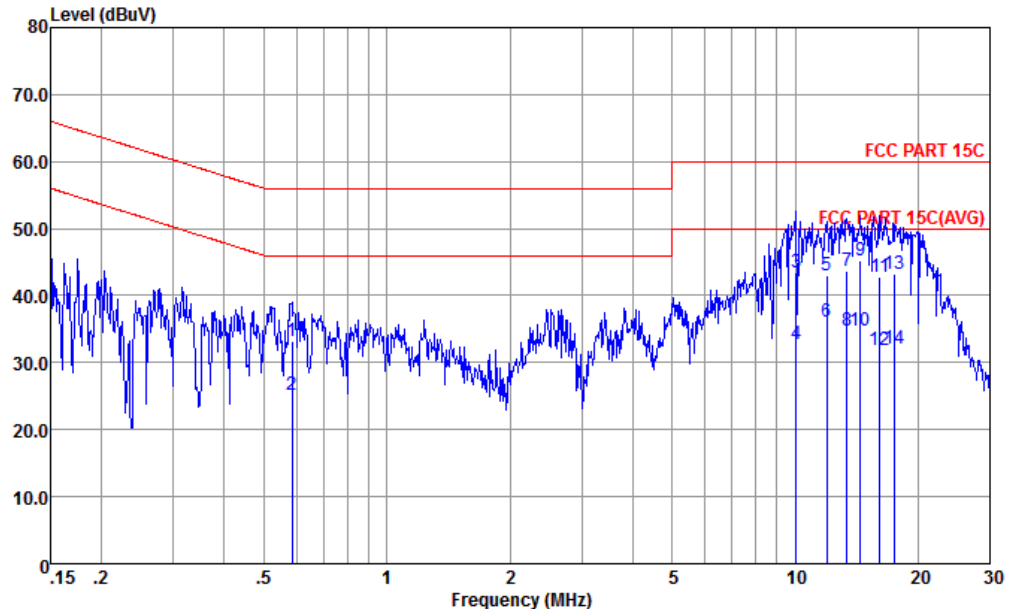

Site : CO01-KS  
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL  
mode : Mode 1  
: 356132070001855

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.59	33.29	-22.71	56.00	22.80	0.33	10.16	QP
2	0.59	25.09	-20.91	46.00	14.60	0.33	10.16	Average
3	10.07	43.45	-16.55	60.00	32.90	0.28	10.27	QP
4	10.07	32.85	-17.15	50.00	22.30	0.28	10.27	Average
5	11.93	43.09	-16.91	60.00	32.50	0.28	10.31	QP
6 *	11.93	36.19	-13.81	50.00	25.60	0.28	10.31	Average
7	13.41	43.72	-16.28	60.00	33.10	0.27	10.35	QP
8	13.41	34.82	-15.18	50.00	24.20	0.27	10.35	Average
9	14.44	45.14	-14.86	60.00	34.50	0.27	10.37	QP
10	14.44	34.74	-15.26	50.00	24.10	0.27	10.37	Average
11	16.14	42.79	-17.21	60.00	32.11	0.26	10.42	QP
12	16.14	31.89	-18.11	50.00	21.21	0.26	10.42	Average
13	17.57	43.22	-16.78	60.00	32.50	0.26	10.46	QP
14	17.57	32.02	-17.98	50.00	21.30	0.26	10.46	Average





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	May 04, 2015	Apr. 01, 2016~ Apr. 02, 2016	May 03, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Apr. 01, 2016~ Apr. 02, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Apr. 01, 2016~ Apr. 02, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Feb. 19, 2016~ Mar. 23, 2016	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Jun. 05, 2015	Mar. 23, 2016	Jun. 04, 2016	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2015	Mar. 23, 2016	Nov. 09, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	25MHz~2GHz	Mar. 12, 2016	Mar. 23, 2016	Mar. 11, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Jun. 25, 2015	Mar. 23, 2016	Jun. 24, 2016	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Oct. 10, 2015	Mar. 23, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz~3000 MHz	Aug. 10, 2015	Mar. 23, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Mar. 23, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 23, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 23, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 23, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2015	Mar. 03, 2016	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Mar. 03, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Mar. 03, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Mar. 03, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5 dB
---	--------



## **Appendix A. Conducted Test Results**

A1 - DTS Part

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	Apr. 01, 2016~Apr. 02, 2016	Relative Humidity:	49~51	%

**TEST RESULTS DATA**  
**6dB Occupied Bandwidth**

2.4GHz Band							
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	8.53	0.50	Pass
11b	1Mbps	1	6	2437	8.55	0.50	Pass
11b	1Mbps	1	11	2462	8.55	0.50	Pass
11g	6Mbps	1	1	2412	16.34	0.50	Pass
11g	6Mbps	1	6	2437	16.34	0.50	Pass
11g	6Mbps	1	11	2462	16.32	0.50	Pass
HT20	MCS0	1	1	2412	17.56	0.50	Pass
HT20	MCS0	1	6	2437	17.58	0.50	Pass
HT20	MCS0	1	11	2462	17.56	0.50	Pass
HT40	MCS0	1	3	2422	35.33	0.50	Pass
HT40	MCS0	1	6	2437	35.45	0.50	Pass
HT40	MCS0	1	9	2452	35.13	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.83	30.00	-2.50	16.33	36.00	Pass
11b	1Mbps	1	6	2437	19.05	30.00	-2.50	16.55	36.00	Pass
11b	1Mbps	1	11	2462	18.62	30.00	-2.50	16.12	36.00	Pass
11g	6Mbps	1	1	2412	22.47	30.00	-2.50	19.97	36.00	Pass
11g	6Mbps	1	6	2437	22.34	30.00	-2.50	19.84	36.00	Pass
11g	6Mbps	1	11	2462	21.86	30.00	-2.50	19.36	36.00	Pass
HT20	MCS0	1	1	2412	22.52	30.00	-2.50	20.02	36.00	Pass
HT20	MCS0	1	6	2437	22.38	30.00	-2.50	19.88	36.00	Pass
HT20	MCS0	1	11	2462	21.25	30.00	-2.50	18.75	36.00	Pass
HT40	MCS0	1	3	2422	22.71	30.00	-2.50	20.21	36.00	Pass
HT40	MCS0	1	6	2437	22.59	30.00	-2.50	20.09	36.00	Pass
HT40	MCS0	1	9	2452	21.67	30.00	-2.50	19.17	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	16.14
11b	1Mbps	1	6	2437	0.10	16.45
11b	1Mbps	1	11	2462	0.10	16.04
11g	6Mbps	1	1	2412	0.60	14.85
11g	6Mbps	1	6	2437	0.60	14.78
11g	6Mbps	1	11	2462	0.60	14.14
HT20	MCS0	1	1	2412	0.62	14.91
HT20	MCS0	1	6	2437	0.62	14.77
HT20	MCS0	1	11	2462	0.62	13.30
HT40	MCS0	1	3	2422	1.19	15.03
HT40	MCS0	1	6	2437	1.19	14.84
HT40	MCS0	1	9	2452	1.19	13.00



**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.11	-2.50	8.00	Pass
11b	1Mbps	1	6	2437	-6.51	-2.50	8.00	Pass
11b	1Mbps	1	11	2462	-6.86	-2.50	8.00	Pass
11g	6Mbps	1	1	2412	-11.82	-2.50	8.00	Pass
11g	6Mbps	1	6	2437	-10.80	-2.50	8.00	Pass
11g	6Mbps	1	11	2462	-11.16	-2.50	8.00	Pass
HT20	MCS0	1	1	2412	-11.42	-2.50	8.00	Pass
HT20	MCS0	1	6	2437	-11.36	-2.50	8.00	Pass
HT20	MCS0	1	11	2462	-12.76	-2.50	8.00	Pass
HT40	MCS0	1	3	2422	-14.37	-2.50	8.00	Pass
HT40	MCS0	1	6	2437	-14.01	-2.50	8.00	Pass
HT40	MCS0	1	9	2452	-14.88	-2.50	8.00	Pass



## Appendix B. Radiated Spurious Emission

### 15C 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.95	53.88	-20.12	74	58.31	27	5.59	37.02	100	62	P	H
		2386.32	47.01	-6.99	54	51.44	27	5.59	37.02	100	62	A	H
	*	2413.193	101.81	-	-	106.07	27.13	5.61	37	100	62	P	H
	*	2413.36	99.35	-	-	103.61	27.13	5.61	37	100	62	A	H
		2386.32	55.18	-18.82	74	59.61	27	5.59	37.02	378	131	P	V
	!	2386.41	48.96	-5.04	54	53.39	27	5.59	37.02	378	131	A	V
	*	2410.855	102.01	-	-	106.27	27.13	5.61	37	378	131	P	V
	*	2410.938	99.55	-	-	103.81	27.13	5.61	37	378	131	A	V
802.11b CH 06 2437MHz	*	2437.074	100.57	-	-	104.5	27.39	5.65	36.97	119	17	P	H
	*	2438.159	97.05	-	-	100.98	27.39	5.65	36.97	119	17	A	H
	*	2436.99	100.41	-	-	104.34	27.39	5.65	36.97	328	126	P	V
	*	2435.989	96.84	-	-	100.94	27.26	5.63	36.99	328	126	A	V
802.11b CH 11 2462MHz	*	2460.872	100.65	-	-	104.43	27.51	5.67	36.96	102	65	P	H
	*	2460.955	98.17	-	-	101.95	27.51	5.67	36.96	102	65	A	H
		2486.92	55.21	-18.79	74	58.82	27.64	5.69	36.94	102	65	P	H
		2487.2	47.46	-6.54	54	51.07	27.64	5.69	36.94	102	65	A	H
	*	2463.126	101.96	-	-	105.74	27.51	5.67	36.96	355	129	P	V
	*	2463.209	99.5	-	-	103.28	27.51	5.67	36.96	355	129	A	V
		2491.88	59.42	-14.58	74	62.87	27.77	5.71	36.93	355	129	P	V
	!	2487.32	49.11	-4.89	54	52.72	27.64	5.69	36.94	355	129	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C 2.4GHz 2400~2483.5MHz

## WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	40.54	-33.46	74	62	31.51	9.13	62.1	100	360	P	H
		4824	43.54	-30.46	74	65	31.51	9.13	62.1	100	0	P	V
802.11b CH 06 2437MHz		4875	39.76	-34.24	74	61	31.59	9.2	62.03	100	360	P	H
		7311	40.5	-33.5	74	54.33	34.03	11.3	59.16	100	0	P	H
		4875	41.62	-32.38	74	62.86	31.59	9.2	62.03	100	0	P	V
		7311	41.53	-32.47	74	55.36	34.03	11.3	59.16	100	360	P	V
802.11b CH 11 2462MHz		4923	40.05	-33.95	74	61.08	31.67	9.27	61.97	100	360	P	H
		7386	46.16	-27.84	74	59.7	34.29	11.29	59.12	100	0	P	H
		4923	41.87	-32.13	74	62.9	31.67	9.27	61.97	100	0	P	V
		7386	50.46	-23.54	74	64	34.29	11.29	59.12	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
<b>802.11g CH 01 2412MHz</b>		2389.56	59.1	-14.9	74	63.53	27	5.59	37.02	374	237	P	H
		2390	45.99	-8.01	54	50.42	27	5.59	37.02	374	237	A	H
	*	2415.698	98.77	-	-	103.03	27.13	5.61	37	374	237	P	H
	*	2416.199	91.08	-	-	95.34	27.13	5.61	37	374	237	A	H
		2390	56.92	-17.08	74	61.35	27	5.59	37.02	334	140	P	V
		2390	44.58	-9.42	54	49.01	27	5.59	37.02	334	140	A	V
	*	2414.446	98.58	-	-	102.84	27.13	5.61	37	334	140	P	V
	*	2416.616	90.08	-	-	94.34	27.13	5.61	37	334	140	A	V
<b>802.11g CH 06 2437MHz</b>	*	2430.227	97.03	-	-	101.13	27.26	5.63	36.99	381	246	P	H
	*	2429.893	88.51	-	-	92.61	27.26	5.63	36.99	381	246	A	H
	*	2431.813	95.4	-	-	99.5	27.26	5.63	36.99	372	122	P	V
	*	2430.144	87.06	-	-	91.16	27.26	5.63	36.99	372	122	A	V
<b>802.11g CH 11 2462MHz</b>	*	2463.543	99.34	-	-	103.12	27.51	5.67	36.96	348	240	P	H
	*	2466.299	91.38	-	-	95.16	27.51	5.67	36.96	348	240	A	H
	!	2483.52	69.62	-4.38	74	73.23	27.64	5.69	36.94	348	240	P	H
	!	2483.52	51.76	-2.24	54	55.37	27.64	5.69	36.94	348	240	A	H
	*	2467.635	97.83	-	-	101.61	27.51	5.67	36.96	400	146	P	V
	*	2466.132	89.5	-	-	93.28	27.51	5.67	36.96	400	146	A	V
		2483.56	67.66	-6.34	74	71.27	27.64	5.69	36.94	400	146	P	V
	!	2483.52	51.38	-2.62	54	54.99	27.64	5.69	36.94	400	146	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	38.66	-35.34	74	60.12	31.51	9.13	62.1	100	360	P	H
		4824	38.82	-35.18	74	60.28	31.51	9.13	62.1	100	0	P	V
802.11g CH 06 2437MHz		4875	37.04	-36.96	74	58.28	31.59	9.2	62.03	100	360	P	H
		7311	39.88	-34.12	74	53.71	34.03	11.3	59.16	100	0	P	H
		4875	38.38	-35.62	74	59.62	31.59	9.2	62.03	100	0	P	V
		7311	40.69	-33.31	74	54.52	34.03	11.3	59.16	100	360	P	V
802.11g CH 11 2462MHz		4923	37.6	-36.4	74	58.63	31.67	9.27	61.97	100	360	P	H
		7386	40.74	-33.26	74	54.28	34.29	11.29	59.12	100	0	P	H
		4923	36.6	-37.4	74	57.63	31.67	9.27	61.97	100	0	P	V
		7386	41.34	-32.66	74	54.88	34.29	11.29	59.12	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C 2.4GHz 2400~2483.5MHz

## WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2390	56.64	-17.36	74	61.07	27	5.59	37.02	331	69	P	H
		2390	43.58	-10.42	54	48.01	27	5.59	37.02	331	69	A	H
	*	2416.449	97.44	-	-	101.7	27.13	5.61	37	331	69	P	H
	*	2418.036	89.44	-	-	93.7	27.13	5.61	37	331	69	A	H
		2388.39	56.23	-17.77	74	60.66	27	5.59	37.02	321	122	P	V
		2390	43.54	-10.46	54	47.97	27	5.59	37.02	321	122	A	V
	*	2415.281	97.11	-	-	101.37	27.13	5.61	37	321	122	P	V
	*	2416.282	88.99	-	-	93.25	27.13	5.61	37	321	122	A	V
802.11n HT20 CH 06 2437MHz	*	2443.754	97.06	-	-	100.25	27.39	6.39	36.97	100	9	P	H
	*	2444.84	89.18	-	-	92.37	27.39	6.39	36.97	100	9	A	H
	*	2441.917	100.02	-	-	103.21	27.39	6.39	36.97	317	116	P	V
	*	2444.589	91.3	-	-	94.49	27.39	6.39	36.97	317	116	A	V
802.11n HT20 CH 11 2462MHz	*	2465.297	97.05	-	-	100.83	27.51	5.67	36.96	162	69	P	H
	*	2466.299	88.7	-	-	92.48	27.51	5.67	36.96	162	69	A	H
		2483.96	60.87	-13.13	74	64.48	27.64	5.69	36.94	162	69	P	H
		2483.6	46.13	-7.87	54	49.74	27.64	5.69	36.94	162	69	A	H
	*	2457.865	99.46	-	-	103.24	27.51	5.67	36.96	316	115	P	V
	*	2457.615	90.69	-	-	94.47	27.51	5.67	36.96	316	115	A	V
		2484.16	64.02	-9.98	74	67.63	27.64	5.69	36.94	316	115	P	V
		2483.6	47.24	-6.76	54	50.85	27.64	5.69	36.94	316	115	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C 2.4GHz 2400~2483.5MHz

## WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	38.32	-35.68	74	59.78	31.51	9.13	62.1	100	360	P	H
		4824	38.7	-35.3	74	60.16	31.51	9.13	62.1	100	0	P	V
802.11n HT20 CH 06 2437MHz		4875	38.15	-35.85	74	59.39	31.59	9.2	62.03	100	360	P	H
		7311	40.22	-33.78	74	54.05	34.03	11.3	59.16	100	0	P	H
		4875	38.39	-35.61	74	59.63	31.59	9.2	62.03	100	0	P	V
		7311	40.21	-33.79	74	54.04	34.03	11.3	59.16	100	360	P	V
802.11n HT20 CH 11 2462MHz		4923	36.62	-37.38	74	57.65	31.67	9.27	61.97	100	360	P	H
		7386	41.22	-32.78	74	54.76	34.29	11.29	59.12	100	0	P	H
		4923	36.77	-37.23	74	57.8	31.67	9.27	61.97	100	0	P	V
		7386	41.54	-32.46	74	55.08	34.29	11.29	59.12	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C 2.4GHz 2400~2483.5MHz

## WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2390	60.5	-13.5	74	64.93	27	5.59	37.02	300	217	P	H
	!	2389.83	48.49	-5.51	54	52.92	27	5.59	37.02	300	217	A	H
	*	2418.37	96.3	-	-	100.56	27.13	5.61	37	300	217	P	H
	*	2412.775	87.99	-	-	92.25	27.13	5.61	37	300	217	A	H
		2488.68	53	-21	74	56.45	27.77	5.71	36.93	300	217	P	H
		2484.96	42.38	-11.62	54	45.99	27.64	5.69	36.94	300	217	A	H
		2388.93	60.64	-13.36	74	65.07	27	5.59	37.02	300	129	P	V
		2389.74	47.53	-6.47	54	51.96	27	5.59	37.02	300	129	A	V
	*	2433.734	93.55	-	-	97.65	27.26	5.63	36.99	300	129	P	V
	*	2434.903	85.17	-	-	89.27	27.26	5.63	36.99	300	129	A	V
		2484.32	52.39	-21.61	74	56	27.64	5.69	36.94	300	129	P	V
		2484.28	42.26	-11.74	54	45.87	27.64	5.69	36.94	300	129	A	V
802.11n HT40 CH 06 2437MHz		2390	54.21	-19.79	74	58.64	27	5.59	37.02	325	219	P	H
		2389.65	42.22	-11.78	54	46.65	27	5.59	37.02	325	219	A	H
	*	2447.177	96.68	-	-	100.61	27.39	5.65	36.97	325	219	P	H
	*	2449.933	88.77	-	-	92.7	27.39	5.65	36.97	325	219	A	H
		2484.2	60.35	-13.65	74	63.96	27.64	5.69	36.94	325	219	P	H
		2484.44	46.17	-7.83	54	49.78	27.64	5.69	36.94	325	219	A	H
		2389.83	53.08	-20.92	74	57.51	27	5.59	37.02	300	134	P	V
		2389.38	41.47	-12.53	54	45.9	27	5.59	37.02	300	134	A	V
	*	2450.768	93.68	-	-	97.61	27.39	5.65	36.97	300	134	P	V
	*	2450.685	85.46	-	-	89.39	27.39	5.65	36.97	300	134	A	V
		2484.24	56.07	-17.93	74	59.68	27.64	5.69	36.94	300	134	P	V
		2483.68	44.06	-9.94	54	47.67	27.64	5.69	36.94	300	134	A	V





<b>802.11n HT40 CH 09 2452MHz</b>		2375.52	51.21	-22.79	74	55.71	26.95	5.57	37.02	300	218	P	H
		2382.18	41.27	-12.73	54	45.77	26.95	5.57	37.02	300	218	A	H
	*	2462.375	97.23	-	-	101.01	27.51	5.67	36.96	300	218	P	H
	*	2462.959	88.4	-	-	92.18	27.51	5.67	36.96	300	218	A	H
		2484.56	62.08	-11.92	74	65.69	27.64	5.69	36.94	300	218	P	H
	!	2483.64	50.36	-3.64	54	53.97	27.64	5.69	36.94	300	218	A	H
		2390.01	52.16	-21.84	74	56.59	27	5.59	37.02	326	130	P	V
		2374.17	41.27	-12.73	54	45.77	26.95	5.57	37.02	326	130	A	V
	*	2461.707	95.29	-	-	99.07	27.51	5.67	36.96	326	130	P	V
	*	2462.625	87.2	-	-	90.98	27.51	5.67	36.96	326	130	A	V
		2484.48	61.02	-12.98	74	64.63	27.64	5.69	36.94	326	130	P	V
	!	2484.44	48.37	-5.63	54	51.98	27.64	5.69	36.94	326	130	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C 2.4GHz 2400~2483.5MHz

## WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4845	37.07	-36.93	74	58.47	31.53	9.15	62.08	100	360	P	H
		7266	41.52	-32.48	74	55.45	33.93	11.31	59.17	100	0	P	H
		4845	37.6	-36.4	74	59	31.53	9.15	62.08	100	0	P	V
		7266	40.69	-33.31	74	54.62	33.93	11.31	59.17	100	360	P	V
802.11n HT40 CH 06 2437MHz		4875	36.76	-37.24	74	58	31.59	9.2	62.03	100	360	P	H
		7311	41.4	-32.6	74	55.23	34.03	11.3	59.16	100	0	P	H
		4875	38.07	-35.93	74	59.31	31.59	9.2	62.03	100	0	P	V
		7311	39.8	-34.2	74	53.63	34.03	11.3	59.16	100	360	P	V
802.11n HT40 CH 09 2452MHz		4905	36.45	-37.55	74	57.55	31.64	9.25	61.99	100	360	P	H
		7356	39.03	-34.97	74	52.68	34.19	11.29	59.13	100	0	P	H
		4905	37.12	-36.88	74	58.22	31.64	9.25	61.99	100	0	P	V
		7356	38.89	-35.11	74	52.54	34.19	11.29	59.13	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 15C Emission below 1GHz

## 2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz 802.11g LF		30.97	15.92	-24.08	40	27.86	18.46	0.66	31.06	-	-	P	H
		184.23	13.18	-30.32	43.5	30.26	11.67	1.65	30.4	-	-	P	H
		256.01	17.22	-28.78	46	32.55	13.4	1.77	30.5	-	-	P	H
		283.17	16.84	-29.16	46	31.01	14.33	2	30.5	-	-	P	H
		663.41	22.16	-23.84	46	29.5	19.74	3.25	30.33	-	-	P	H
		888.45	24.11	-21.89	46	28.16	22.68	3.82	30.55	177	209	P	H
		45.52	26.76	-13.24	40	44.51	12.22	0.83	30.8	-	-	P	V
		54.25	27.56	-12.44	40	49.43	7.94	0.89	30.7	184	312	P	V
		192.96	15.34	-28.16	43.5	32.92	11.13	1.69	30.4	-	-	P	V
		245.34	20.96	-25.04	46	36.76	12.96	1.73	30.49	-	-	P	V
		837.04	29.66	-16.34	46	34.26	22.15	3.68	30.43	-	-	P	V
		903	30.02	-15.98	46	33.9	22.85	3.86	30.59	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



## Battery 2:

**15C 2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
<b>802.11g CH 11 2462MHz</b>	*	2457.865	98.89	-	-	102.67	27.51	5.67	36.96	100	216	P	H
	*	2455.361	90.57	-	-	94.35	27.51	5.67	36.96	100	216	A	H
		2483.72	59.02	-14.98	74	62.63	27.64	5.69	36.94	100	216	P	H
		2483.56	44.11	-9.89	54	47.72	27.64	5.69	36.94	100	216	A	H
	*	2457.782	97.11	-	-	100.89	27.51	5.67	36.96	400	120	P	V
	*	2456.446	88.81	-	-	92.59	27.51	5.67	36.96	400	120	A	V
		2483.6	61.05	-12.95	74	64.66	27.64	5.69	36.94	400	120	P	V
		2483.72	45.04	-8.96	54	48.65	27.64	5.69	36.94	400	120	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**15C 2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
<b>802.11g CH 11 2462MHz</b>		4923	37.88	-36.12	74	58.91	31.67	9.27	61.97	200	0	P	H
		7386	41.39	-32.61	74	54.93	34.29	11.29	59.12	100	360	P	H
		4923	36.86	-37.14	74	57.89	31.67	9.27	61.97	100	0	P	V
		7386	44.2	-29.8	74	57.74	34.29	11.29	59.12	200	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**

## Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.23	0.12	300Hz
802.11g	87.18	1.36	0.74	1kHz
2.4GHz 802.11n HT20	86.63	1.28	0.78	1kHz
2.4GHz 802.11n HT20	76.08	0.64	1.56	3kHz

802.11b

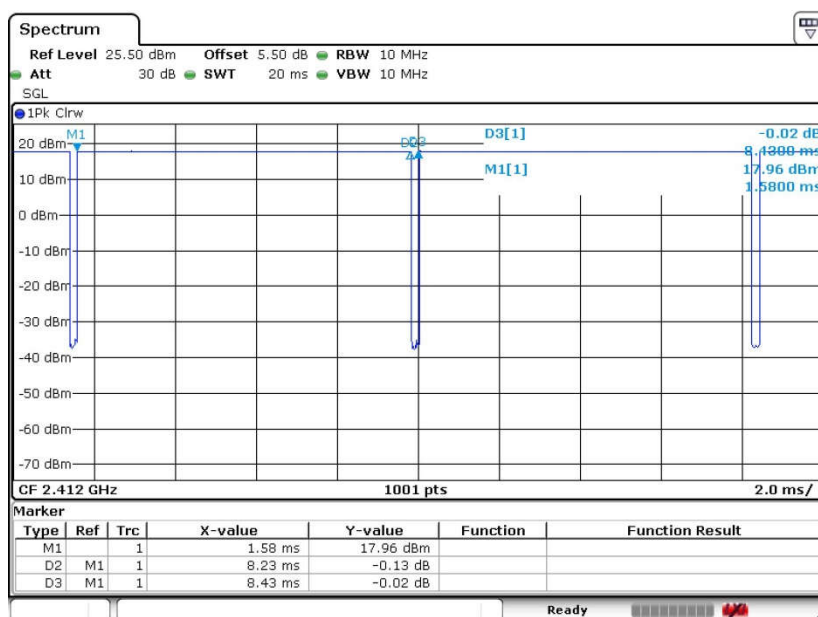




802.11g

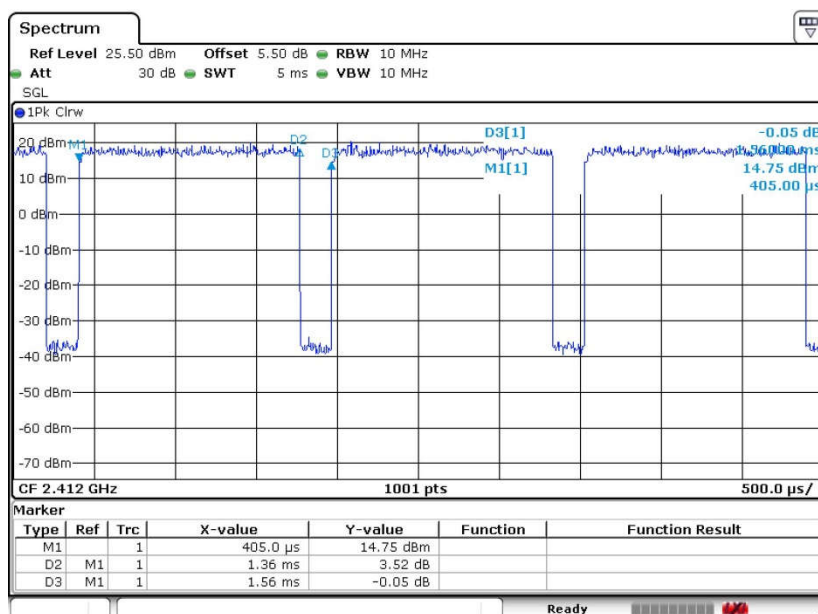

2.4GHz 802.11n HT20

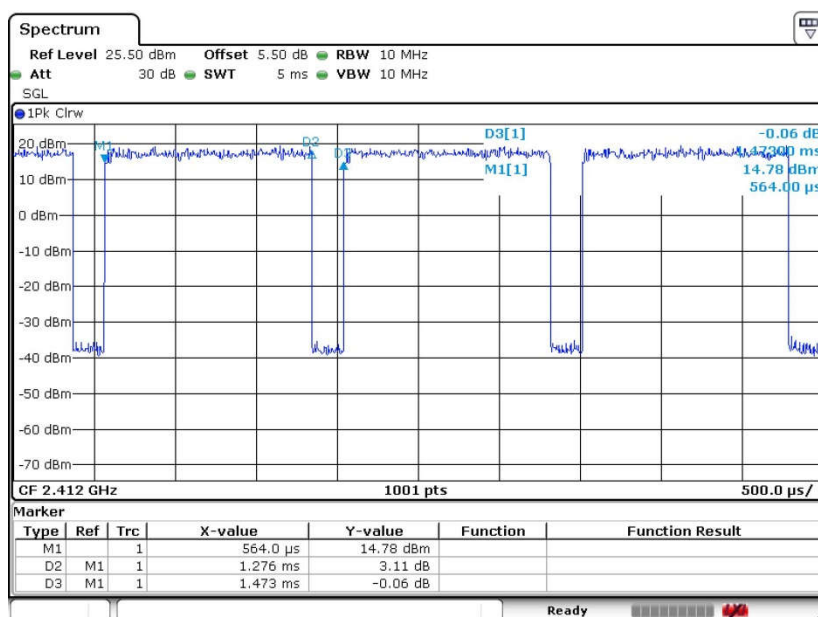





2.4GHz 802.11n HT40

