

Fig.A.6.1.41 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)

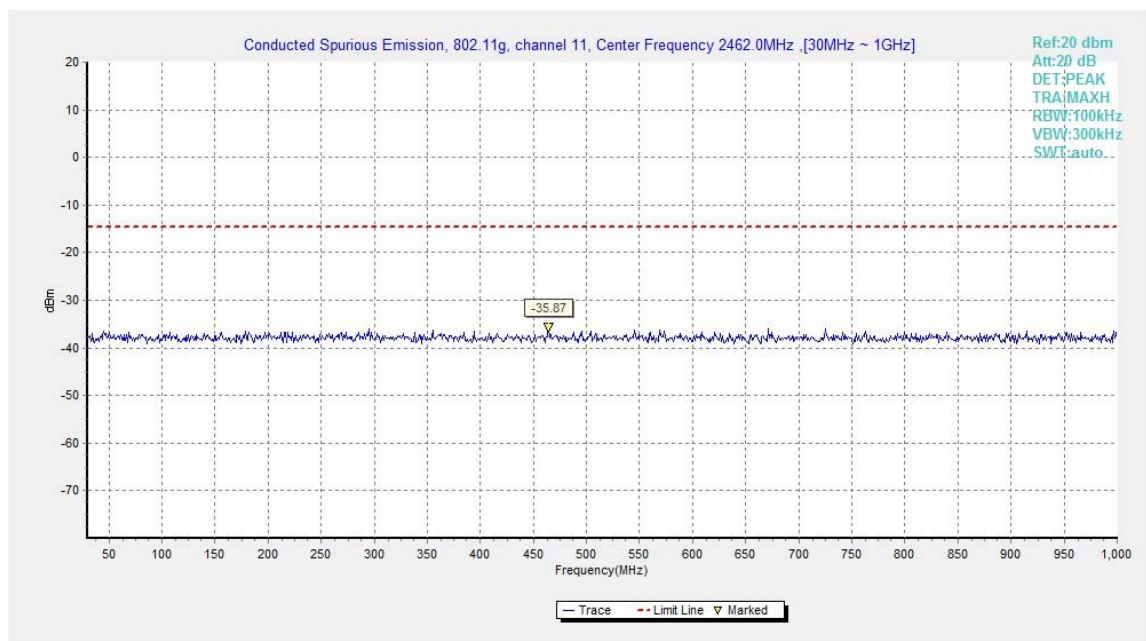


Fig.A.6.1.42 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)

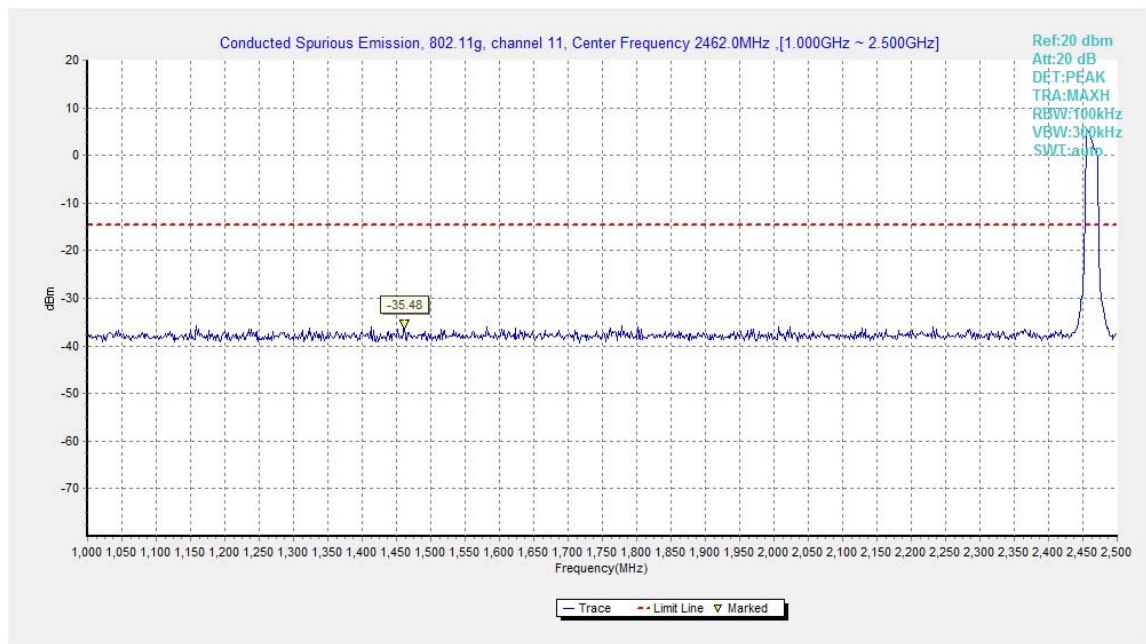


Fig.A.6.1.43 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-2.5 GHz)

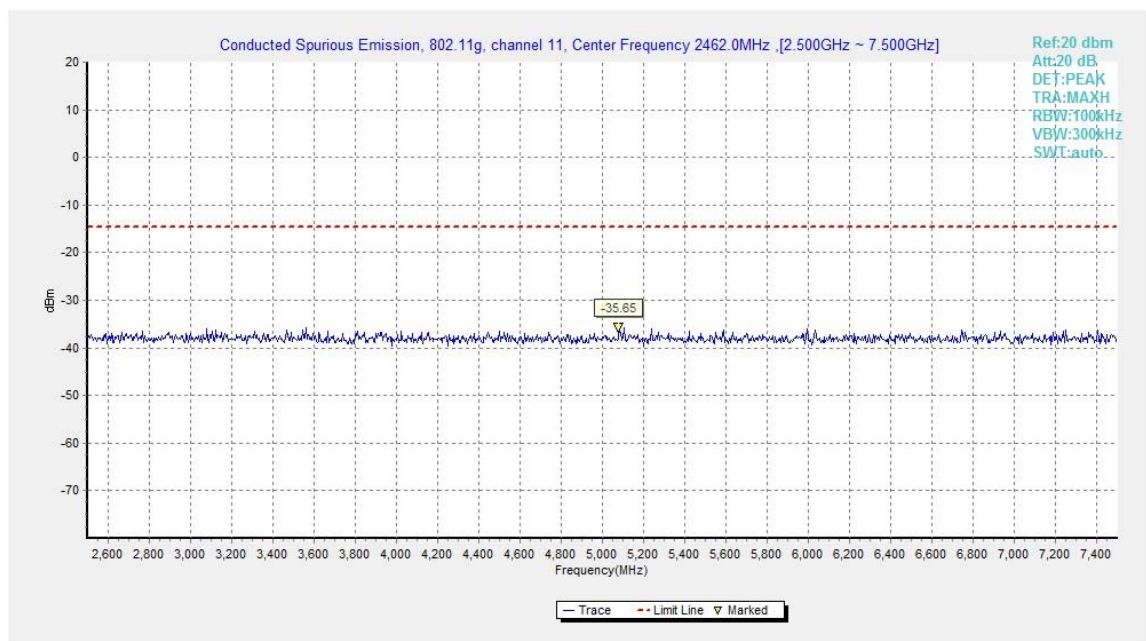


Fig.A.6.1.44 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 2.5 GHz-7.5 GHz)

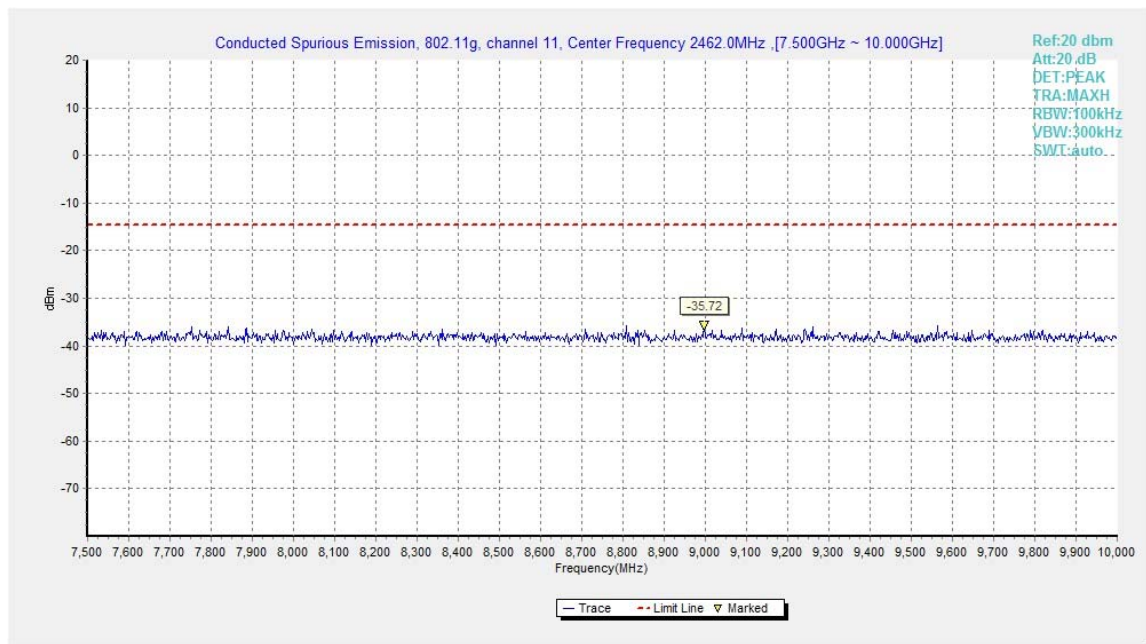


Fig.A.6.1.45 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 7.5 GHz-10 GHz)

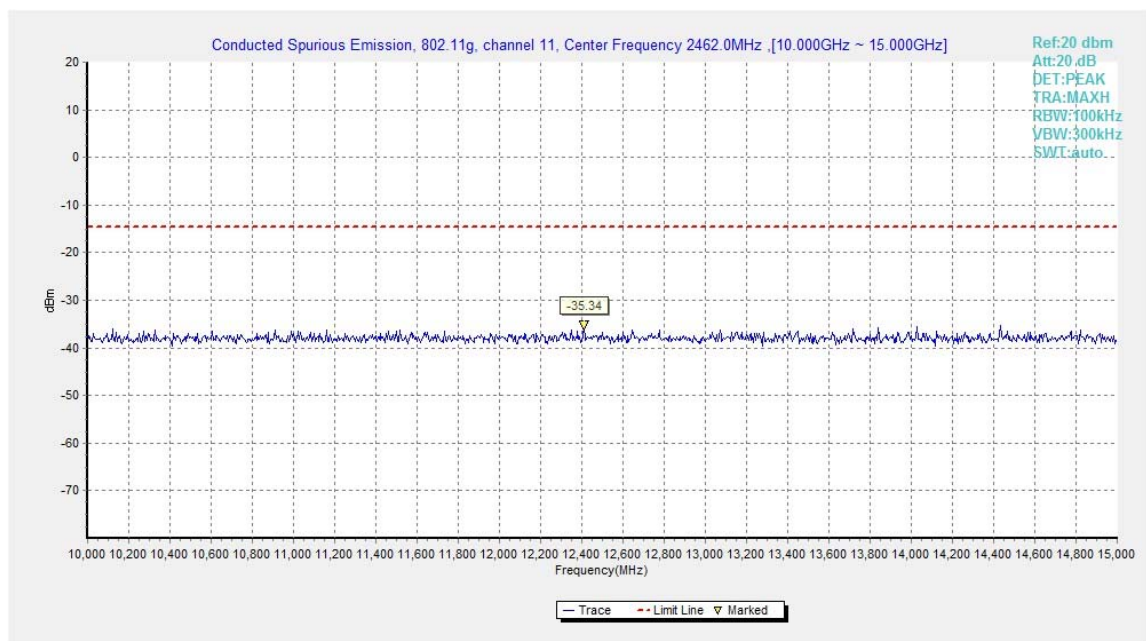


Fig.A.6.1.46 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 10 GHz-15 GHz)

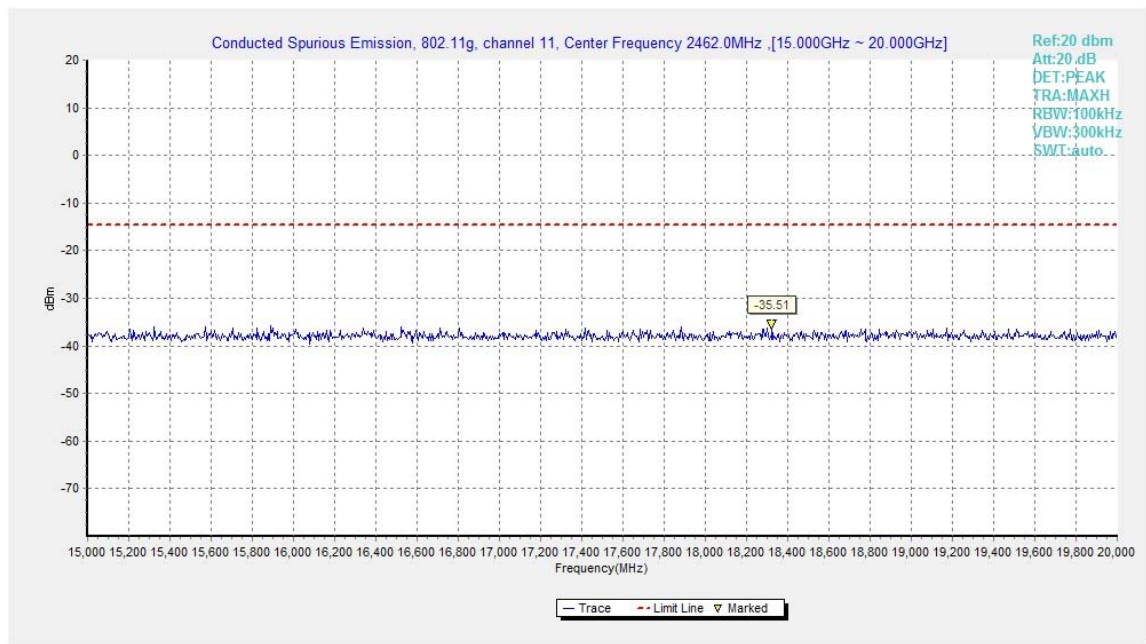


Fig.A.6.1.47 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 15 GHz-20 GHz)

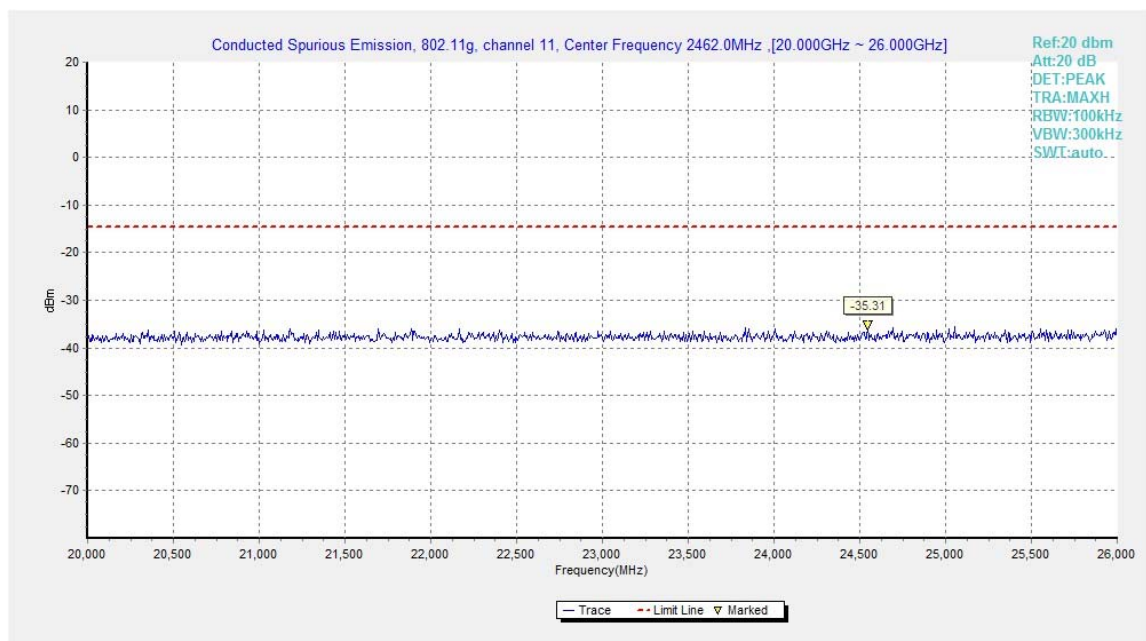


Fig.A.6.1.48 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 20 GHz-26 GHz)

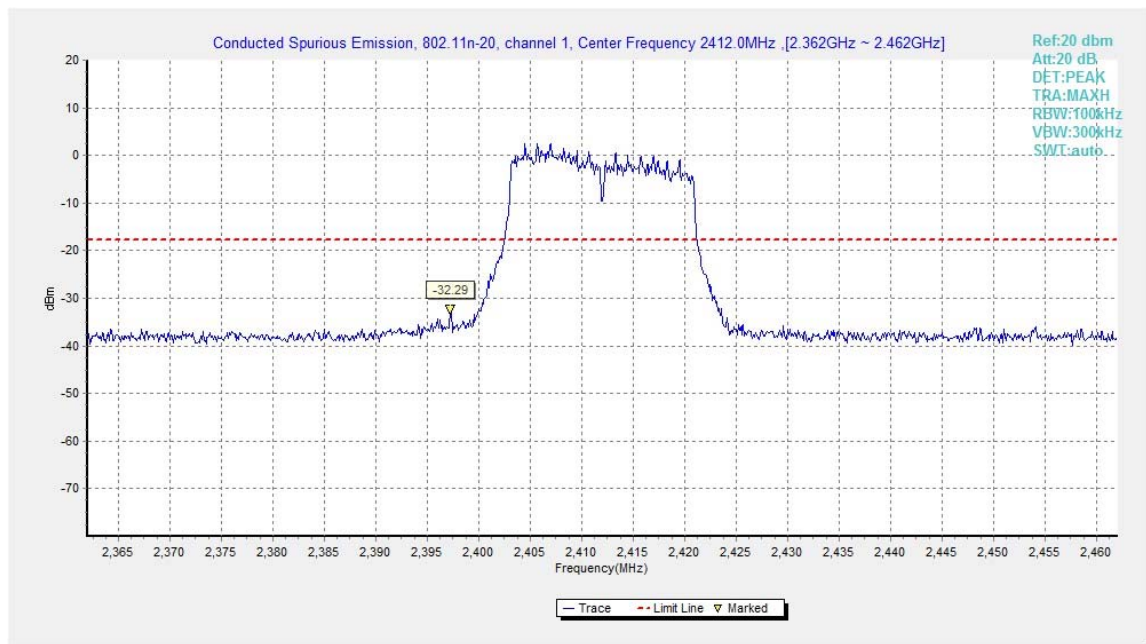


Fig.A.6.1.49 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)

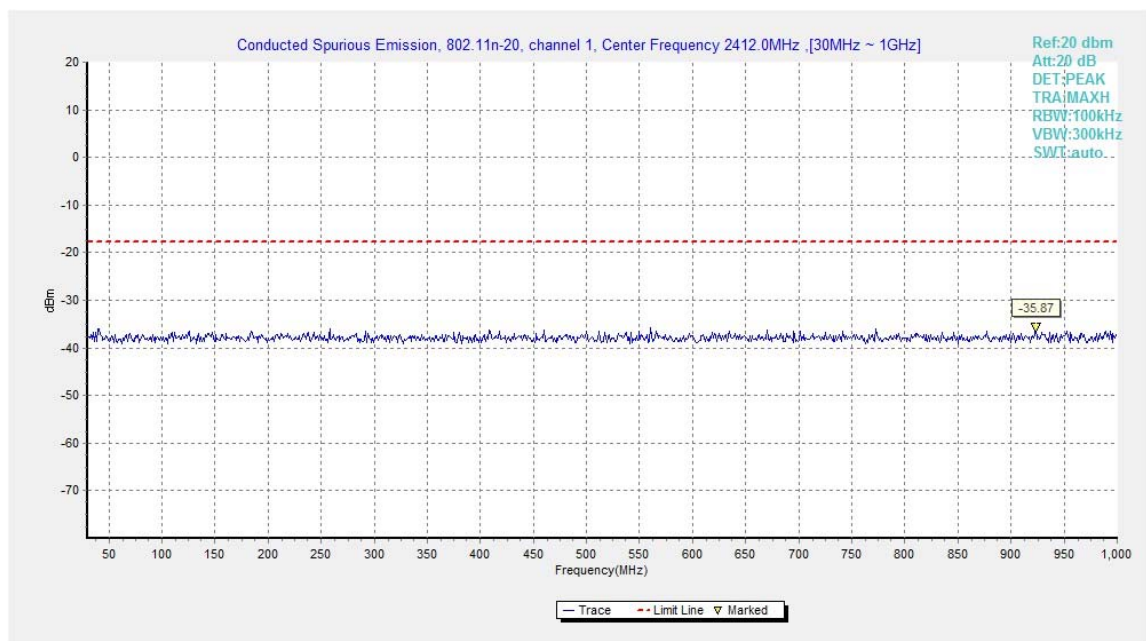


Fig.A.6.1.50 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)

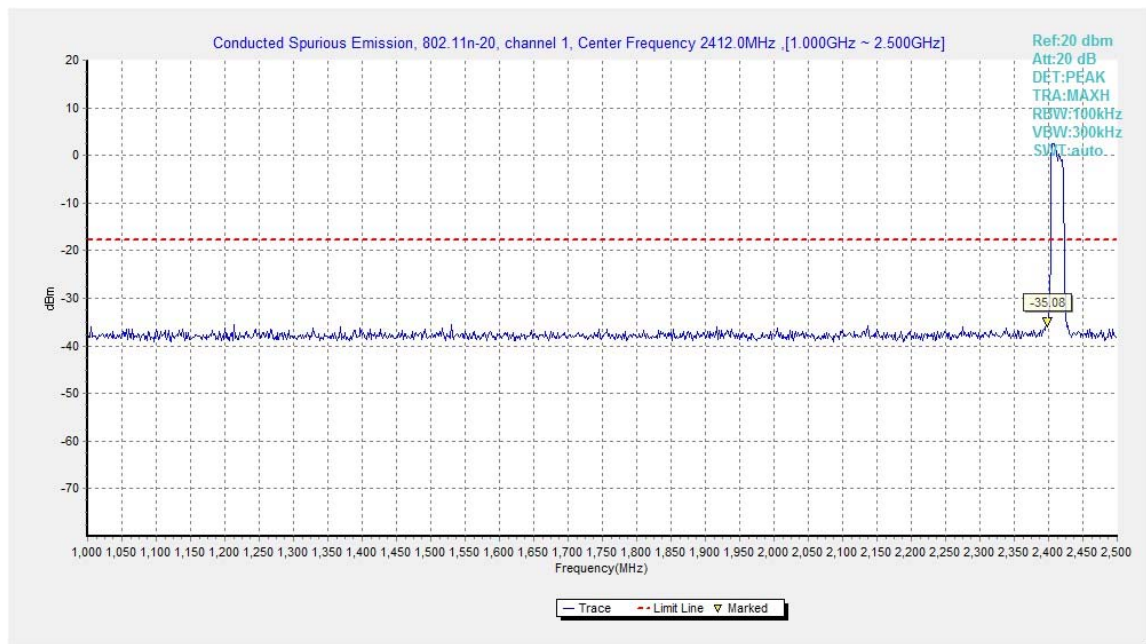


Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)

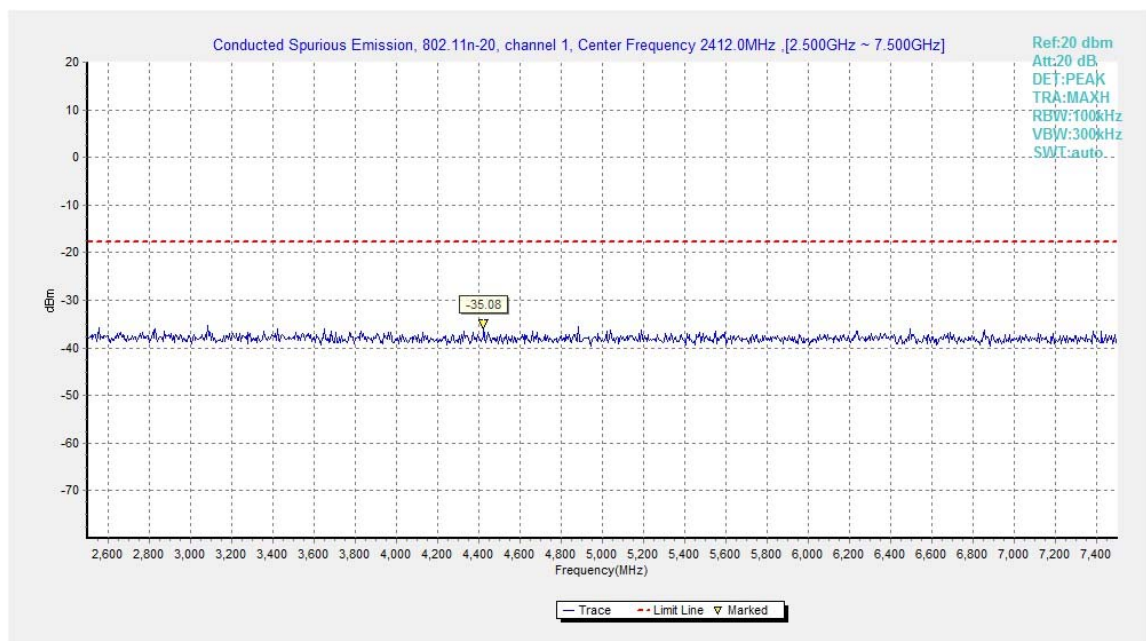


Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)

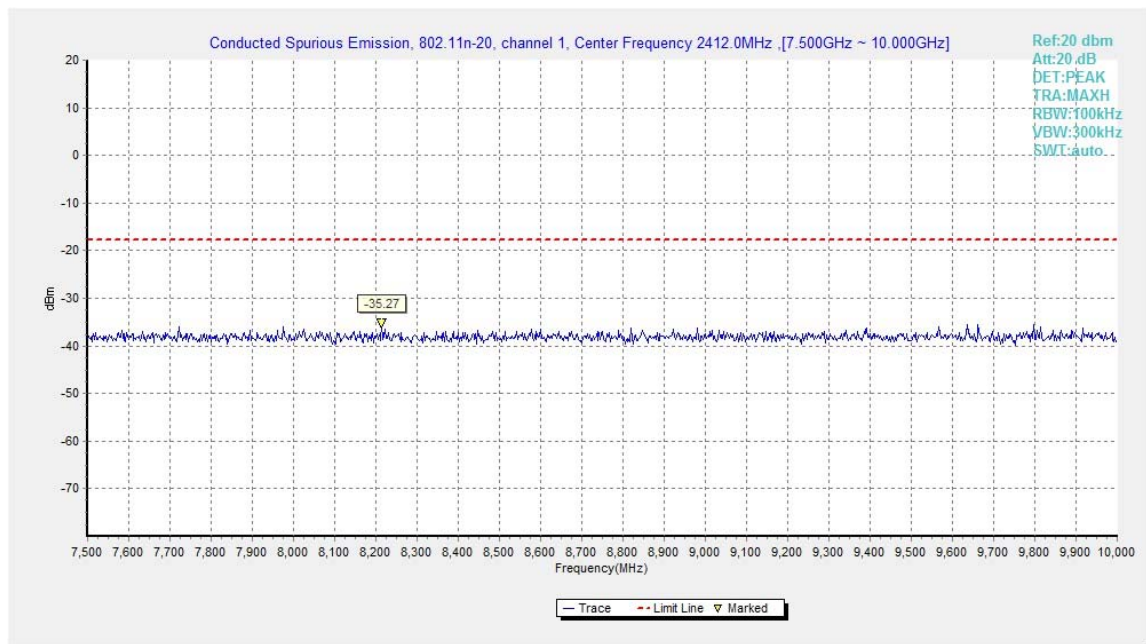


Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)

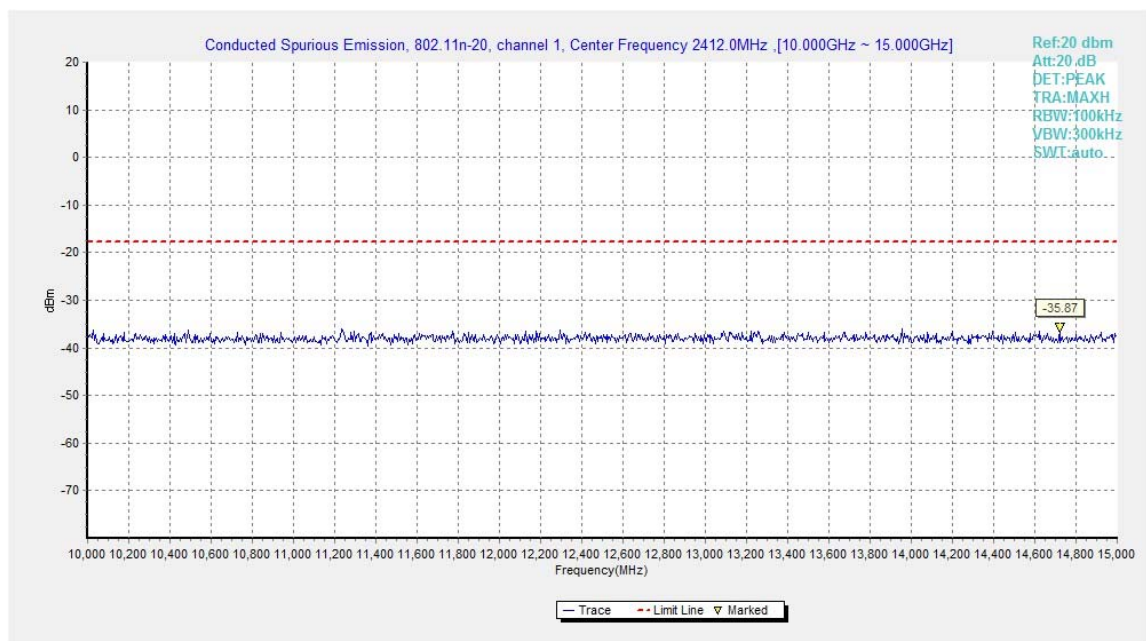


Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)

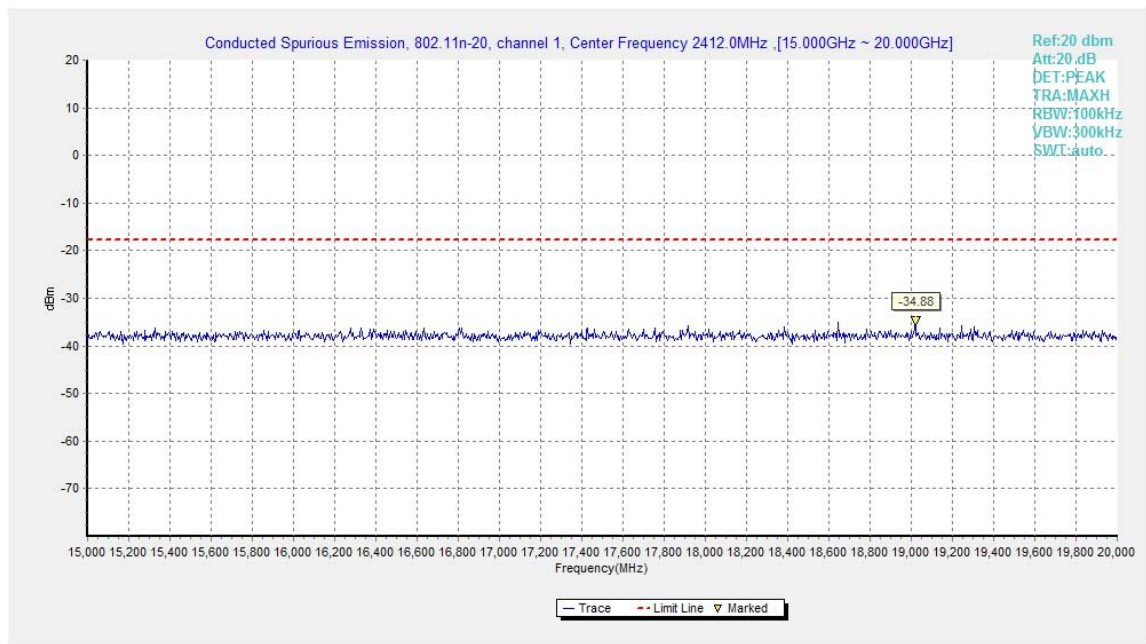


Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)

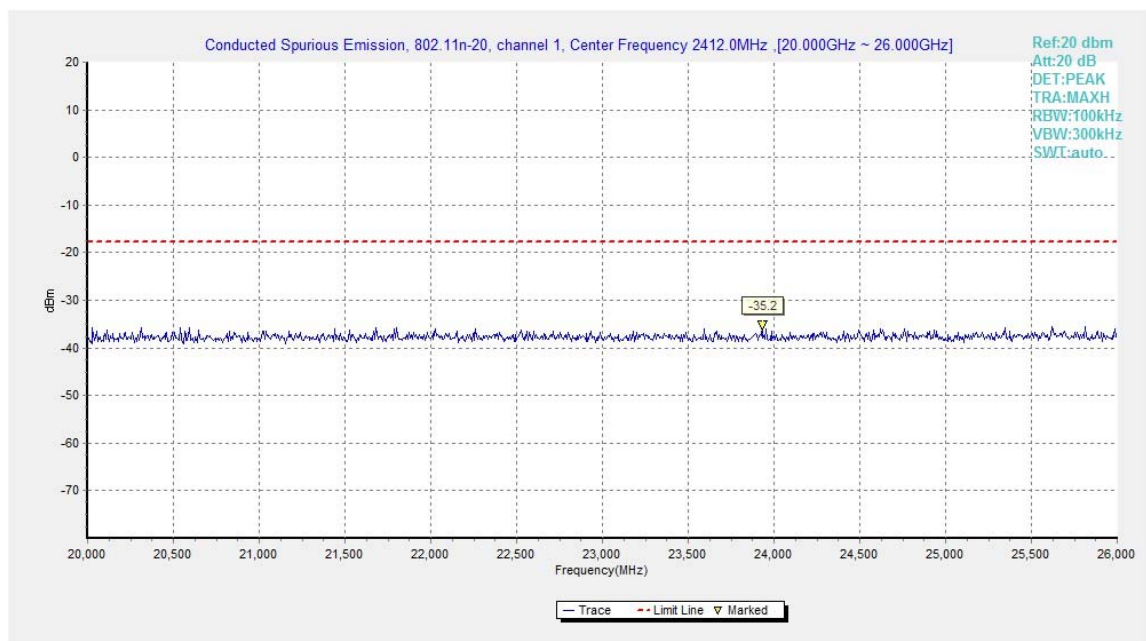


Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)

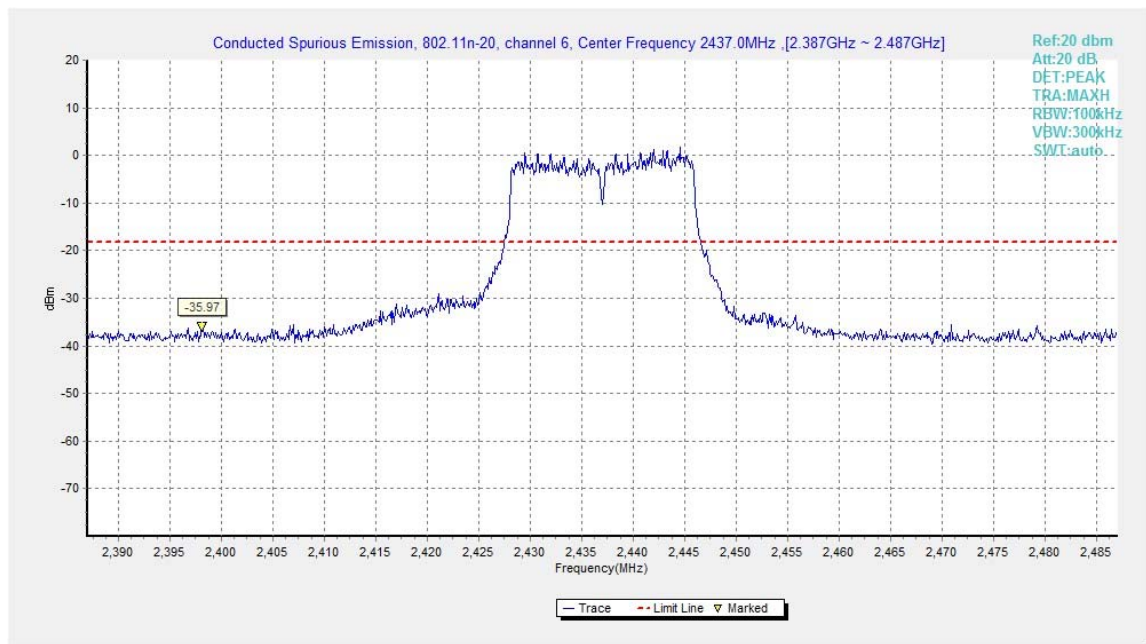


Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)

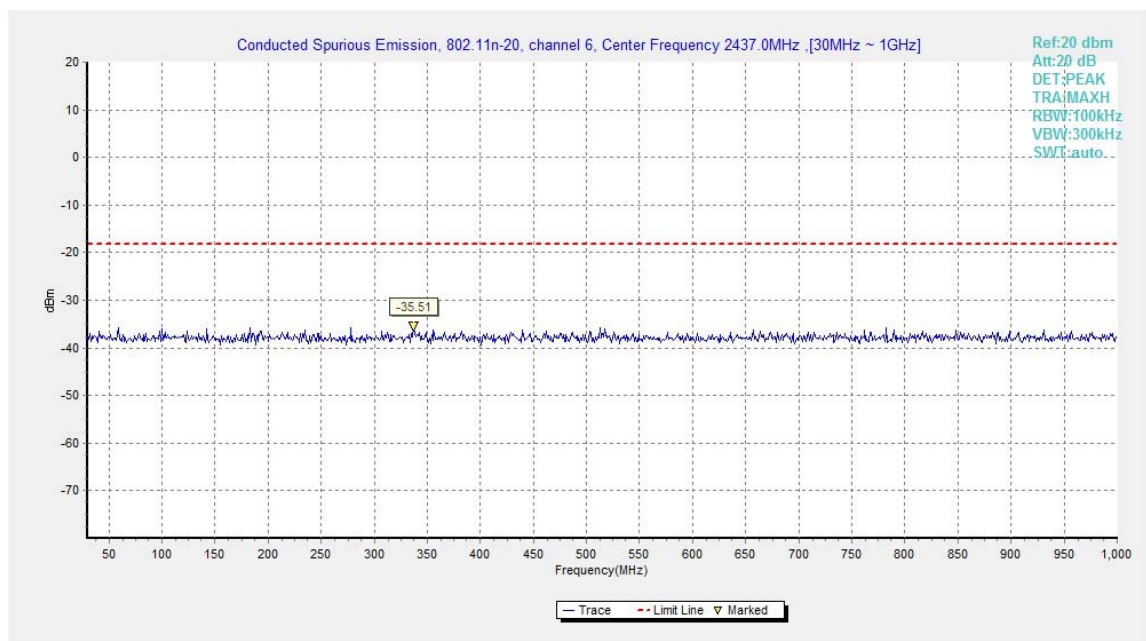


Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)

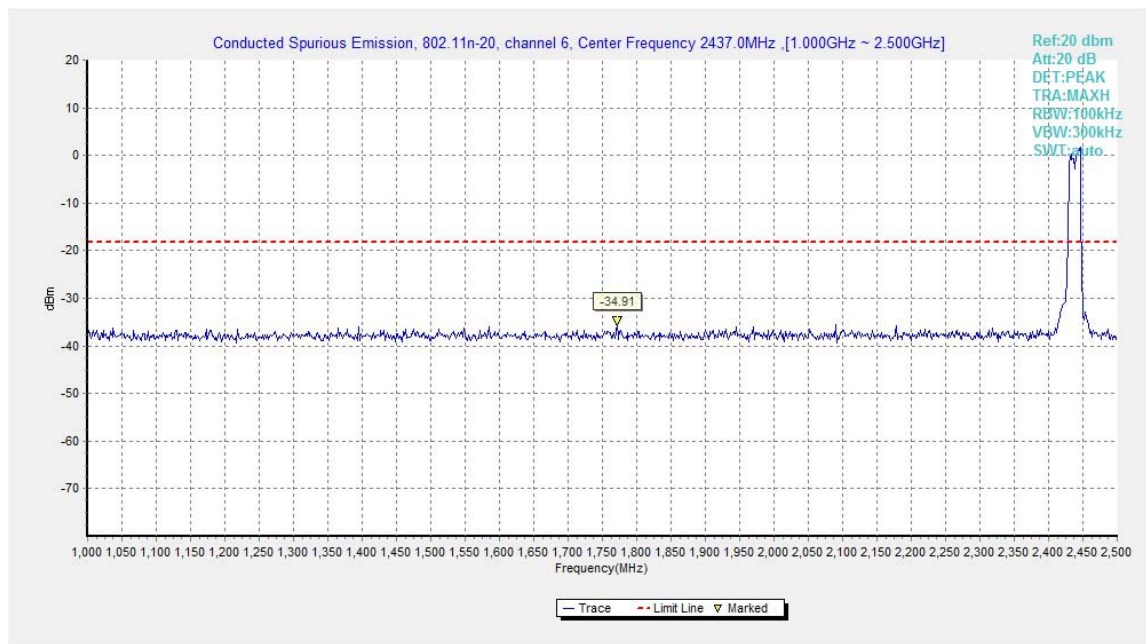


Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)

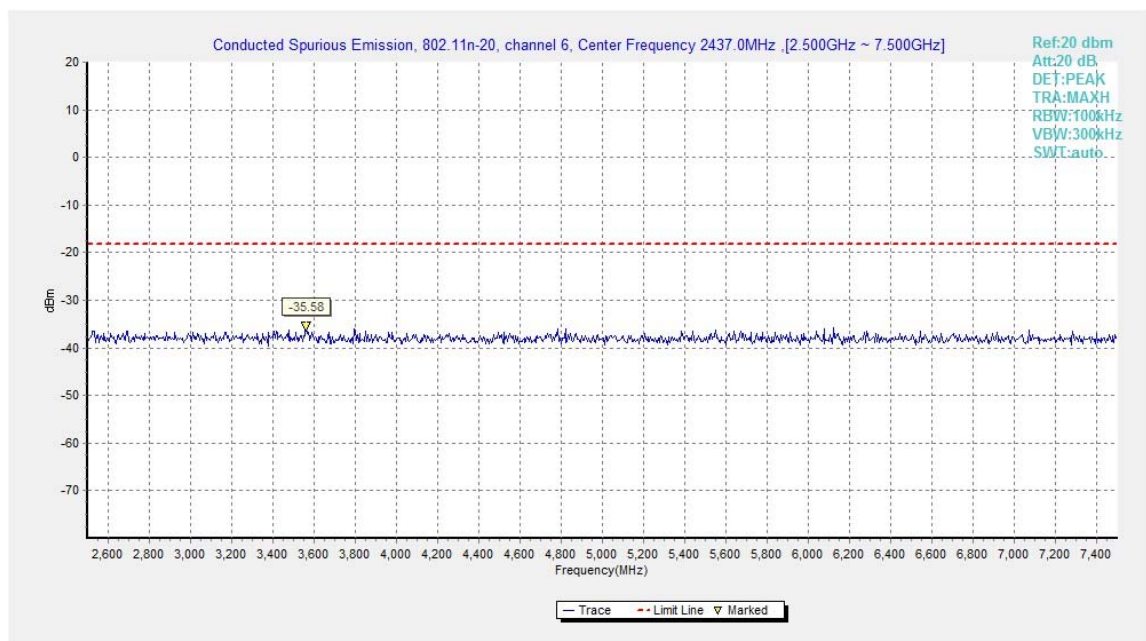


Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)

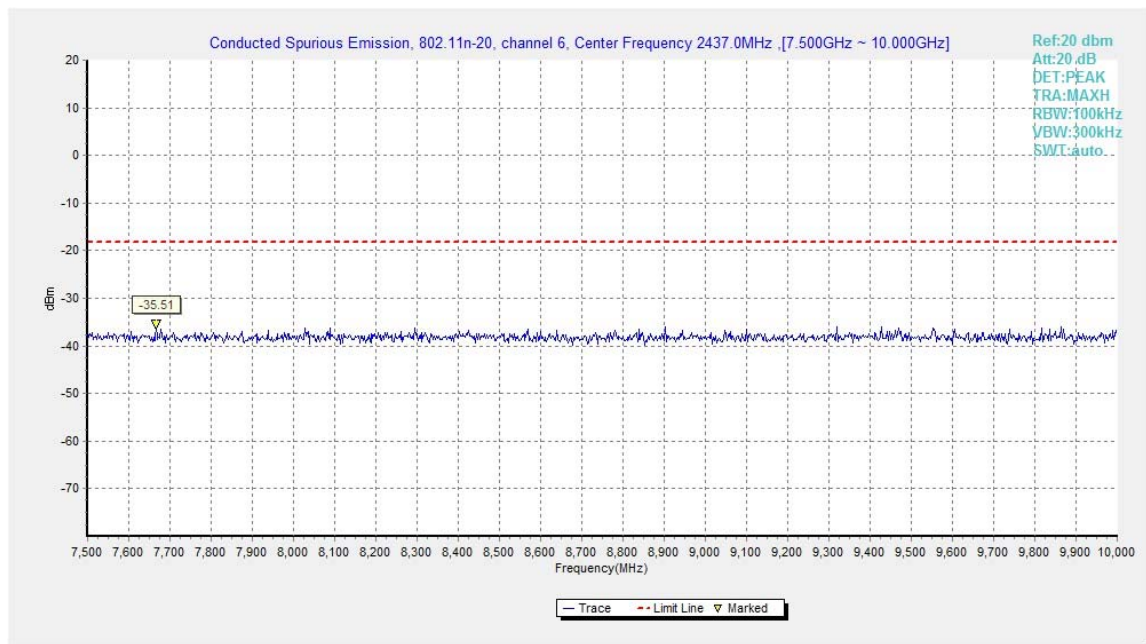


Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)

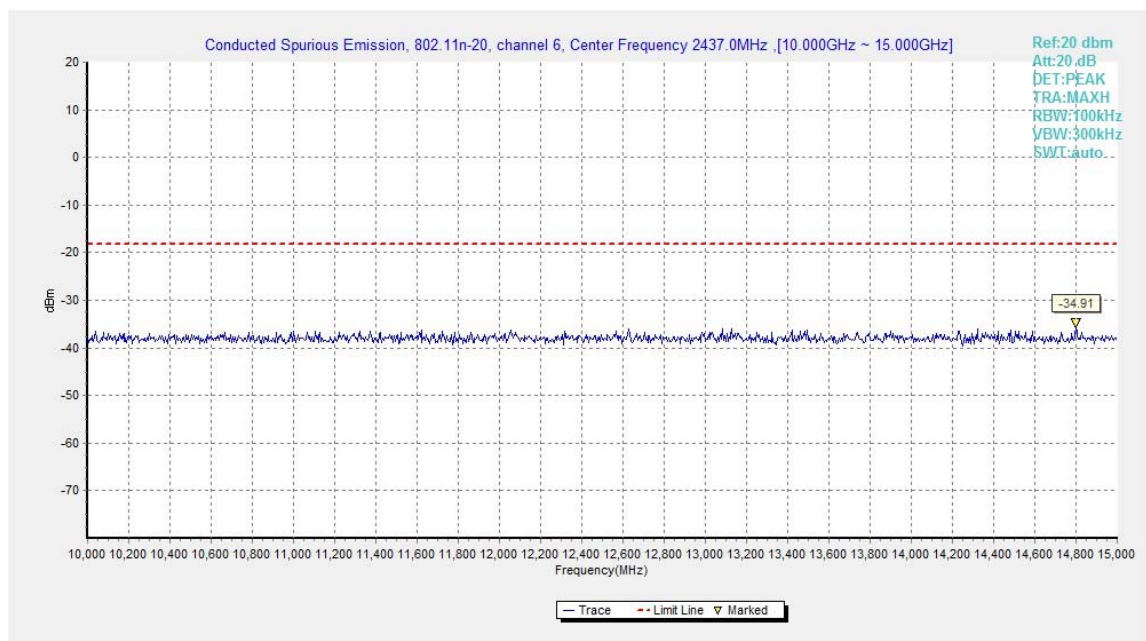


Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)

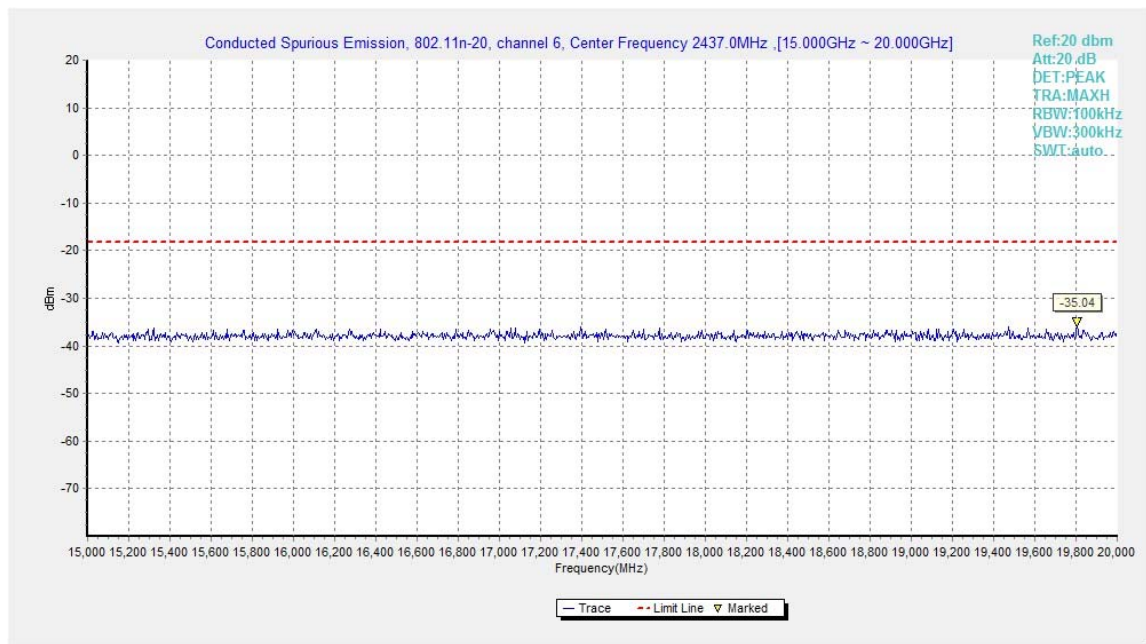


Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)

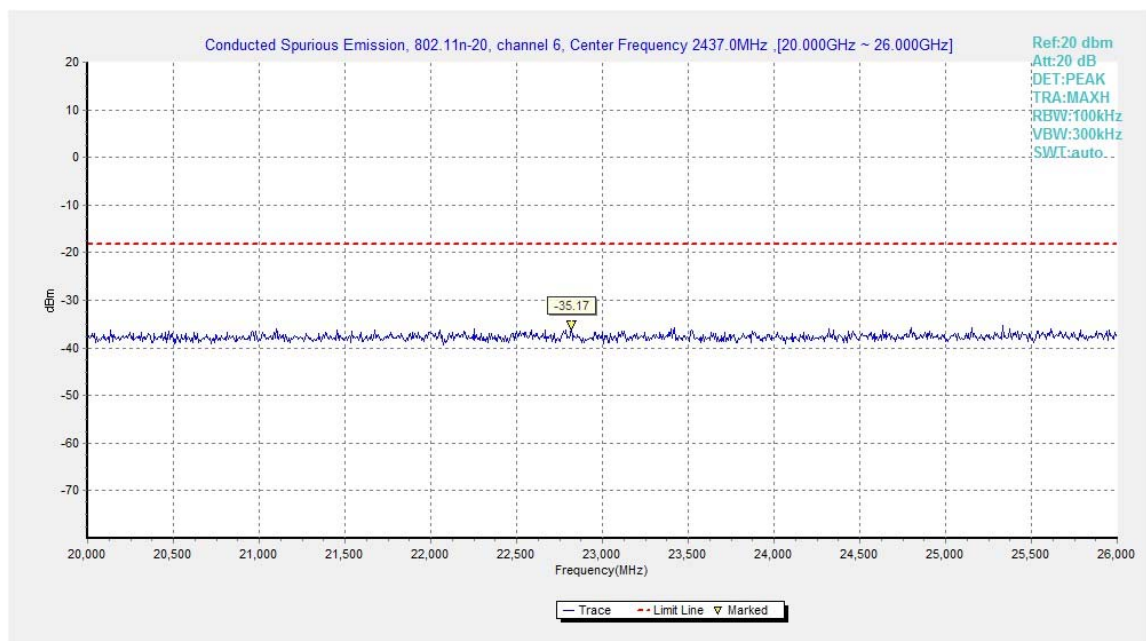


Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)

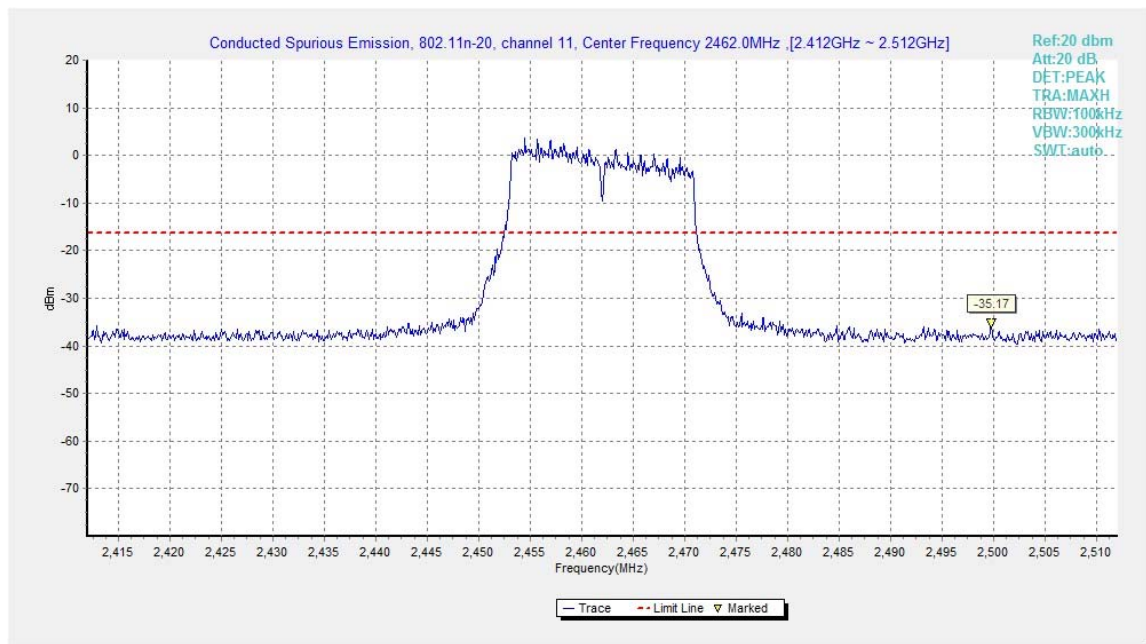


Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)

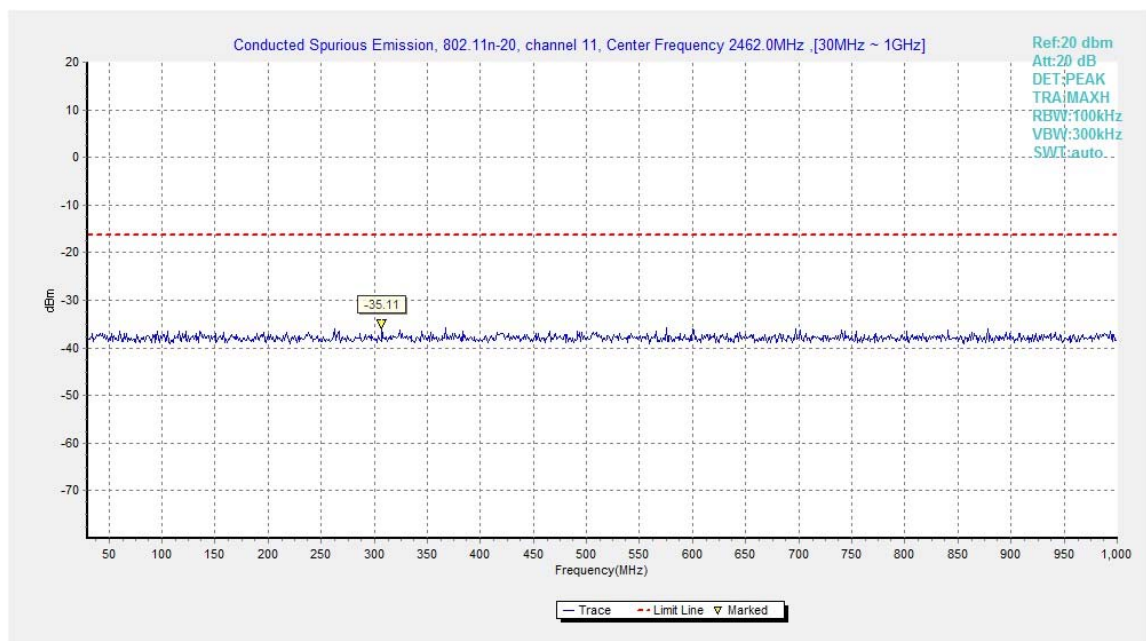


Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)

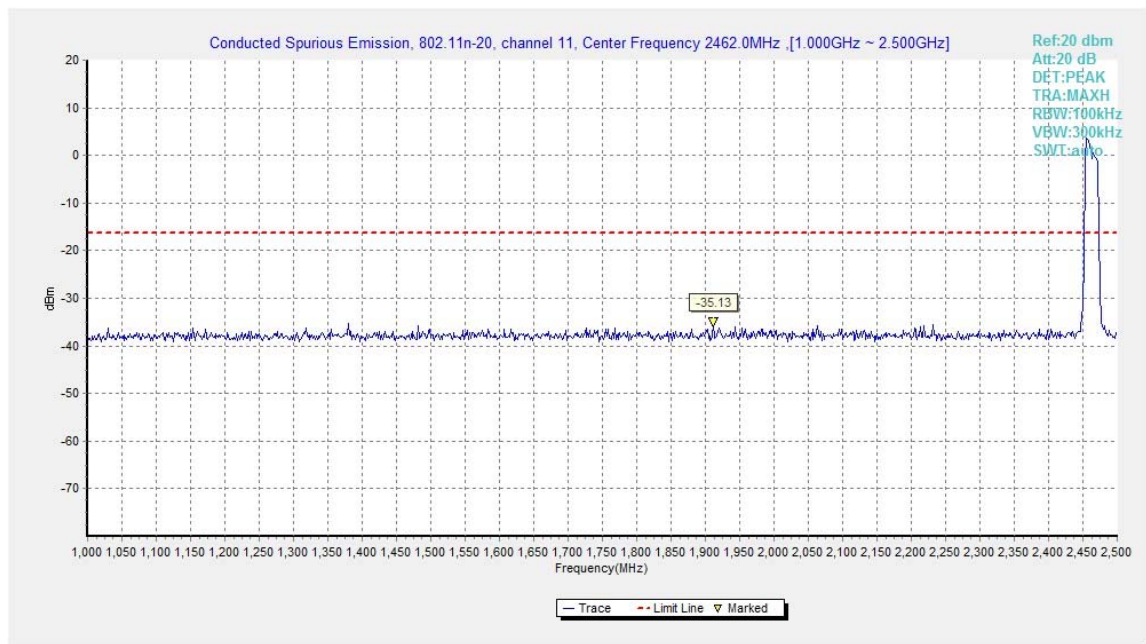


Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)

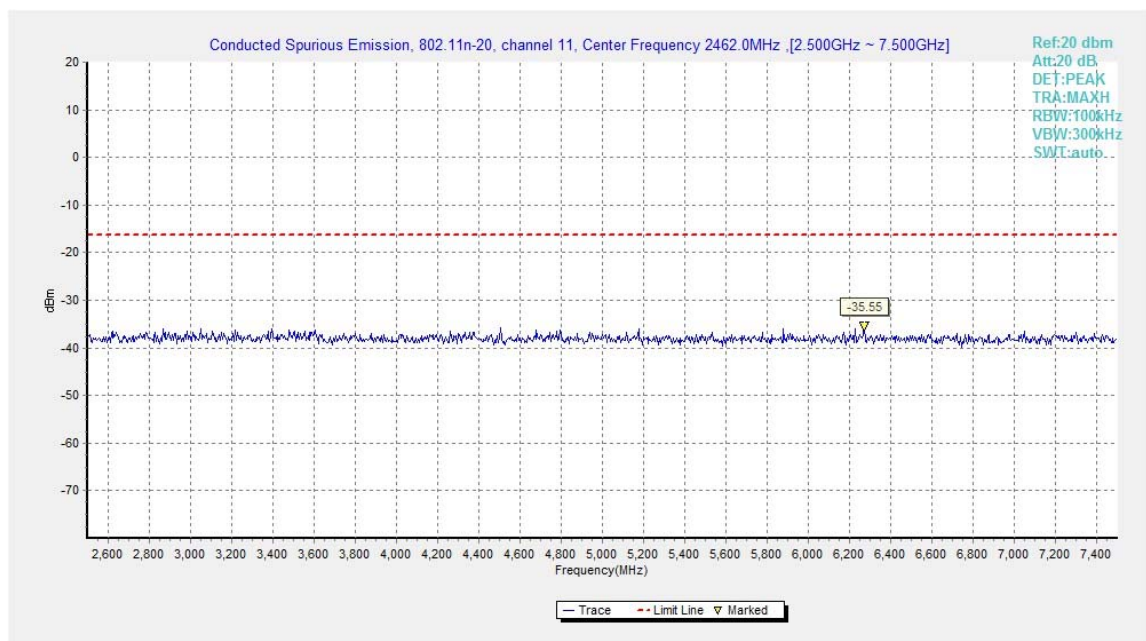


Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)

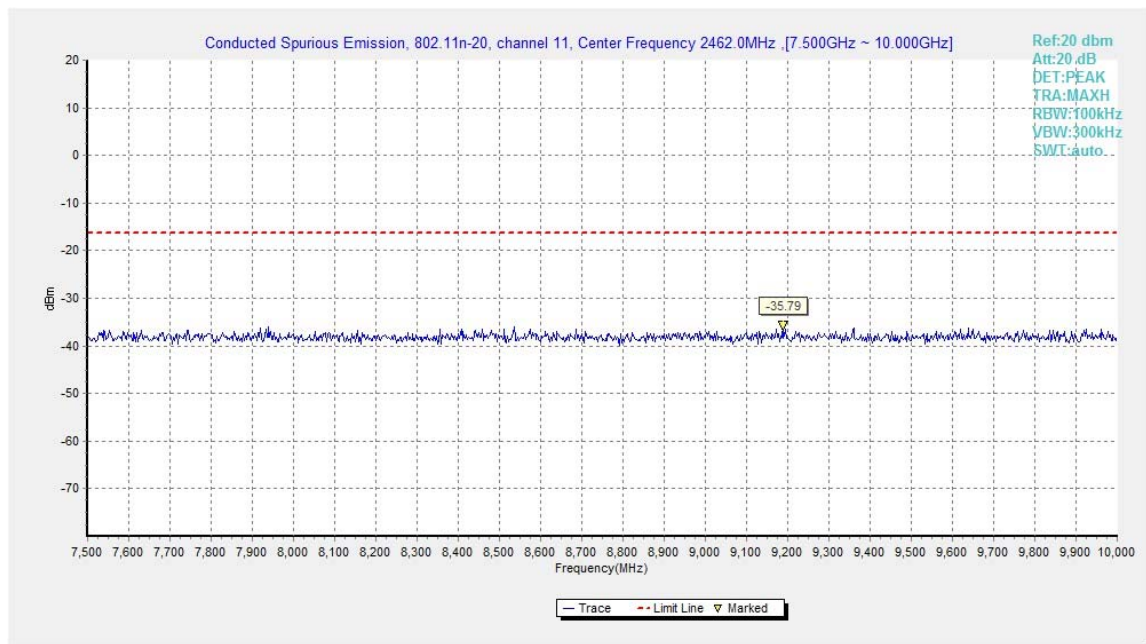


Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)

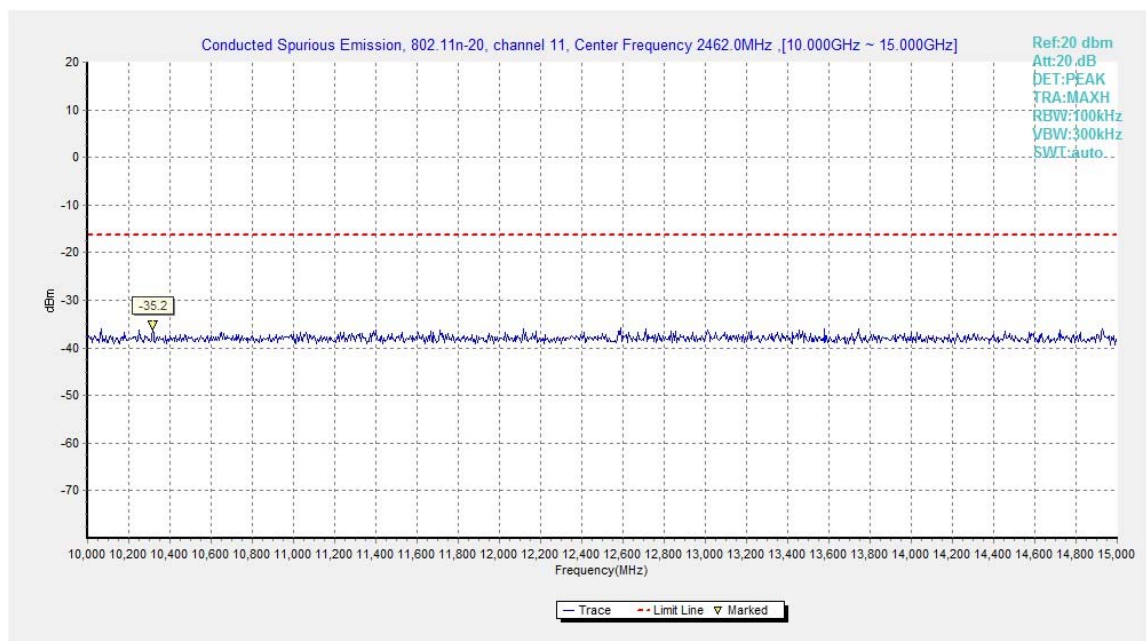


Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)

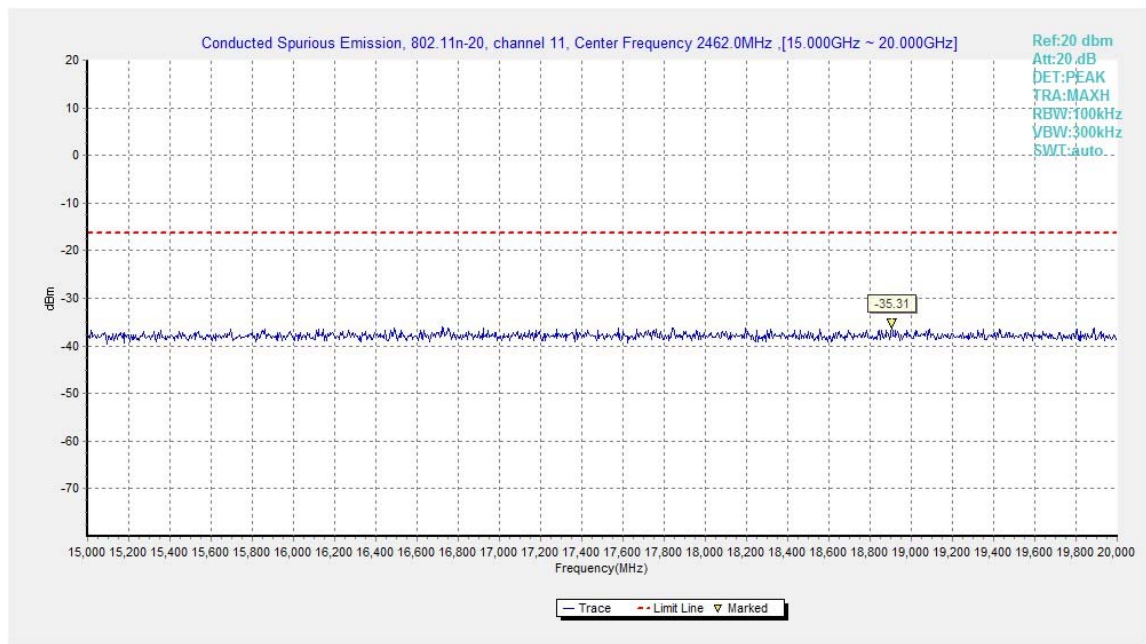


Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)

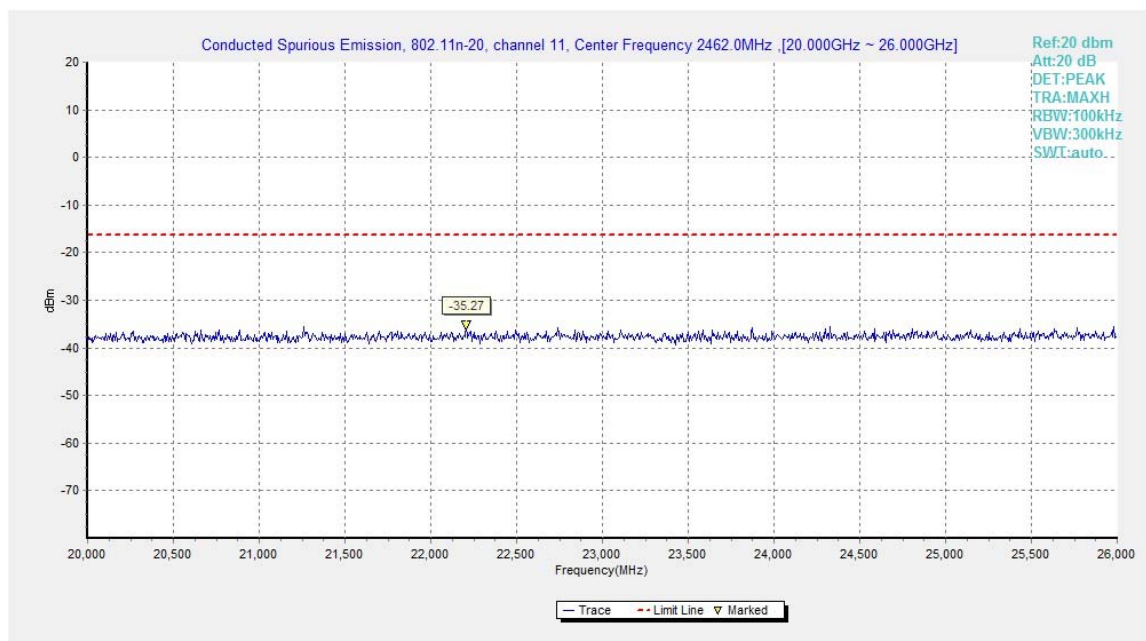


Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: EUT1

Measurement Results:
802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	P
		3 GHz ~ 18 GHz	Fig.A.6.2.3	P
	6	9 kHz ~30 MHz	Fig.A.6.2.4	P
		30 MHz ~1 GHz	Fig.A.6.2.5	P
		1 GHz ~ 3 GHz	Fig.A.6.2.6	P
		3 GHz ~ 18 GHz	Fig.A.6.2.7	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.8	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.9	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.10	P
		3 GHz ~ 18 GHz	Fig.A.6.2.11	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.12	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.13	P
		3 GHz ~ 18 GHz	Fig.A.6.2.14	P
	6	30 MHz ~1 GHz	Fig.A.6.2.15	P
		1 GHz ~ 3 GHz	Fig.A.6.2.16	P
		3 GHz ~ 18 GHz	Fig.A.6.2.17	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.18	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.19	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.20	P
		3 GHz ~ 18 GHz	Fig.A.6.2.21	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.22	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.23	P
		3 GHz ~ 18 GHz	Fig.A.6.2.24	P
	6	30 MHz ~1 GHz	Fig.A.6.2.25	P
		1 GHz ~ 3 GHz	Fig.A.6.2.26	P
		3 GHz ~ 18 GHz	Fig.A.6.2.27	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.28	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.29	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.30	P
		3 GHz ~ 18 GHz	Fig.A.6.2.31	P

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2376.500	50.93	2.9	32.1	15.98	H
2389.030	50.75	2.9	32.0	15.89	H
4824.000	38.14	-17.3	34.5	20.96	V
7236.000	38.87	-17.6	36.1	20.34	V
9648.000	40.33	-17.4	37.0	20.70	H
12060.000	42.34	-17.2	39.3	20.28	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2417.000	51.41	2.9	31.8	16.76	H
2457.250	51.69	2.9	32.5	16.24	V
4875.000	37.12	-18.3	34.5	20.97	V
7311.000	37.84	-18.6	36.1	20.38	H
9748.500	40.43	-17.3	37.2	20.56	V
12184.500	42.02	-17.7	39.2	20.48	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P_{Mea} (dBuV/m)	Polarization
2483.575	51.90	2.9	32.8	16.21	V
2487.750	51.93	2.9	32.6	16.35	H
4924.500	36.82	-19.0	34.5	21.27	V
7386.000	39.75	-17.3	36.0	20.96	H
9849.000	39.79	-18.1	37.3	20.57	V
12310.500	41.57	-17.9	39.2	20.26	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2373.750	52.82	2.9	32.1	17.89	V
2386.765	52.92	2.9	32.0	18.05	H
4824.000	38.13	-17.3	34.5	20.96	V
7236.000	38.89	-17.6	36.1	20.36	H
9648.000	40.37	-17.4	37.0	20.73	H
12060.000	42.38	-17.2	39.3	20.31	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2407.000	53.58	2.9	31.8	18.86	V
2461.750	53.55	2.9	32.7	17.97	H
4875.000	37.15	-18.3	34.5	21.00	H
7311.000	37.89	-18.6	36.1	20.43	V
9748.500	40.43	-17.3	37.2	20.56	V
12186.000	41.95	-17.7	39.2	20.41	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.525	53.54	2.9	32.8	17.84	V
2492.000	53.25	2.9	32.5	17.79	H
4924.500	36.79	-19.0	34.5	21.24	V
7386.000	39.64	-17.3	36.0	20.86	H
9849.000	39.75	-18.1	37.3	20.52	V
12310.500	41.65	-17.9	39.2	20.34	H

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2383.750	52.78	2.9	32.0	17.89	H
2389.750	52.75	2.9	32.0	17.90	H
4824.000	38.20	-17.3	34.5	21.02	V
7236.000	38.90	-17.6	36.1	20.37	V
9648.000	40.35	-17.4	37.0	20.72	V
12060.000	42.34	-17.2	39.3	20.28	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2416.000	53.47	2.9	31.8	18.82	V
2457.000	53.41	2.9	32.5	17.96	V
4875.000	37.15	-18.3	34.5	20.99	H
7311.000	37.81	-18.6	36.1	20.35	H
9748.500	40.49	-17.3	37.2	20.62	V
12186.000	42.01	-17.7	39.2	20.48	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.550	53.64	2.9	32.8	17.95	H
2489.000	53.40	2.9	32.6	17.86	H
4924.500	36.80	-19.0	34.5	21.26	V
7386.000	39.61	-17.3	36.0	20.82	H
9849.000	39.84	-18.1	37.3	20.62	V
12310.500	41.51	-17.9	39.2	20.21	H

Peak Result:

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2382.300	54.3	2.9	32.1	19.33	H
2387.280	53.8	2.9	32.0	18.98	H
17653.500	59.0	-13.1	41.1	30.97	V
17648.250	58.9	-13.0	41.0	30.86	V
17303.250	58.8	-13.7	41.1	31.35	H
17277.750	58.6	-13.9	41.2	31.33	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2420.050	46.8	2.9	31.8	12.15	H
2521.500	48.9	2.9	32.5	13.46	V
17651.250	59.4	-13.1	41.1	31.41	V
17292.000	59.0	-13.0	41.0	30.99	H
17655.750	59.0	-13.7	41.1	31.59	V
17295.000	58.9	-13.9	41.2	31.58	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.500	54.8	2.9	32.8	19.09	V
2485.725	54.9	2.9	32.6	19.32	H
17958.750	59.1	-13.6	40.8	31.86	V
17672.250	59.0	-13.5	40.9	31.60	H
17722.500	58.7	-13.5	40.9	31.30	V
17662.500	58.7	-13.5	40.9	31.27	V

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2388.820	58.8	2.9	32.1	23.86	V
2389.240	59.1	2.9	32.0	24.27	H
17748.750	58.9	-13.1	41.1	30.91	V
17823.000	58.9	-13.0	41.0	30.87	H
17734.500	58.8	-13.7	41.1	31.36	H
17262.750	58.8	-13.9	41.2	31.46	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2369.750	48.6	2.9	31.8	13.869	V
2626.500	51.3	2.9	32.7	15.771	H
17631.750	59.1	-13.1	41.1	31.07	H
17937.750	58.9	-13.0	41.0	30.87	V
17370.750	58.9	-13.7	41.1	31.46	V
17284.500	58.7	-13.9	41.2	31.41	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2483.625	68.6	2.9	32.8	32.91	V
2484.450	65.5	2.9	32.5	30.05	H
17664.000	58.7	-13.1	41.1	30.75	V
17664.750	58.7	-13.0	41.0	30.75	H
17151.000	58.7	-15.1	41.4	32.41	V
17301.750	58.7	-13.9	41.2	31.39	H

802.11n-HT20

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2386.545	54.5	2.9	32.0	19.57	H
2389.135	55.6	2.9	32.0	20.71	H
17620.500	59.0	-13.1	41.1	31.01	V
17679.000	59.0	-13.0	41.0	31.01	V
17589.750	58.8	-13.7	41.1	31.41	V
17220.750	58.8	-13.9	41.2	31.47	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2352.500	48.2	2.9	31.8	13.57	V
2653.375	50.7	2.9	32.5	15.24	V
17693.250	59.0	-13.5	40.9	31.61	H
17765.250	58.8	-13.5	40.9	31.38	H
17230.500	58.8	-13.9	41.2	31.48	V
17950.500	58.7	-13.6	40.8	31.49	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2484.025	65.6	2.9	32.8	29.86	H
2484.250	63.1	2.9	32.6	27.52	H
17738.250	59.4	-13.2	41.0	31.65	V
17357.250	59.3	-13.8	41.2	31.93	H
17625.000	58.9	-13.1	41.1	30.88	V
17804.250	58.8	-13.5	40.9	31.41	H

Test graphs as below:

RE - Power-2.38GHz-2.45GHz_ESCI3

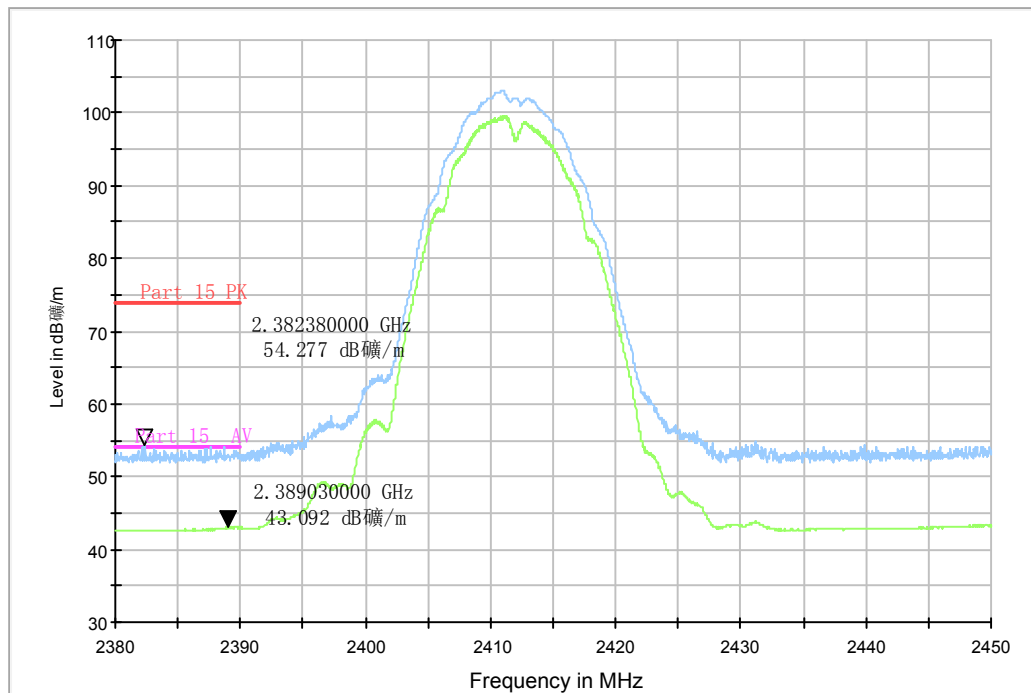


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz – 2.45GHz

RE - 1GHz-3GHz_ESCI3

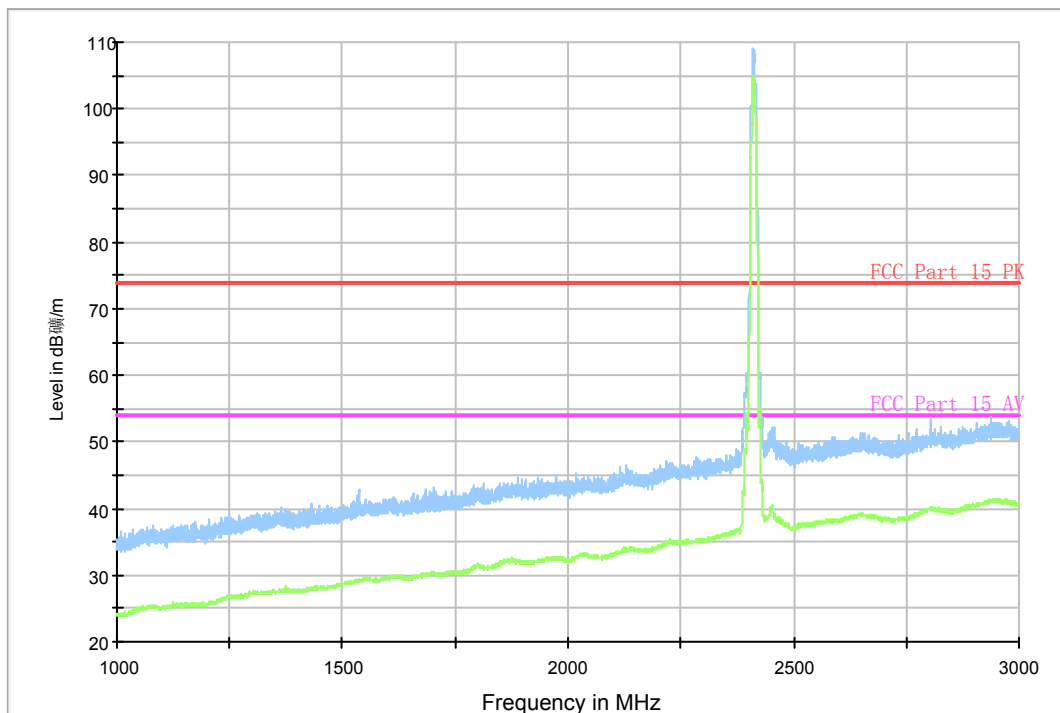


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 1 GHz-3 GHz)

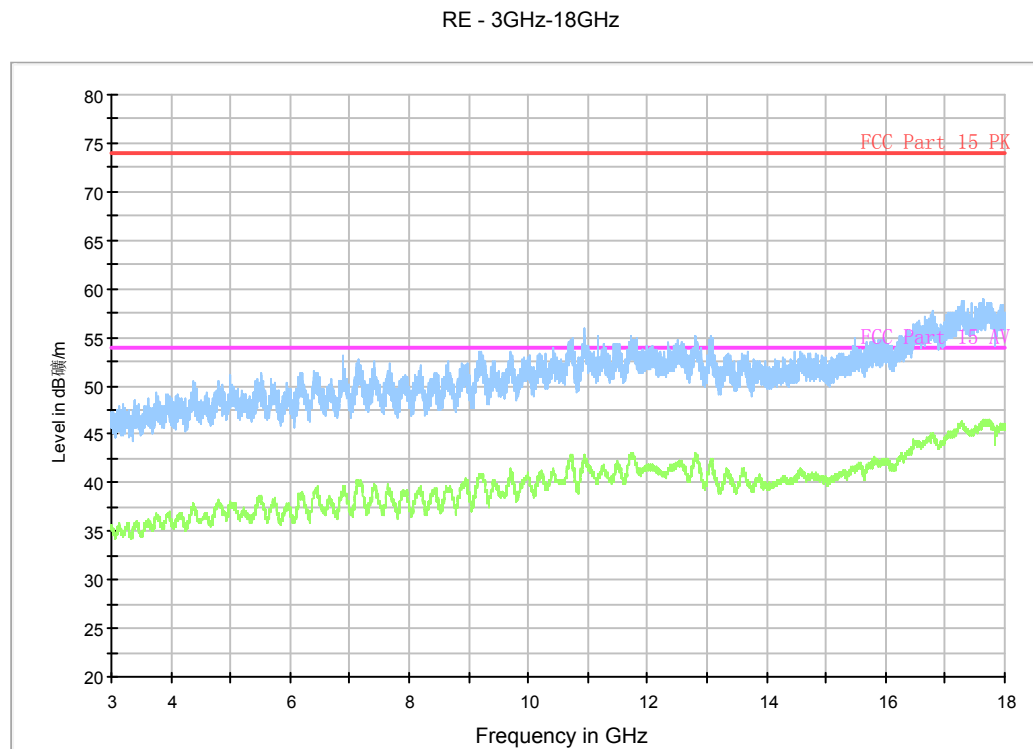


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 3 GHz-18 GHz)

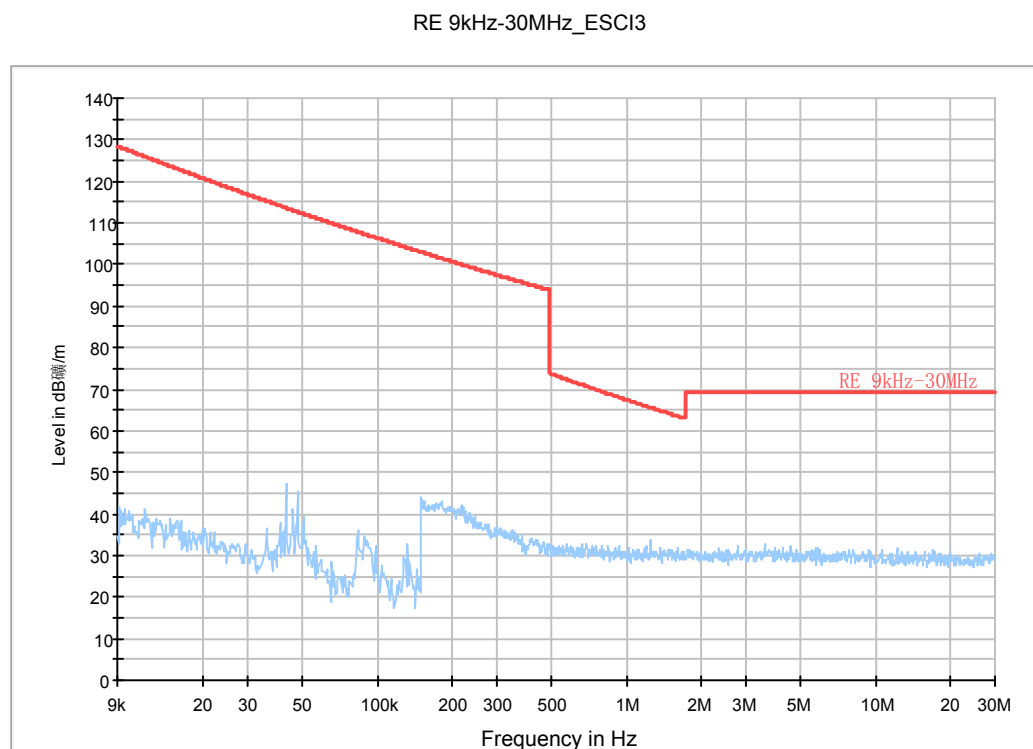


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 9kHz-30 MHz)

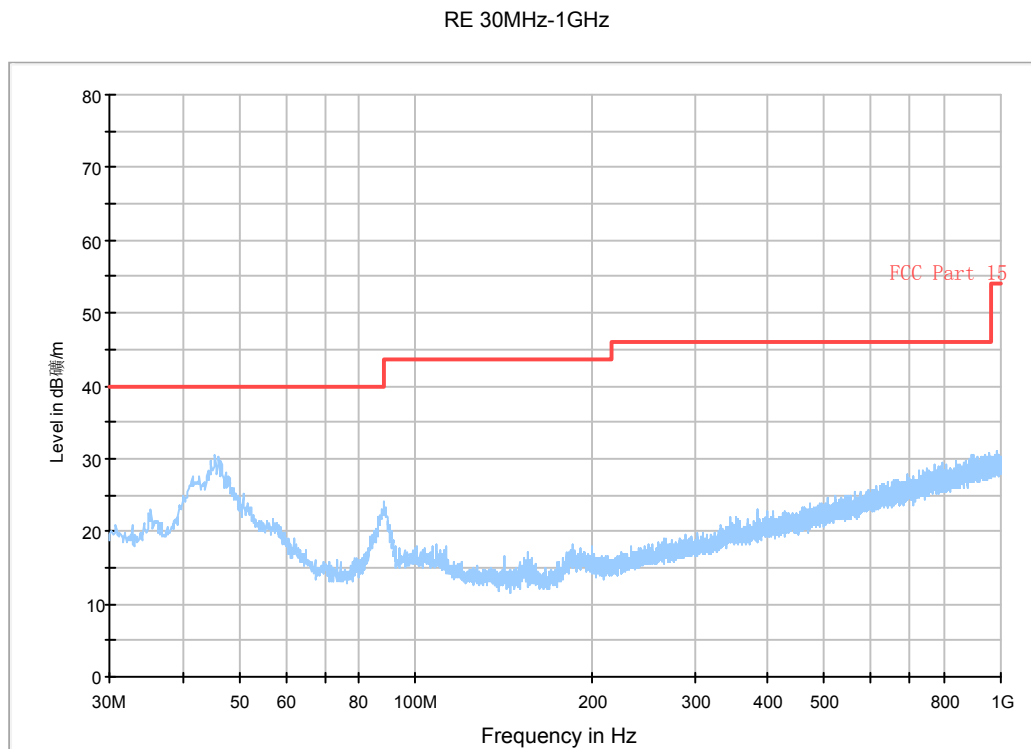


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 30 MHz-1 GHz)

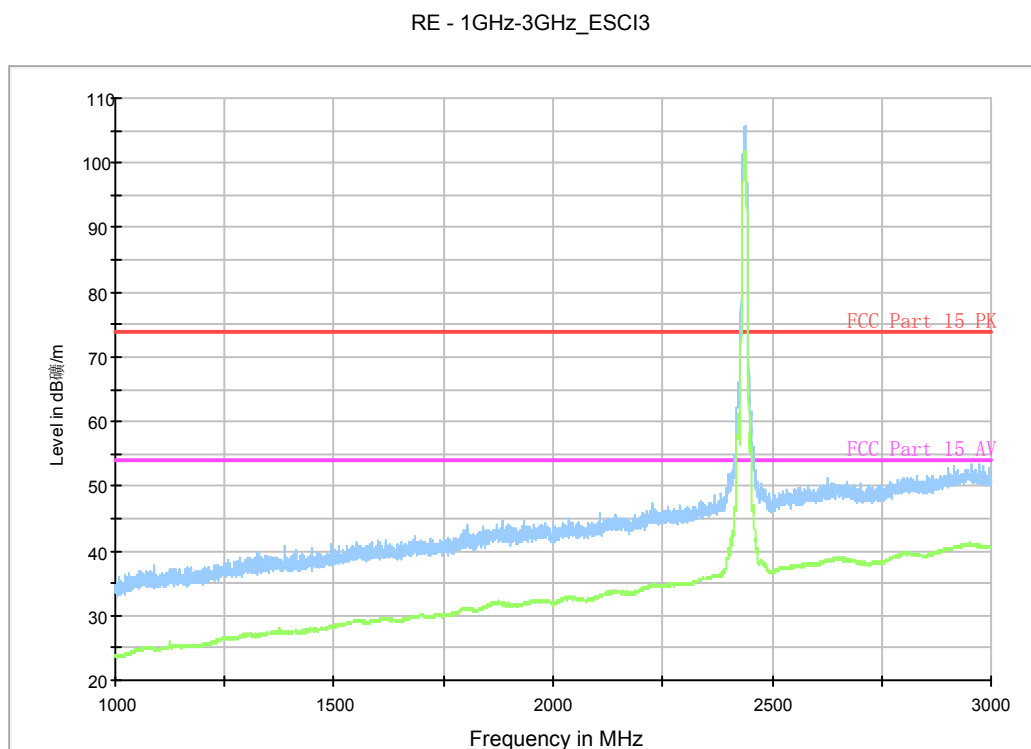


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 1 GHz-3 GHz)

RE - 3GHz-18GHz

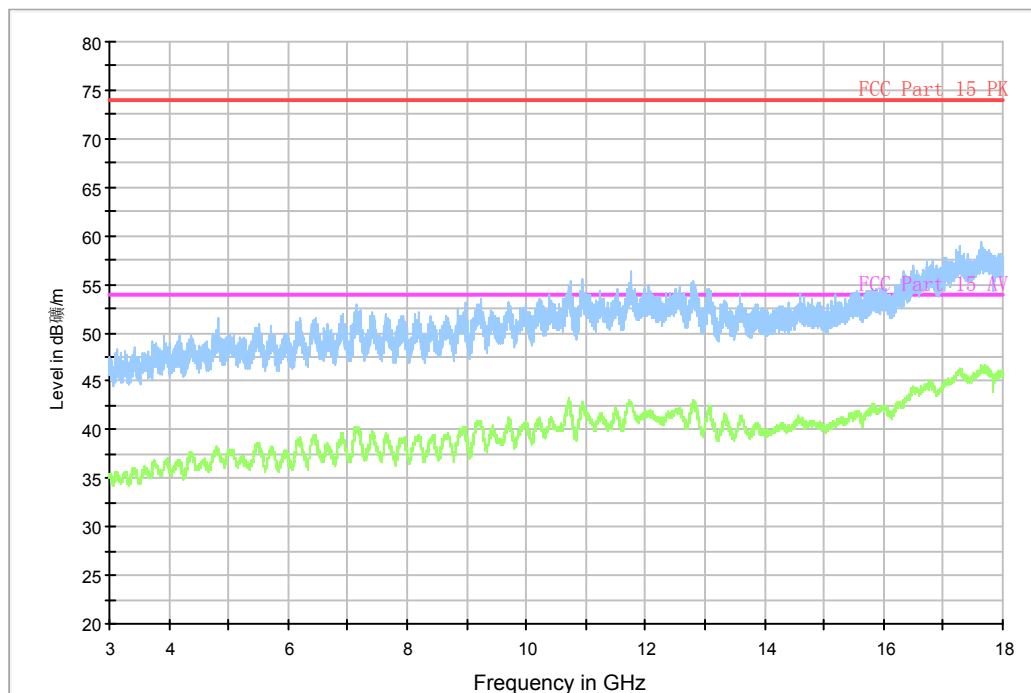


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 3 GHz-18 GHz)

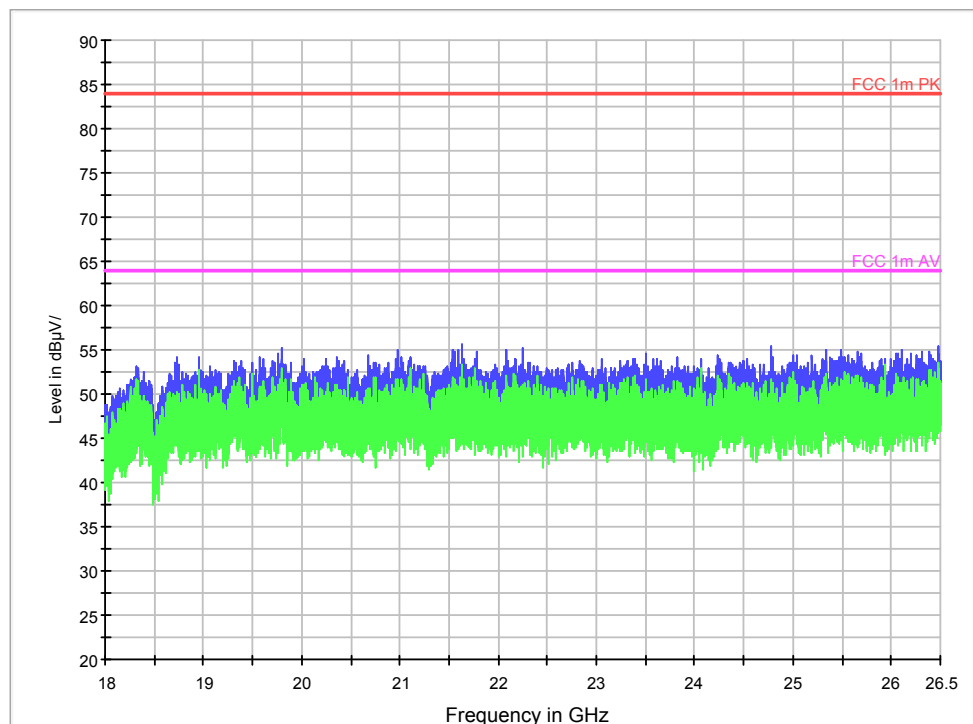


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 18GHz – 26.5GHz)

26.5GHz)

RE - Power-2.45GHz-2.5GHz_ESCI3

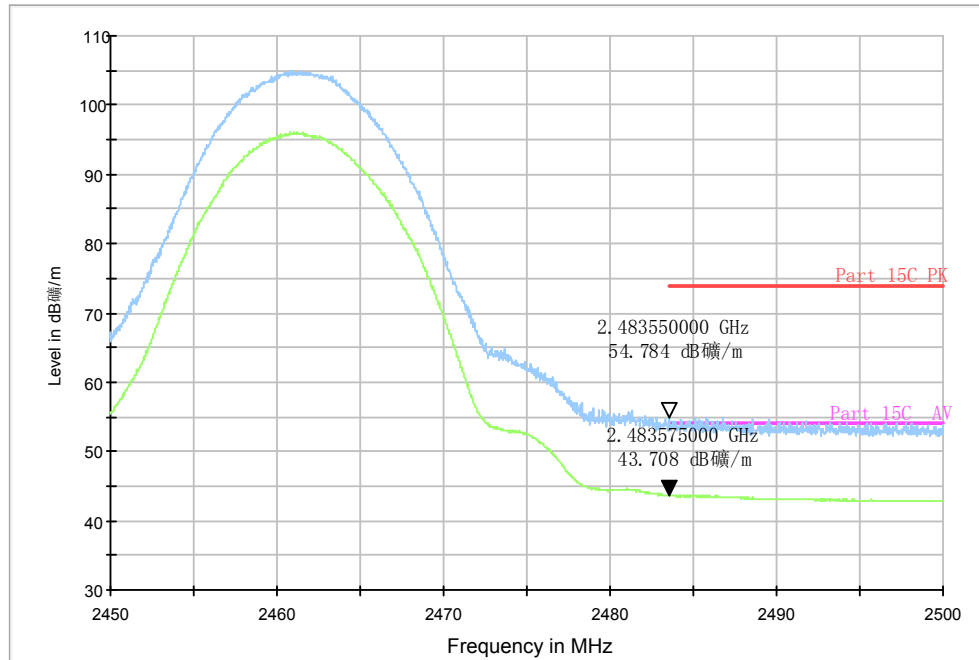


Fig.A.6.2.9 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

RE - 1GHz-3GHz_ESCI3

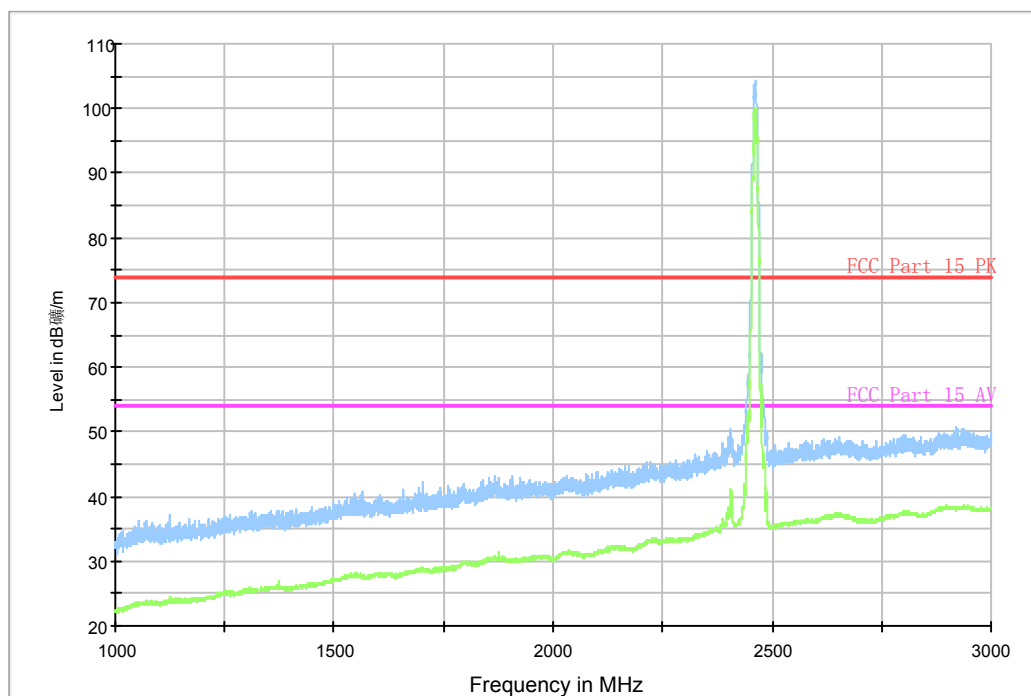


Fig.A.6.2.10 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 1 GHz-3 GHz)

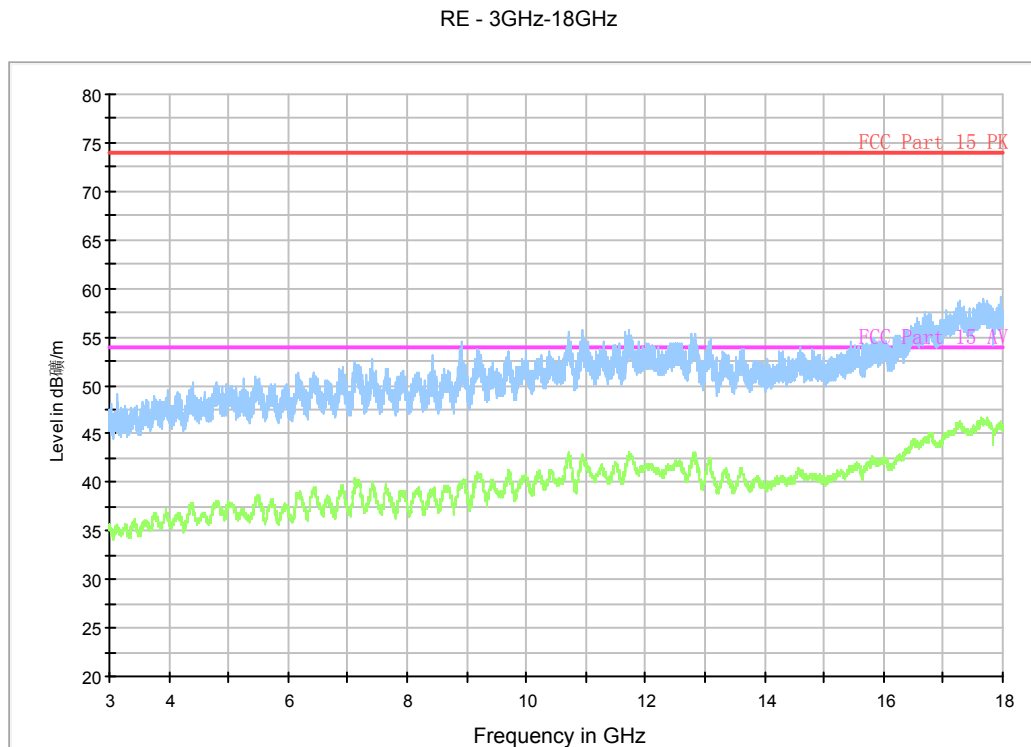


Fig.A.6.2.11 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 3 GHz-18 GHz)

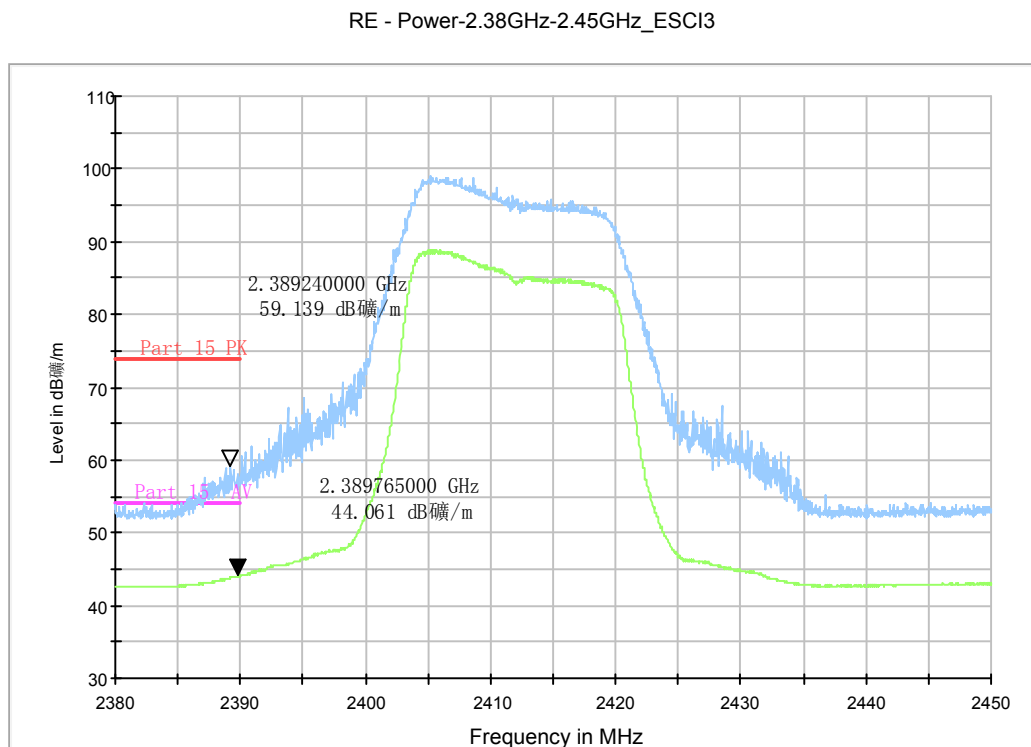


Fig.A.6.2.12 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz

- 2.45GHz

RE - 1GHz-3GHz_ESC13

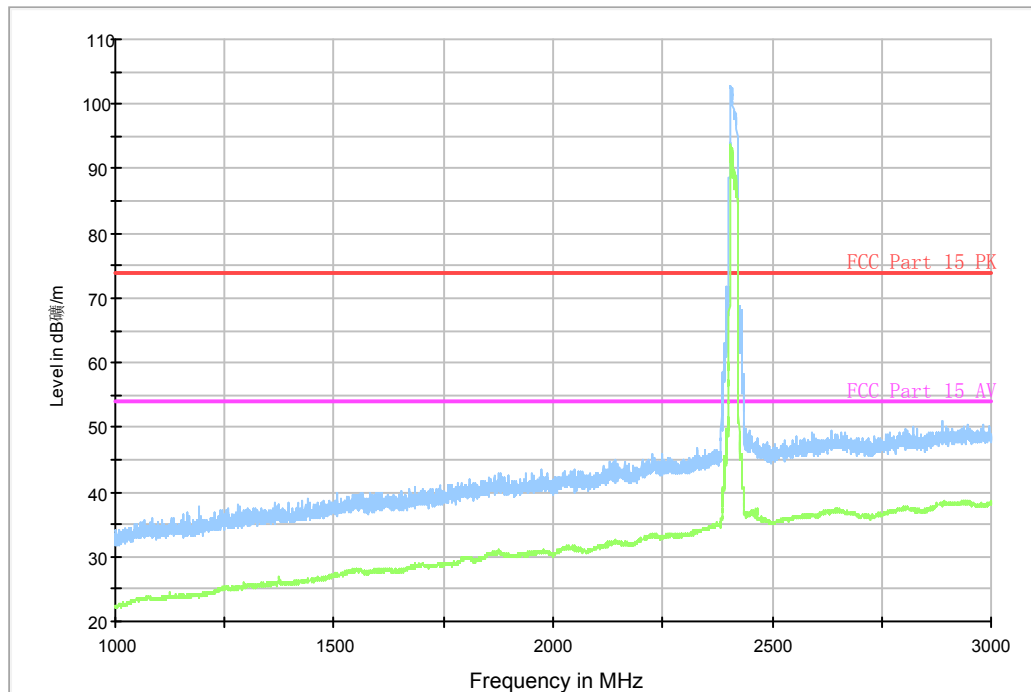


Fig.A.6.2.13 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 1 GHz-3 GHz)

RE - 3GHz-18GHz

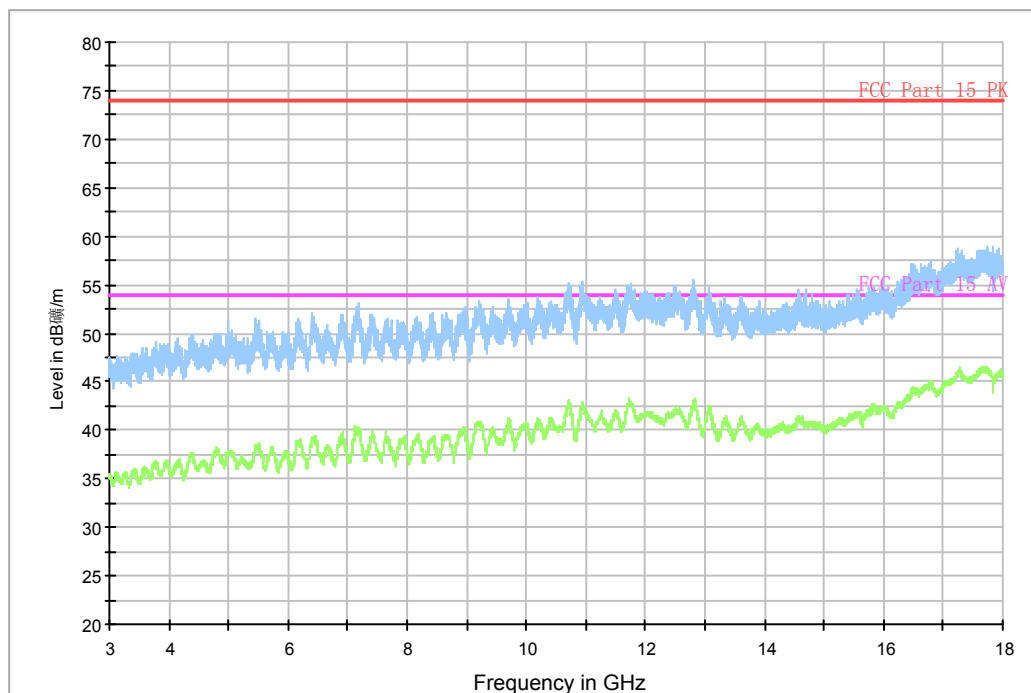


Fig.A.6.2.14 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 3 GHz-18 GHz)

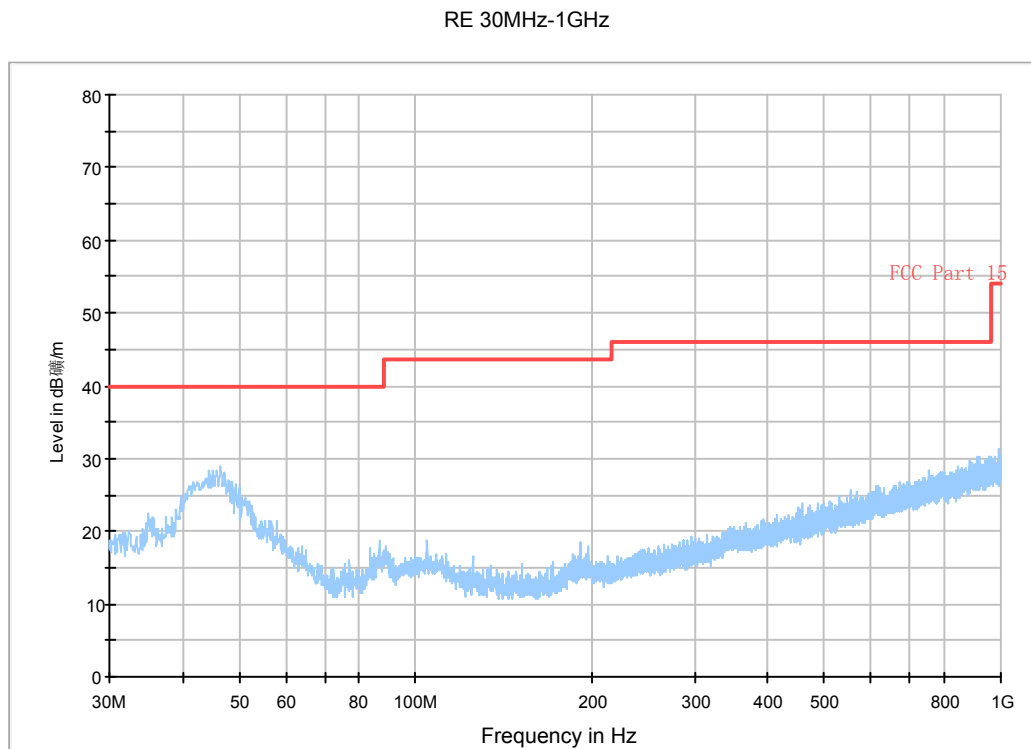


Fig.A.6.2.15 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 30 MHz-1 GHz)

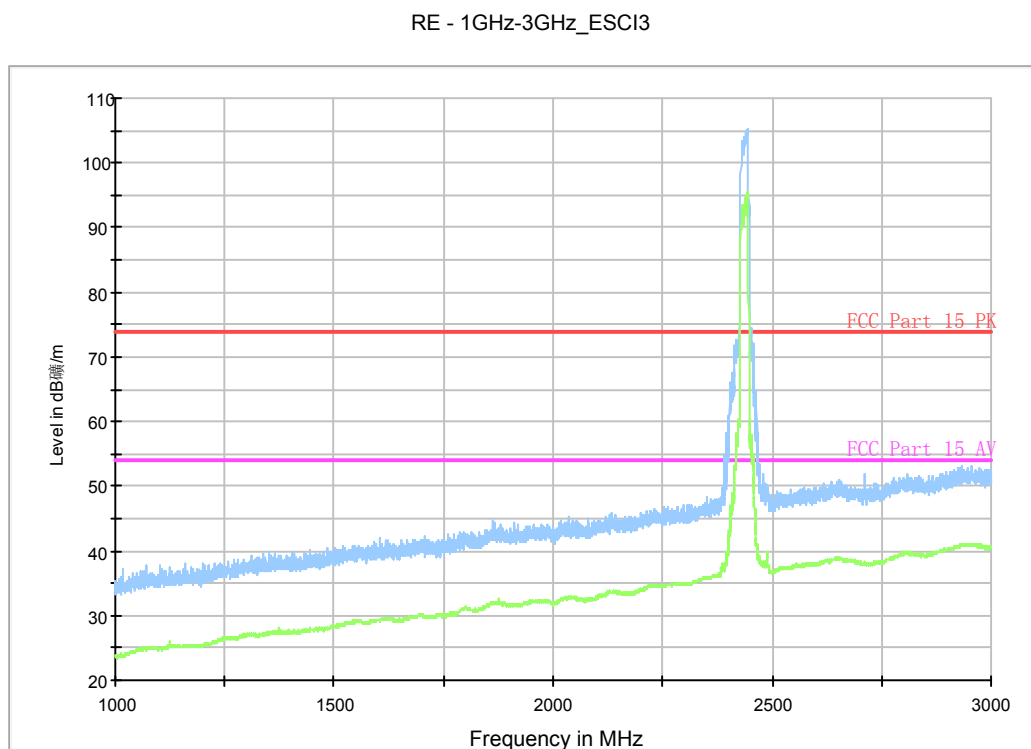


Fig.A.6.2.16 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 1 GHz-3 GHz)

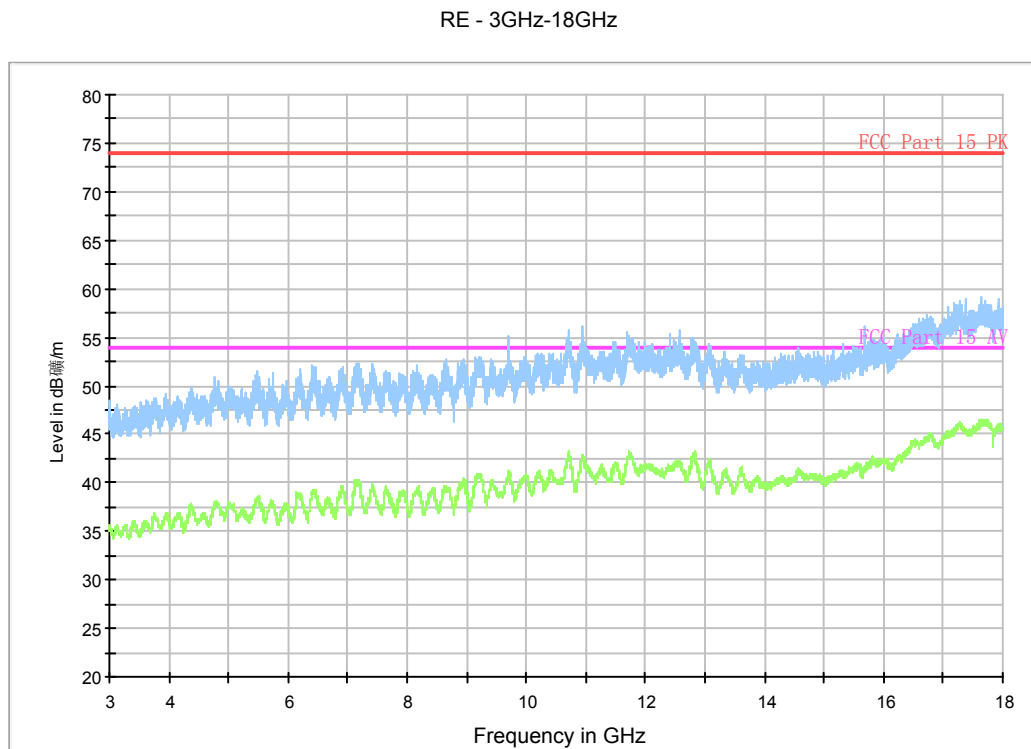


Fig.A.6.2.17 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 3 GHz-18 GHz)

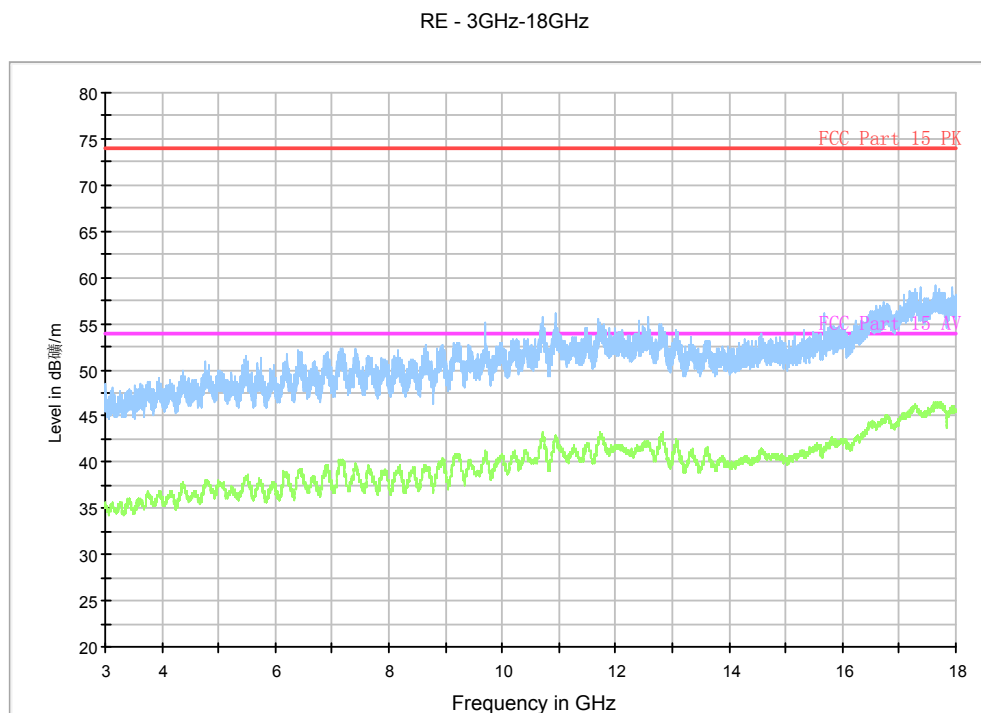


Fig.A.6.2.18 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 18GHz – 26.5GHz)

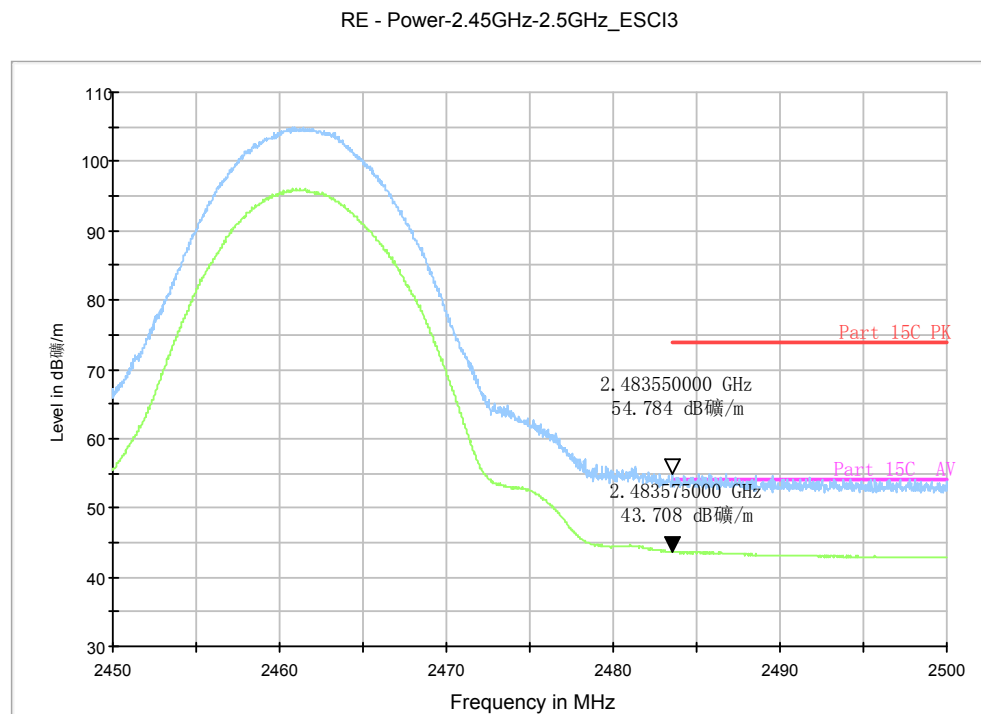


Fig.A.6.2.19 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

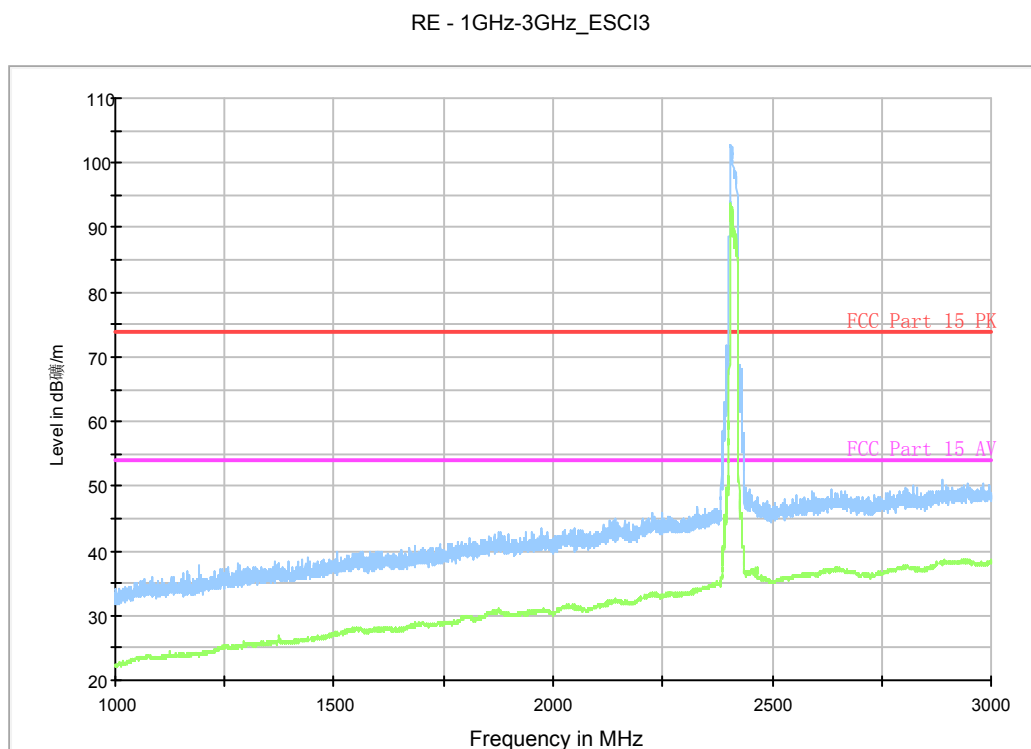


Fig.A.6.2.20 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 1 GHz-3 GHz)

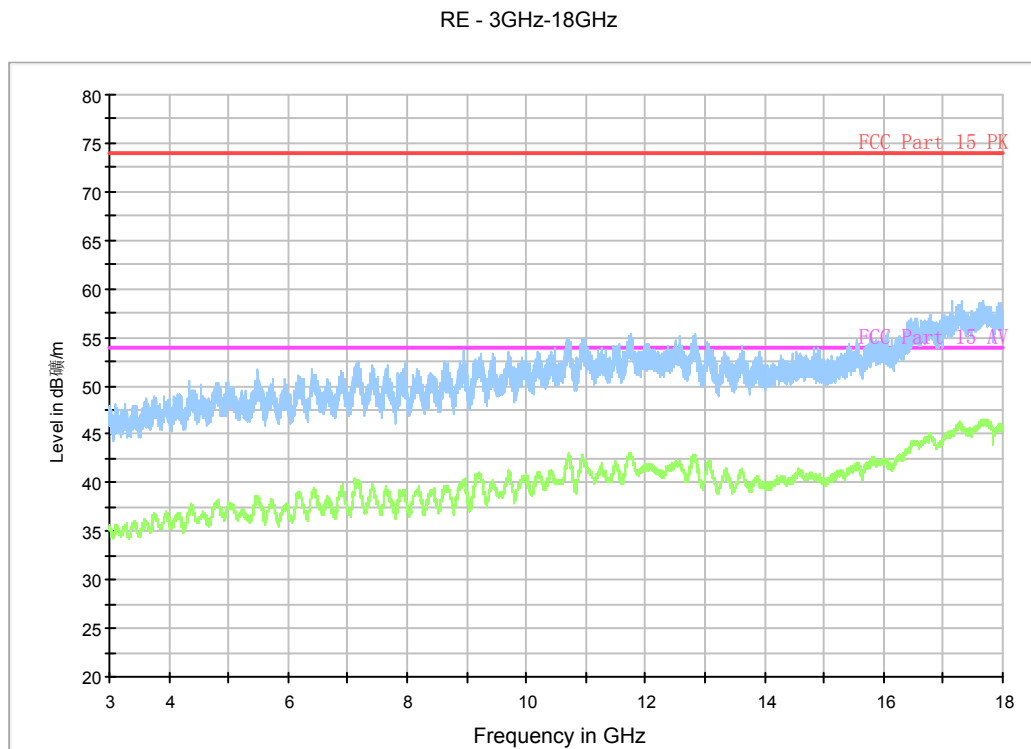


Fig.A.6.2.21 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 3 GHz-18 GHz)

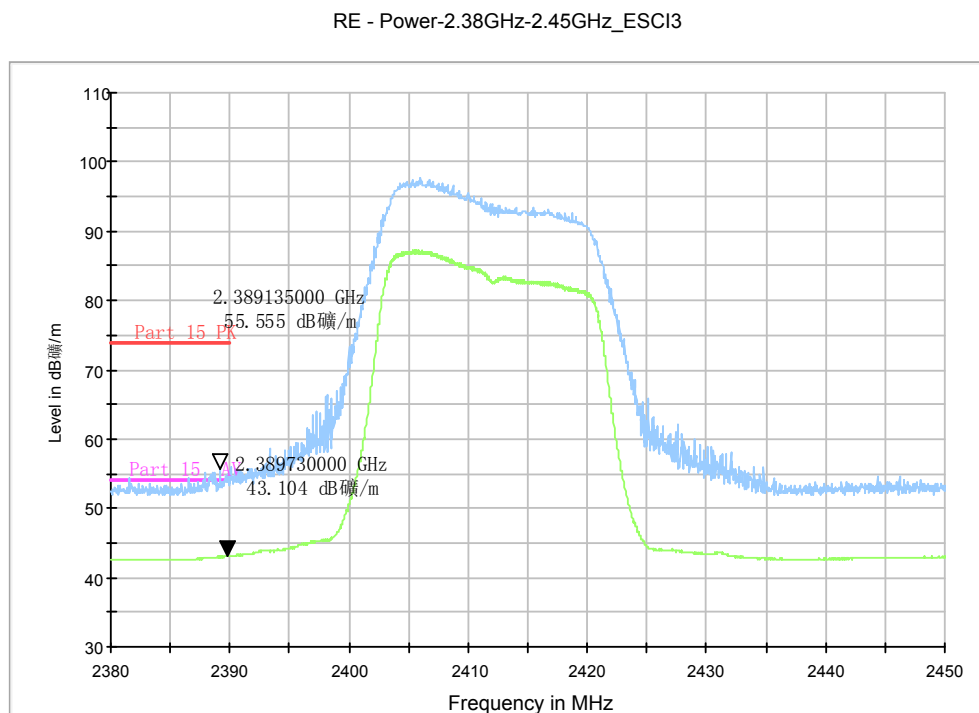


Fig.A.6.2.22 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

RE - 1GHz-3GHz_ESCI3

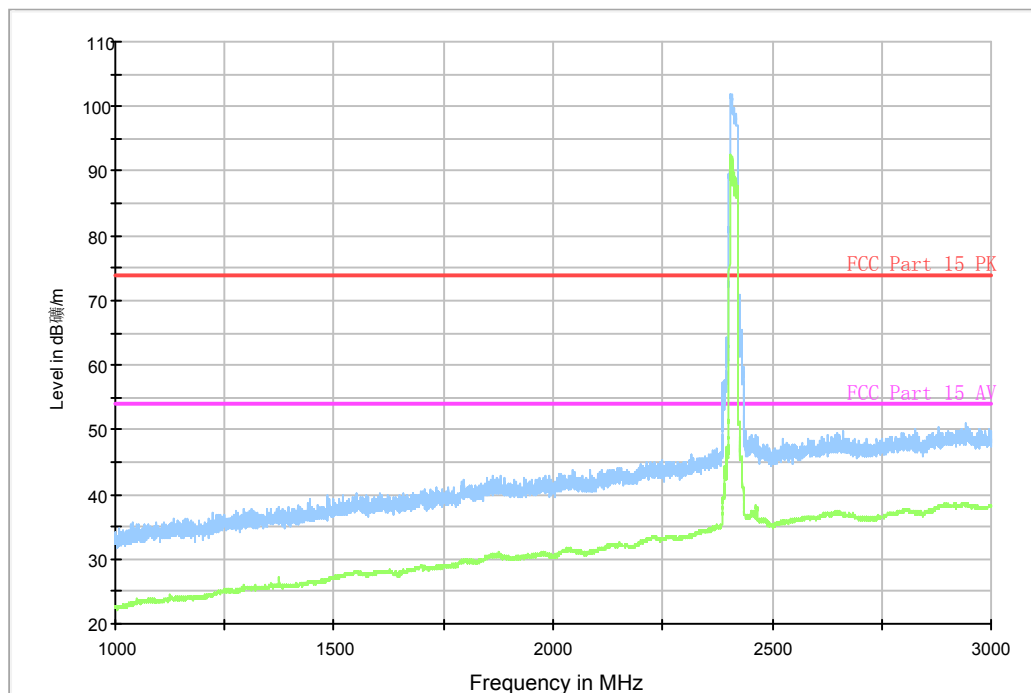


Fig.A.6.2.23 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 1 GHz-3 GHz)

RE - 3GHz-18GHz

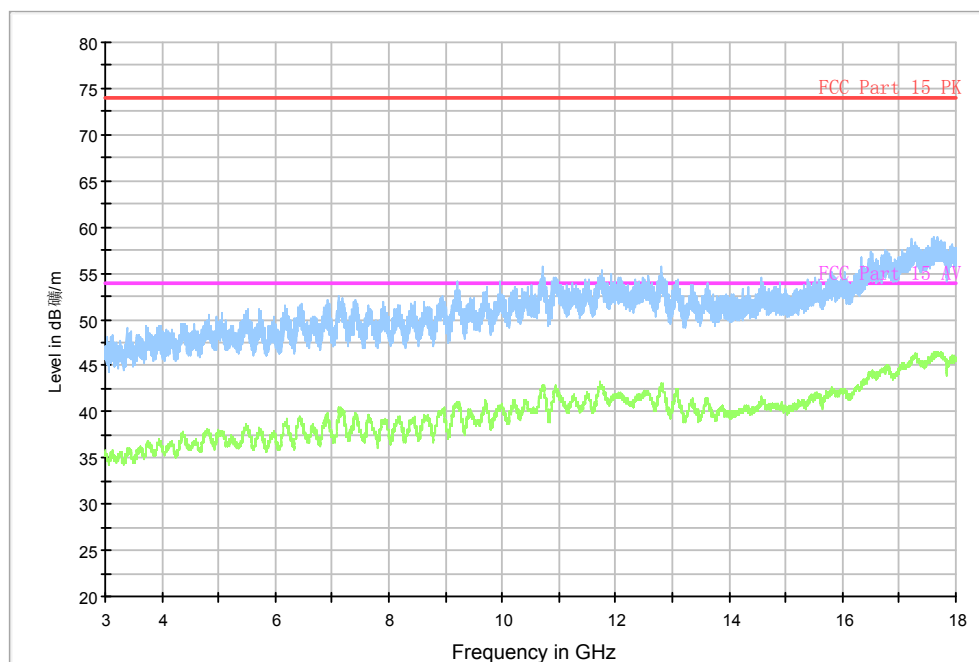


Fig.A.6.2.24 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 3 GHz-18 GHz)

GHz)

RE 30MHz-1GHz

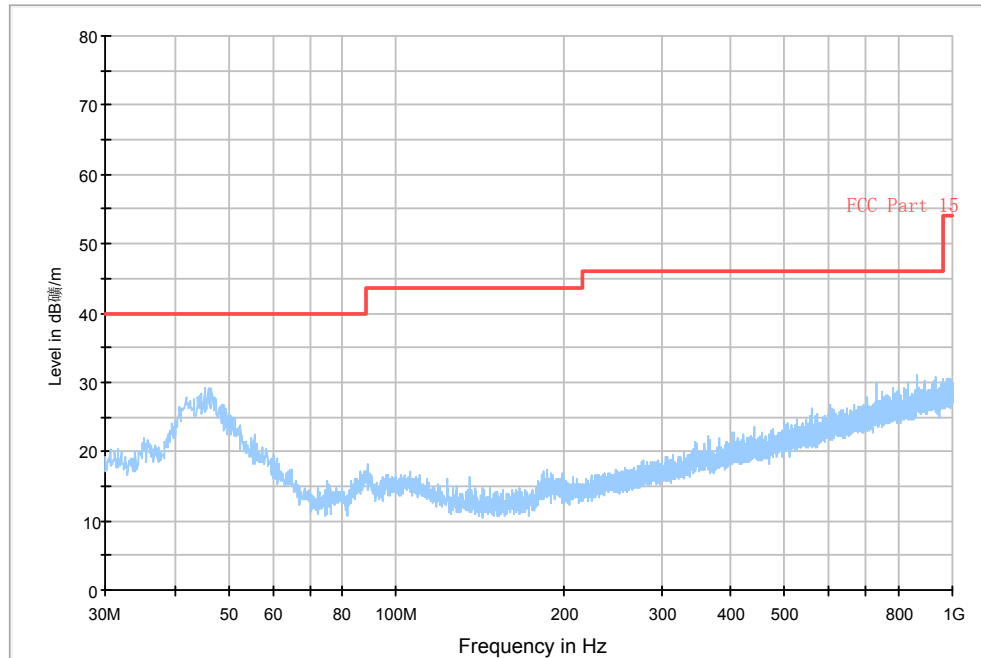


Fig.A.6.2.25 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 30 MHz-1 GHz)

RE - 1GHz-3GHz_ESC13

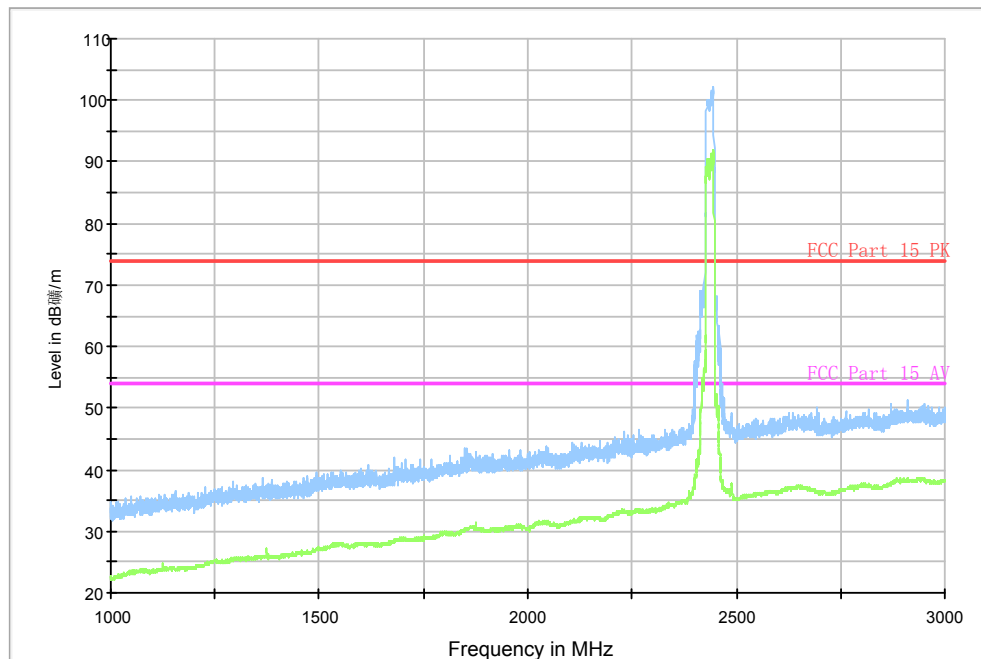


Fig.A.6.2.26 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 1 GHz-3 GHz)

RE - 3GHz-18GHz

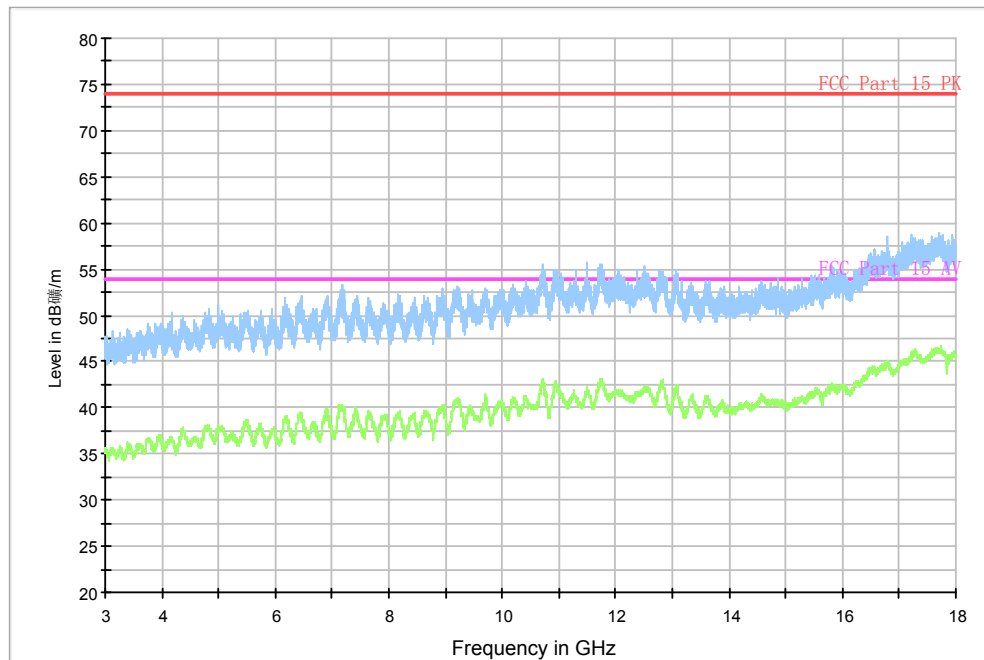


Fig.A.6.2.27 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 3 GHz-18 GHz)

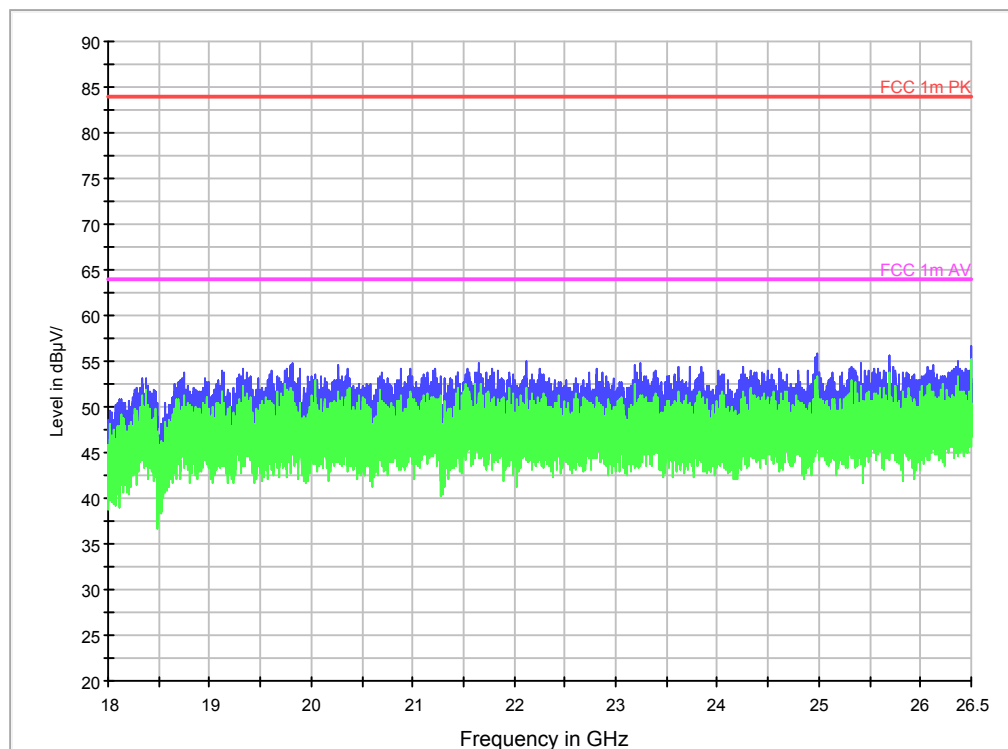


Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz –

26.5GHz)

RE - Power-2.45GHz-2.5GHz_ESC13

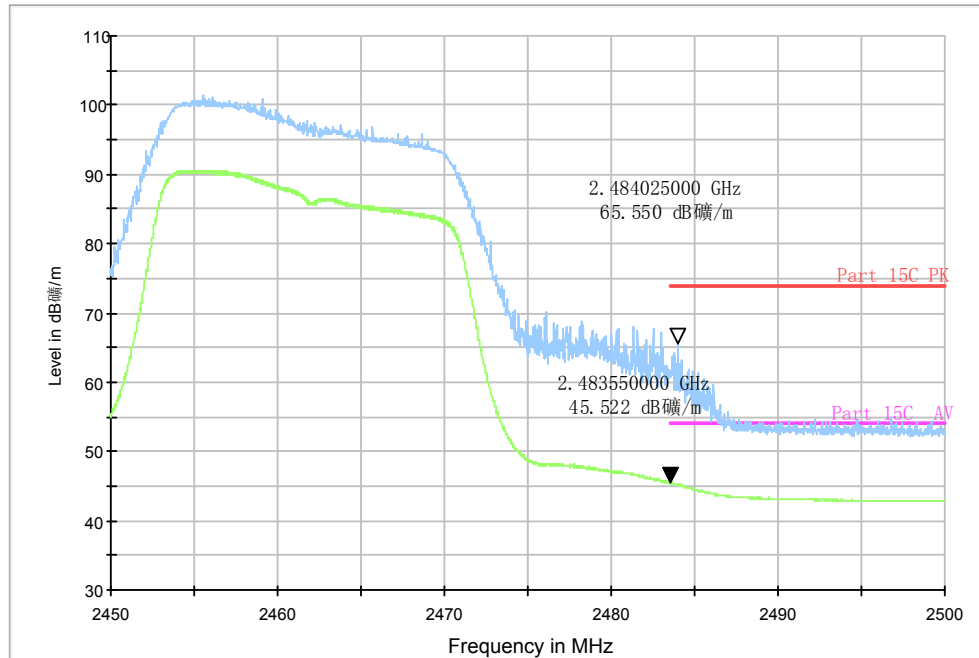


Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

RE - 1GHz-3GHz_ESC13

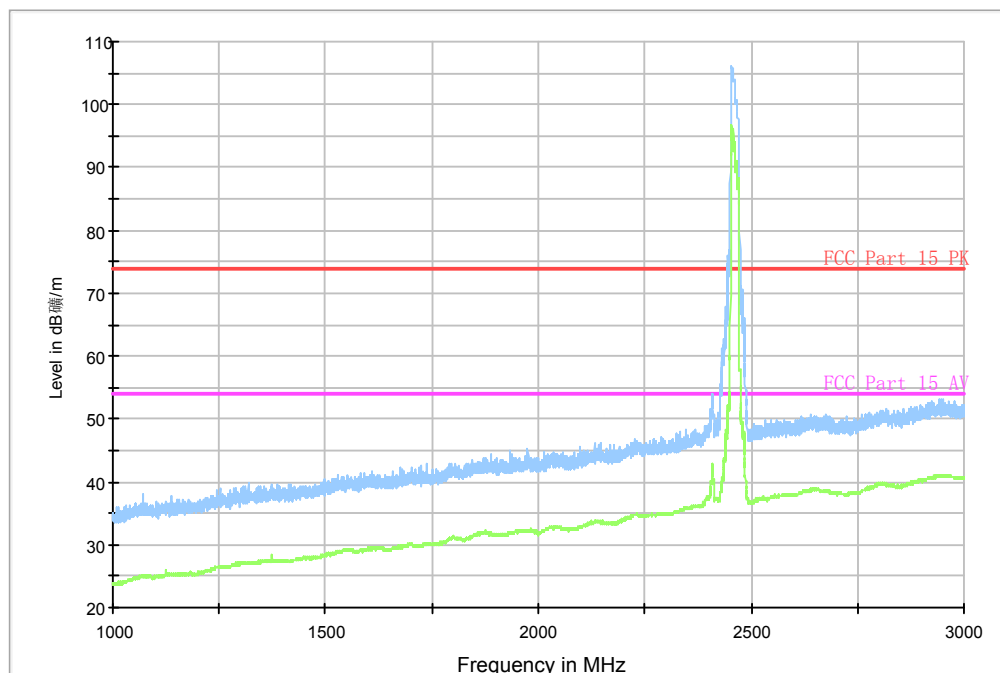


Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3 GHz)

RE - 3GHz-18GHz

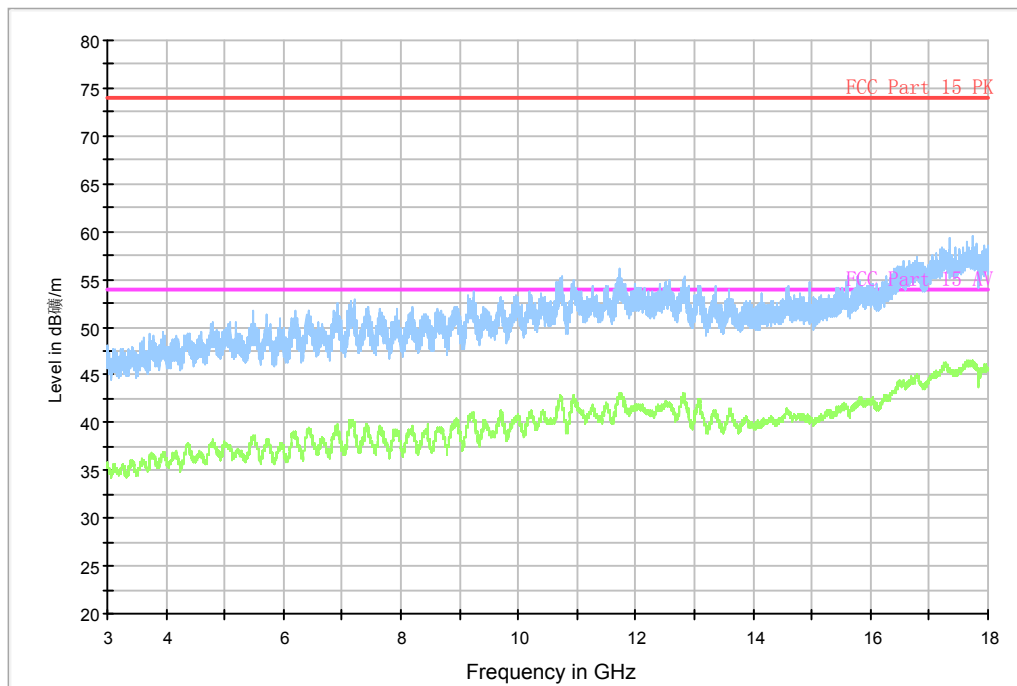


Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

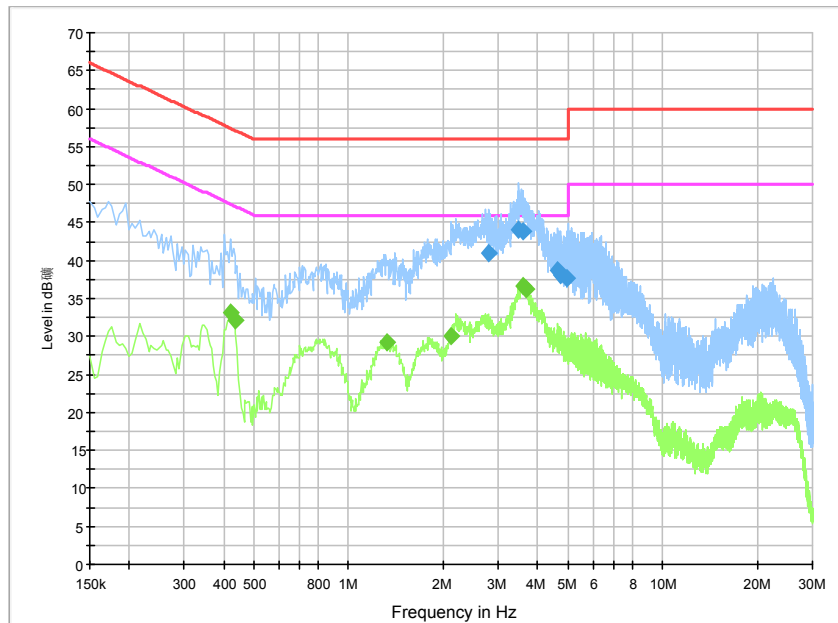


Fig.A.7.1 AC Powerline Conducted Emission-802.11b with CBA0066AG0C1

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.809500	40.9	GND	L1	10.4	15.1	56.0
3.493500	44.1	GND	L1	10.4	11.9	56.0
3.606000	44.0	GND	L1	10.4	12.0	56.0
4.650000	38.7	GND	L1	10.5	17.3	56.0
4.740000	38.0	GND	L1	10.5	18.0	56.0
4.965000	37.8	GND	L1	10.5	18.2	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.420000	33.2	GND	N	10.4	14.2	47.4
0.433500	32.1	GND	N	10.4	15.1	47.2
1.329000	29.2	GND	N	10.4	16.8	46.0
2.121000	30.0	GND	L1	10.4	16.0	46.0
3.592500	36.6	GND	L1	10.4	9.4	46.0
3.660000	36.1	GND	L1	10.4	9.9	46.0

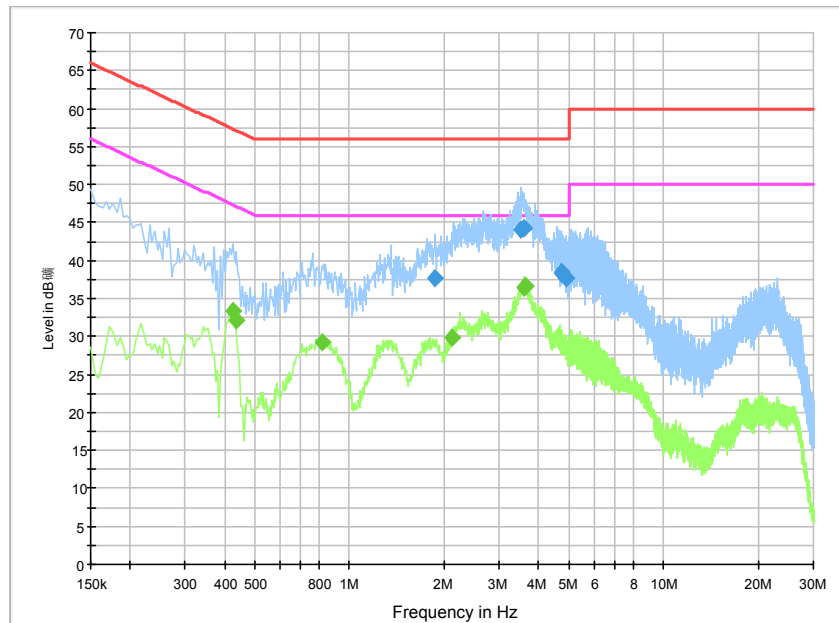


Fig.A.7.2 AC Powerline Conducted Emission-Idle with CBA0066AG0C1

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.878000	37.7	GND	N	10.4	18.3	56.0
3.507000	44.1	GND	L1	10.4	11.9	56.0
3.606000	44.3	GND	L1	10.4	11.7	56.0
4.713000	38.3	GND	L1	10.5	17.7	56.0
4.731000	38.4	GND	L1	10.5	17.6	56.0
4.897500	37.7	GND	L1	10.5	18.3	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.424500	33.4	GND	N	10.4	13.9	47.4
0.433500	32.1	GND	N	10.4	15.1	47.2
0.816000	29.3	GND	N	10.4	16.7	46.0
2.112000	29.8	GND	L1	10.4	16.2	46.0
3.583500	36.5	GND	L1	10.4	9.5	46.0
3.619500	36.6	GND	L1	10.4	9.4	46.0

ANNEX B: Accreditation Certificate



China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L0570)

Telecommunication Technology Labs,
Academy of Telecommunication Research, MIIT
No.52, Huayuan North Road, Haidian District, Beijing, China
No.51, Xueyuan Road, Haidian District, Beijing, China
TCL International E City, No. 1001 Zhongshanyuan Road, Nanshan
District, Shenzhen, Guangdong Province

is accredited in accordance with ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence to undertake testing and calibration service as described in the schedule attached to this certificate.

The scope of accreditation is detailed in the attached schedule bearing the same registration number as above. The schedule form an integral part of this certificate.

Date of Issue: 2015-11-13
Date of Expiry: 2017-06-19
Date of Initial Accreditation: 1998-07-03

Signed on behalf of China National Accreditation Service for Conformity Assessment 

China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is a signatory of the International Laboratory Accreditation Cooperation Mutual Recognition Arrangement (ILAC MRA) and the Asia Pacific Laboratory Accreditation Cooperation Mutual Recognition Arrangement (APLAC MRA). The validity of the certificate can be checked on CNAS website at <http://www.cnas.org.cn/english/findanaccreditedbody/index.shtml>

END OF REPORT