

Measurement Results:

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	Р
	4	1 GHz ~ 3 GHz	Fig.A.6.2.2	Р
	'	3 GHz ~ 18 GHz	Fig.A.6.2.3	Р
		9 kHz ~30 MHz	Fig.A.6.2.4	Р
	6	30 MHz ~1 GHz	Fig.A.6.2.5	Р
802.11b		1 GHz ~ 3 GHz	Fig.A.6.2.6	Р
		3 GHz ~ 18 GHz	Fig.A.6.2.7	Р
		18 GHz~ 26.5 GHz	Fig.A.6.2.8	Р
Po	Power	2.45GHz ~2.5GHz	Fig.A.6.2.9	Р
	11	1 GHz ~ 3 GHz	Fig.A.6.2.10	Р
	11	3 GHz ~ 18 GHz	Fig.A.6.2.11	Р

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
	Power	2.38GHz ~2.43GHz	Fig.A.6.2.12	Р
	1	1 GHz ~ 3 GHz	Fig.A.6.2.13	Р
	ı	3 GHz ~ 18 GHz	Fig.A.6.2.14	Р
		30 MHz ~1 GHz	Fig.A.6.2.15	Р
902 11a	6	1 GHz ~ 3 GHz	Fig.A.6.2.16	Р
802.11g		3 GHz ~ 18 GHz	Fig.A.6.2.17	Р
		18 GHz~ 26.5 GHz	Fig.A.6.2.18	Р
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.19	Р
	11	1 GHz ~ 3 GHz	Fig.A.6.2.20	Р
	11	3 GHz ~ 18 GHz	Fig.A.6.2.21	Р

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
	Power	2.38GHz ~2.45GHz	Fig.A.6.2.22	Р
	4	1 GHz ~ 3 GHz	Fig.A.6.2.23	Р
	'	3 GHz ~ 18 GHz	Fig.A.6.2.24	Р
		30 MHz ~1 GHz	Fig.A.6.2.25	Р
802.11n	6 Power	1 GHz ~ 3 GHz	Fig.A.6.2.26	Р
(HT20)		3 GHz ~ 18 GHz	Fig.A.6.2.27	Р
		18 GHz~ 26.5 GHz	Fig.A.6.2.28	Р
		2.45GHz ~2.5GHz	Fig.A.6.2.29	Р
	11	1 GHz ~ 3 GHz	Fig.A.6.2.30	Р
	11	3 GHz ~ 18 GHz	Fig.A.6.2.31	Р



802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
	Power	2.38GHz ~2.45GHz	Fig.A.6.2.32	Р
	3	1 GHz ~ 3 GHz	Fig.A.6.2.33	Р
	3	3 GHz ~ 18 GHz	Fig.A.6.2.34	Р
		30 MHz ~1 GHz	Fig.A.6.2.35	Р
802.11n	6	1 GHz ~ 3 GHz	Fig.A.6.2.36	Р
(HT40)		3 GHz ~ 18 GHz	Fig.A.6.2.37	Р
		18 GHz~ 26.5 GHz	Fig.A.6.2.38	Р
		2.45GHz ~2.5GHz	Fig.A.6.2.39	Р
	9	1 GHz ~ 3 GHz	Fig.A.6.2.40	Р
	9	3 GHz ~ 18 GHz	Fig.A.6.2.41	Р

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

 $\ensuremath{P_{\text{Mea}}}$ is the field strength recorded from the instrument.

The measurement results are obtained as described below:

 $Result = P_{Mea} + A_{Rpl} = P_{Mea} + Cable Loss + Antenna Factor$

802.11b

Ch1

Fragues ov (MI Iz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2382.855	58.4	-38.8	27.7	69.500	Н
17962.500	62.8	-17.7	45.6	34.900	Н
17767.500	62.5	-18.5	45.6	35.400	Н
17916.500	62.5	-17.7	45.6	34.600	Н
17771.500	62.5	-18.5	45.6	35.400	V
17689.500	62.4	-18.9	45.6	35.700	Н

Ch6

Eroguanov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17745.500	62.8	-18.5	45.6	35.700	Н
17938.000	62.5	-17.7	45.6	34.600	V
17983.500	62.4	-17.7	45.6	34.500	Н
17896.500	62.2	-18.5	45.6	35.100	V
17909.500	62.2	-18.5	45.6	35.100	V
17813.000	62.1	-18.5	45.6	35.000	Н



Ch11

Fraguenov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2489.680	59.1	-38.9	27.7	70.300	Н
17933.000	62.5	-17.7	45.6	34.600	Н
17775.500	62.4	-18.5	45.6	35.300	V
17905.000	62.2	-18.5	45.6	35.100	V
17915.000	62.1	-17.7	45.6	34.200	V
17988.000	62.1	-17.7	45.6	34.200	V

802.11g

Ch1

Frequency(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
i requericy(ivii iz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2384.810	58.1	-38.8	27.7	69.200	V
17990.500	62.4	-17.7	45.6	34.500	Н
17814.000	62.4	-18.5	45.6	35.300	V
17956.000	62.3	-17.7	45.6	34.400	V
17871.000	62.3	-18.5	45.6	35.200	Н
17906.500	62.1	-18.5	45.6	35.000	Н

Ch6

Fraguenov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17918.000	63.0	-17.7	45.6	35.100	V
17966.500	62.9	-17.7	45.6	35.000	V
17841.000	62.6	-18.5	45.6	35.500	V
17895.500	62.6	-18.5	45.6	35.500	Н
17935.500	62.5	-17.7	45.6	34.600	V
17932.000	62.5	-17.7	45.6	34.600	П

Ch11

Frequency(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
1 104401107 (1111 12)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2489.445	59.3	-38.9	27.7	70.500	Н
17981.000	62.7	-17.7	45.6	34.800	Н
17857.500	62.4	-18.5	45.6	35.300	V
17891.500	62.2	-18.5	45.6	35.100	V
17983.500	62.1	-17.7	45.6	34.200	V
17970.000	62.1	-17.7	45.6	34.200	Н



802.11n-HT20

Ch1

Fraguenov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2389.230	58.0	-38.8	27.7	69.100	Н
17916.500	62.6	-17.7	45.6	34.700	V
17898.500	62.5	-18.5	45.6	35.400	V
17931.000	62.2	-17.7	45.6	34.300	V
17956.000	62.2	-17.7	45.6	34.300	Н
17579.500	62.0	-18.9	45.6	35.300	Н

Ch6

Frequency(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(WHZ)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17902.000	62.2	-18.5	45.6	35.100	П
17797.000	62.2	-18.5	45.6	35.100	V
17927.000	62.2	-17.7	45.6	34.300	V
17677.500	62.1	-18.9	45.6	35.400	Н
17809.500	62.0	-18.5	45.6	34.900	Н
17971.000	61.9	-17.7	45.6	34.000	Н

Ch11

Fraguenov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2485.275	59.7	-38.9 27.7 70.900		70.900	V
17973.000	63.9	-17.7 45.6 36.000		36.000	Н
17954.000	62.0	62.0 -17.7 45.6 34.100		34.100	V
17741.500	62.0	-18.5	45.6	34.900	Н
17880.000	62.0	-18.5	45.6	34.900	Н
17615.500	00 62.0 -18.9 45.6 35.300		35.300	V	



802.11n-HT40

Ch3

Fraguenov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2381.430	58.3	-38.8	27.7	69.400	Н
17759.500	62.7	-18.5	45.6	35.600	Н
17955.000	62.6	-17.7	45.6 34.700		V
17729.000	62.4	-18.9	45.6	35.700	Н
17722.500	62.4	-18.9	45.6	35.700	V
17874.500	62.3	62.3 -18.5 45.6 35.200		35.200	Н

Ch6


Fraguenov(MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
17876.000	63.6	-18.5	45.6	36.500	V
17861.000	63.0	-18.5	45.6	35.900	Н
17919.500	62.8	-17.7	45.6	34.900	V
17873.500	62.4	-18.5	45.6	35.300	Н
17904.000	62.3	-18.5	45.6	35.200	Н
17950.000	62.3	-17.7	45.6	34.400	V

Ch9

Fraguanov/MHz)	Result	Cable	Antenna	P _{Mea}	Polarization
Frequency(MHz)	(dBuV/m)	Loss(dB)	Factor	(dBuV/m)	
2485.865	60.6	-38.9	27.7	71.800	Н
17733.000	62.3	-18.9	45.6	35.600	Н
17982.500	62.3	-17.7	45.6	34.400	V
17967.500	62.0	-17.7	45.6	34.100	Н
17929.000	62.0	-17.7	45.6	34.100	V
17956.000	62.0	-17.7	45.6	34.100	Н

Test graphs as below:





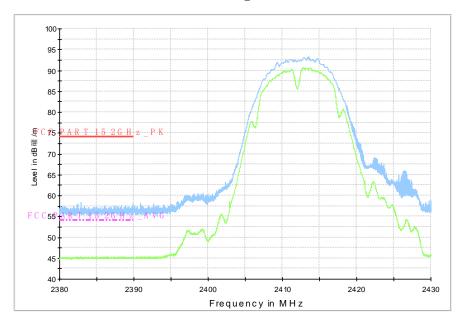


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz - 2.45GHz



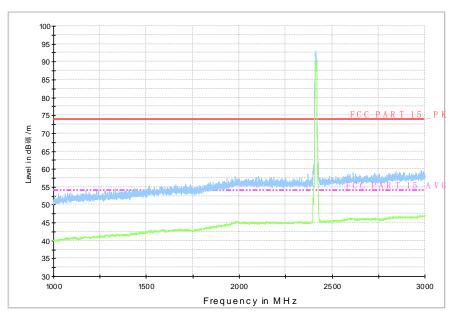


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 1 GHz-3 GHz)



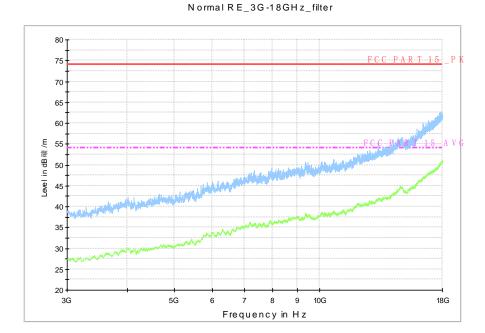


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 3 GHz-18 GHz)

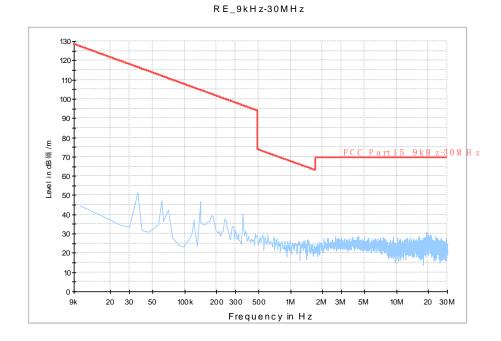


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 9kHz-30 MHz)



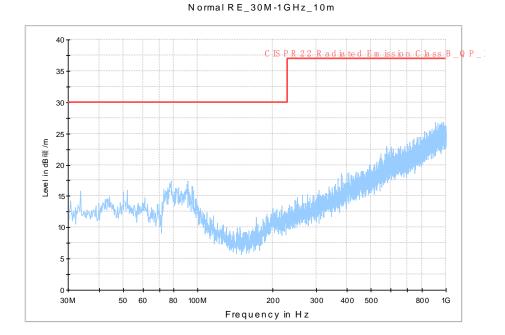


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 30 MHz-1 GHz)

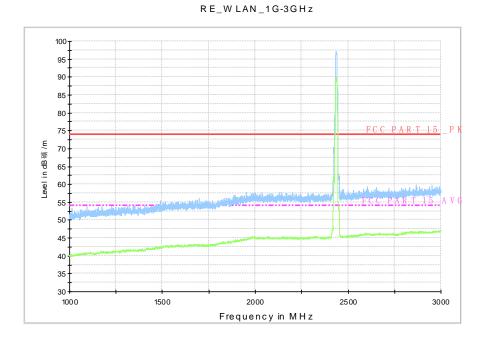


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 1 GHz-3 GHz)



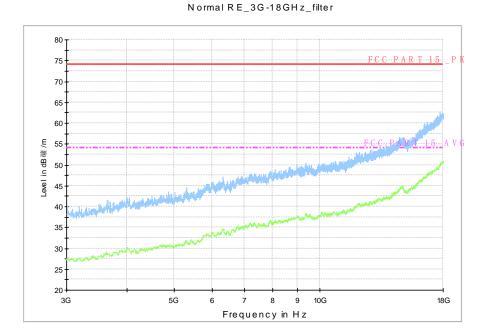


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 3 GHz-18 GHz)

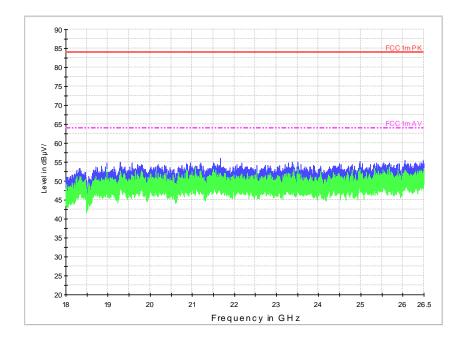



Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 18GHz – 26.5GHz)





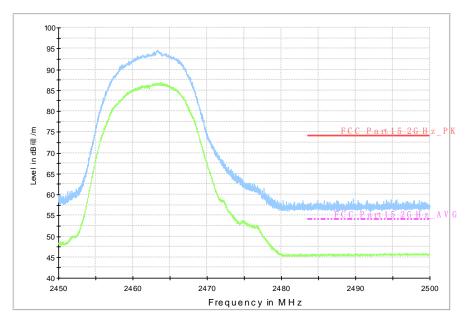


Fig.A.6.2.9 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz



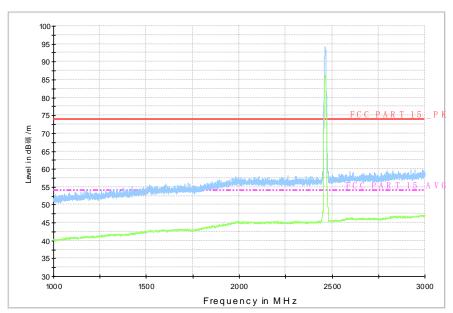


Fig.A.6.2.10 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 1 GHz-3 GHz)



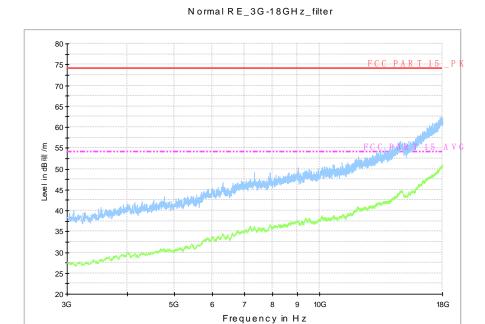


Fig.A.6.2.11 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 3 GHz-18 GHz)

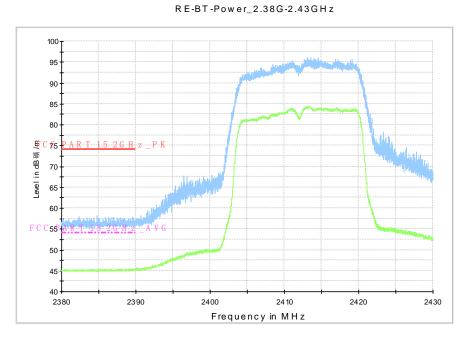


Fig.A.6.2.12 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz



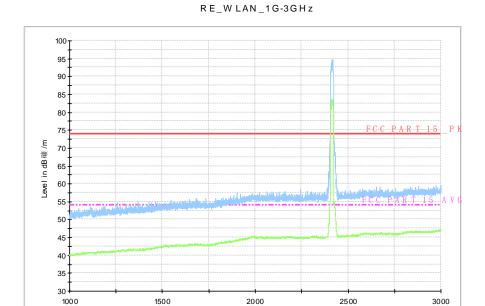


Fig.A.6.2.13 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 1 GHz-3 GHz)

Frequency in MHz

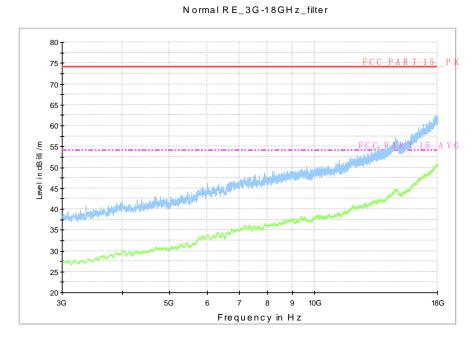


Fig.A.6.2.14 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 3 GHz-18 GHz)



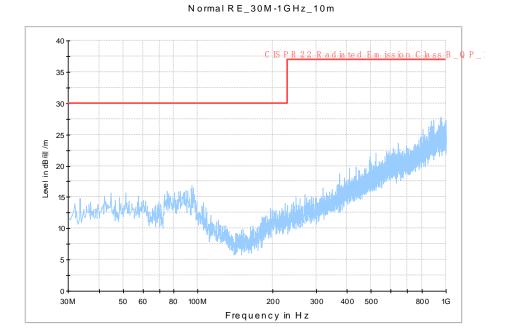


Fig.A.6.2.15 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 30 MHz-1 GHz)

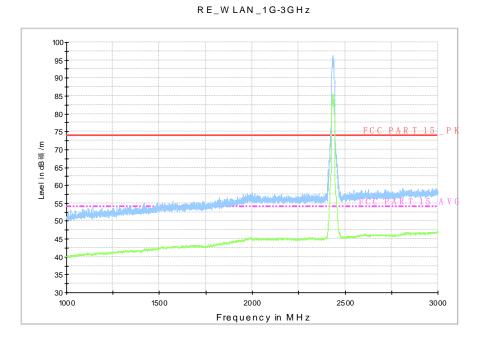


Fig.A.6.2.16 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 1 GHz-3 GHz)



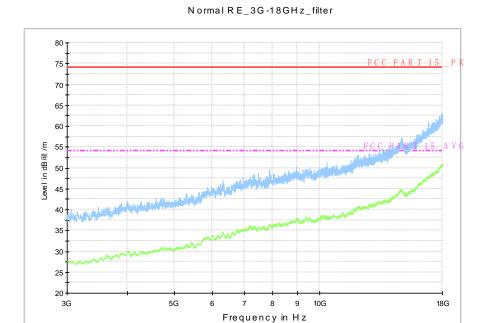


Fig.A.6.2.17 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 3 GHz-18 GHz)

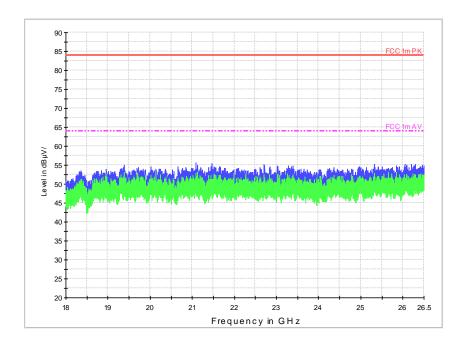



Fig.A.6.2.18 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 18GHz – 26.5GHz)





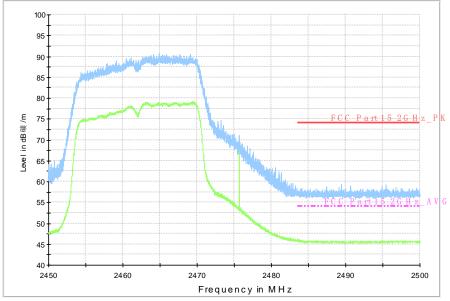



Fig.A.6.2.19 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz



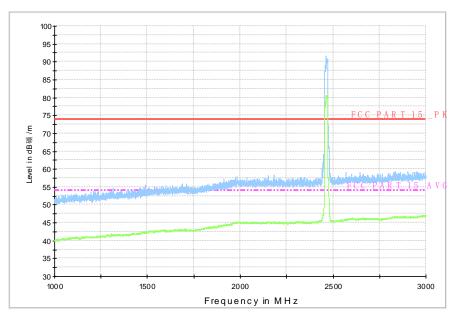



Fig.A.6.2.20 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 1 GHz-3 GHz)





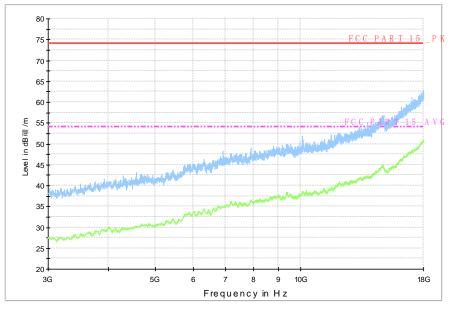



Fig.A.6.2.21 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 3 GHz-18 GHz)



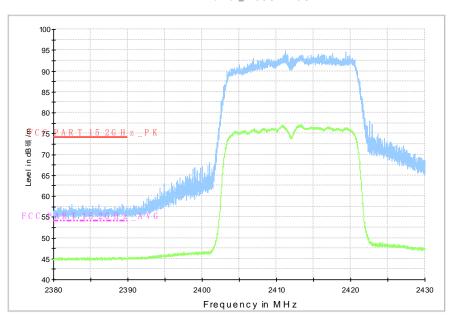



Fig.A.6.2.22 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz





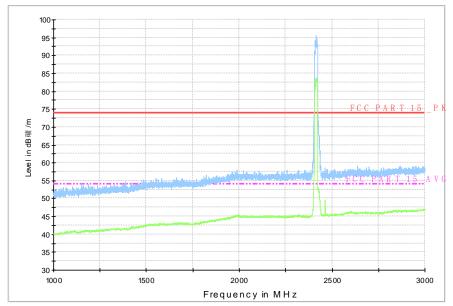


Fig.A.6.2.23 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 1 GHz-3 GHz)

Normal RE_3G-18GHz_filter

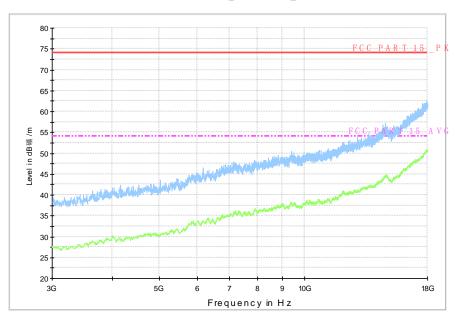


Fig.A.6.2.24 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 3 GHz-18 GHz)



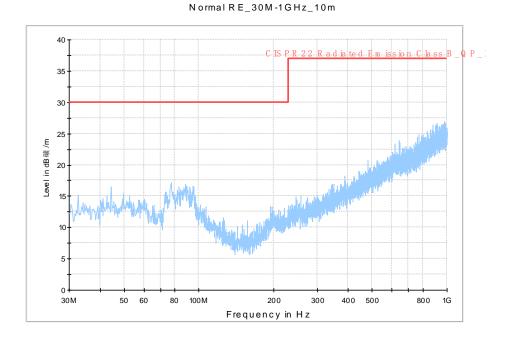


Fig.A.6.2.25 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 30 MHz-1 GHz)

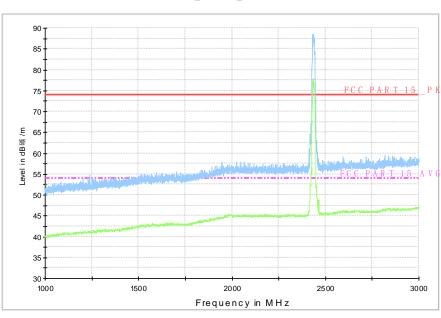


Fig.A.6.2.26 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 1 GHz-3 GHz)



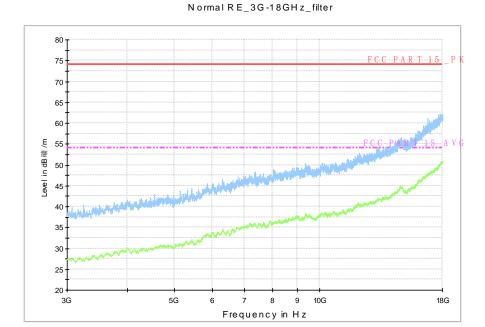


Fig.A.6.2.27 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 3 GHz-18 GHz)

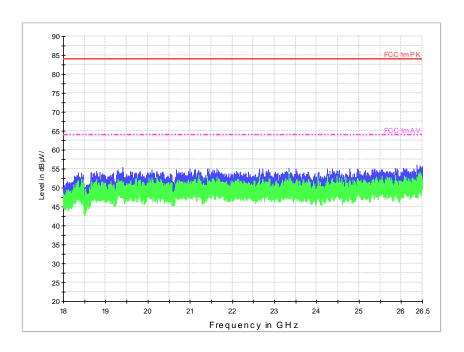



Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz – 26.5GHz)





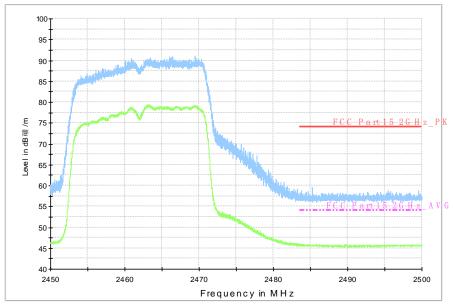


Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz



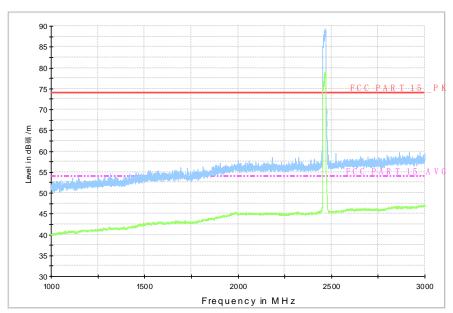


Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3 GHz)



20 -

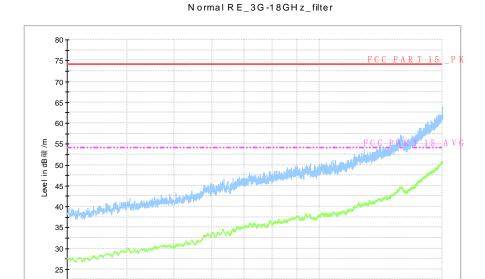


Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)

95 90 80 **₹0 %** Level in dB礦 70 65 60 F C C 55 45 2380 2390 2400 2410 2420 2430 Frequency in MHz

R E-BT-Power_2.38G-2.43GHz

Frequency in Hz

Fig.A.6.2.32 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.45GHz



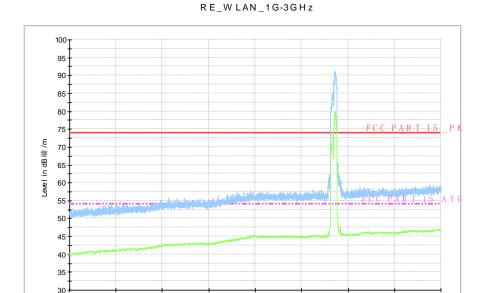


Fig.A.6.2.33 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 1 GHz-3 GHz)

Frequency in MHz

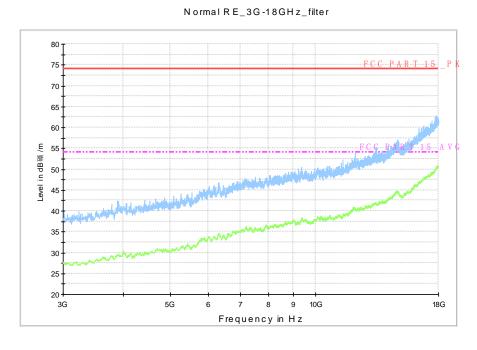


Fig.A.6.2.34 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 3 GHz-18 GHz)



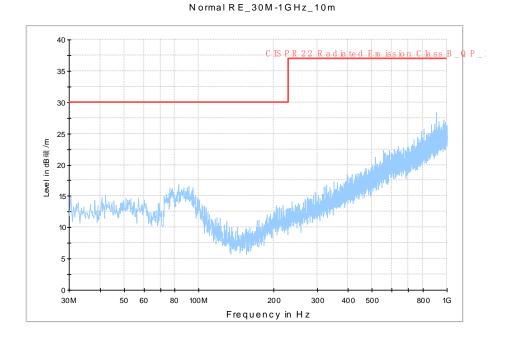


Fig.A.6.2.35 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 30 MHz-1 GHz)

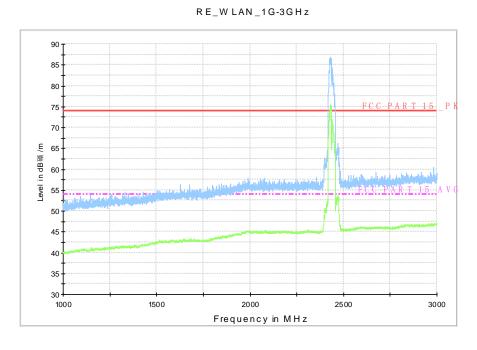


Fig.A.6.2.36 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 1 GHz-3 GHz)



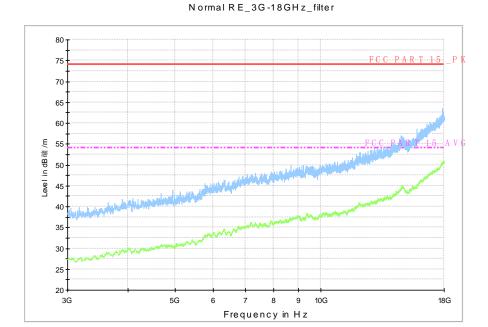


Fig.A.6.2.37 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 3 GHz-18 GHz)


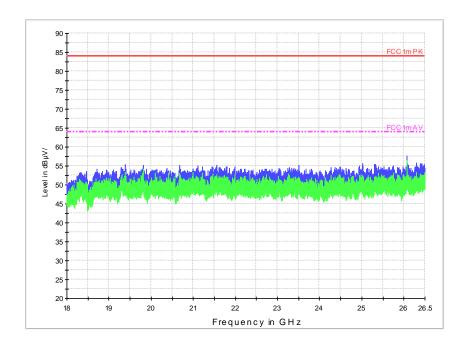


Fig.A.6.2.38 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 18GHz – 26.5GHz)



Level in dB 欒 /m

55

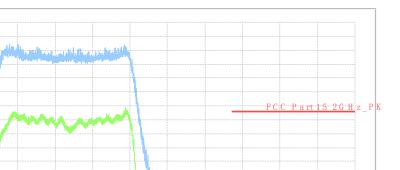

R E-BT-Power_2.45G-2.5GHz

Fig.A.6.2.39 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

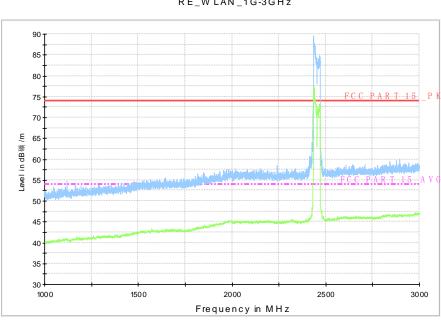


Fig.A.6.2.40 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 1 GHz-3 GHz)

Frequency in MHz



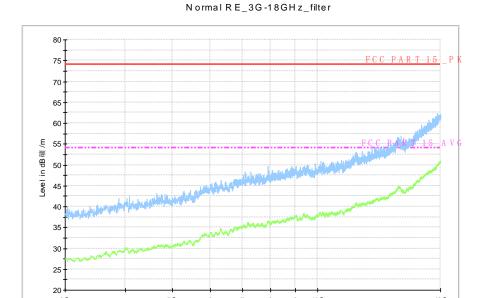


Fig.A.6.2.41 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 3 GHz-18 GHz)

Frequency in Hz



A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.36 Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60



Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (With ch	Conclusion		
(141112)	Ellille (GBAV)	802.11b	Idle		
0.15 to 0.5	66 to 56				
0.5 to 5	56	Fig.A.7.1	Fig.A.7.2	Р	
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range $0.15\,\mathrm{MHz}$ to $0.5\,\mathrm{MHz}$.

WLAN (Average Limit)

Frequency range	Average Limit	Result With c	Conclusion	
(MHz)	(dBμV)	802.11b	Idle	
0.15 to 0.5	56 to 46			
0.5 to 5	46	Fig.A.7.1	Fig.A.7.2	Р
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15~MHz to 0.5~MHz.

Conclusion: Pass

Test graphs as below:

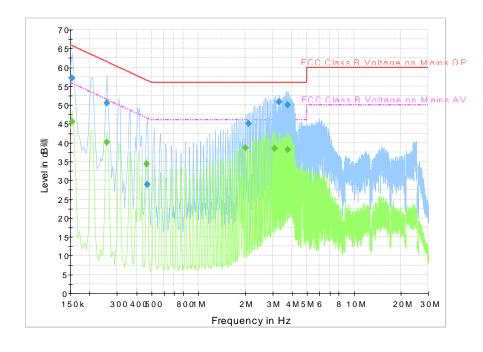


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1



Frequency	QuasiPeak	Meas.	Bandwidth	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	Time	(kHz)			(dB)	(dB)	(dBµV)
		(ms)						
0.222000	13.1	2000.0	9.000	On	L1	19.8	49.6	62.7
0.384000	9.6	2000.0	9.000	On	L1	19.9	48.6	58.2
1.203000	31.0	2000.0	9.000	On	L1	19.7	25.0	56.0
2.107500	20.9	2000.0	9.000	On	L1	19.6	35.1	56.0
3.336000	44.7	2000.0	9.000	On	L1	19.4	11.3	56.0
3.718500	51.5	2000.0	9.000	On	L1	19.5	4.5	56.0

Final Result 2

Frequency	CAverage	Meas.	Bandwidth	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	Time	(kHz)			(dB)	(dB)	(dBµV)
		(ms)						
0.712500	33.6	2000.0	9.000	On	N	19.8	12.4	46.0
0.762000	34.1	2000.0	9.000	On	N	19.8	11.9	46.0
1.909500	10.3	2000.0	9.000	On	L1	19.7	35.7	46.0
3.570000	42.6	2000.0	9.000	On	L1	19.5	3.4	46.0
3.673500	43.1	2000.0	9.000	On	L1	19.5	2.9	46.0
6.270000	28.5	2000.0	9.000	On	L1	19.6	21.5	50.0