



TEST REPORT

No. I16Z40348-EMC01

for

TCL Communication Ltd

HSDPA/HSUPA/HSPA+/UMTS quad band / GSM quad band/LTE 3

band mobile phone

Model Name: 6071W

FCC ID: 2ACCJN009

with

Hardware Version: 01

Software Version: 01

Issued Date: 2016-04-18

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I16Z40348-EMC01	Rev.0	1 st edition	2016-04-18

CONTENTS

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China
100191

1.2. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-04-01

Testing End Date: 2016-04-02


1.4. Signature



Zhang Hui
(Prepared this test report)



Qu Pengfei
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/HSUPA/HSPA+/UMTS quad band / GSM quad band/LTE 3 band mobile phone
Model Name	6071W
FCC ID	2ACCJN009
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT3	014636000003132	01	01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	USB Cable	/	1640348DC002
AE3	USB Cable	/	1640348DC003
AE4	Travel charger	/	16TCT-CH-0444
AE5	Travel charger	/	16TCT-CH-0436

AE1

Model	TLp030F2
Manufacturer	SCUD
Capacitance	3000mAh
Nominal voltage	3.84V

AE2,AE3

Model	CDA0000078CF
Manufacturer	LUXSHARE
Length of cable	99cm

AE4,AE5

Model	QC10 US
Manufacturer	BYD
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

Note: The USB cables are shielded.



3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT3 + AE1 + AE2 + AE4	Charging mode
Set.2	EUT3 + AE1 + AE2	USB mode

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-15 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	Section 5	B.1	P	A
2	Conducted Emission	15.107(a)	Section 5	B.2	P	A

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTUR E	CAL DUE DATE	CALIBRATI ON INTERVAL
1	Test Receiver	ESU26	100235	R&S	2017-03-02	1 year
2	Universal Radio Communication Tester	CMW500	143008	R&S	2016-12-09	1 year
3	LISN	ENV216	101200	R&S	2016-07-07	1 year
4	EMI Antenna	VULB 9163	9163-301	Schwarzbeck	2017-12-16	3 years
5	EMI Antenna	3115	6914	ETS-Lindgren	2016-12-15	3 years
6	Test Receiver	ESCI7	100948	R&S	2016-07-07	1 year
7	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
10	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charging Mode/Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17977.050	51.1	-17.7	45.6	23.200	HORIZONTAL
17677.000	51.1	-18.9	45.6	24.400	HORIZONTAL
17967.700	51.0	-17.7	45.6	23.100	VERTICAL
17930.300	50.7	-17.7	45.6	22.800	HORIZONTAL
17964.300	50.7	-17.7	45.6	22.800	VERTICAL
17934.550	50.6	-17.7	45.6	22.700	HORIZONTAL

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17961.750	61.4	-17.7	45.6	33.500	HORIZONTAL
17868.250	61.2	-18.5	45.6	34.100	HORIZONTAL
17994.050	61.1	-17.7	45.6	33.200	HORIZONTAL
17930.300	61.0	-17.7	45.6	33.100	HORIZONTAL
17931.150	60.9	-17.7	45.6	33.000	VERTICAL
17805.350	60.9	-18.5	45.6	33.800	VERTICAL

Measurement results for Set.2:**USB Mode/Average detector**

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17974.500	50.9	-17.7	45.6	23.000	HORIZONTAL
17928.600	50.9	-17.7	45.6	23.000	HORIZONTAL
17997.450	50.9	-17.7	45.6	23.000	VERTICAL
17961.750	50.7	-17.7	45.6	22.800	HORIZONTAL
17984.700	50.6	-17.7	45.6	22.700	VERTICAL
17968.550	50.6	-17.7	45.6	22.700	HORIZONTAL

USB Mode/ Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{mea} (dB μ V)	Polarity
17891.200	61.5	-18.5	45.6	34.400	HORIZONTAL
17801.100	61.1	-18.5	45.6	34.000	HORIZONTAL
17582.650	61.0	-18.9	45.6	34.300	VERTICAL
17830.000	60.9	-18.5	45.6	33.800	HORIZONTAL
17954.100	60.9	-17.7	45.6	33.000	HORIZONTAL
17977.900	60.8	-17.7	45.6	32.900	VERTICAL

Note: The measurement results of Set.1 and Set.2 showed here are worst cases of the combinations of different batteries and USB cables.

Charging Mode, Set.1

Normal RE_30M-1GHz_10m

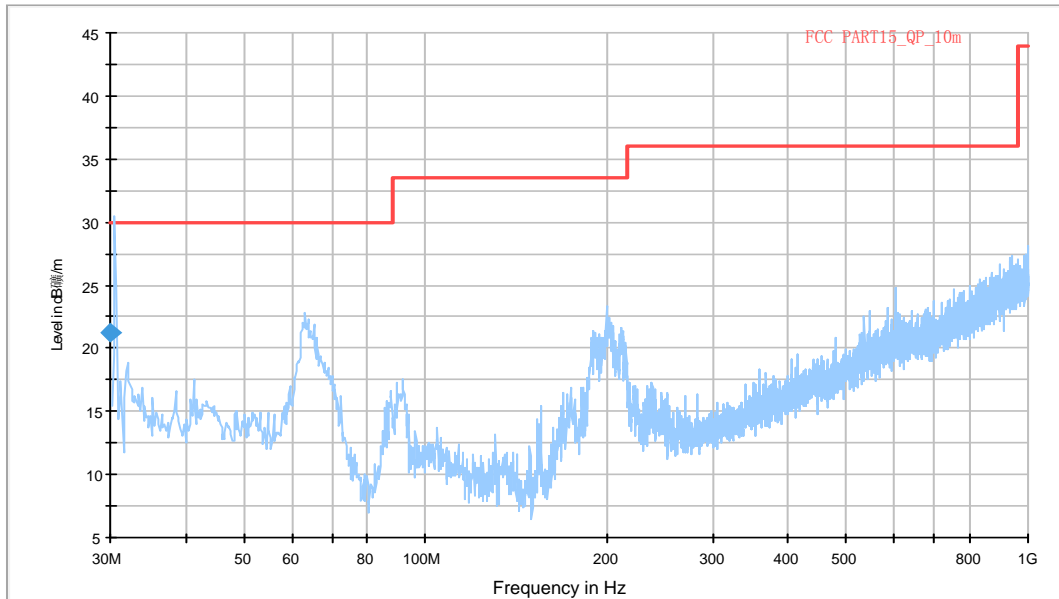


Figure A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.000000	21.3	100.0	V	67.0	-14.2	8.7	30.0

Normal RE_1G-18GHz

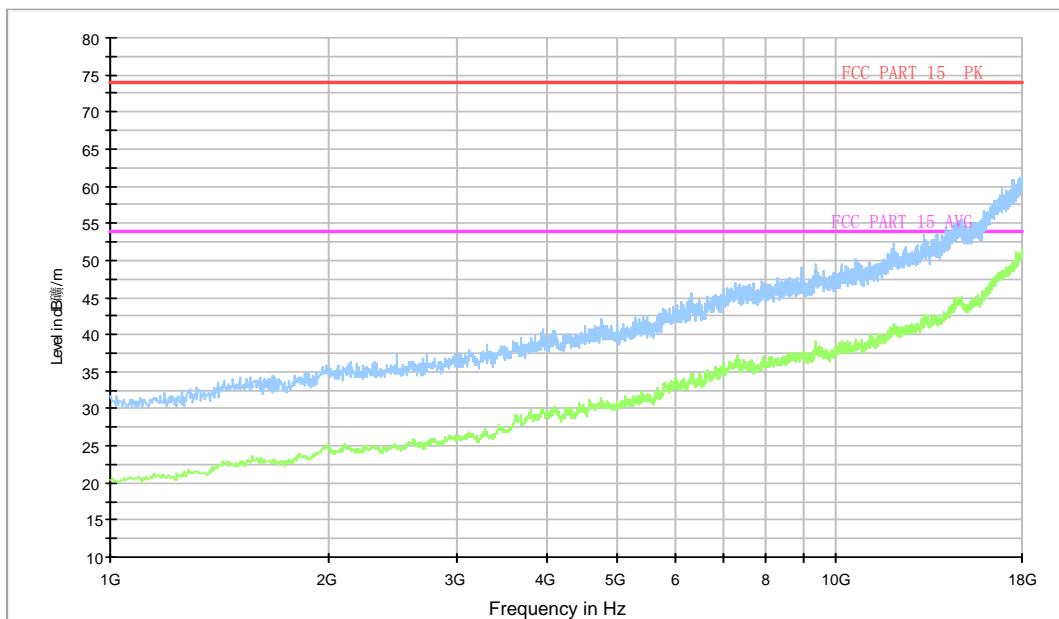


Figure A.2 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.2

Normal RE_30M-1GHz_10m

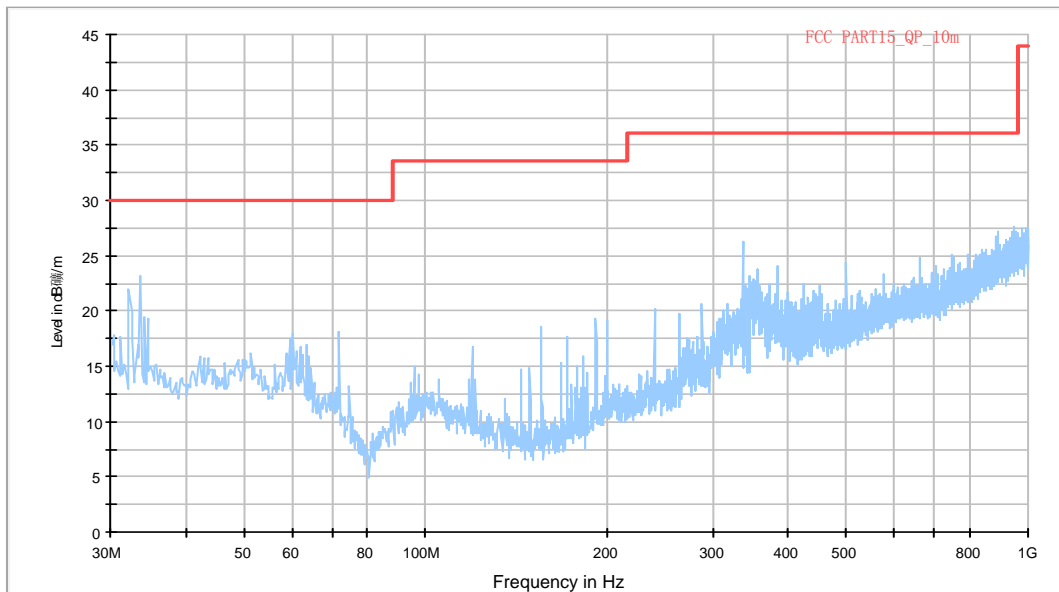


Figure A.3 Radiated Emission from 30MHz to 1GHz

Normal RE_1G-18GHz

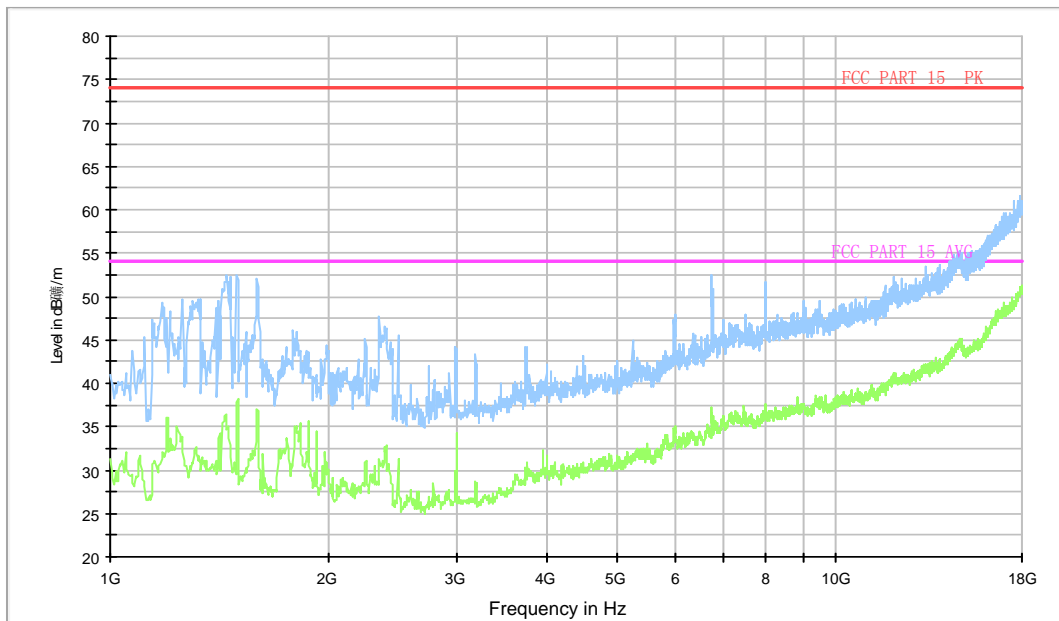


Figure A.4 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 2.9 \text{ dB}$, $k=2$.

Charging Mode, Set.1

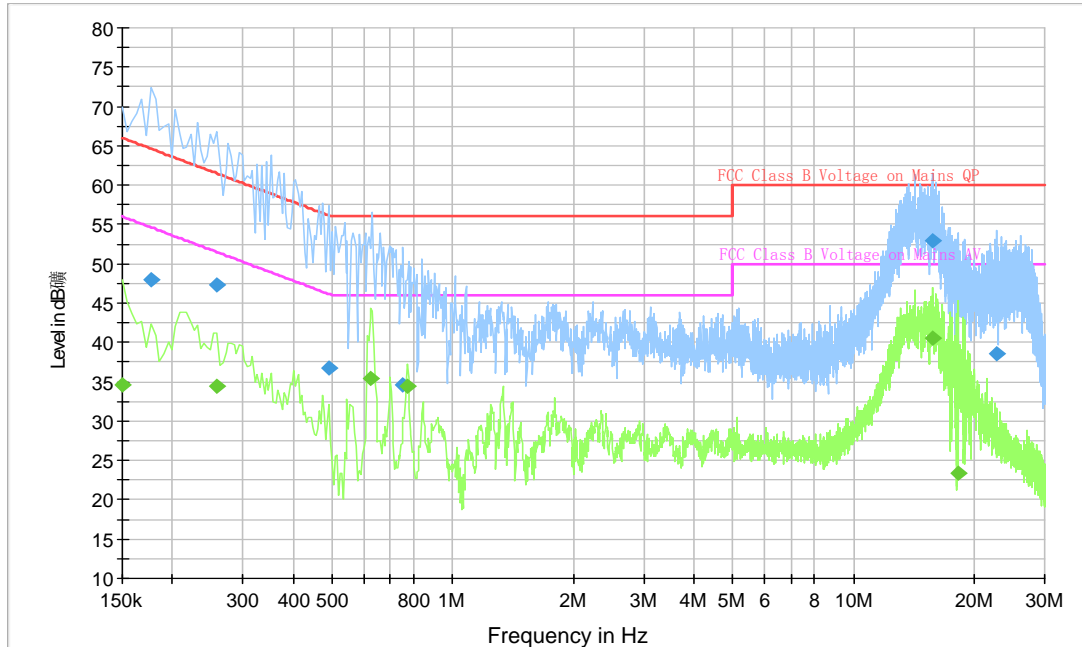


Figure A.5 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	48.0	2000.0	9.000	On	L1	19.8	16.7	64.6
0.258000	47.3	2000.0	9.000	On	L1	19.8	14.2	61.5
0.492000	36.8	2000.0	9.000	On	L1	19.9	19.4	56.1
0.753000	34.7	2000.0	9.000	On	L1	19.8	21.3	56.0
15.783000	52.9	2000.0	9.000	On	L1	20.0	7.1	60.0
22.695000	38.6	2000.0	9.000	On	N	20.0	21.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	34.6	2000.0	9.000	On	L1	20.2	21.4	56.0
0.258000	34.4	2000.0	9.000	On	L1	19.8	17.1	51.5
0.627000	35.5	2000.0	9.000	On	N	19.8	10.5	46.0
0.771000	34.4	2000.0	9.000	On	N	19.8	11.6	46.0
15.765000	40.6	2000.0	9.000	On	L1	20.0	9.4	50.0
18.186000	23.3	2000.0	9.000	On	L1	19.9	26.7	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

USB Mode, Set.2

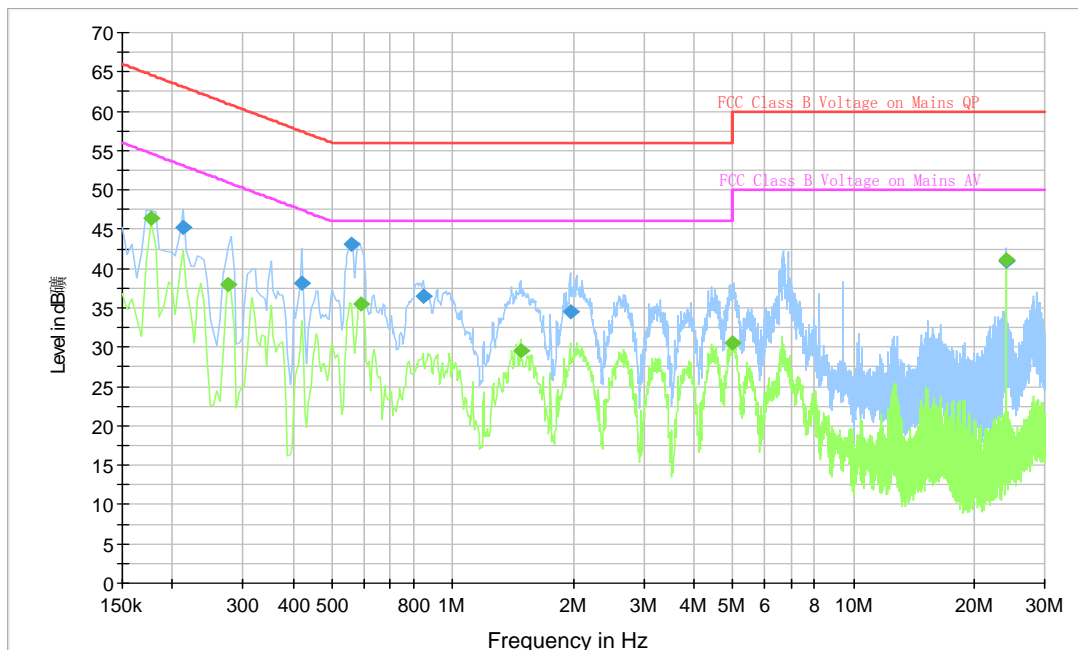


Figure A.6 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.213000	45.2	2000.0	9.000	On	N	19.8	17.9	63.1
0.420000	38.1	2000.0	9.000	On	L1	19.9	19.3	57.4
0.559500	43.1	2000.0	9.000	On	N	19.9	12.9	56.0
0.843000	36.4	2000.0	9.000	On	N	19.8	19.6	56.0
1.963500	34.5	2000.0	9.000	On	L1	19.7	21.5	56.0
23.977500	40.9	2000.0	9.000	On	L1	20.0	19.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time(ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	46.4	2000.0	9.000	On	N	19.8	8.3	54.6
0.276000	38.0	2000.0	9.000	On	N	19.8	12.9	50.9
0.591000	35.5	2000.0	9.000	On	L1	19.8	10.5	46.0
1.477500	29.6	2000.0	9.000	On	N	19.7	16.4	46.0
4.983000	30.6	2000.0	9.000	On	N	19.6	15.4	46.0
23.977500	41.1	2000.0	9.000	On	N	20.1	8.9	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

END OF REPORT