TEST REPORT

No. I15Z40867-GTE02

for

TCL Communication Ltd.

CDMA+LTE mobile phone for Sprint

Model Name: 7046T

FCC ID: 2ACCJN003

with

Hardware Version: HW0001

Software Version: 7046TC01

Issued Date: 2015-05-15

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.733176

CTTL,Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15Z40867-GTE02	Rev.0	1st edition	2015-05-15

CONTENTS

1. Test Laboratory

1.1. Testing Location

Company Name: CTTL,Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191

Postal Code: 100191

1.2. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

Air pressure   980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Testing Start Date: 2015-05-04

Testing End Date: 2015-05-14

1.4. Signature

Shen Yi

(Prepared this test report)

Zhong Nan

(Reviewed this test report)

Sun Xiang Qian

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
Contact Person:	Zhizhou Gong
Contact Email	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260

2.2. Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China. 201203
Contact Person:	Zhizhou Gong
Contact Email	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	CDMA+LTE mobile phone for Sprint
Model Name	7046T
FCC ID	2ACCJN003
Antenna	Integrated
Output power	27.90dBm maximum EIRP measured for LTE Band 25
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
UT08a	86708702001445	HW0001	7046TC01
UT10a	86708702001576	HW0001	7046TC01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Travel Charger

AE1

Type	TLp025A2
Manufacturer	SCUD

AE2

Type	CBA0057AG0C1
Manufacturer	BYD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of CDMA+LTE mobile phone for Sprint with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-14 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
KDB 971168	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r01

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 35 ℃
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	**<** ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 35 ℃
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 35 ℃
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:			
Verdict Column	P	Pass	
	F	Fail	
	NA	Not applicable	
	NM	Not measured	
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report	

LTE Band 26

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	90.635	A.1	P
2	Emission Limit	2.1053/90.691	A.2	P
3	Frequency Stability	2.1055/90.213	A.3	P
4	Occupied Bandwidth	2.1049	A.4	P
5	Emission Bandwidth	2.1049	A.5	P
6	Conducted Spurious Emission	2.1051/90.691	A.6	P

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	Test Receiver	ESU26	100235	R&S	2016/3/2	1 year
2	Test Receiver	ESU26	100376	R&S	2015-10-29	1 year
3	EMI Antenna	VULB 9163	302	Schwarzbeck	2017-1-3	3 year
4	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 year
5	LISN	NV216	101200	R&S	2015-07-07	1 year
6	Universal Radio Communication Tester	CMW500	101675	R&S	2015-07-13	1 year
7	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2016-02-27	1 year
8	Spectrum Analyzer	E4440A	MY48250642	Agilent	2016-03-02	1 year
9	EMI Antenna	9117	167	Schwarzbeck	2016-04-01	3 year
10	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2015-07-15	3 year
11	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 year
12	Signal Generator	N5183A	MY49060052	Agilent	2016-03-02	1 year
13	Climate chamber	SH-241	92007454	ESPEC	2015-12-14	2 year
14	Loop Antenna	HFH2-Z2	829324/007	R&S	2017-12-10	3 year

ANNEX A: MEASUREMENT RESULTS

A.1   OUTPUT POWER

Reference
FCC: 90.635.

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.
This result contains peak output power and ERP/EIRP measurements for the EUT.
In all cases, output power is within the specified limits.

A.1.2 Conducted
A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.
The power was measured with spectrum analyzer's RMS detector.
These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result
LTE band 26

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	823.3	23.00	21.97
		819.0	22.89	22.04
		814.7	22.90	21.65
	1 RB low	823.3	22.98	22.04
		819.0	22.99	22.05
		814.7	22.72	21.66
	50% RB mid	823.3	23.07	21.98
		819.0	22.90	22.18
		814.7	22.90	21.51
	100% RB	823.3	21.93	21.70
		819.0	21.84	20.93
		814.7	21.73	20.55
3MHz	1 RB high	822.5	22.76	21.95
		819.0	22.81	22.04
		815.5	22.66	22.25
	1 RB low	822.5	22.84	21.96
		819.0	22.92	22.04
		815.5	22.70	22.28
	50% RB mid	822.5	21.92	21.42

		819.0	21.98	20.66
		815.5	21.84	21.34
	100% RB	822.5	21.94	20.99
		819.0	21.97	21.05
		815.5	21.74	20.81
5MHz	1 RB high	821.5	22.80	22.55
		819.0	22.63	21.34
		816.5	22.79	22.53
	1 RB low	821.5	22.86	22.53
		819.0	22.71	21.28
		816.5	22.62	22.30
	50% RB mid	821.5	21.88	20.93
		819.0	21.96	21.01
		816.5	21.76	20.90
	100% RB	821.5	21.90	20.92
		819.0	21.97	21.09
		816.5	21.86	21.16
10MHz	1 RB high	819.0	22.77	22.16
	1 RB low	819.0	22.80	22.24
	50% RB mid	819.0	21.97	21.12
	100% RB	819.0	21.94	20.98

Note: Expanded measurement uncertainty is $U = 0.83$ dB, $k = 2$.

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 90.635(b) specifies "The maximum output power of the transmitter for mobile stations is 100 watts(50dBm)".

A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
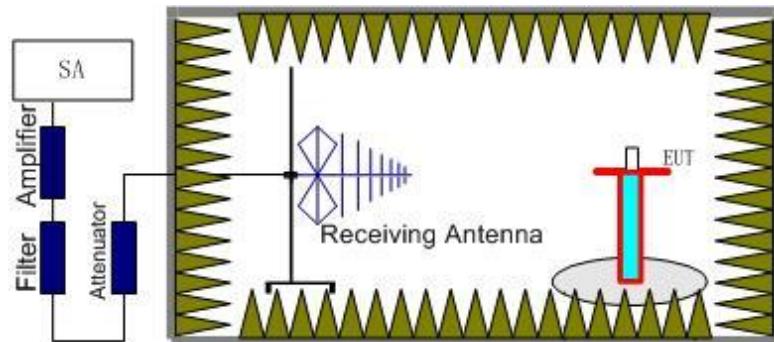
2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.
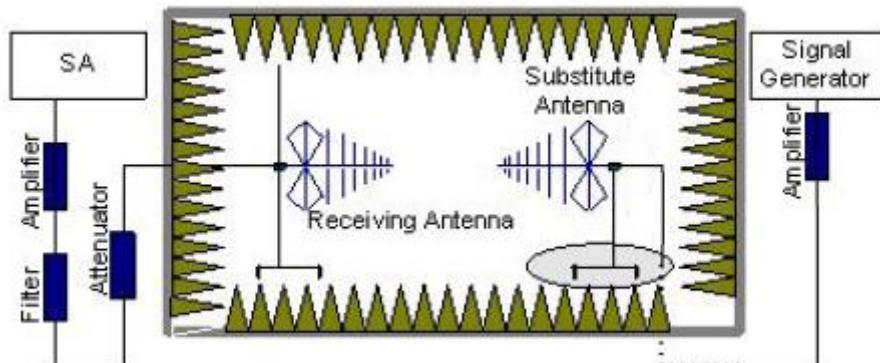
In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded.

The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

   The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

   The measurement results are obtained as described below:

   Power (EIRP) = P_{Mea} - P_{Ag} - P_{cl} - G_a

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15.

A.1.3.3 Measurement result

LTE Band 26- ERP 90.635(b)

Limits: ≤50dBm (100W)

LTE Band 26_1.4MHz_QPSK

Frequency(MHz)	P_{Mea}(dBm)	P_{cl}(dB)	P_{Ag}(dB)	G_a Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
814.70	-19.90	2.13	-45.86	-0.89	2.15	**22.57**	50.00	27.43	H
819.00	-20.50	2.19	-45.84	-1.05	2.15	22.05	50.00	27.95	H
823.30	-19.72	2.24	-45.79	-0.55	2.15	22.23	50.00	27.77	H

LTE Band 26_3MHz_QPSK

Frequency(MHz)	P_{Mea}(dBm)	P_{cl}(dB)	P_{Ag}(dB)	G_a Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
815.50	-20.06	2.14	-45.87	-0.93	2.15	**22.45**	50.00	27.55	H
819.00	-20.47	2.19	-45.84	-1.05	2.15	22.08	50.00	27.92	H
822.50	-19.58	2.23	-45.81	-0.33	2.15	22.18	50.00	27.82	H

LTE Band 26_5MHz_QPSK

Frequency(MHz)	P_{Mea}(dBm)	P_{cl}(dB)	P_{Ag}(dB)	G_a Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
816.50	-20.03	2.16	-45.88	-0.98	2.15	**22.52**	50.00	27.48	H
819.00	-20.68	2.19	-45.84	-1.05	2.15	21.87	50.00	28.13	H
821.50	-20.10	2.22	-45.82	-0.71	2.15	22.06	50.00	27.94	H

LTE Band 26_10MHz_QPSK

Frequency(MHz)	P_{Mea}(dBm)	P_{cl}(dB)	P_{Ag}(dB)	G_a Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
819.00	-20.50	2.19	-45.84	-1.05	2.15	**22.05**	50.00	27.95	H

LTE Band 26_1.4MHz_16QAM

Frequency(MHz)	P$_{Mea}$(dBm)	P$_{cl}$(dB)	P$_{Ag}$(dB)	G$_a$ Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
814.70	-20.51	2.13	-45.86	-0.89	2.15	**21.96**	50.00	28.04	H
819.00	-21.41	2.19	-45.84	-1.05	2.15	21.14	50.00	28.86	H
823.30	-20.63	2.24	-45.79	-0.55	2.15	21.32	50.00	28.68	H

LTE Band 26_3MHz_16QAM

Frequency(MHz)	P$_{Mea}$(dBm)	P$_{cl}$(dB)	P$_{Ag}$(dB)	G$_a$ Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
815.50	-20.80	2.14	-45.87	-0.93	2.15	**21.71**	50.00	28.29	H
819.00	-21.51	2.19	-45.84	-1.05	2.15	21.04	50.00	28.96	H
822.50	-20.74	2.23	-45.81	-0.33	2.15	21.02	50.00	28.98	H

LTE Band 26_5MHz_16QAM

Frequency(MHz)	P$_{Mea}$(dBm)	P$_{cl}$(dB)	P$_{Ag}$(dB)	G$_a$ Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
816.50	-20.66	2.16	-45.88	-0.98	2.15	**21.89**	50.00	28.11	H
819.00	-21.55	2.19	-45.84	-1.05	2.15	21.00	50.00	29.00	H
821.50	-20.91	2.22	-45.82	-0.71	2.15	21.25	50.00	28.75	H

LTE Band 26_10MHz_16QAM

Frequency(MHz)	P$_{Mea}$(dBm)	P$_{cl}$(dB)	P$_{Ag}$(dB)	G$_a$ Antenna Gain(dB)	Correction	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
819.00	-21.54	2.19	-45.84	-1.05	2.15	**21.01**	50.00	28.99	H

Peak ERP(dBm)=P$_{Mea}$(-19.90dBm)-G$_a$(-0.89dBi)-P$_{Ag}$(-45.86dB)-P$_{cl}$(2.13dB)-2.15dB = 22.57dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwdiths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is U = 0.96 dB, k = 2.

A.2 EMISSION LIMIT

Reference
FCC: CFR 2.1053, 90.691
A.2.1 Measurement Method
The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in fully-anechoic chamber FAC-3.
The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 90.691. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Band 26.

The procedure of radiated spurious emissions is as follows:
1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.
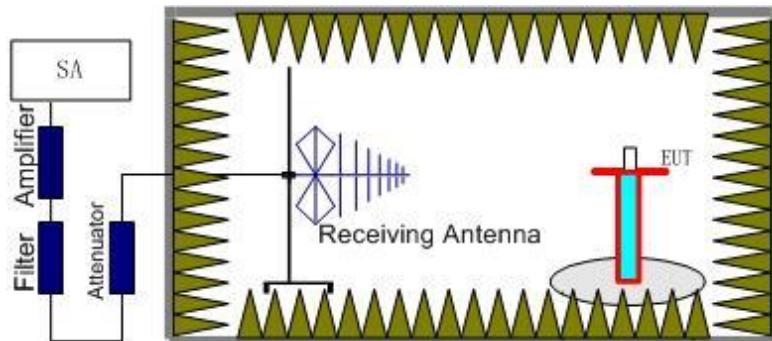
2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.
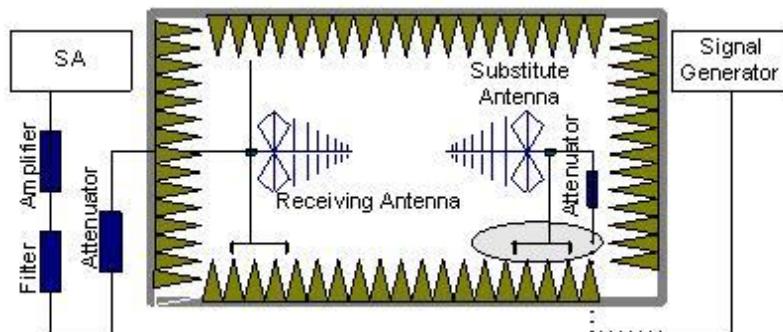
In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.
   An amplifier should be connected in for the test.
   The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.
   The measurement results are obtained as described below:
   Power (EIRP)=P_{Mea}+ P_{pl} + G_a

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dB.

A.2.2 Measurement Limit

Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116Log_{10}(f/6.1)$ decibels or $50 + 10 Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper and lower carrier frequencies of LTE Band 26. It was decided that measurements at these carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of LTE Band 26 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

LTE Band 26, 1.4MHz, QPSK, Channel 26697

Frequency(MHz)	P_Mea(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
1629.69	-55.97	3.36	-5.27	2.15	-56.21	-13.00	43.21	V
3228.21	-56.48	5.22	-7.55	2.15	-56.30	-13.00	43.30	H
4264.52	-55.99	5.97	-9.16	2.15	-54.95	-13.00	41.95	H
5423.11	-56.62	6.41	-10.49	2.15	-54.69	-13.00	41.69	V
5893.88	-55.35	6.90	-10.52	2.15	-53.88	-13.00	40.88	V
7069.03	-56.88	7.38	-11.68	2.15	-54.73	-13.00	41.73	H

LTE Band 26, 1.4MHz, QPSK, Channel 26740

Frequency(MHz)	P_Mea(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
3280.51	-59.10	5.17	-7.67	2.15	-58.75	-13.00	45.75	V
4102.60	-59.50	5.76	-9.00	2.15	-58.41	-13.00	45.41	V
4913.87	-57.13	6.30	-9.81	2.15	-55.77	-13.00	42.77	H
5741.29	-59.61	6.78	-10.55	2.15	-57.99	-13.00	44.99	H
6548.53	-55.09	7.01	-11.06	2.15	-53.19	-13.00	40.19	H
7363.41	-55.57	6.98	-12.04	2.15	-52.66	-13.00	39.66	H

LTE Band 26, 1.4MHz, QPSK, Channel 26783

Frequency(MHz)	P_Mea(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
3291.96	-57.92	5.30	-7.70	2.15	-57.67	-13.00	44.67	H
4116.55	-58.67	5.80	-9.02	2.15	-57.60	-13.00	44.60	H
4938.98	-57.47	6.32	-9.84	2.15	-56.10	-13.00	43.10	V
5759.87	-58.15	6.78	-10.55	2.15	-56.53	-13.00	43.53	H
6581.24	-56.68	7.04	-11.10	2.15	-54.77	-13.00	41.77	H
7412.98	-57.93	7.24	-12.10	2.15	-55.22	-13.00	42.22	V

LTE Band 26, 1.4MHz, 16QAM, Channel 26697

Frequency(MHz)	P$_{Mea}$(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
1629.64	-56.87	3.36	-5.27	2.15	-57.11	-13.00	44.11	V
2444.18	-48.15	4.45	-5.93	2.15	-48.82	-13.00	35.82	V
4290.12	-56.90	5.97	-9.19	2.15	-55.83	-13.00	42.83	V
5126.11	-56.74	6.47	-10.08	2.15	-55.28	-13.00	42.28	H
6671.01	-55.75	7.42	-11.21	2.15	-54.11	-13.00	41.11	H
7360.48	-55.98	6.98	-12.03	2.15	-53.08	-13.00	40.08	V

LTE Band 26, 1.4MHz, 16QAM, Channel 26740

Frequency(MHz)	P$_{Mea}$(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
3277.22	-58.13	5.16	-7.67	2.15	-57.77	-13.00	44.77	H
4096.33	-57.19	5.73	-9.00	2.15	-56.07	-13.00	43.07	V
4910.79	-57.00	6.29	-9.81	2.15	-55.63	-13.00	42.63	V
5735.83	-60.06	6.77	-10.55	2.15	-58.43	-13.00	45.43	H
6541.49	-56.05	6.92	-11.05	2.15	-54.07	-13.00	41.07	V
7353.84	-57.29	7.03	-12.02	2.15	-54.45	-13.00	41.45	H

LTE Band 26, 1.4MHz, 16QAM, Channel 26783

Frequency(MHz)	P$_{Mea}$(dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit （dBm）	Margin(dB)	Polarization
3293.57	-58.22	5.31	-7.70	2.15	-57.98	-13.00	44.98	V
4122.50	-59.30	5.80	-9.02	2.15	-58.23	-13.00	45.23	V
4939.32	-57.65	6.32	-9.84	2.15	-56.28	-13.00	43.28	H
5758.36	-58.27	6.78	-10.55	2.15	-56.65	-13.00	43.65	V
6579.04	-58.95	7.04	-11.09	2.15	-57.05	-13.00	44.05	V
7420.91	-58.60	7.25	-12.11	2.15	-55.89	-13.00	42.89	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 4.2 dB, k = 2.

A.3 FREQUENCY STABILITY

Reference
FCC: CFR Part 2.1055, 90.213.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30℃.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 26, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50℃.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 ℃ increments from +50℃ to -30℃. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.2.2 For equipment powered by primary supply voltage

For Part 90.213, the frequency stability of the transmitter shall be maintained within ±2.5ppm of the center frequency. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

LTE Band 26, 1.4MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage	Frequency error (Hz)		Frequency error (ppm)	
(V)	QPSK	16QAM	QPSK	16QAM
3.5	-1	18	0.001	0.022
3.8	-3	16	0.004	0.019
4.35	-2	17	0.002	0.021

Frequency Error vs Temperature

Temperature	Frequency error (Hz)		Frequency error (ppm)	
(℃)	QPSK	16QAM	QPSK	16QAM
50°	-1	18	0.001	0.022
40°	-2	17	0.002	0.021
30°	-1	15	0.001	0.019
20°	-3	17	0.003	0.021
10°	0	17	0.000	0.021
0°	-3	17	0.004	0.021
– 10°	-4	16	0.005	0.020
– 20°	0	18	0.000	0.022
– 30°	-2	19	0.002	0.024

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.4   OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 v02r01 4.2:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).

b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least 10log (OBW / RBW) below the reference level.

d) Set the detection mode to peak, and the trace mode to max hold.

e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 26, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
819.0	QPSK	16QAM
	1097.76	1097.76

LTE band 26, 1.4MHz Bandwidth, QPSK (99% BW)

Date: 6.MAY.2015 01:48:49
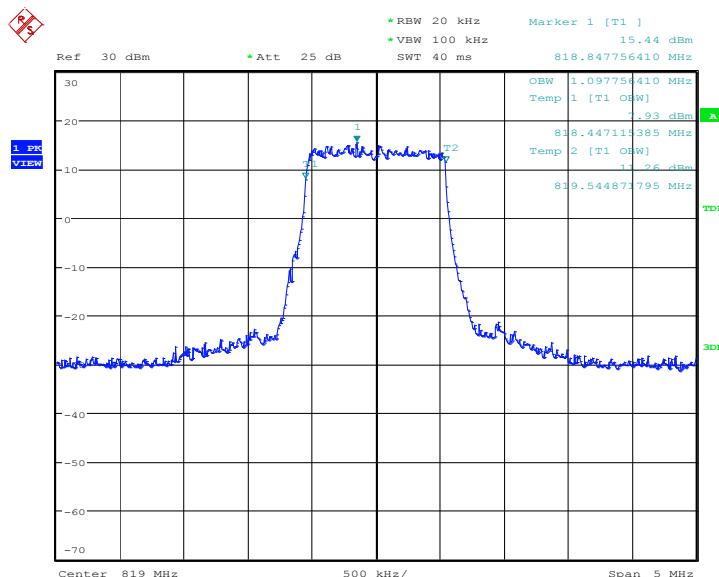
LTE band 26, 1.4MHz Bandwidth, 16QAM (99% BW)
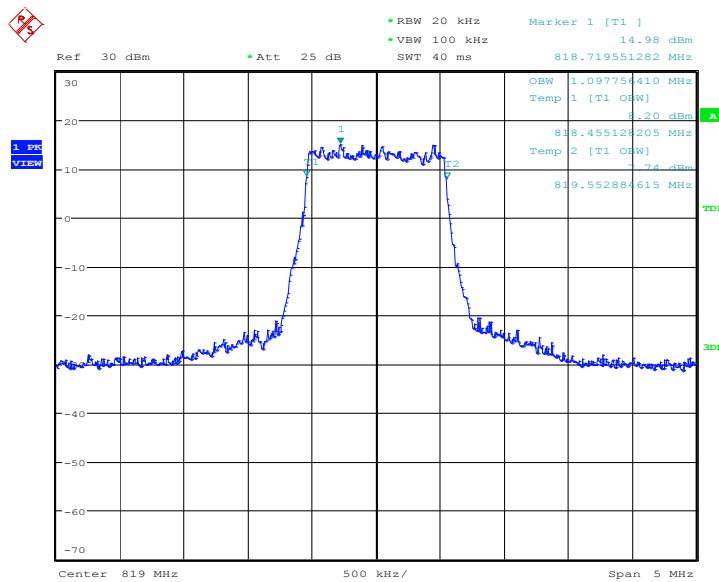
Date: 6.MAY.2015 01:49:03

LTE band 26, 3MHz (99%)

| Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
819.0	QPSK	16QAM
	2692.31	2692.31

LTE band 26, 3MHz Bandwidth, QPSK (99% BW)
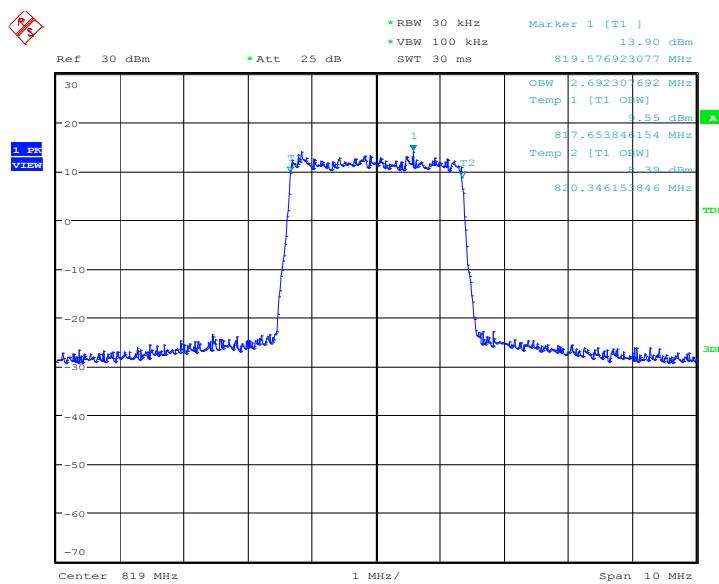
Date: 6.MAY.2015 01:54:29

LTE band 26, 3MHz Bandwidth, 16QAM (99% BW)
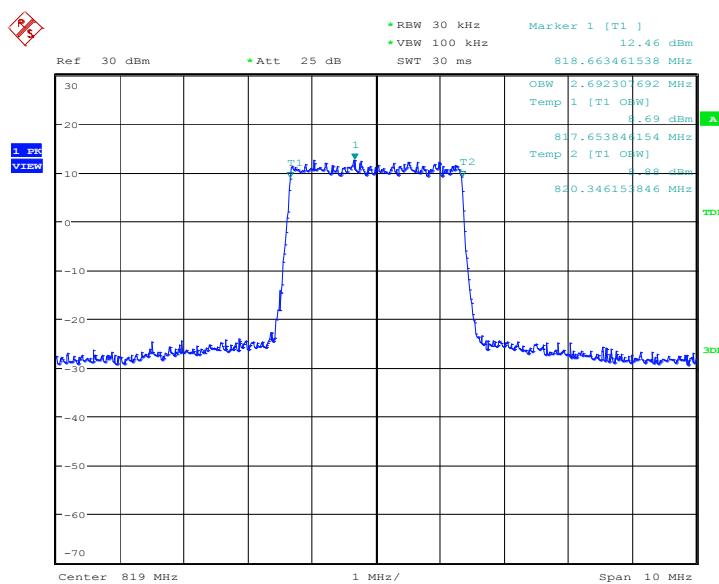
Date: 6.MAY.2015 01:54:43

LTE band 26, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.0		
	4495.19	4519.23

LTE band 26, 5MHz Bandwidth, QPSK (99% BW)
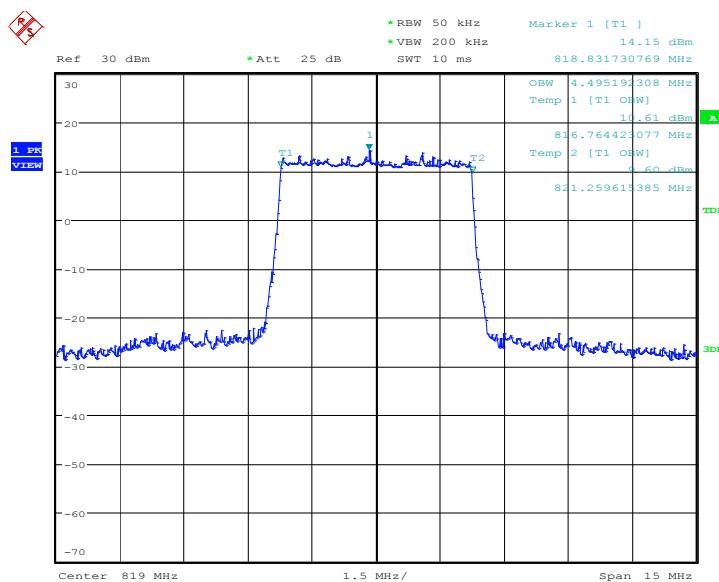
Date: 6.MAY.2015 02:00:09

LTE band 26, 5MHz Bandwidth,16QAM (99% BW)
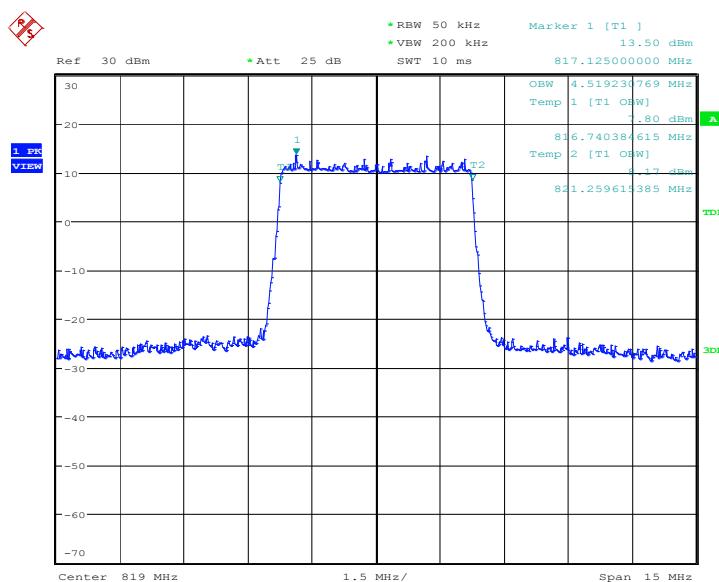
Date: 6.MAY.2015 02:00:23

LTE band 26, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
819.0	8990.38	8990.38

LTE band 26, 10MHz Bandwidth, QPSK (99% BW)
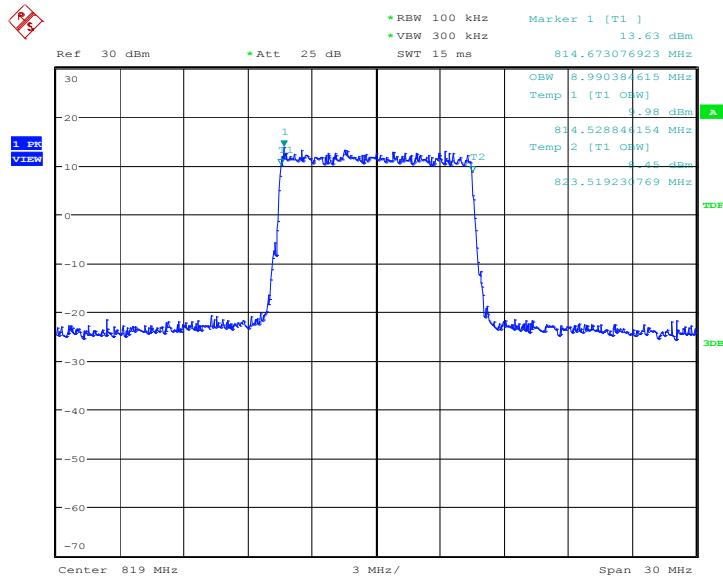
Date: 6.MAY.2015 02:05:49

LTE band 26, 10MHz Bandwidth, 16QAM (99% BW)
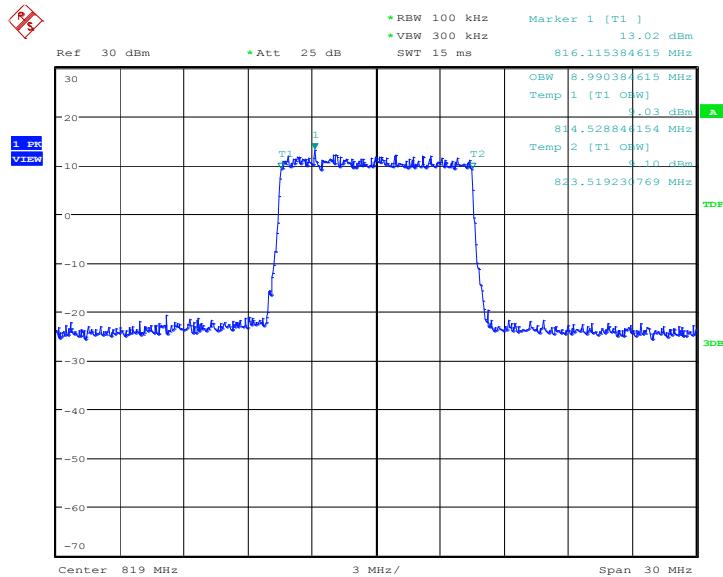
Date: 6.MAY.2015 02:06:02

A.5   EMISSION BANDWIDTH

FCC: CFR Part 2.1049(h)(i)

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 26, 1.4MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
819.0	QPSK	16QAM
	1314.10	1306.09

LTE band 26, 1.4MHz Bandwidth, QPSK (-26dBc BW)
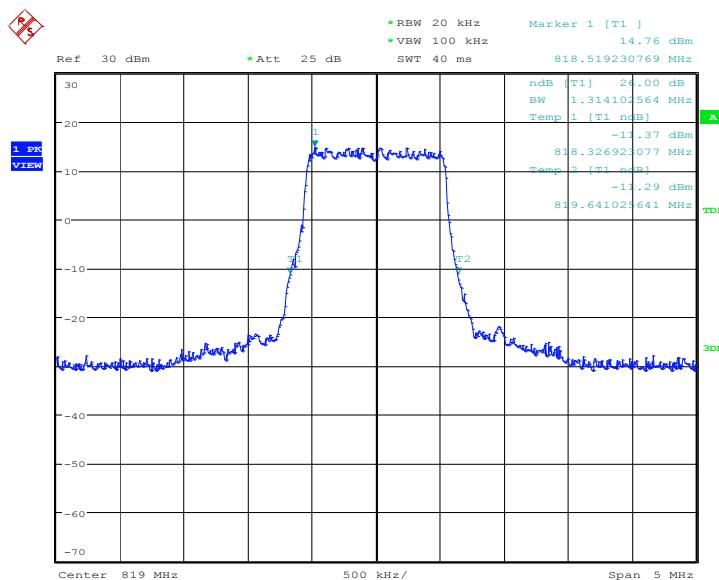
Date: 6.MAY.2015 01:49:57

LTE band 26, 1.4MHz Bandwidth, 16QAM (-26dBc BW)
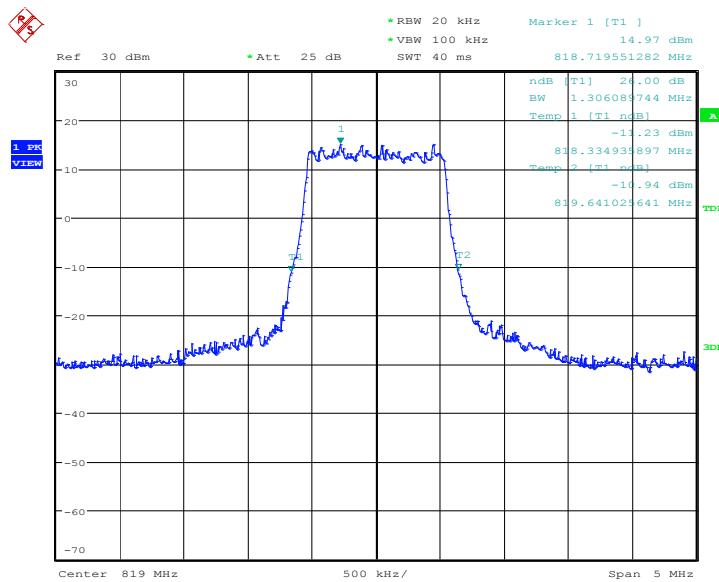
Date: 6.MAY.2015 01:50:12

LTE band 26, 3MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
	QPSK	16QAM
819.0	2980.77	2964.74

LTE band 26, 3MHz Bandwidth, QPSK (-26dBc BW)
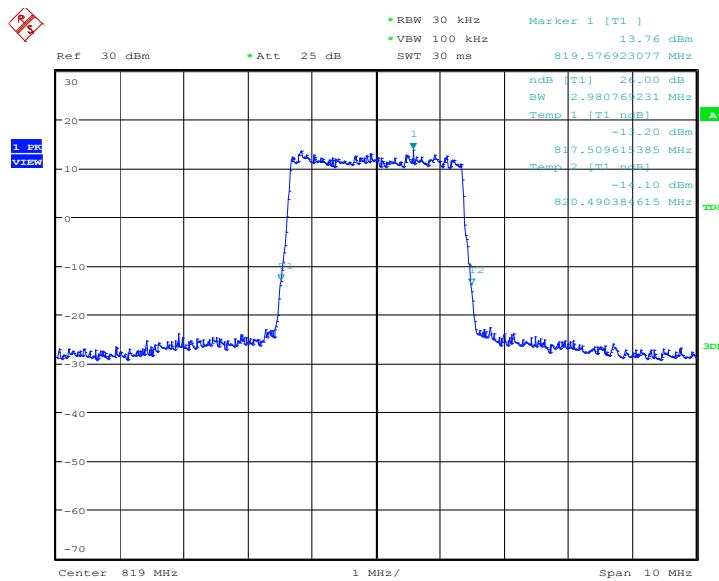
Date: 6.MAY.2015 01:55:37

LTE band 26, 3MHz Bandwidth, 16QAM (-26dBc BW)
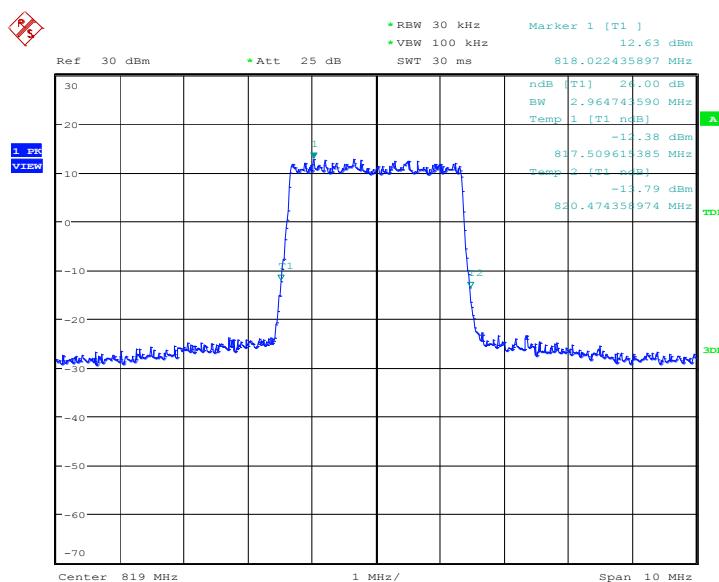
Date: 6.MAY.2015 01:55:52

LTE band 26, 5MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
819.0	QPSK	16QAM
	4927.88	4927.88

LTE band 26, 5MHz Bandwidth, QPSK (-26dBc BW)
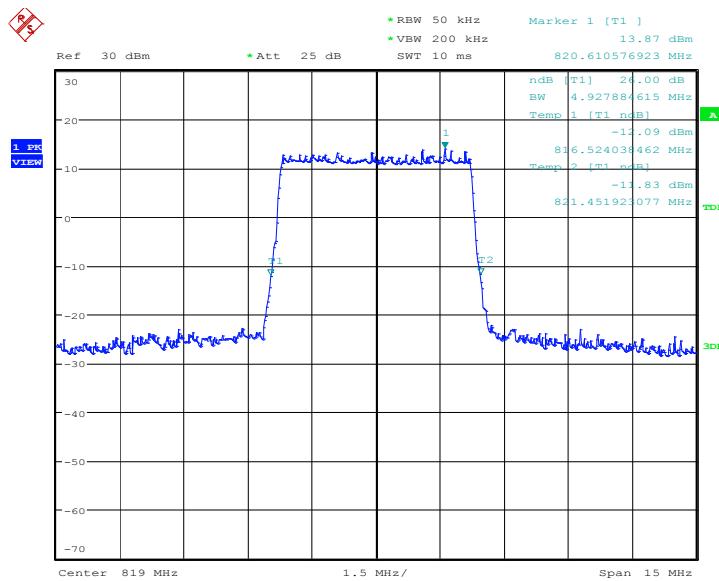
Date: 6.MAY.2015 02:01:15

LTE band 26, 5MHz Bandwidth,16QAM (-26dBc BW)
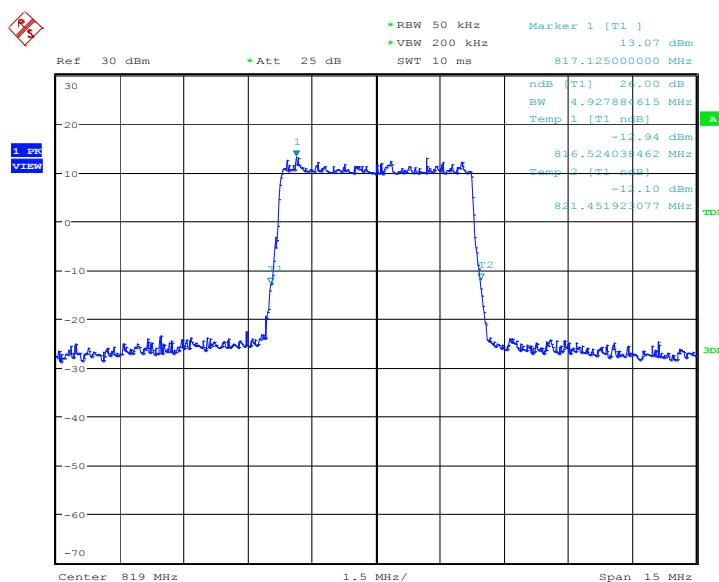
Date: 6.MAY.2015 02:01:30

LTE band 26, 10MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
	QPSK	16QAM
819.0	9807.69	9807.69

LTE band 26, 10MHz Bandwidth, QPSK (-26dBc BW)
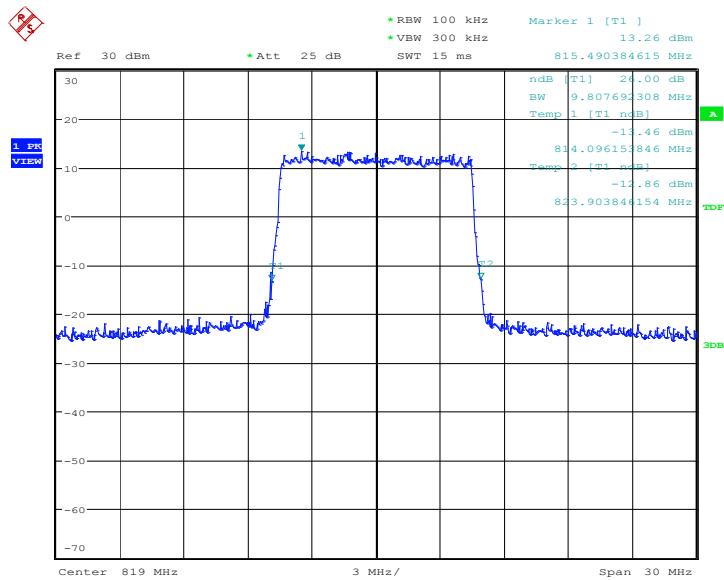
Date: 6.MAY.2015 02:06:54

LTE band 26, 10MHz Bandwidth, 16QAM (-26dBc BW)
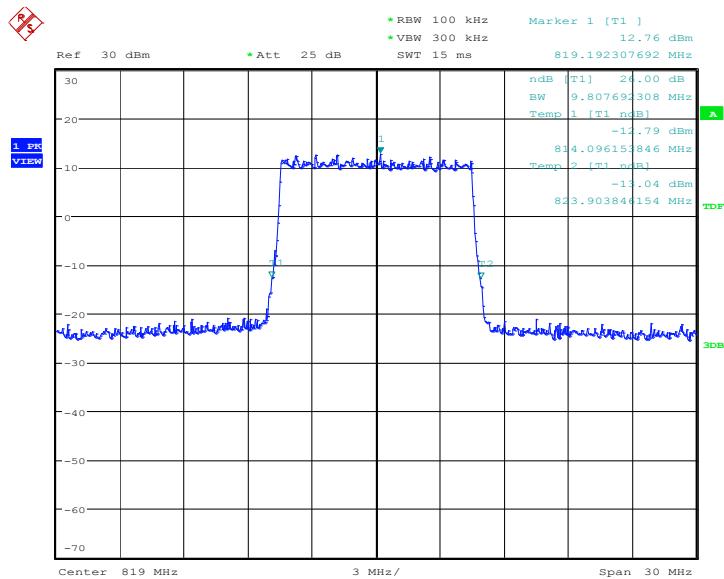
Date: 6.MAY.2015 02:07:10

A.6 CONDUCTED SPURIOUS EMISSION

FCC: CFR Part 2.1051/90.691

A.6.1 Measurement Method

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. Data taken from 30 MHz to 10GHz.

Out-of-band emission requirement shall apply only to the ''outer'' channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 Log_{10}(f/6.1)$ decibels or $50 + 10 Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

A.6.2 Measurement result
**Only worst case result is given below**
LTE band 26: 30MHz – 10GHz
Spurious emission limit –13dBm.

Date: 7.MAY.2015 21:20:12
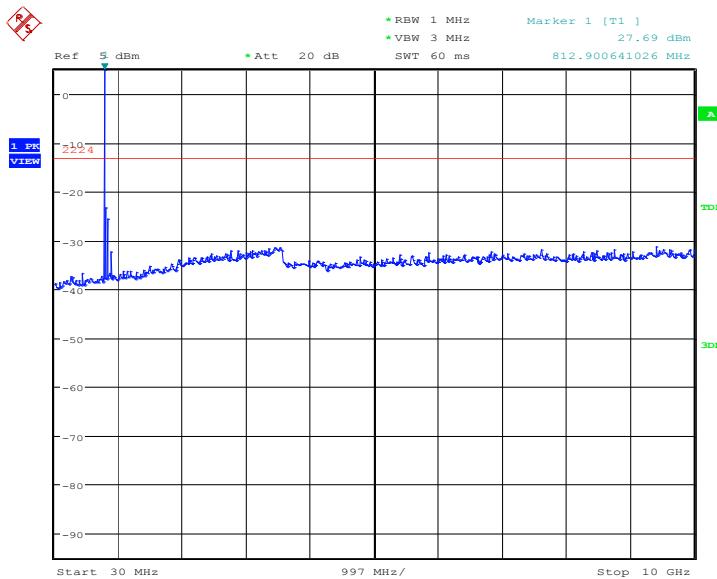
LTE band 26
OBW: 1RB-low_offset
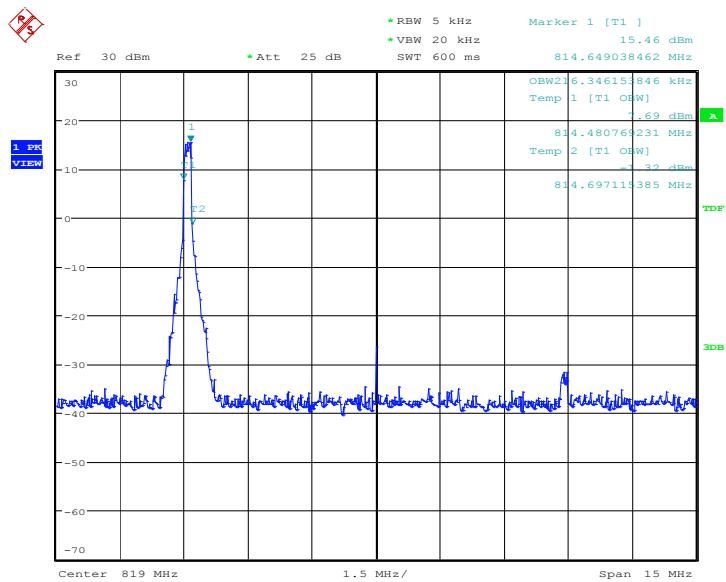

Date: 14.MAY.2015 22:29:25

LOW Emission Mask -1RB-low_offset
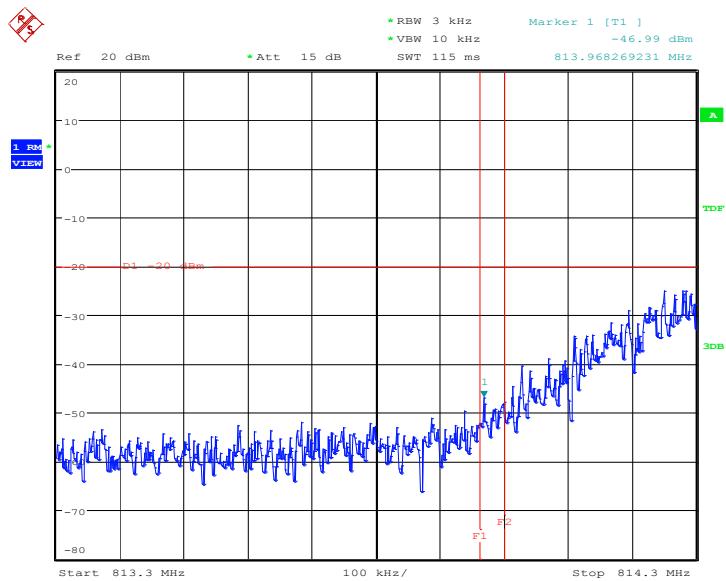

Date: 14.MAY.2015 22:30:08

LOW BAND EDGE BLOCK-1RB-low_offset

	*RBW 3 kHz	Marker 1 [T1]	
	*VBW 10 kHz	−53.51 dBm	
Ref 20 dBm	*Att 15 dB	SWT 560 ms	811.910697115 MHz

Start 809 MHz   496.25 kHz/   Stop 813.9625 MHz
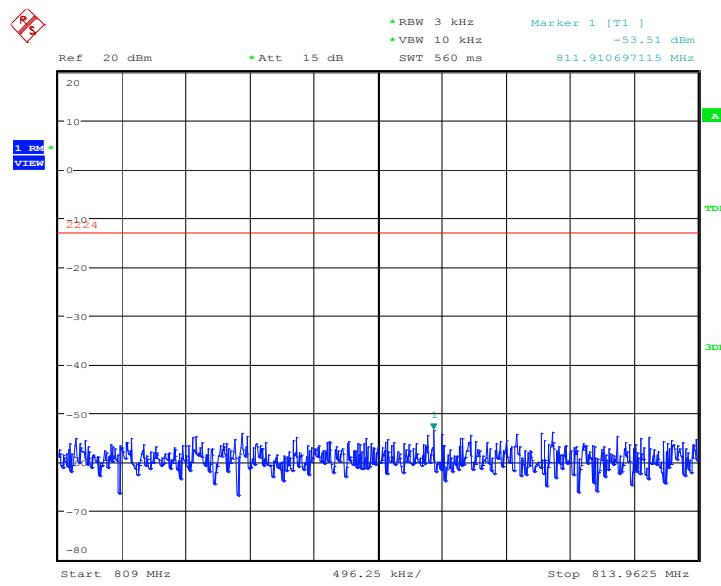
Date: 14.MAY.2015 22:30:12

OBW: 1RB-high_offset
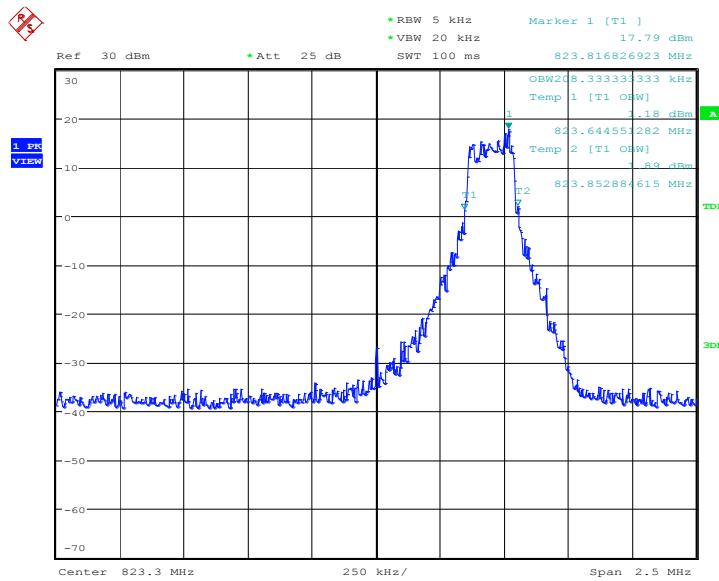
Date: 14.MAY.2015 22:27:06

HIGH Emission Mask -1RB-high_offset
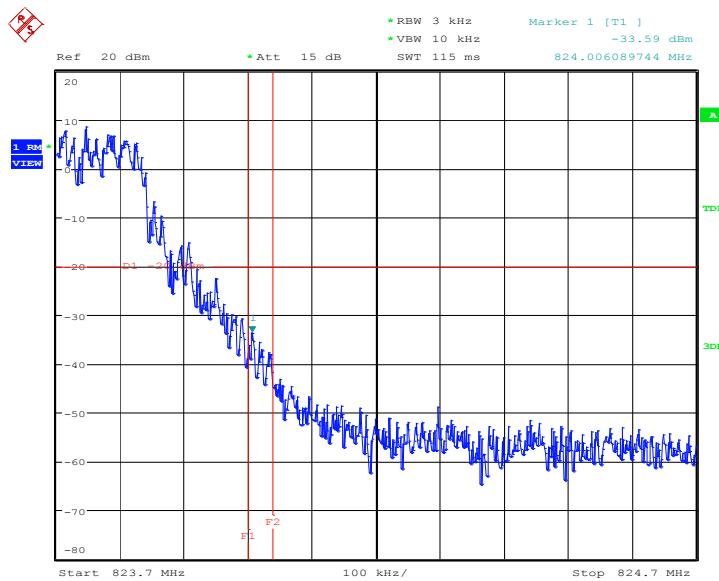
Date: 14.MAY.2015 22:27:49

**HIGH BAND EDGE BLOCK-1RB-high_offset**
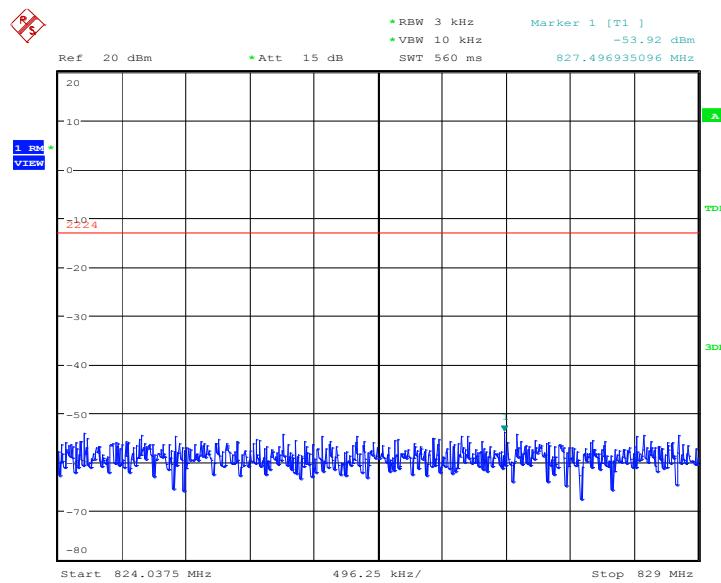
Date: 14.MAY.2015 22:27:53

LOW Emission Mask -10MHz-100%RB
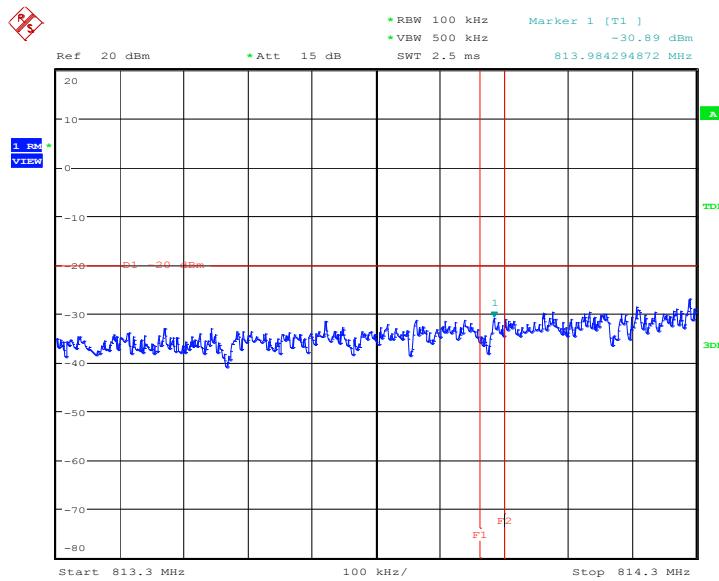
Date: 14.MAY.2015 22:32:12

LOW BAND EDGE BLOCK-10MHz-100%RB
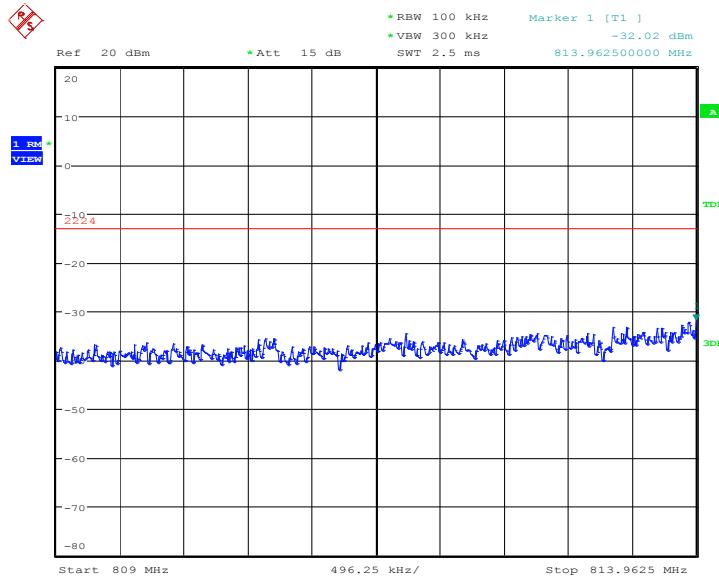

Date: 14.MAY.2015 22:32:16

HIGH Emission Mask -10MHz-100%RB
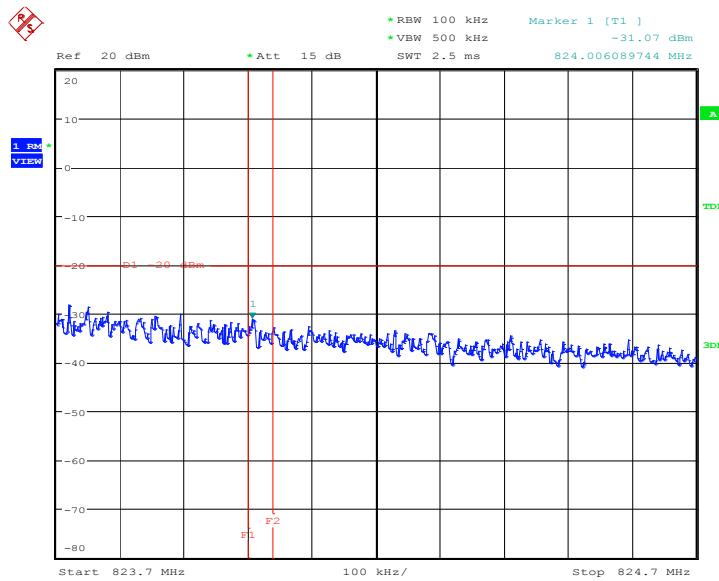
Date: 14.MAY.2015 22:33:00

HIGH BAND EDGE BLOCK-10MHz-100%RB
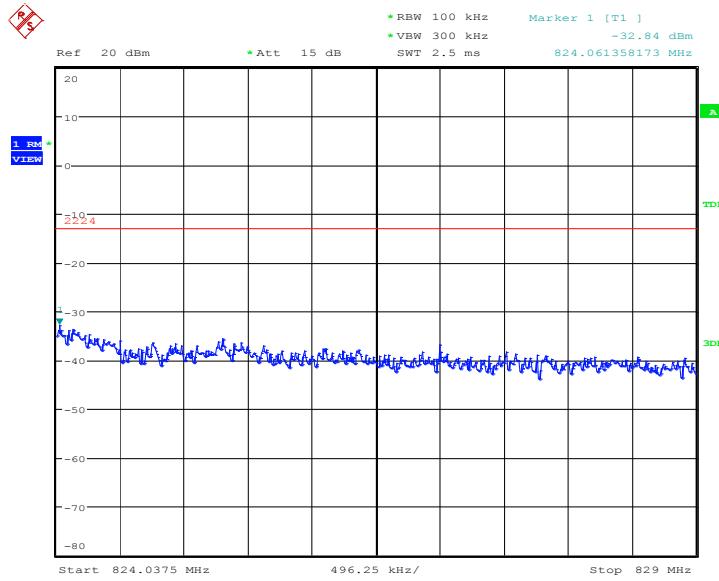
Date: 14.MAY.2015 22:33:04

END OF REPORT