



# FCC RF Test Report

APPLICANT : TCL Communication Ltd.  
EQUIPMENT : LTE Tablet  
BRAND NAME : AT&T  
MODEL NAME : 9020A  
MARKETING NAME : TINT  
FCC ID : 2ACCJB003  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Dec. 08, 2014 and testing was completed on Jan. 26, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

---

Reviewed by: Joseph Lin / Supervisor

---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,  
Nanshan District, Shenzhen, Guangdong, P. R. China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test .....	6
1.5 Modification of EUT .....	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	7
1.7 Testing Site .....	8
1.8 Applied Standards .....	8
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System .....	10
2.3 Support Unit used in test configuration and system.....	10
2.4 Measurement Results Explanation Example .....	11
<b>3 TEST RESULT .....</b>	<b>12</b>
3.1 Conducted Output Power Measurement.....	12
3.2 Peak-to-Average Ratio .....	14
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	18
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	22
3.5 Band Edge Measurement.....	30
3.6 Conducted Spurious Emission Measurement.....	35
3.7 Field Strength of Spurious Radiation Measurement .....	42
3.8 Frequency Stability Measurement.....	50
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>54</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>55</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4D0805A	Rev. 01	Initial issue of report	Jan. 27, 2015

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 19.73 dB at 1652.800 MHz
3.8	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
	§2.1055 §24.235				

# 1 General Description

## 1.1 Applicant

**TCL Communication Ltd.**

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P. R.  
China 201203

## 1.2 Manufacturer

**TCL Communication Ltd.**

5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P. R.  
China 201203

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Tablet
Brand Name	AT&T
Model Name	9020A
Marketing Name	TINT
FCC ID	2ACCJB003
EUT supports Radios application	WCDMA/HSPA/HSPA+(Downlink Only)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	V05
SW Version	B1F
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	WCDMA Band V : 24.60 dBm WCDMA Band II : 24.36 dBm
<b>Antenna Type</b>	IFA Antenna
<b>Type of Modulation</b>	WCDMA : QPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (Downlink Only)



## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1106	0.0036 ppm	4M16F9W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3431	0.0021 ppm	4M16F9W

## 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-SZ	OTA02-SZ

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Registration No.</b>
	03CH01-SZ	831040

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V.
2. 30 MHz to 19100 MHz for WCDMA Band II.

All modes and data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

#### Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.60	24.47	24.55	24.12	24.36	24.34
HSDPA Subtest-1	23.47	23.31	23.47	22.76	22.95	22.97
HSDPA Subtest-2	23.50	23.34	23.53	22.81	22.99	22.95
HSDPA Subtest-3	22.96	22.95	23.01	22.24	22.13	22.45
HSDPA Subtest-4	22.96	22.94	23.01	22.20	22.46	22.07
HSUPA Subtest-1	23.43	23.19	22.82	23.00	22.72	22.79
HSUPA Subtest-2	22.46	22.42	22.25	21.68	21.95	21.55
HSUPA Subtest-3	22.03	21.89	22.31	22.06	21.68	21.45
HSUPA Subtest-4	22.44	22.58	22.71	21.76	21.95	21.98
HSUPA Subtest-5	23.40	23.20	23.50	22.90	23.10	23.00

## 2.2 Connection Diagram of Test System

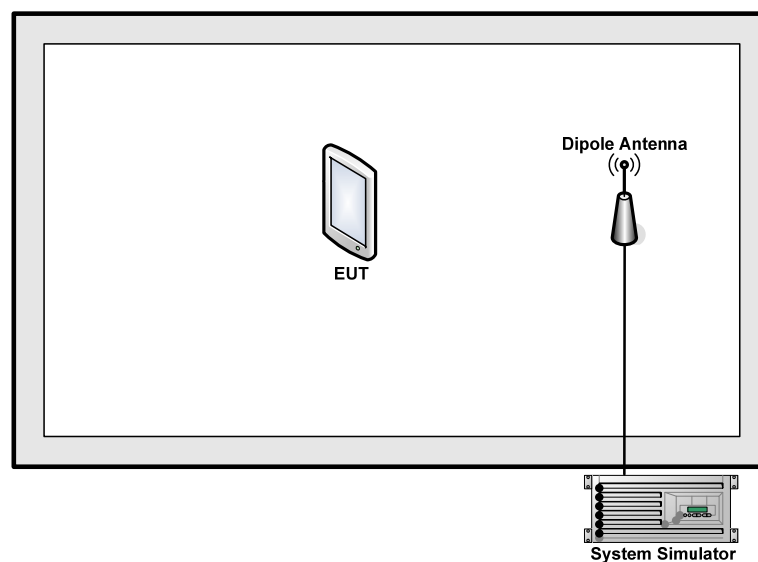

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m



## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

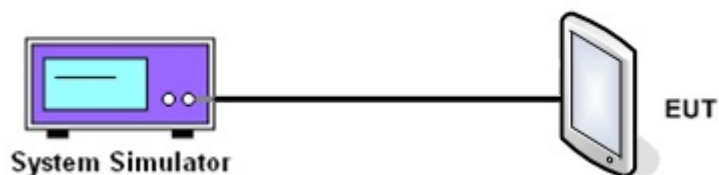

### 3.1.5 Test Result of Conducted Output Power

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
Conducted Power (dBm)	24.60	24.47	24.55
Conducted Power (Watts)	0.29	0.28	0.29

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9262 (Low)	9262 (Low)
Frequency (MHz)	1852.4	1852.4	1852.4
Conducted Power (dBm)	24.12	24.36	24.34
Conducted Power (Watts)	0.26	0.27	0.27

**Note:** maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

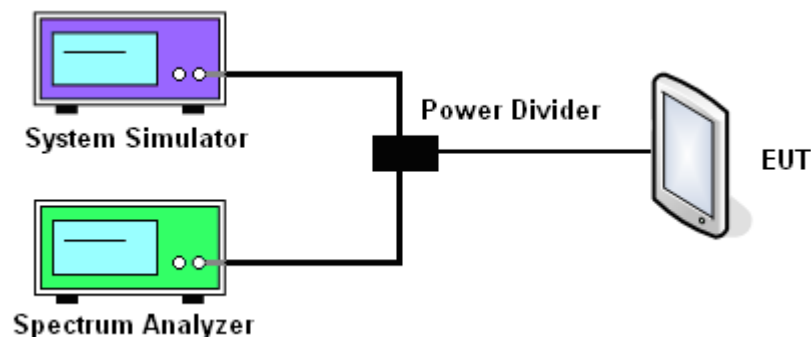


**3.2.5 Test Result of Peak-to-Average Ratio**

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	3.24	2.44	2.52

### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

#### Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

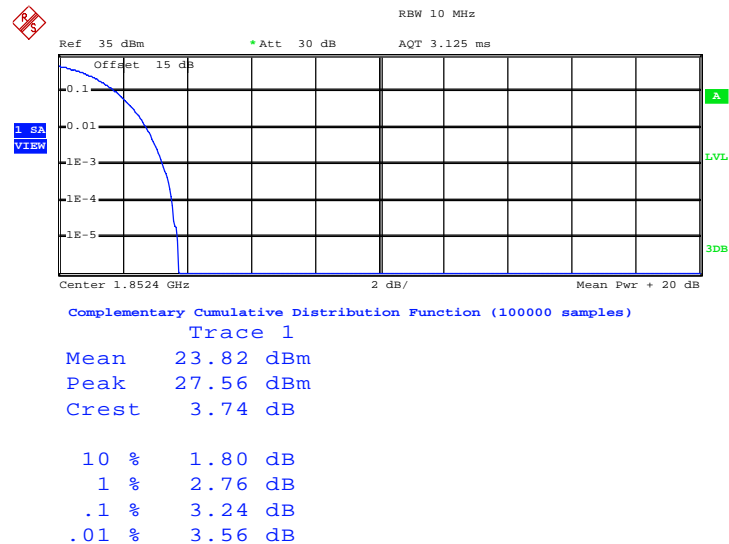

Date: 4.JAN.2015 10:08:43

#### Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

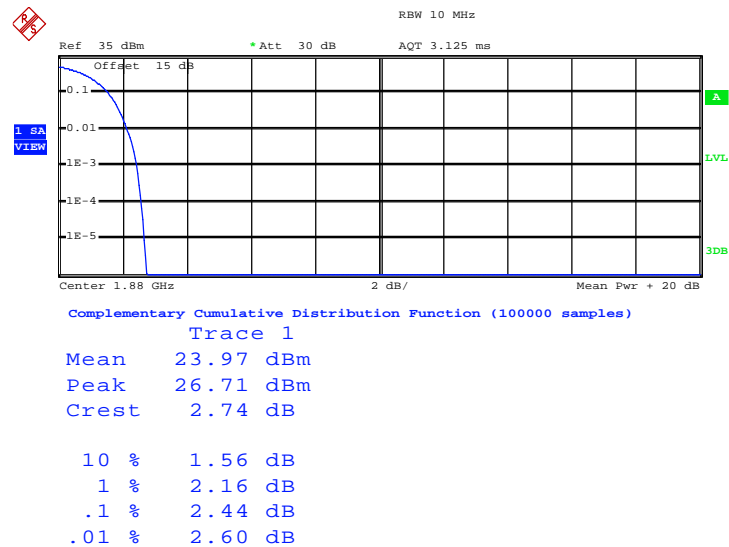


Date: 4.JAN.2015 10:09:03





Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

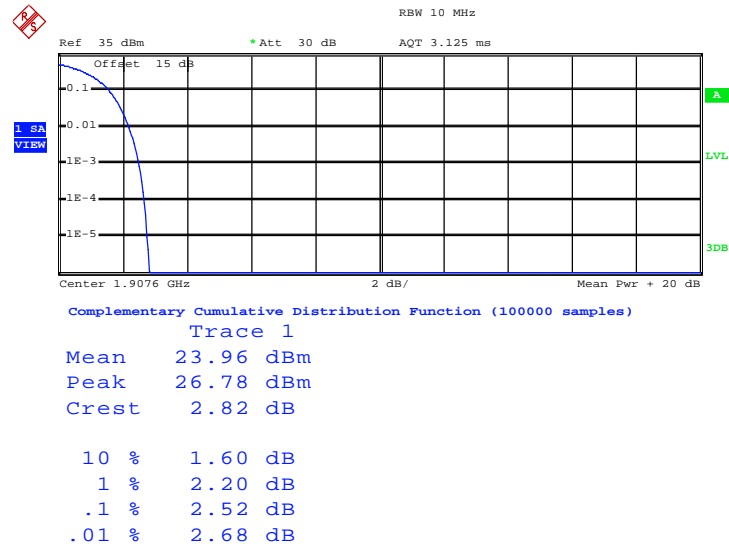

Date: 4.JAN.2015 10:09:16

### **3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement**

#### **3.3.1 Description of the ERP/EIRP Measurement**

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

#### **3.3.3 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
3. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;  
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
5. The table was rotated 360 degrees to determine the position of the highest radiated power.
6. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
7. Taking the record of maximum ERP/EIRP.
8. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
9. The conducted power at the terminal of the dipole antenna is measured.
10. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
11.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$   
 $P_s$  (dBm) : Input power to substitution antenna.  
 $G_s$  (dBi or dBd) : Substitution antenna Gain.  
 $E_t = R_t + AF$   
 $E_s = R_s + AF$   
 $AF$  (dB/m) : Receive antenna factor  
 $R_t$  : The highest received signal in spectrum analyzer for EUT.  
 $R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.3.4 Test Setup

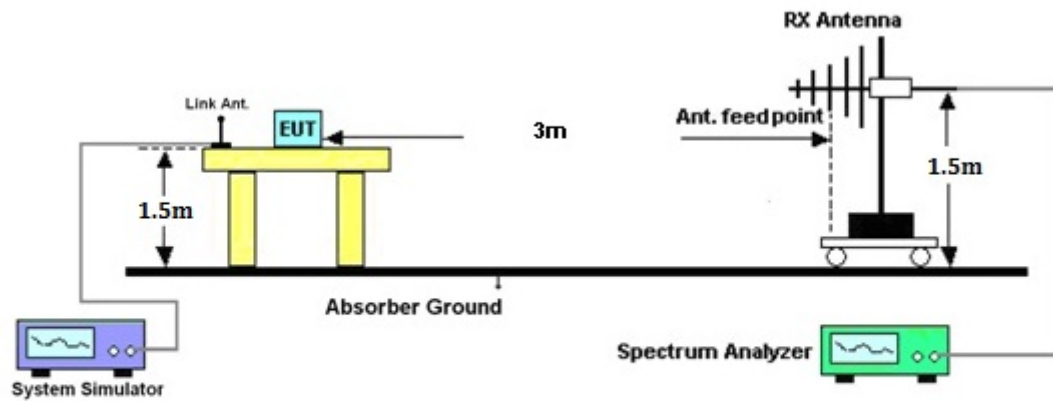

**3.3.5 Test Result of ERP**

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.89	-48.12	0.00	-1.08	20.15	0.1034
836.40	-27.50	-48.28	0.00	-0.93	19.85	0.0966
846.60	-27.97	-48.35	0.00	-0.76	19.62	0.0916
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.45	-47.97	0.00	-1.08	20.44	0.1106
836.40	-27.02	-48.01	0.00	-0.93	20.06	0.1014
846.60	-27.63	-48.05	0.00	-0.76	19.66	0.0924

**3.3.6 Test Result of EIRP**

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-32.12	-51.88	0.00	1.96	21.72	0.1486
1880.00	-32.68	-52.99	0.00	2.00	22.31	0.1703
1907.60	-33.61	-54.28	0.00	1.98	22.65	0.1843
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-28.76	-52.13	0.00	1.96	25.33	0.3408
1880.00	-29.82	-53.17	0.00	2.00	25.35	0.3431
1907.60	-31.21	-54.13	0.00	1.98	24.90	0.3088

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

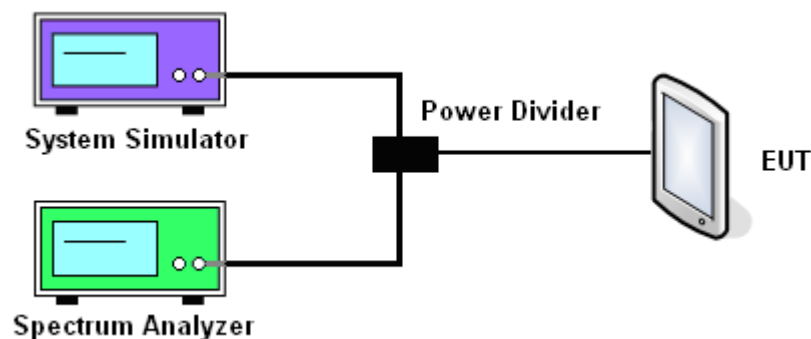

### 3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.16	4.15	4.15
26dB BW (MHz)	4.65	4.66	4.66


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.14	4.16	4.15
26dB BW (MHz)	4.66	4.69	4.67



## 3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

## 99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

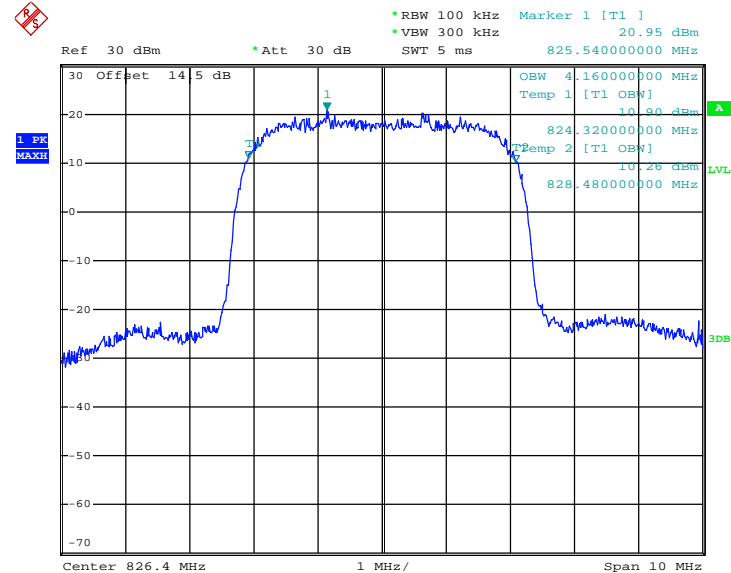

Date: 4.JAN.2015 09:43:44

## 26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

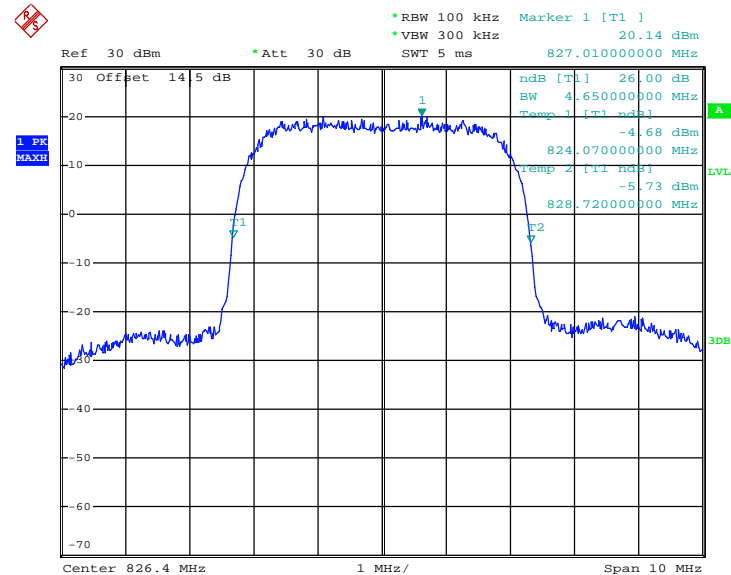


Date: 4.JAN.2015 09:45:39






## 99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

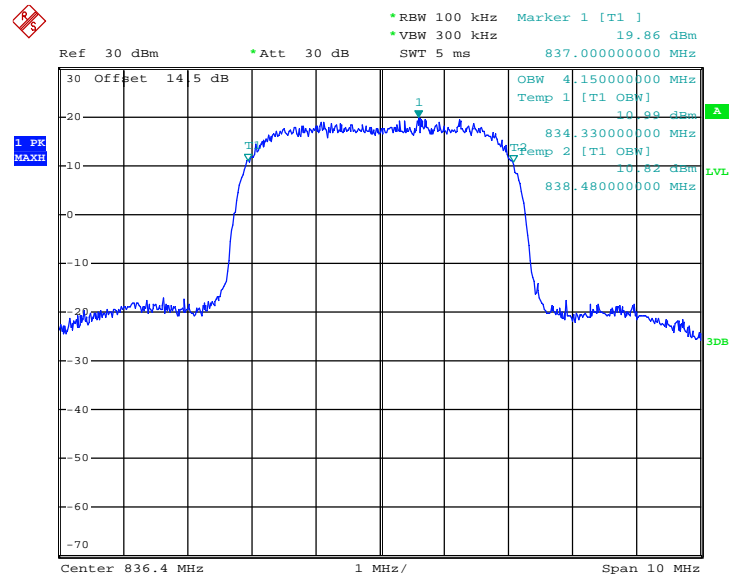

Date: 4.JAN.2015 09:44:12


## 26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

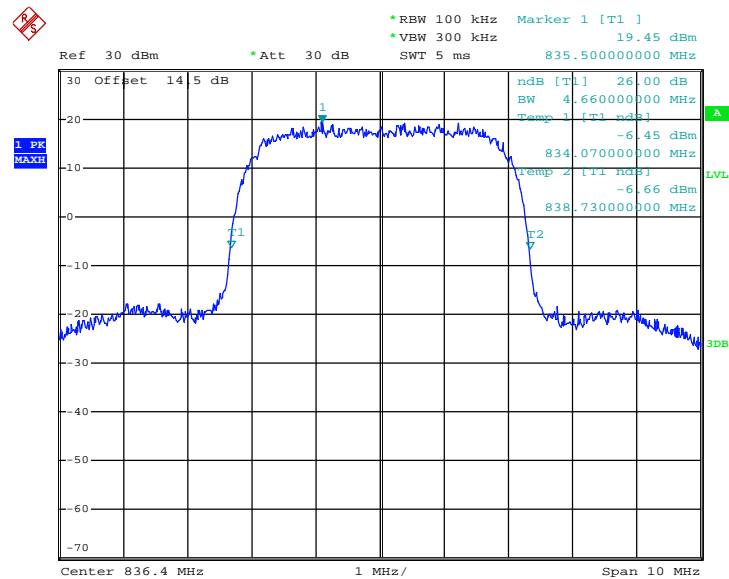

Date: 4.JAN.2015 09:46:06




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

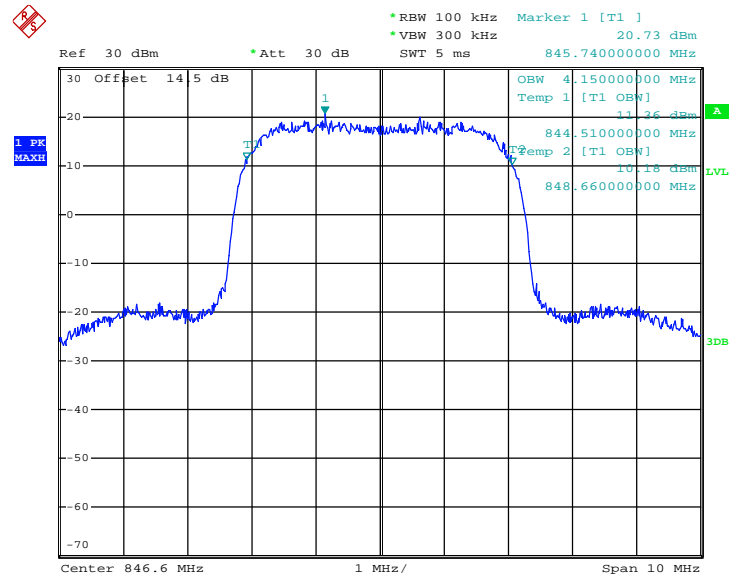

Date: 4.JAN.2015 09:45:08

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

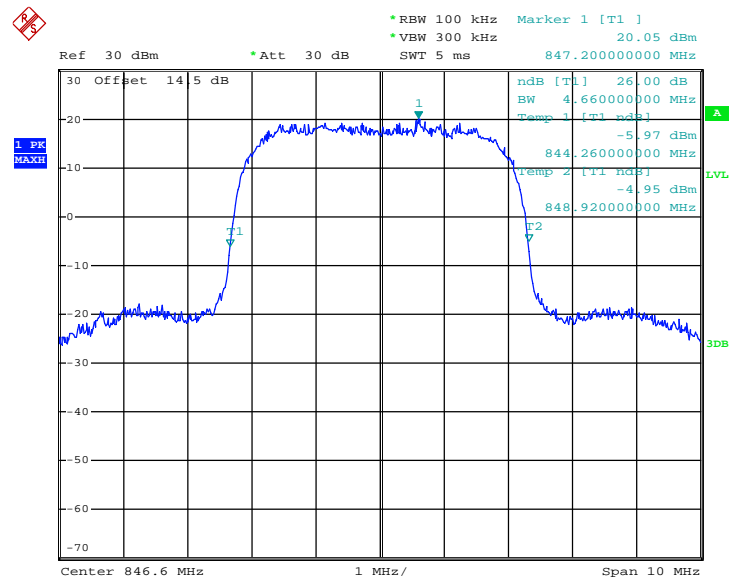


Date: 4.JAN.2015 09:46:34




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

## 99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

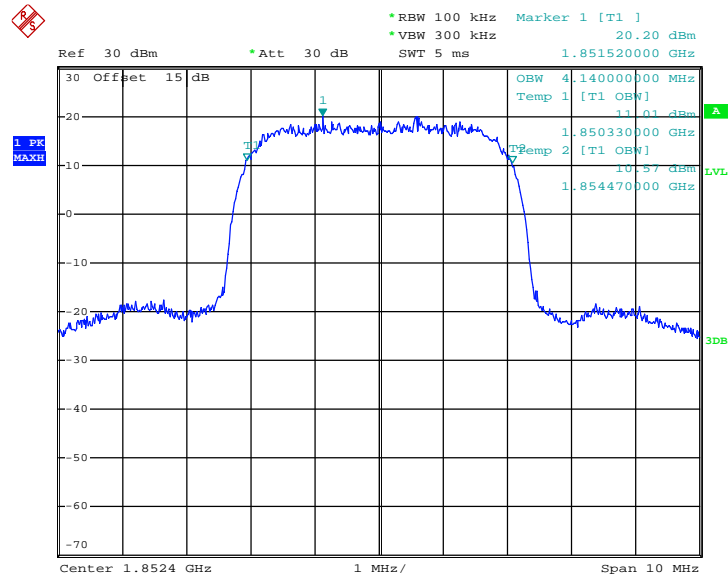

Date: 4.JAN.2015 09:57:02


## 26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

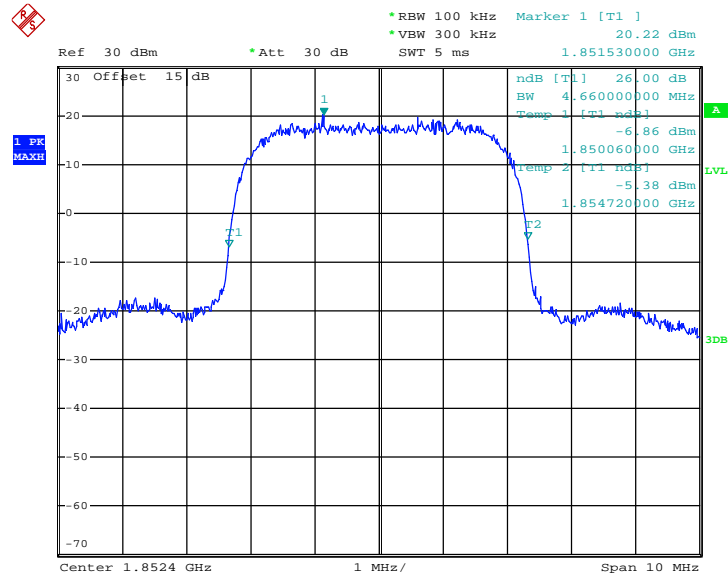

Date: 4.JAN.2015 09:58:35




### 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

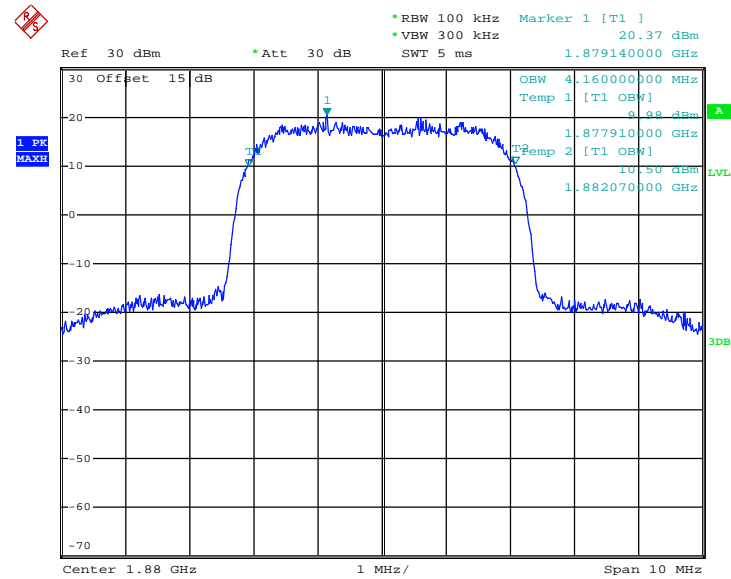

Date: 4.JAN.2015 09:57:30


### 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

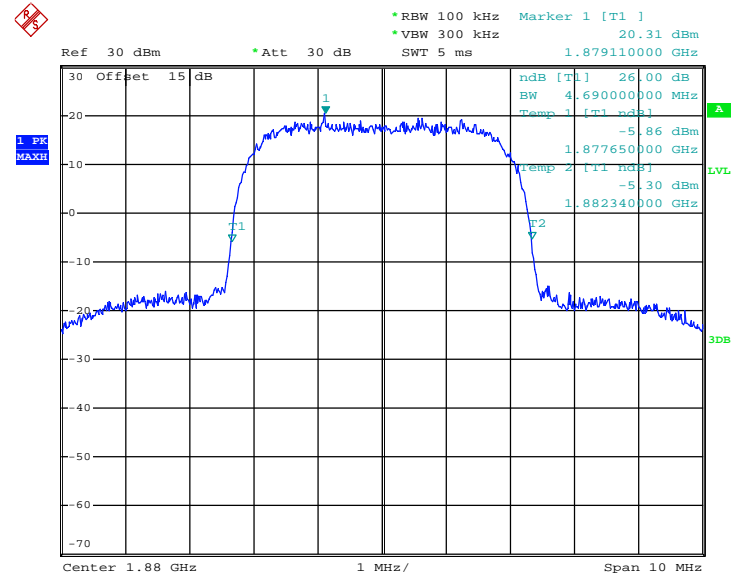

Date: 4.JAN.2015 09:59:02




### 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

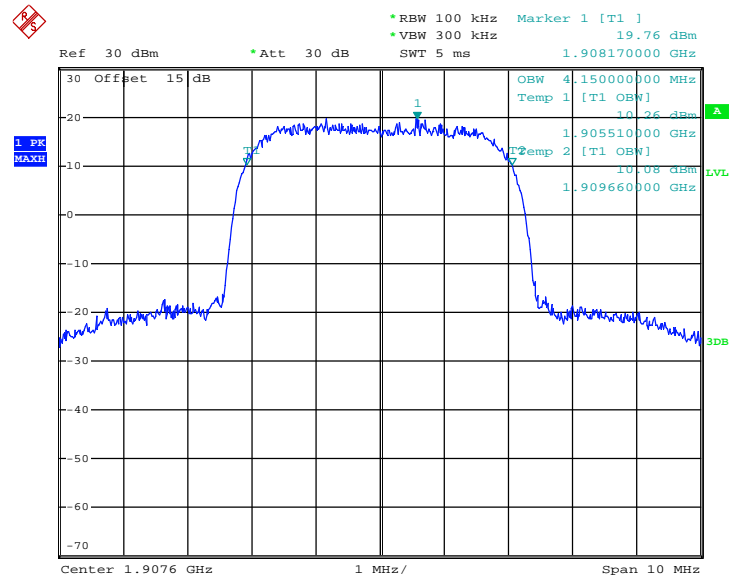

Date: 4.JAN.2015 09:57:58

### 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

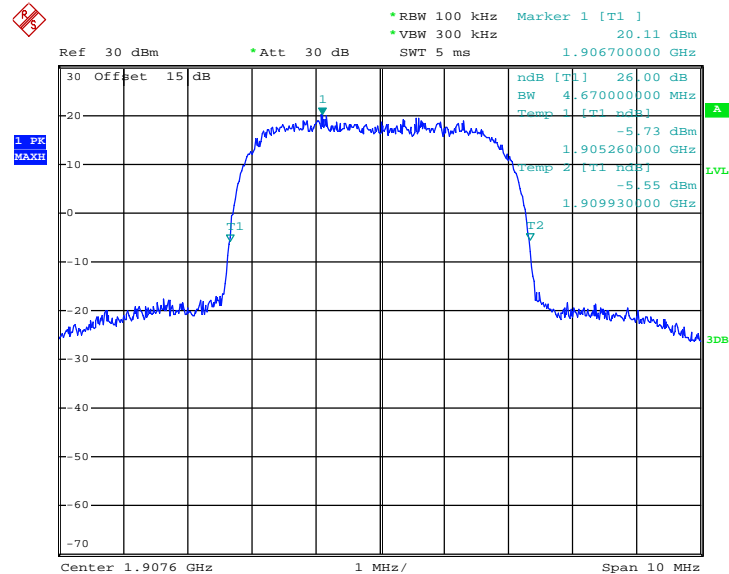

Date: 4.JAN.2015 09:59:30

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$


#### 3.5.4 Test Setup

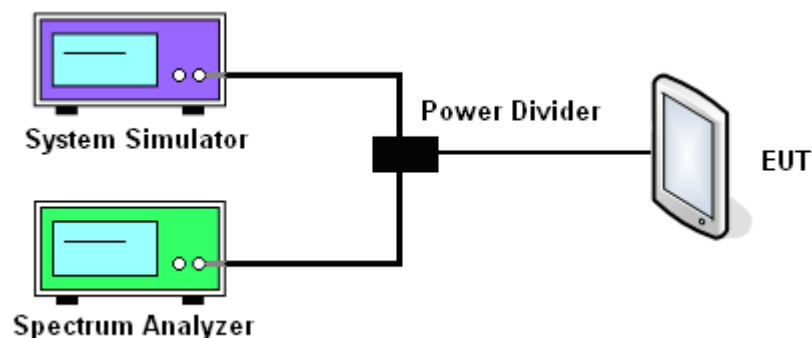

### 3.5.5 Test Result (Plots) of Conducted Band Edge

<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

**Lower Band Edge Plot on Channel 4132 (826.4 MHz)**

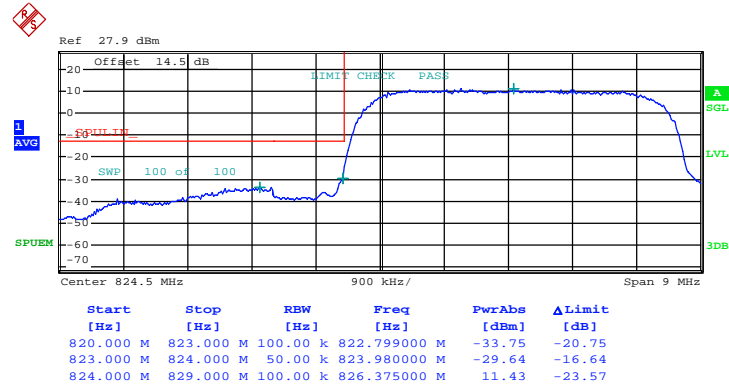


Date: 26.JAN.2015 11:16:14

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	-----------------------------

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

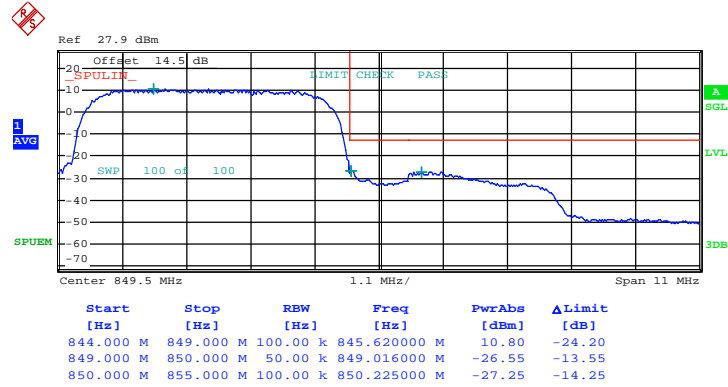

Date: 26.JAN.2015 11:23:00


1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)





Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	-----------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

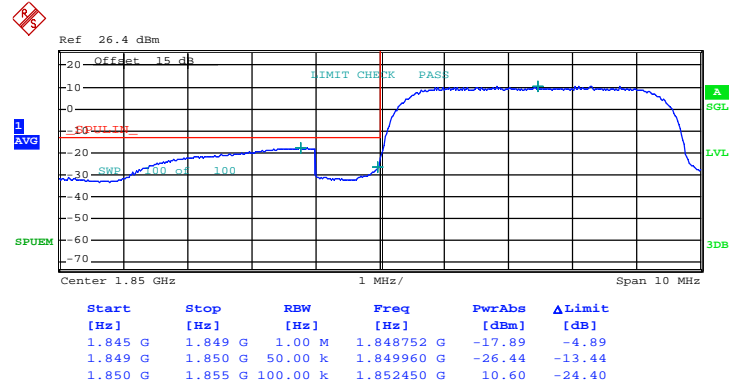


Date: 26.JAN.2015 11:02:58

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	-----------------------------

### Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

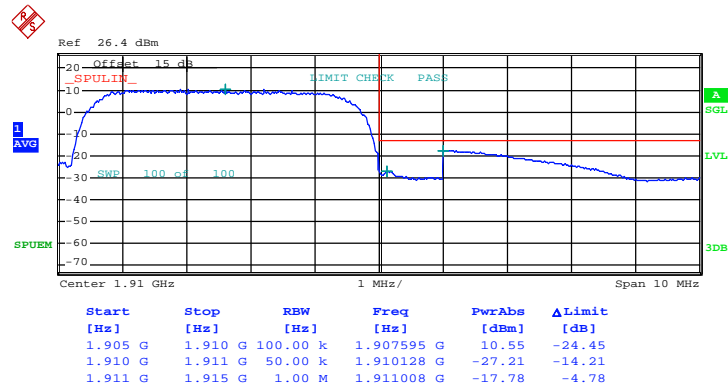

Date: 26.JAN.2015 11:09:10

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

## 3.6 Conducted Spurious Emission Measurement

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$


### 3.6.4 Test Setup

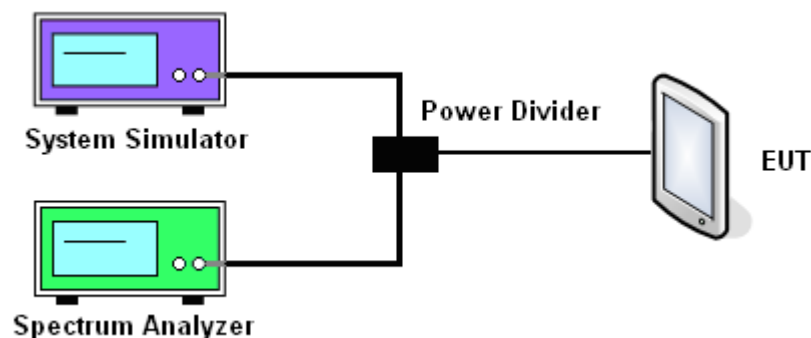

### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4132
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	826.4 MHz

#### Conducted Spurious Emission Plot between 30MHz ~ 9GHz

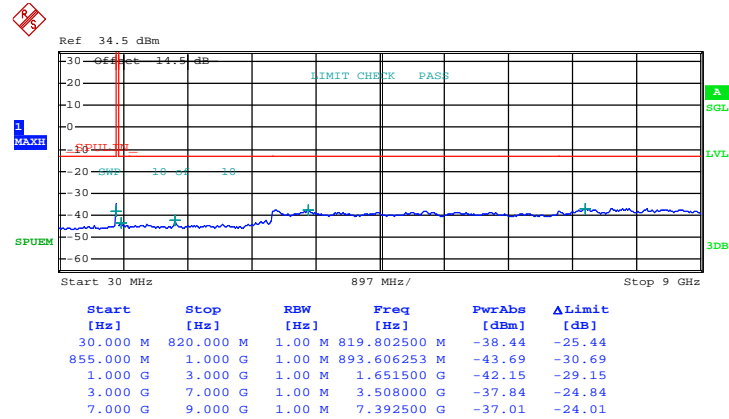


Date: 4.JAN.2015 09:52:22



Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

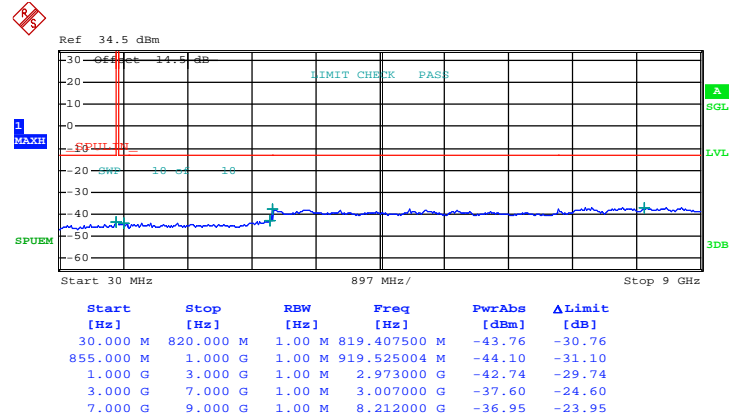


Date: 4.JAN.2015 09:52:47



Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

## Conducted Spurious Emission Plot between 30MHz ~ 9GHz

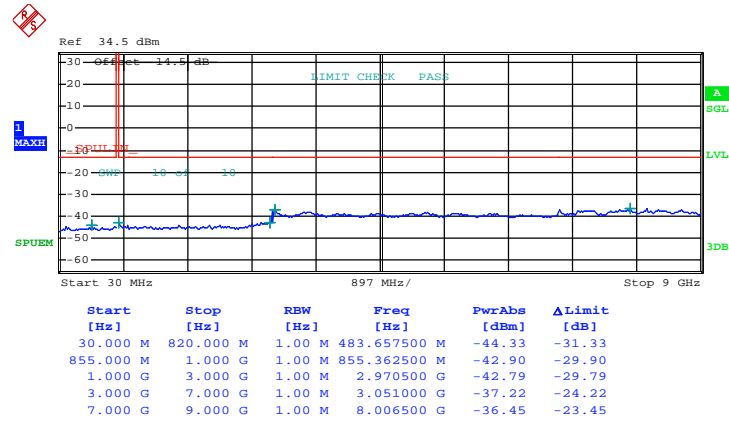


Date: 4.JAN.2015 09:53:11



Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

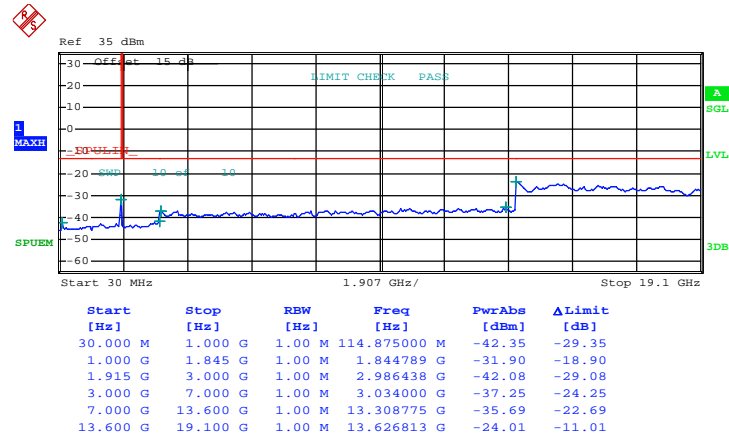


Date: 4.JAN.2015 10:03:51



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

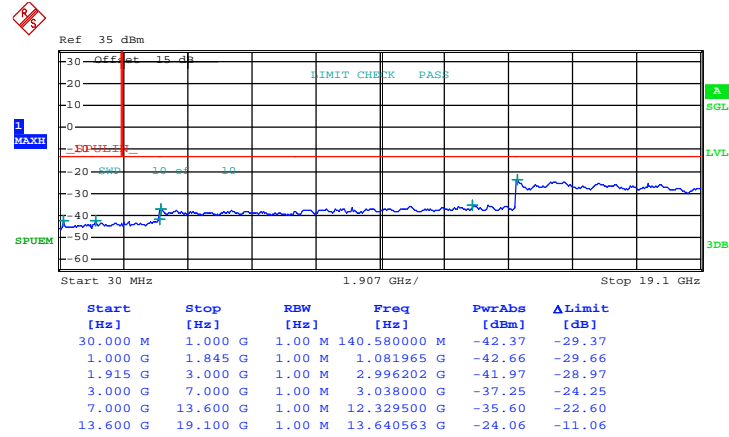


Date: 4.JAN.2015 10:04:16





Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

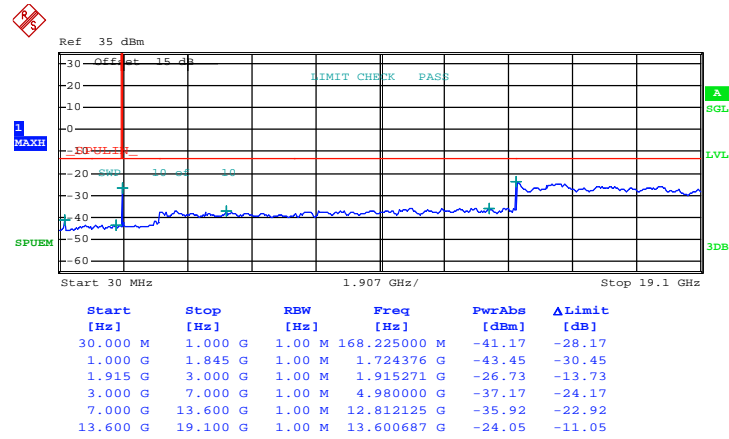

Date: 4.JAN.2015 10:04:40

## **3.7 Field Strength of Spurious Radiation Measurement**

### **3.7.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **3.7.2 Measuring Instruments**


The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Procedures**


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

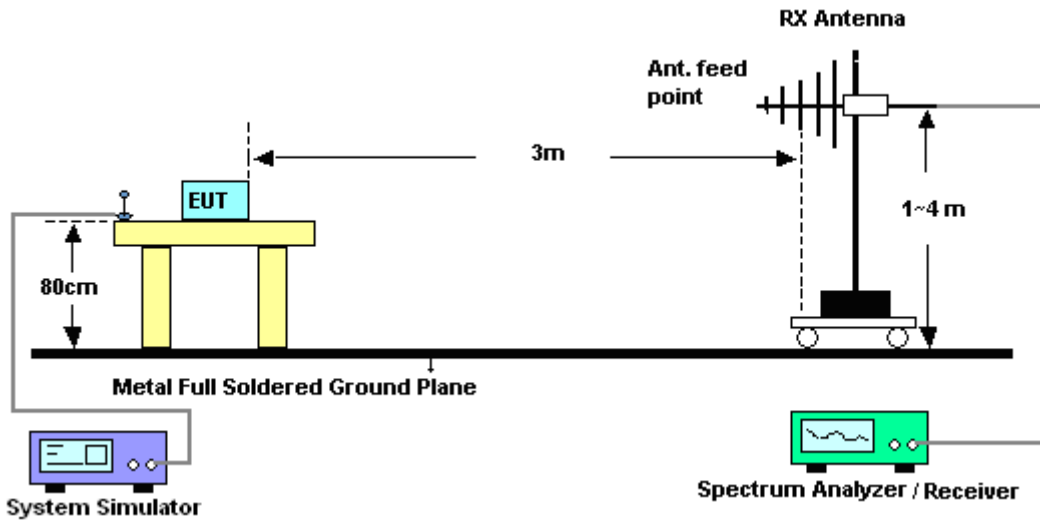

For radiated emissions above 1GHz

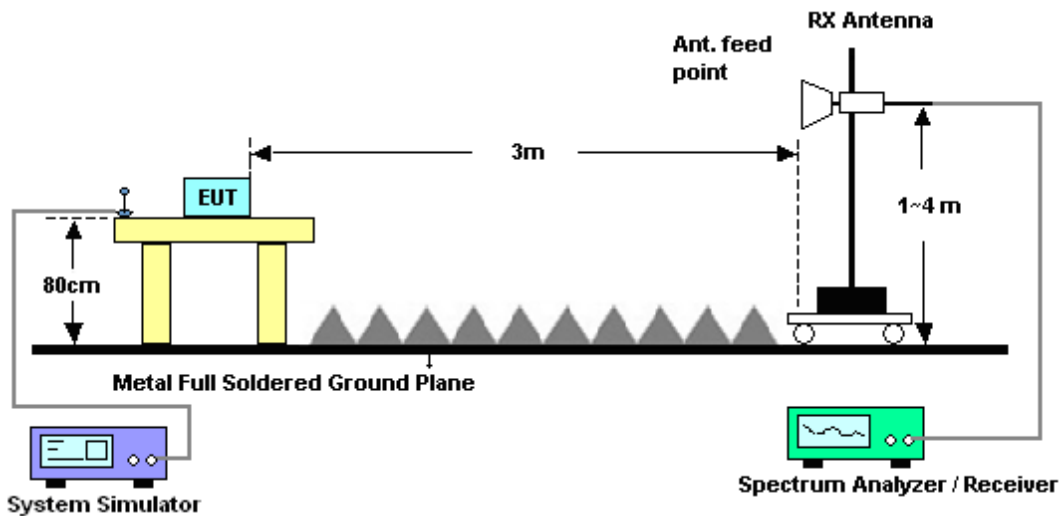

### 3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	WCDMA Band V for CH4132	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
1652.8	-32.73	-13	-19.73	-67.97	-39.41	0.57	9.40	H	Pass
2479.2	-48.90	-13	-35.90	-69.87	-56.60	0.75	10.60	H	Pass
3305.6	-46.65	-13	-33.65	-71.66	-56.23	0.87	12.60	H	Pass

Band :	WCDMA Band V for CH4132	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
1652.8	-54.57	-13	-41.57	-69.26	-61.25	0.57	9.40	V	Pass
2479.2	-46.28	-13	-33.28	-69.79	-53.98	0.75	10.60	V	Pass
3305.6	-42.38	-13	-29.38	-71.43	-51.96	0.87	12.60	V	Pass



Band :	WCDMA Band V for CH4182					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	48~52%		
Test Engineer :	Kaer Huang					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading ( dBm )	Power ( dBm )	loss ( dB )	Gain ( dBi )	( H/V )	
1672	-54.90	-13	-41.90	-69.11	-61.58	0.57	9.40	H	Pass
2510	-49.40	-13	-36.40	-70.32	-57.10	0.75	10.60	H	Pass
3346	-46.98	-13	-33.98	-71.85	-56.56	0.87	12.60	H	Pass

Band :	WCDMA Band V for CH4182					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	48~52%		
Test Engineer :	Kaer Huang					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
1672	-54.11	-13	-41.11	-68.69	-60.79	0.57	9.40	V	Pass
2510	-46.82	-13	-33.82	-70.28	-54.52	0.75	10.60	V	Pass
3346	-43.04	-13	-30.04	-71.96	-52.62	0.87	12.60	V	Pass



Band :	WCDMA Band V for CH4233	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
1693.2	-54.99	-13	-41.99	-69.20	-61.67	0.57	9.40	H	Pass
2539.8	-49.27	-13	-36.27	-70.19	-56.97	0.75	10.60	H	Pass
3386.4	-46.63	-13	-33.63	-71.65	-56.21	0.87	12.60	H	Pass

Band :	WCDMA Band V for CH4233	Temperature :	23~25℃						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1693.2	-54.91	-13	-41.91	-69.68	-61.59	0.57	9.40	V	Pass
2539.8	-46.35	-13	-33.35	-69.85	-54.05	0.75	10.60	V	Pass
3386.4	-42.63	-13	-29.63	-71.63	-52.21	0.87	12.60	V	Pass



Band :	WCDMA Band II for CH9262	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit	Reading	Power	loss	Gain	(H/V)	
			( dB )	(dBm)	( dBm )	( dB )	(dBi)		
3704.8	-43.79	-13	-30.79	-72.43	-55.52	0.87	12.60	H	Pass
5557.2	-43.07	-13	-30.07	-73.39	-55.10	1.07	13.10	H	Pass
7409.6	-44.29	-13	-31.29	-75.95	-53.72	1.87	11.30	H	Pass

Band :	WCDMA Band II for CH9262	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
3704.8	-43.40	-13	-30.40	-71.85	-55.13	0.87	12.6	V	Pass
5557.2	-42.81	-13	-29.81	-73.94	-54.84	1.07	13.1	V	Pass
7409.6	-44.62	-13	-31.62	-76.51	-54.05	1.87	11.3	V	Pass



Band :	WCDMA Band II for CH9400	Temperature :	23~25℃						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading ( dBm )	Power ( dBm )	loss ( dB )	Gain ( dBi )	(H/V)	
3760	-38.41	-13	-25.41	-69.28	-50.14	0.87	12.60	H	Pass
5640	-38.94	-13	-25.94	-69.51	-50.97	1.07	13.10	H	Pass
7520	-44.39	-13	-31.39	-76.05	-53.82	1.87	11.30	H	Pass

Band :	WCDMA Band II for CH9400	Temperature :	23~25℃						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading ( dBm )	Power ( dBm )	loss ( dB )	Gain ( dBi )	(H/V)	
3760	-38.72	-13	-25.72	-69.02	-50.45	0.87	12.6	V	Pass
5640	-42.23	-13	-29.23	-73.36	-54.26	1.07	13.1	V	Pass
7520	-44.46	-13	-31.46	-76.35	-53.89	1.87	11.3	V	Pass





Band :	WCDMA Band II for CH9538					Temperature :	23~25°C		
Test Mode :	RMC 12.2Kbps Link (QPSK)					Relative Humidity :	48~52%		
Test Engineer :	Kaer Huang					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading ( dBm )	Power ( dBm )	loss ( dB )	Gain ( dBi )	( H/V )	
3815.2	-43.05	-13	-30.05	-71.69	-54.78	0.87	12.60	H	Pass
5722.8	-40.94	-13	-27.94	-71.26	-52.97	1.07	13.10	H	Pass
7630.4	-43.98	-13	-30.98	-75.64	-53.41	1.87	11.30	H	Pass

Band :	WCDMA Band II for CH9538	Temperature :	23~25°C						
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	48~52%						
Test Engineer :	Kaer Huang	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	EIRP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	Limit ( dB )	Reading (dBm)	Power ( dBm )	loss ( dB )	Gain (dBi)	(H/V)	
3815.2	-35.70	-13	-22.70	-69.84	-47.43	0.87	12.6	V	Pass
5722.8	-42.80	-13	-29.80	-73.93	-54.83	1.07	13.1	V	Pass
7630.4	-43.94	-13	-30.94	-75.83	-53.37	1.87	11.3	V	Pass

### **3.8 Frequency Stability Measurement**

#### **3.8.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **3.8.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.


#### **3.8.3 Test Procedures for Temperature Variation**

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### **3.8.4 Test Procedures for Voltage Variation**

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

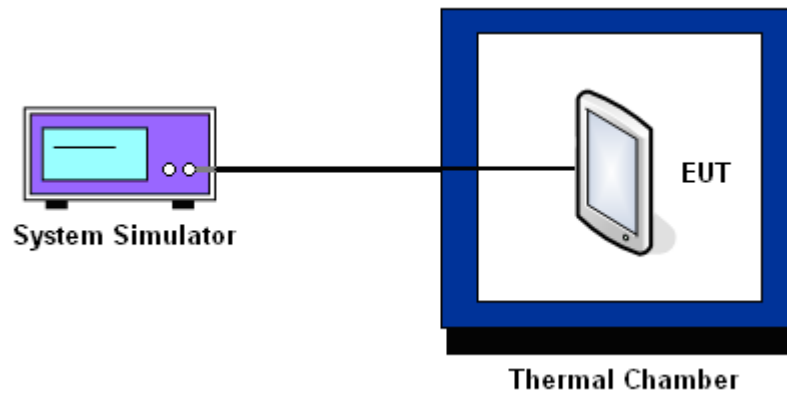

### 3.8.6 Test Result of Temperature Variation

<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	-9	0.0036	PASS
40	-6	0.0000	
30	-8	0.0024	
20(Ref.)	-6	0.0000	
10	-5	0.0012	
0	-7	0.0012	
-10	-8	0.0024	
-20	-7	0.0012	
-30	-9	0.0036	

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
50	13	0.0021	PASS
40	10	0.0005	
30	12	0.0016	
20(Ref.)	9	0.0000	
10	8	0.0005	
0	6	0.0016	
-10	9	0.0000	
-20	12	0.0016	
-30	10	0.0005	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

### 3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
WCDMA Band V CH4182	RMC 12.2Kbps	3.9	-6	0.0000	2.5	PASS
		BEP	-5	0.0012		
		4.35	-8	0.0024		
WCDMA Band II CH9400	RMC 12.2Kbps	3.9	9	0.0000	(Note 3.)	
		BEP	8	0.0005		
		4.35	11	0.0011		

**Note:**

1. Normal Voltage = 3.9V.
2. Battery End Point (BEP) = 3.7 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Mar. 03, 2014	Jan. 04, 2015~ Jan. 26, 2015	Mar. 02, 2015	Conducted (TH01-SZ)
Thermal Chamber	Hongzhangroup	LP-150U	HD20120425	-40℃~150℃	Feb. 21, 2014	Jan. 04, 2015~ Jan. 26, 2015	Feb. 20, 2015	Conducted (TH01-SZ)
ESCIO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Jan. 04, 2015~ Jan. 09, 2015	Feb. 20, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Jan. 04, 2015~ Jan. 09, 2015	May 25, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	37877	30MHz~2GHz	Oct. 15, 2014	Jan. 04, 2015~ Jan. 09, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Jan. 04, 2015~ Jan. 09, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101073	18GHz~40GHz	Jun. 09, 2014	Jan. 04, 2015~ Jan. 09, 2015	Jun. 08, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Feb. 21, 2014	Jan. 04, 2015~ Jan. 09, 2015	Feb. 20, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Jan. 04, 2015~ Jan. 09, 2015	May 07, 2015	Radiation (03CH01-SZ)
AC Source(AVR)	Chroma	61601	616010001985	100Vac~250Vac	Mar. 25, 2014	Jan. 04, 2015~ Jan. 09, 2015	Mar. 24, 2015	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Jan. 04, 2015~ Jan. 09, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Jan. 04, 2015~ Jan. 09, 2015	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP 7	100818	9kHz~7GHz	Jul. 17, 2014	Jan. 23, 2015	Jul. 16, 2015	ERP/EIRP (OTA02-SZ)
Quad-Ridged Horn	ETS-Lindgren	3164-08	00102954	700MHz~10000M Hz	N/A	Jan. 23, 2015	N/A	ERP/EIRP (OTA02-SZ)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00108147	N/A	N/A	Jan. 23, 2015	N/A	ERP/EIRP (OTA02-SZ)
Switch Control Mainframe	Agilent	3499A	MY42005451	N/A	N/A	Jan. 23, 2015	N/A	ERP/EIRP (OTA02-SZ)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.9 dB
--	--------