



MetaWear

Wearable and connected devices product solution

Preliminary Product Specification v0.5

Key Features

- Nordic Semiconductor nRF51822 BLE SoC
 - 2.4 GHz transceiver
 - ARM[®] Cortex[™]-M0 32 bit processor
 - 256 kB flash program memory
 - 16 kB RAM
 - 8/9/10 bit ADC
- Freescale[™] MMA8452Q 3-Axis Accelerometer
 - $\pm 2g/\pm 4g/\pm 8g$ selectable scale
 - 12-bit/8-bit resolution
 - Data rates from 1.56 Hz to 800 Hz
 - Embedded event detection processor
- Lithium Ion/Polymer battery charger
 - CC/CV charging to 4.2V
 - Automatic pre-conditioning trickle charge
 - 90mA charge current for ultra portable batteries
- Ultra-Bright RGB LED with 20mA driver
- Miniature push-button switch
- High current driver for external vibration motor
- Micro-USB rechargeable
- Battery charge monitor
- I/O Expansion
 - Digital I²C Bus
 - 4 Analog/Digital Pins
 - 4 Digital Pins
- Tiny 26mm x 17mm x 2.5mm form factor
- Pending FCC, CE, IC C-Tick certification

Table of Contents

1	Introduction	4
2	Product Overview.....	4
2.1	Pin Assignments	4
2.2	Pin Functions	5
4	Absolute Maximum Ratings	6
5	Operating Conditions	6
6	Electrical Specifications.....	6
6.1	General Purpose I/O (GPIO) Specifications	6
6.2	Crystal Oscillator Specifications	7
6.3	ADC (ADC) Specifications	7
6.4	Temperature Sensor (TEMP) Specifications.....	7
6.5	Battery Charger (BC) Specifications	8
6.6	High Current Driver (HCD) Specifications.....	8
6.7	System Voltage Regulator (VREG) Specifications.....	8
6.8	Accelerometer (ACCEL) Specifications	9
6.9	LED + Driver (LED) Specifications	9
7	Mechanical Specifications.....	10
8	Typical Application Circuit.....	11
9	Revision History.....	11
10	Regulatory Statements.....	12
10.1	FCC Statements	12
10.1.1	OEM Integration Requirements	12
10.2	FCC Labeling Requirements.....	13
10.3	IC Statements	13
10.4	IC Labeling Requirements.....	13
11	Information to the User	13
11.1	FCC Part 15.21	13

1 Introduction

MetaWear is a complete development and production platform for wearable and connected device applications. It features the ultra-low power nRF51822 SoC, providing energy efficient smartphone communication and central processing. MetaWear integrates this radio with high value sensors and a rechargeable battery architecture into a miniature form factor. All circuits have been designed from the ground up with energy efficiency in mind.

2 Product Overview

2.1 Pin Assignments

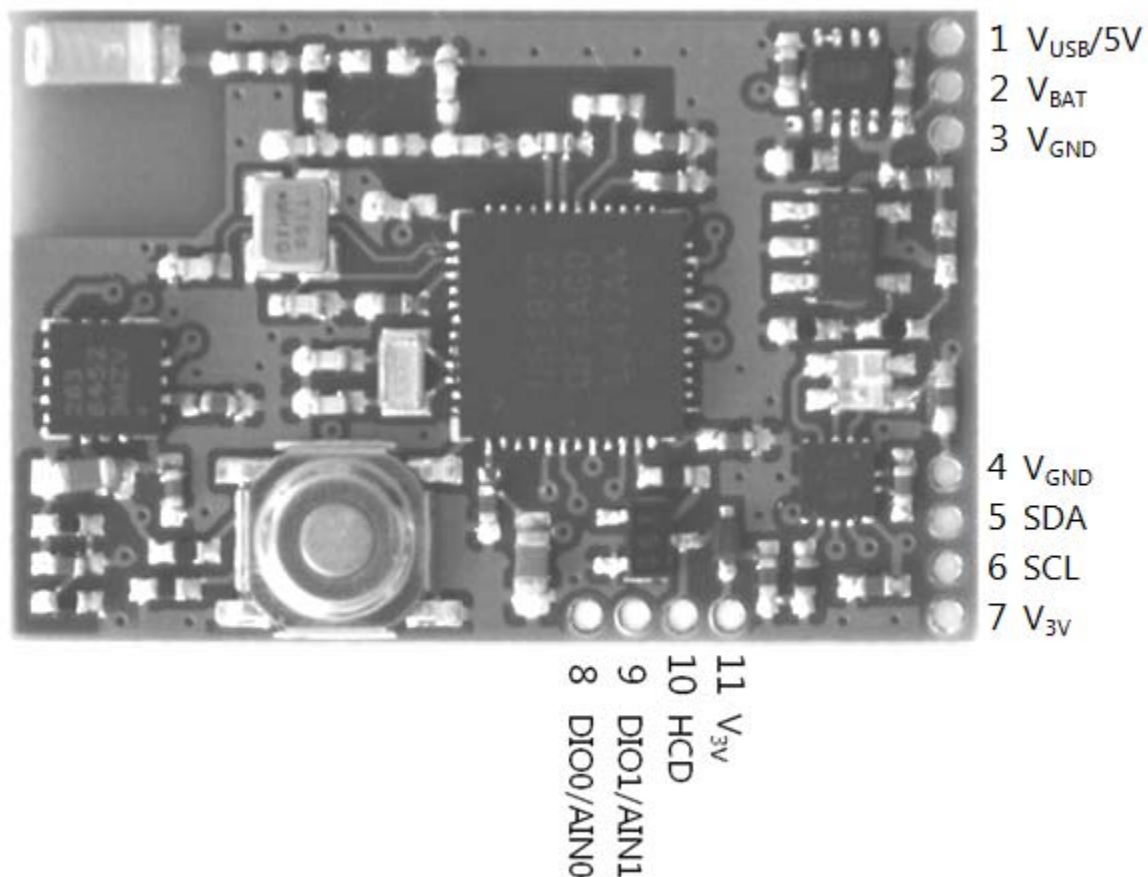


Figure 1 Module Pin Assignments

2.2 Pin Functions

Pin	Pin Name	Function	Description
Power Supply			
1	V _{USB}	Power	Positive supply alternative to micro USB port.
2	V _{BAT}	Power	Positive battery connection.
3	V _{GND}	Power	Ground connection intended for battery.
Digital Peripheral Bus			
4	V _{GND}	Power	Supplementary ground for peripheral expansion.
5	SDA	Digital I/O	I ² C serial data.
6	SCL	Digital I/O	I ² C serial clock.
7	V _{3V}	Power	Regulated 3V output for peripheral expansion.
Analog / High Current Driver Bus			
8	DIO0	Digital I/O	General purpose I/O and analog input.
	AIN0	Analog I/O	
9	DIO1	Digital I/O	General purpose I/O and analog input.
	AIN1	Analog I/O	
10	HCD	High Current Driver	Switch for sinking high current peripherals.
11	V _{3V}	Power	Regulated 3V output for high current peripheral.
Surface Mount Extra Breakout			
12	DIO2	Digital I/O	General purpose I/O and analog input.
	AIN2	Analog I/O	
13	DIO3	Digital I/O	General purpose I/O and analog input.
	AIN3	Analog I/O	
14	DIO4	Digital I/O	General purpose I/O.
15	DIO5	Digital I/O	General purpose I/O.
16	DIO6	Digital I/O	General purpose I/O.
17	DIO7	Digital I/O	General purpose I/O.

Table 1 Pin Functions

4 Absolute Maximum Ratings

Spec	Description	Min.	Typ.	Max.	Units
V _{USB}	USB charging voltage.	-0.3		+8.0	V
V _{BAT}	Lithium battery voltage.	-0.3		+6.0	V
V _{GND}	Ground voltage			0	V
V _{IO}	I/O Pin Voltage	-0.3		+3.3	V
T _{MAX}	Storage Temperature	-40		125	°C

Table 2 Absolute Maximum Ratings

5 Operating Conditions

Spec	Description	Min.	Typ.	Max.	Units
V _{USB}	USB charging voltage.	4.0	5.0	7.5	V
V _{BAT}	Lithium battery voltage.	3.0	3.7	4.2	V
T _A	Operating temperature.	-25	25	75	°C
I _{IDLE}	Idle current consumption.		5	8	uA

Table 3 Operating Conditions

6 Electrical Specifications

6.1 General Purpose I/O (GPIO) Specifications

Spec	Description	Min.	Typ.	Max.	Units
V _{IH}	Input high voltage.	2.1		3.0	V
V _{IL}	Input low voltage.	0		0.9	V
V _{OH}	Output high voltage.	2.7		3.0	V
V _{OL}	Output low voltage.	0		0.3	V
R _{PU}	Pull-up resistance.	11	13	16	kΩ
R _{PD}	Pull-down resistance.	11	13	16	kΩ

Table 4 General Purpose I/O (GPIO) Specifications

6.2 Crystal Oscillator Specifications

Spec	Description	Min.	Typ.	Max.	Units
$f_{HF,NOM}$	High frequency crystal frequency		16		MHz
$f_{HF,TOL}$	High frequency crystal tolerance		± 40		ppm
$f_{LF,NOM}$	Low frequency crystal frequency		32.768		kHz
$f_{LF,TOL}$	Low frequency crystal tolerance		± 50		ppm

Table 5 Crystal Oscillator Specifications

6.3 ADC (ADC) Specifications

Spec	Description	Min.	Typ.	Max.	Units
DNL_{10b}	Differential non-linearity (10 bit mode).		<1		LSB
INL_{10b}	Integral non-linearity (10 bit mode).		2		LSB
V_{OS}	Offset error.	-2		+2	%
V_{REF_INT}	Internal reference voltage.	-1.5	1.20 V	+1.5	%
TC_{REF_INT}	Internal reference voltage drift.	-200		+200	ppm/°C
t_{ADC10b}	Sample conversion time (10 bit mode).		68		μs
t_{ADC9b}	Sample conversion time (9 bit mode).		36		μs
t_{ADC8b}	Sample conversion time (8 bit mode).		20		μs

Table 6 ADC Specifications

6.4 Temperature Sensor (TEMP) Specifications

Spec	Description	Min.	Typ.	Max.	Units
T_{RANGE}	Temperature sensor range.	-25		75	°C
T_{ACC}	Temperature sensor accuracy.	-4		+4	°C
T_{RES}	Temperature sensor resolution.		0.25		°C

Table 7 Temperature Sensor (TEMP) Specifications

6.5 Battery Charger (BC) Specifications

Spec	Description	Min.	Typ.	Max.	Units
$I_{BC,OP}$	Operating current (V_{USB} powered).		0.5	1	mA
$I_{BC,LEAKAGE}$	Reverse leakage (V_{USB} disconnected).		0.4	2	μ A
$V_{BC,EOC}$	End of charge voltage.	4.158	4.20	4.242	V
$V_{BC,PRECON}$	Preconditioning voltage threshold.	2.85	3.0	3.15	V
$V_{BC,RCH}$	Recharge voltage threshold.	$V_{BC,EOC} - 0.1$			V
$I_{BC,CHNOM}$	Nominal charge current.	81	90	99	mA
$I_{BC,PCH}$	Preconditioning charge current.		9		mA
$I_{BC,TERM}$	Charge termination threshold current.		9		mA

Table 8 Battery Charger (BC) Specifications

6.6 High Current Driver (HCD) Specifications

Spec	Description	Min.	Typ.	Max.	Units
$I_{ON,SS25}$	Steady state on current at 25°C.			310	mA
$I_{ON,SS85}$	Steady state on current at 85°C.			220	mA
$P_{ON,SS}$	Steady state power dissipation.			280	mW
$I_{ON,PULSE}$	Pulsed current for 10 μ s.			1.4	A
R_{ON}	On state resistance.		2	5	Ω
$I_{OFF,LEAK}$	Off state leakage.			1	nA
V_{CLAMP}	Clamping diode voltage threshold.		3.3		V

Table 9 High Current Driver (HCD) Specifications

6.7 System Voltage Regulator (VREG) Specifications

Spec	Description	Min.	Typ.	Max.	Units
V_{OUT}	Regulated output voltage.	2.93	3	3.07	V
	Line regulation.	-1		+1	%
	Load regulation.	-2		+2	%
V_{DO}	Dropout voltage.			250	mV
I_{CL}	Output current limit.	150	230	400	mA
$I_{GND,IDLE}$	System idle ground current.		1	1.3	μ A

Table 10 System Voltage Regulator (VREG) Specifications

6.8 Accelerometer (ACCEL) Specifications

Spec	Description	Min.	Typ.	Max.	Units
	Measurement range.	± 2		± 8	g
	Resolution.	256		1024	counts/g
f_{DATA}	Data sample frequency.	1.56		800	Hz
$I_{12.5}$	Low data rate current (12.5 Hz).		6		μA
I_{100}	Mid data rate current (100 Hz).		24		μA
I_{800}	High data rate current (800 Hz).		165		μA
I_{STANDBY}	Standby current.		1.8	5	μA

Table 11 Accelerometer (ACCEL) Specifications

6.9 LED + Driver (LED) Specifications

Spec	Description	Min.	Typ.	Max.	Units
I_{RGB}	Drive current per channel.	21.5	22.2	22.9	mA
λ_{RPEAK}	Red peak wavelength.		630		nm
λ_{GPEAK}	Green peak wavelength.		515		nm
λ_{BPEAK}	Blue peak wavelength.		460		nm
I_{VR}	Red luminous intensity.	60	120		mcd
I_{VG}	Green luminous intensity.	130	305		mcd
I_{VB}	Blue luminous intensity.	45	75		mcd
	Viewing Angle		120		°

Table 12 LED + Driver (LED) Specifications

7 Mechanical Specifications

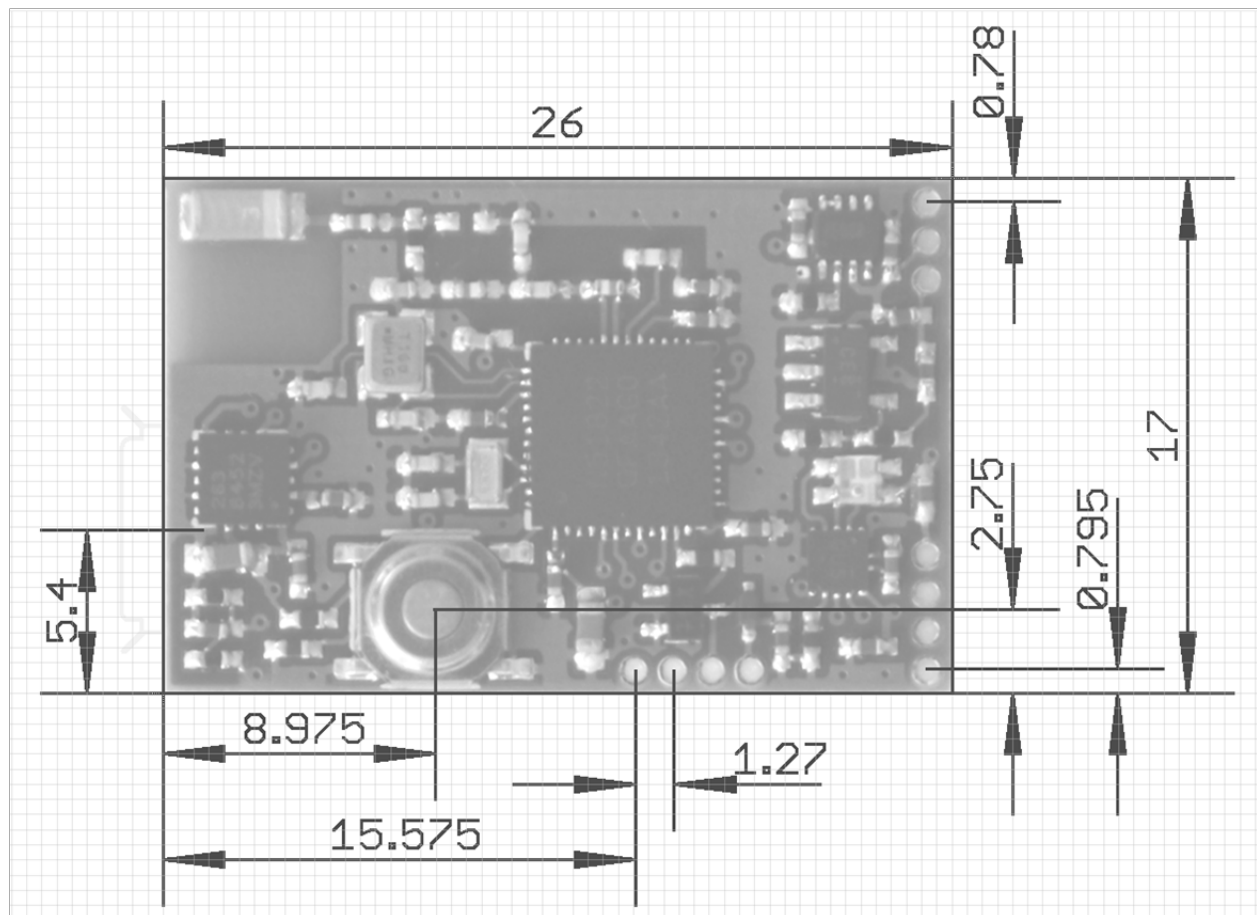


Figure 2 Module dimensions in mm

8 Typical Application Circuit

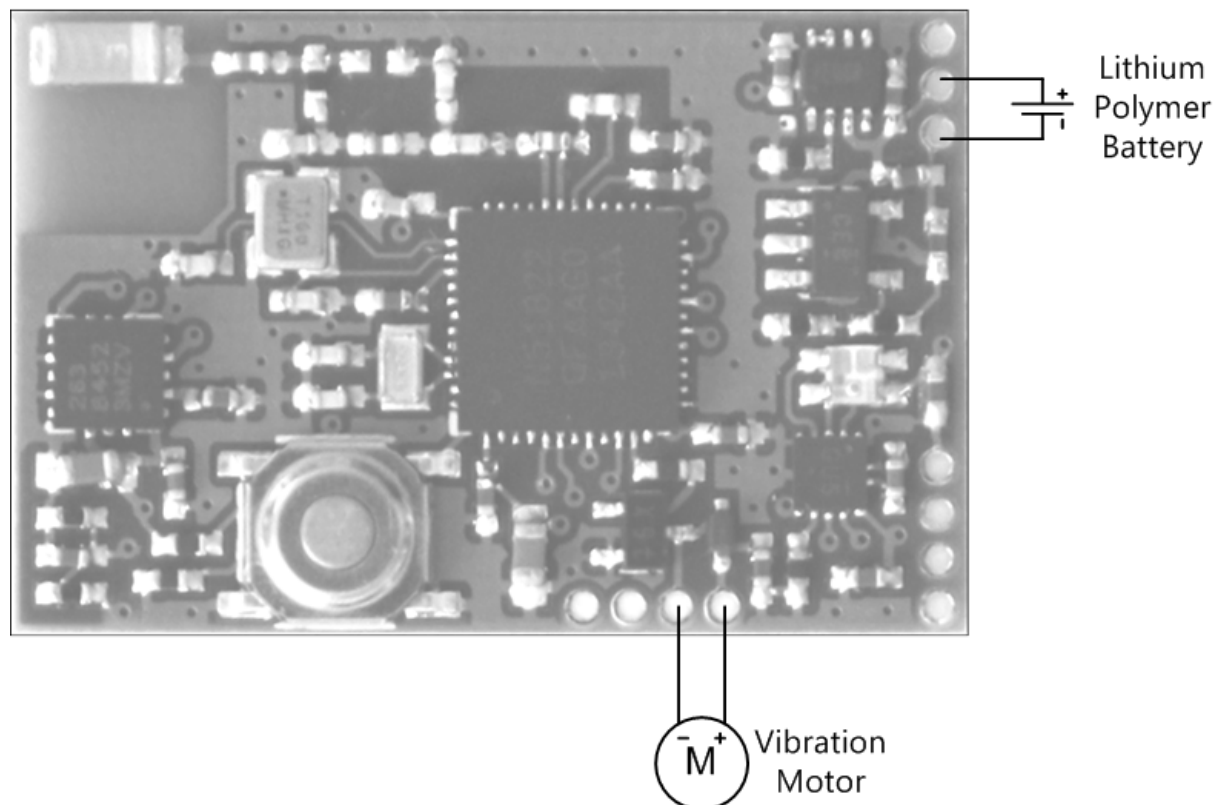


Figure 3 Typical Application Circuit

9 Revision History

Date	Version	Change Description
July 7, 2014	0.6	Added Regulatory Statements Section
June 2, 2014	0.5	Initial Draft

Table 13 Revision History

10 Regulatory Statements

10.1 FCC Statements

The MetaWear module was approved for 'Limited Modular' use and complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

MetaWear may be used in devices without any further agency testing for intentional radiation compliance (FCC Part 15 Subparts C & E and IC RSS-210).

10.1.1 OEM Integration Requirements

- This module has a limited modular approval. Approval with any other antenna configuration or layout other than that approved will necessitate additional radiated emission testing to be performed.
- To inherit the modular approval, the antenna for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
- This module is authorized for use in mobile and portable applications.

Refer to FCC document KDB 447498 for more information on RF exposure procedures and equipment authorization policies for mobile and portable devices.

- This module was approved with the following antenna:
Walsin Technology Corporation: RFANT3216120A5T 2 dBi

If you use a similar type antenna, it must have a gain that is less than or equal to the gain of these antennas. If you do not satisfy this criterion, the Limited Modular Approval no longer applies and you must recertify your product for compliance with intentional radiation regulatory requirements. Operation of this module with any other antenna might require additional testing to be performed.

- Co-location with other radio transmitting devices operating concurrently in the same band will require additional testing and certification.

10.2 FCC Labeling Requirements

If the FCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains Transmitter Module FCC ID: 2ACEB-METAR1" or "Contains FCC ID: 2ACEB-METAR1". Any similar wording that expresses the same meaning may be used.

10.3 IC Statements

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage, et
2. L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IMPORTANT! Tous les changements ou modifications pas expressément approuvés par la partie responsable de la conformité ont pu vider l'autorité de l'utilisateur pour actionner cet équipement.

10.4 IC Labeling Requirements

Labeling requirements for Industry Canada are similar to those required by the FCC. A clearly visible label on the outside of a non-removable part of the final product must include the following text: "Contains IC: 12118A-METAR1".

Les exigences d'étiquetage pour l'Industrie Canada sont semblables à ceux exigés par la FCC. Une étiquette bien visible à l'extérieur d'une partie non amovible du produit doit inclure le texte suivant: "Contains IC: 12118A-METAR1".

11 Information to the User

11.1 FCC Part 15.21

Change or Modifications that are not expressly approved by the manufacturer could void the user's authority to operate the equipment.