
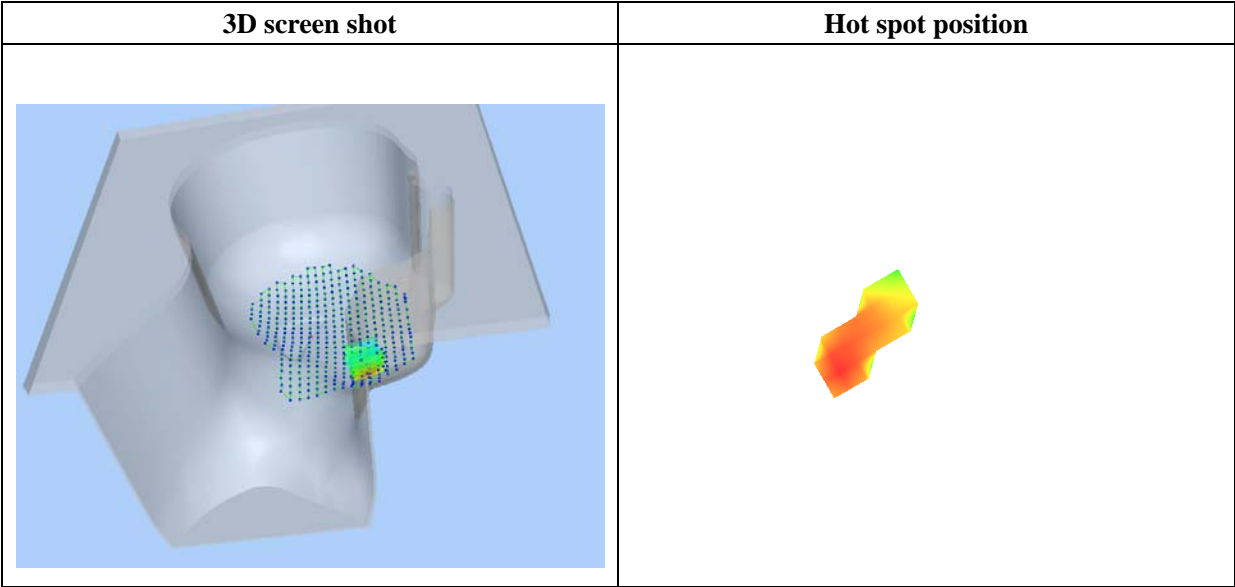


Maximum location: X=-55.00, Y=-63.00

SAR 10g (W/Kg)	0.033162
SAR 1g (W/Kg)	0.061869

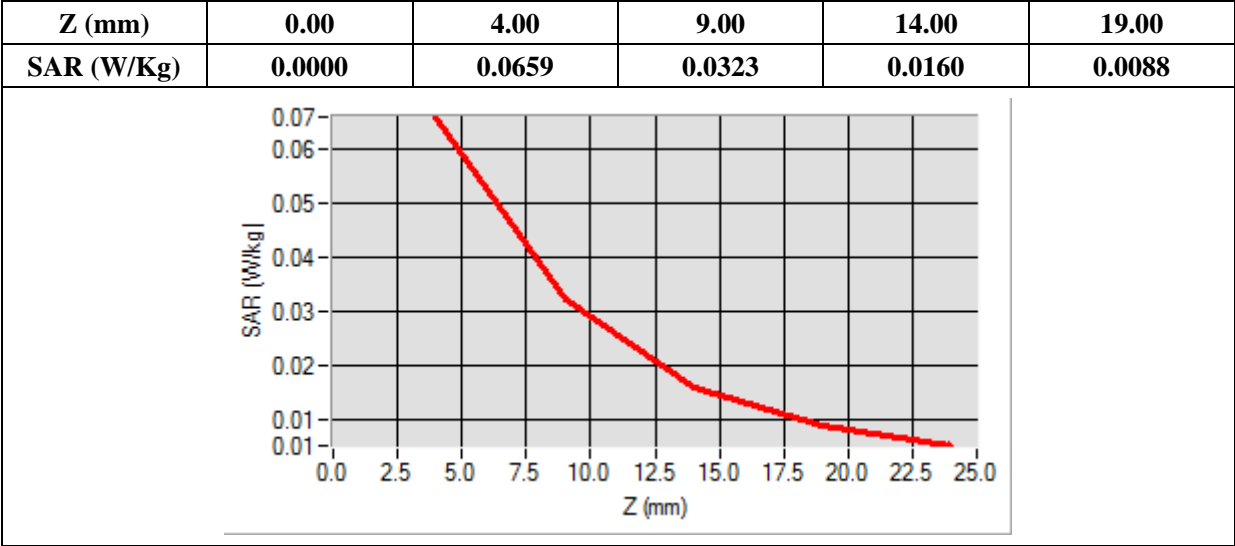

## MEASUREMENT 17

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)



### B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	41.0200000
Conductivity (S/m)	1.450000
Power Variation (%)	-0.514000
Ambient Temperature	21.1
Liquid Temperature	21.3

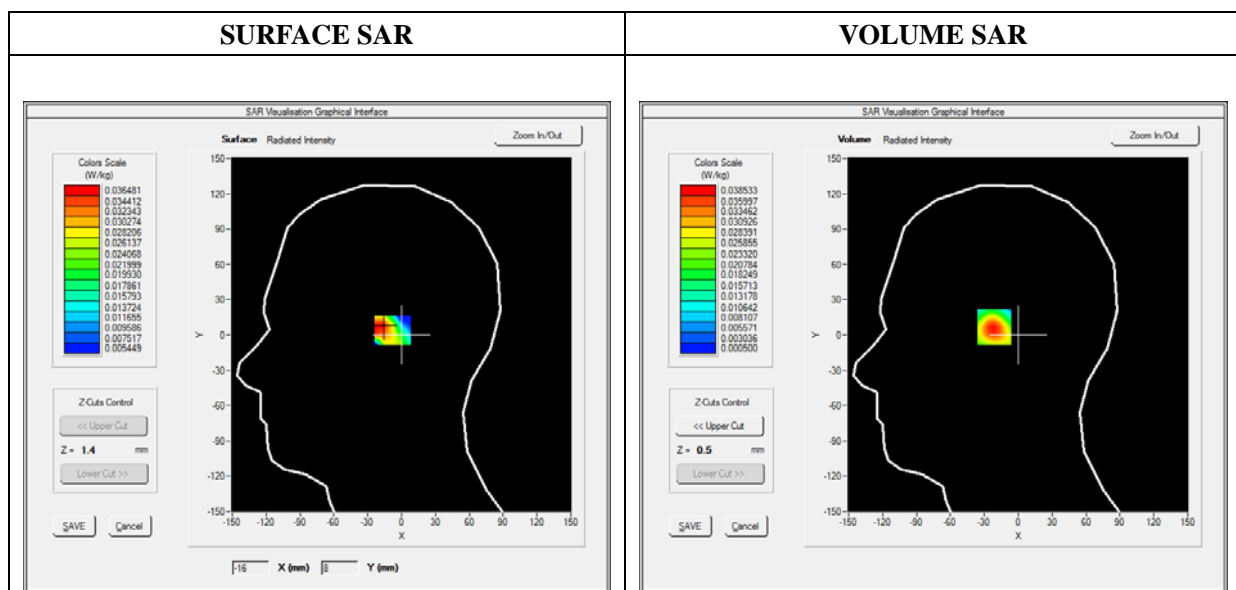

Maximum location: X=-20.00, Y=7.00

SAR 10g (W/Kg)	0.019162
SAR 1g (W/Kg)	0.035527

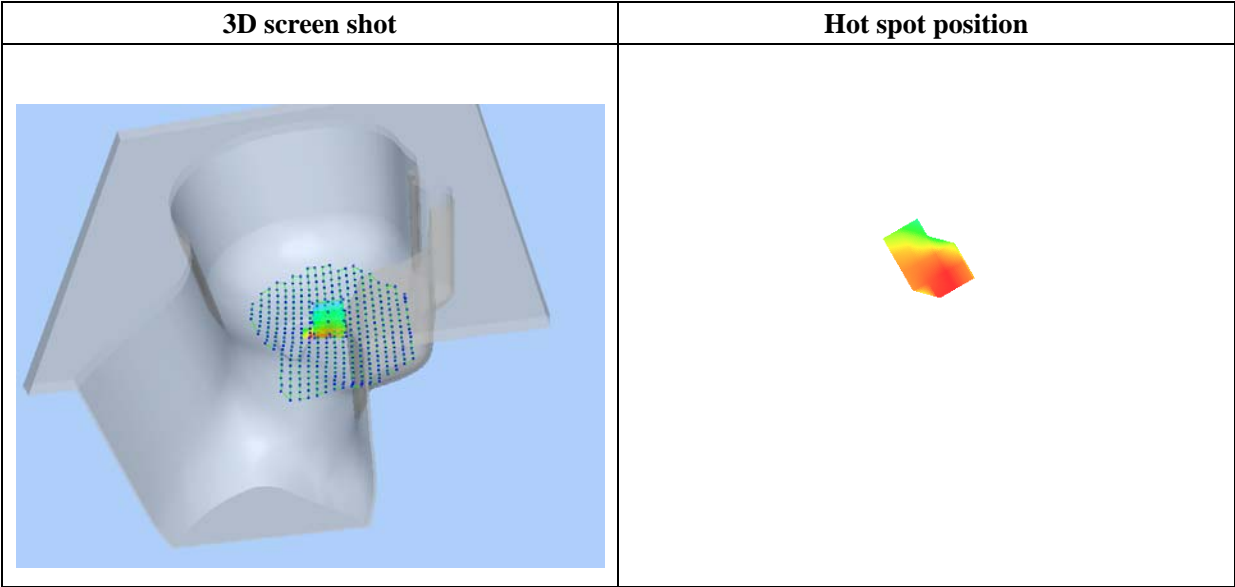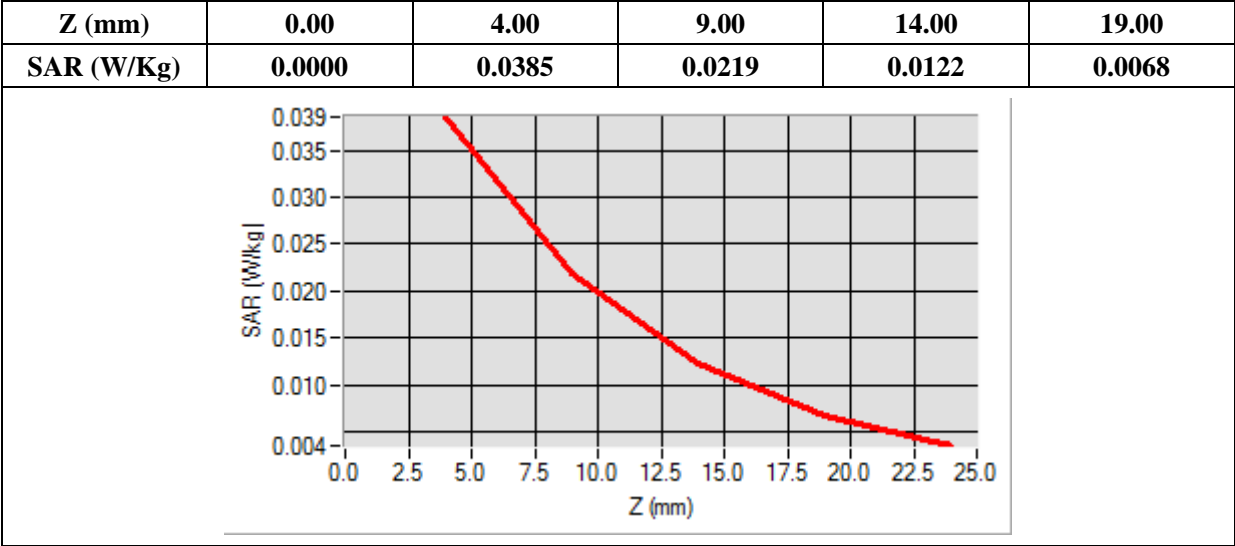

## MEASUREMENT 18

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back(Body-worn)
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)



### B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

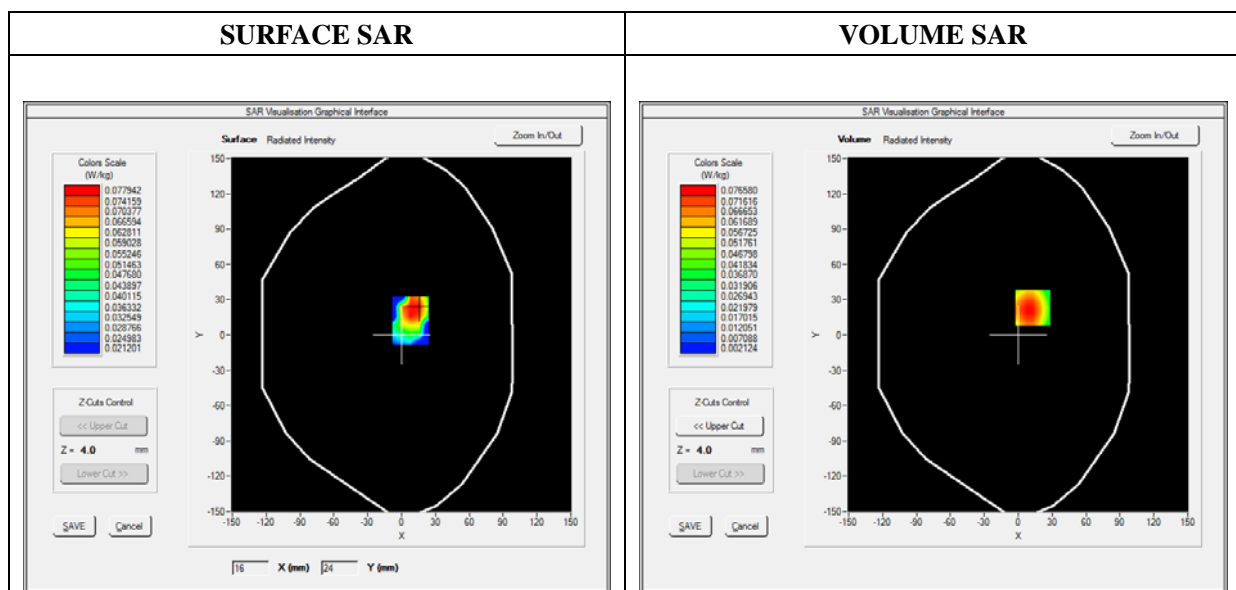

Maximum location: X=13.00, Y=23.00

SAR 10g (W/Kg)	0.048888
SAR 1g (W/Kg)	0.088396

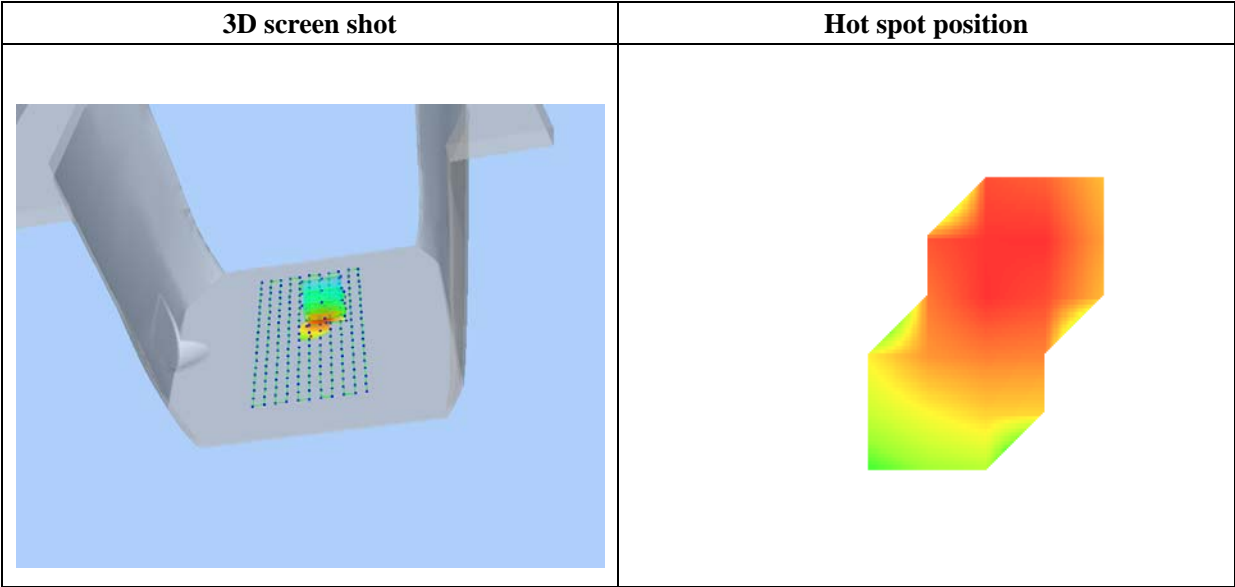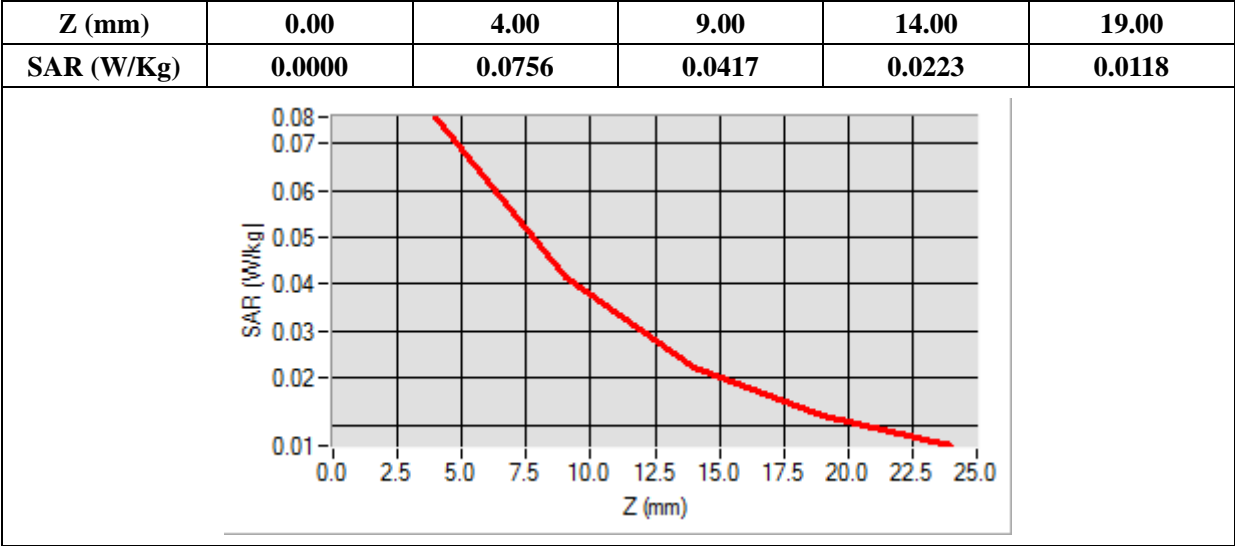

## MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)



### B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

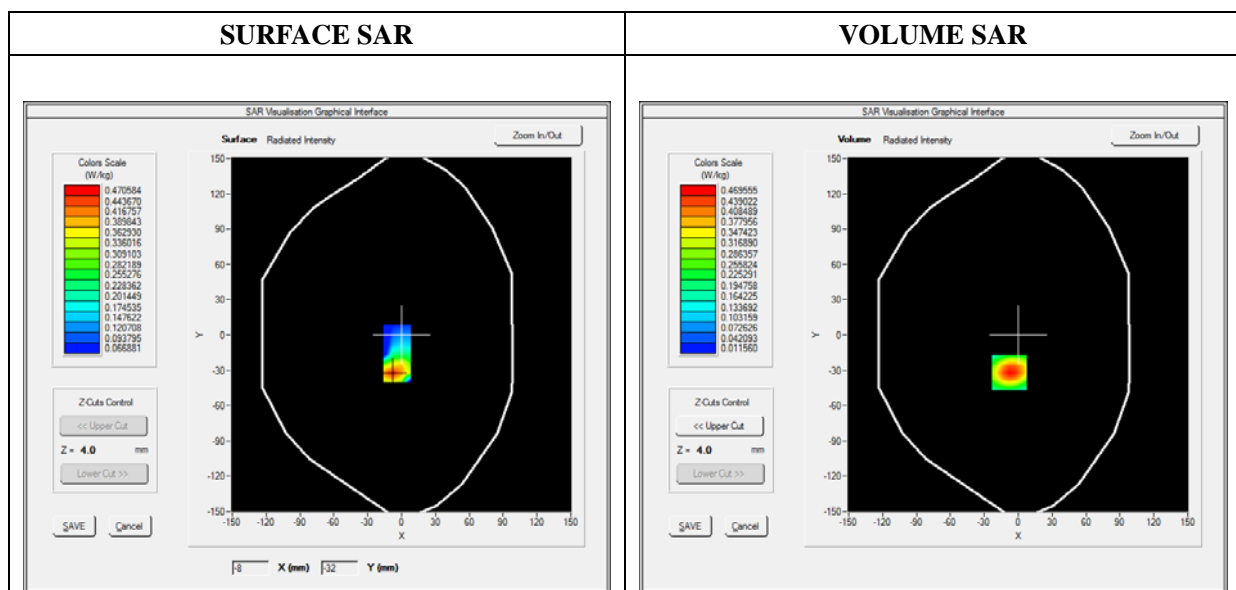

Maximum location: X=-8.00, Y=-32.00

SAR 10g (W/Kg)	0.267537
SAR 1g (W/Kg)	0.527926

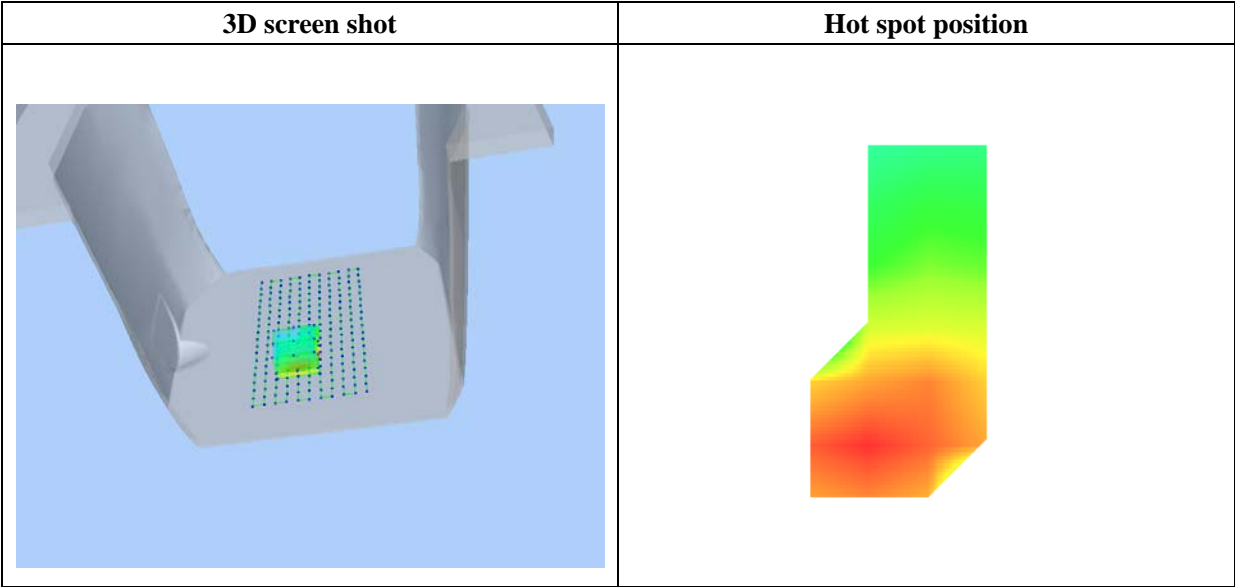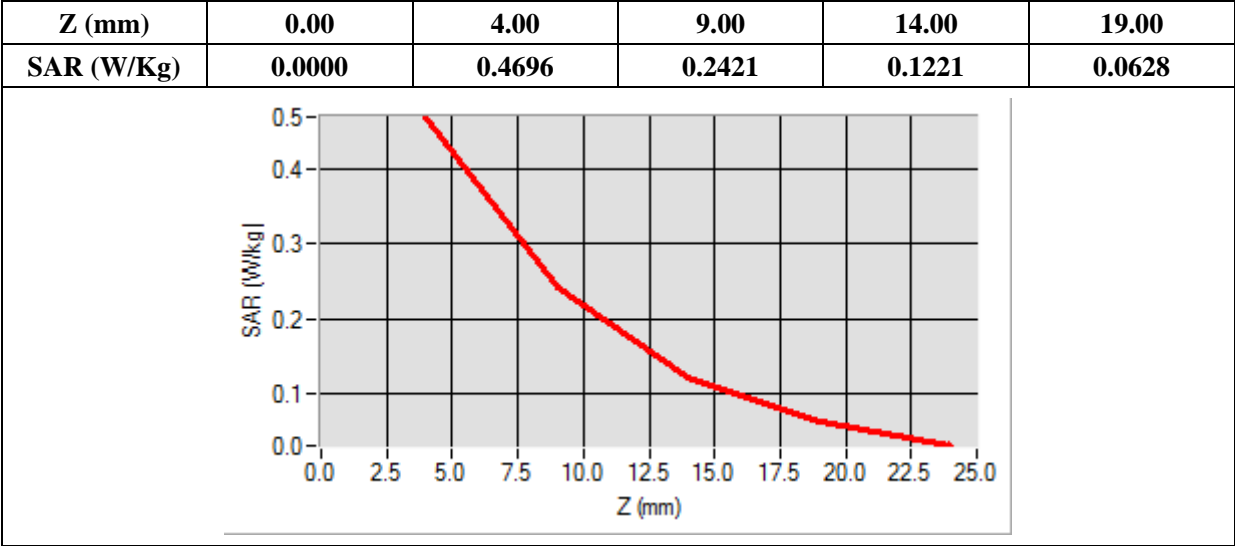

## MEASUREMENT 20

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS1900_4TX
Channels	Middle
Signal	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

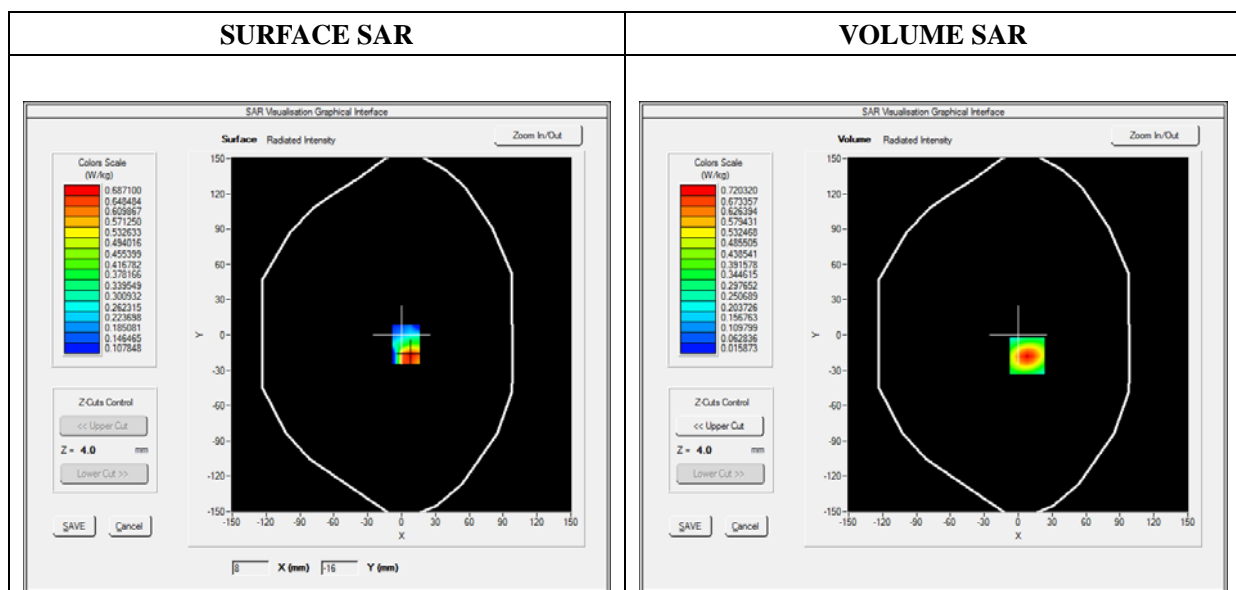



Maximum location: X=8.00, Y=-18.00

SAR 10g (W/Kg)	0.331095
SAR 1g (W/Kg)	0.656894

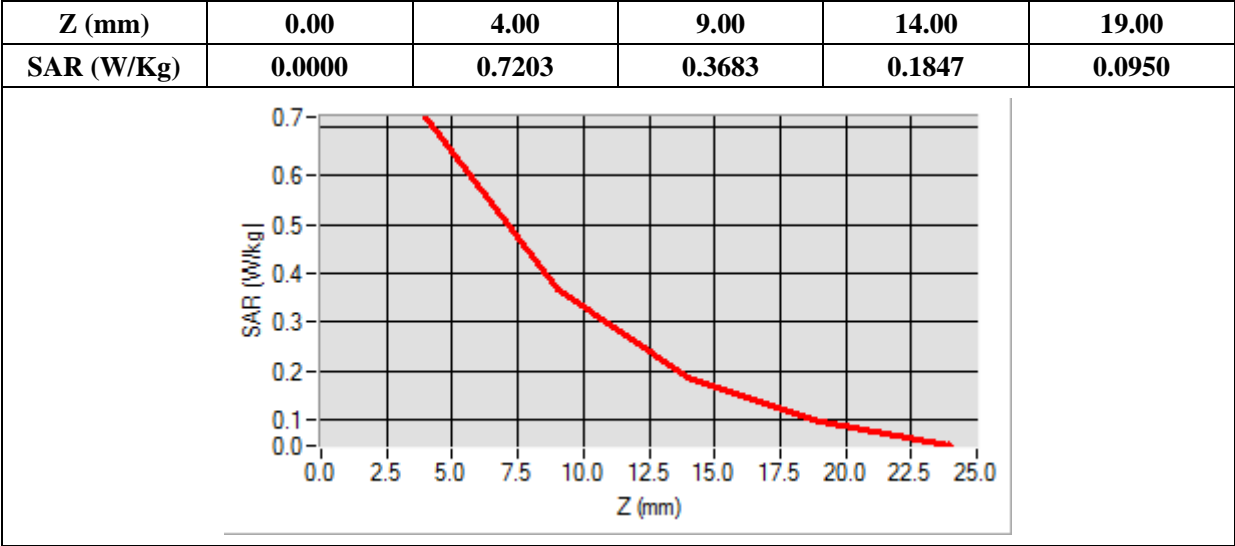

3D screen shot	Hot spot position

## MEASUREMENT 21

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Front
Band	GPRS1900_4TX
Channels	Middle
Signal	Duty Cycle: 3.00 (Crest factor: 3.00)



### B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

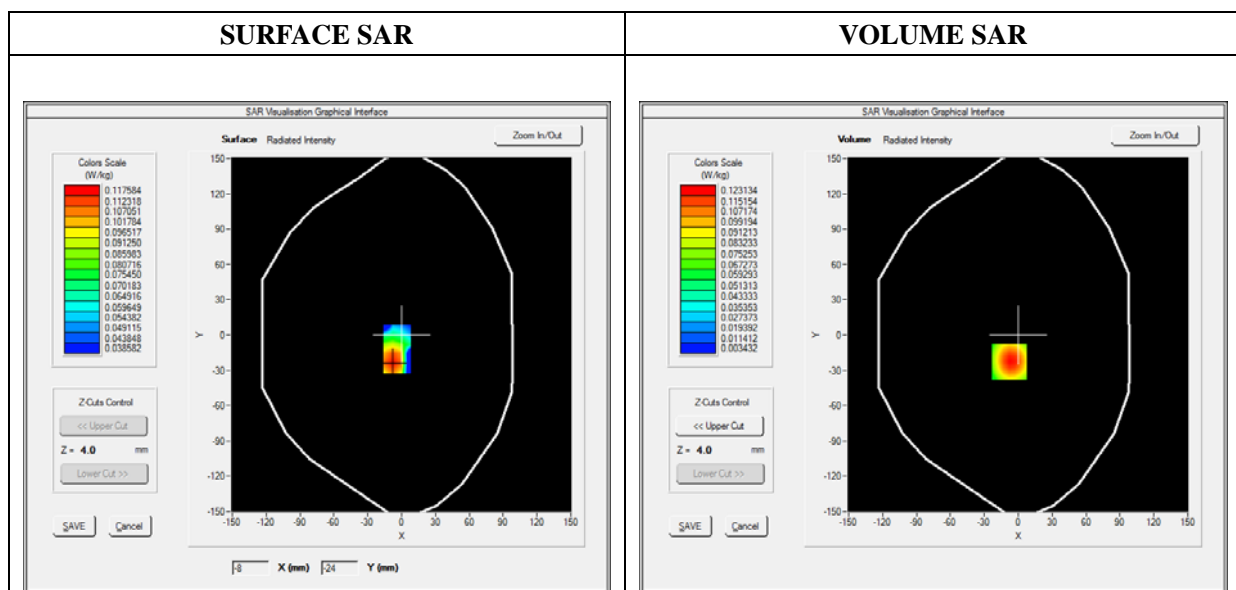

Maximum location: X=-8.00, Y=-23.00

SAR 10g (W/Kg)	0.061593
SAR 1g (W/Kg)	0.115799

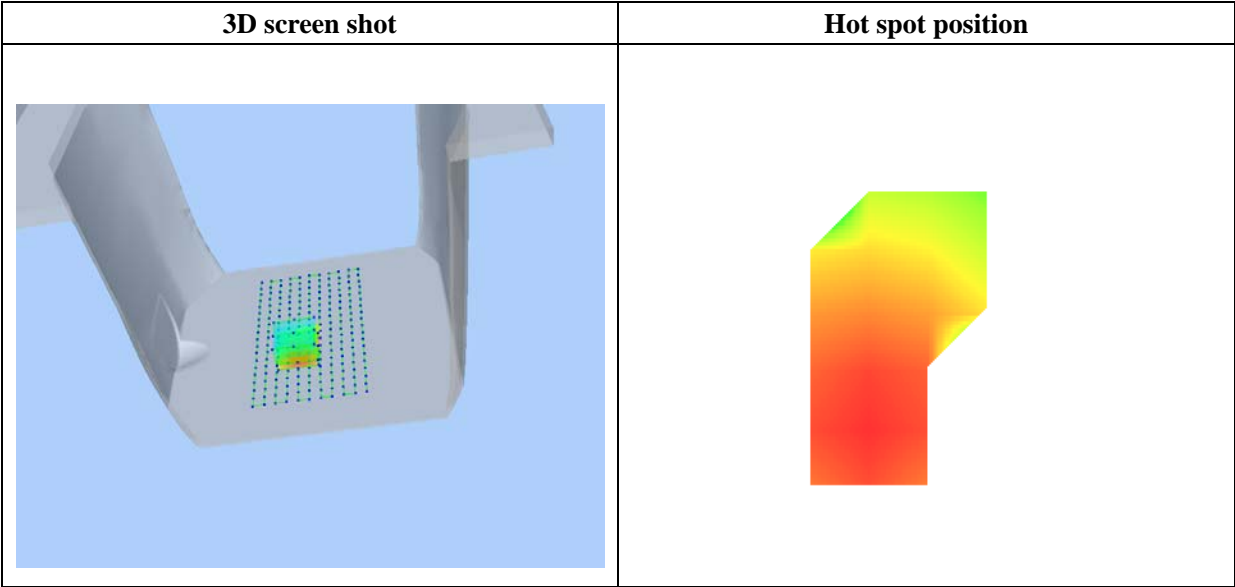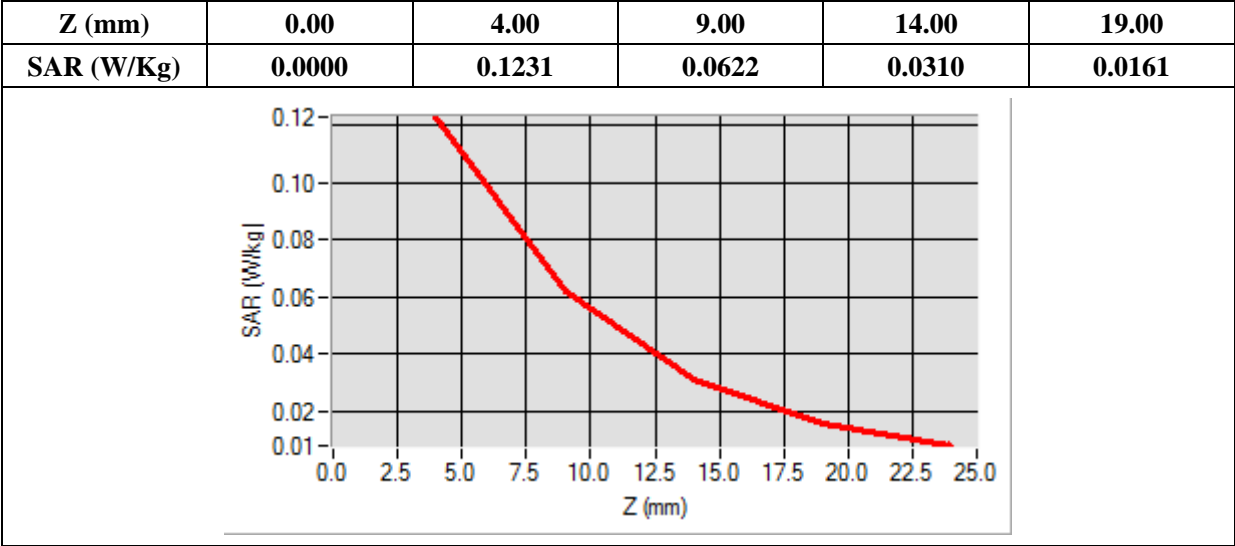

MEASUREMENT 22


Type: Phone measurement (Complete)  
Date of measurement: 07/28/2014  
Measurement duration: 12 minutes 3 seconds  
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	GPRS1900_4TX
Channels	Middle
Signal	Duty Cycle: 3.00 (Crest factor: 3.00)



B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

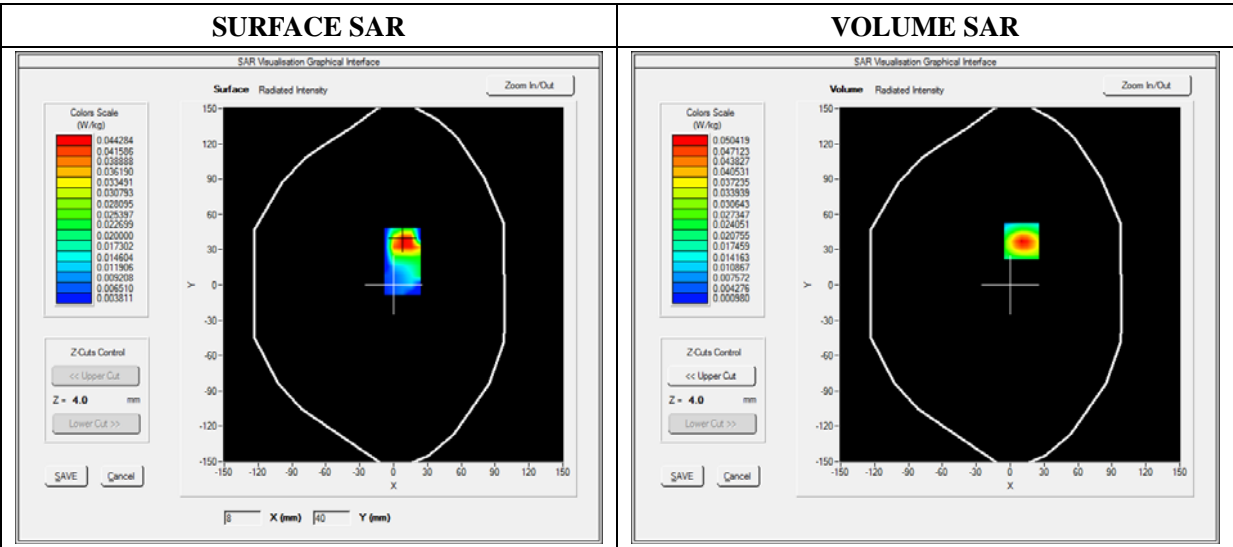

Maximum location: X=-35.00, Y=-17.00

SAR 10g (W/Kg)	0.060411
SAR 1g (W/Kg)	0.105798

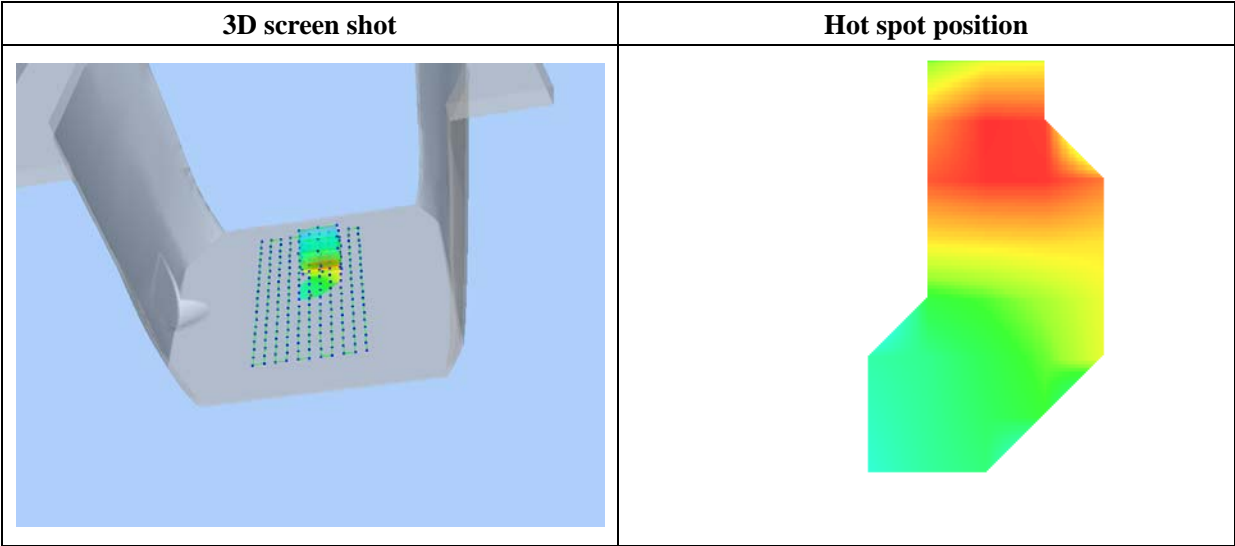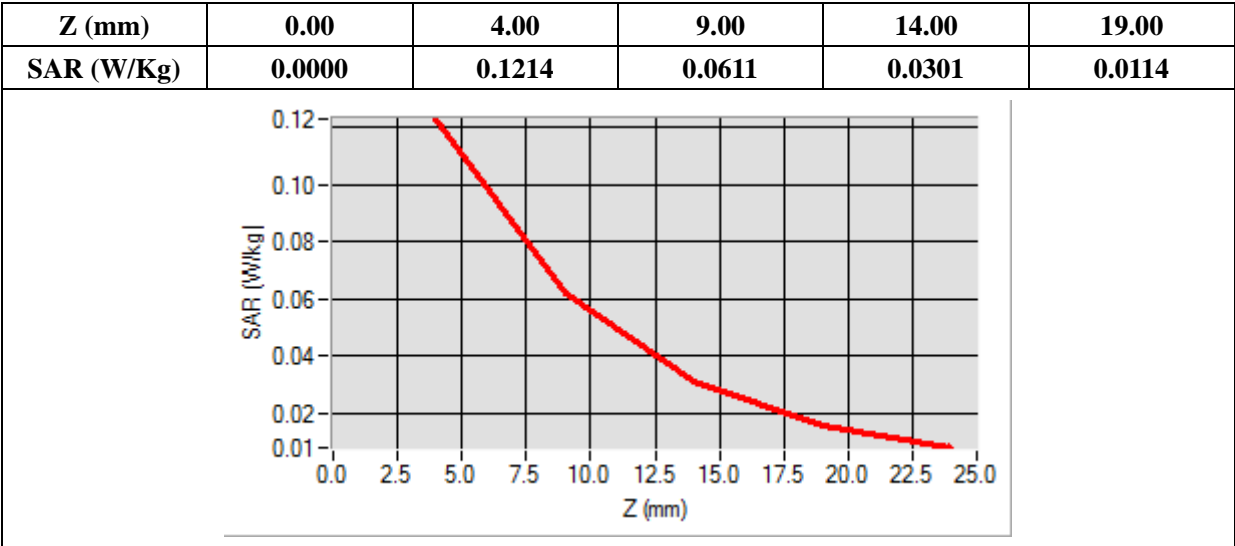

## MEASUREMENT 23

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Right side
Band	GPRS1900_4TX
Channels	Middle
Signal	Duty Cycle: 3.00 (Crest factor: 3.00)



### B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

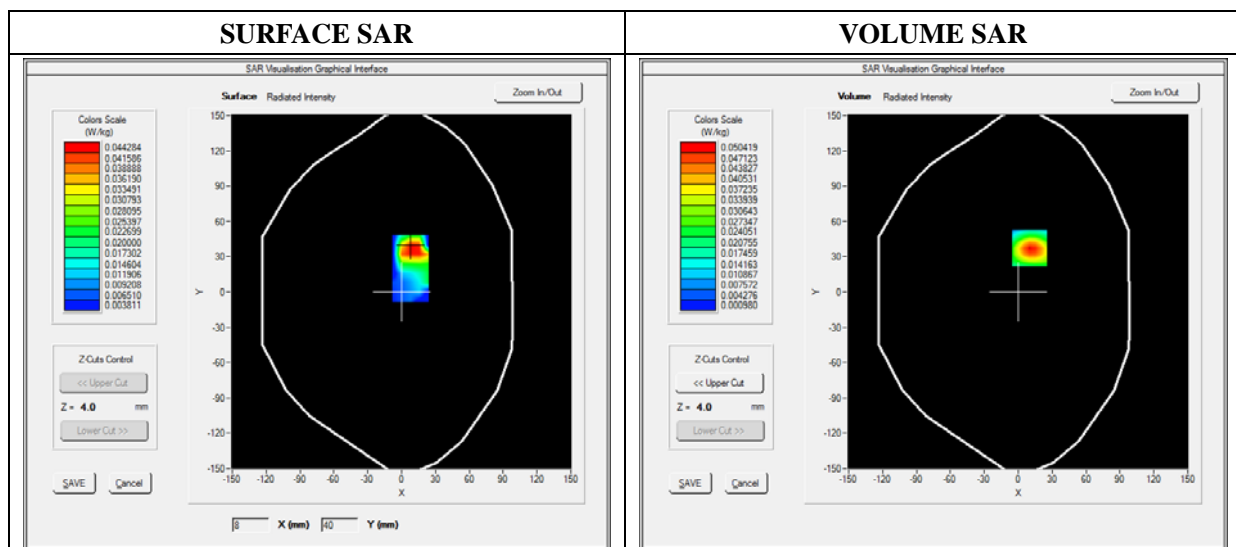

Maximum location: X=-50.00, Y=-53.00

SAR 10g (W/Kg)	0.019811
SAR 1g (W/Kg)	0.036541

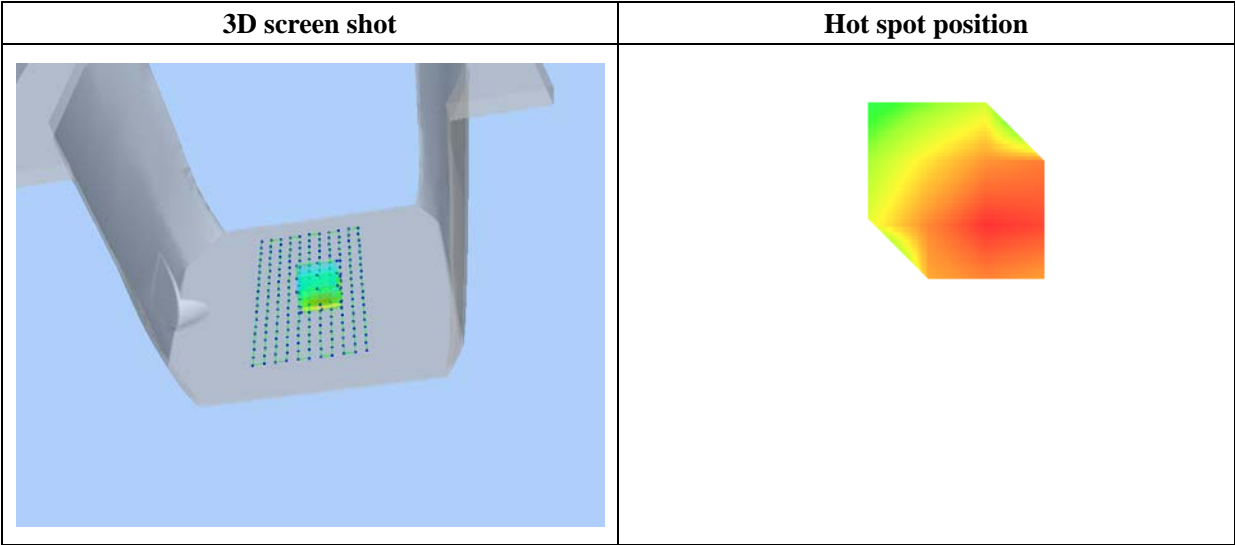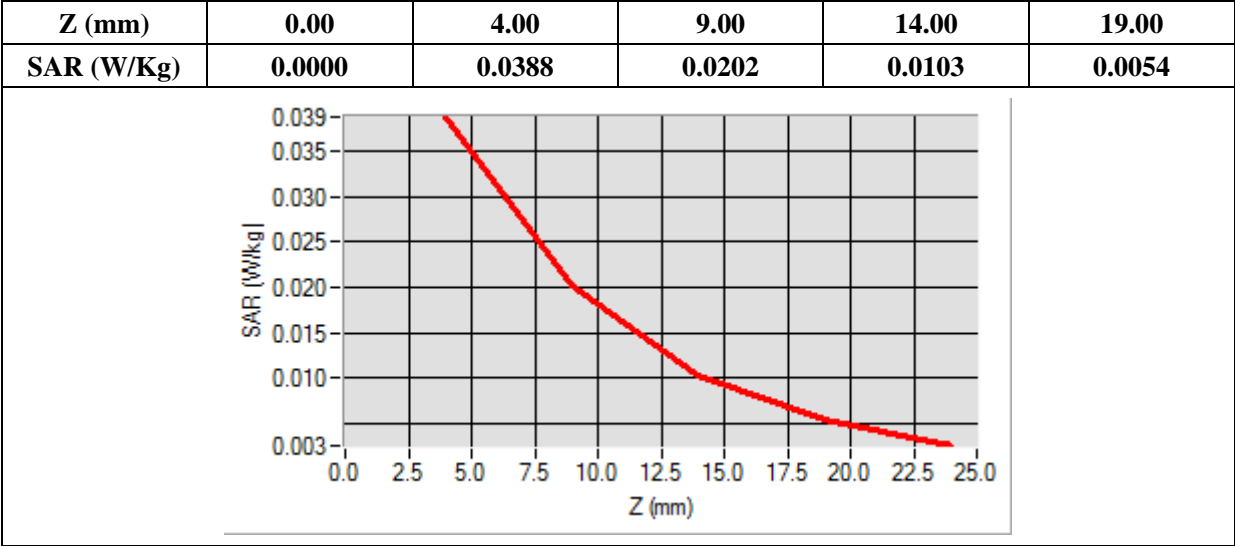

## MEASUREMENT 24

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Left side
Band	GPRS1900_4TX
Channels	Middle
Signal	Duty Cycle: 3.00 (Crest factor: 3.00)

### B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

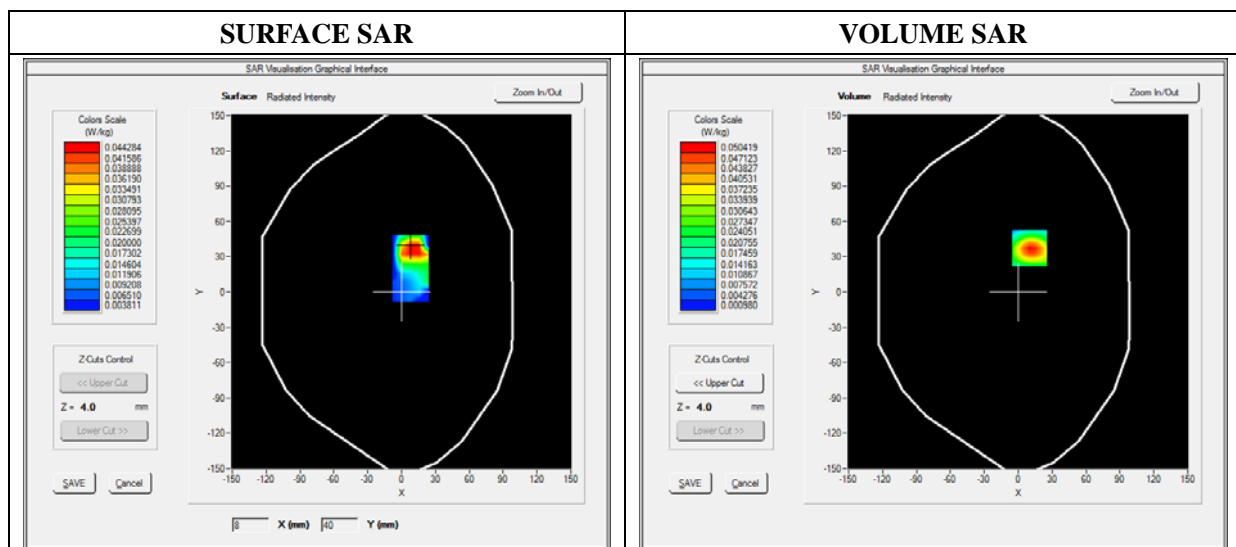



Maximum location: X=-8.00, Y=-8.00

SAR 10g (W/Kg)	0.040029
SAR 1g (W/Kg)	0.072854

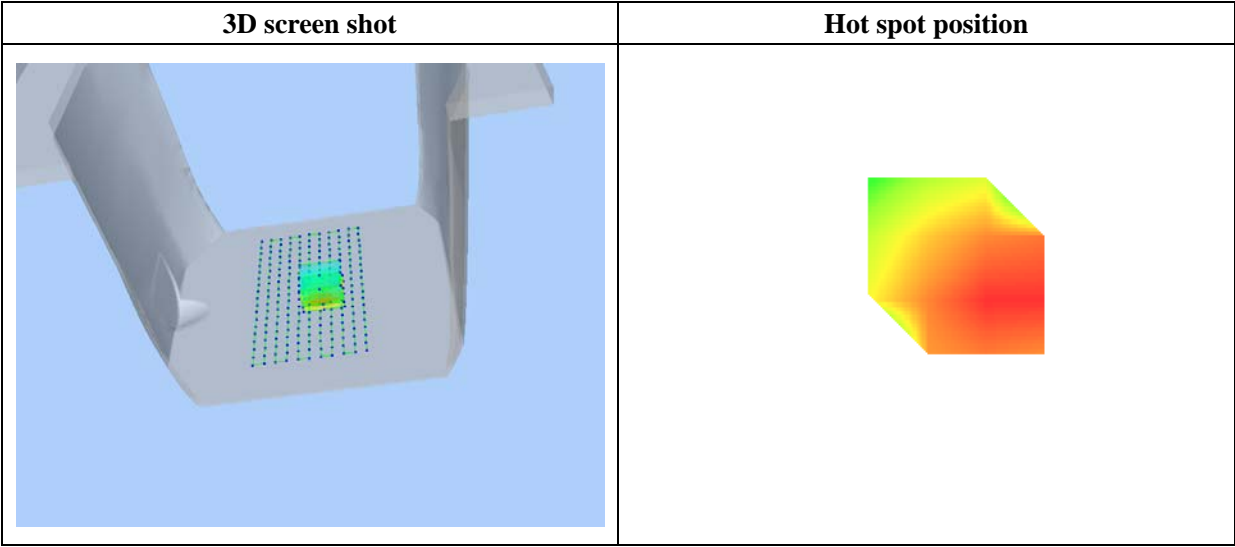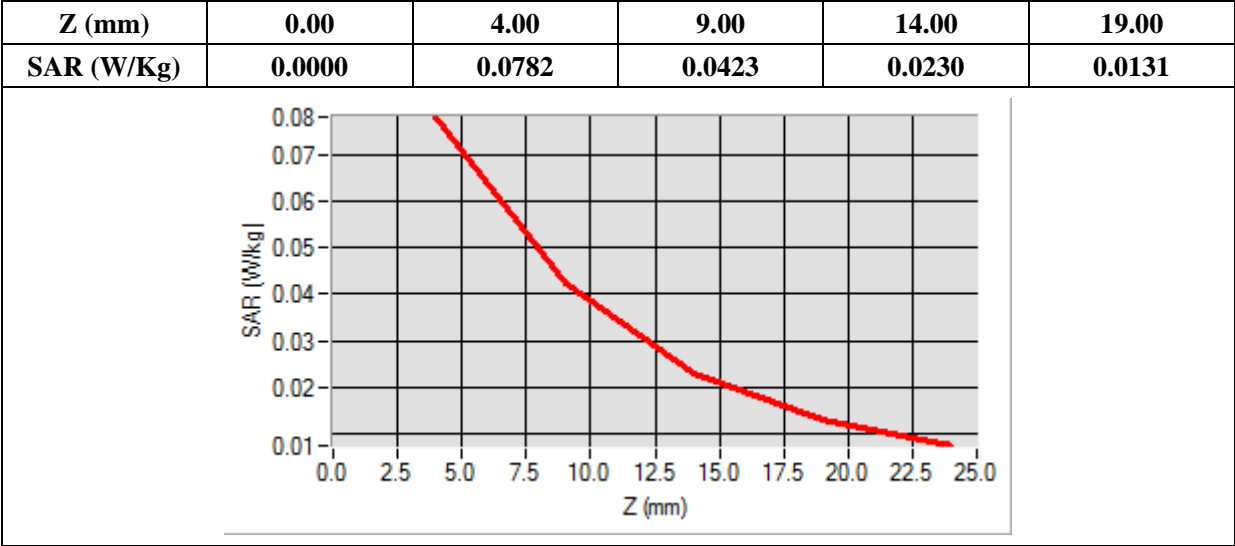

## MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.000000
Conductivity (S/m)	0.930000
Power Variation (%)	1.840000
Ambient Temperature	21.1
Liquid Temperature	21.3

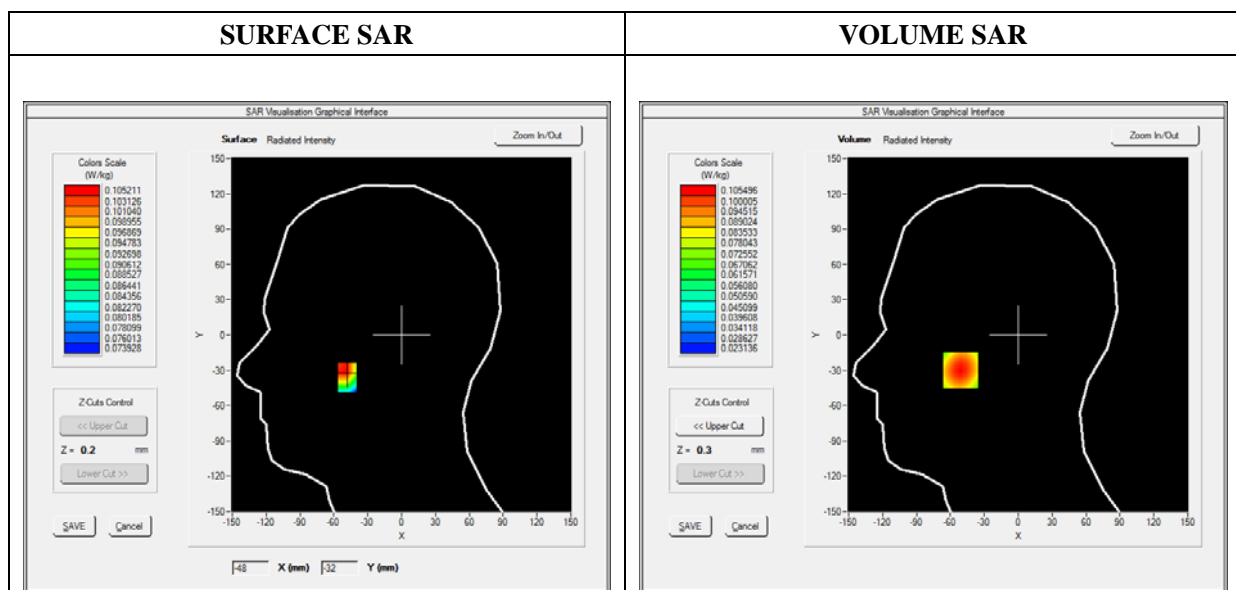

Maximum location: X=-51.00, Y=-30.00

SAR 10g (W/Kg)	0.076873
SAR 1g (W/Kg)	0.101105

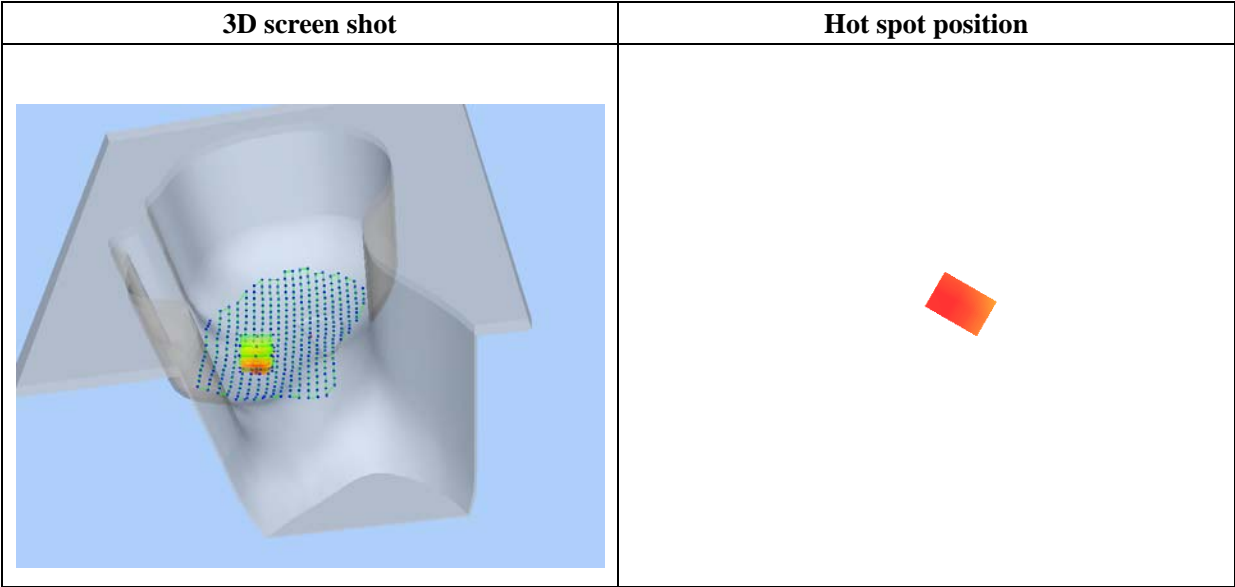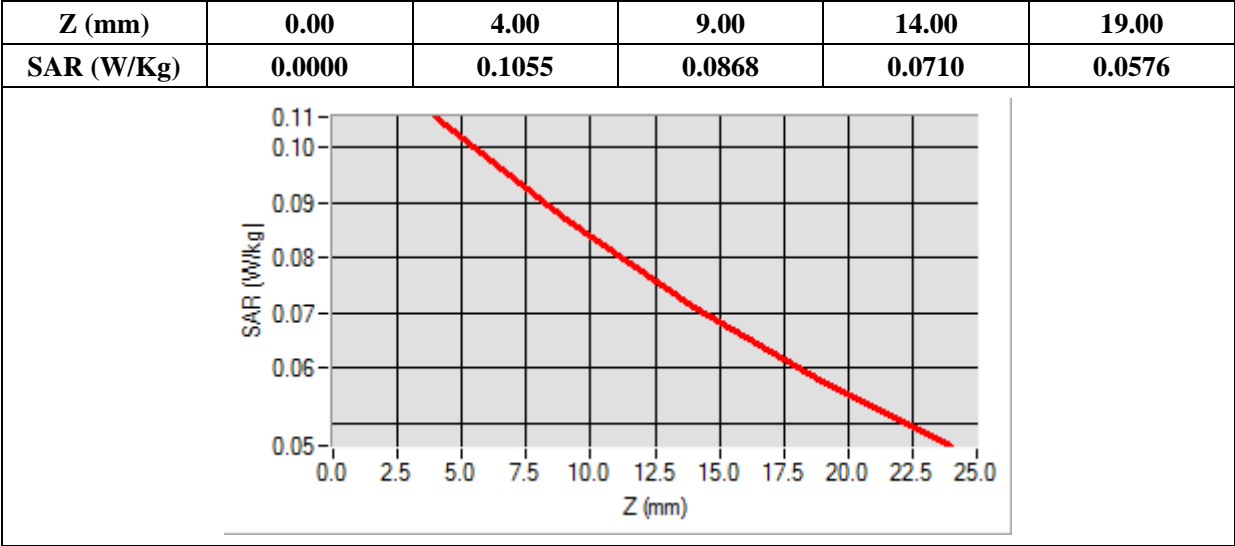

## MEASUREMENT 26

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850_ RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.000000
Conductivity (S/m)	0.930000
Power Variation (%)	1.840000
Ambient Temperature	21.1
Liquid Temperature	21.3

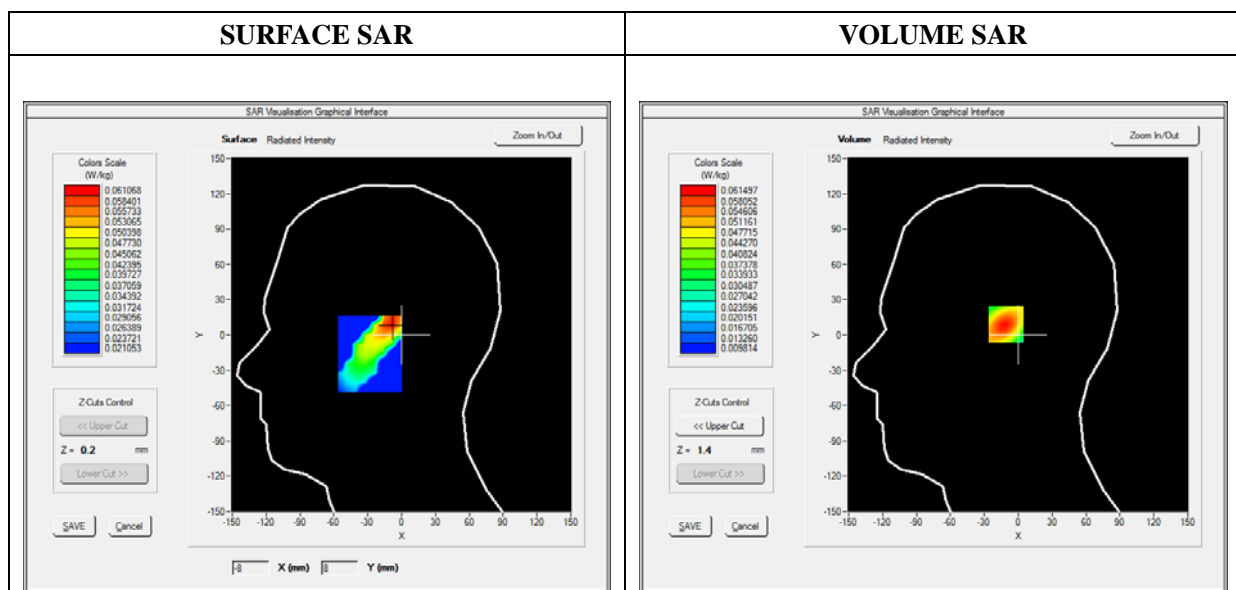

Maximum location: X=-9.00, Y=9.00

SAR 10g (W/Kg)	0.039697
SAR 1g (W/Kg)	0.057945

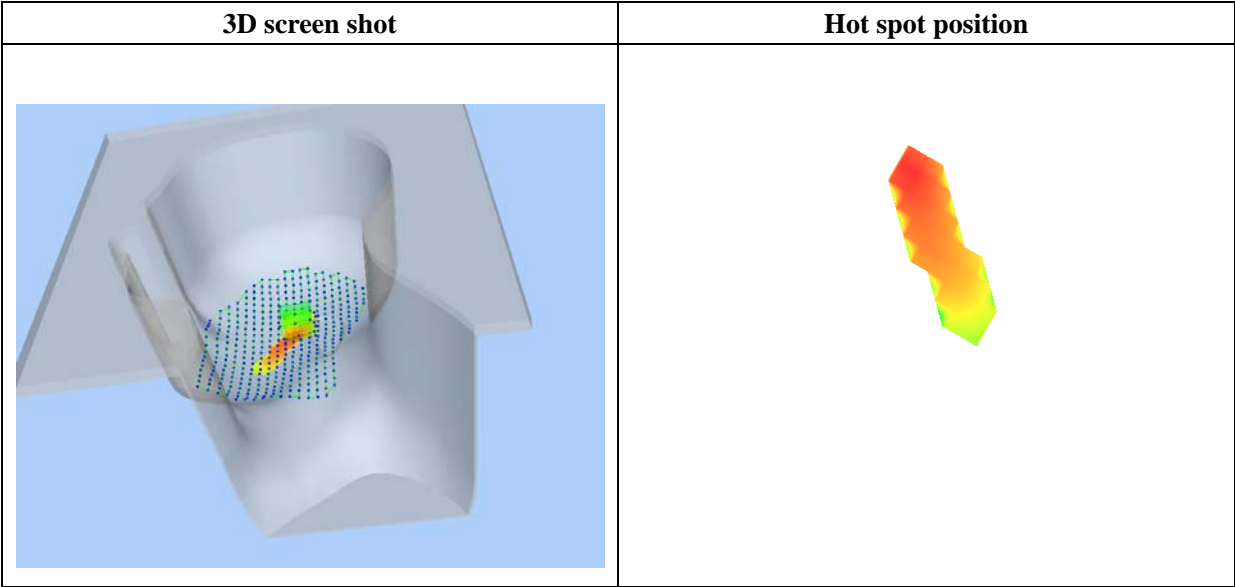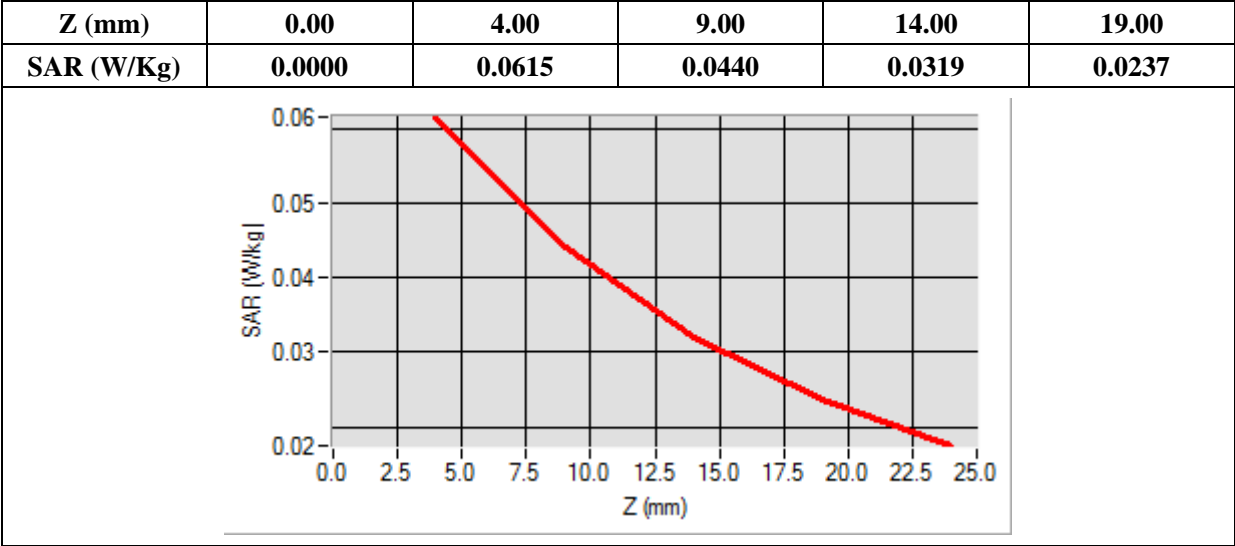

## MEASUREMENT 27

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.000000
Conductivity (S/m)	0.930000
Power Variation (%)	1.840000
Ambient Temperature	21.1
Liquid Temperature	21.3

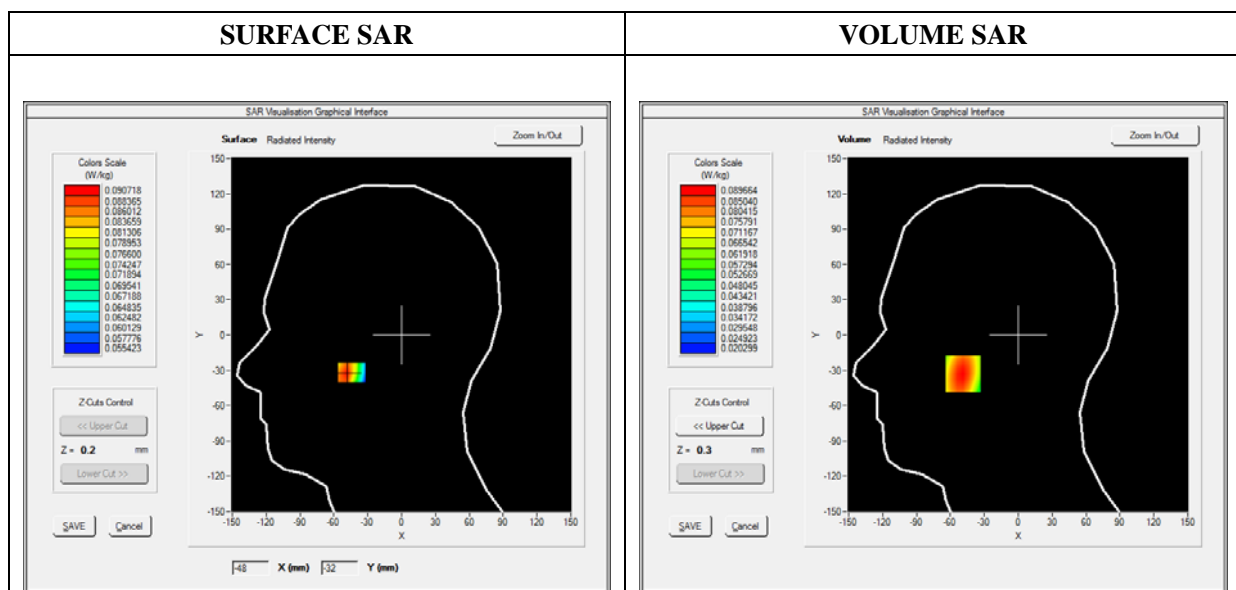

Maximum location: X=-49.00, Y=-33.00

SAR 10g (W/Kg)	0.064973
SAR 1g (W/Kg)	0.085893

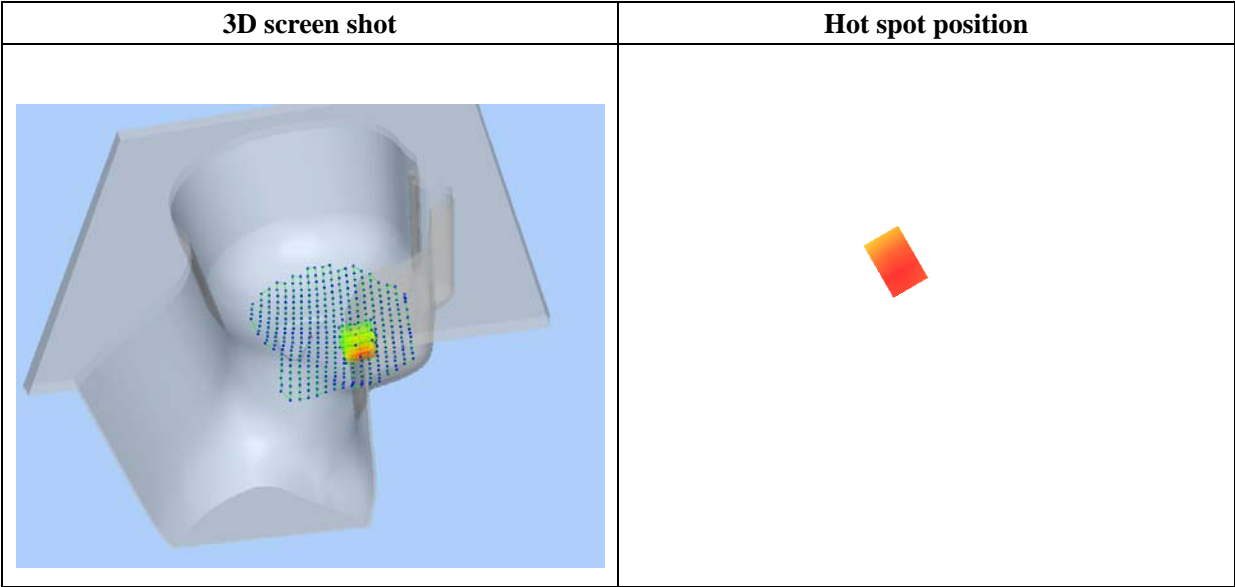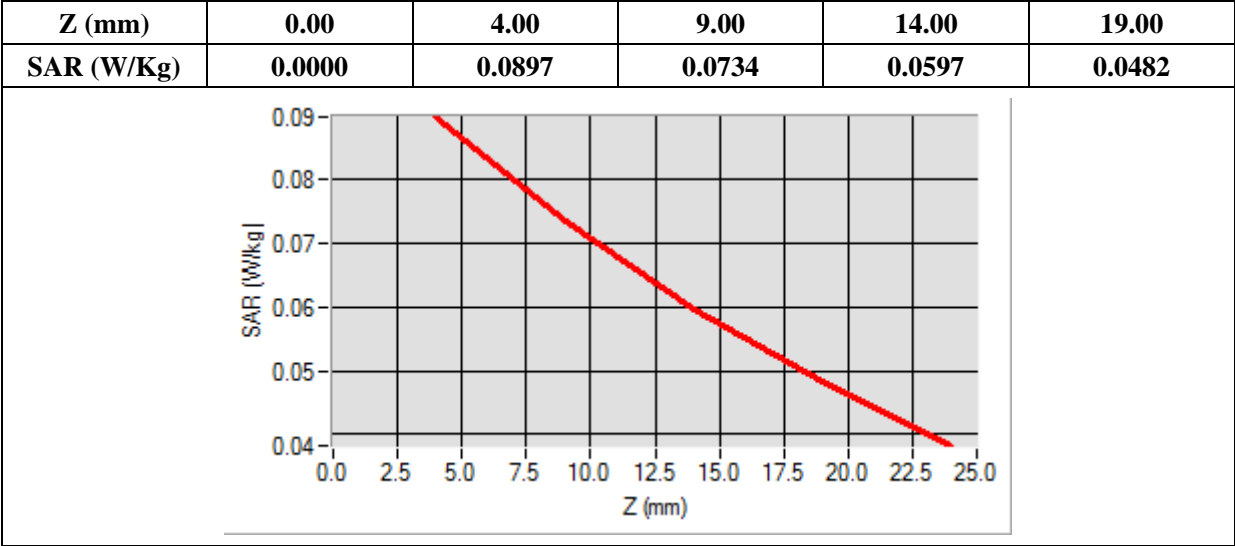

## MEASUREMENT 28

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

### B. SAR Measurement Results



Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.000000
Conductivity (S/m)	0.930000
Power Variation (%)	1.840000
Ambient Temperature	21.1
Liquid Temperature	21.3

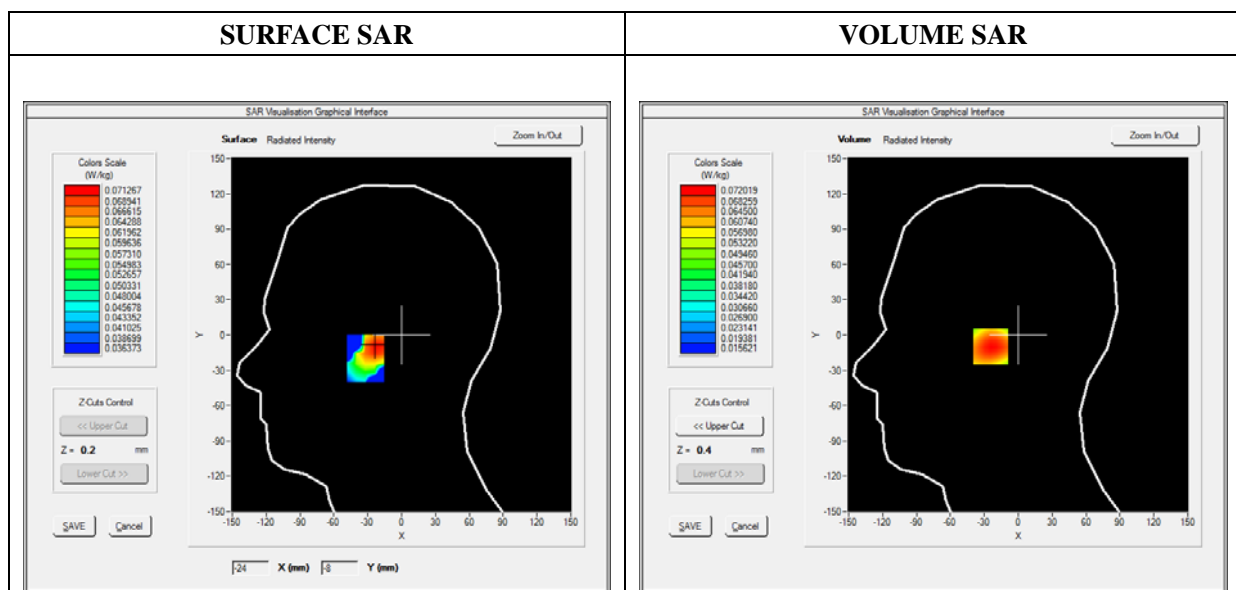



Maximum location: X=-22.00, Y=-10.00

SAR 10g (W/Kg)	0.051413
SAR 1g (W/Kg)	0.069117

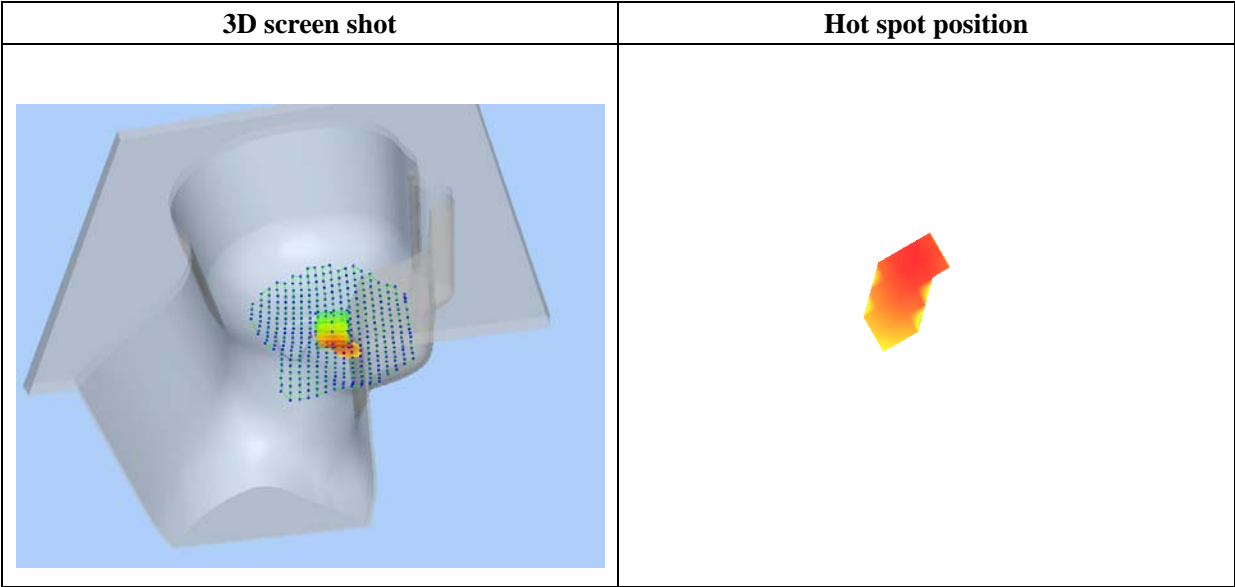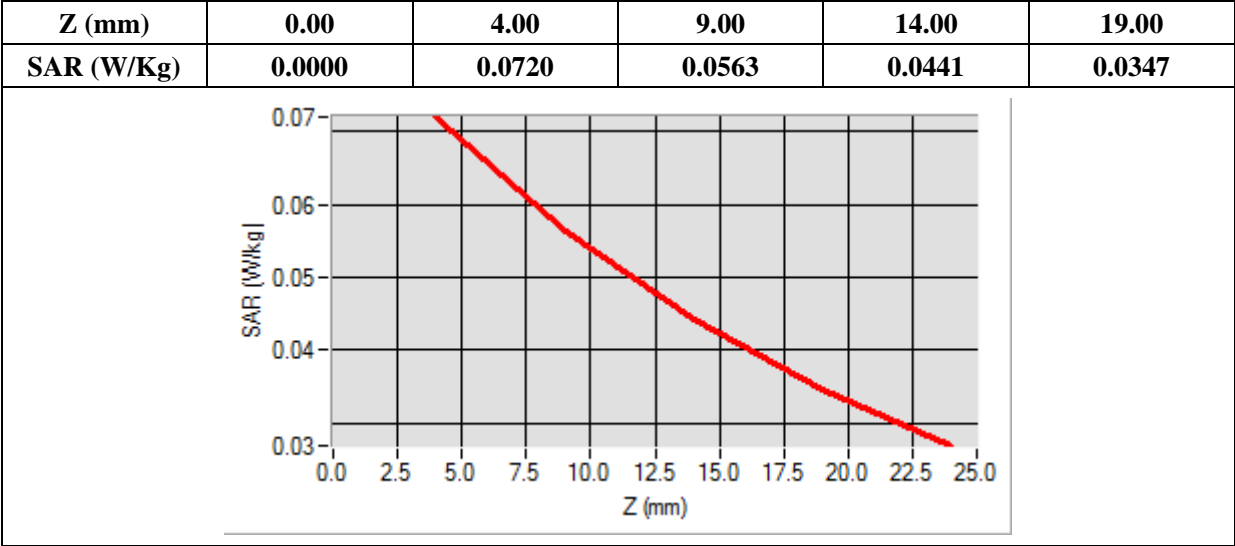

## MEASUREMENT 29

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

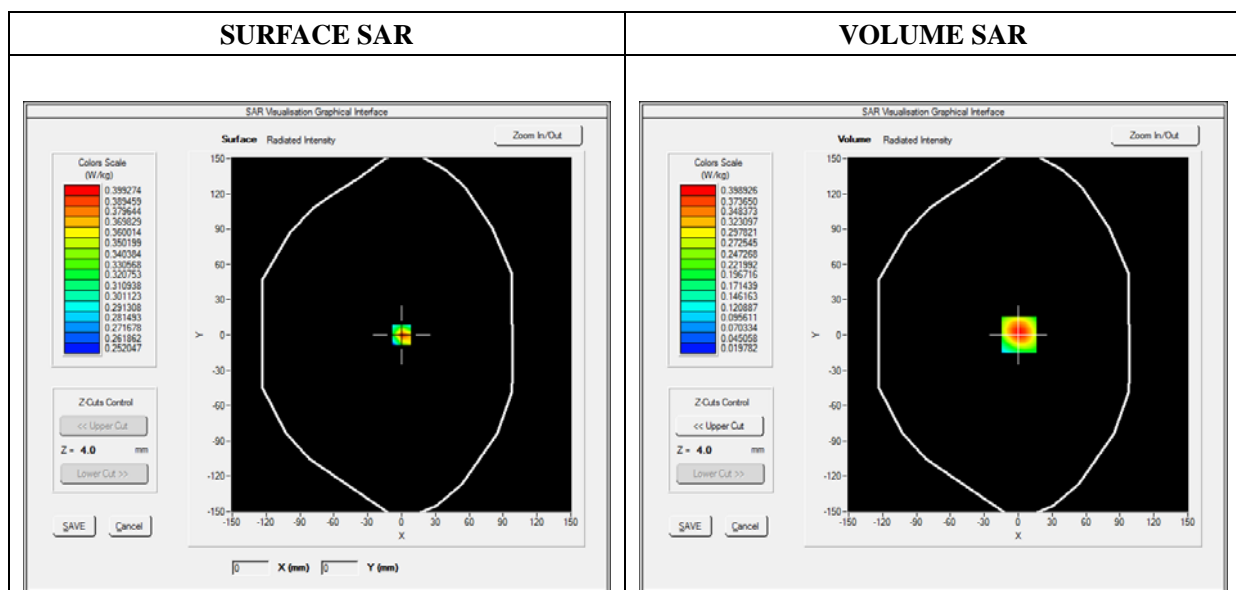

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	0.228037
SAR 1g (W/Kg)	0.373158

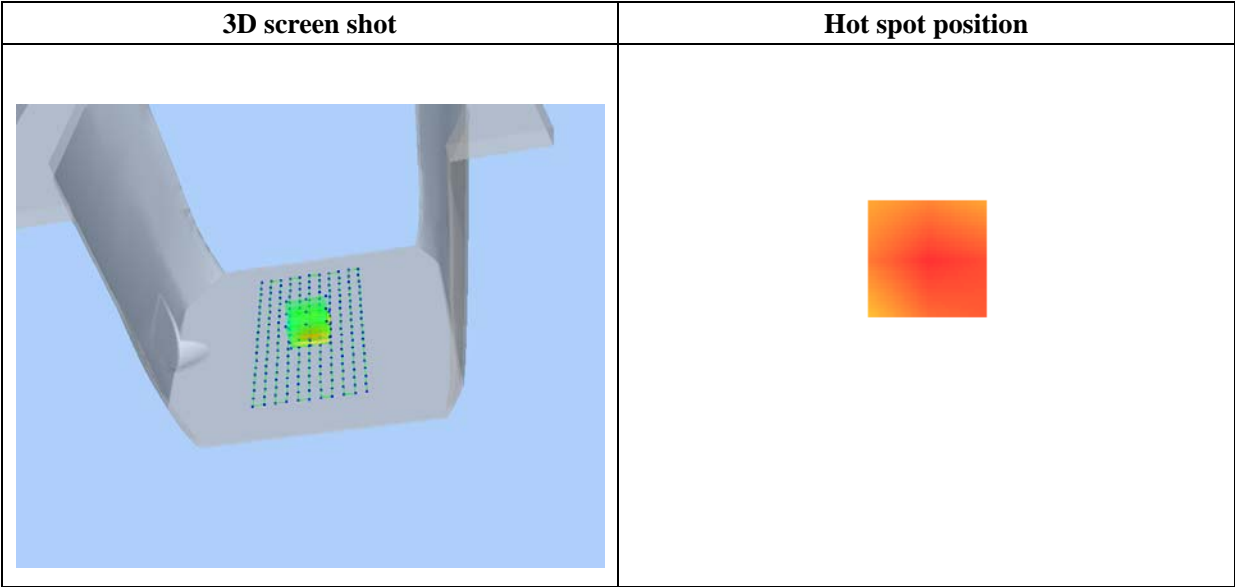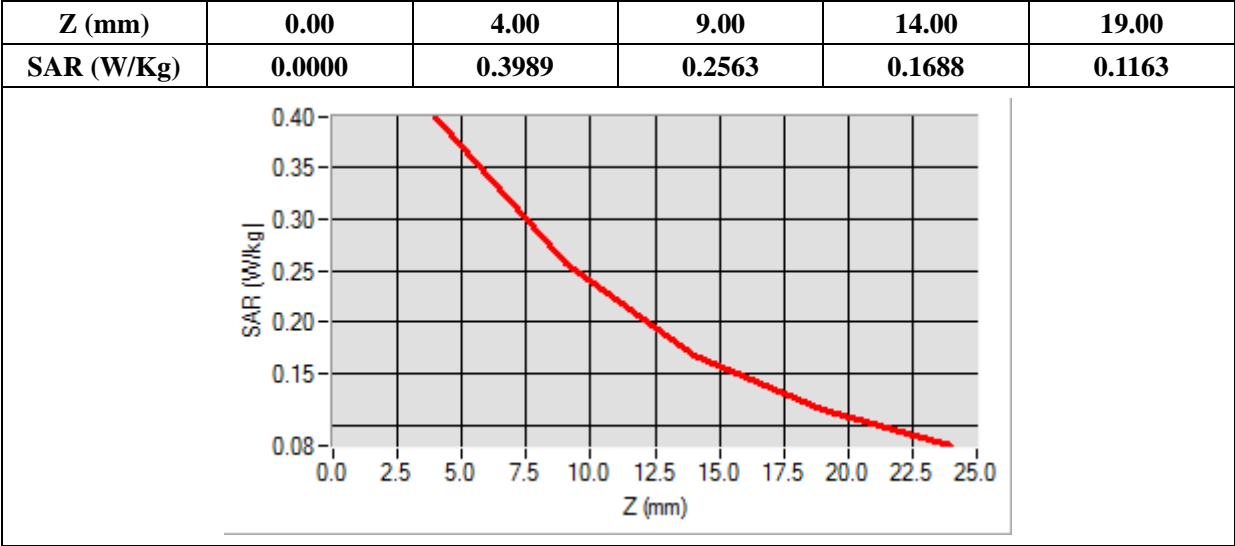

## MEASUREMENT 30

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

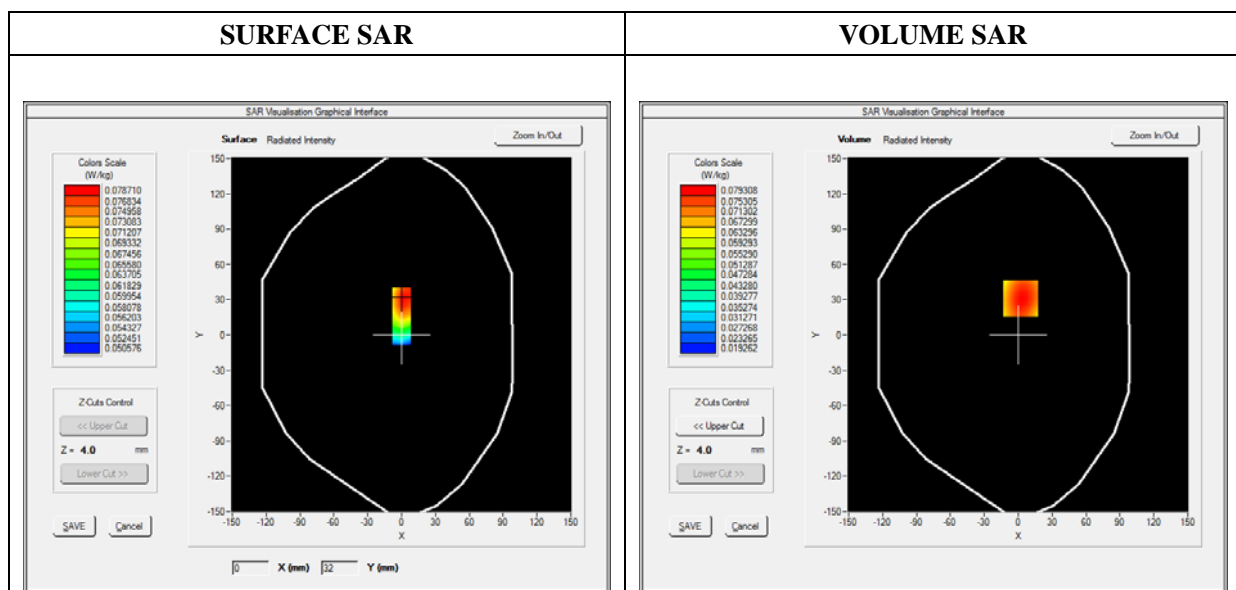

Maximum location: X=2.00, Y=31.00

SAR 10g (W/Kg)	0.056974
SAR 1g (W/Kg)	0.076420

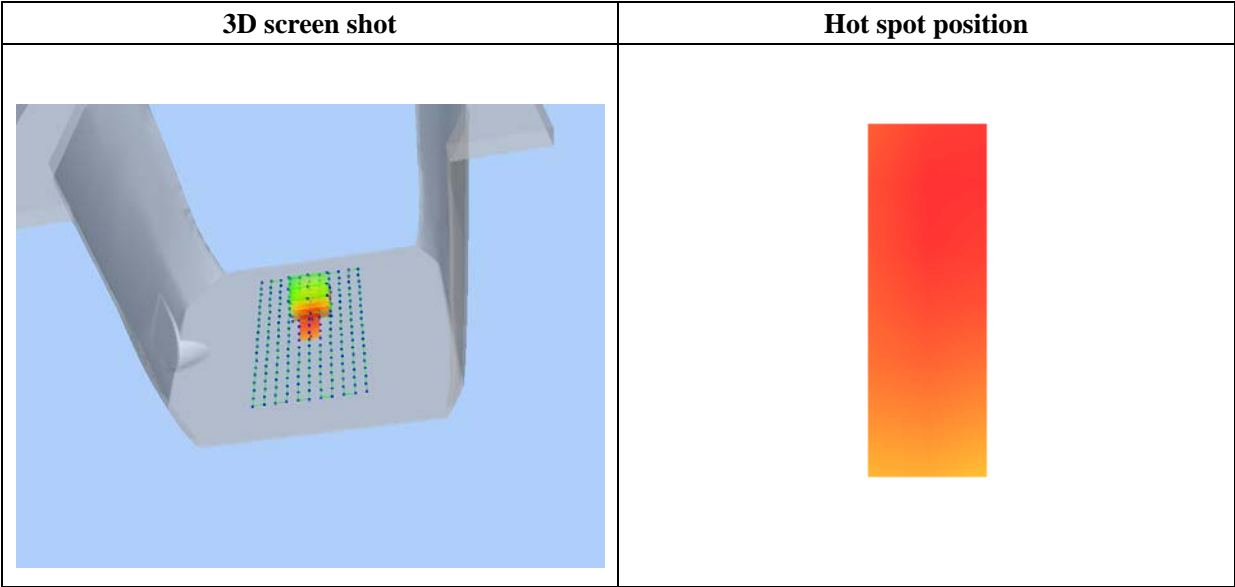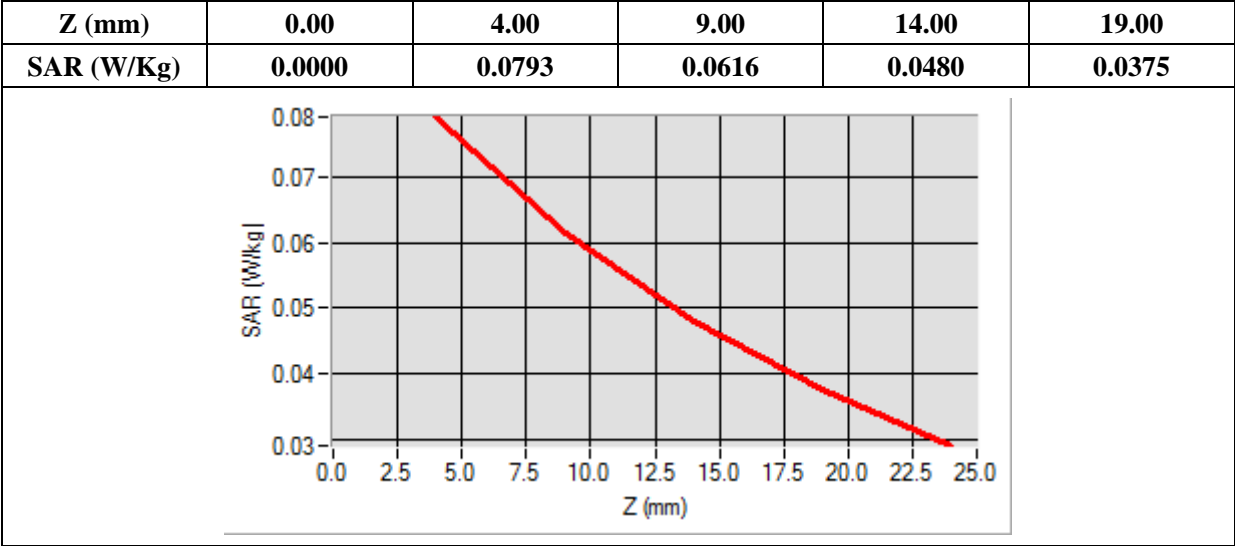

## MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA850_RMC
Channels	Middle
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

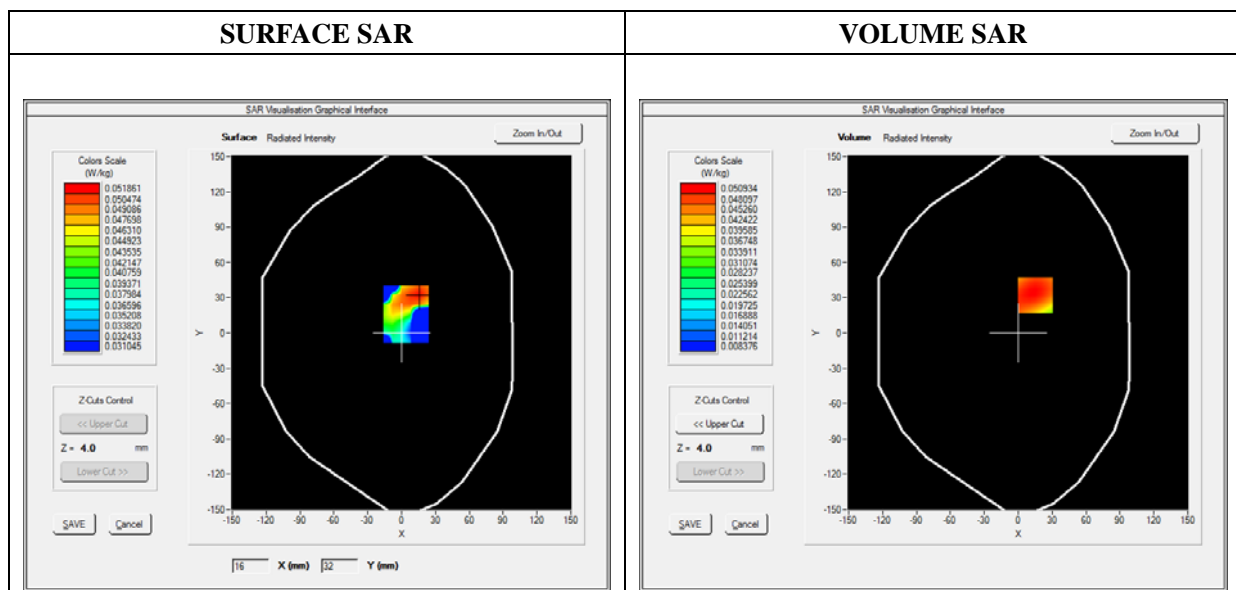

Maximum location: X=15.00, Y=32.00

SAR 10g (W/Kg)	0.024784
SAR 1g (W/Kg)	0.035411

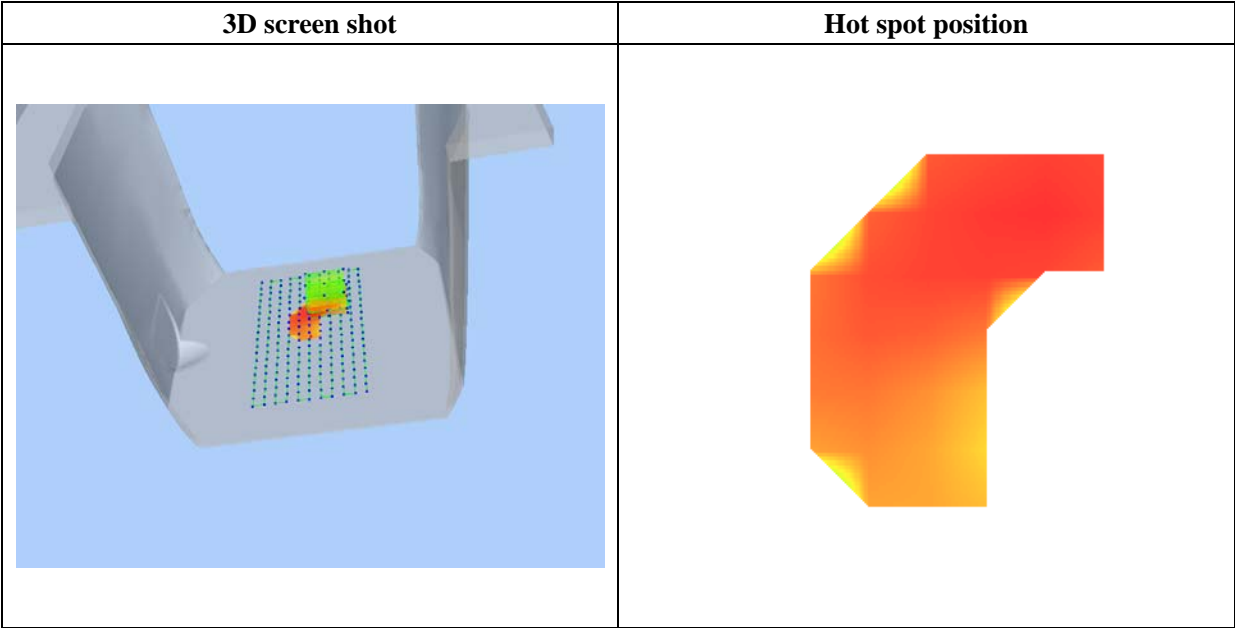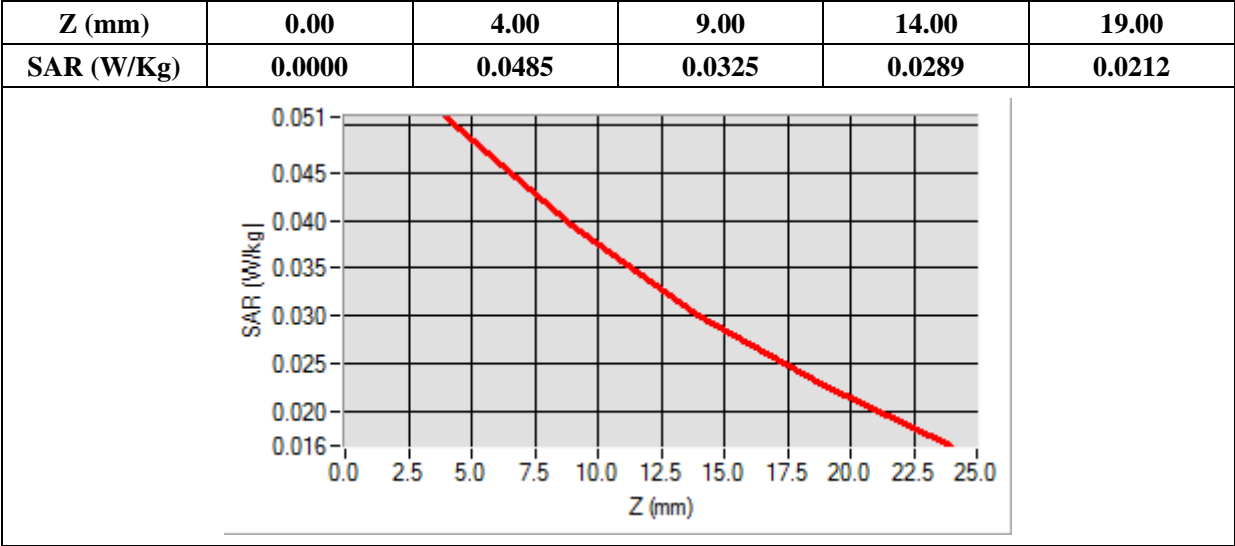

## MEASUREMENT 32

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results



Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

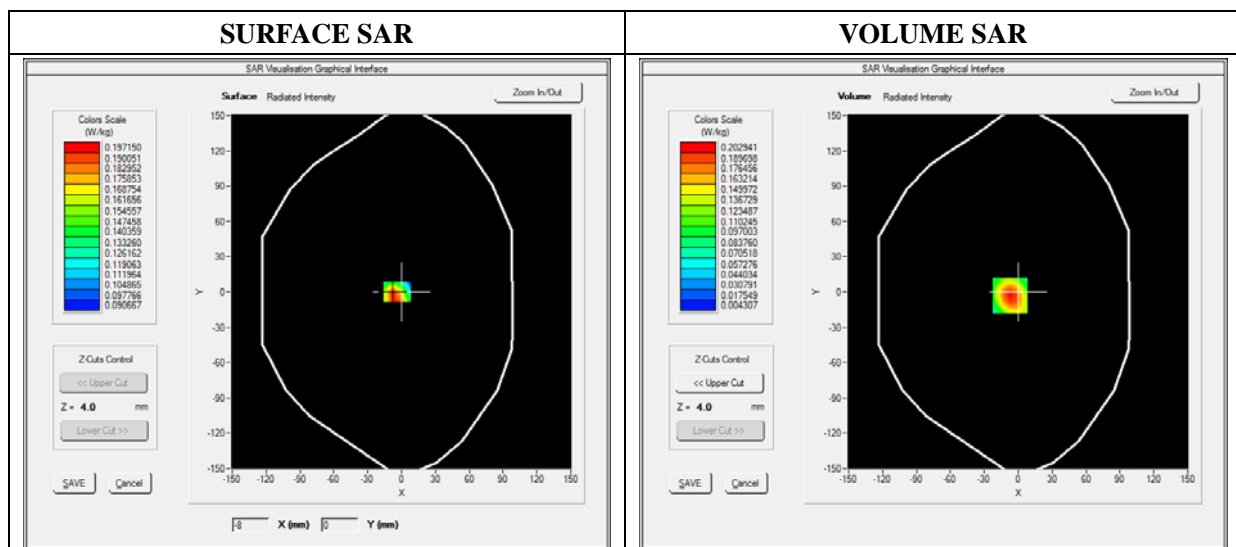



Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.024951
SAR 1g (W/Kg)	0.037580

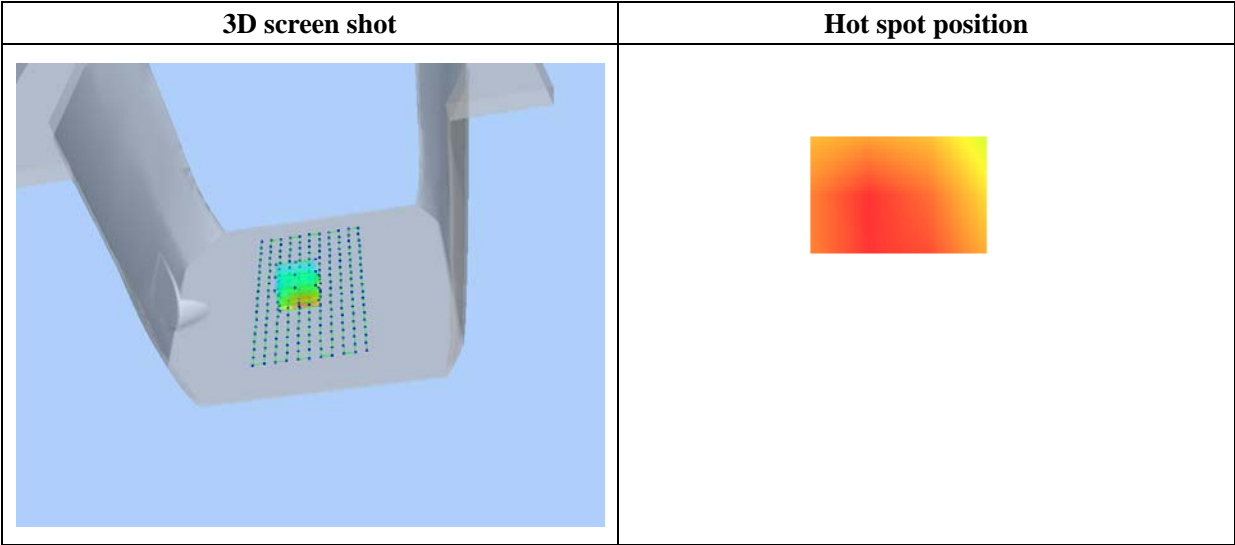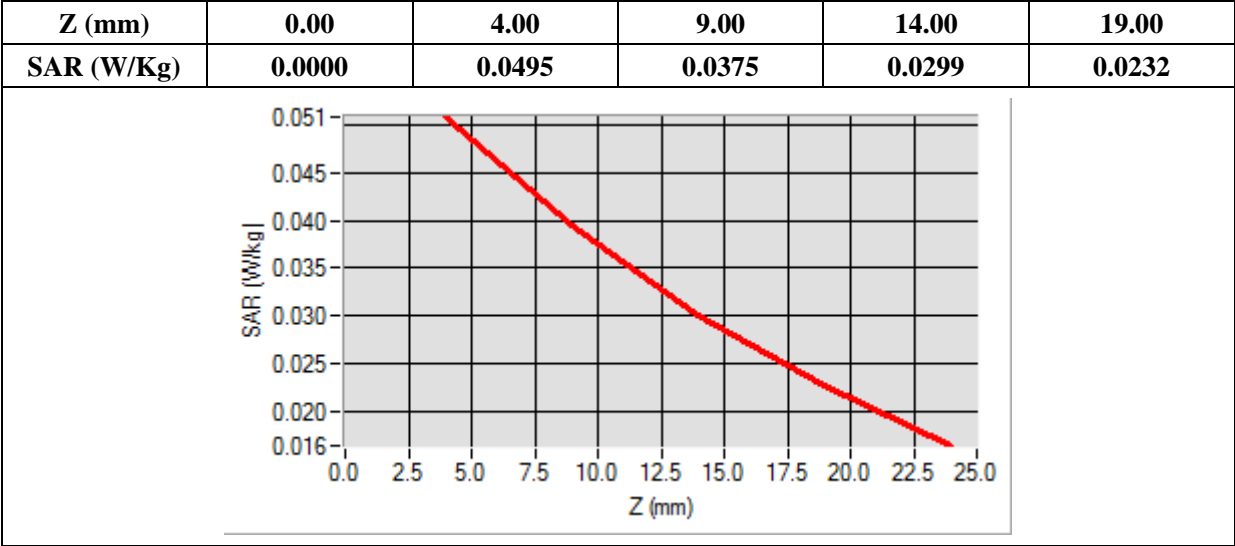

## MEASUREMENT 33

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

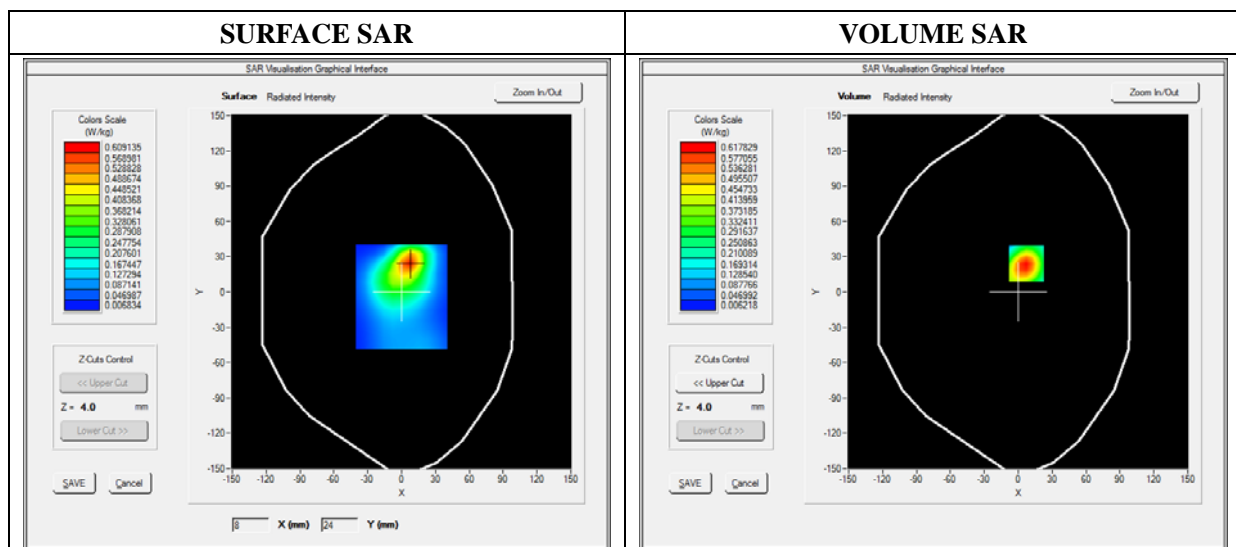

Maximum location: X=-56.00, Y=-32.00

SAR 10g (W/Kg)	0.026541
SAR 1g (W/Kg)	0.040120

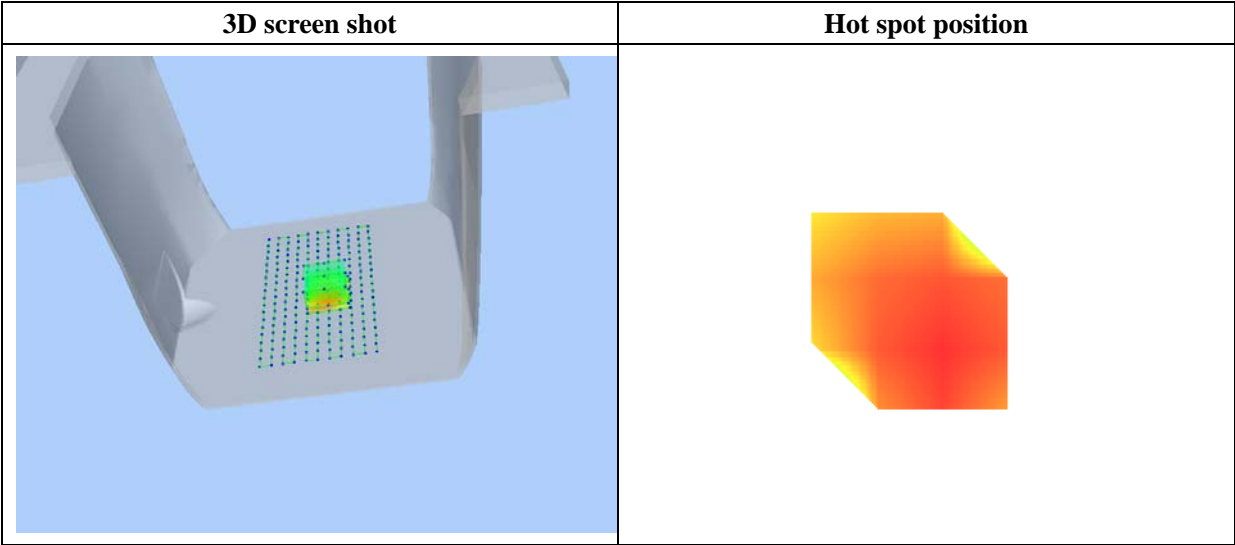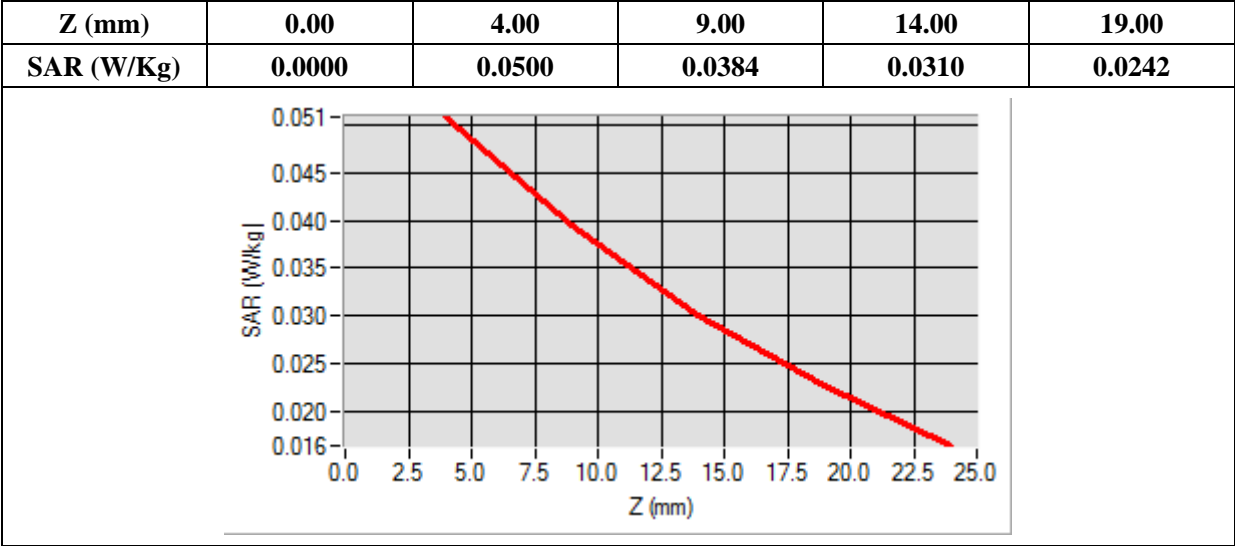

## MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back(Body-worn)
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

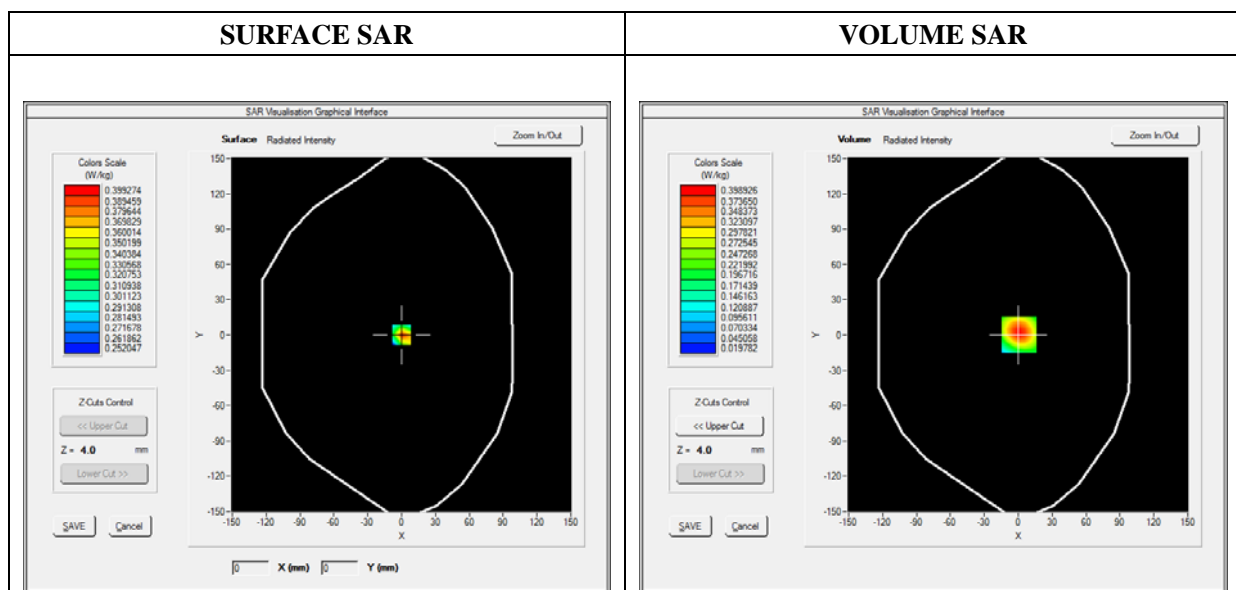

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	0.225421
SAR 1g (W/Kg)	0.365741

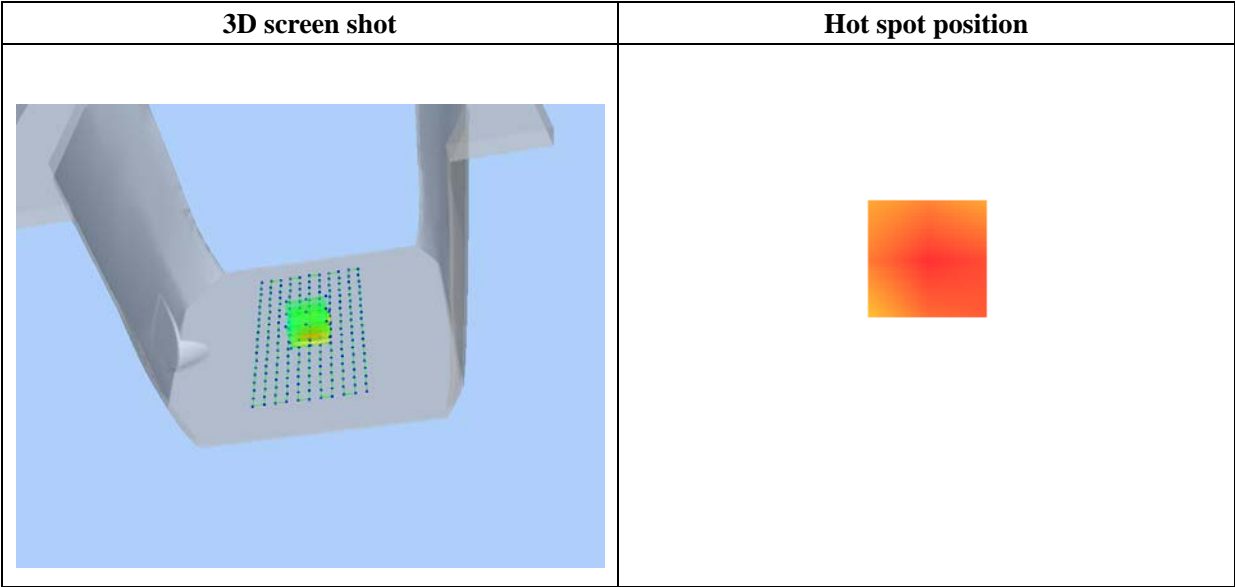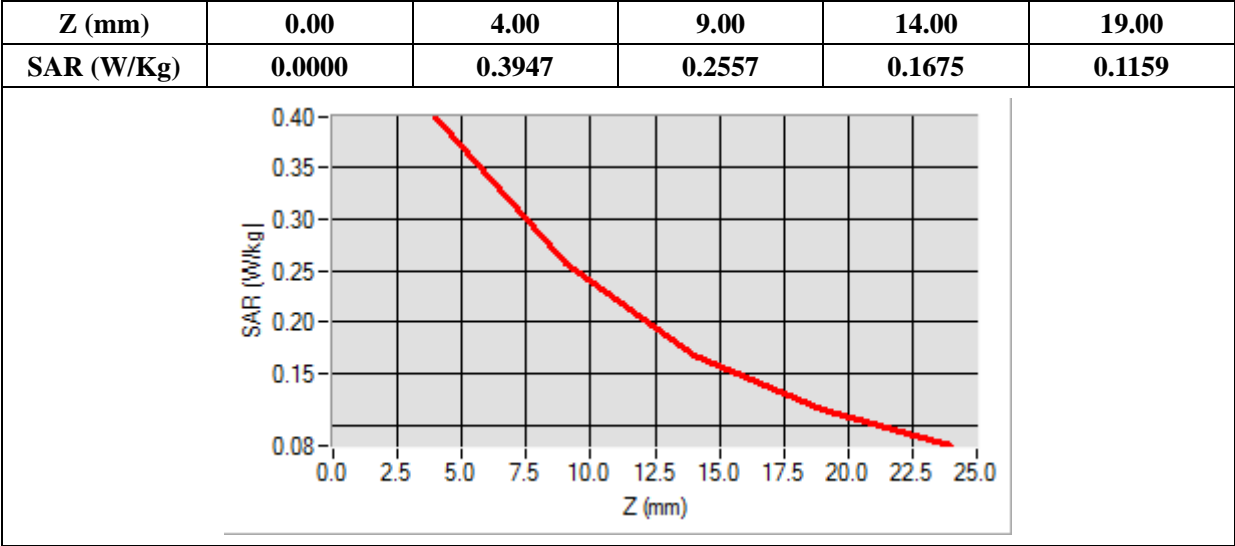

## MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	55.3000000
Conductivity (S/m)	1.0000000
Power Variation (%)	0.926400
Ambient Temperature	21.1
Liquid Temperature	21.3

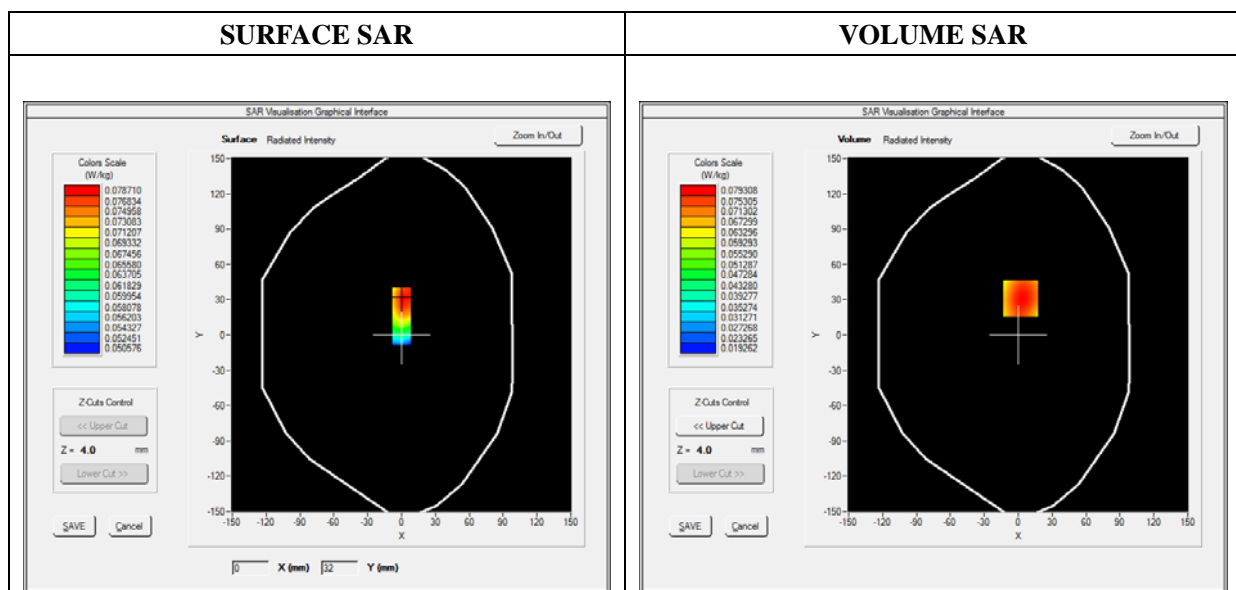

Maximum location: X=2.00, Y=31.00

SAR 10g (W/Kg)	0.056741
SAR 1g (W/Kg)	0.075411

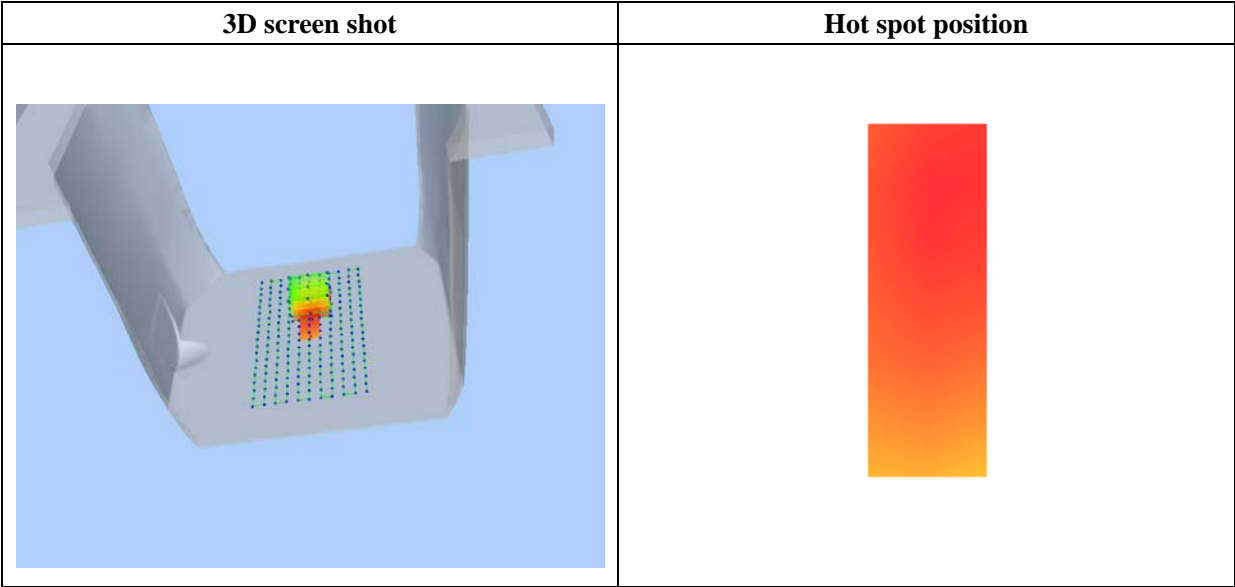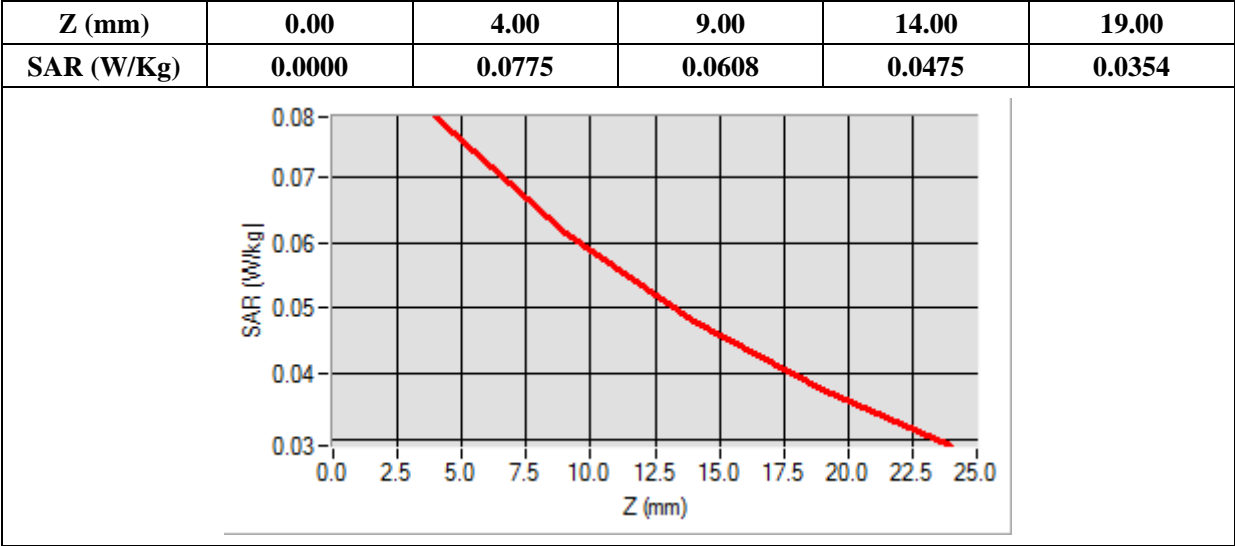

## MEASUREMENT 36

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

### B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	41.0200000
Conductivity (S/m)	1.450000
Power Variation (%)	-0.514000
Ambient Temperature	21.1
Liquid Temperature	21.3

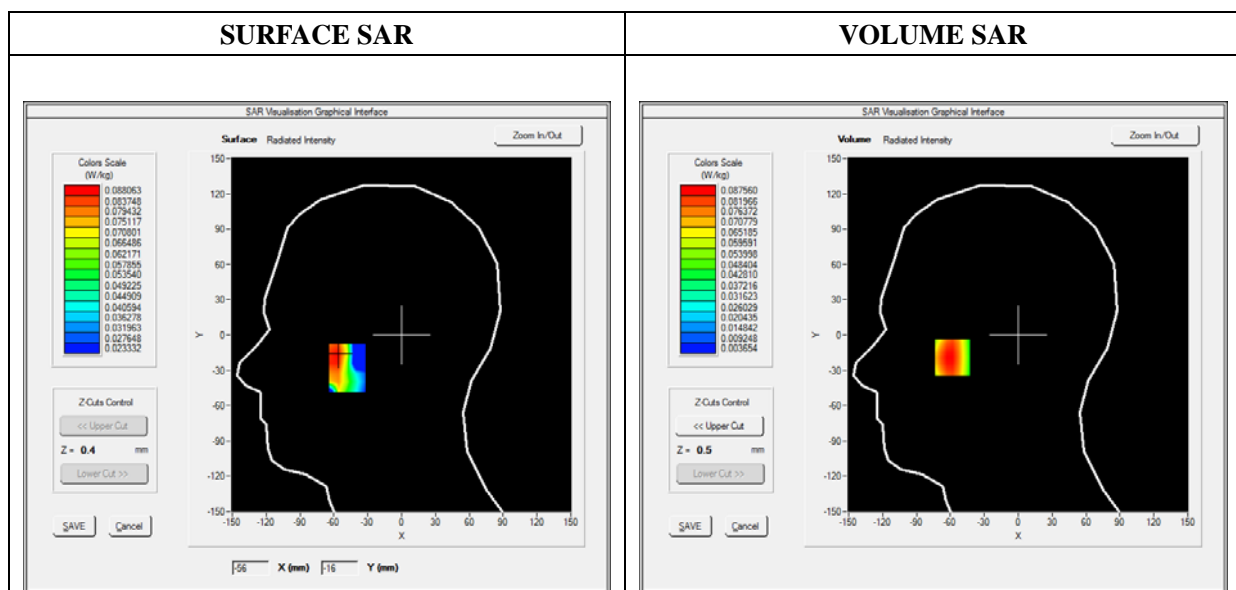



Maximum location: X=-58.00, Y=-19.00

SAR 10g (W/Kg)	0.047588
SAR 1g (W/Kg)	0.083732

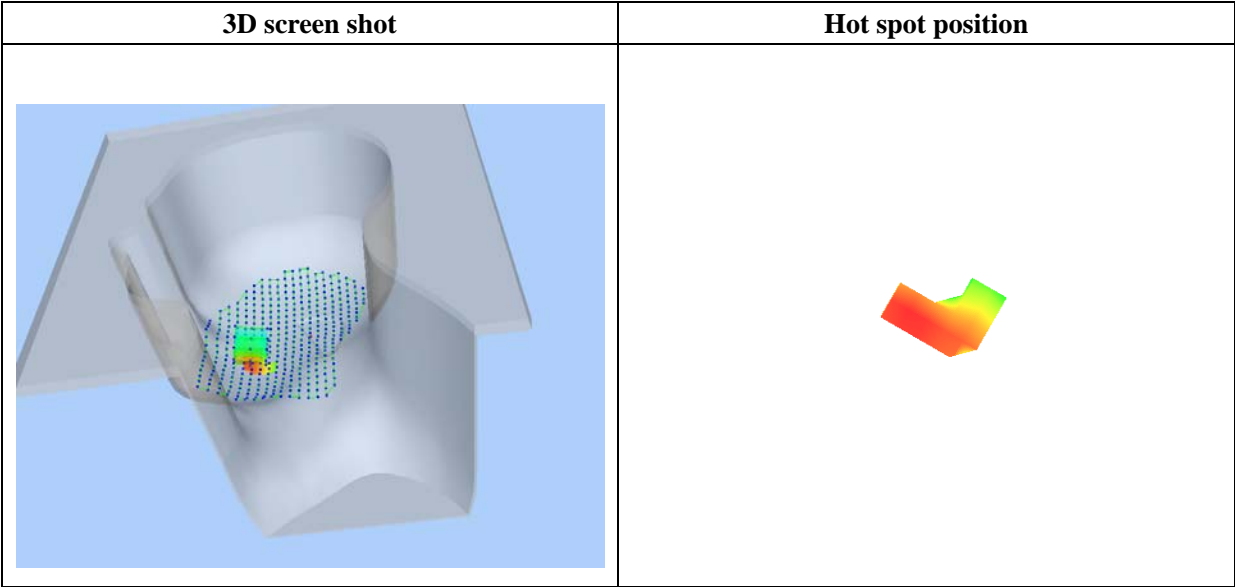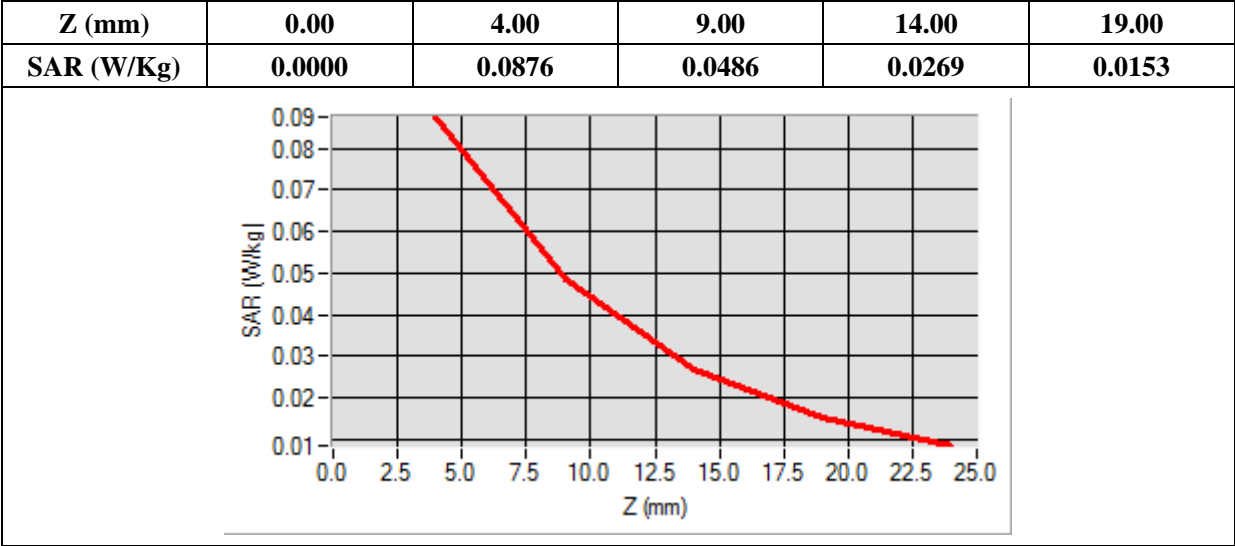

## MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	41.0200000
Conductivity (S/m)	1.450000
Power Variation (%)	-0.514000
Ambient Temperature	21.1
Liquid Temperature	21.3

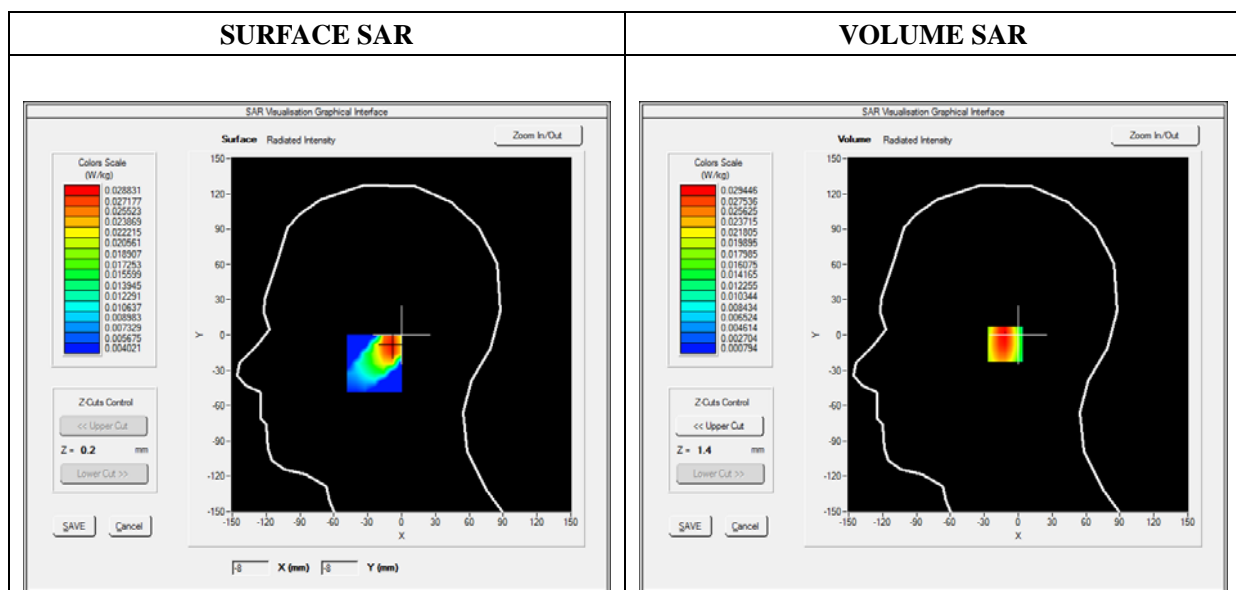

Maximum location: X=-9.00, Y=-8.00

SAR 10g (W/Kg)	0.015262
SAR 1g (W/Kg)	0.027758

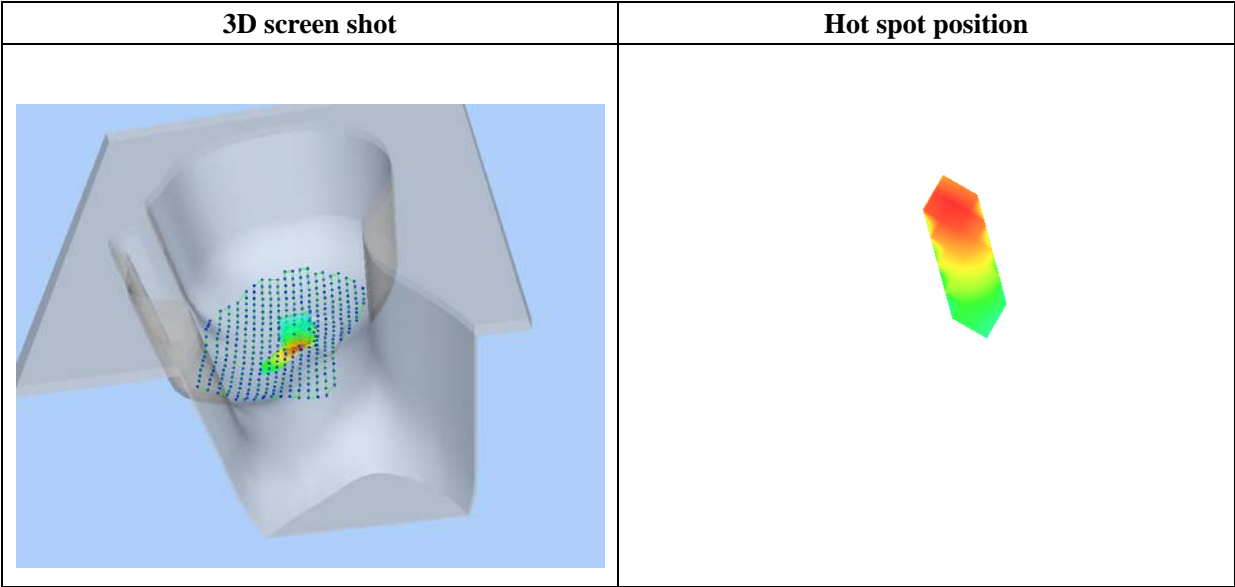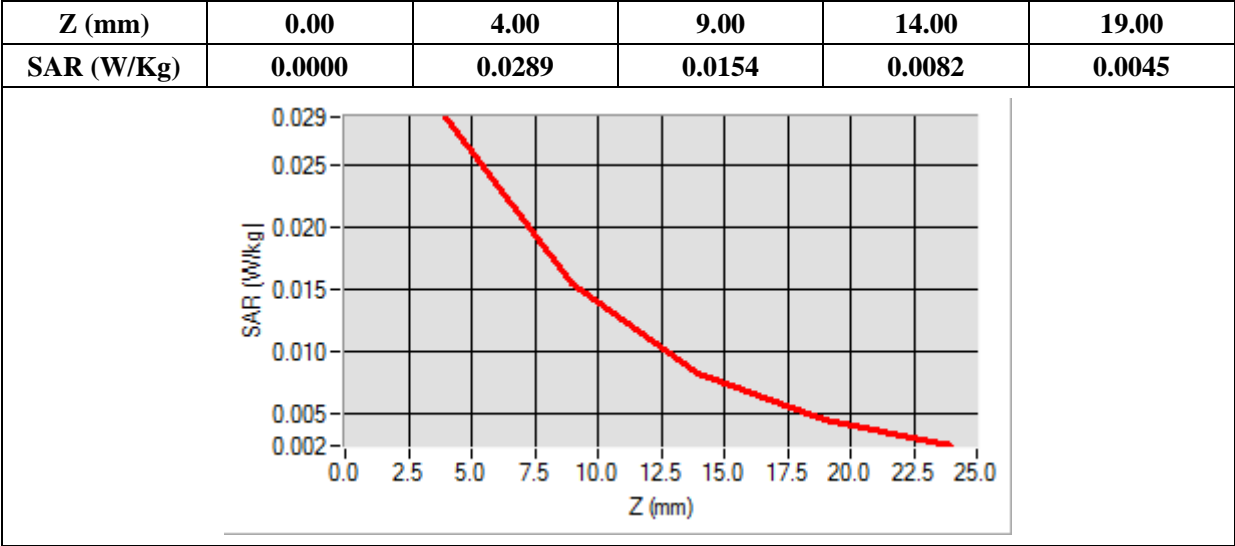

## MEASUREMENT 38

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	41.0200000
Conductivity (S/m)	1.450000
Power Variation (%)	-0.514000
Ambient Temperature	21.1
Liquid Temperature	21.3

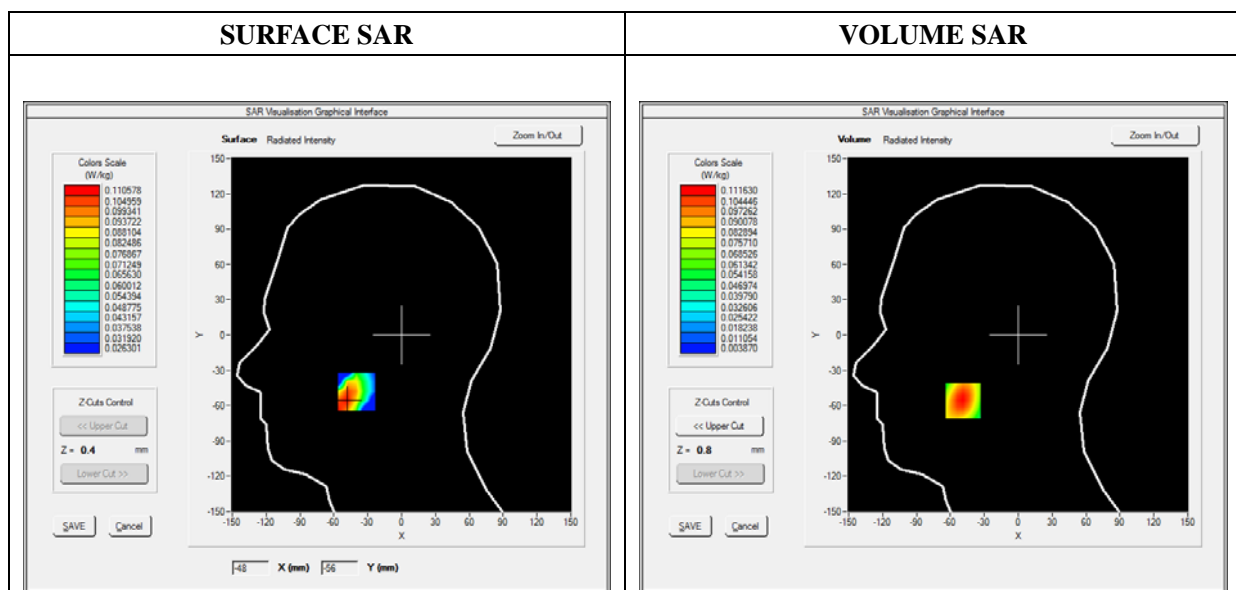

Maximum location: X=-49.00, Y=-56.00

SAR 10g (W/Kg)	0.057245
SAR 1g (W/Kg)	0.104633

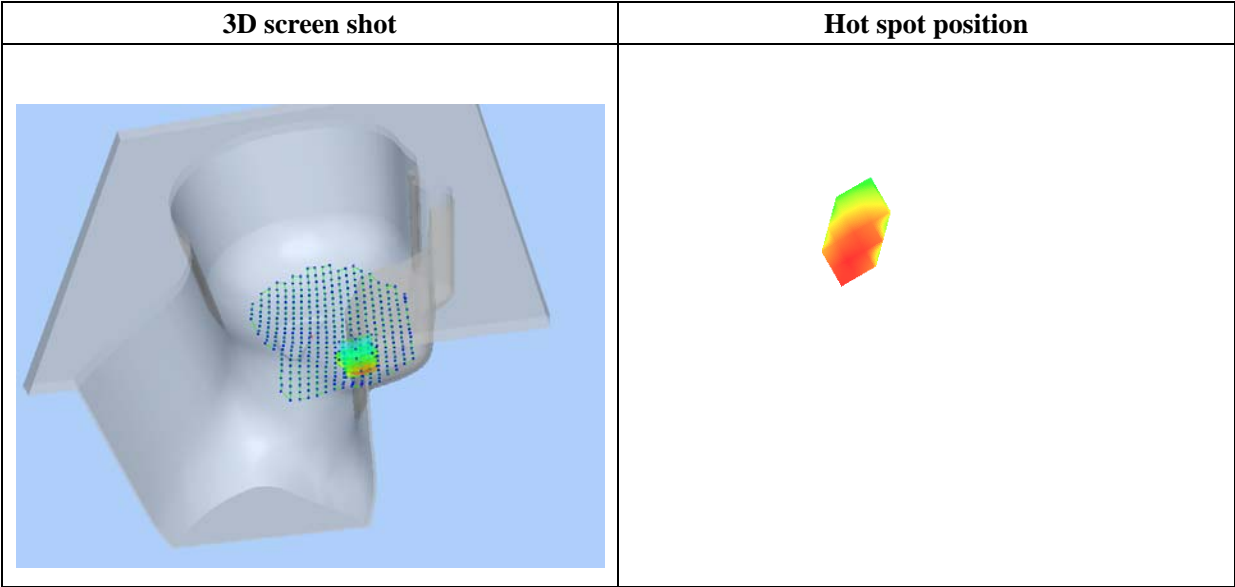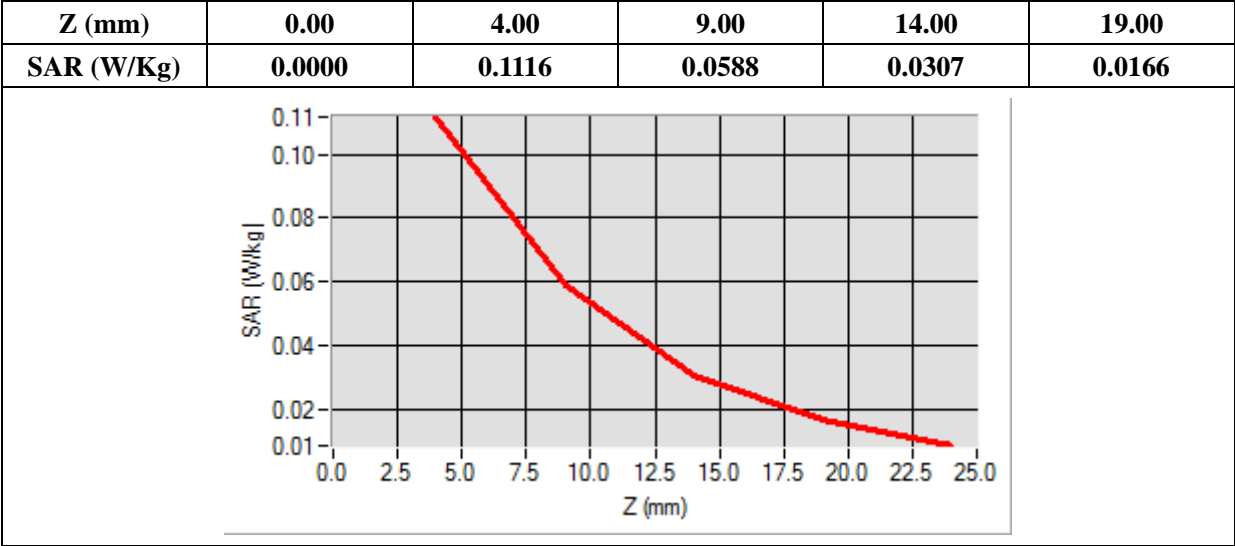

## MEASUREMENT 39

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	41.0200000
Conductivity (S/m)	1.450000
Power Variation (%)	-0.514000
Ambient Temperature	21.1
Liquid Temperature	21.3

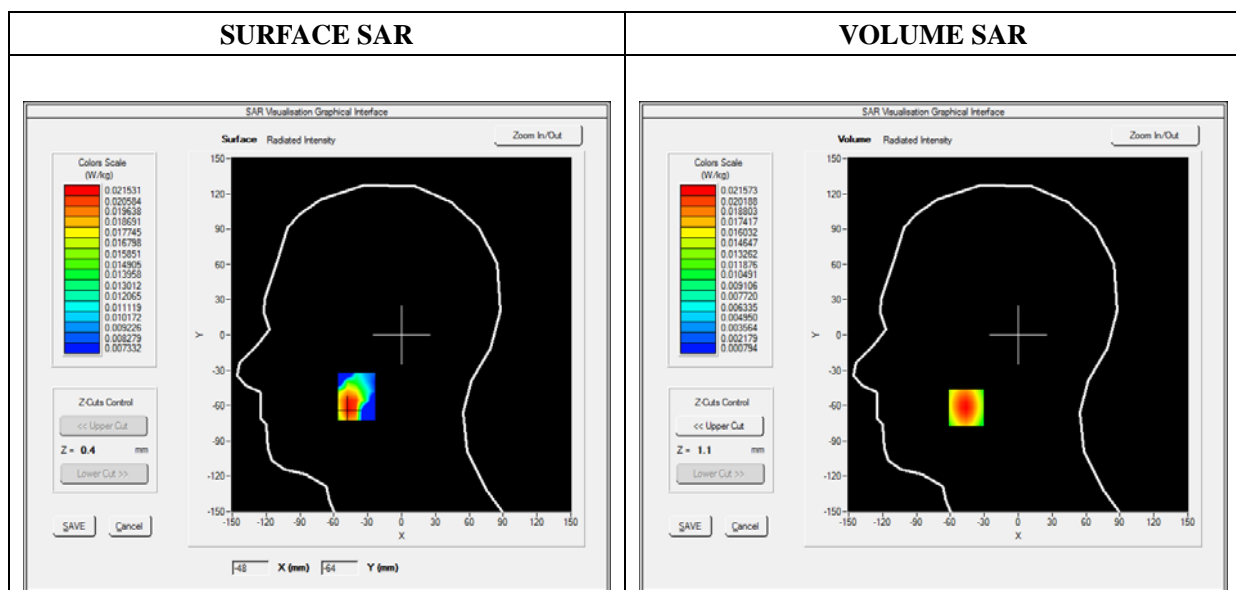

Maximum location: X=-46.00, Y=-62.00

SAR 10g (W/Kg)	0.011353
SAR 1g (W/Kg)	0.020247

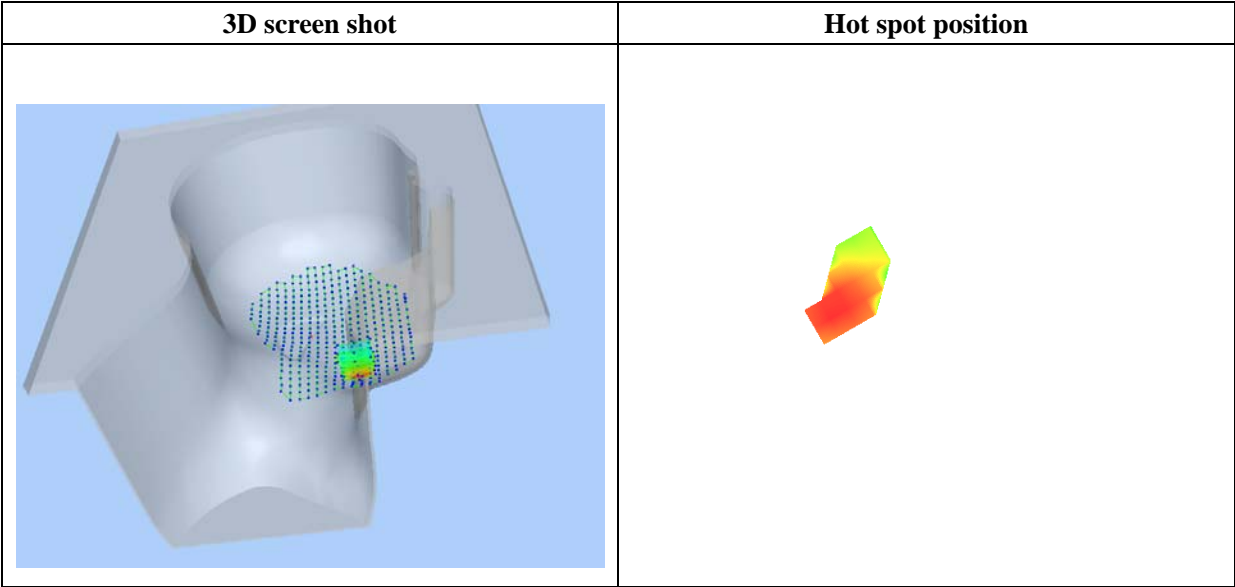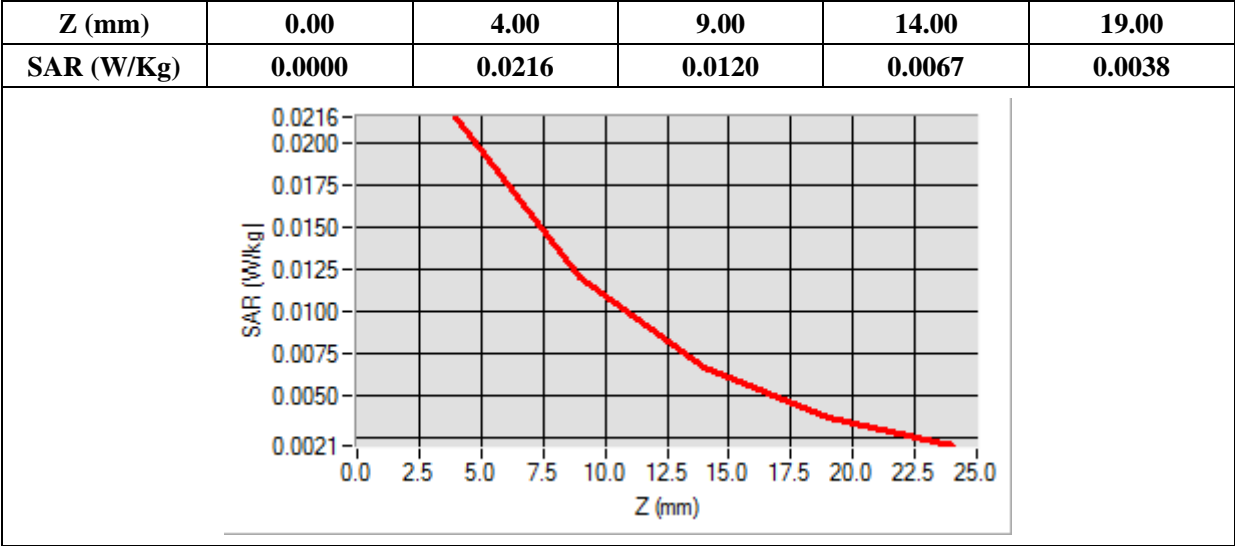

## MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

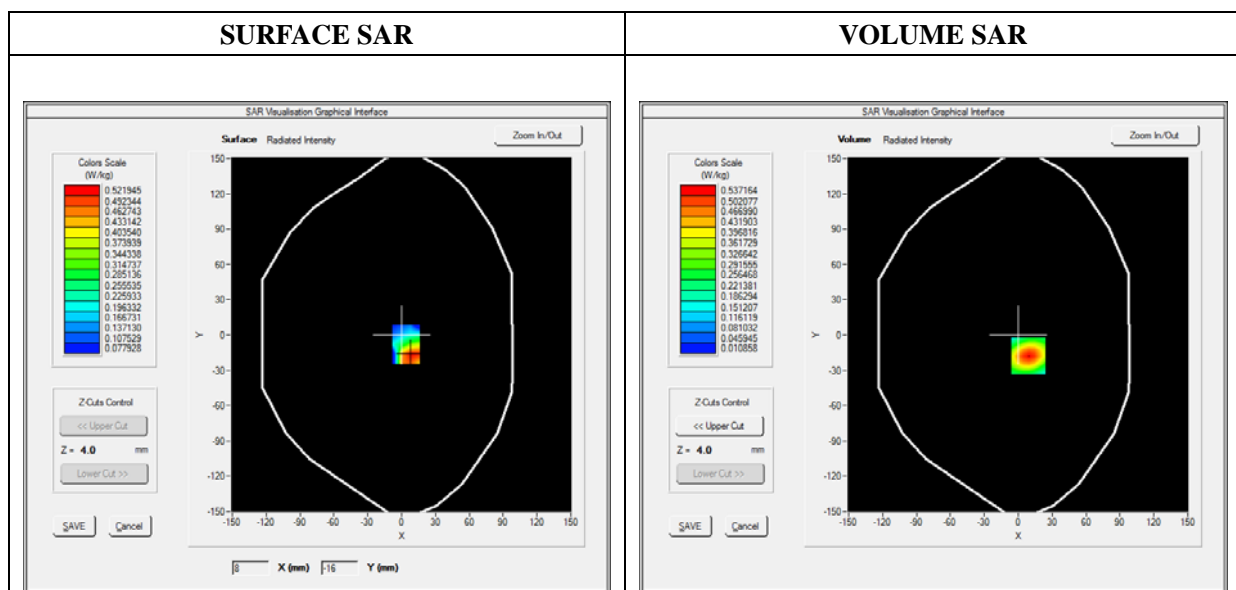



Maximum location: X=9.00, Y=-18.00

SAR 10g (W/Kg)	0.249693
SAR 1g (W/Kg)	0.492566

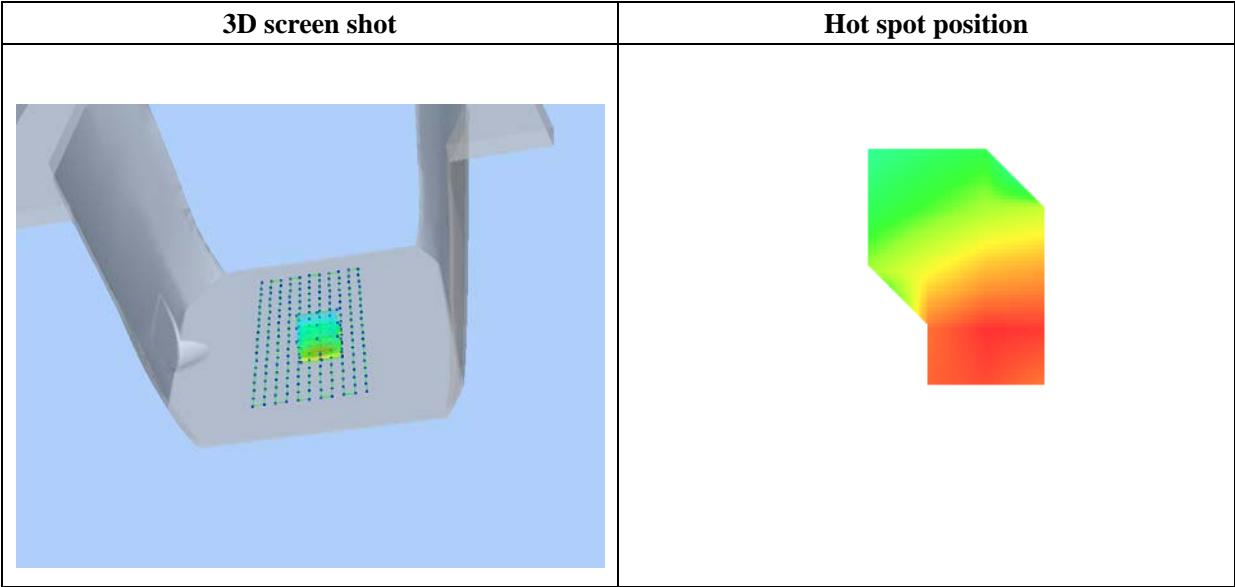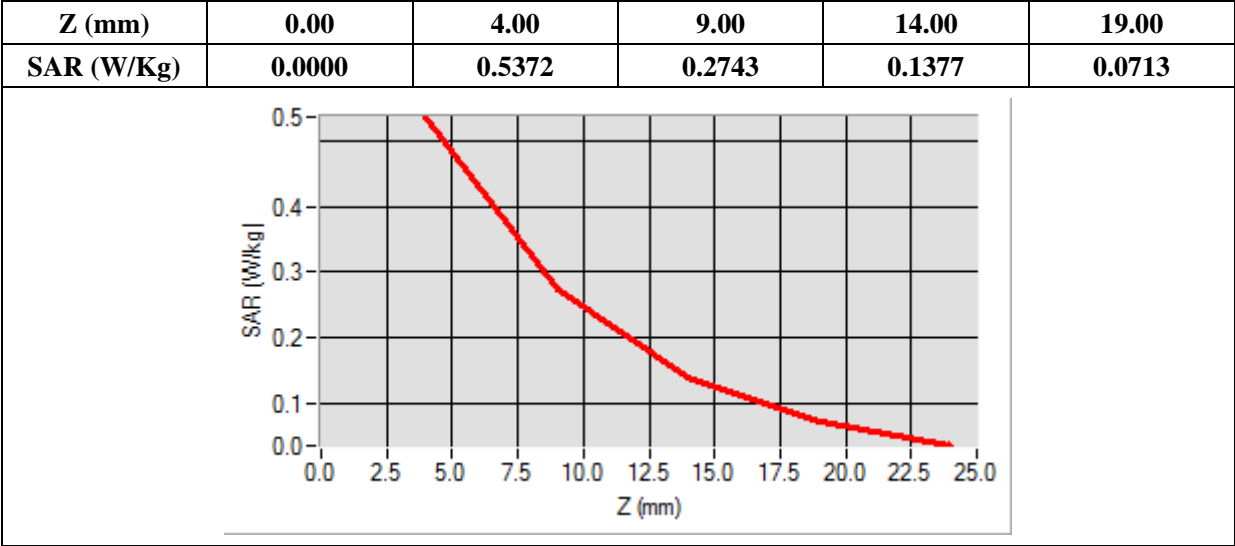

# MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

## A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



## B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

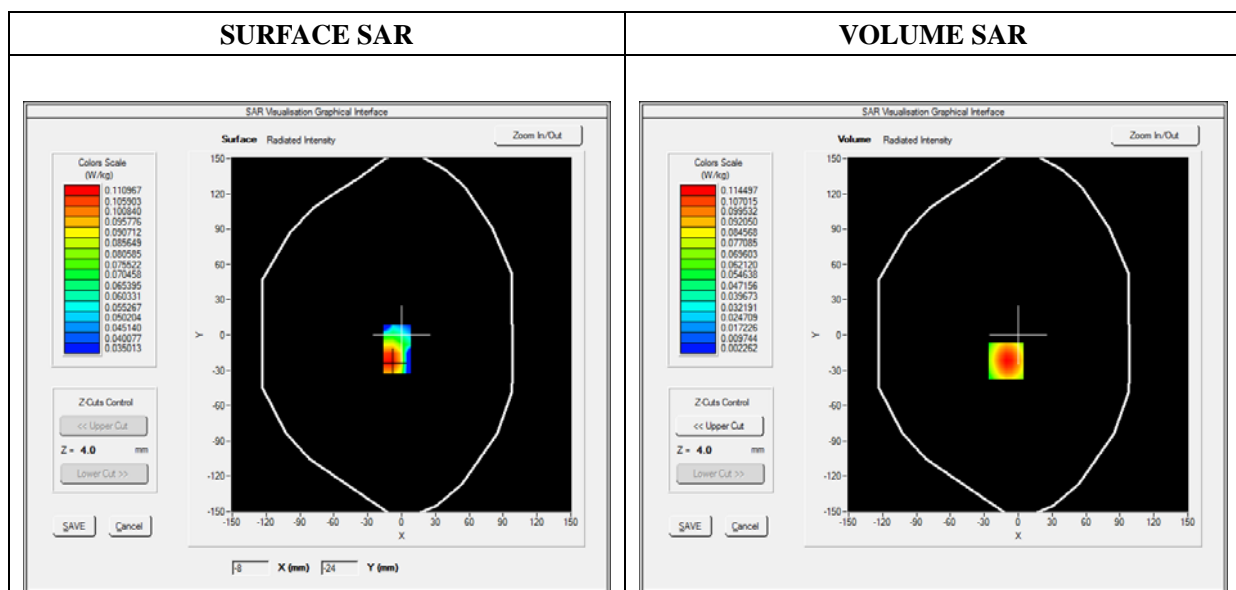

Maximum location: X=-11.00, Y=-22.00

SAR 10g (W/Kg)	0.057743
SAR 1g (W/Kg)	0.107546

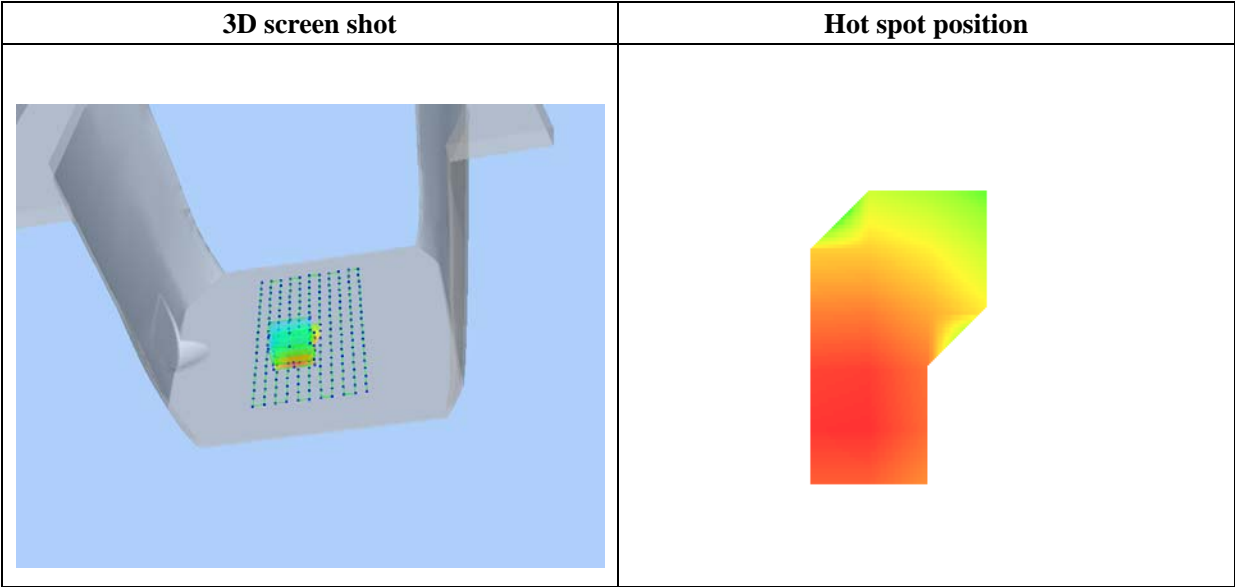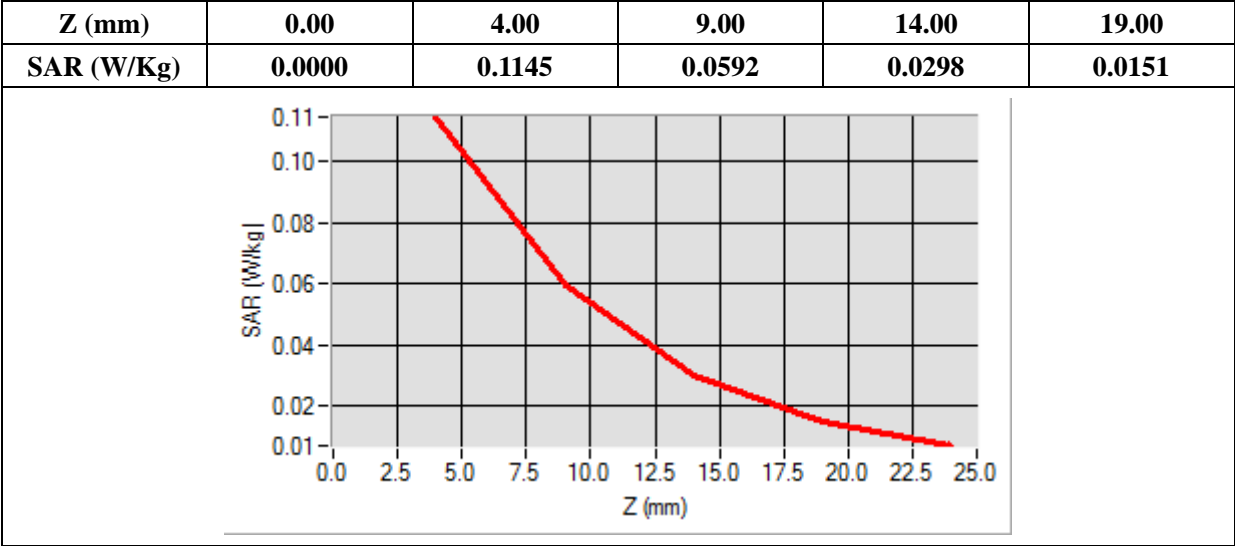

## MEASUREMENT 42

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

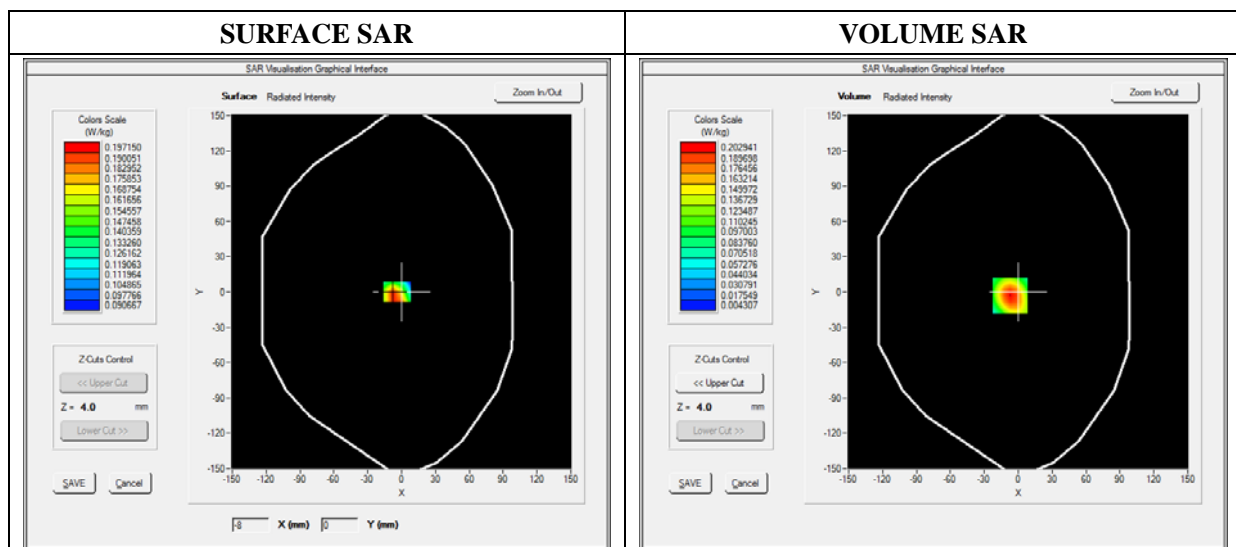

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.045241
SAR 1g (W/Kg)	0.086981

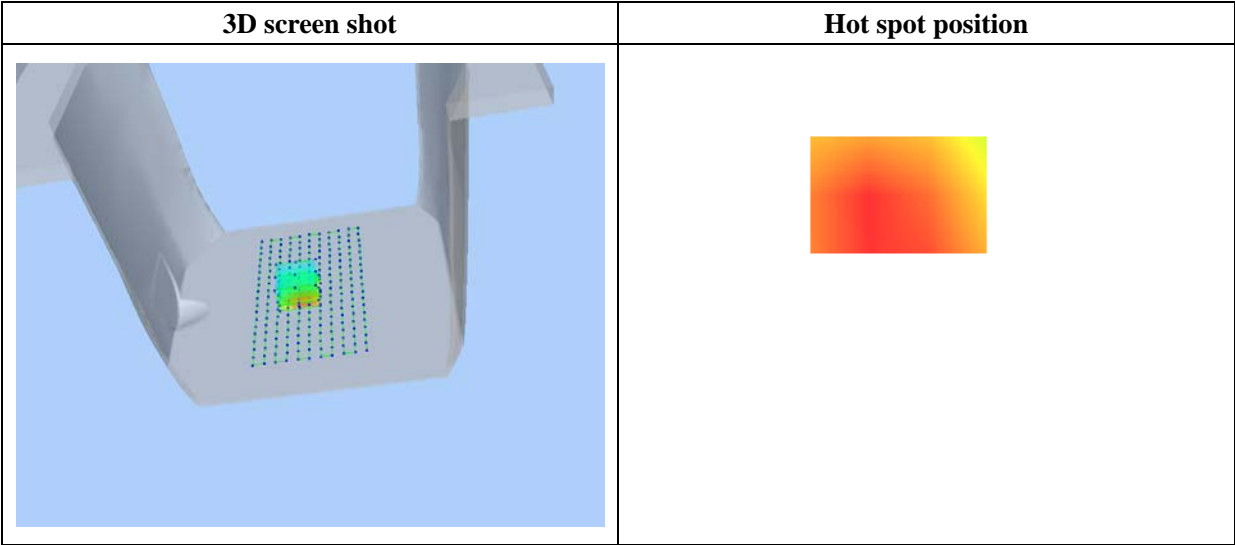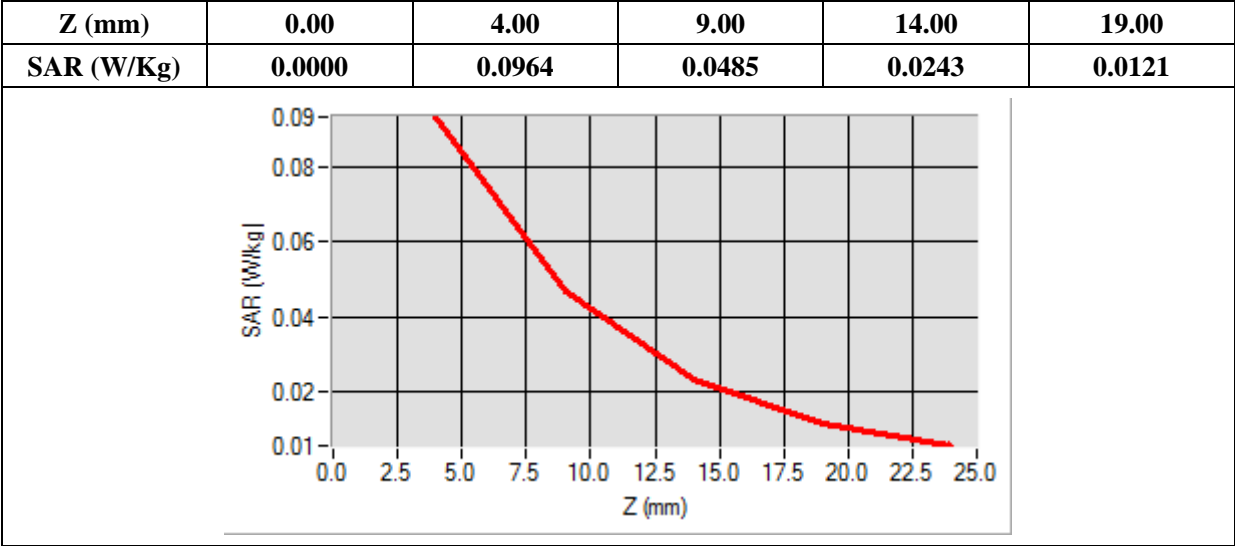

## MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

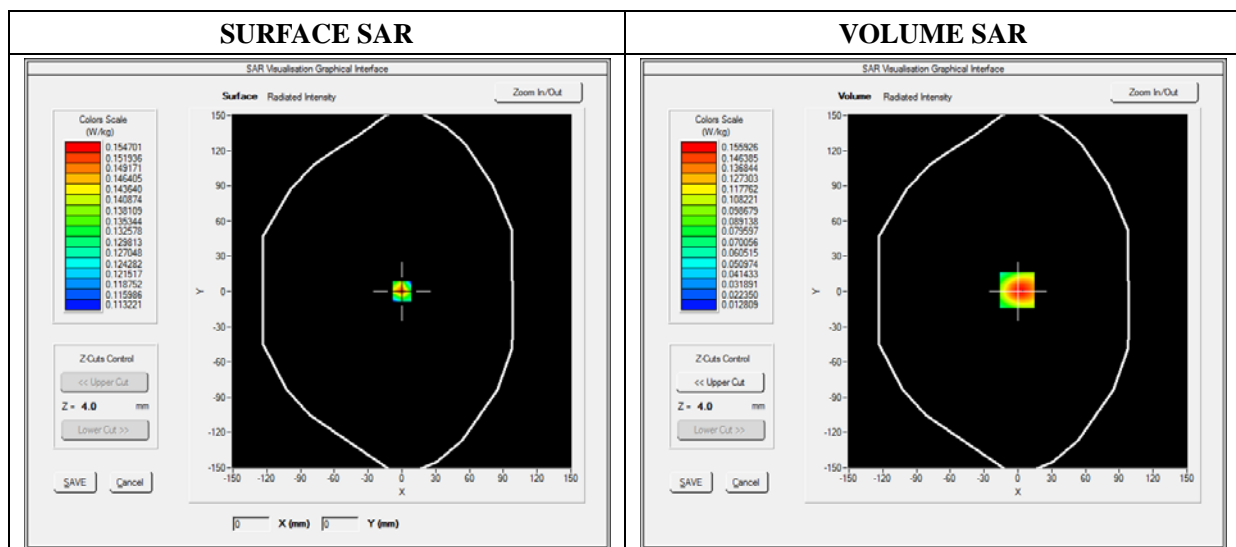

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.035850
SAR 1g (W/Kg)	0.084250

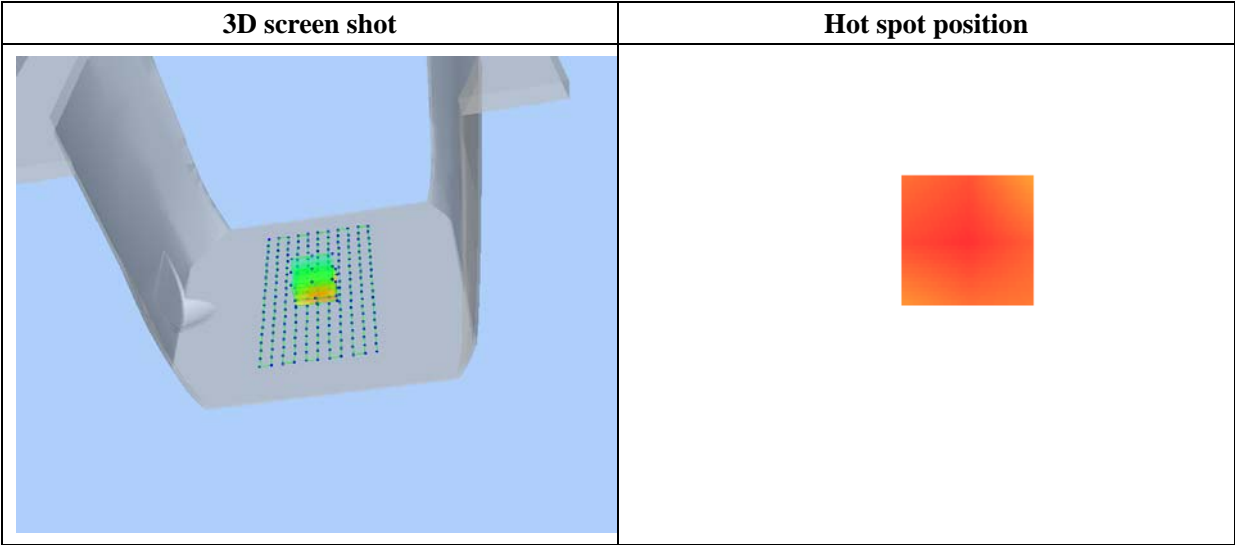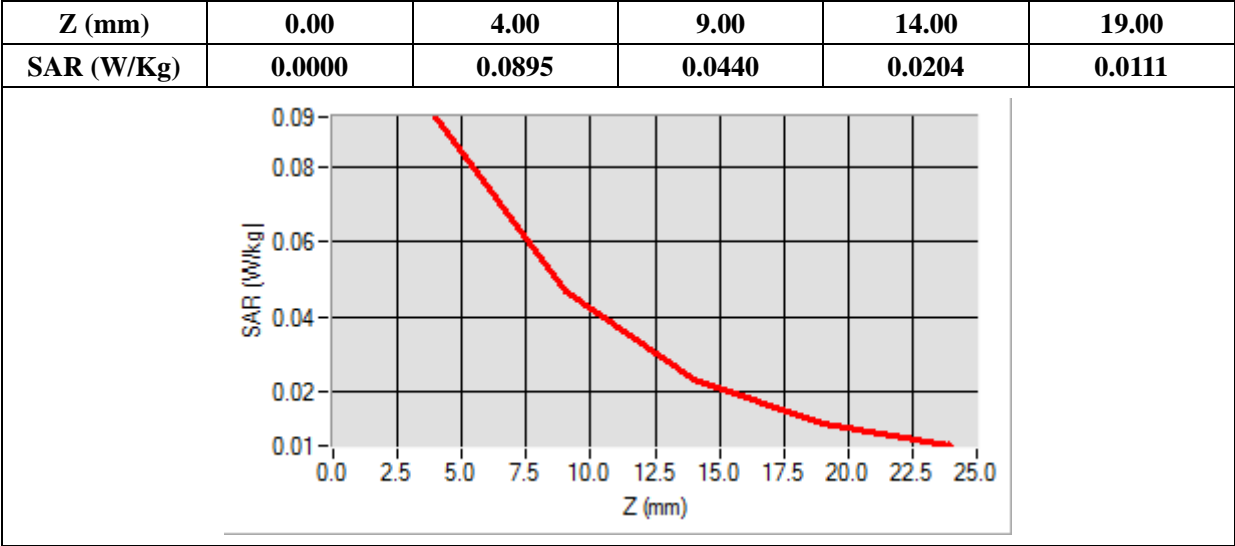

## MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

### B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

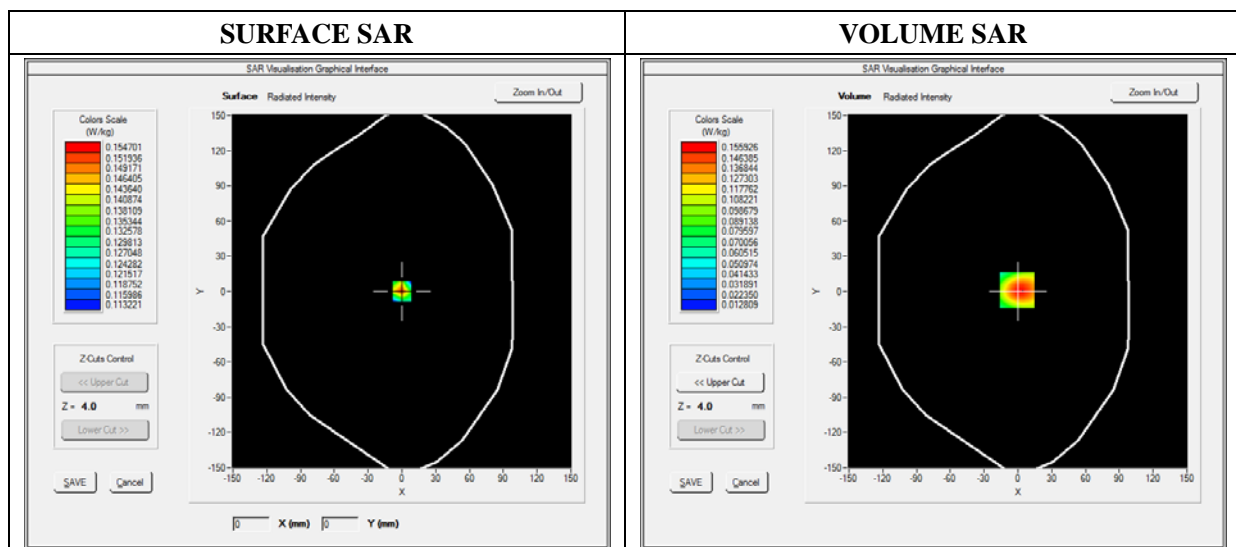



Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.044000
SAR 1g (W/Kg)	0.081240

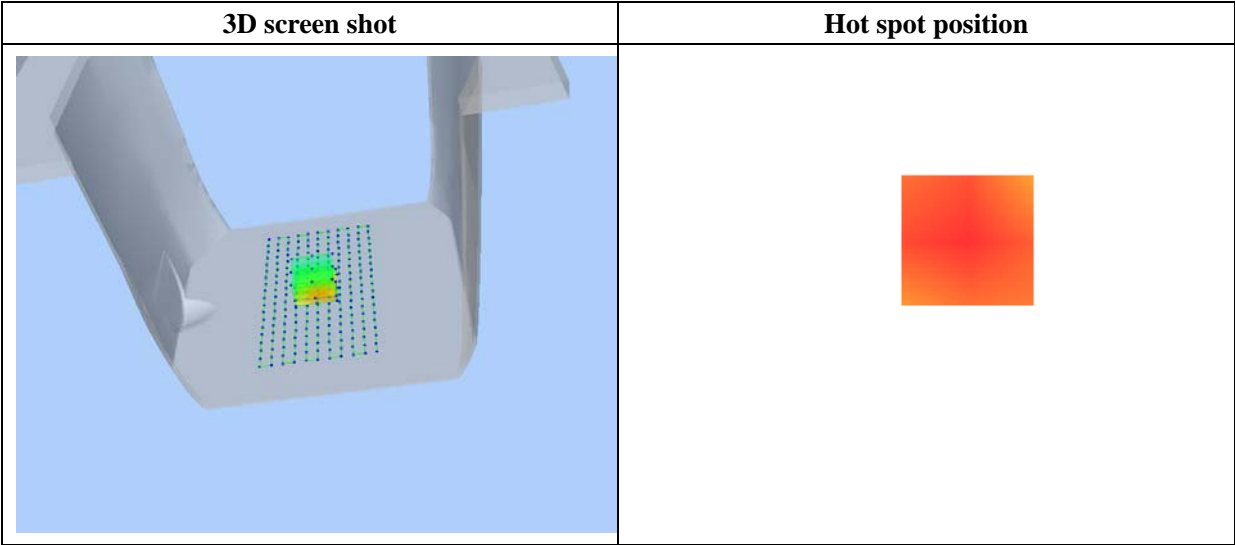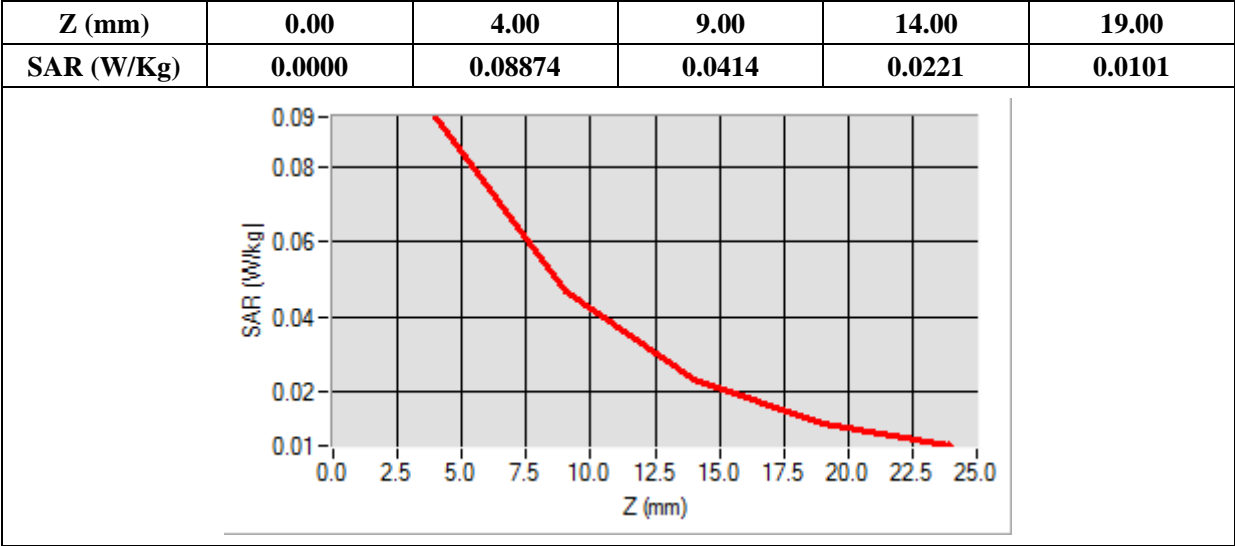

## MEASUREMENT 45

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back(Body-worn)
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

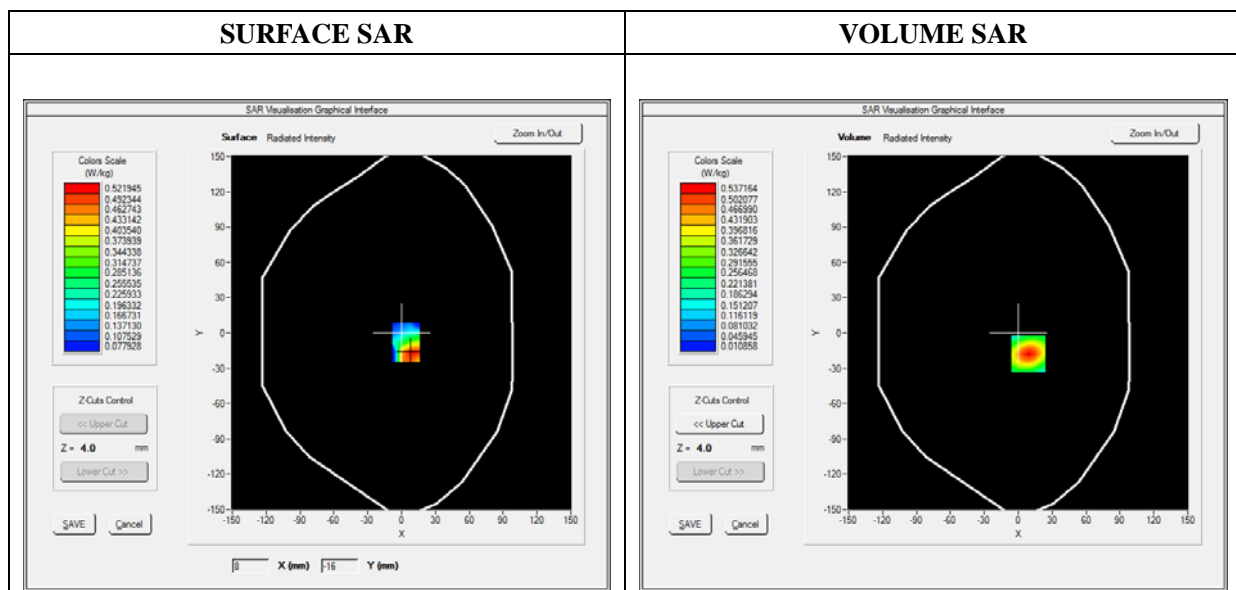

Maximum location: X=9.00, Y=-18.00

SAR 10g (W/Kg)	0.247452
SAR 1g (W/Kg)	0.486525

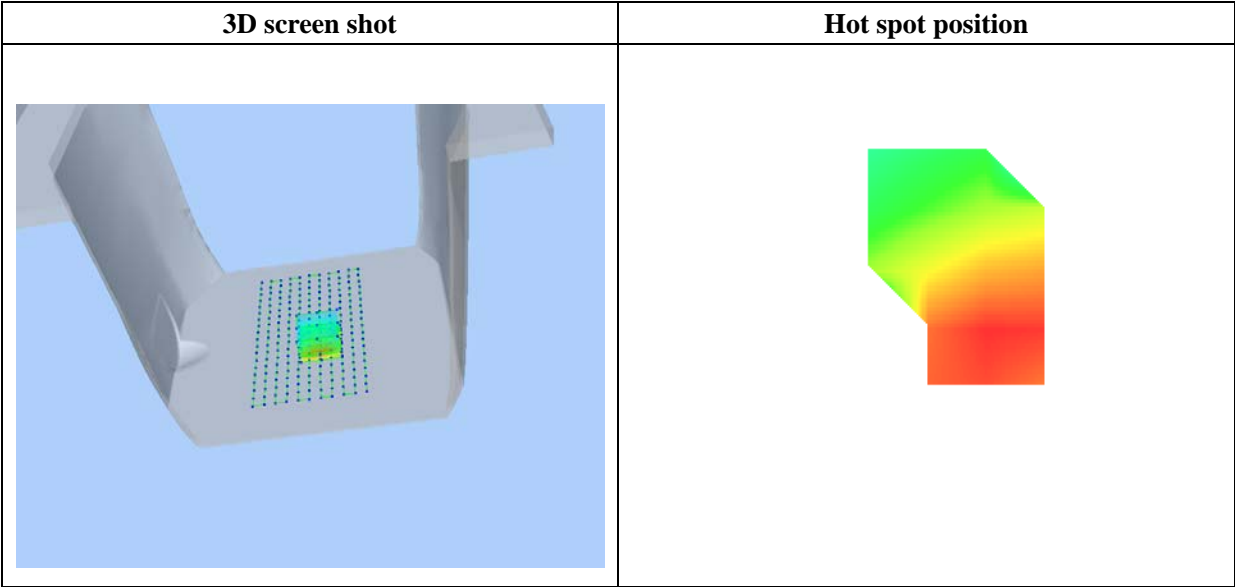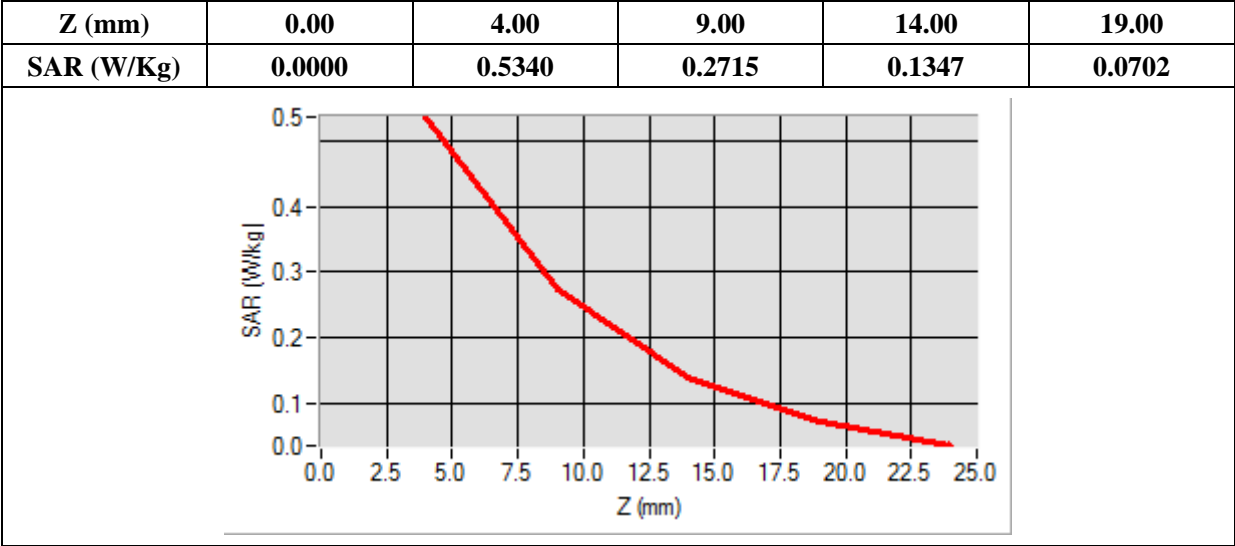

## MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 07/28/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

### A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front(Body-worn)
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



### B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	53.960000
Conductivity (S/m)	1.560000
Power Variation (%)	0.768521
Ambient Temperature	21.1
Liquid Temperature	21.3

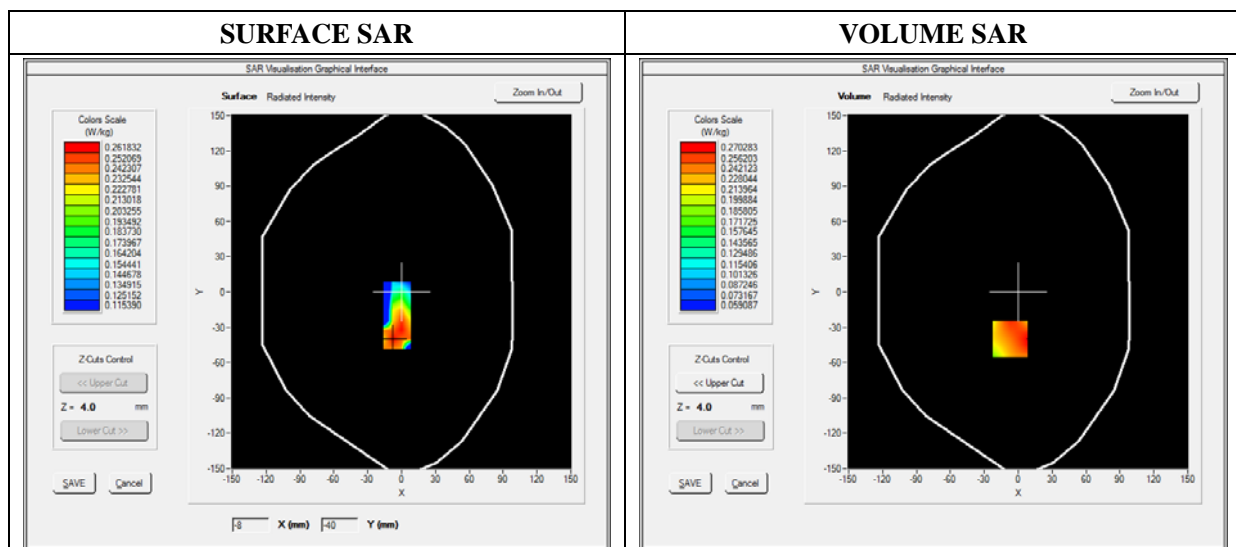

Maximum location: X=-47.00, Y=-8.00

SAR 10g (W/Kg)	0.091044
SAR 1g (W/Kg)	0.118086

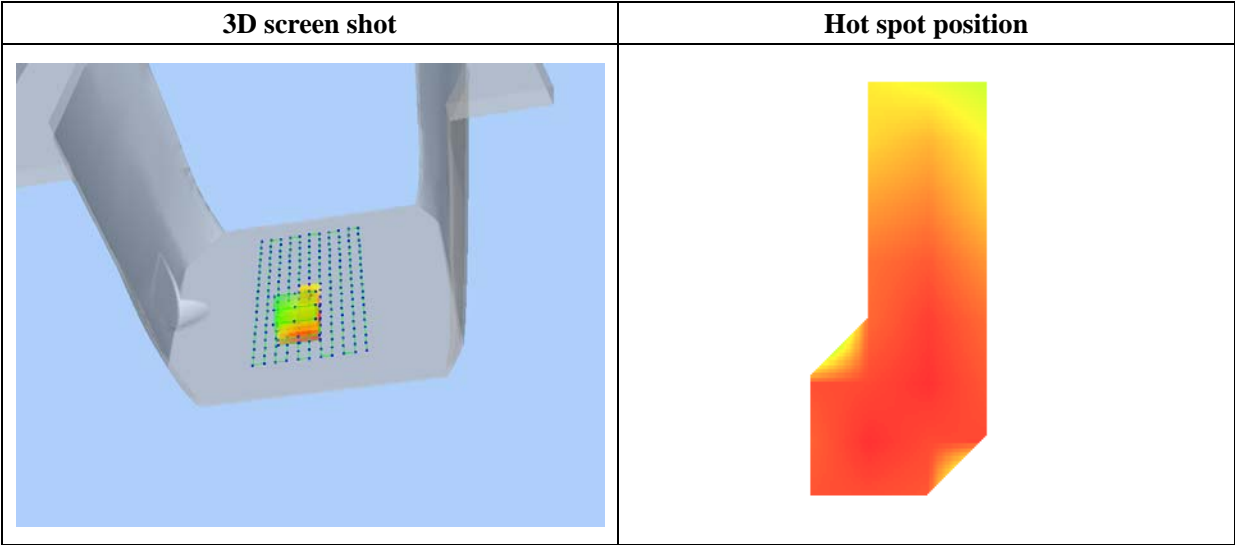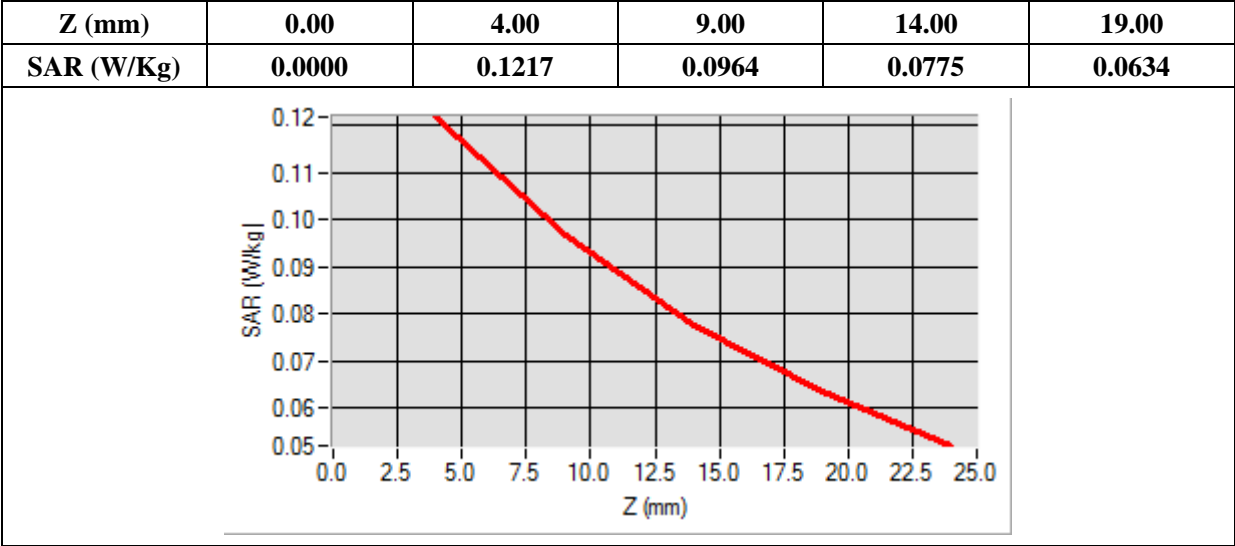

## Annex C. EUT Photos

---

### EUT View\_Front



### EUT View\_Back



Antenna View




## Annex D. Test Setup Photos


---

### Test View 1 (Right Head)

**Cheek**

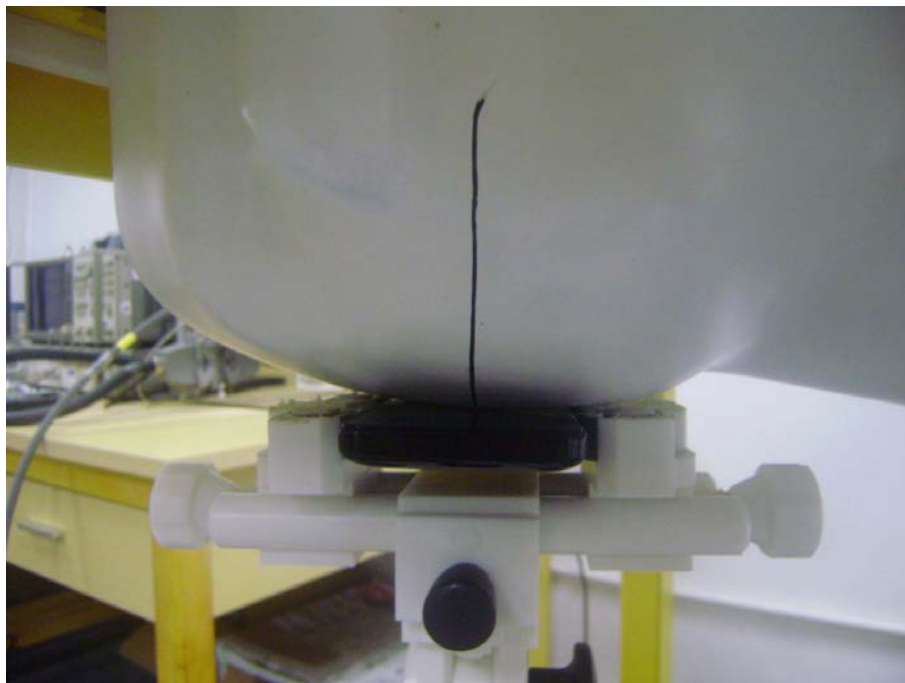


**Tilt**

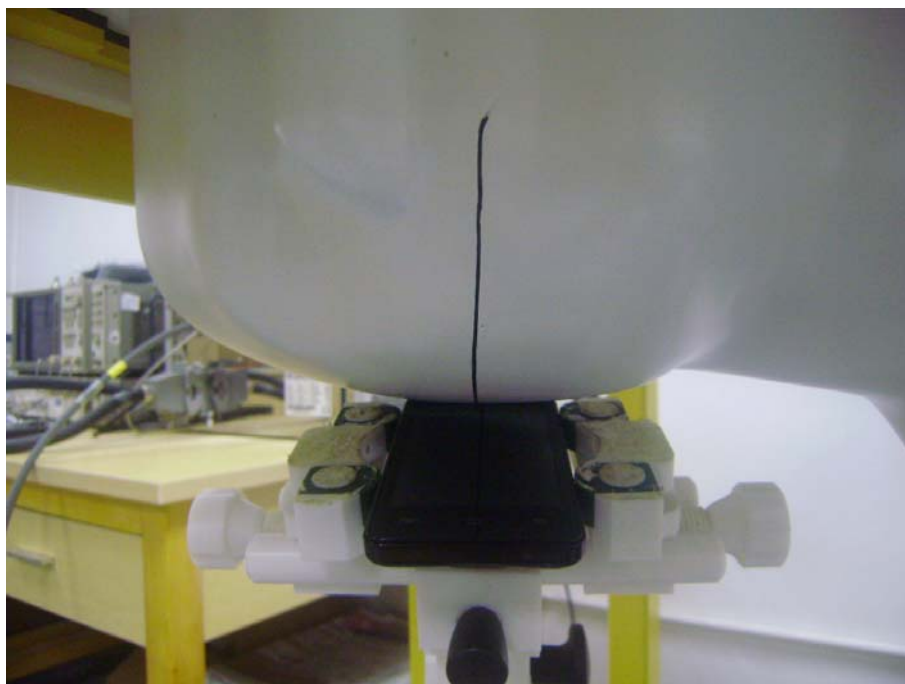




**Test View 2 (Left Head)**

**Cheek**

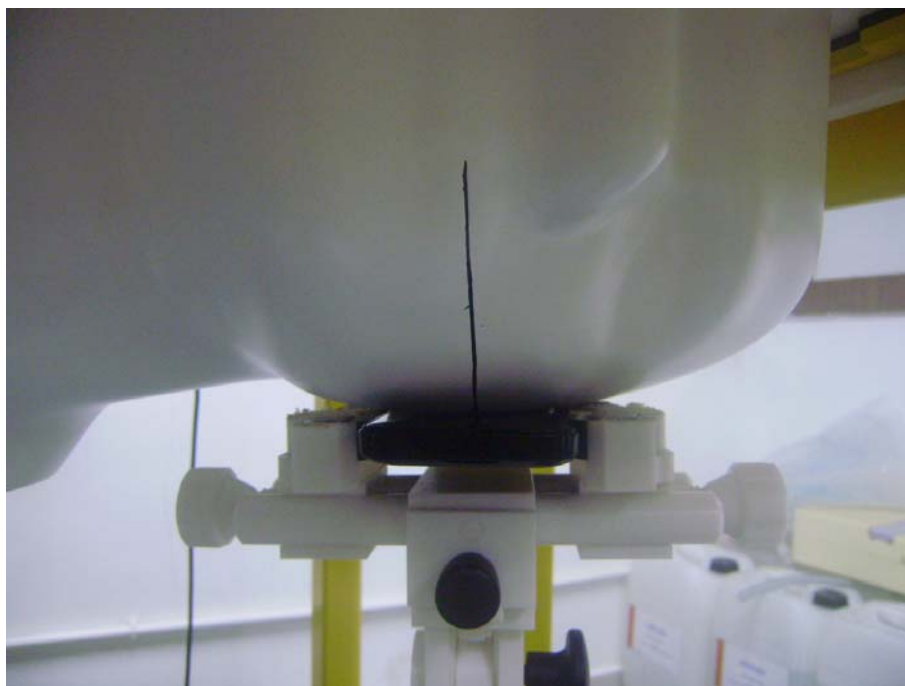

**Tilt**

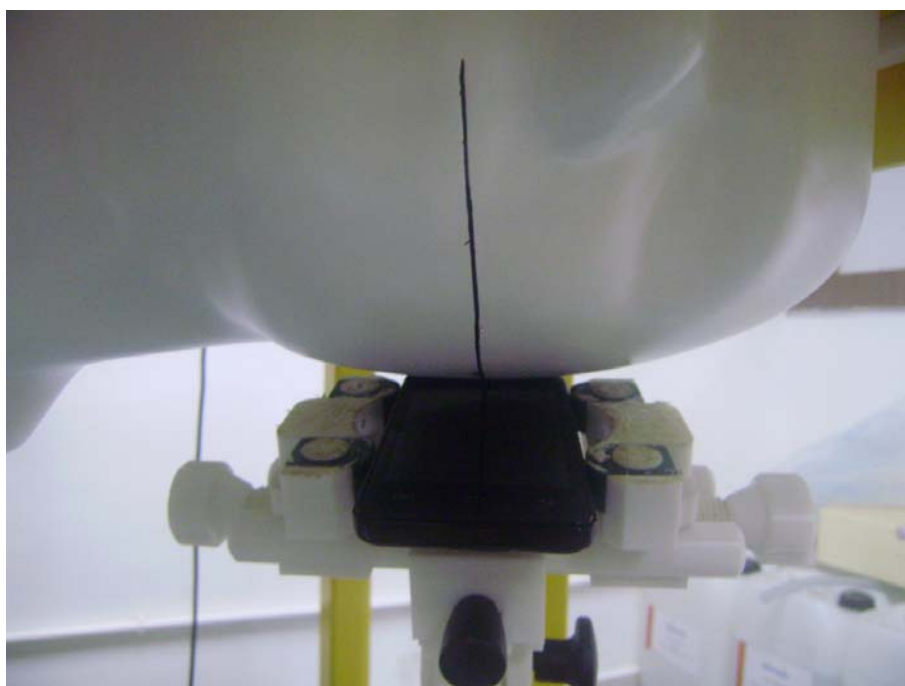

**Test View 3****Front Side****Back Side**

**Right side****Left side**

### Bottom Side



### Body-worn



## Annex E. Calibration Certificate

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***