

MEASUREMENT 27

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.960000
Power Variation (%)	0.800000
Ambient Temperature	21.1
Liquid Temperature	21.3

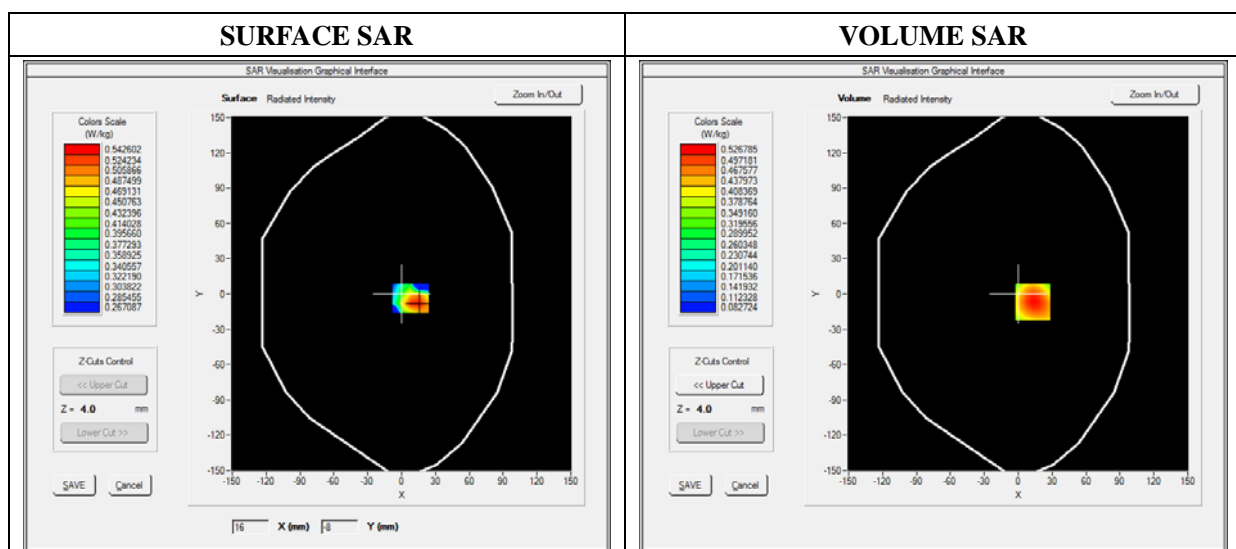



Maximum location: X=13.00, Y=-7.00

SAR 10g (W/Kg)	0.345894
SAR 1g (W/Kg)	0.500435

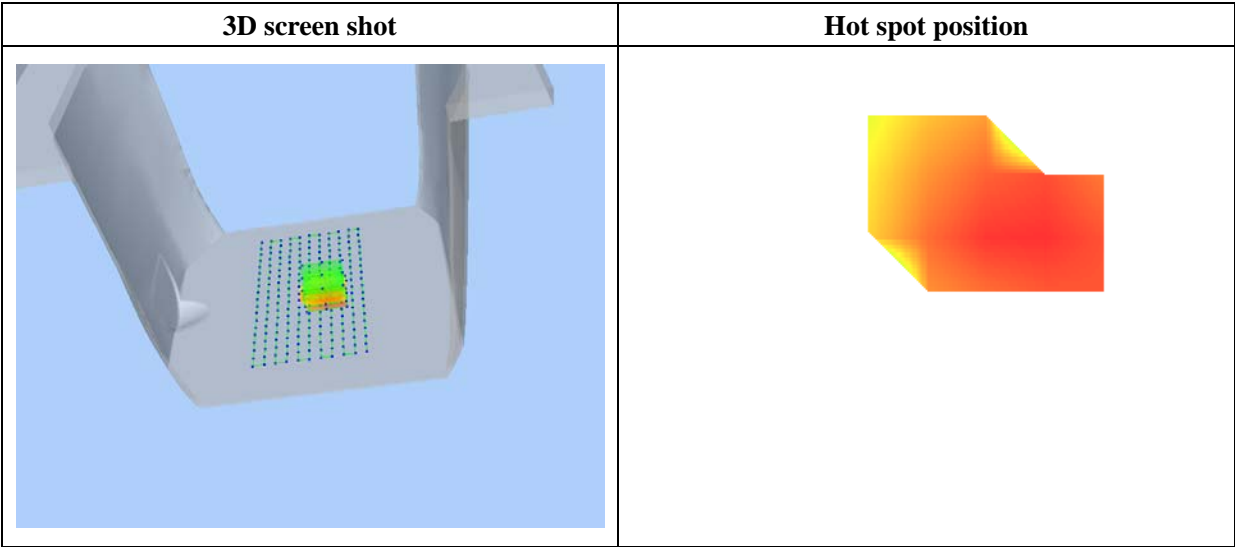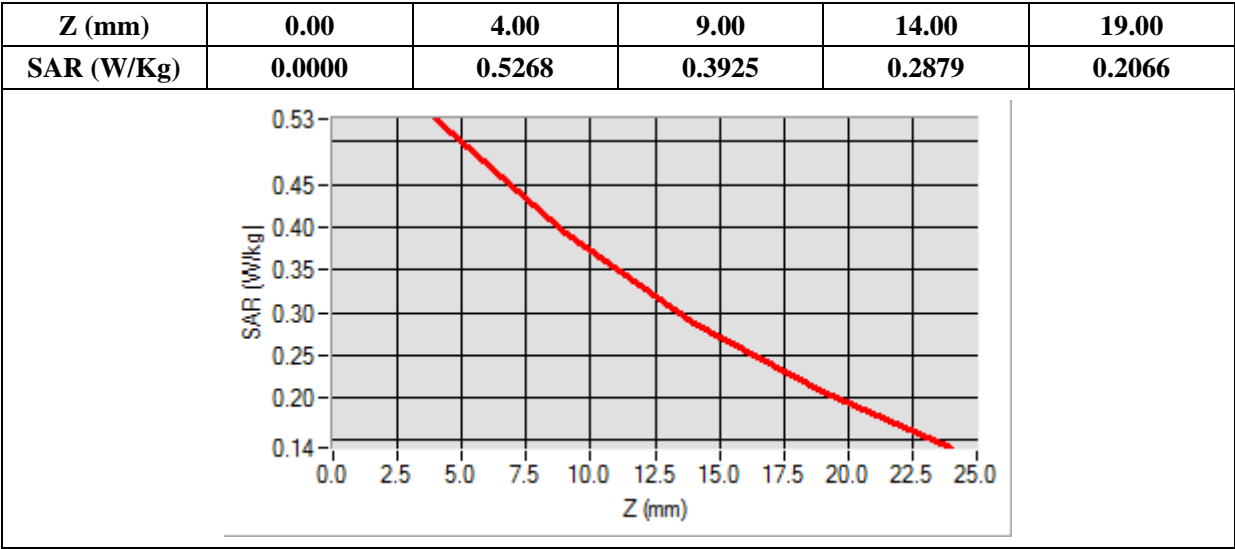

Maximum location: X=10.00, Y=-1.00

SAR 10g (W/Kg)	0.324558
SAR 1g (W/Kg)	0.459850

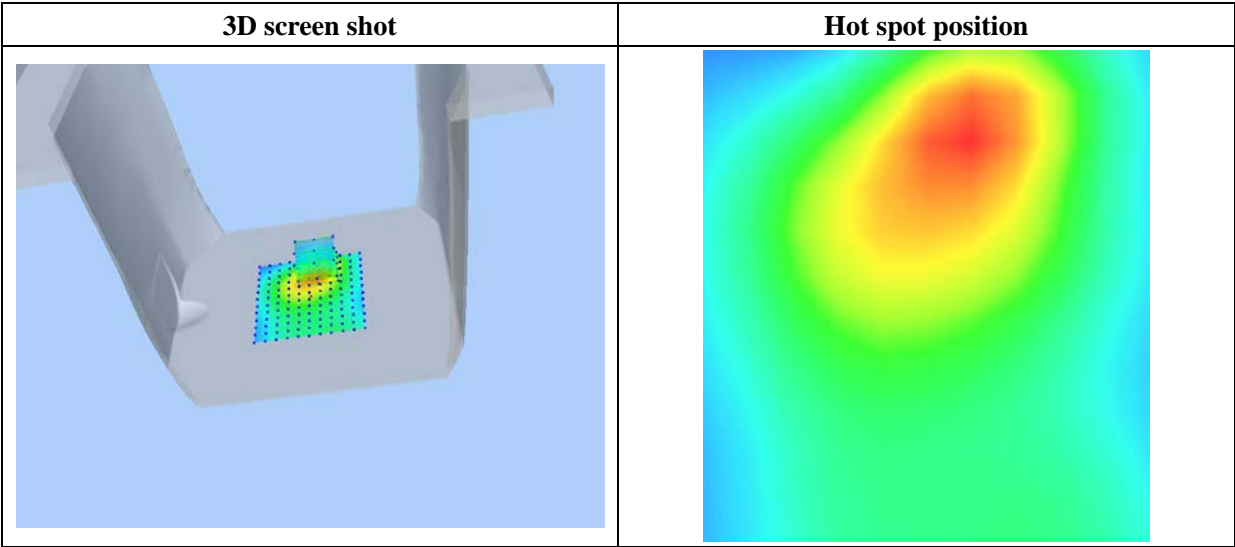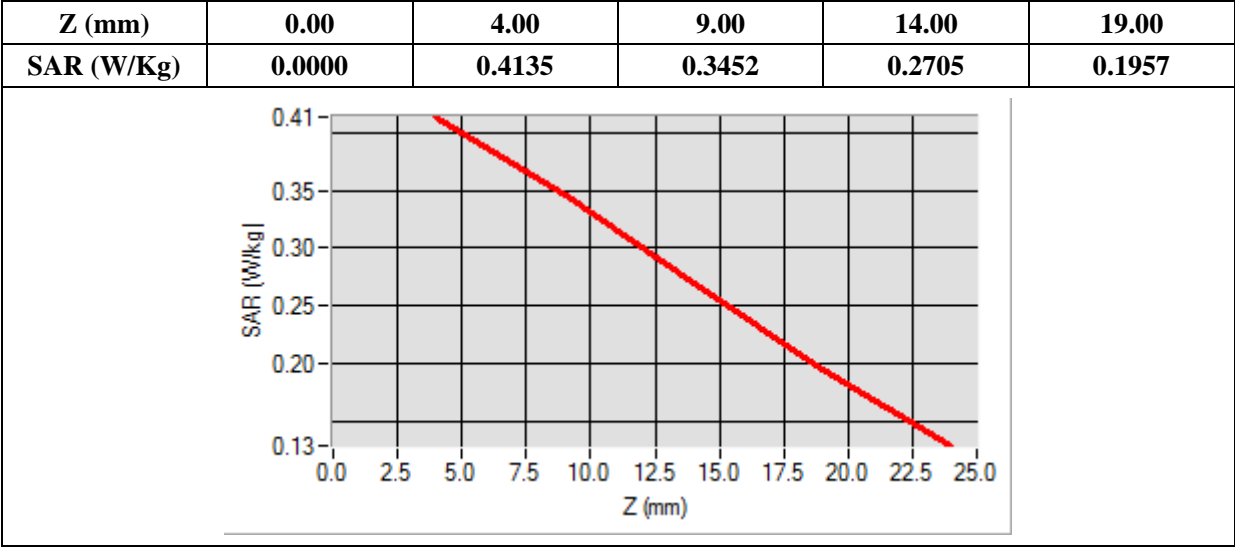

MEASUREMENT 30

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.960000
Power Variation (%)	0.800000
Ambient Temperature	21.1
Liquid Temperature	21.3

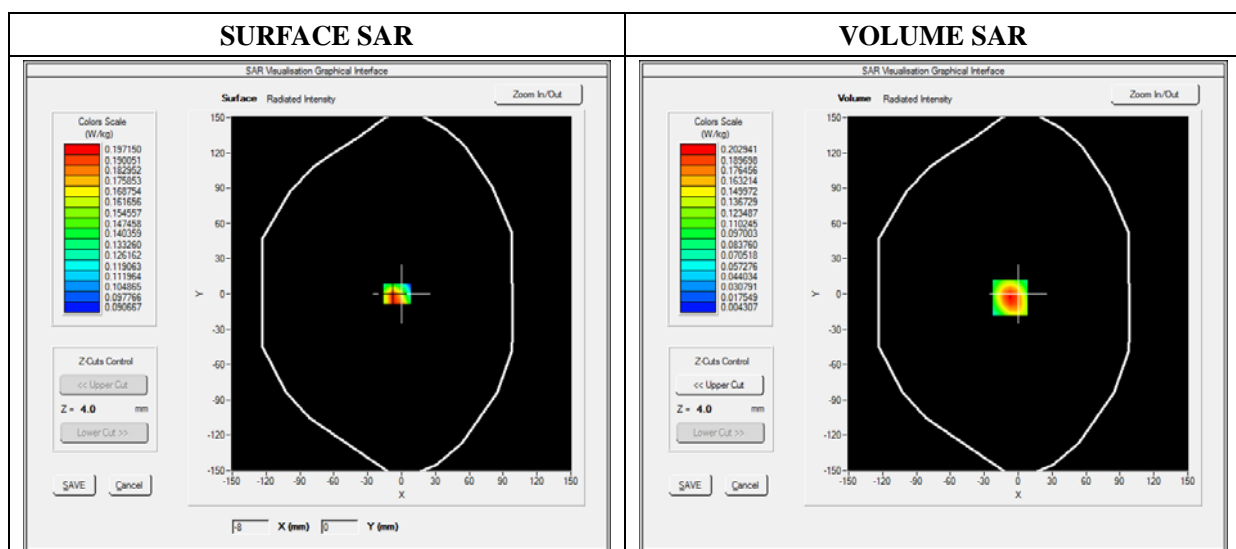

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.097938
SAR 1g (W/Kg)	0.186995

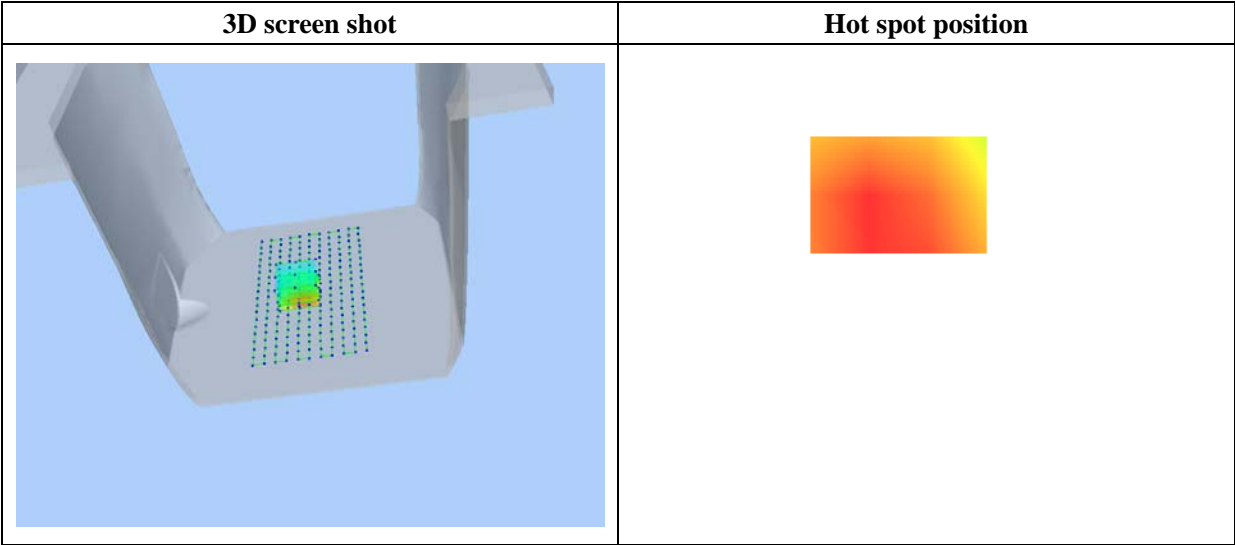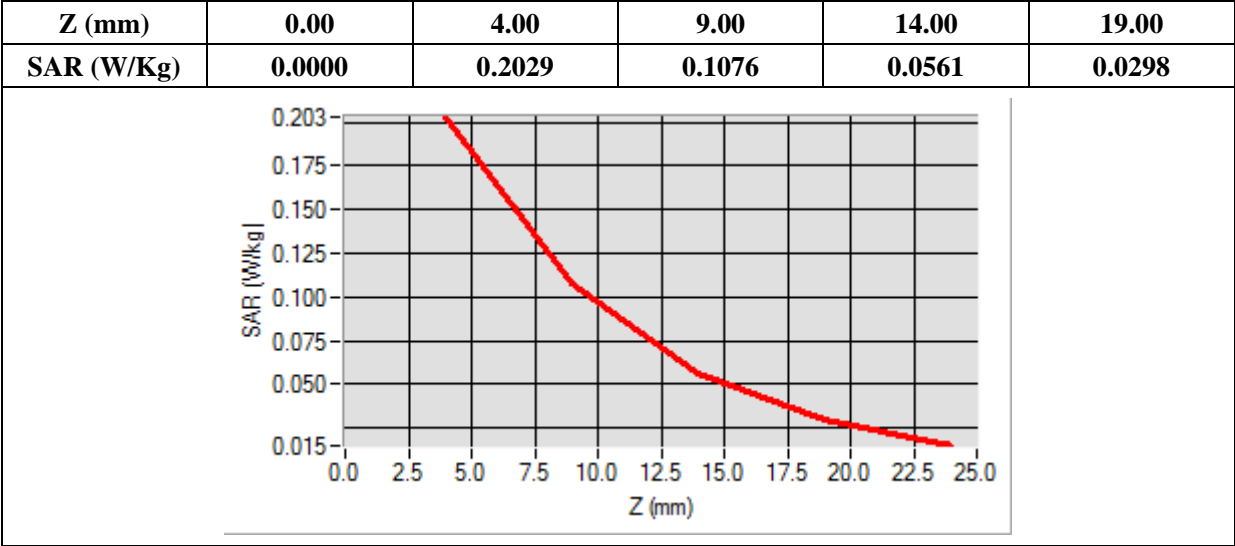

MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.960000
Power Variation (%)	0.800000
Ambient Temperature	21.1
Liquid Temperature	21.3

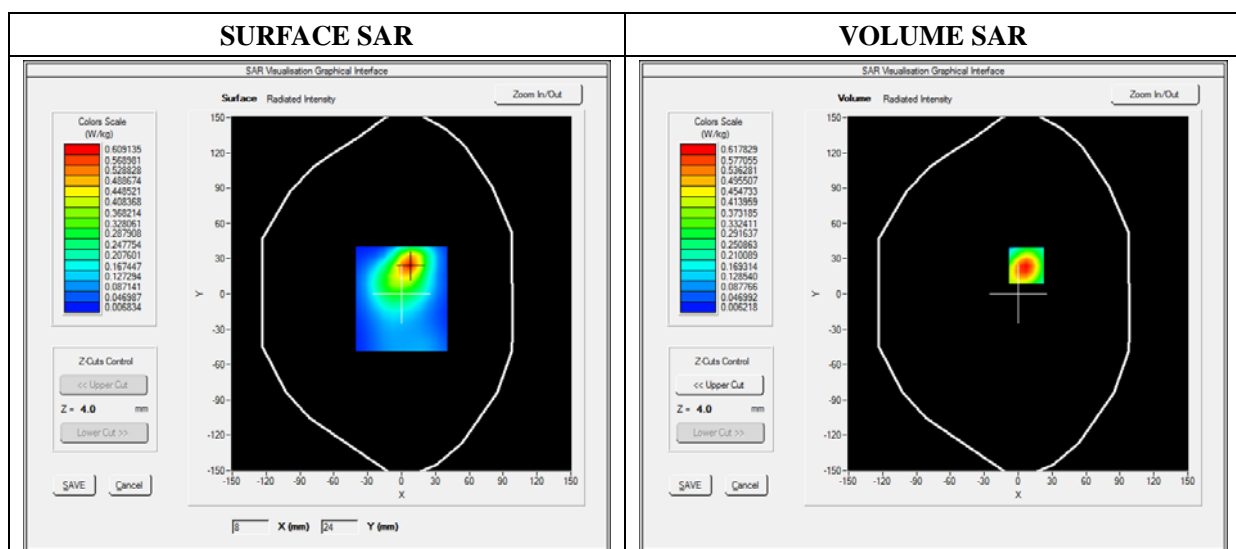

Maximum location: X=-56.00, Y=-32.00

SAR 10g (W/Kg)	0.079966
SAR 1g (W/Kg)	0.103557

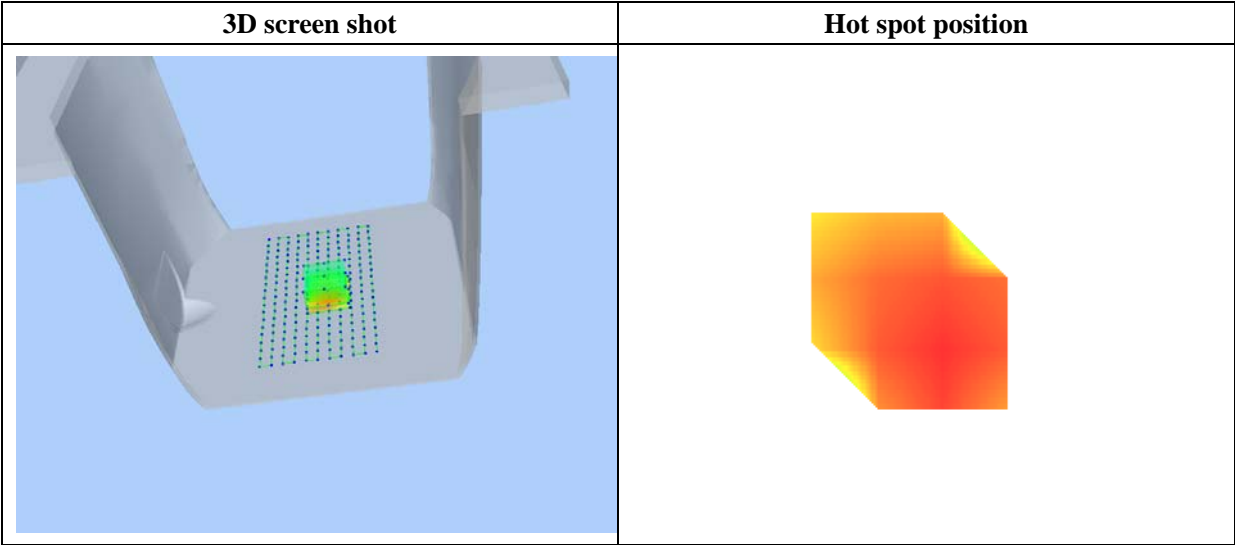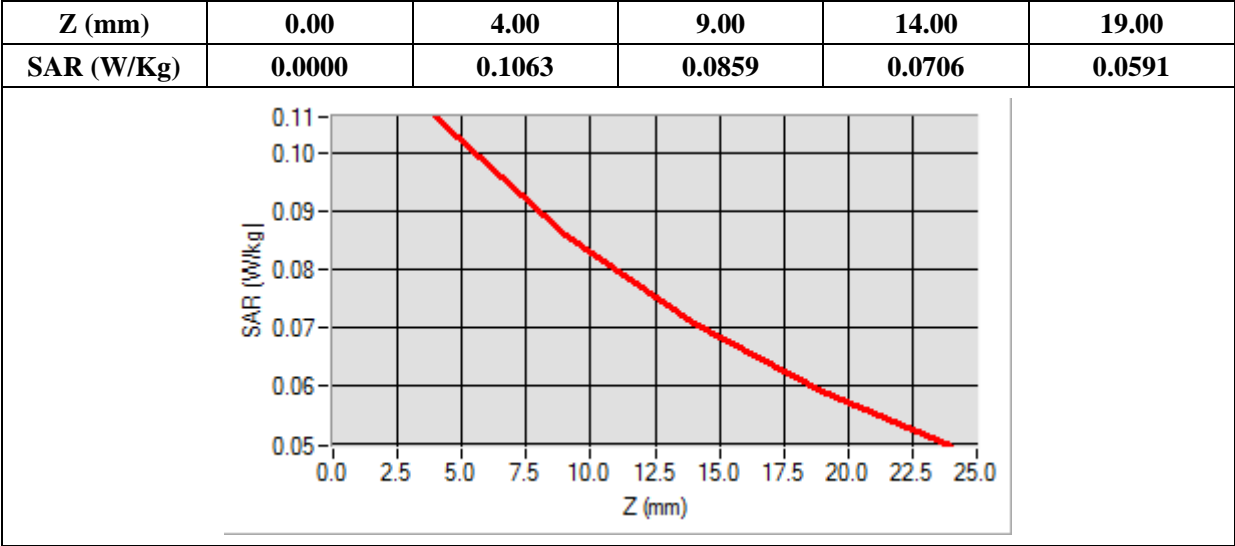

MEASUREMENT 33

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

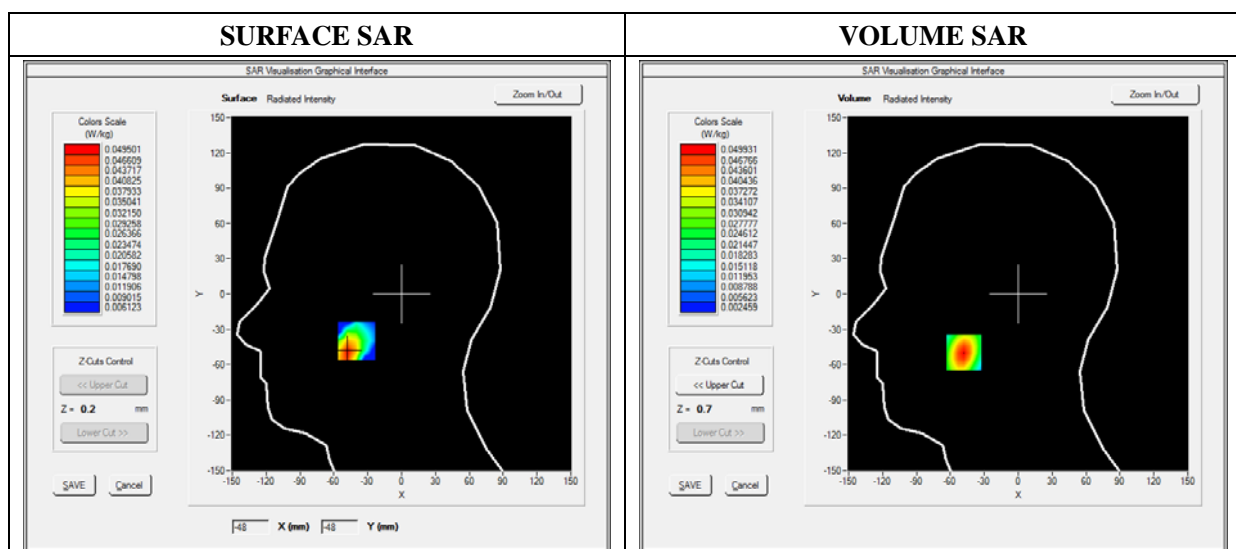

Maximum location: X=-48.00, Y=-50.00

SAR 10g (W/Kg)	0.027361
SAR 1g (W/Kg)	0.045880

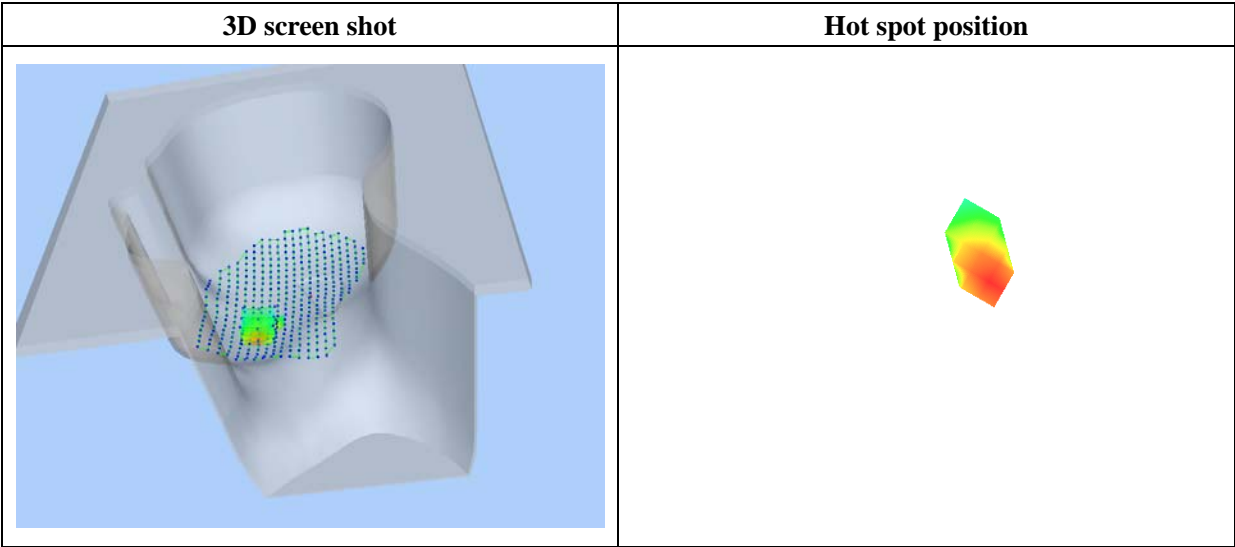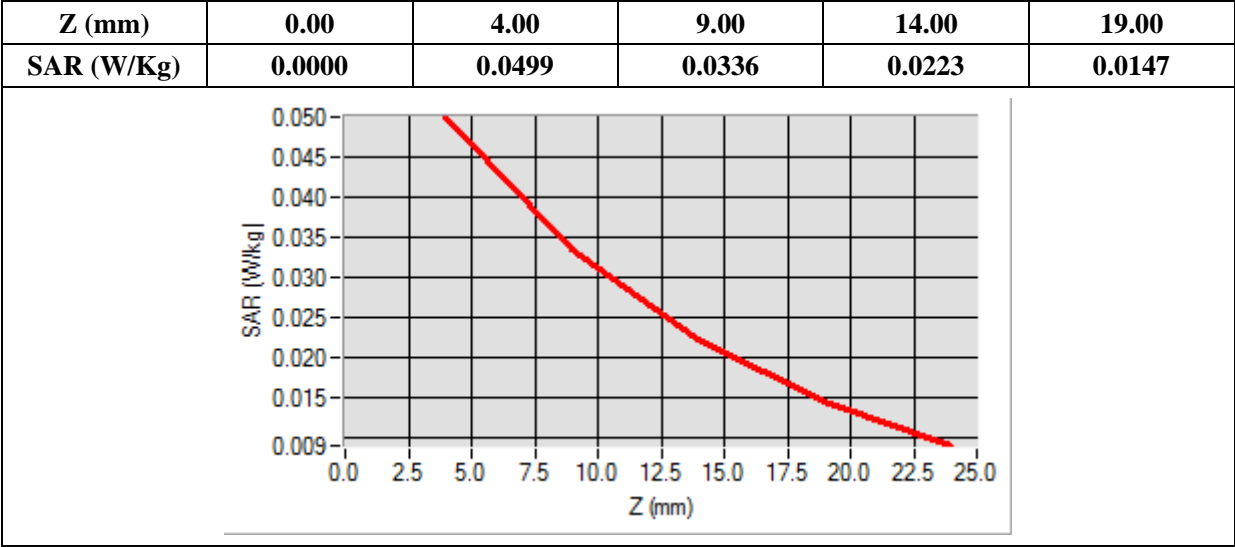

MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

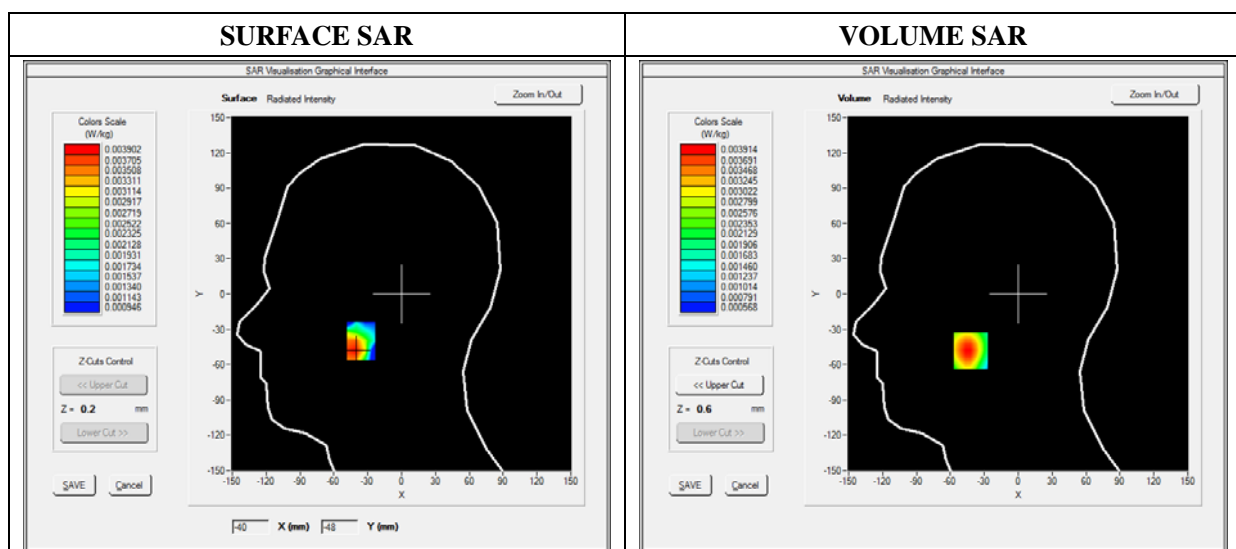

Maximum location: X=-42.00, Y=-48.00

SAR 10g (W/Kg)	0.002354
SAR 1g (W/Kg)	0.003845

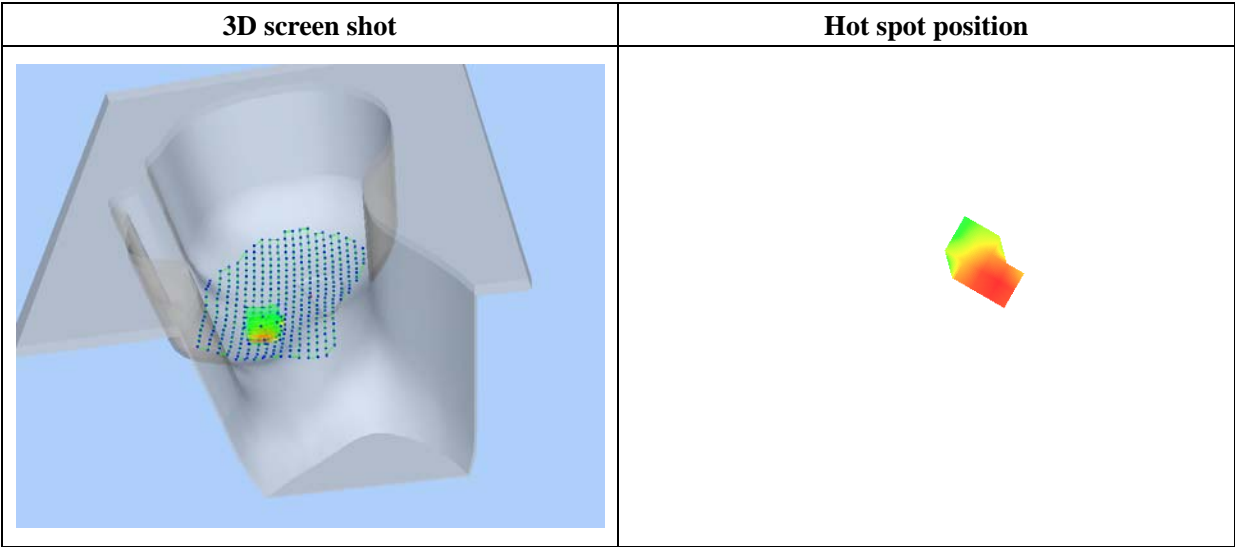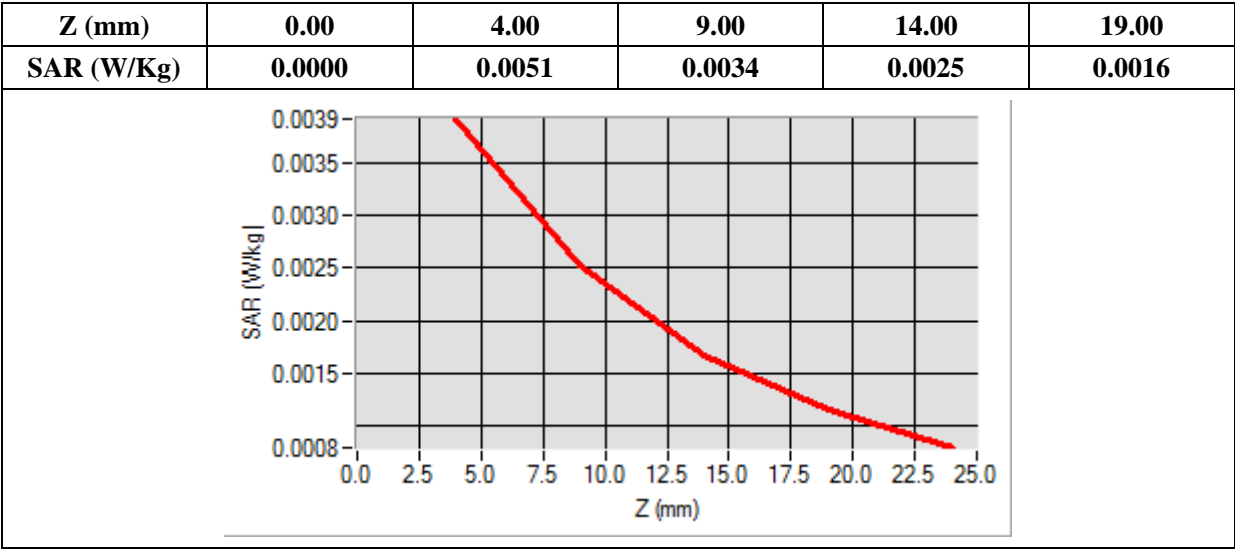

MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.25; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

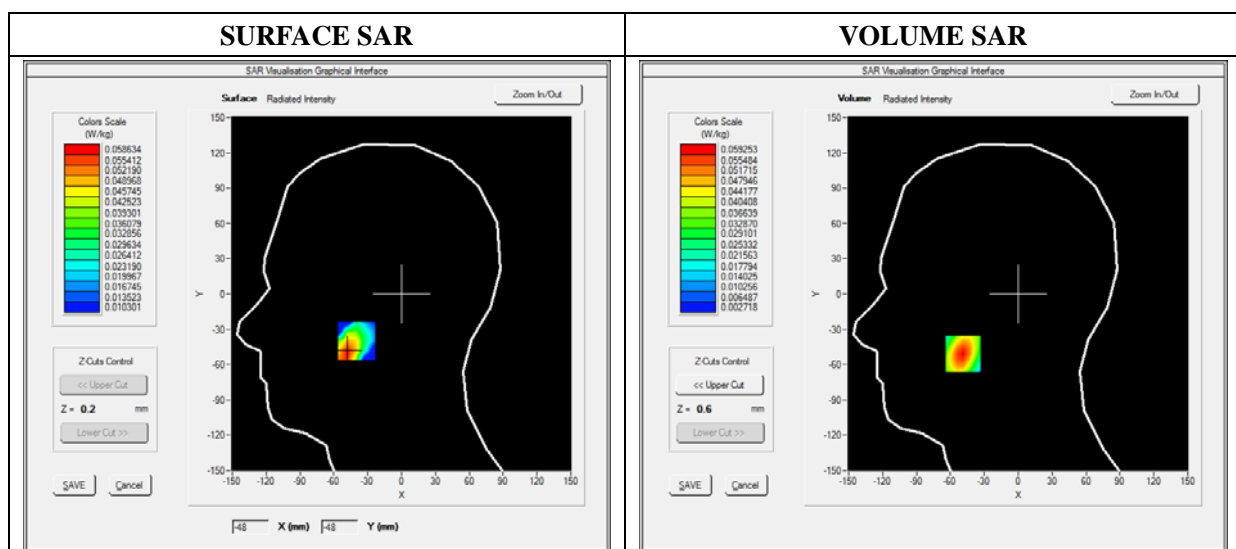



Maximum location: X=-49.00, Y=-51.00

SAR 10g (W/Kg)	0.032908
SAR 1g (W/Kg)	0.054687

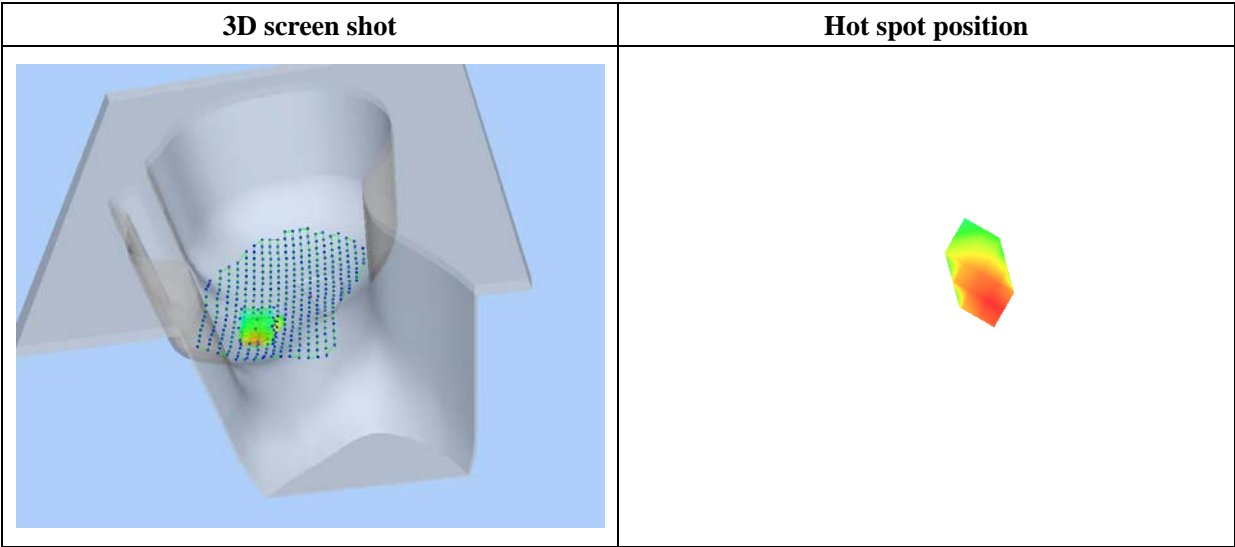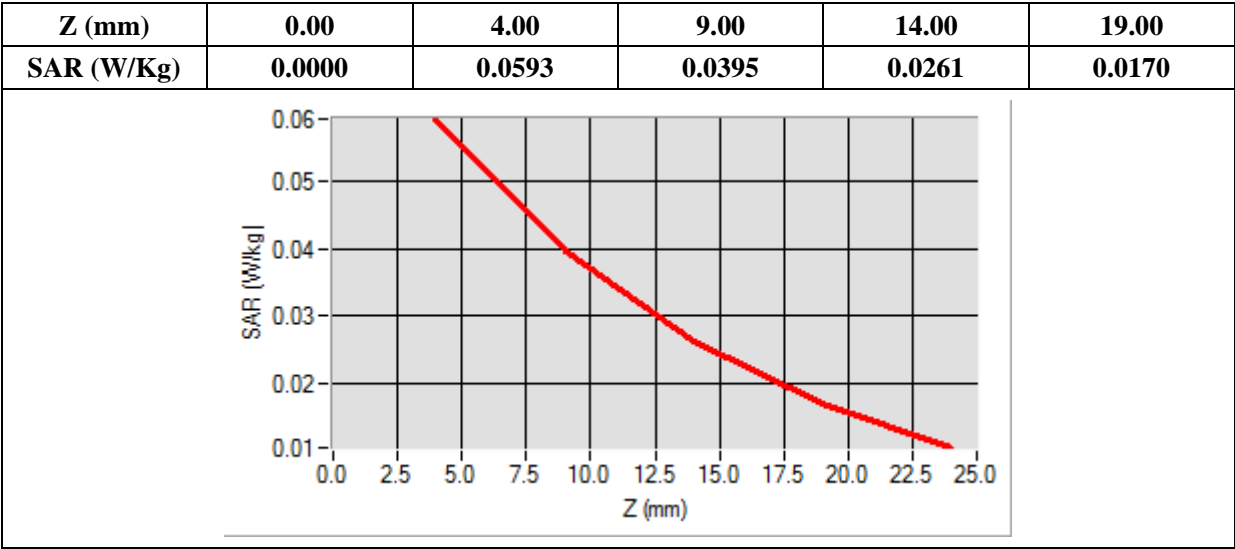

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.002915
SAR 1g (W/Kg)	0.006120

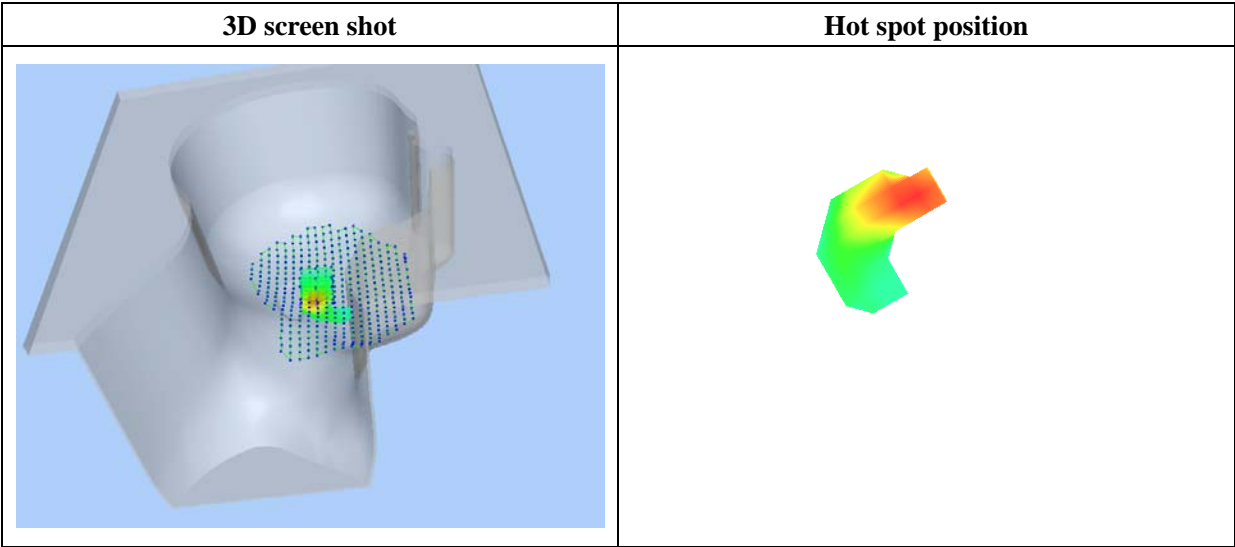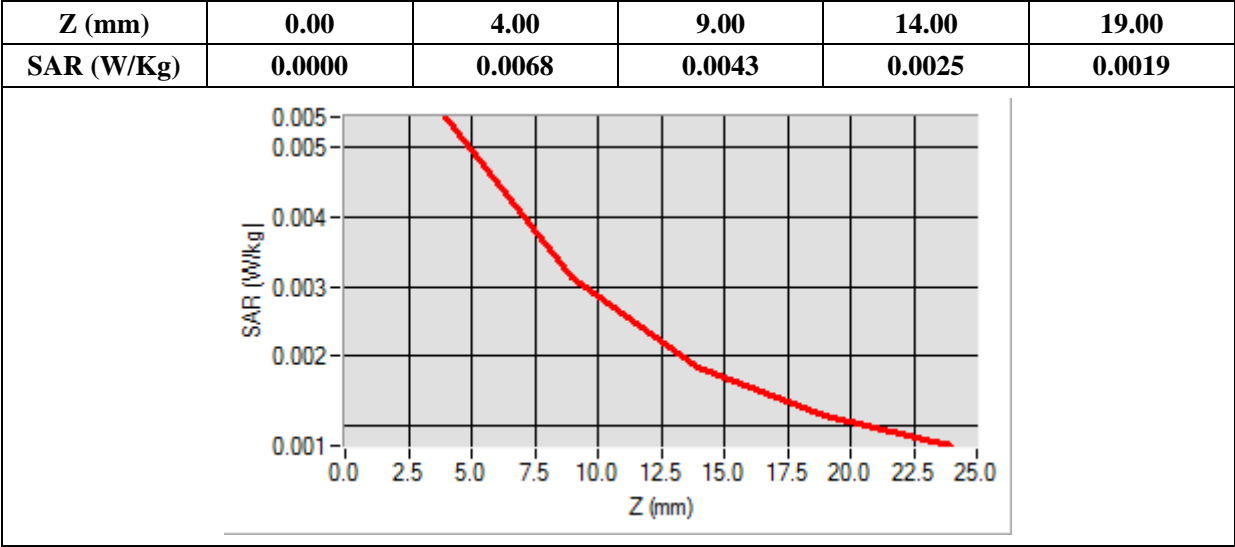

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

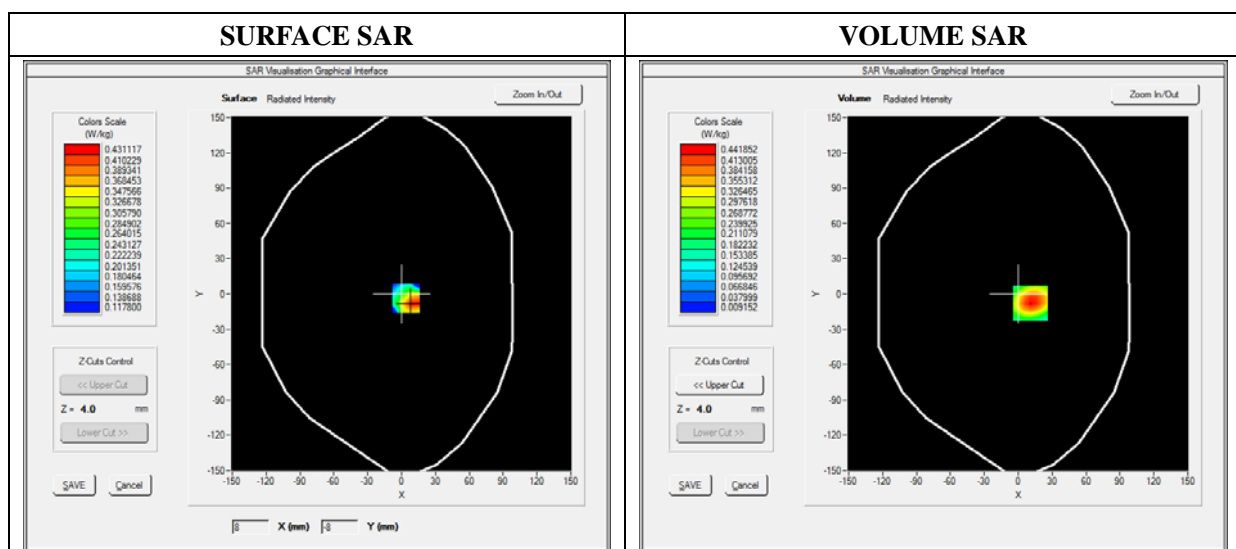

Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.212571
SAR 1g (W/Kg)	0.410798

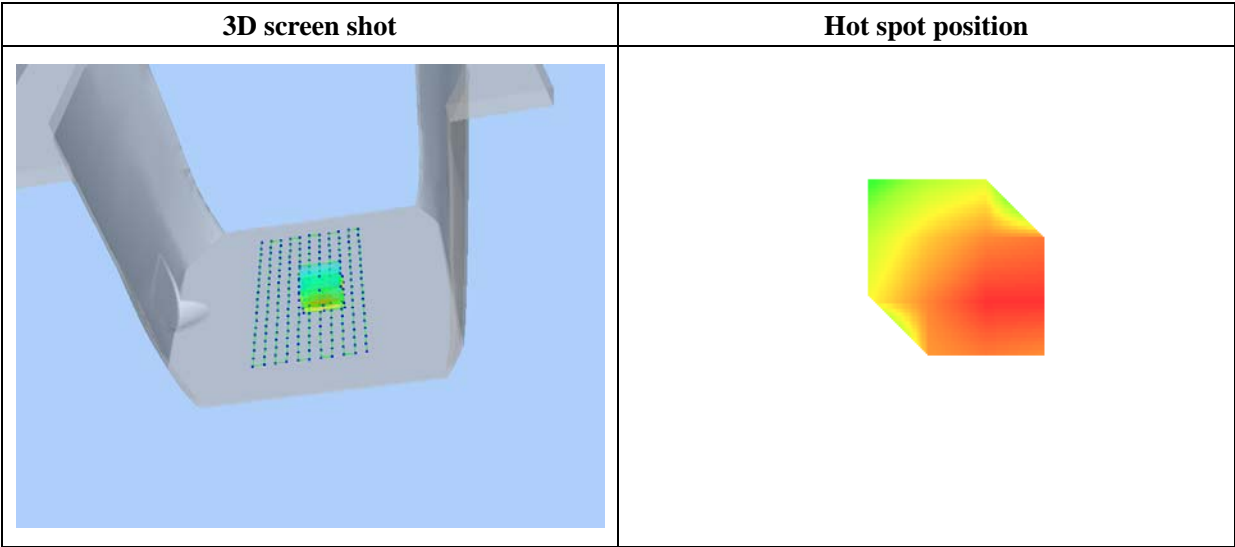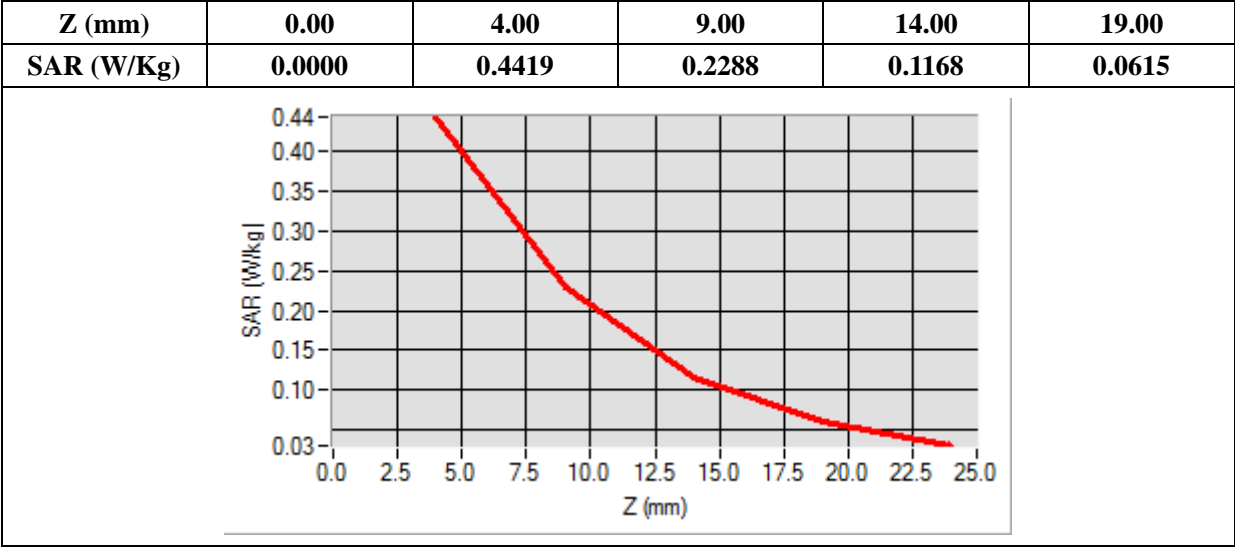

MEASUREMENT 39

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

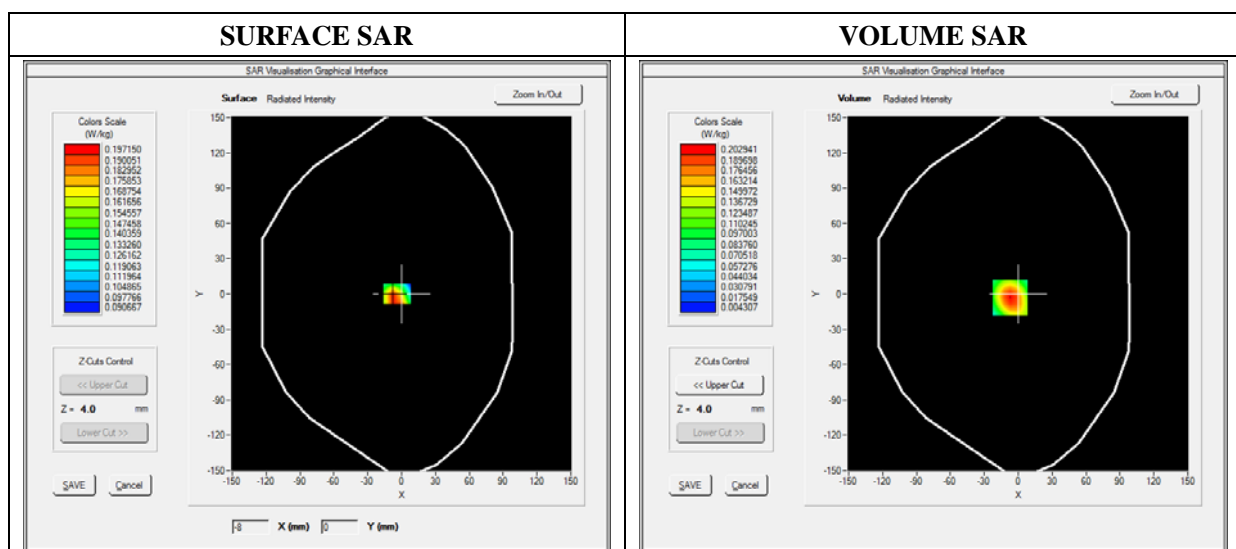

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.097938
SAR 1g (W/Kg)	0.186995

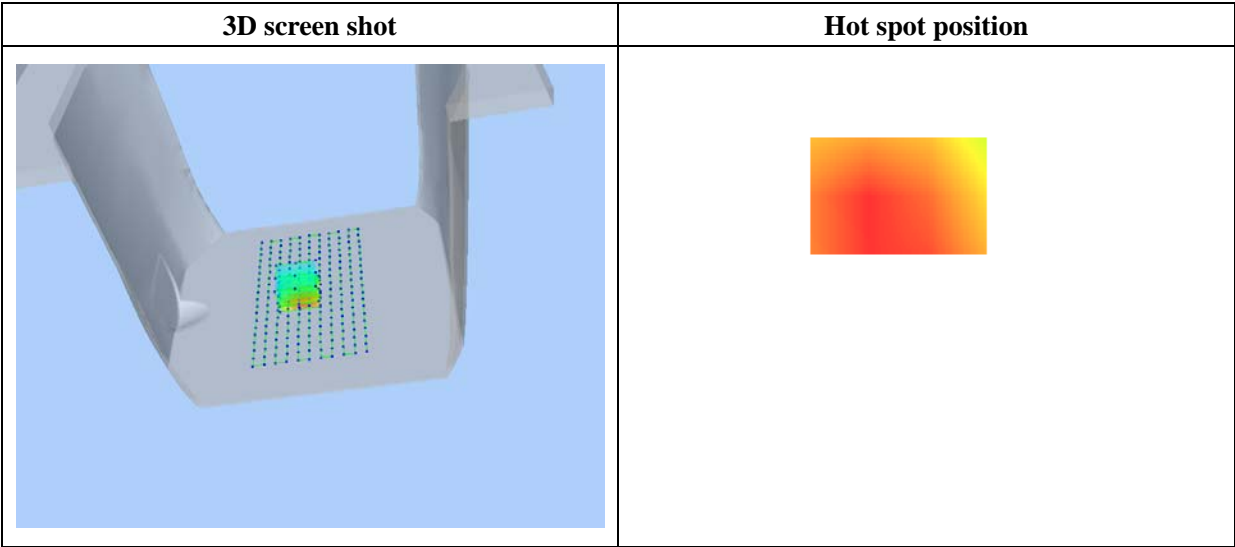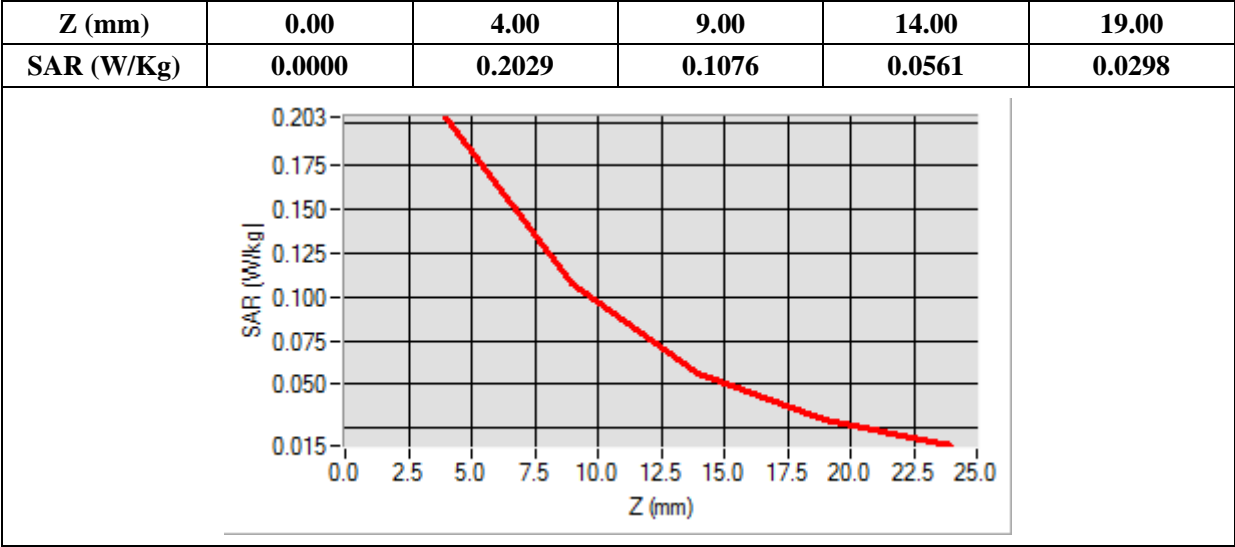

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

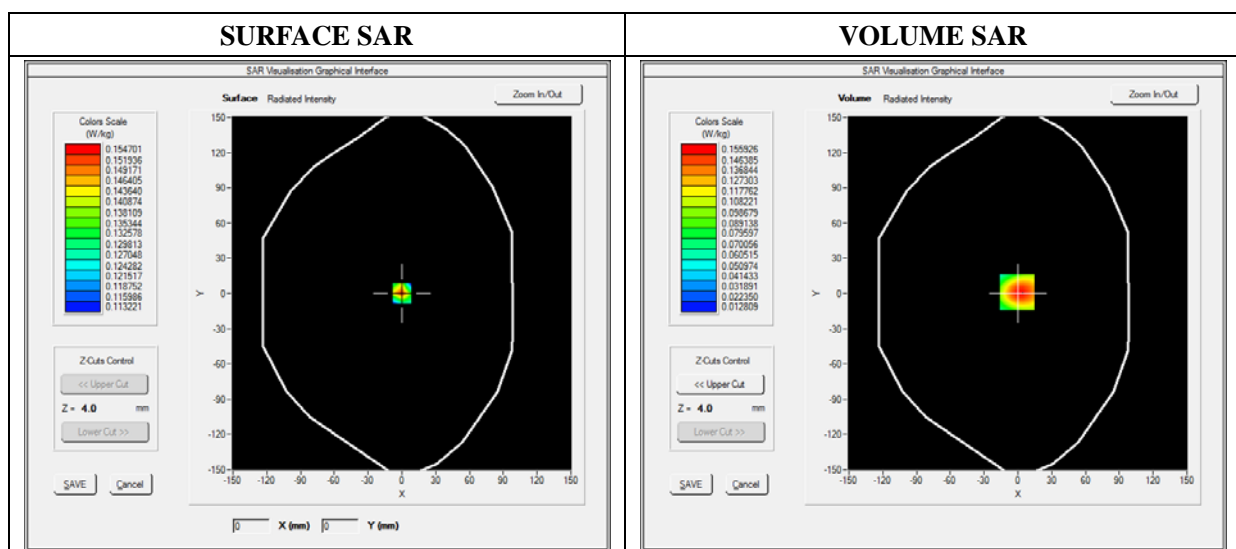

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.087767
SAR 1g (W/Kg)	0.146768

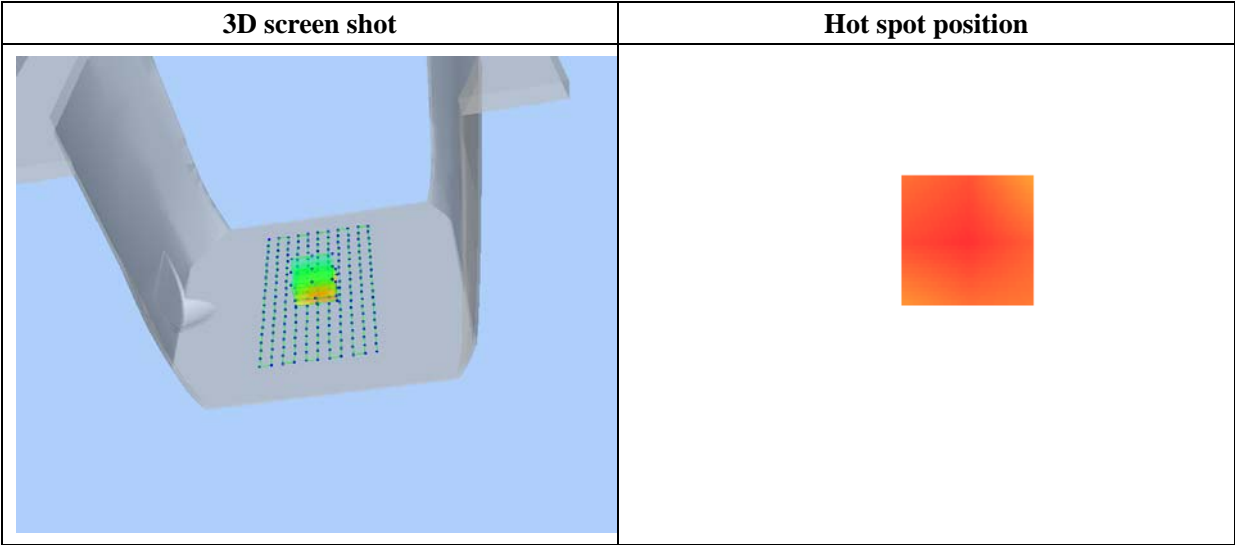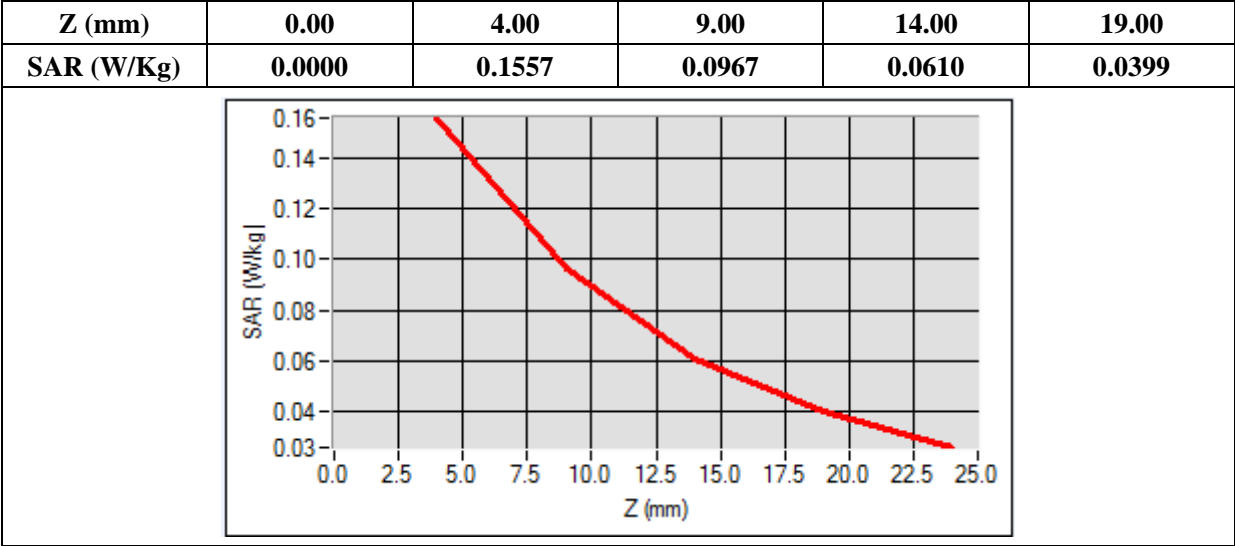

MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

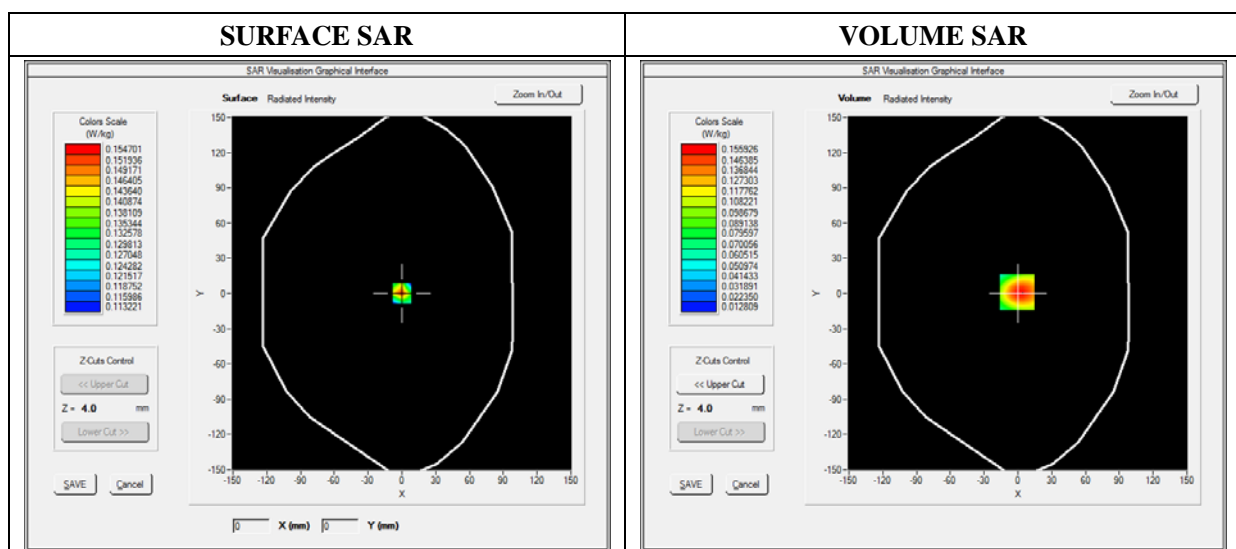

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.079120
SAR 1g (W/Kg)	0.132654

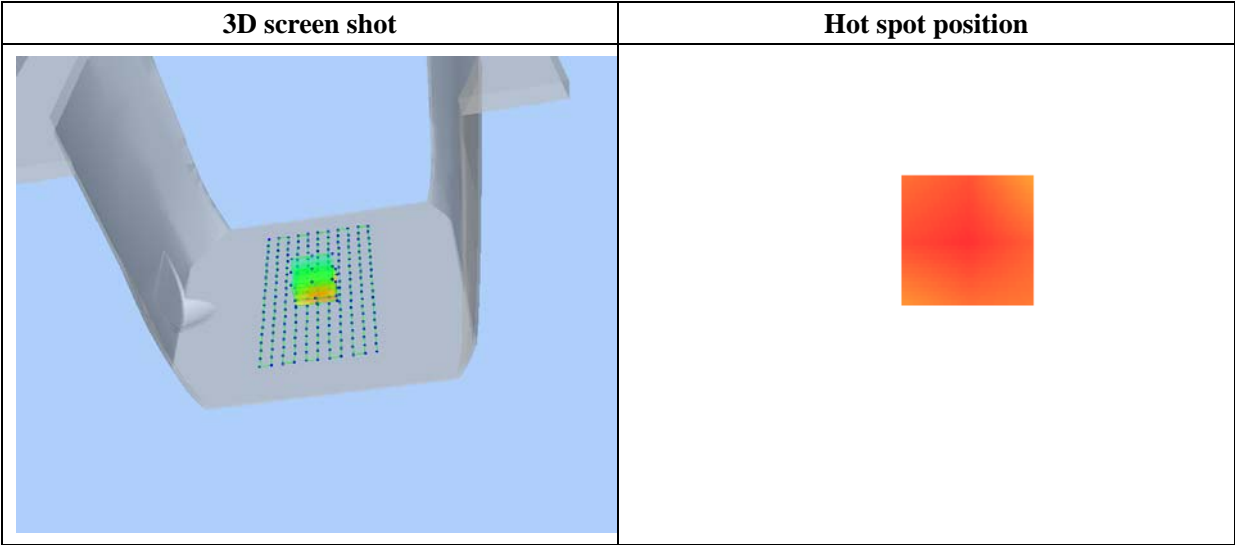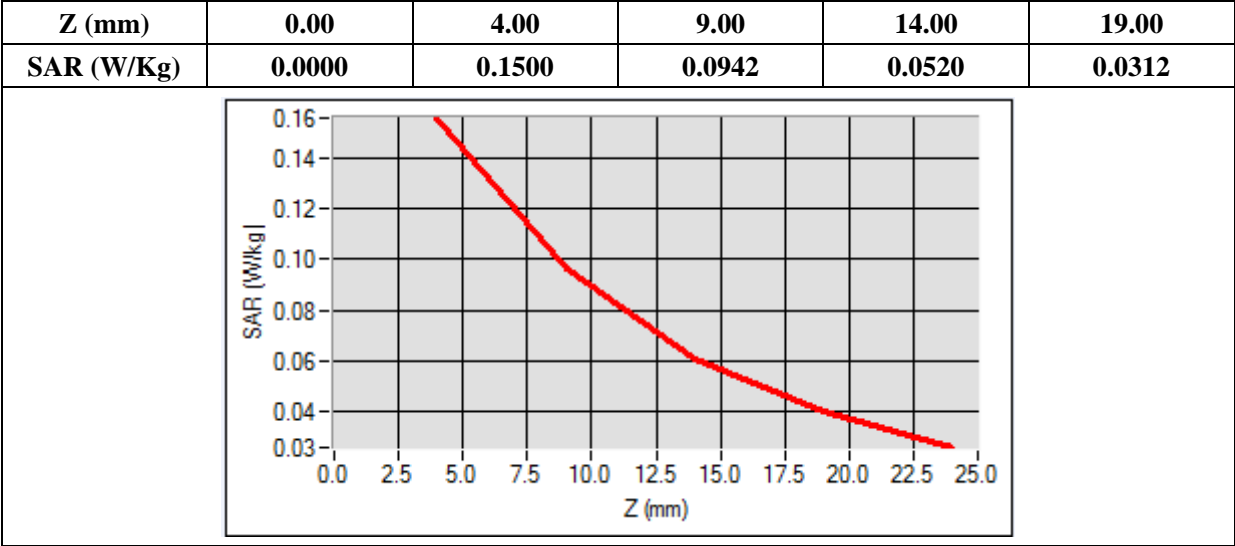

MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

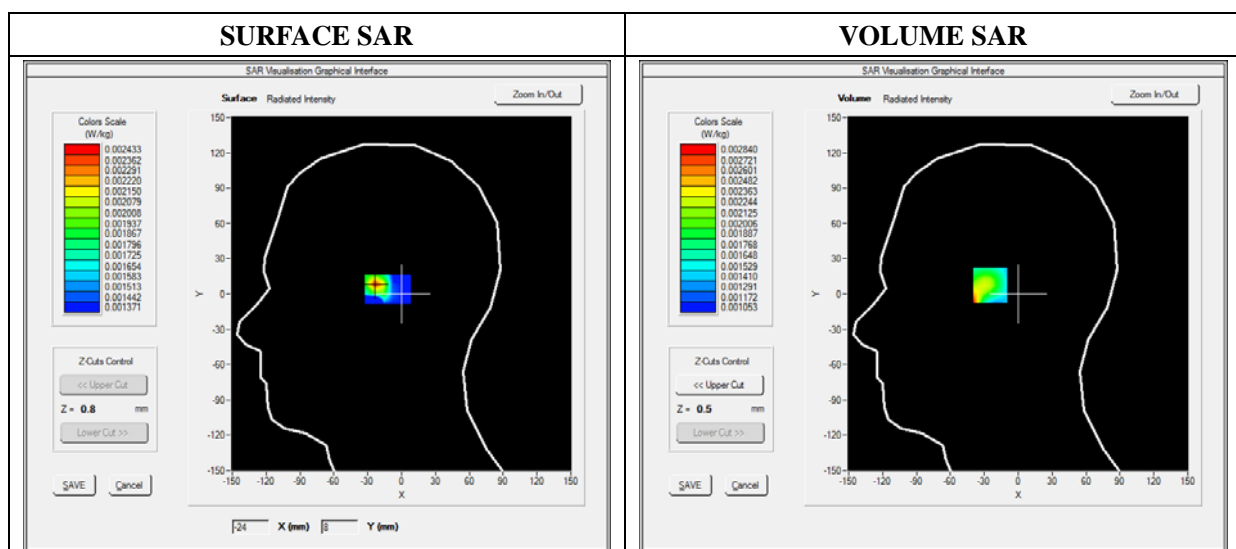

Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.001624
SAR 1g (W/Kg)	0.002208

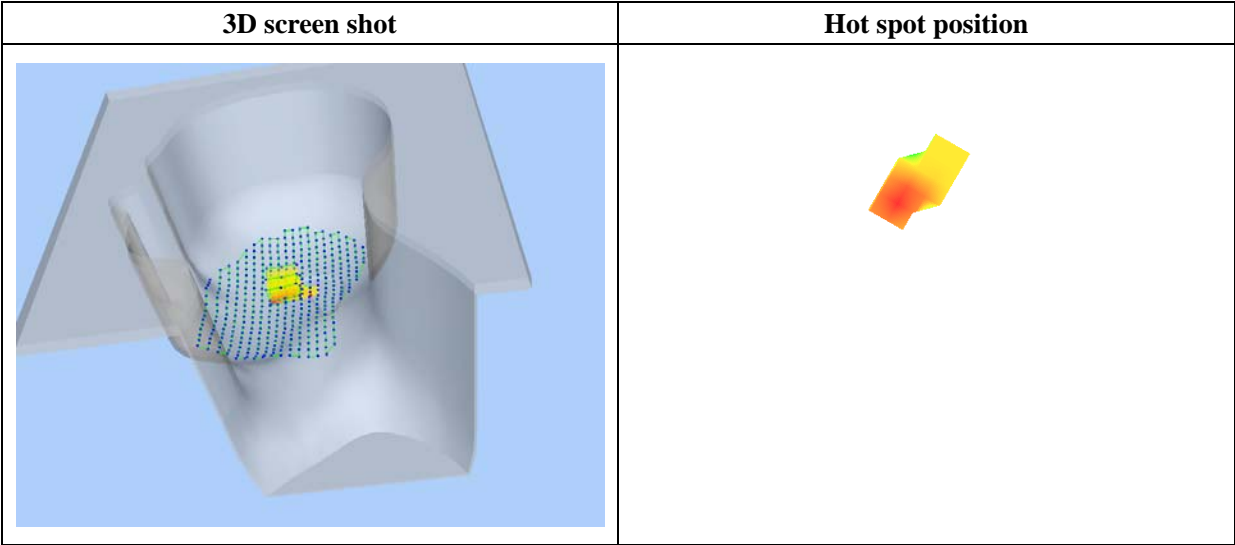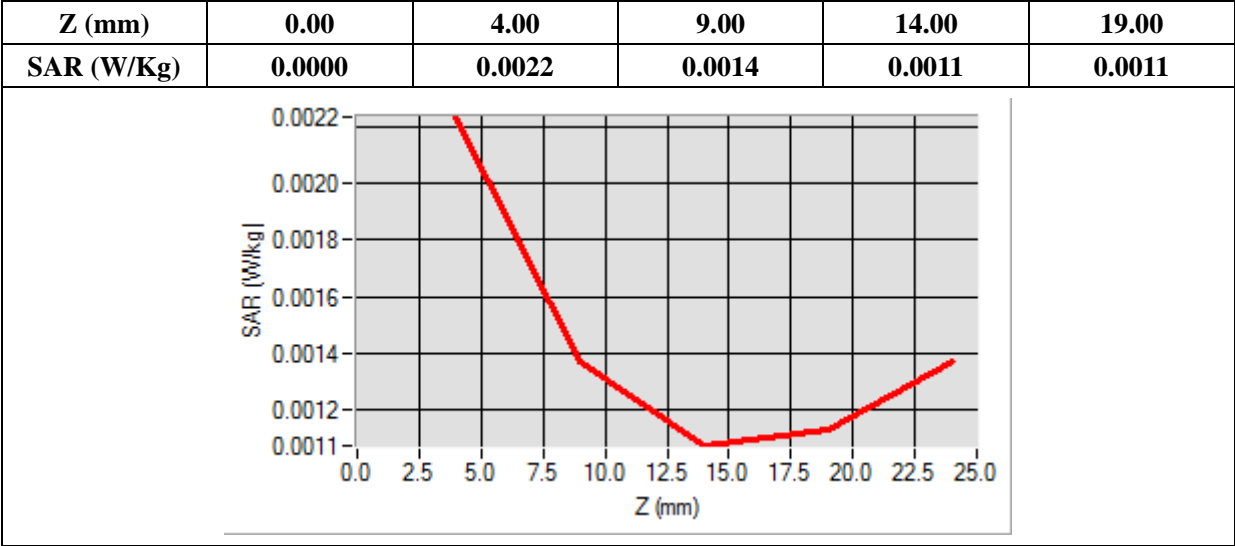

MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

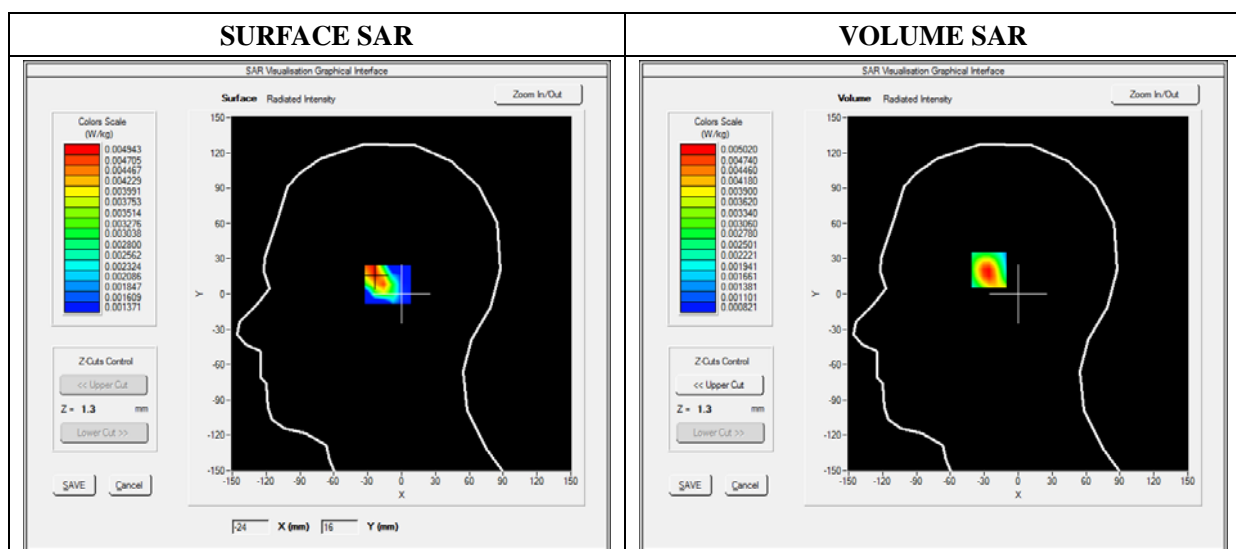

Maximum location: X=-26.00, Y=22.00

SAR 10g (W/Kg)	0.002523
SAR 1g (W/Kg)	0.004807

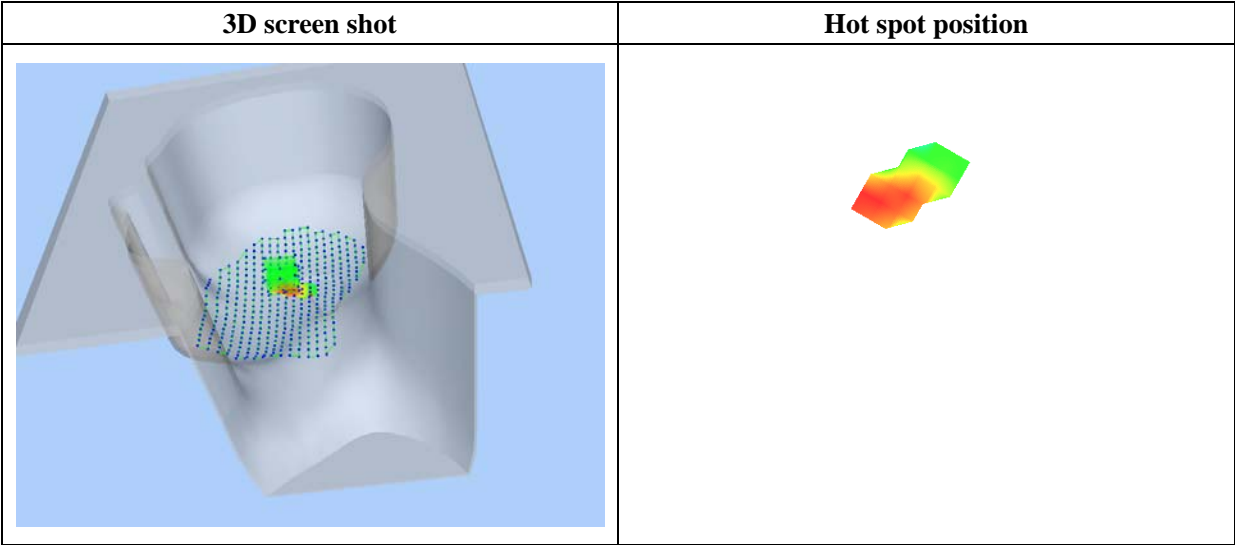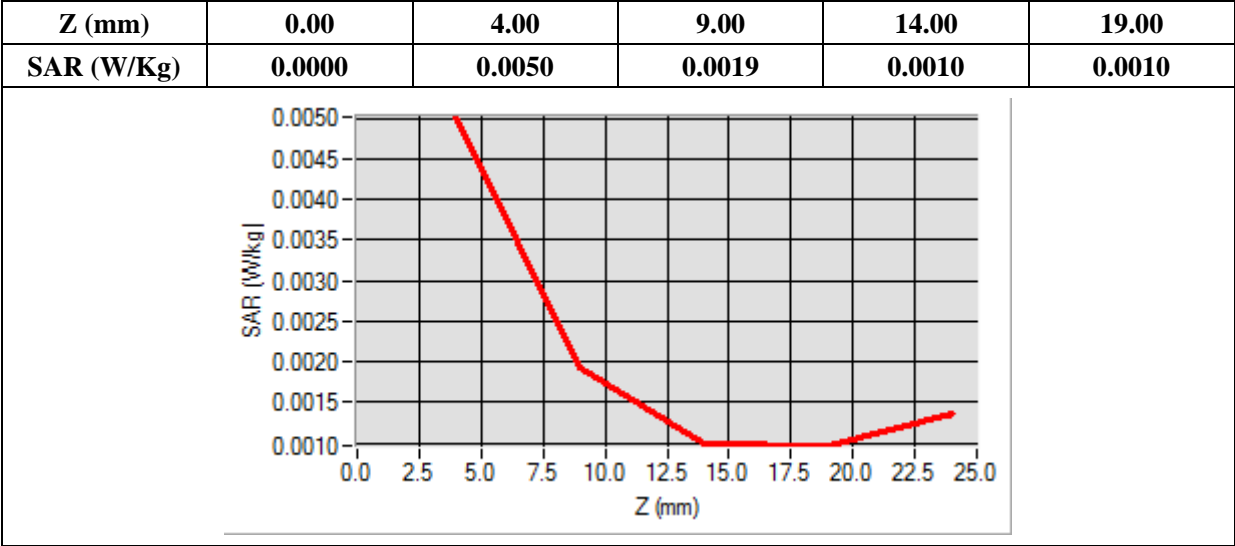

MEASUREMENT 45

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

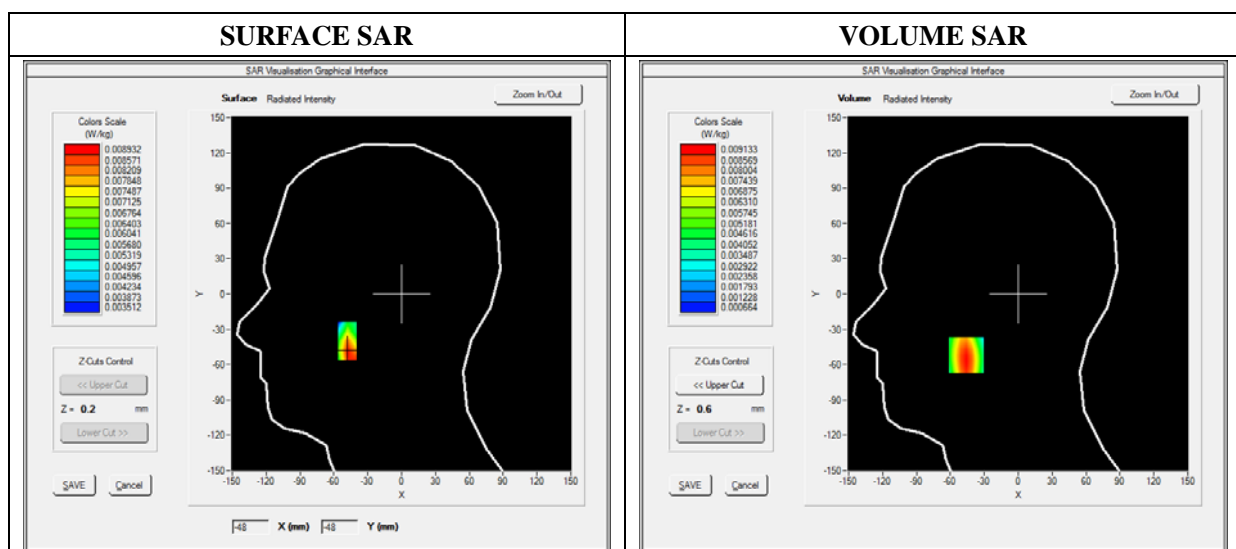

Maximum location: X=-46.00, Y=-52.00

SAR 10g (W/Kg)	0.004364
SAR 1g (W/Kg)	0.008790

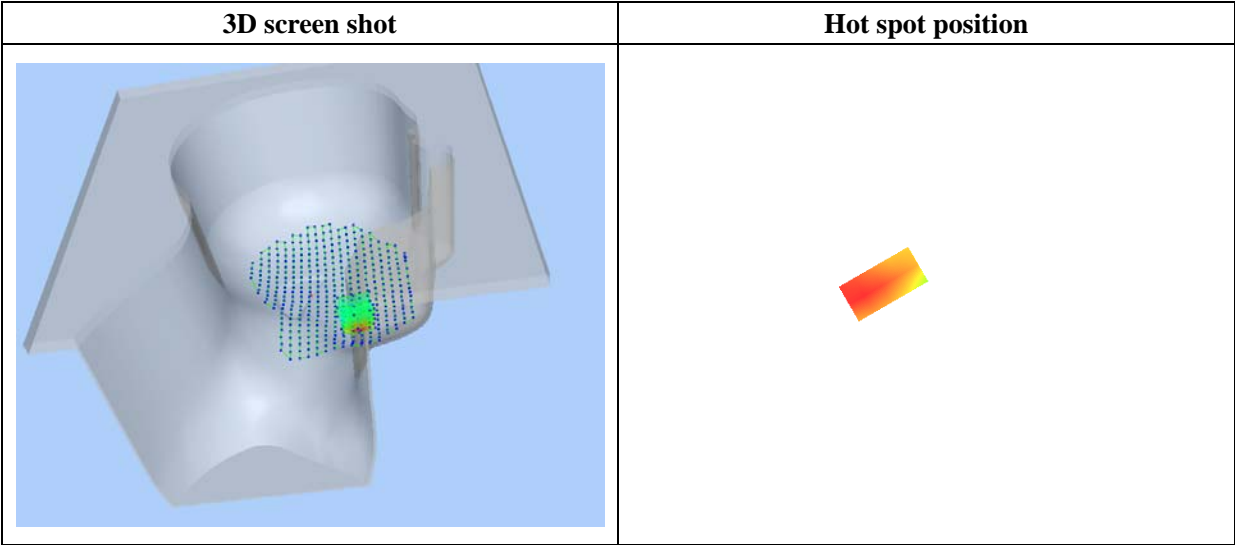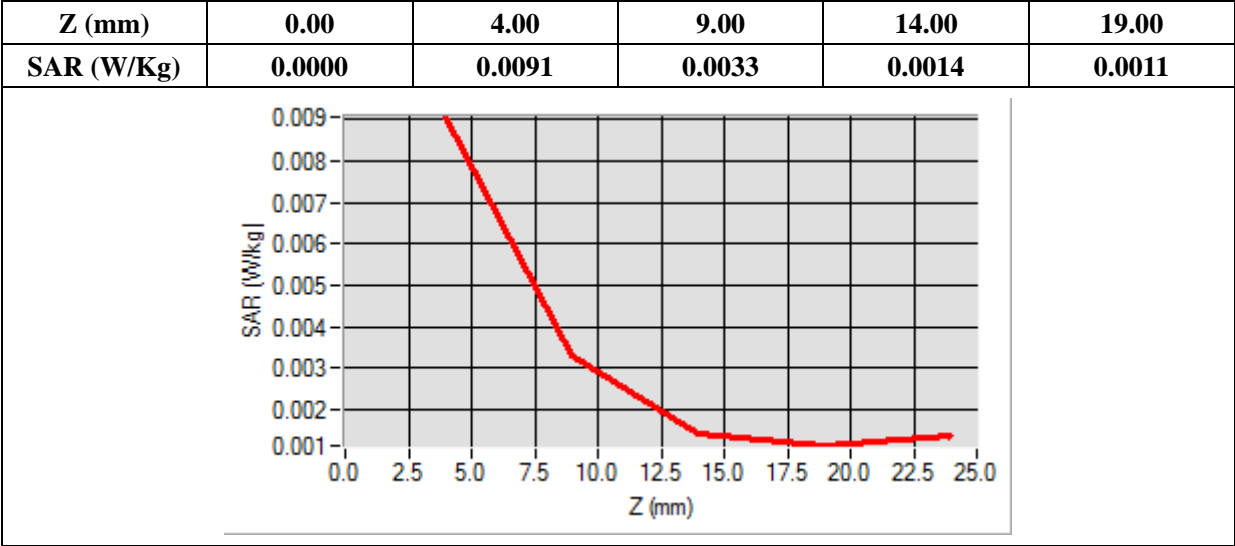

MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

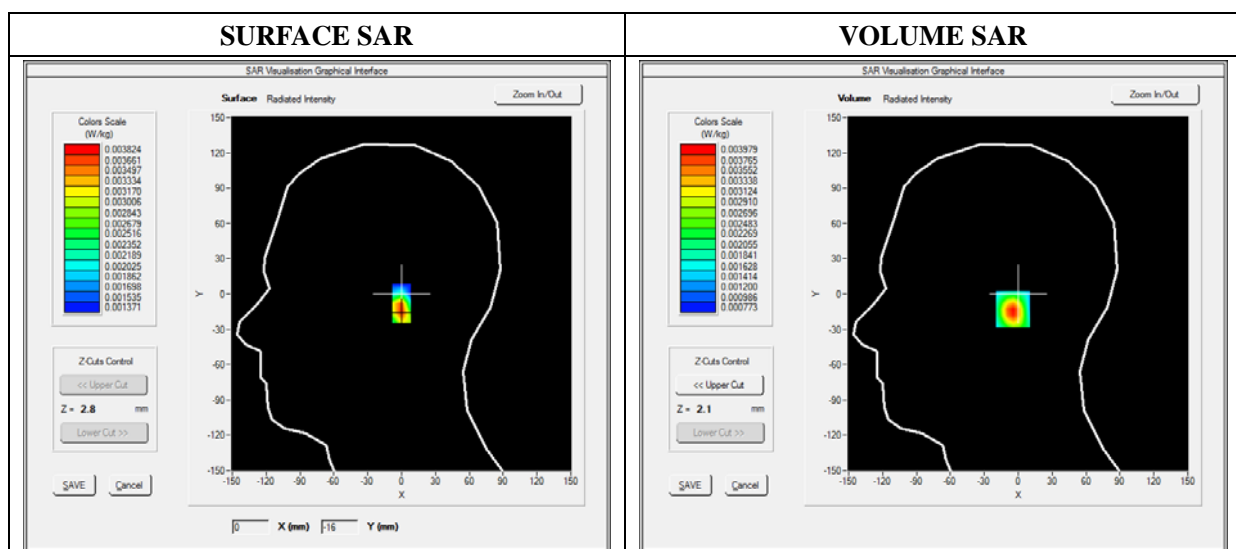

Maximum location: X=-1.00, Y=-13.00

SAR 10g (W/Kg)	0.002064
SAR 1g (W/Kg)	0.003779

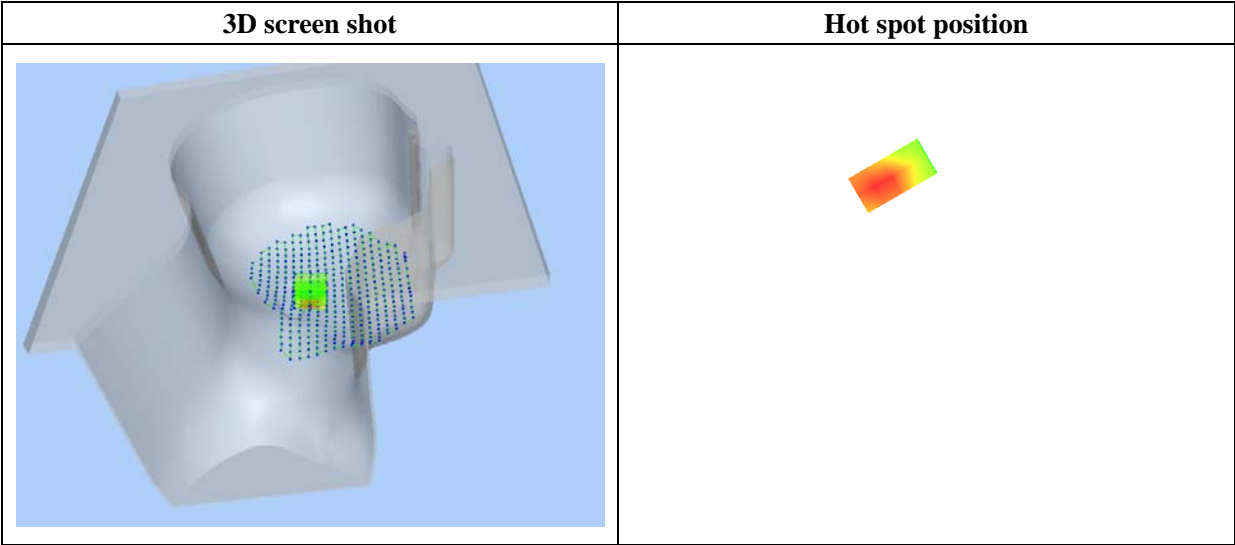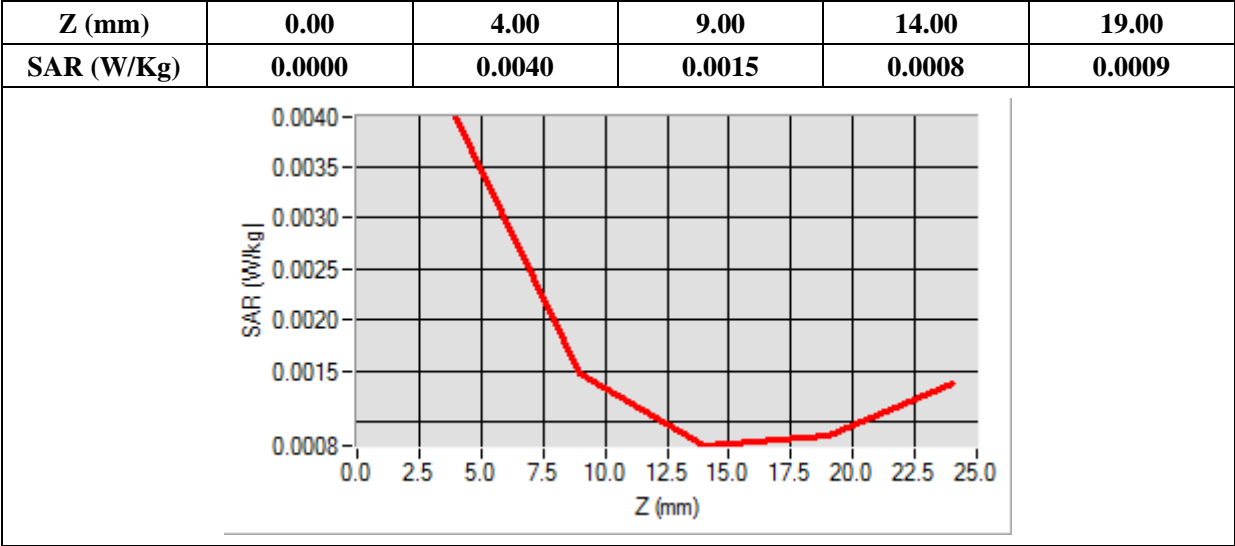

MEASUREMENT 47


Type: Phone measurement (Complete)
Date of measurement: 06/03/2014
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

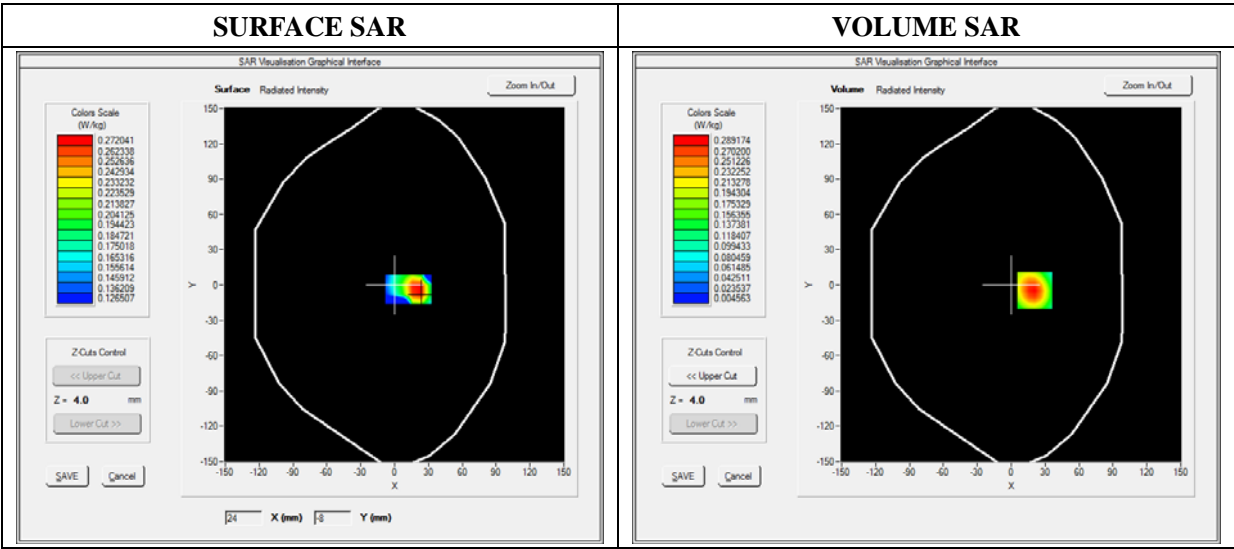

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.079120
SAR 1g (W/Kg)	0.112654

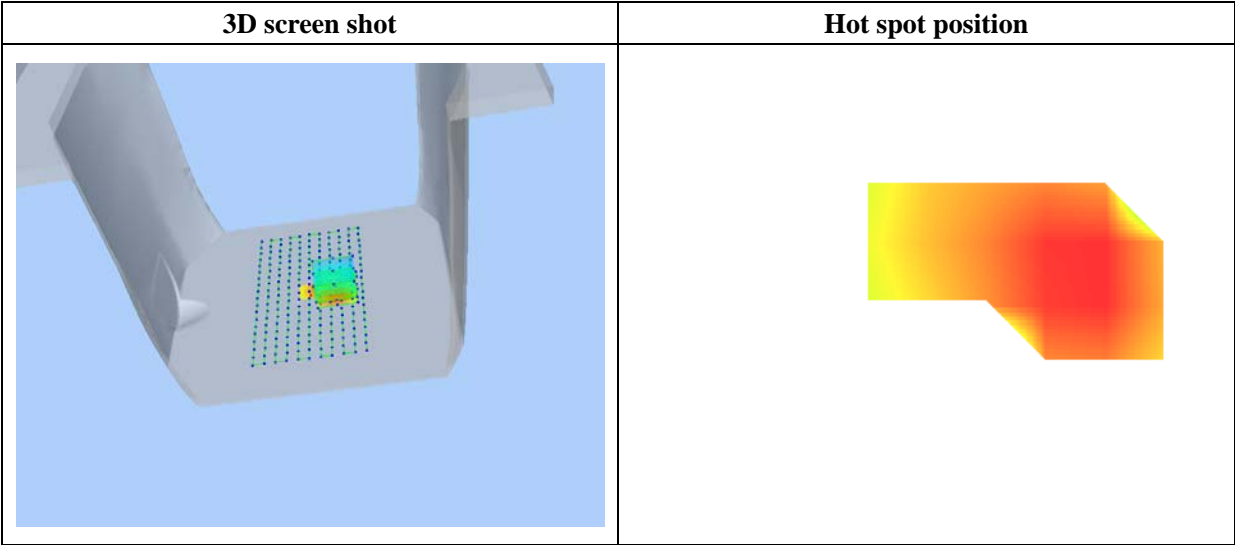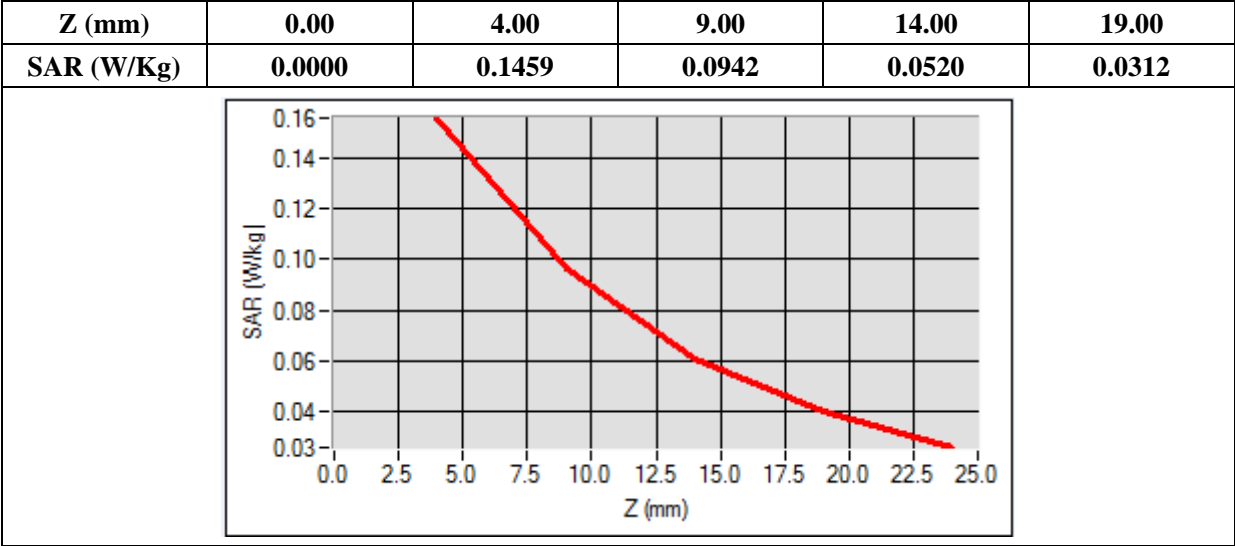

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

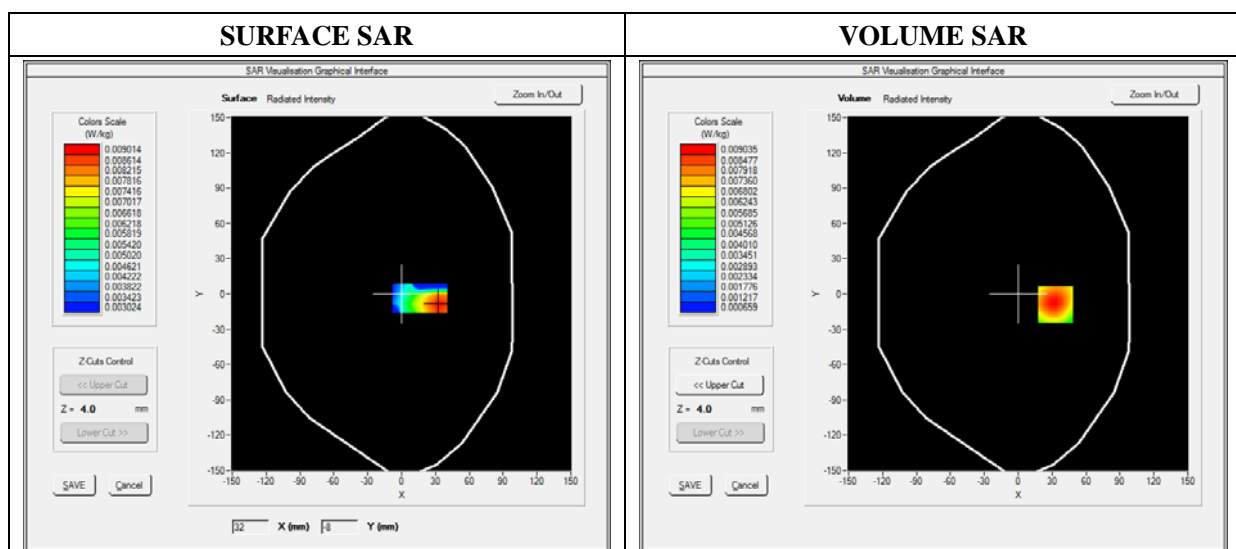

Maximum location: X=-10.00, Y=10.00

SAR 10g (W/Kg)	0.040672
SAR 1g (W/Kg)	0.076546

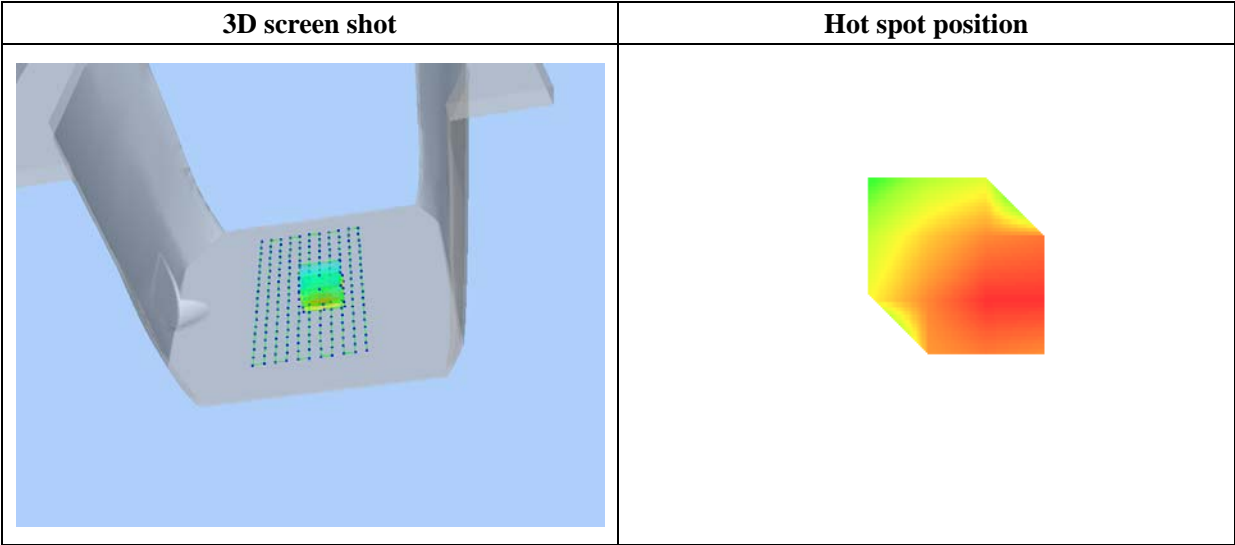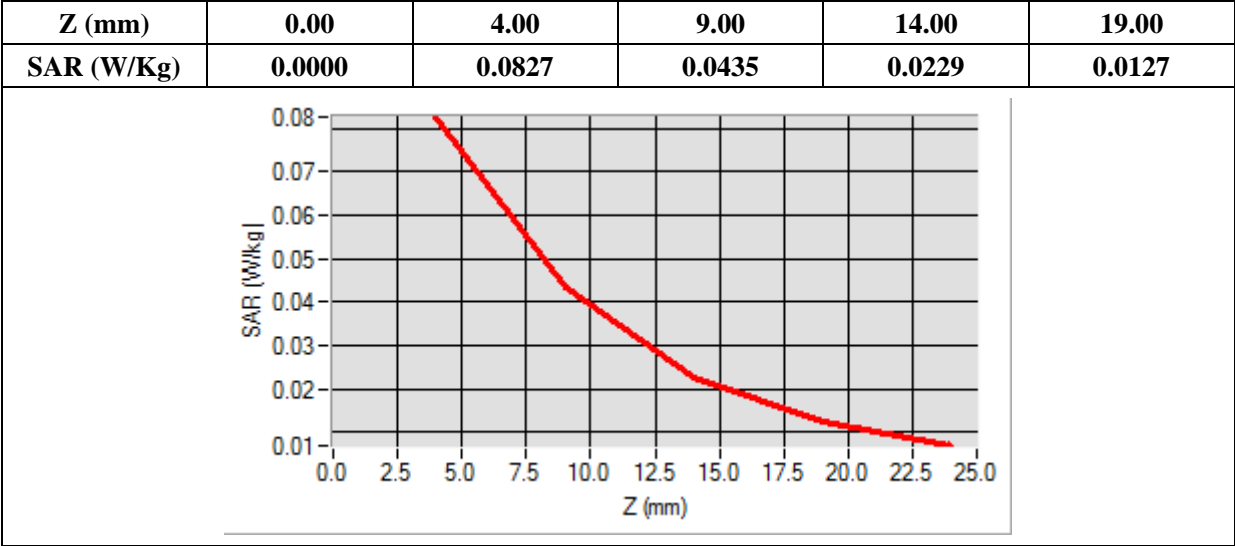

MEASUREMENT 50

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

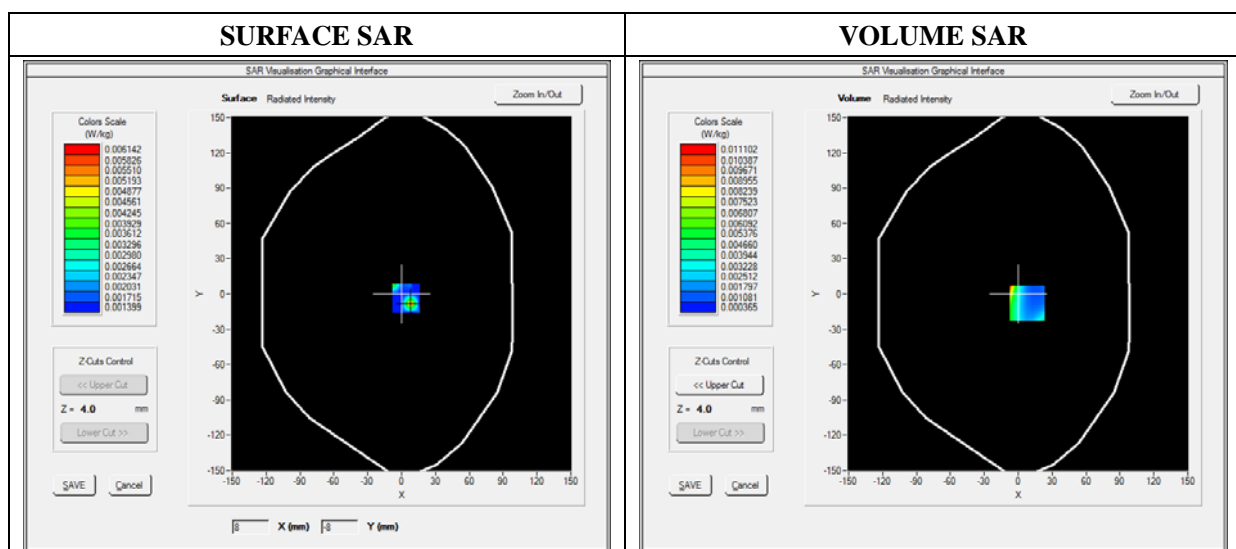

Maximum location: X=8.00, Y=-8.00

SAR 10g (W/Kg)	0.005425
SAR 1g (W/Kg)	0.006565

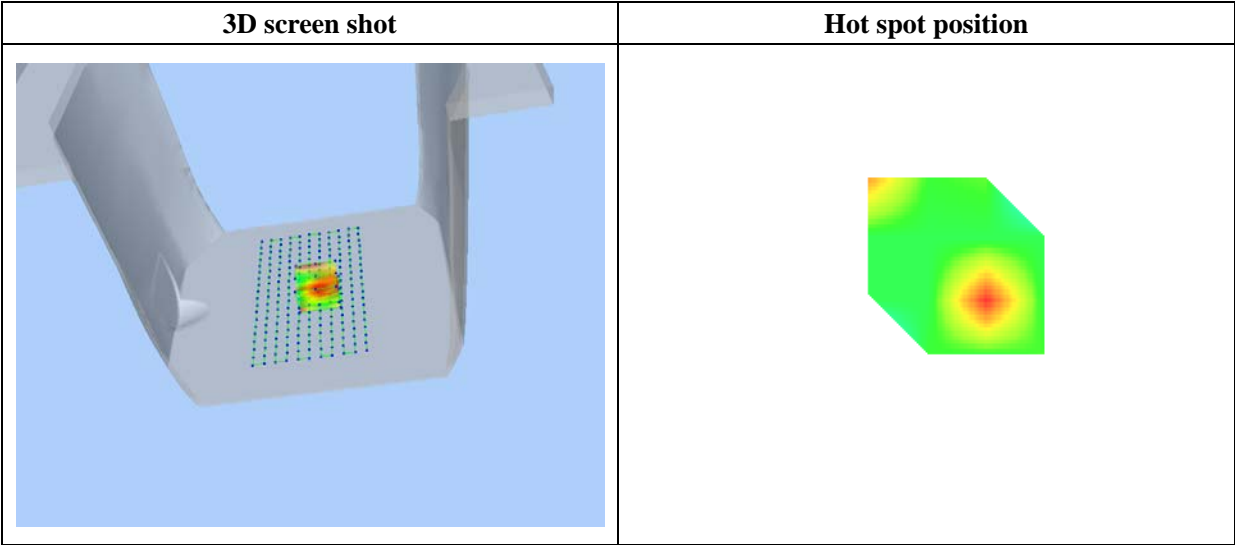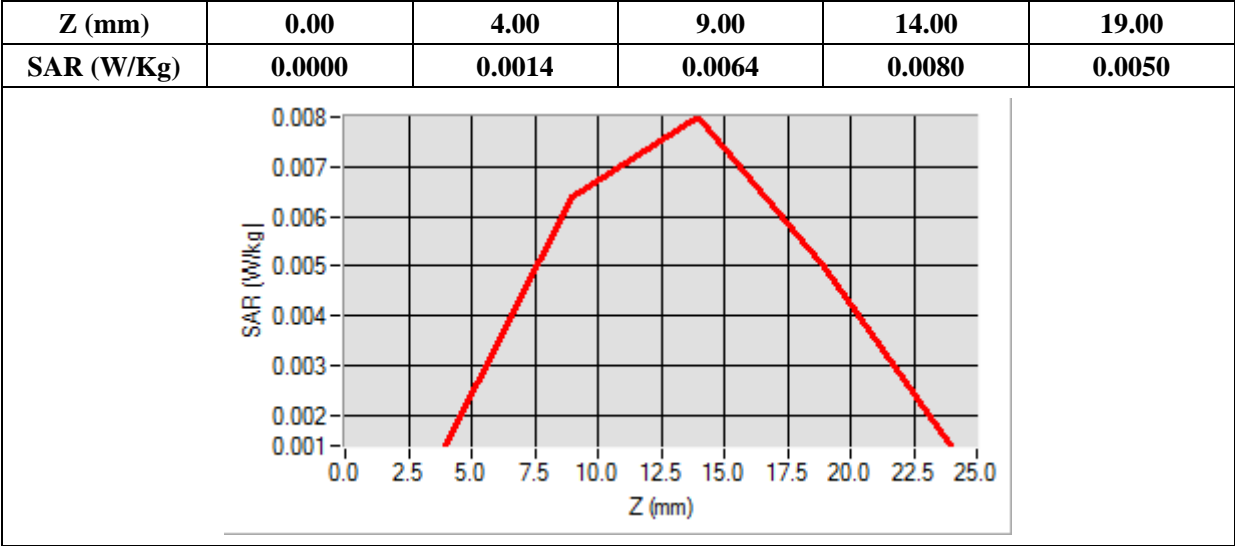

MEASUREMENT 51

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

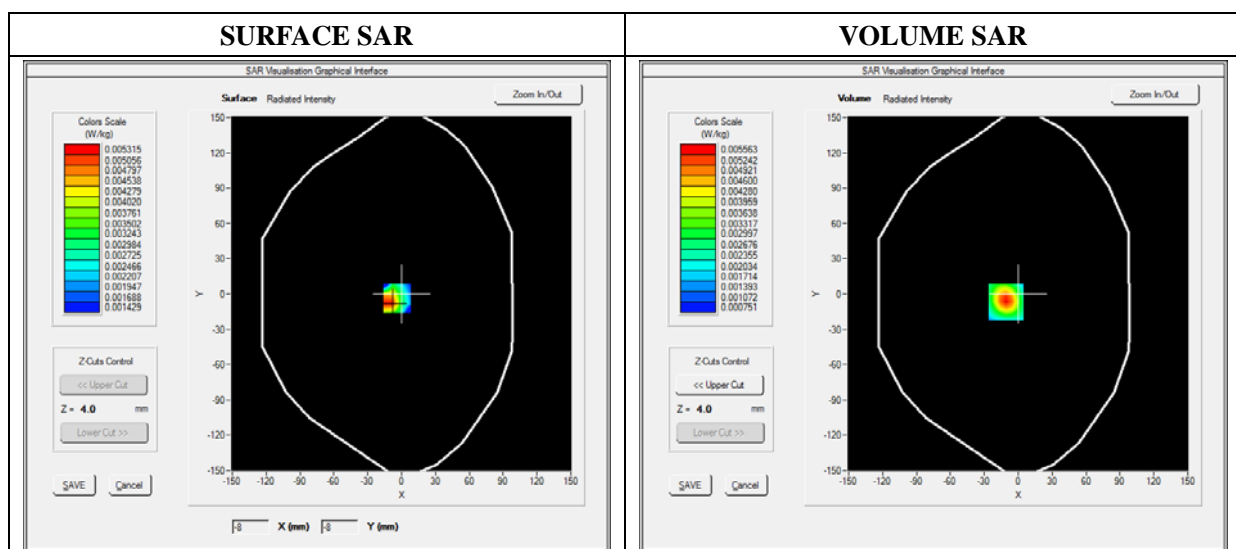

Maximum location: X=-11.00, Y=-7.00

SAR 10g (W/Kg)	0.002593
SAR 1g (W/Kg)	0.005331

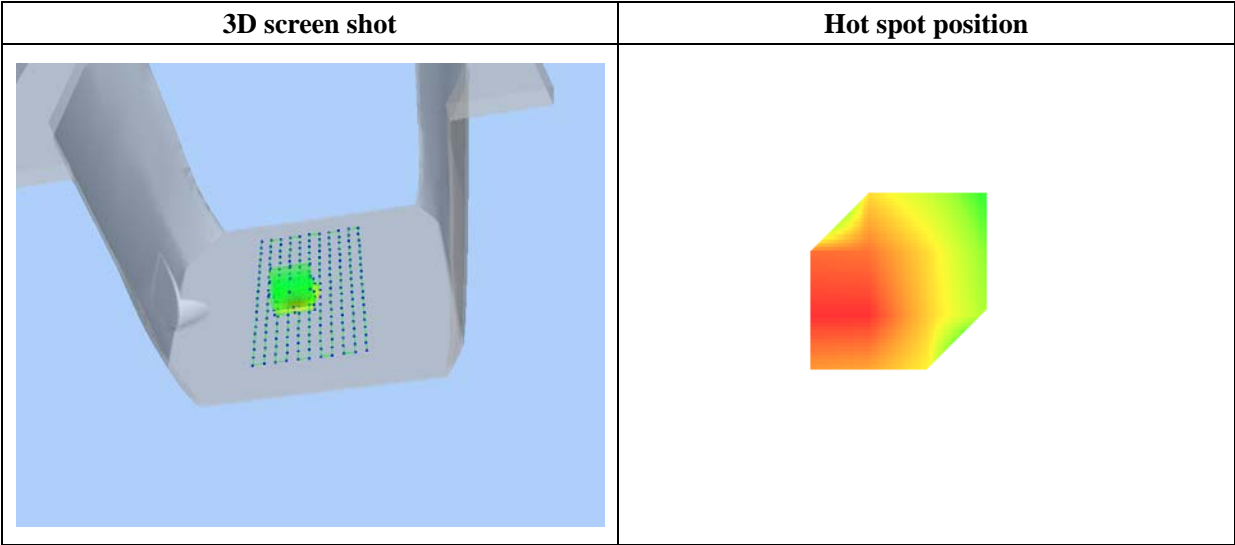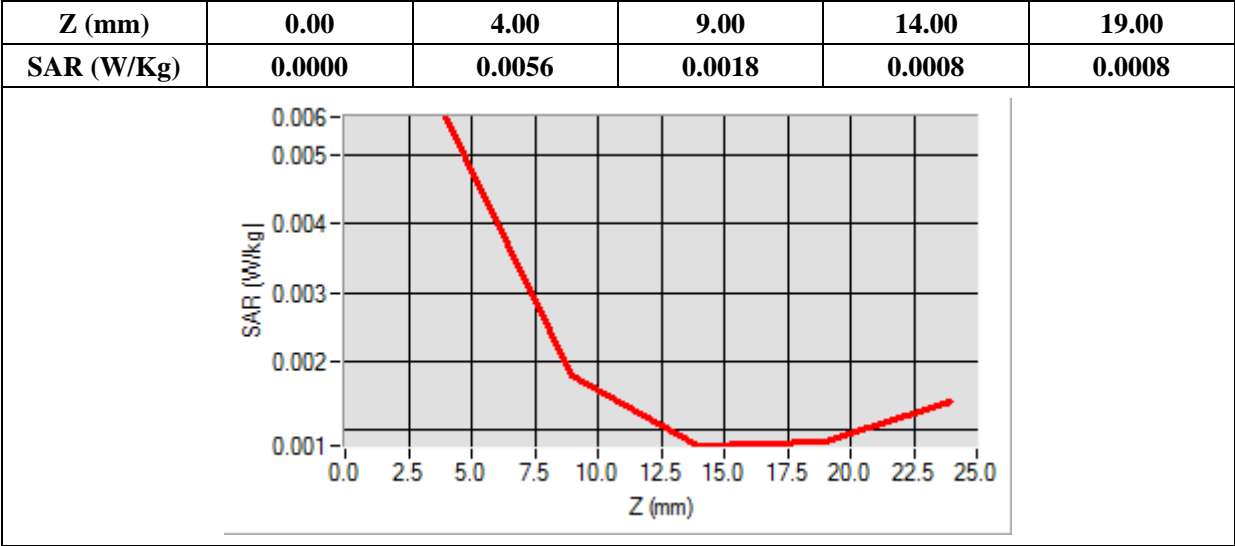

MEASUREMENT 52

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.5; Calibrated: 2012/11/26

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)



B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

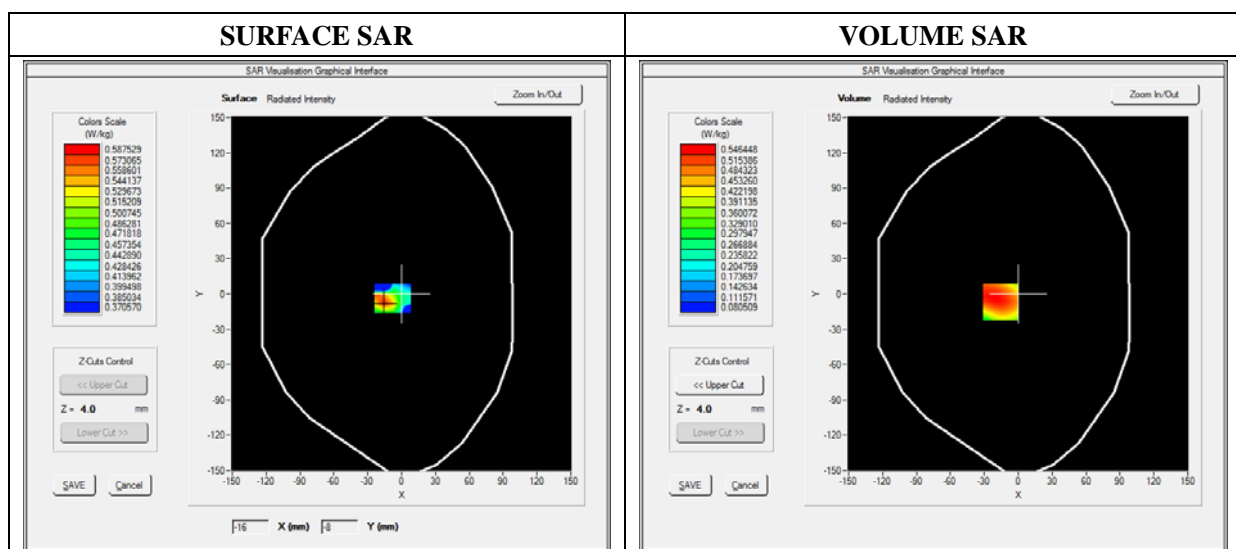

Maximum location: X=-16.00, Y=-7.00

SAR 10g (W/Kg)	0.356532
SAR 1g (W/Kg)	0.530660

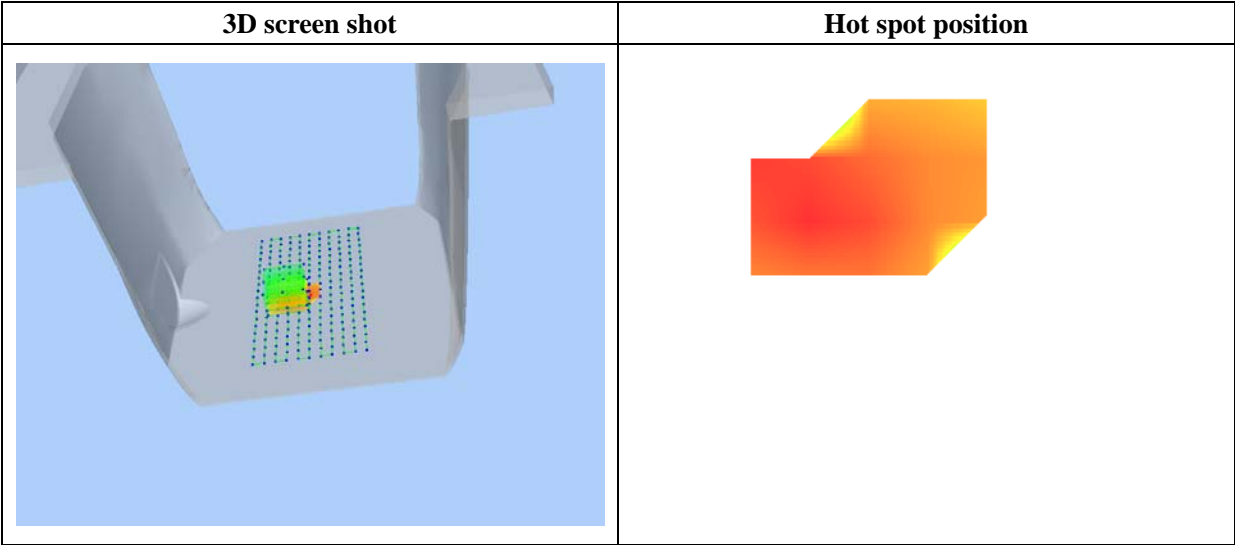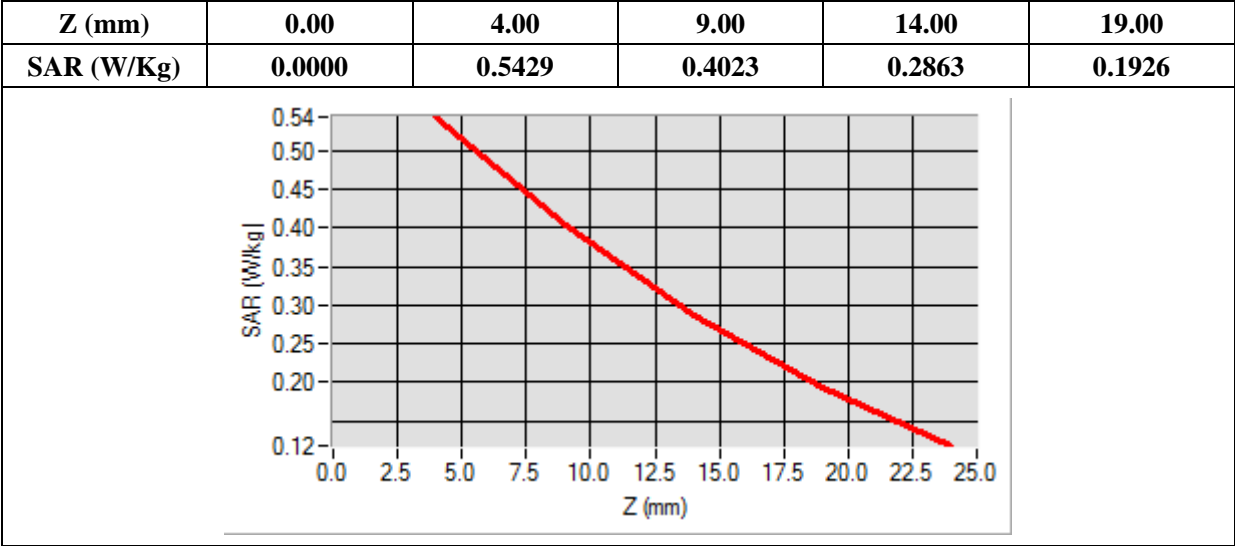

MEASUREMENT 53

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.5; Calibrated: 2012/11/26

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)



B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

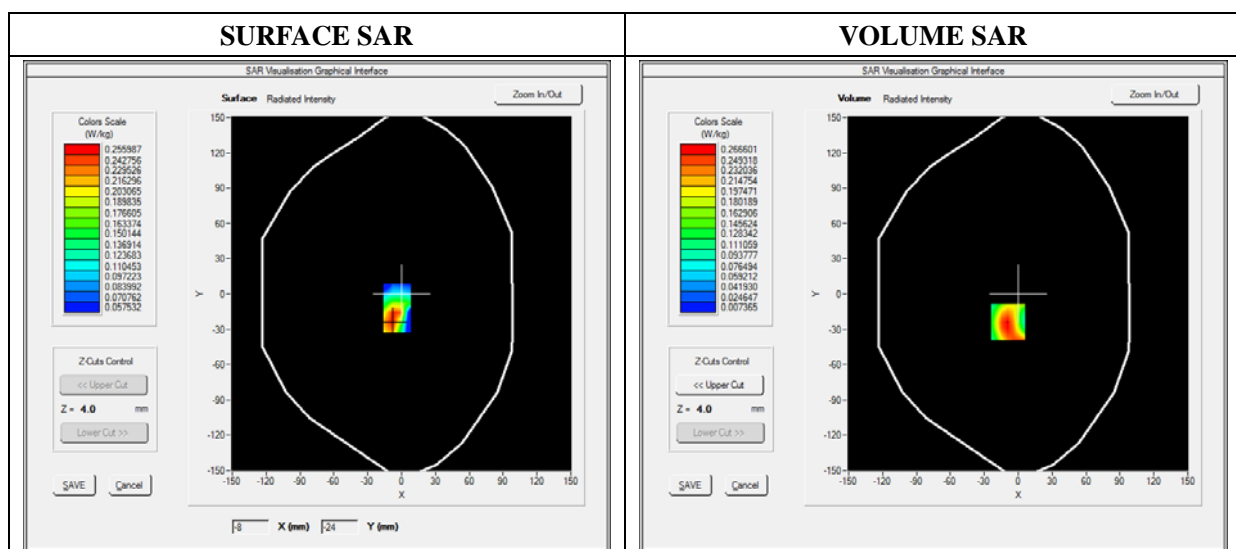

Maximum location: X=-9.00, Y=-24.00

SAR 10g (W/Kg)	0.132279
SAR 1g (W/Kg)	0.238901

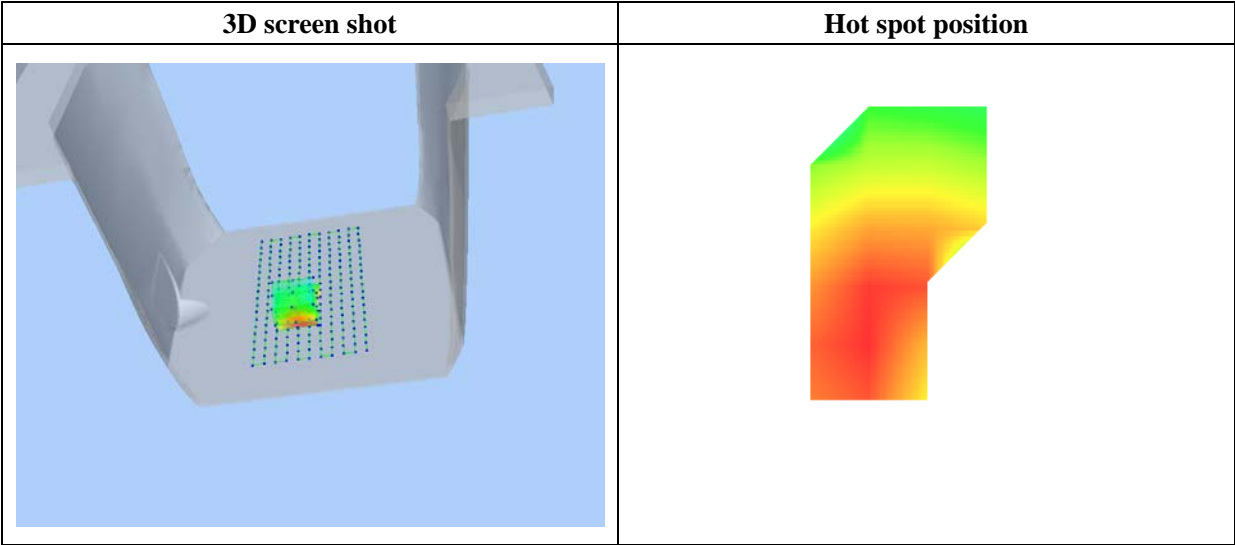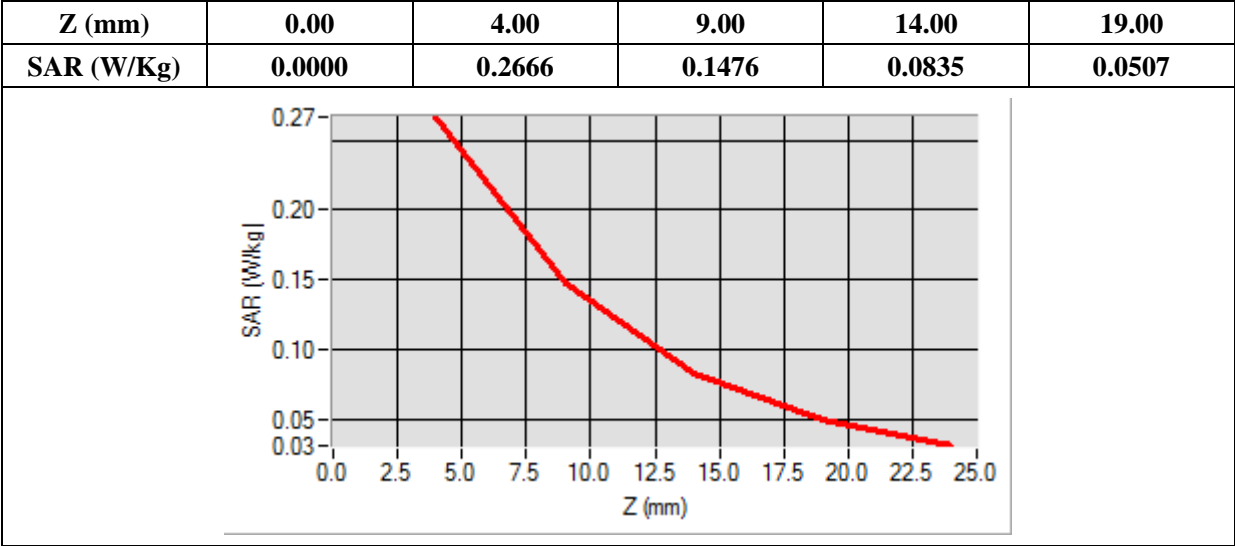

MEASUREMENT 54

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)



B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

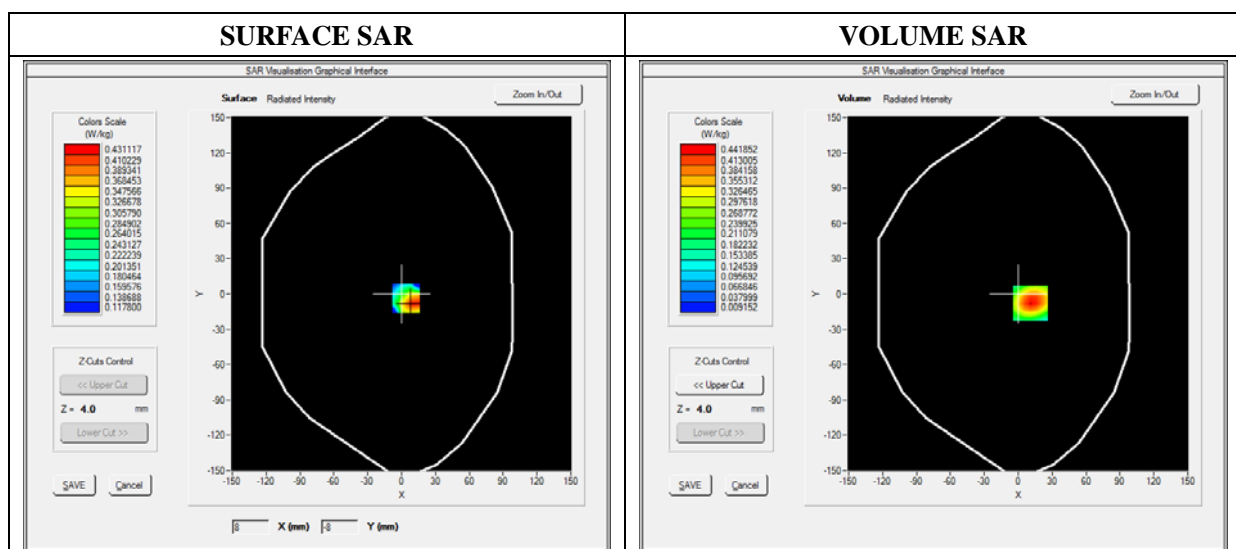

Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.212571
SAR 1g (W/Kg)	0.410798

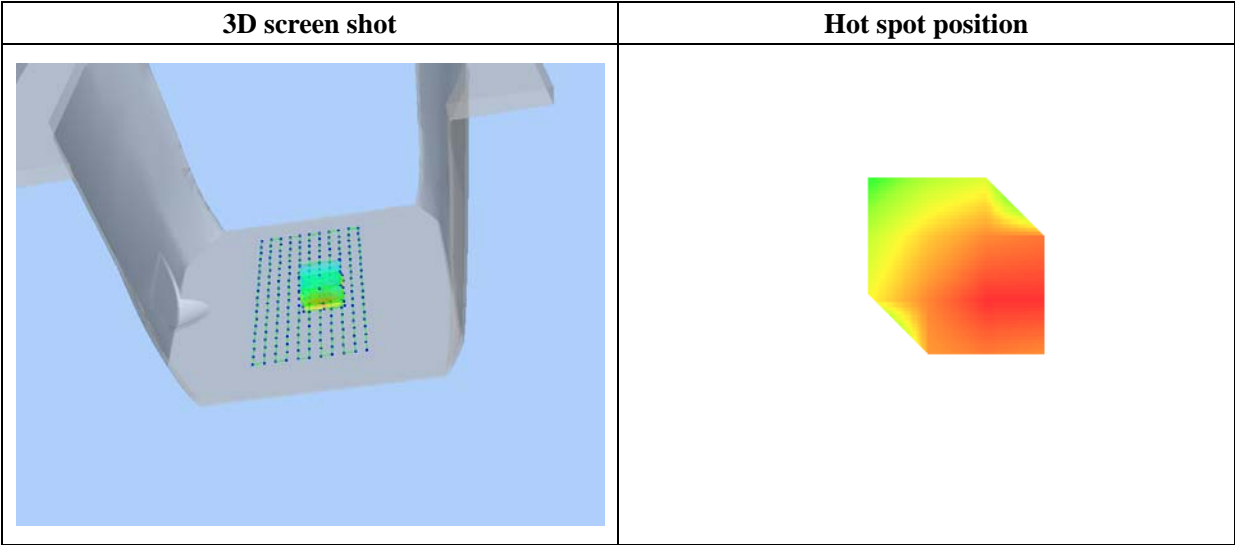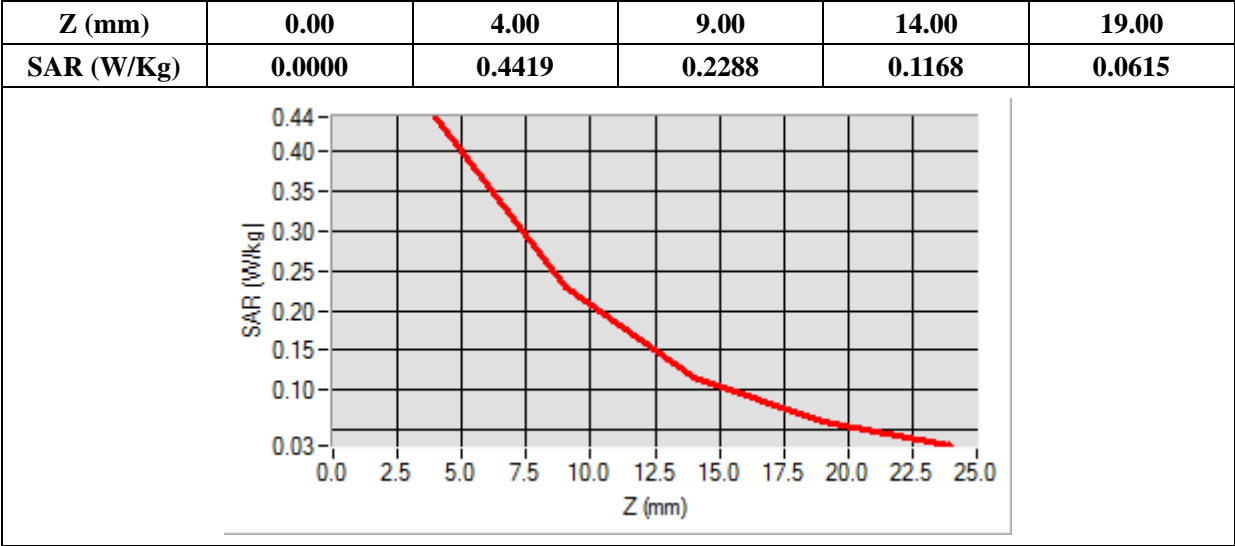

MEASUREMENT 55

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)



B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

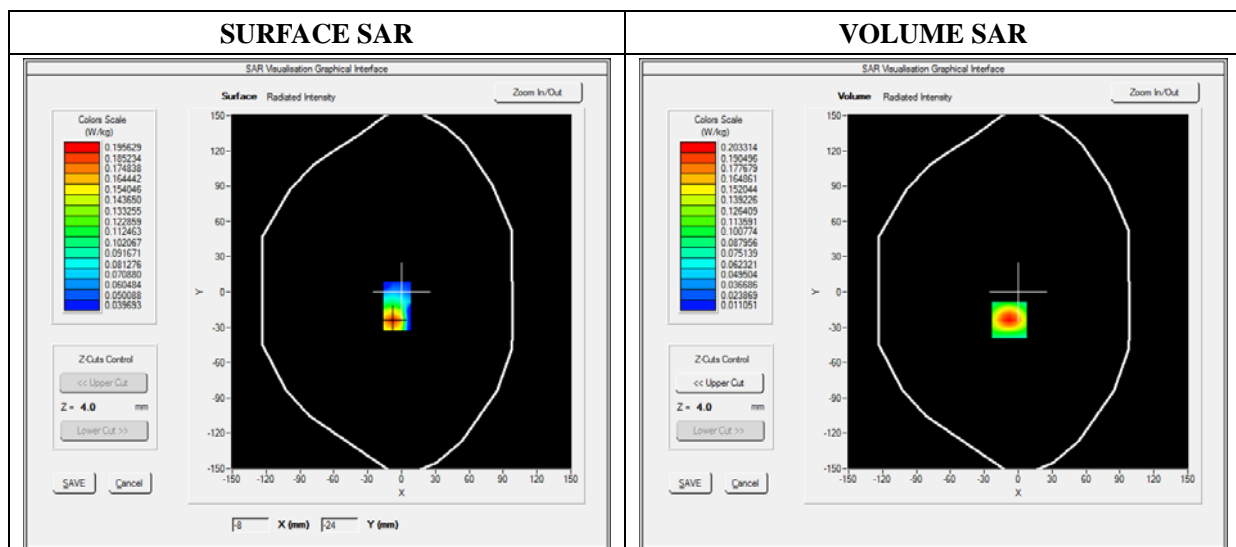

Maximum location: X=-8.00, Y=-24.00

SAR 10g (W/Kg)	0.106164
SAR 1g (W/Kg)	0.185920

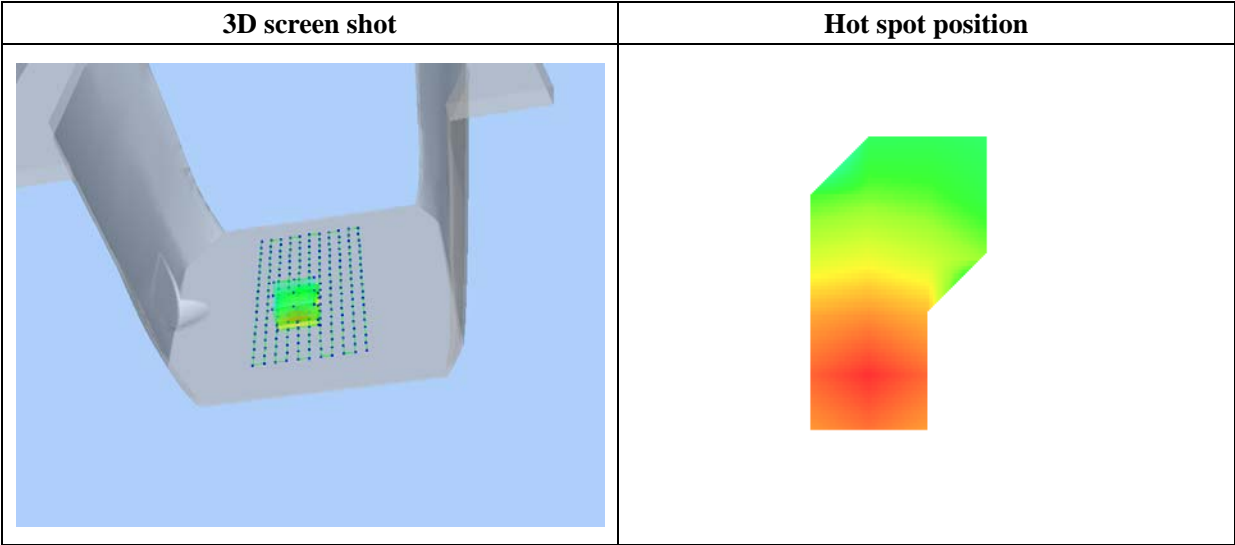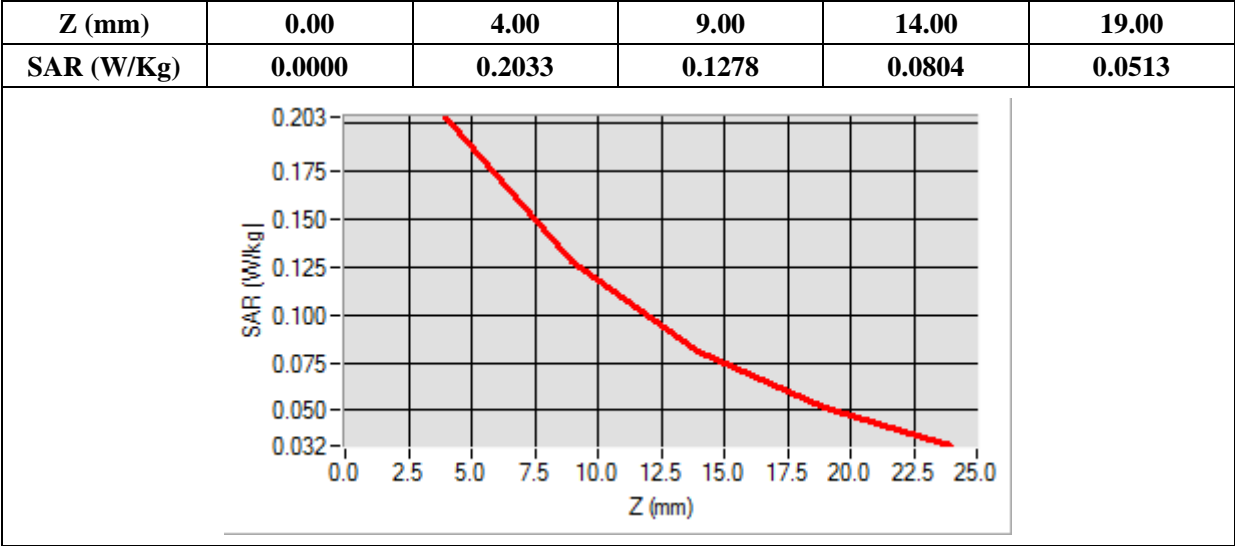

MEASUREMENT 56

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

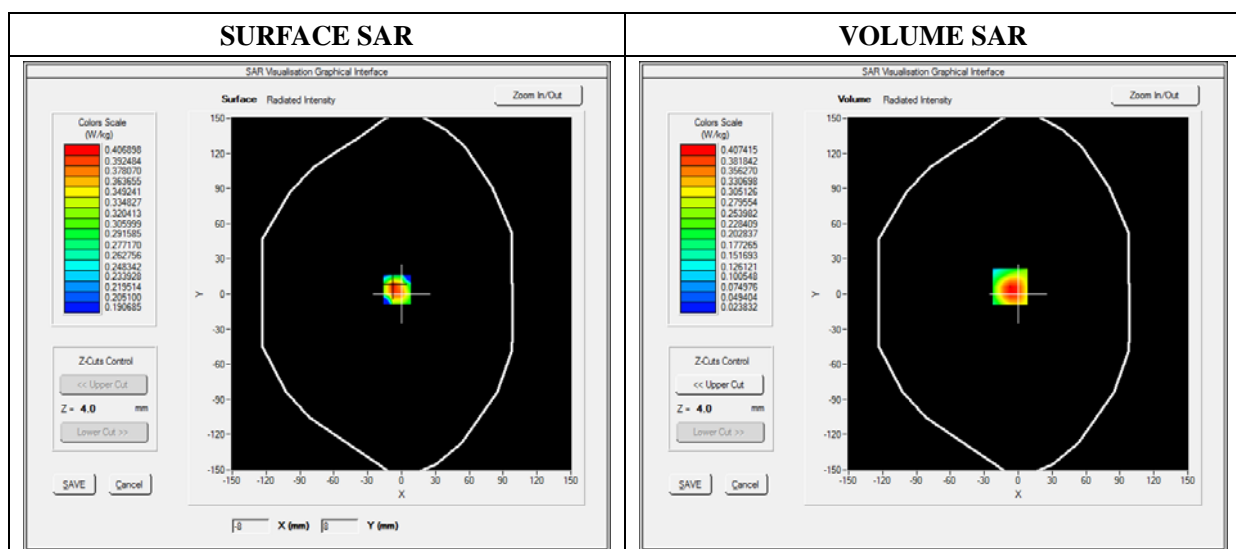

Maximum location: X=2.00, Y=-16.00

SAR 10g (W/Kg)	0.225476
SAR 1g (W/Kg)	0.384365

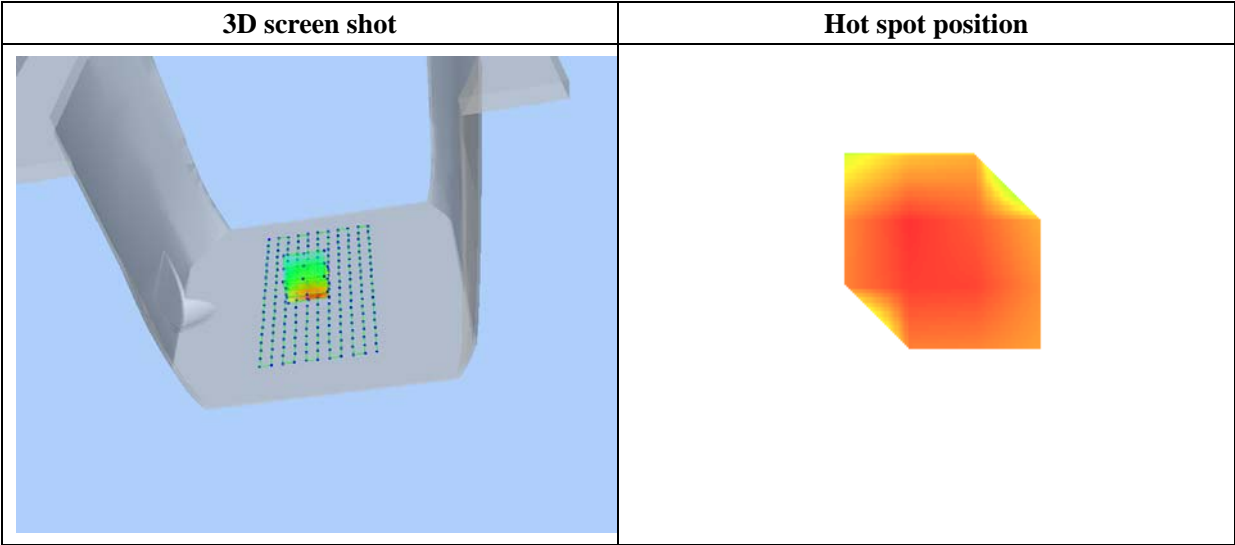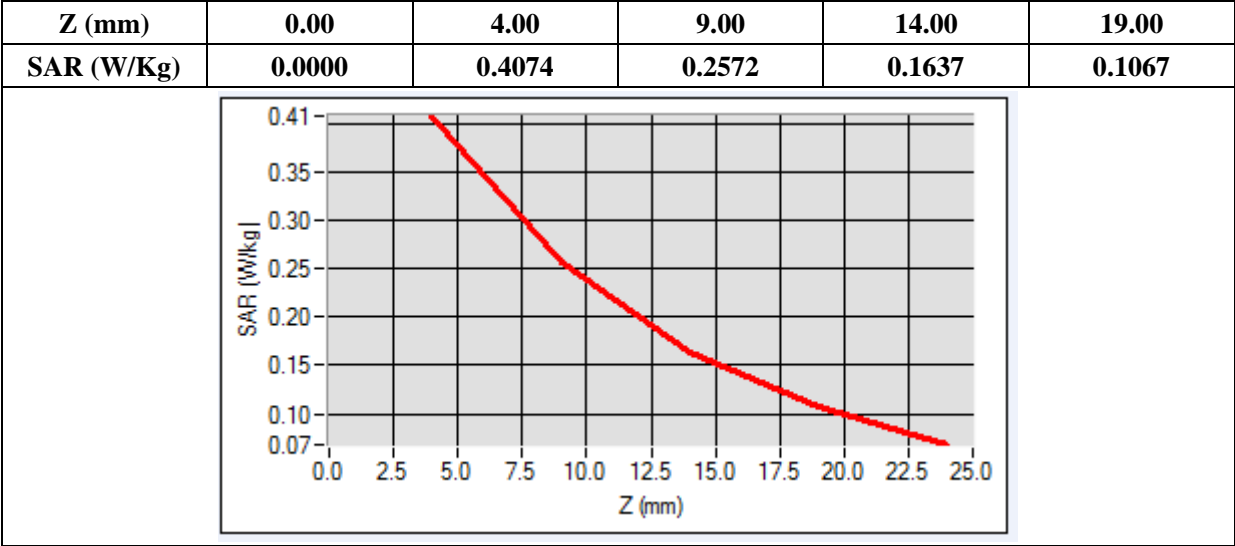

MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

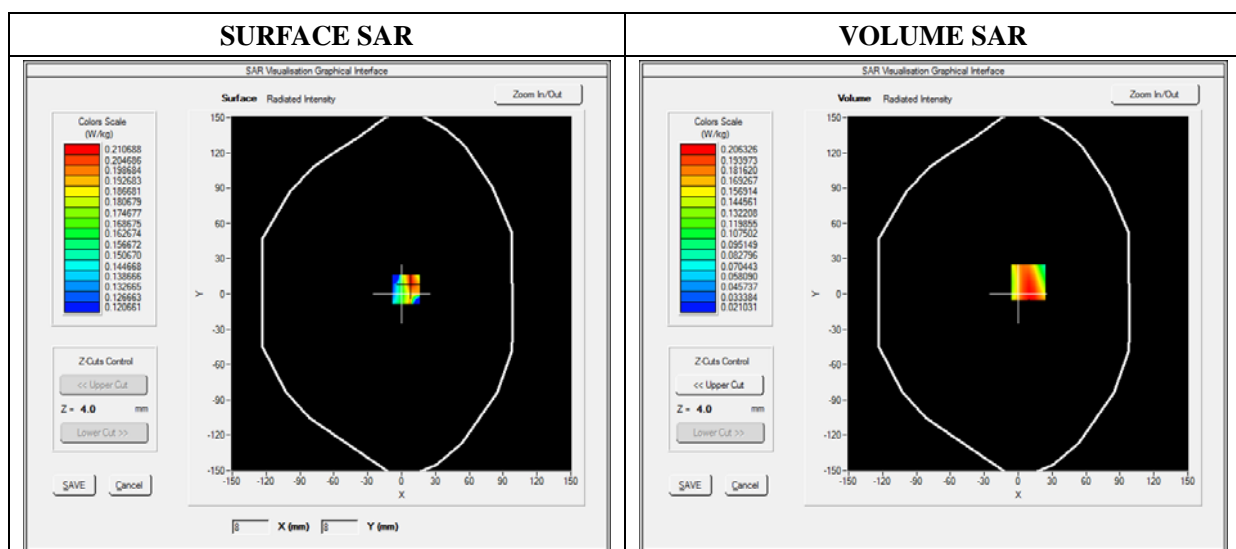

Maximum location: X=9.00, Y=10.00

SAR 10g (W/Kg)	0.136156
SAR 1g (W/Kg)	0.196825

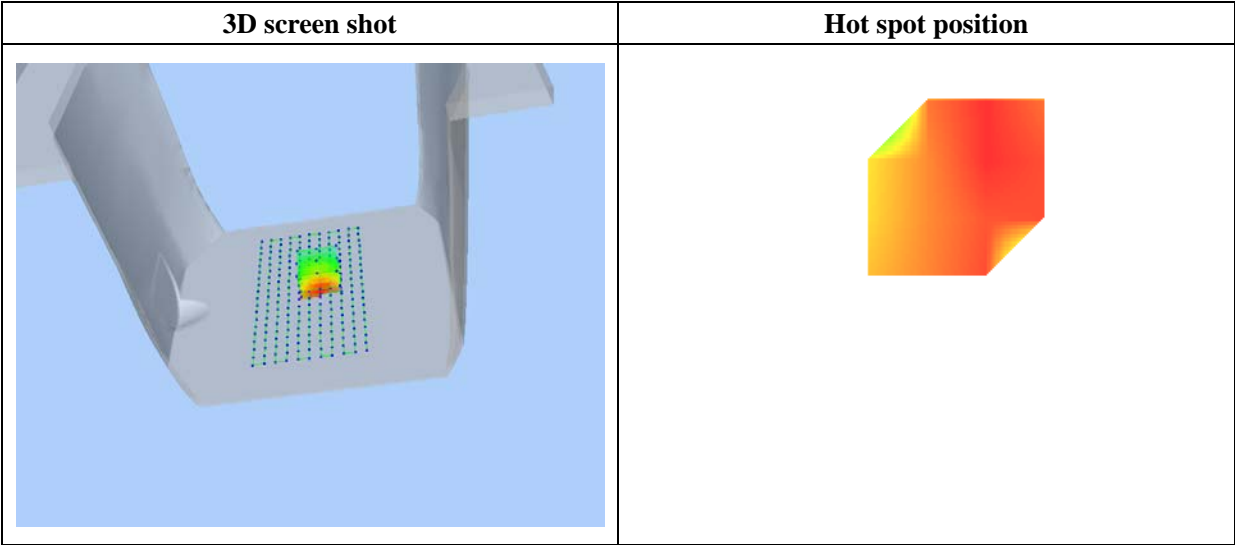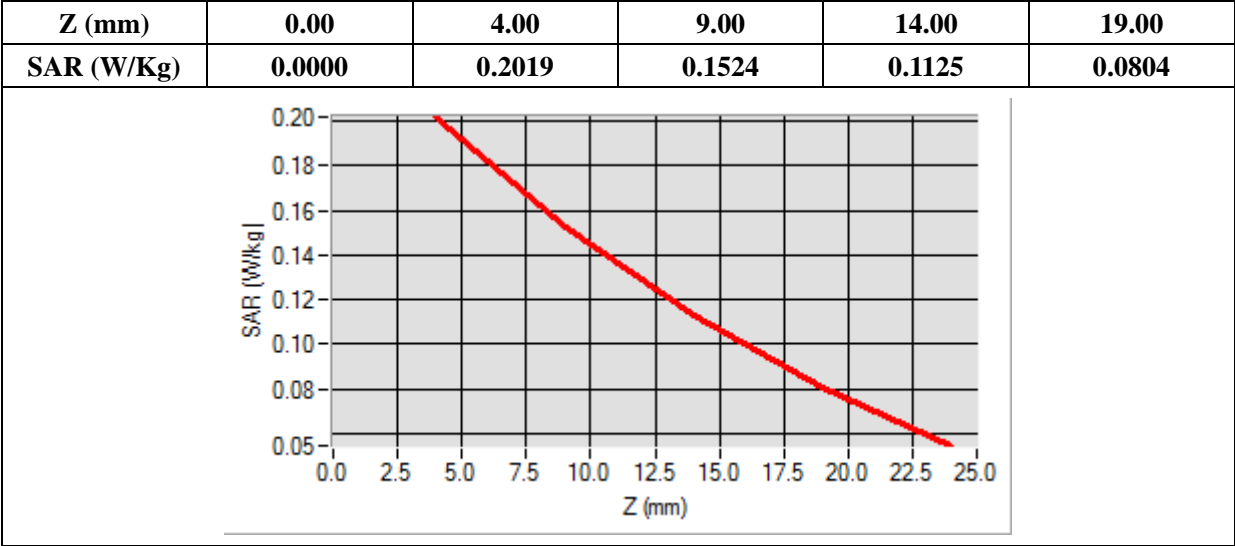

MEASUREMENT 58

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

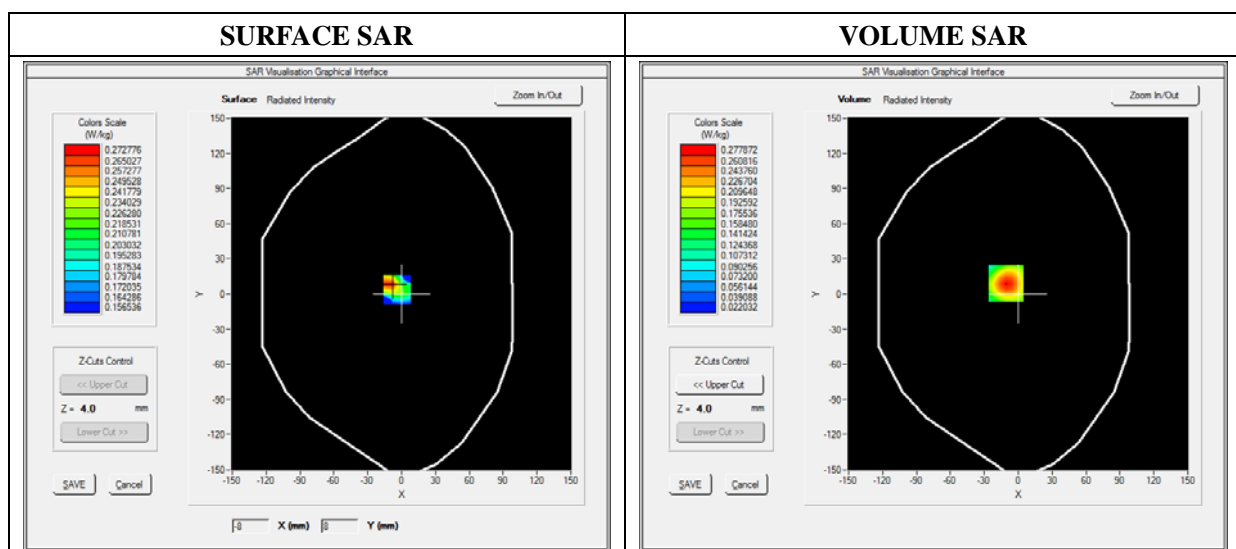

Maximum location: X=16.00, Y=24.00

SAR 10g (W/Kg)	0.153271
SAR 1g (W/Kg)	0.257619

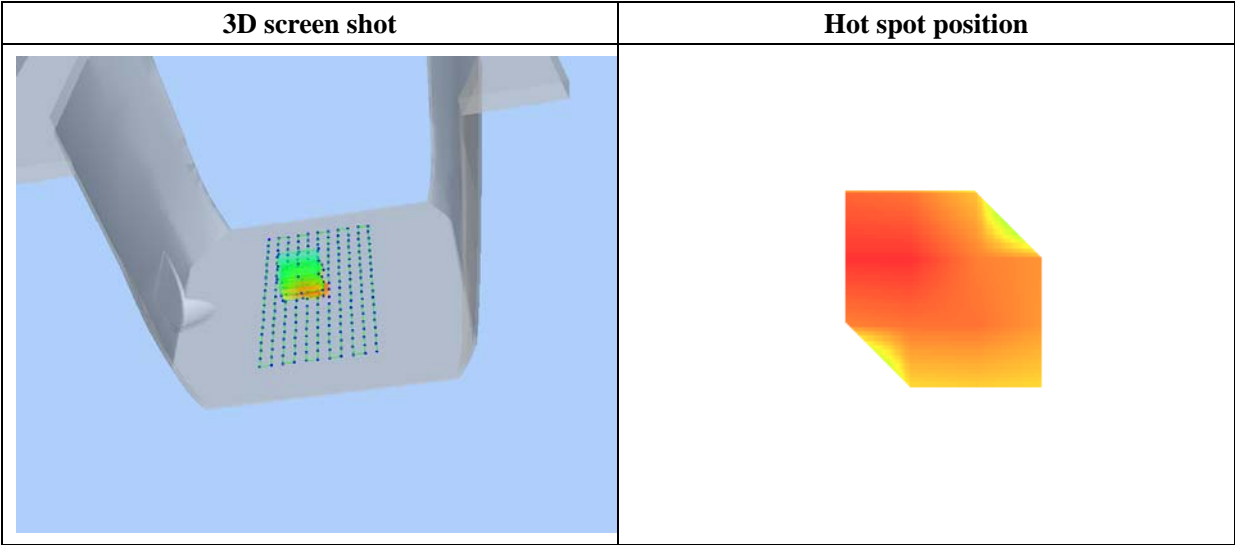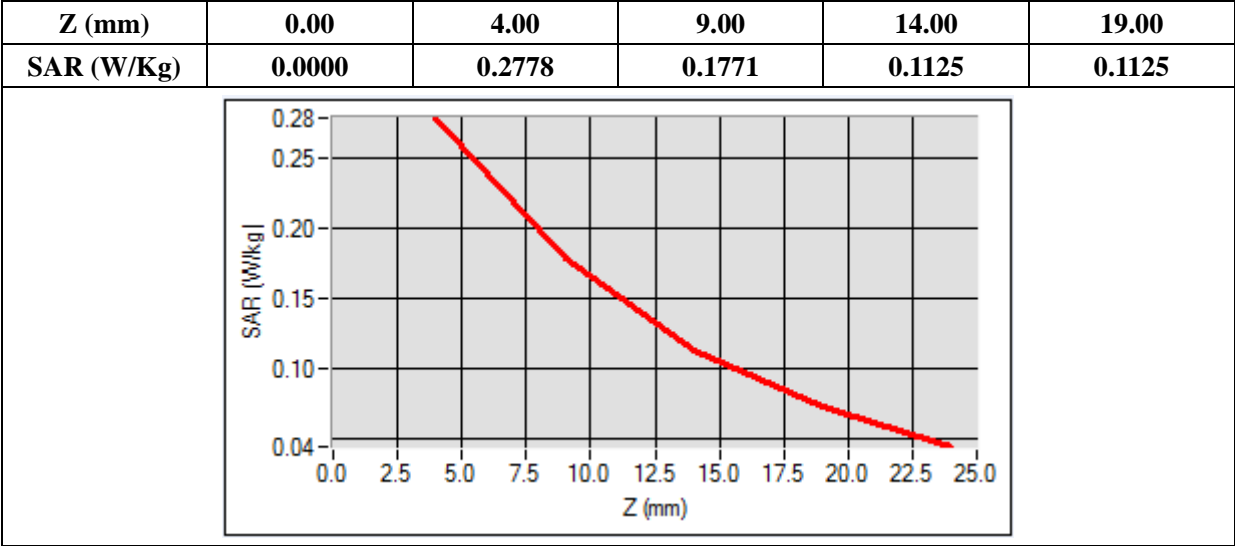

MEASUREMENT 59

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

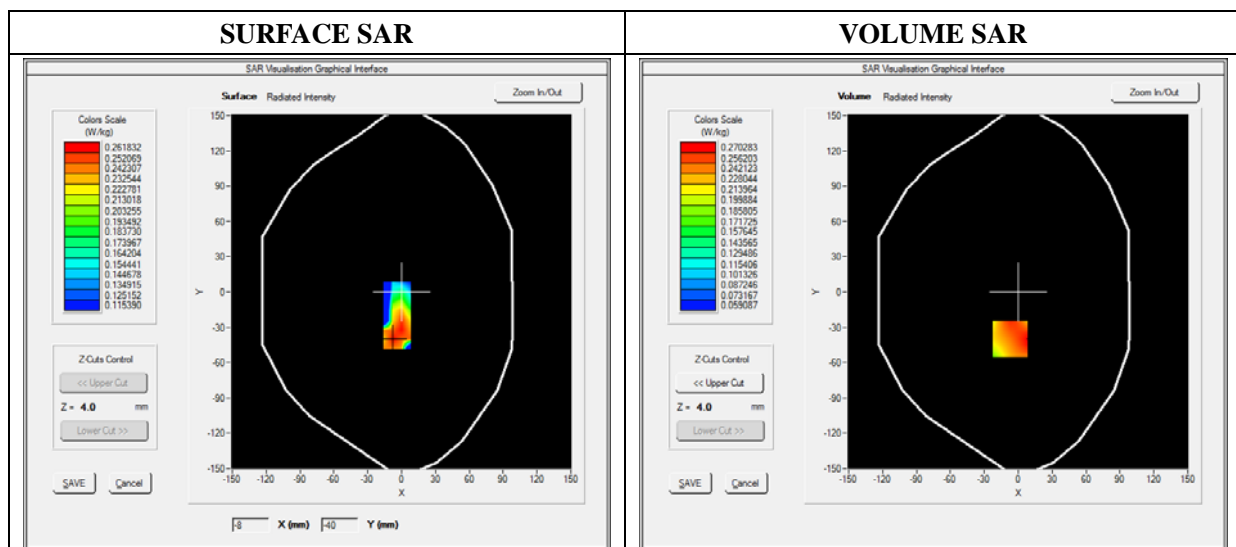

Maximum location: X=-47.00, Y=-8.00

SAR 10g (W/Kg)	0.091044
SAR 1g (W/Kg)	0.118086

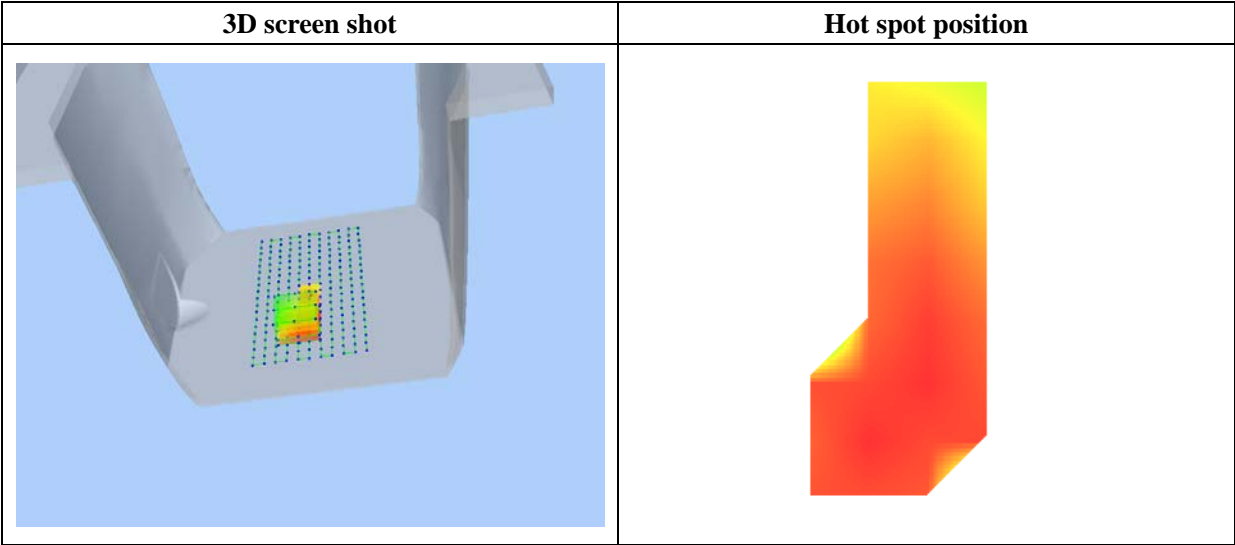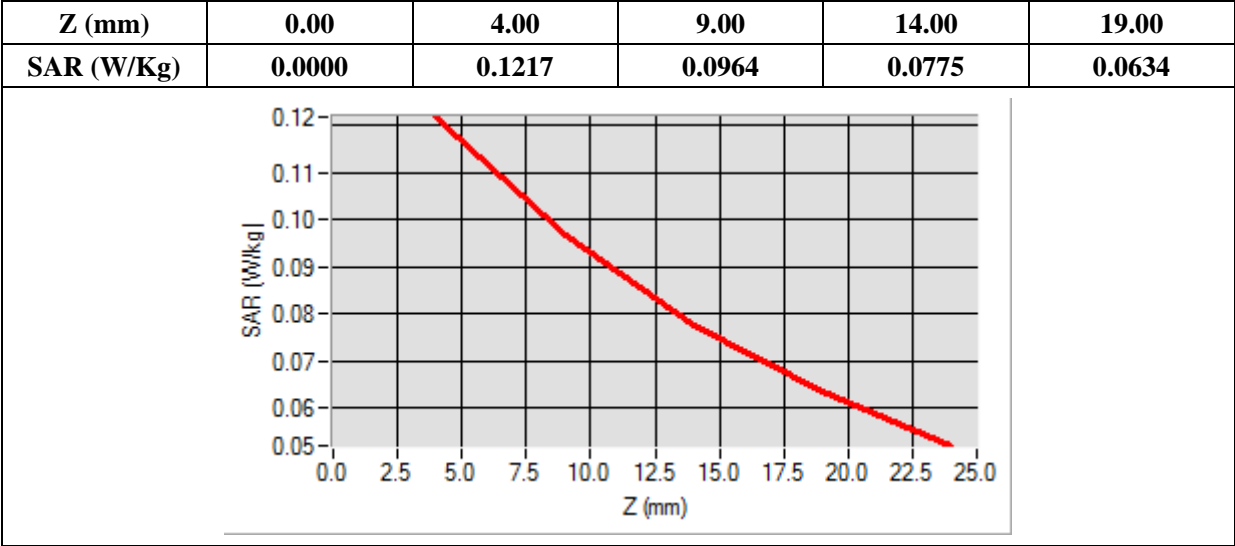

MEASUREMENT 60

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

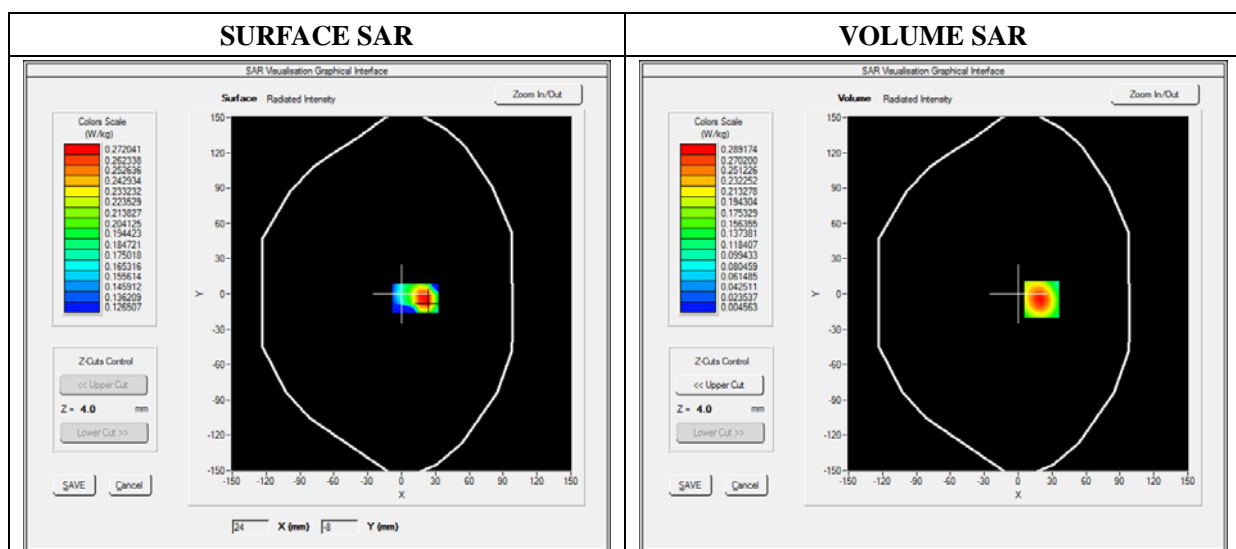

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.071254
SAR 1g (W/Kg)	0.112235

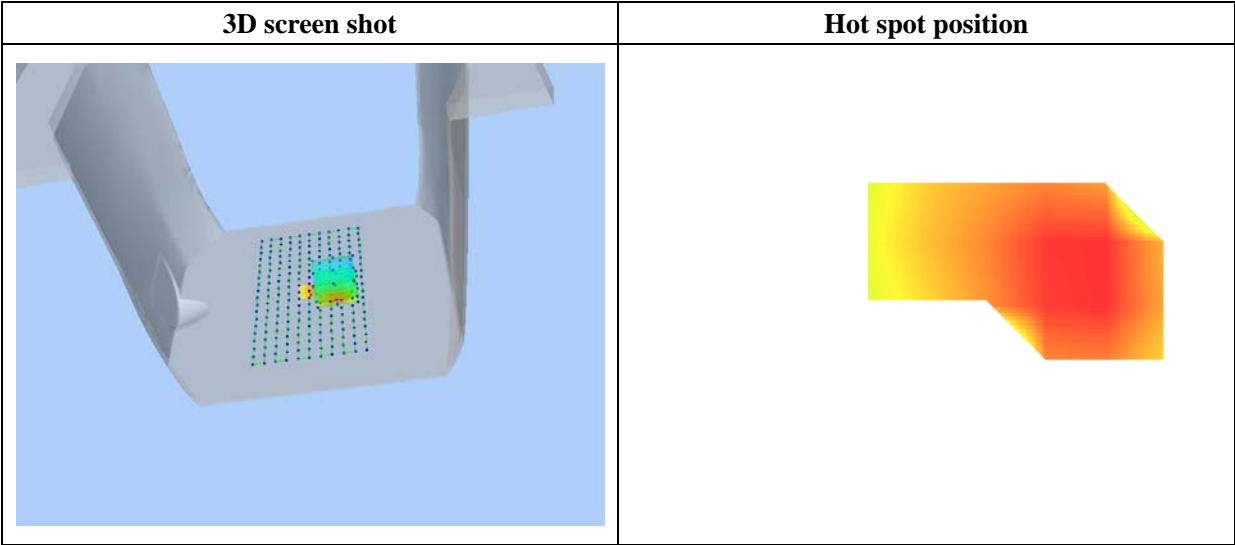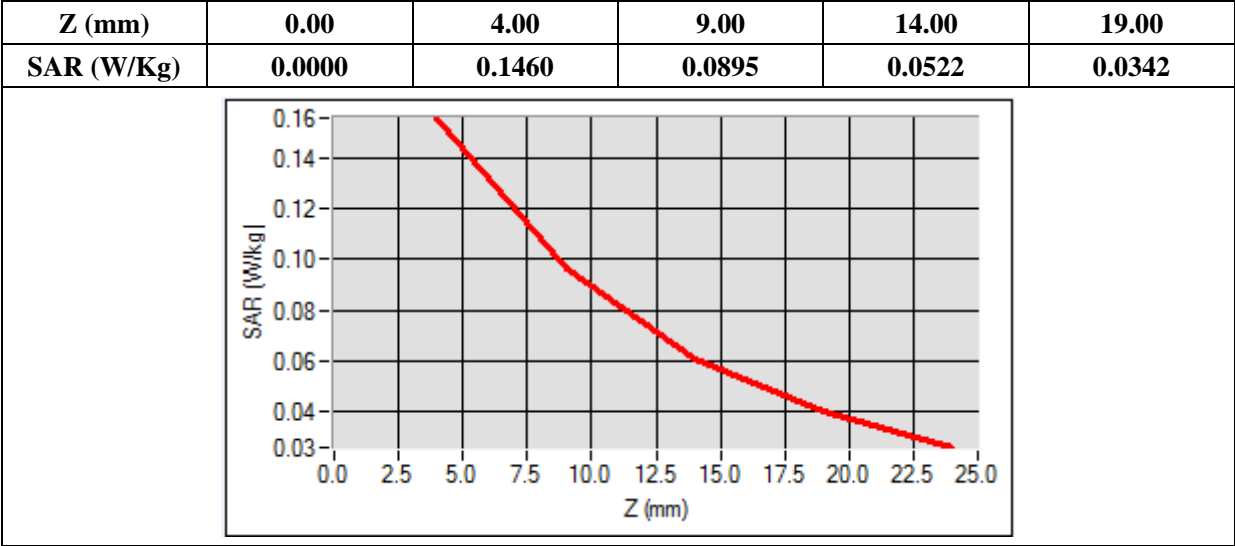

MEASUREMENT 61

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

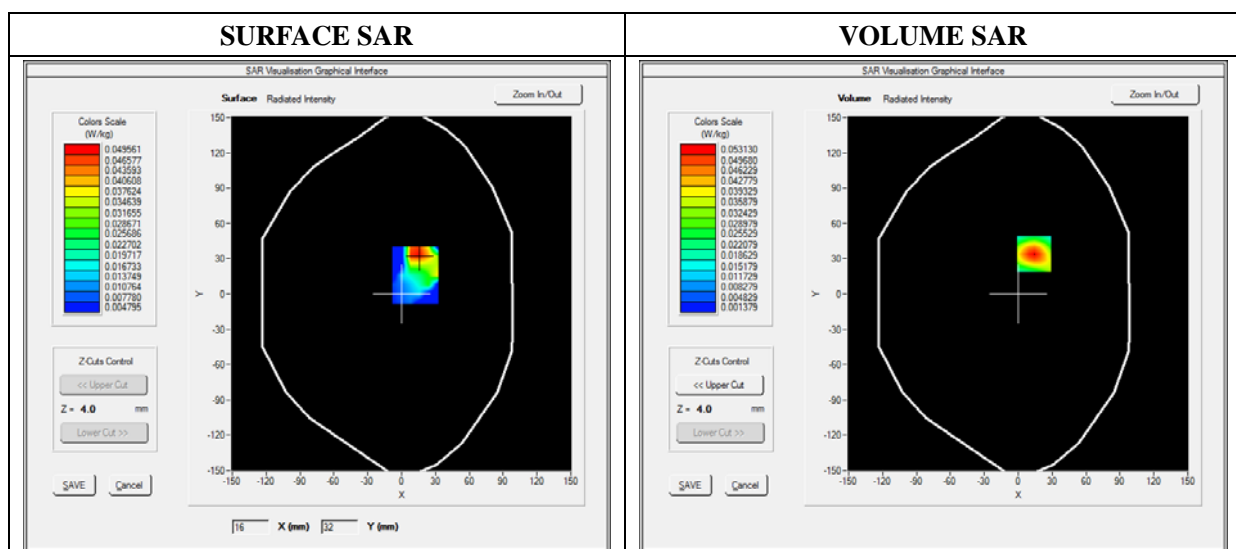


Maximum location: X=14.00, Y=34.00

SAR 10g (W/Kg)	0.024215
SAR 1g (W/Kg)	0.048456

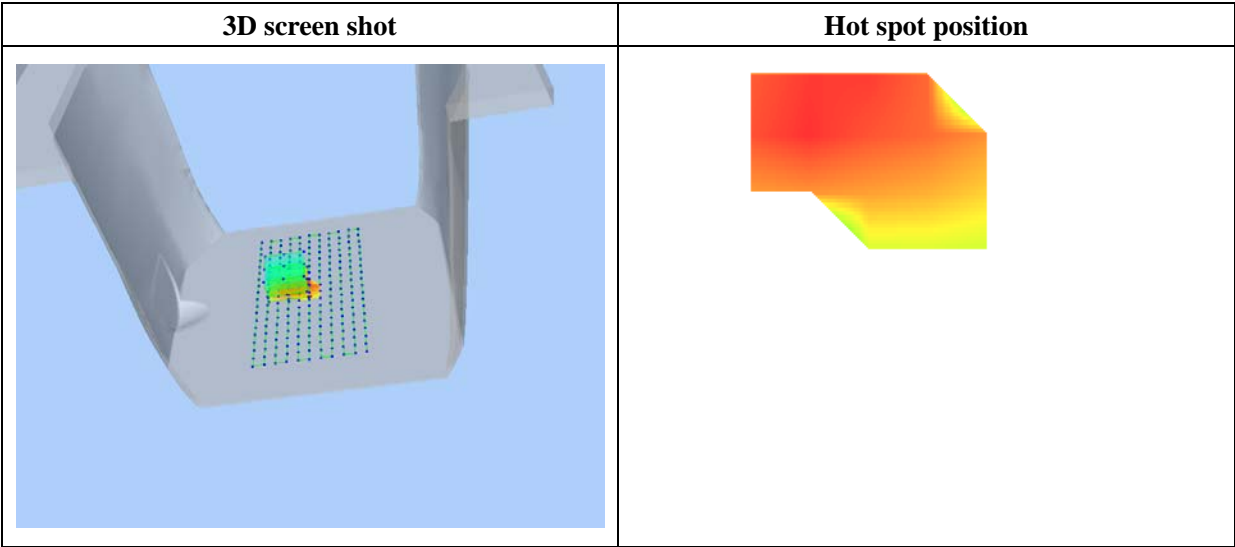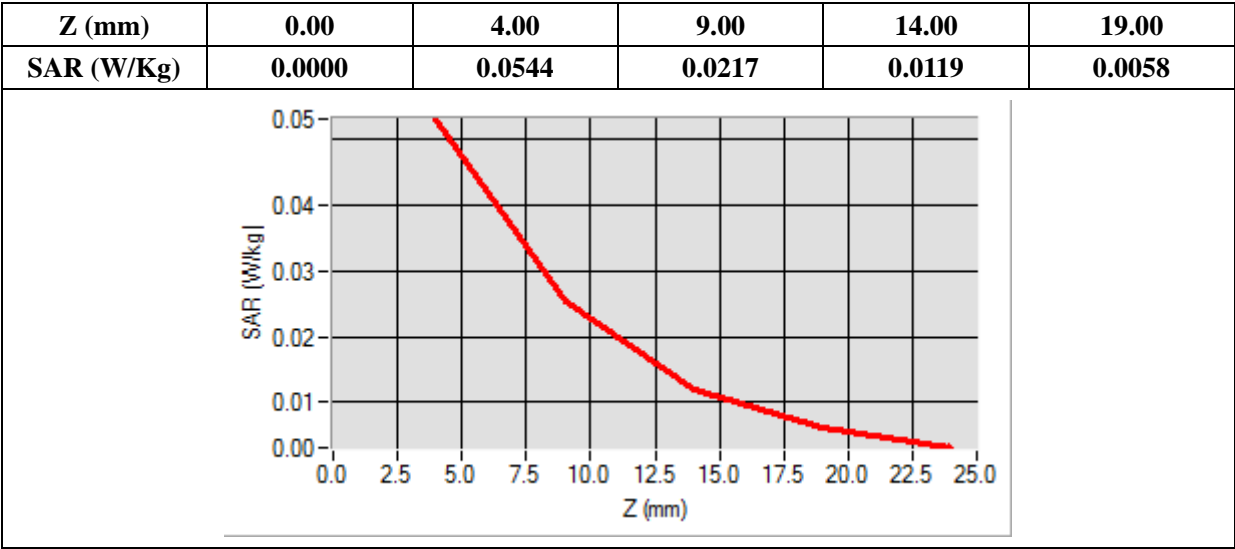


Annex C. EUT Photos

EUT View_Front

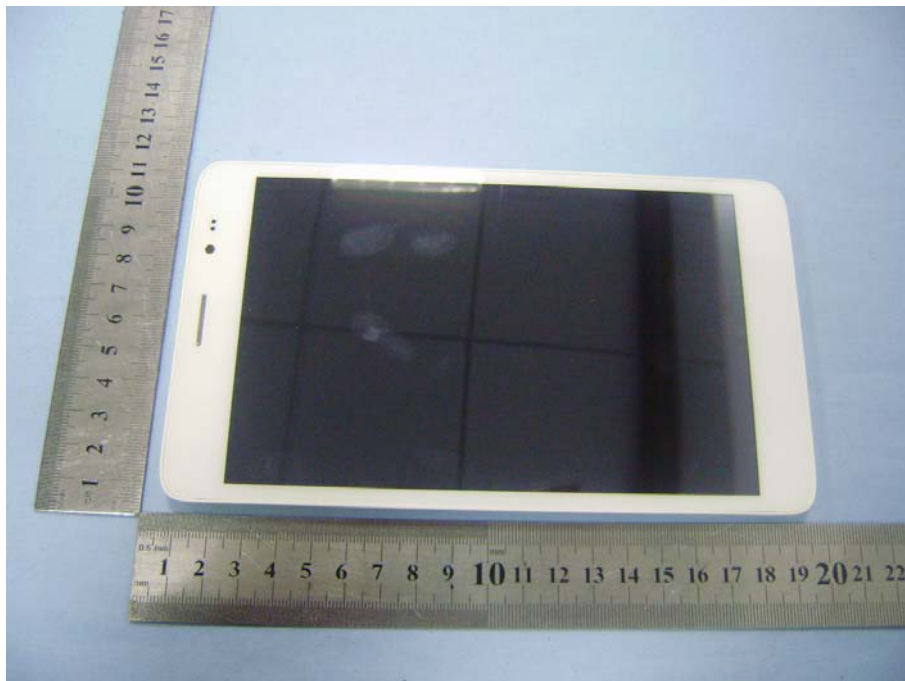

EUT View_Back

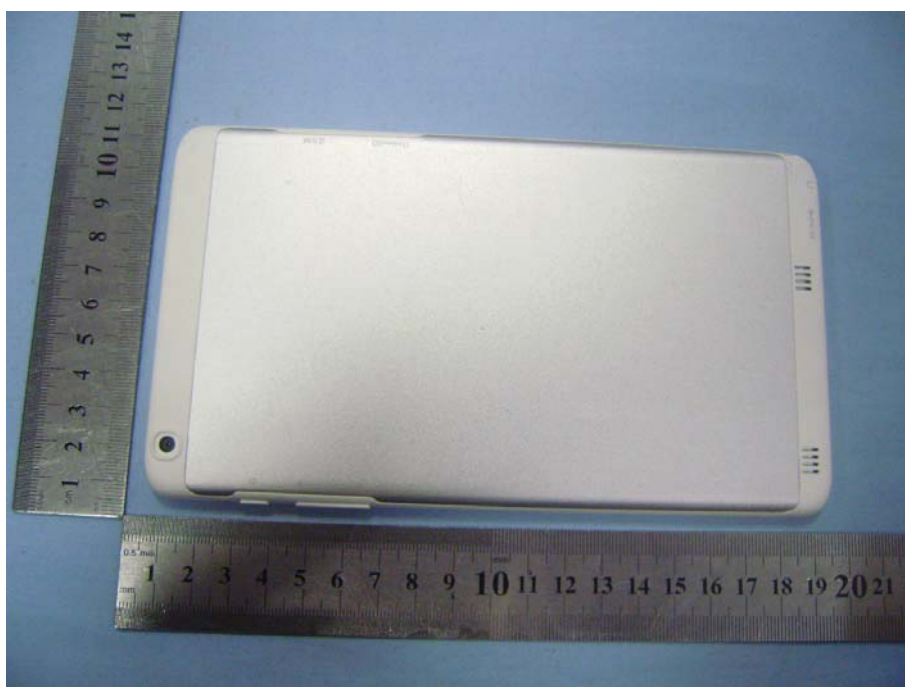

Antenna View




Annex D. Test Setup Photos

Test View 1 (Right Head)

Cheek




Tilt

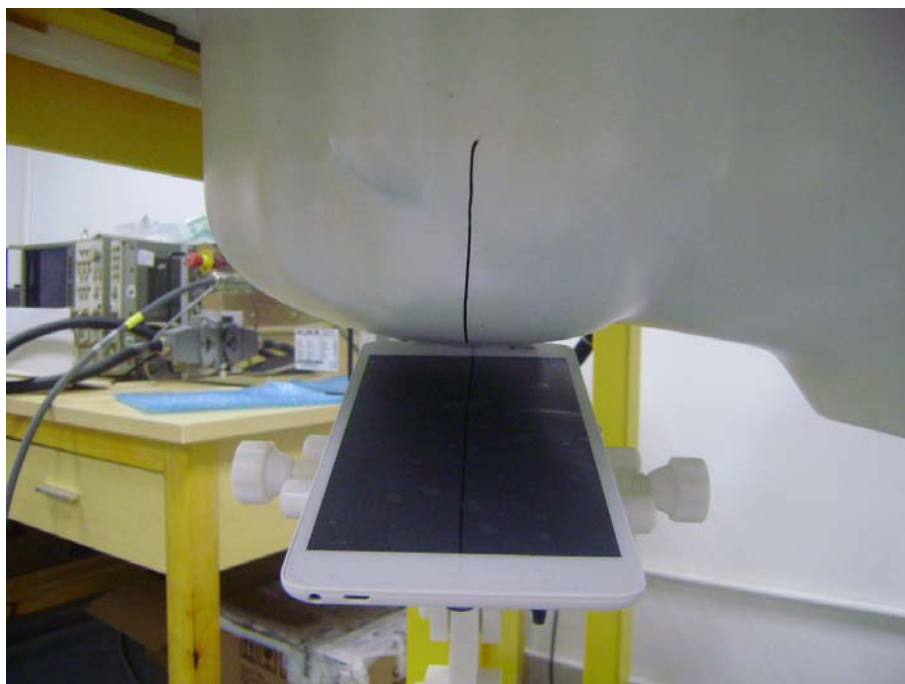


Test View 2 (Left Head)

Cheek

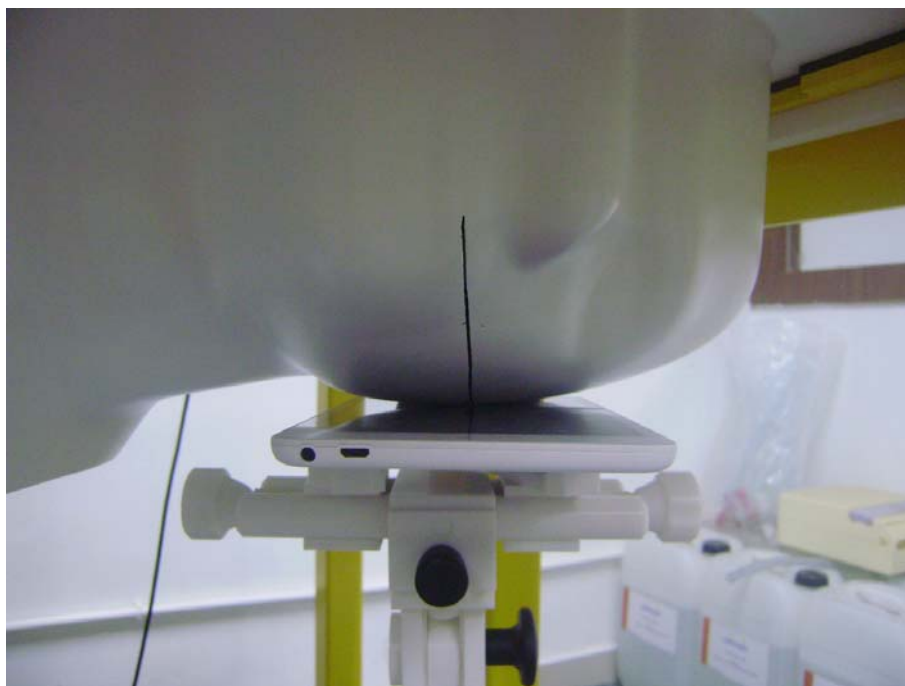

Tilt

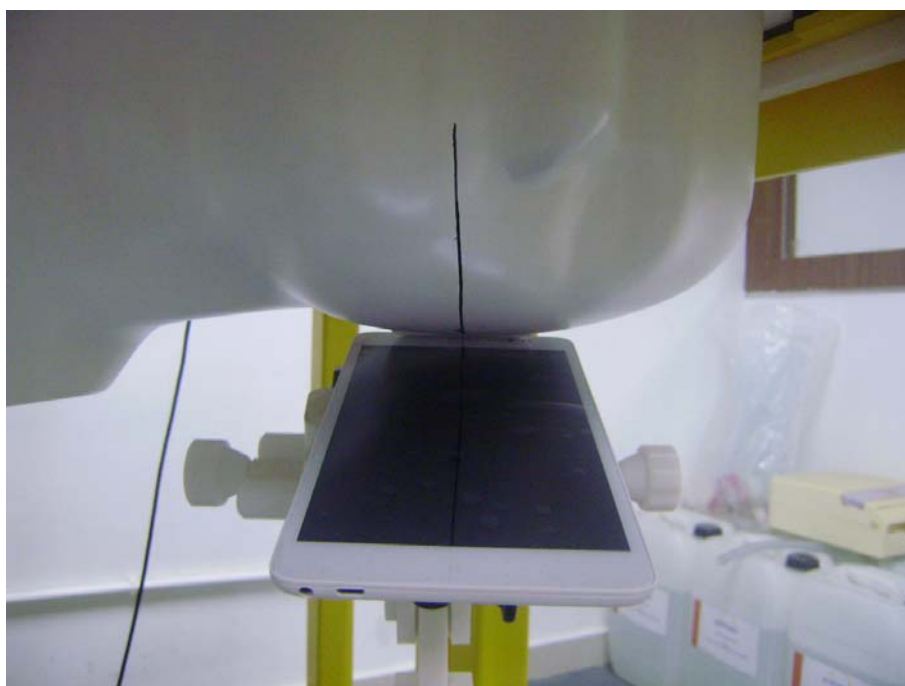

Test View 3

Body Front



Body Back



Right side



Right side



Top side



Bottom Side



Body-worn



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******