


TEST REPORT

Product : R500 Data Collector
Trade mark : 
Model/Type reference : R500
Serial Number : N/A
Report Number : EED32L00018301
FCC ID : 2ACHBR500
Date of Issue : Aug. 05, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS


Prepared for:

ComNav Technology Ltd.
Building 2, No. 618 Chengliu Middle Rd.

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:



Jay Zheng

Compiled by:



Alex Wu

Reviewed by:



Ware Xin

Approved by:



Kevin yang

Date:

Aug. 05, 2019

Check No.: 3319509675



2 Version

Version No.	Date	Description
00	2019-08-05	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): 6dB Occupied Bandwidth	15
Appendix B): Conducted Peak Output Power	17
Appendix C): Band-edge for RF Conducted Emissions	19
Appendix D): RF Conducted Spurious Emissions	21
Appendix E): Power Spectral Density	25
Appendix F): Antenna Requirement	27
Appendix G): AC Power Line Conducted Emission	28
Appendix H): Restricted bands around fundamental frequency (Radiated)	31
Appendix I) Radiated Spurious Emissions	40
PHOTOGRAPHS OF TEST SETUP	45
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	48

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

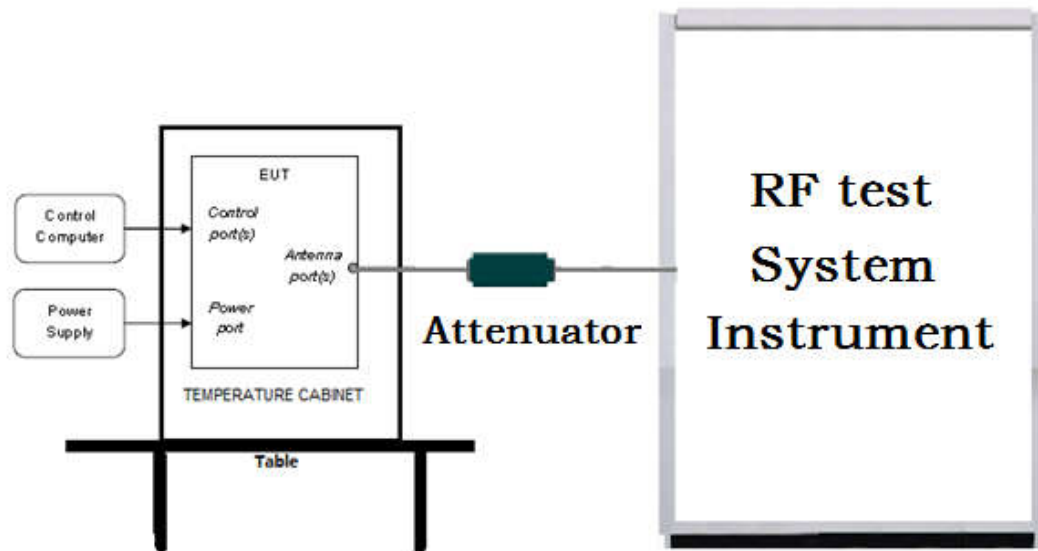

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

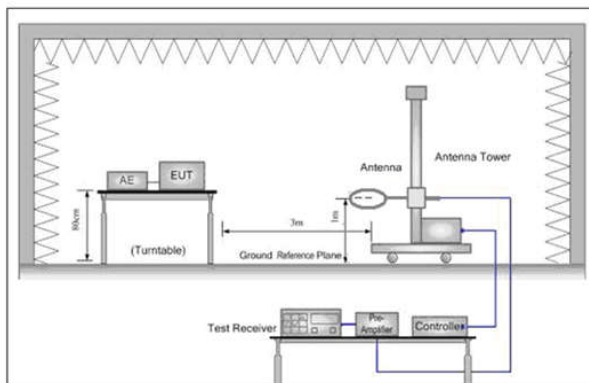


Figure 1. Below 30MHz

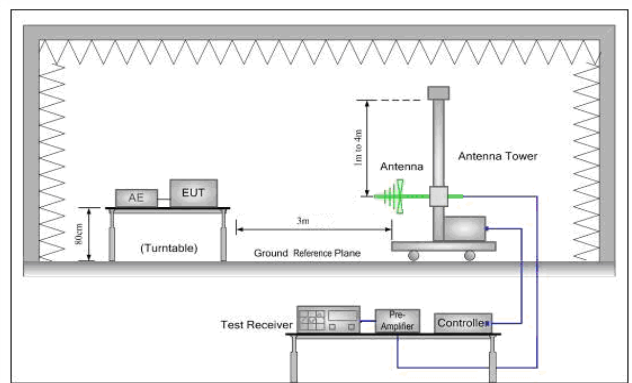


Figure 2. 30MHz to 1GHz


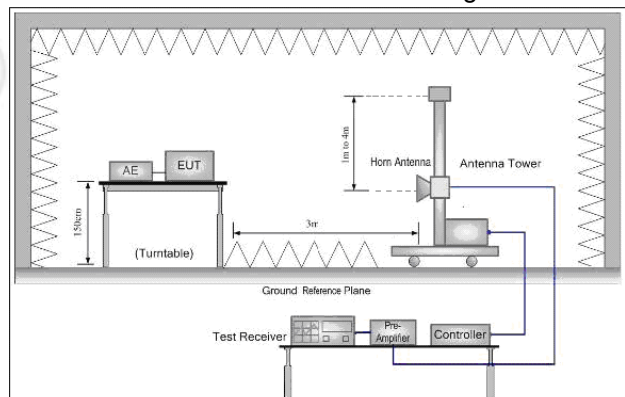


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

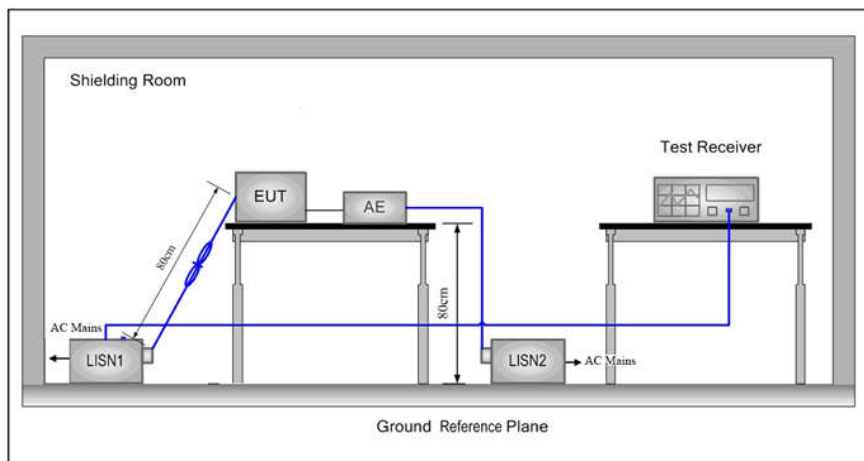

5.2 Test Environment

Operating Environment:	
Temperature:	25 °C
Humidity:	56 % RH
Atmospheric Pressure:	101kPa

5.3 Test Condition

Test channel:


Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

6 General Information

6.1 Client Information

Applicant:	ComNav Technology Ltd.
Address of Applicant:	Building 2, No. 618 Chengliu Middle Rd.
Manufacturer:	ComNav Technology Ltd.
Address of Manufacturer:	Building 2, No. 618 Chengliu Middle Rd.
Factory:	ComNav Technology Ltd.
Address of Factory:	Building 2, No. 618 Chengliu Middle Rd.

6.2 General Description of EUT

Product Name:	R500 Data Collector	
Model No.(EUT):	R500	
Trade mark:	 By ComNav Technology Ltd.	
EUT Supports Radios application:	BT4.0, 3.1+EDR	2402MHz to 2480MHz
	NFC	13.56MHz
	GSM	850/1900 GSM, GPRS, EGPRS
Power Supply:	AC adapter	MODEL No.: HKA01105021-XE INPUT: 100-240V~50/60Hz 0.5A OUTPUT: 5V---2.1A
	Li-ion Battery	MODEL No.: BL-R500 Capacity: 6500mAh, 24.0Wh Nominal Voltage: 3.7V Limited Charing Voltage: 4.2V
Sample Received Date:	Jan. 25, 2019	
Sample tested Date:	Jan. 25, 2019 to Jul. 28, 2019	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz	
Bluetooth Version:	BT 4.0	
Modulation Technique:	GFSK	
Modulation Type:	2G	GMSK (GSM/GPRS) , GMSK/8PSK (EGPRS)
	BT	GFSK, 8DPSK, $\pi/4$ DQPSK
	NFC	FSK
Number of Channel:	40	
Test Power Grade:	N/A	
Test Software of EUT:	N/A	
Antenna Type and Gain:	GSM 850	PIFA antenna, -2.16 dBi
	PCS 1900	PIFA antenna, -0.12 dBi
	BT	PIFA antenna, 3.01 dBi
	NFC	FPC antenna, 0 dBi
Test Voltage:	AC 120V, 60Hz, DC 3.7V	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY56376072	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	03-01-2019	02-29-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	01-09-2019	01-08-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-16-2019	01-15-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): 6dB Occupied Bandwidth

Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
BLE	LCH	0.6964	1.0515	PASS
BLE	MCH	0.6985	1.0516	PASS
BLE	HCH	0.7031	1.0553	PASS

Test Graphs

Graphs	
LCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.6 dB Ref 0.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 1.0515 MHz</p> <p>Total Power -4.33 dBm</p> <p>Transmit Freq Error 4.441 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 696.4 kHz</p> <p>x dB -6.00 dB</p>
MCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.440000000 GHz</p> <p>Ref Offset 19.77 dB Ref 10.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 1.0516 MHz</p> <p>Total Power -4.20 dBm</p> <p>Transmit Freq Error 2.093 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 698.5 kHz</p> <p>x dB -6.00 dB</p>
HCH	<p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 0.00 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 1.0553 MHz</p> <p>Total Power -8.58 dBm</p> <p>Transmit Freq Error 2.502 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 703.1 kHz</p> <p>x dB -6.00 dB</p>

Appendix B): Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	-10.373	PASS
BLE	MCH	-10.199	PASS
BLE	HCH	-14.559	PASS

Test Graphs


Graphs	
LCH	<p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.6 dB Ref 19.50 dBm</p> <p>Mkr1 2.402 269 GHz -10.373 dBm</p> <p>Center 2.40200 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.389500000 GHz</p> <p>Stop Freq 2.414500000 GHz</p> <p>CF Step 2.500000 MHz Man</p> <p>Freq Offset 0 Hz</p>
MCH	<p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Mkr1 2.439 850 GHz -10.199 dBm</p> <p>Center 2.44000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.440000000 GHz</p> <p>Start Freq 2.427500000 GHz</p> <p>Stop Freq 2.452500000 GHz</p> <p>CF Step 2.500000 MHz Man</p> <p>Freq Offset 0 Hz</p>
HCH	<p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Mkr1 2.479 853 GHz -14.559 dBm</p> <p>Center 2.48000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.467500000 GHz</p> <p>Stop Freq 2.492500000 GHz</p> <p>CF Step 2.500000 MHz Man</p> <p>Freq Offset 0 Hz</p>

Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	-11.189	-60.059	-31.19	PASS
BLE	HCH	-15.512	-59.933	-35.51	PASS

Test Graphs

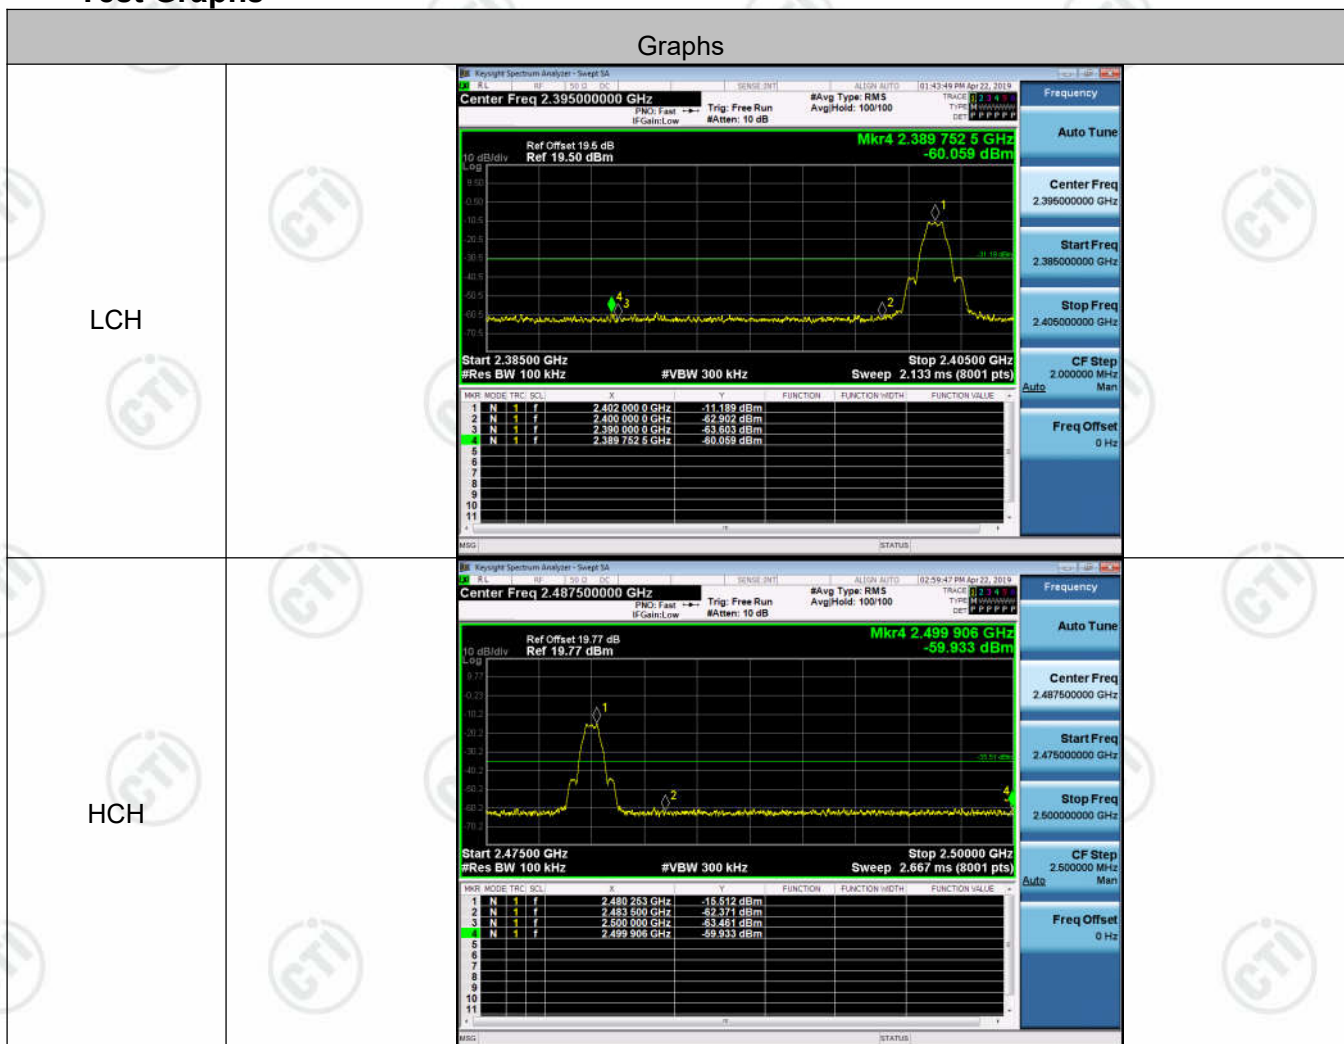



Appendix D): RF Conducted Spurious Emissions


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	-11.397	<Limit	PASS
BLE	MCH	-11.294	<Limit	PASS
BLE	HCH	-15.696	<Limit	PASS

Test Graphs

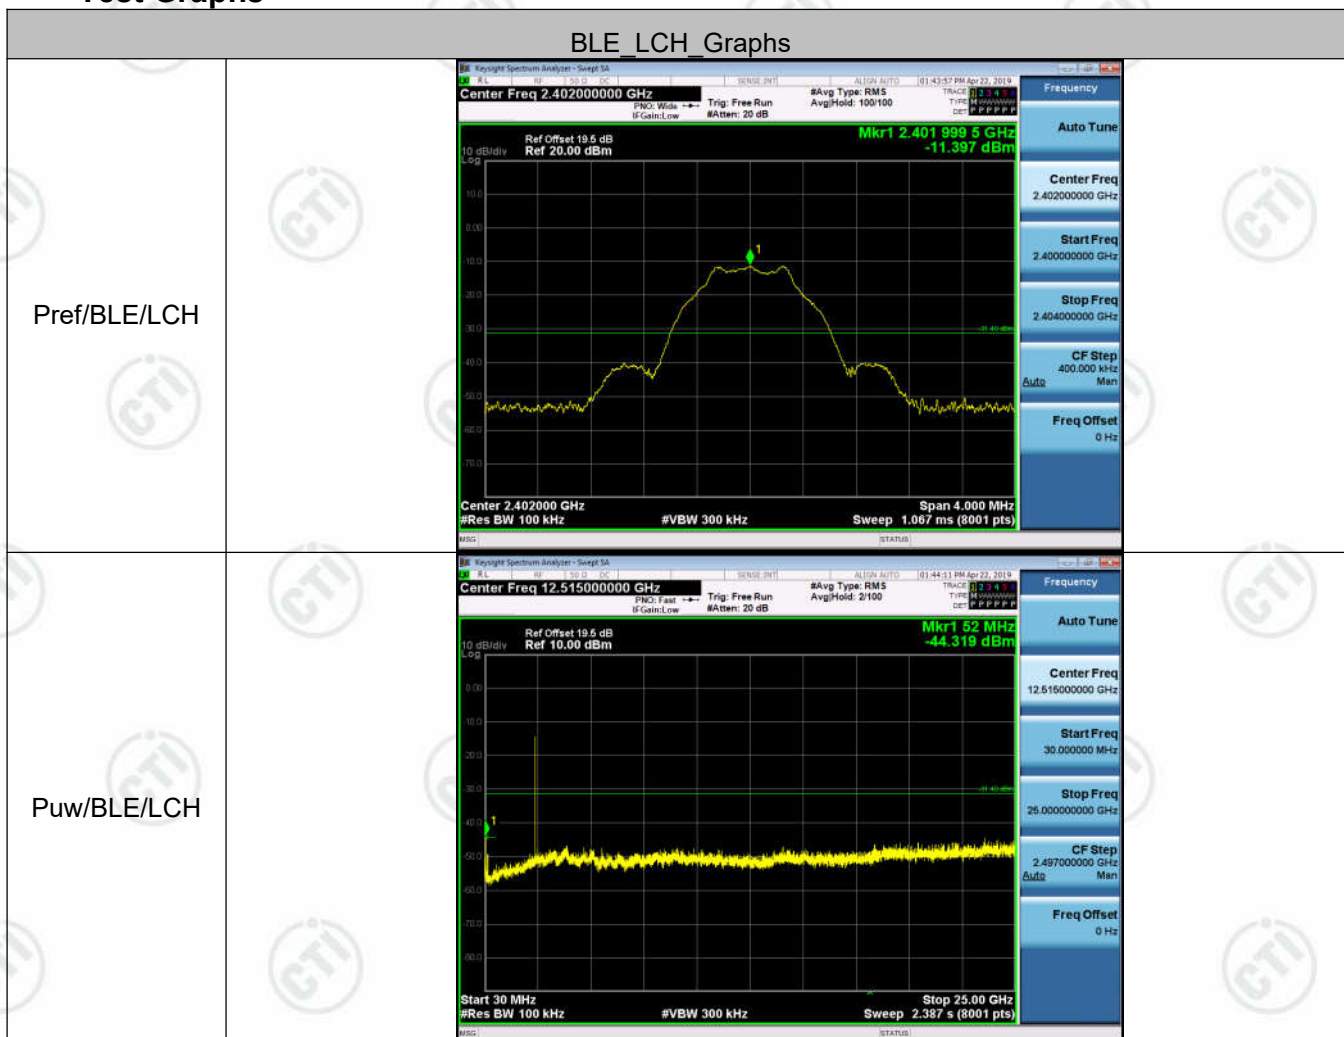

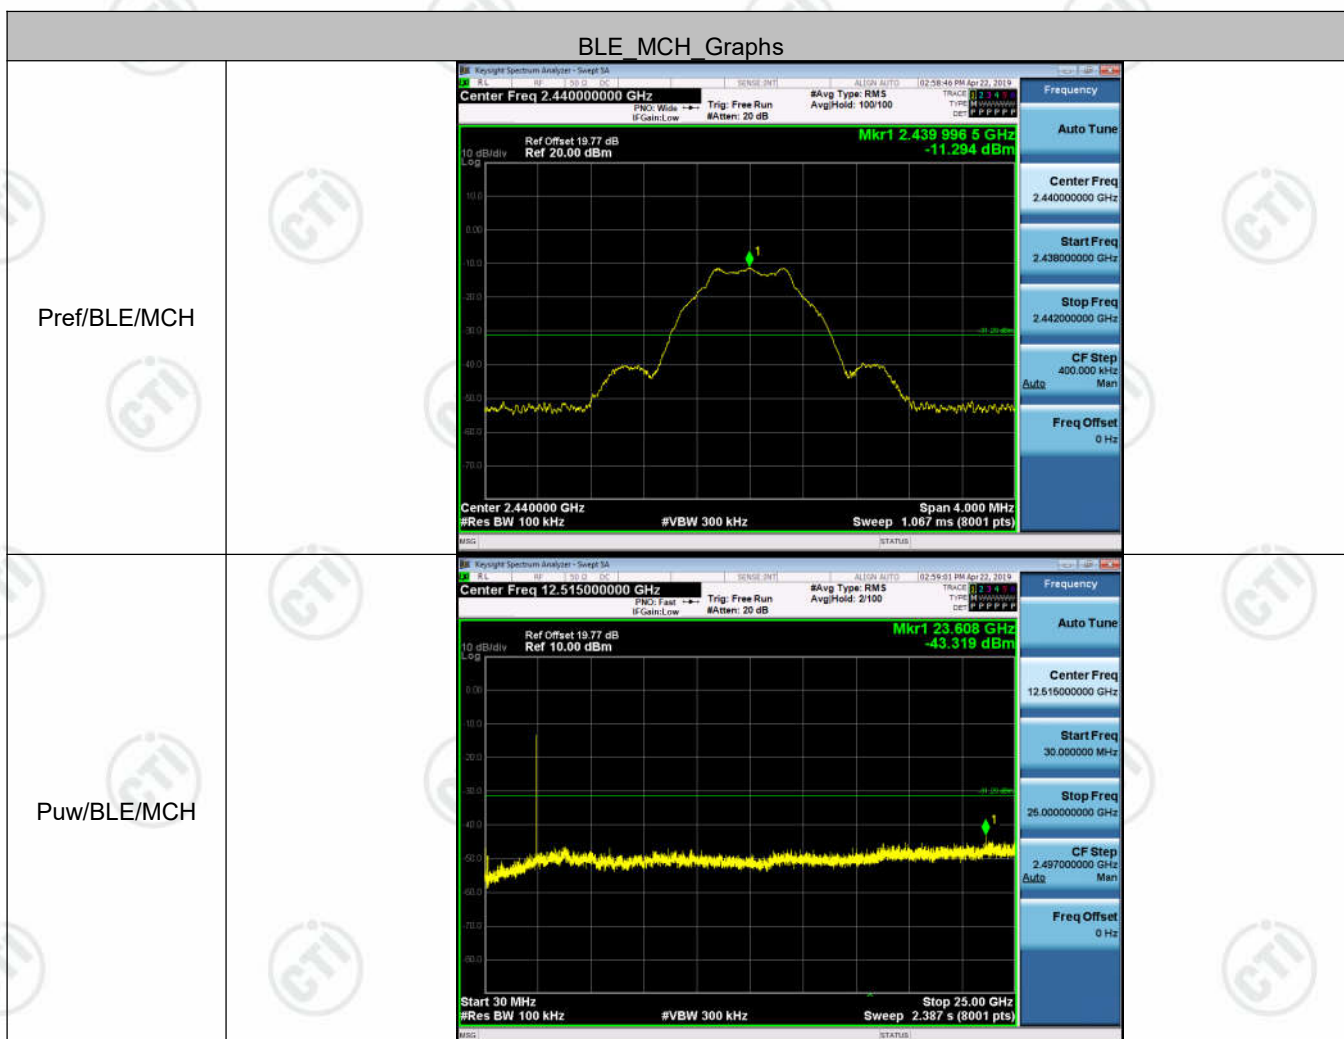

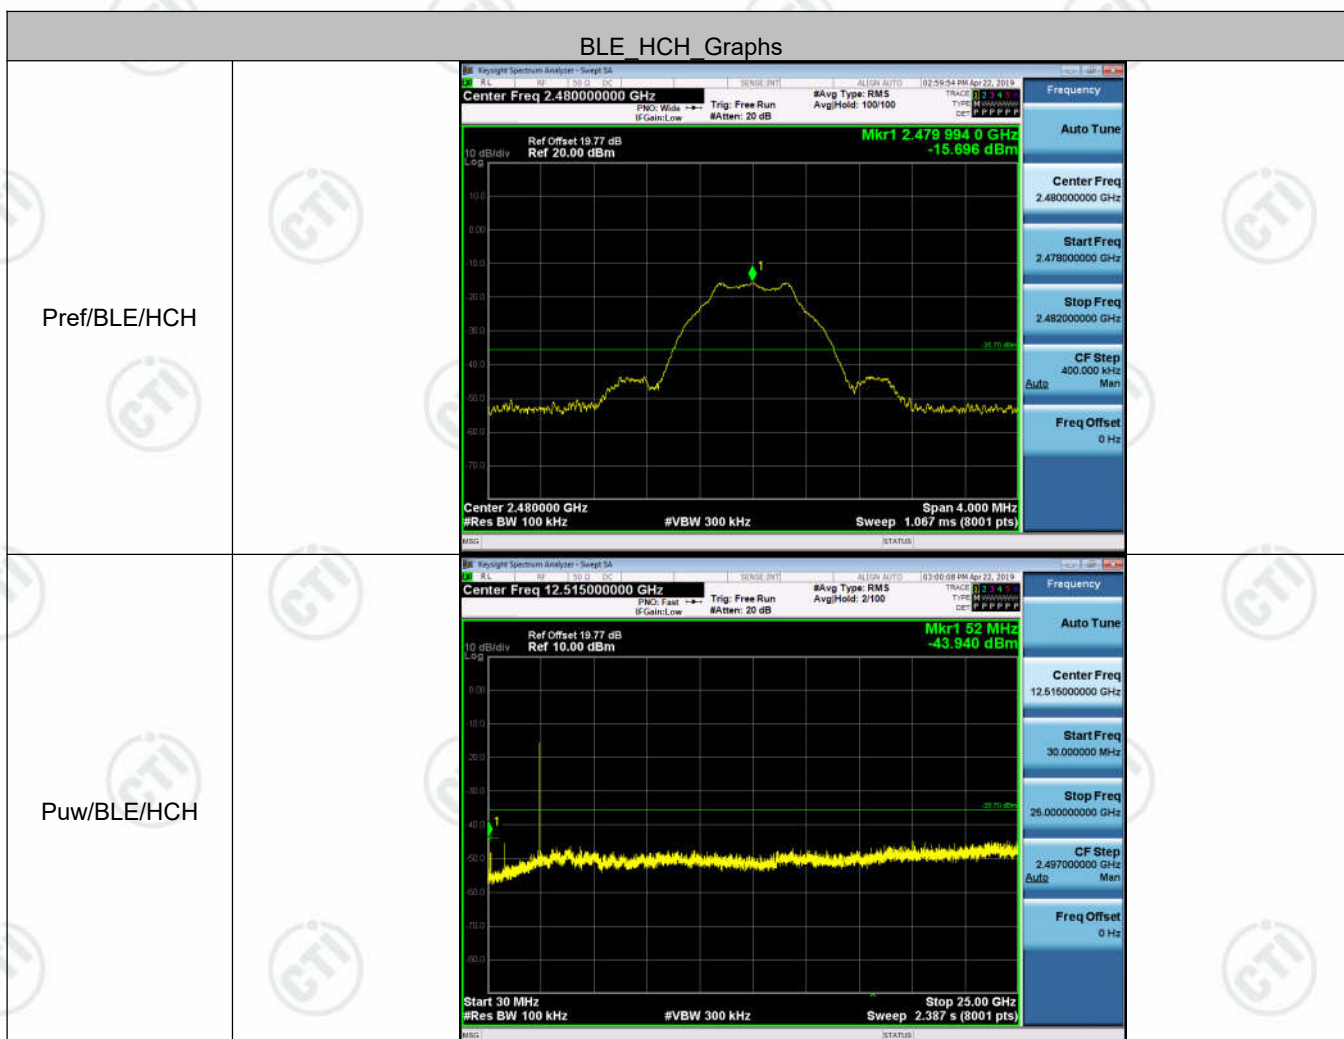

Appendix E): Power Spectral Density

Result Table

Mode	Channel	PSD [dBm]	Verdict
BLE	LCH	-25.875	PASS
BLE	MCH	-25.694	PASS
BLE	HCH	-30.134	PASS

Test Graphs

Graphs	
LCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 19.6 dB Ref 10.00 dBm Mkr1 2.401 978 25 GHz -25.897 dBm Span 1.500 MHz Sweep 158.4 ms (8001 pts) #Res BW 3.0 kHz #VBW 10 kHz</p>
MCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.44000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.439 902 13 GHz -25.694 dBm Span 1.500 MHz Sweep 158.4 ms (8001 pts) #Res BW 3.0 kHz #VBW 10 kHz</p>
HCH	<p>Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.479 978 06 GHz -30.134 dBm Span 1.500 MHz Sweep 158.4 ms (8001 pts) #Res BW 3.0 kHz #VBW 10 kHz</p>

Appendix F): Antenna Requirement



15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

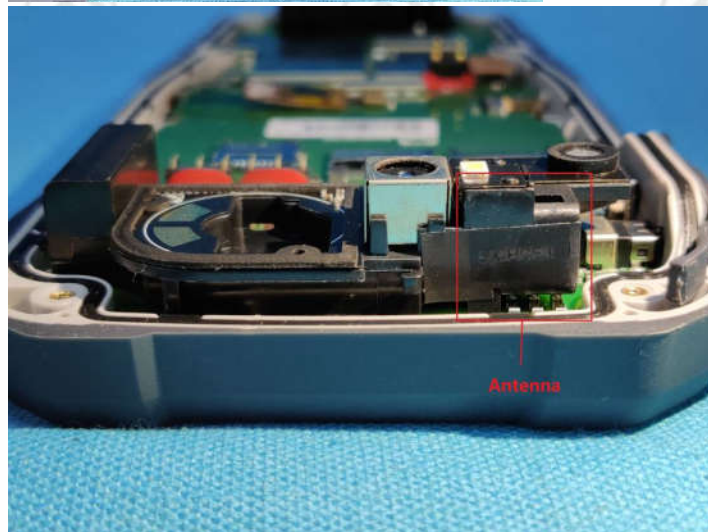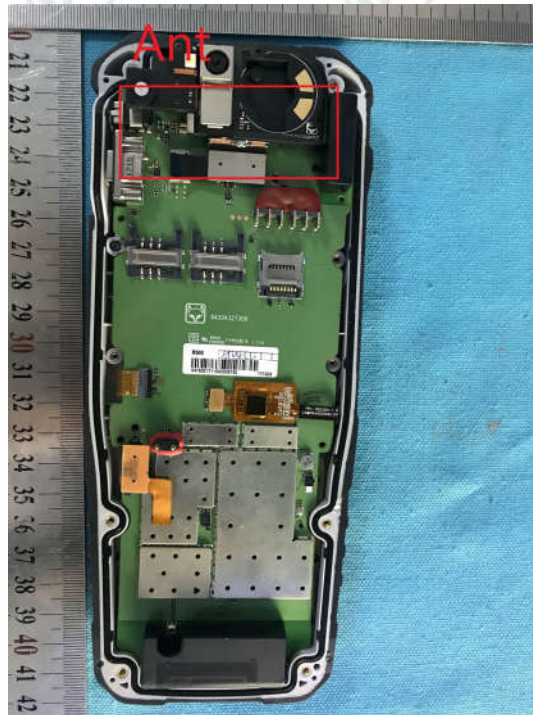

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 3.01dBi.

Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Product : R500 Data Collector

Model/Type reference : R500

Temperature : 22°C

Humidity : 53%


Live line:

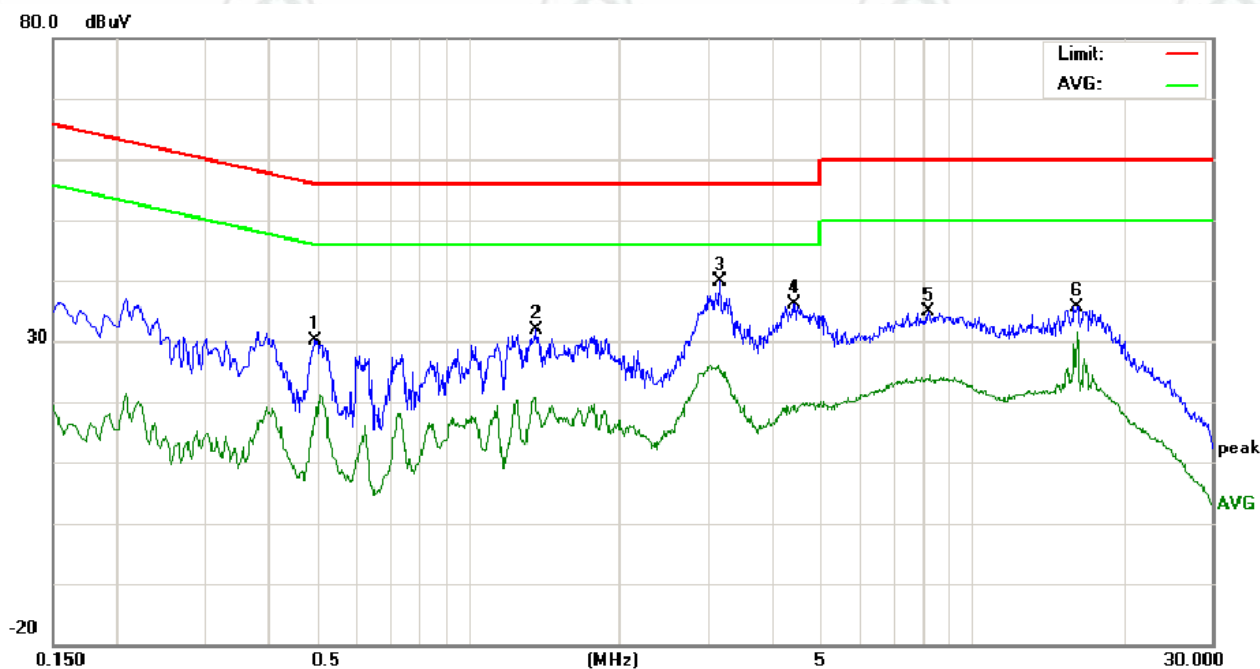

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4980	20.18	17.25	6.79	9.89	30.07	27.14	16.68	56.03	46.03	-28.89	-29.35	P	
2	1.3619	22.13	18.63	10.87	9.78	31.91	28.41	20.65	56.00	46.00	-27.59	-25.35	P	
3	3.1660	30.23	27.14	15.37	9.72	39.95	36.86	25.09	56.00	46.00	-19.14	-20.91	P	
4	4.4340	26.29	23.20	9.59	9.73	36.02	32.93	19.32	56.00	46.00	-23.07	-26.68	P	
5	8.2220	24.98	21.33	13.87	9.78	34.76	31.11	23.65	60.00	50.00	-28.89	-26.35	P	
6	16.1660	25.77	21.96	21.66	9.96	35.73	31.92	31.62	60.00	50.00	-28.08	-18.38	P	

Neutral line:

80.0 dBuV

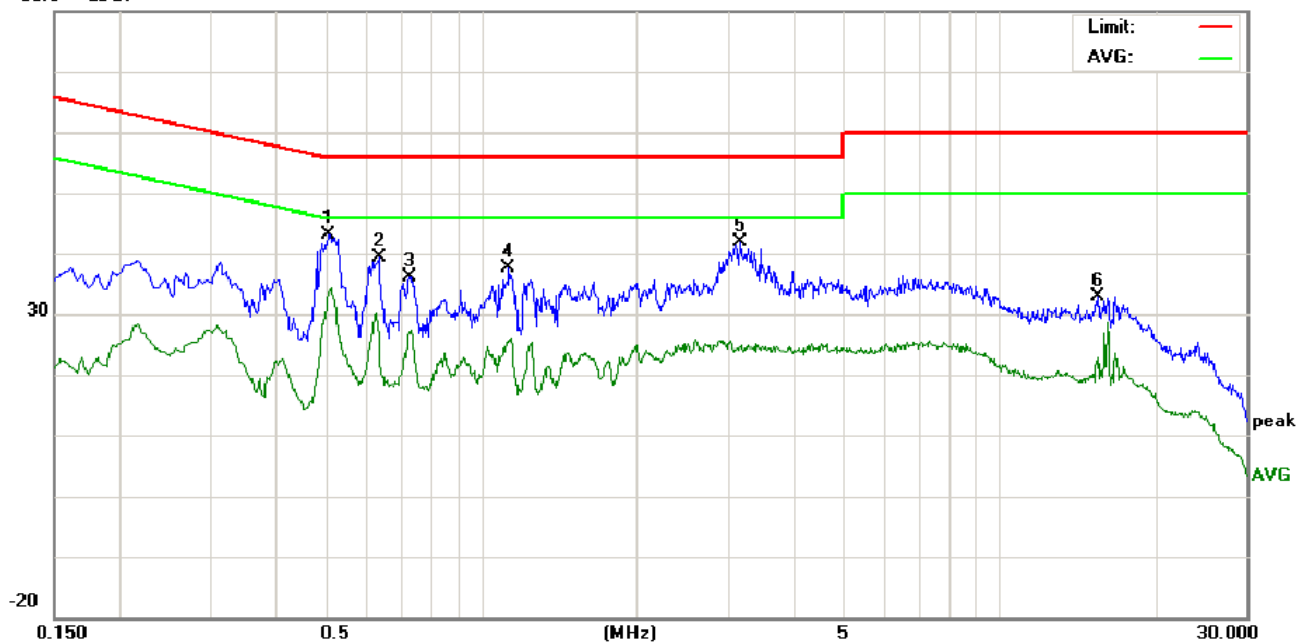

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5100	33.18	29.04	23.52	9.91	43.09	38.95	33.43	56.00	46.00	-17.05	-12.57	P	
2	0.6340	29.50	26.30	16.41	9.97	39.47	36.27	26.38	56.00	46.00	-19.73	-19.62	P	
3	0.7300	26.31	23.21	16.97	9.81	36.12	33.02	26.78	56.00	46.00	-22.98	-19.22	P	
4	1.1340	27.81	24.20	15.94	9.80	37.61	34.00	25.74	56.00	46.00	-22.00	-20.26	P	
5	3.1660	32.05	28.63	14.86	9.72	41.77	38.35	24.58	56.00	46.00	-17.65	-21.42	P	
6	15.5380	23.03	20.03	12.94	9.97	33.00	30.00	22.91	60.00	50.00	-30.00	-27.09	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

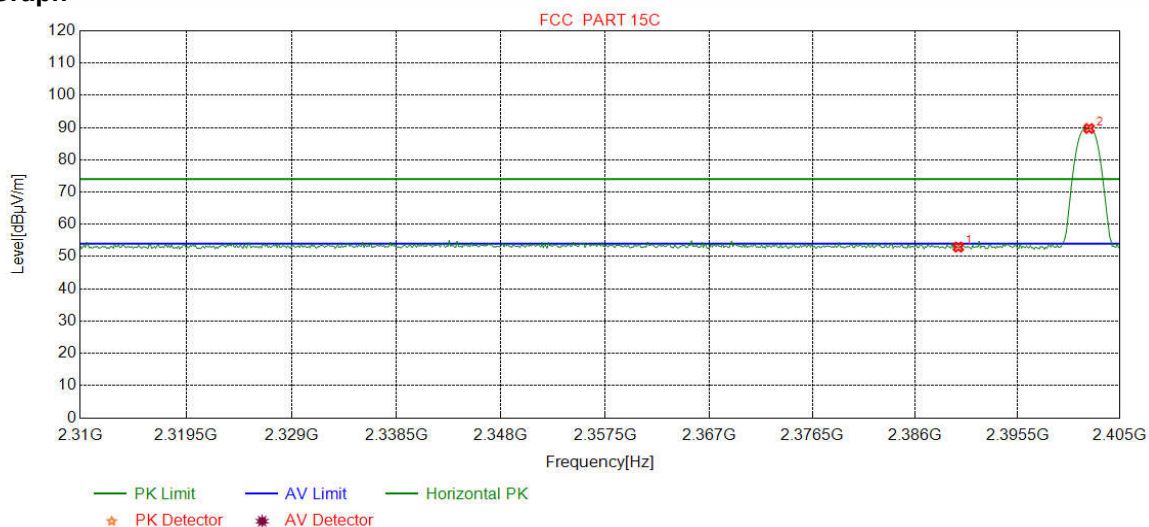

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.77	52.95	74.00	21.05	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	86.56	89.70	74.00	-15.70	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		


Test Graph

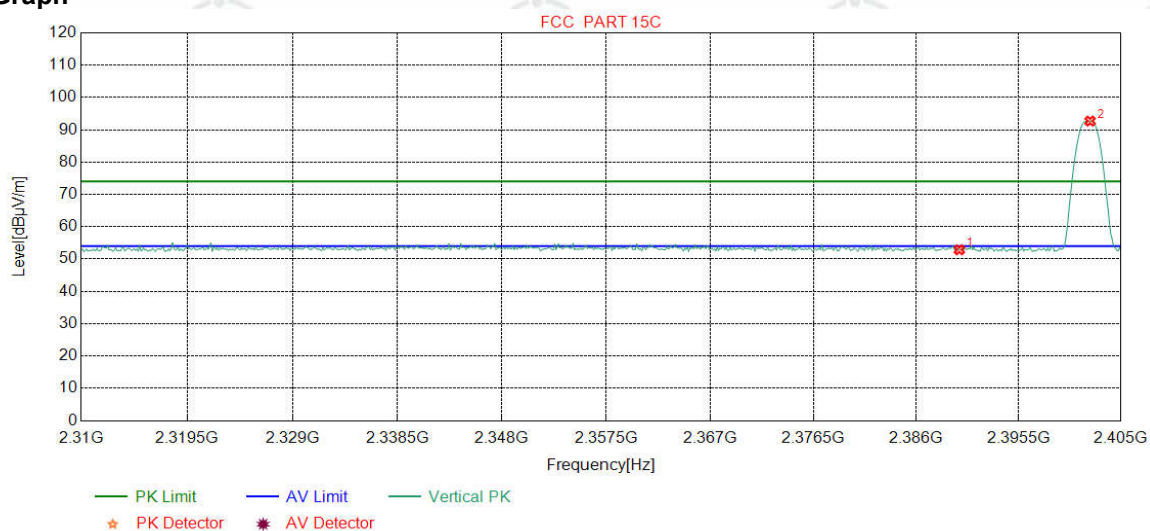

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.70	52.88	74.00	21.12	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	89.56	92.70	74.00	-18.70	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

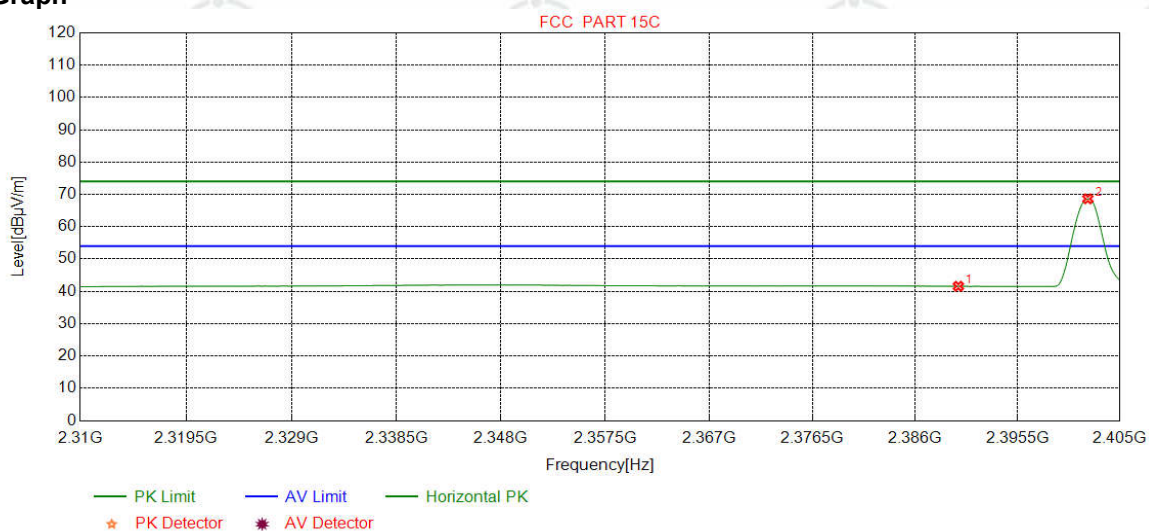

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.40	41.58	54.00	12.42	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	65.50	68.64	54.00	-14.64	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

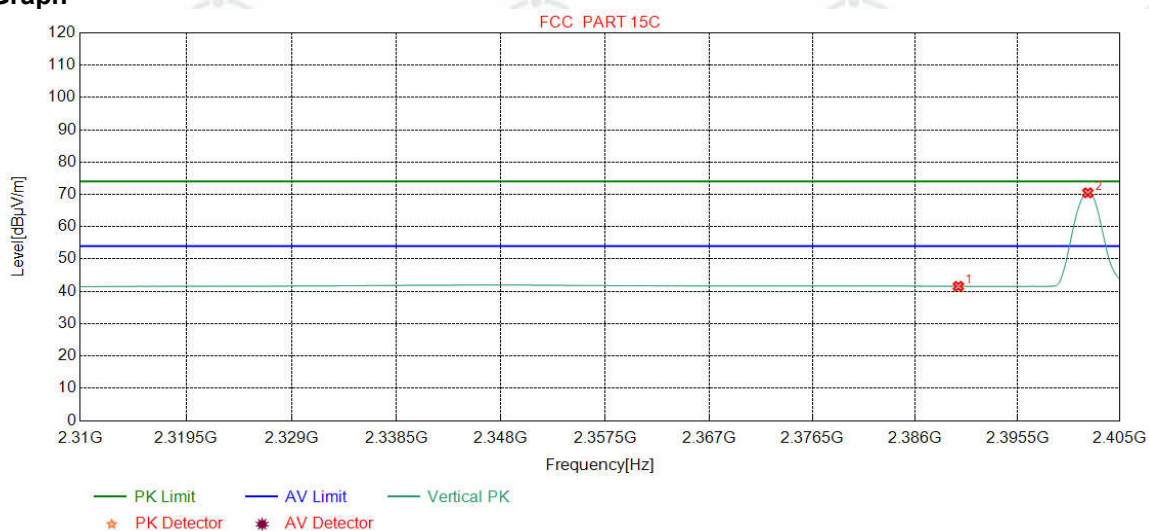

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.38	41.56	54.00	12.44	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	67.35	70.49	54.00	-16.49	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

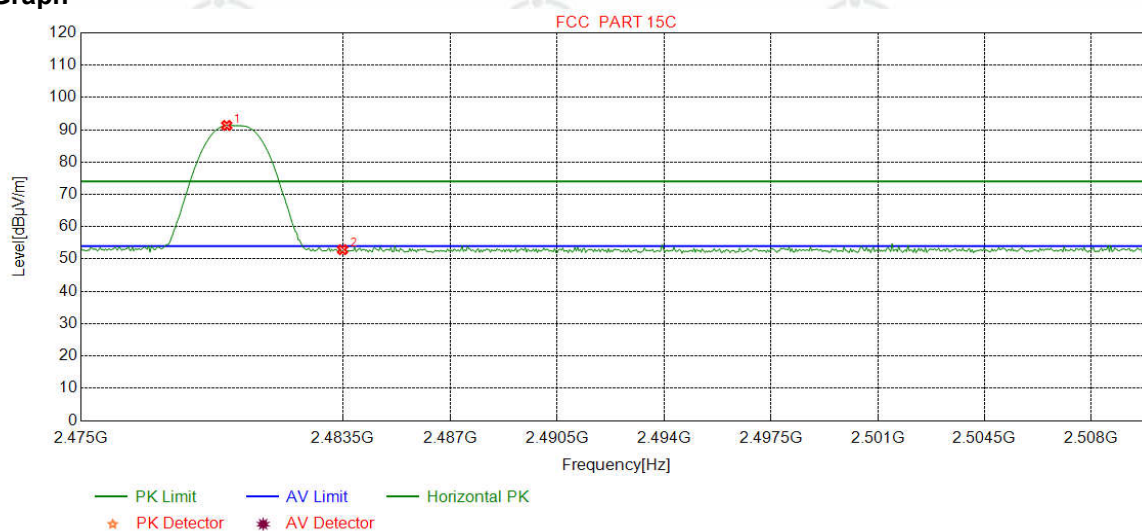

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7309	32.37	13.39	-42.39	87.99	91.36	74.00	-17.36	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.54	52.90	74.00	21.10	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		


Test Graph

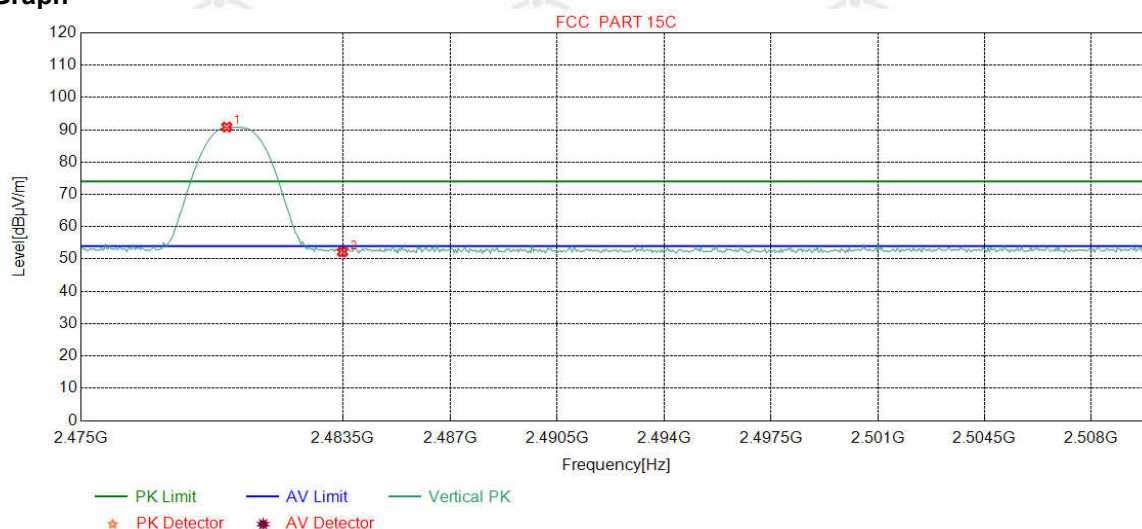

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7309	32.37	13.39	-42.39	87.48	90.85	74.00	-16.85	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	48.86	52.22	74.00	21.78	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

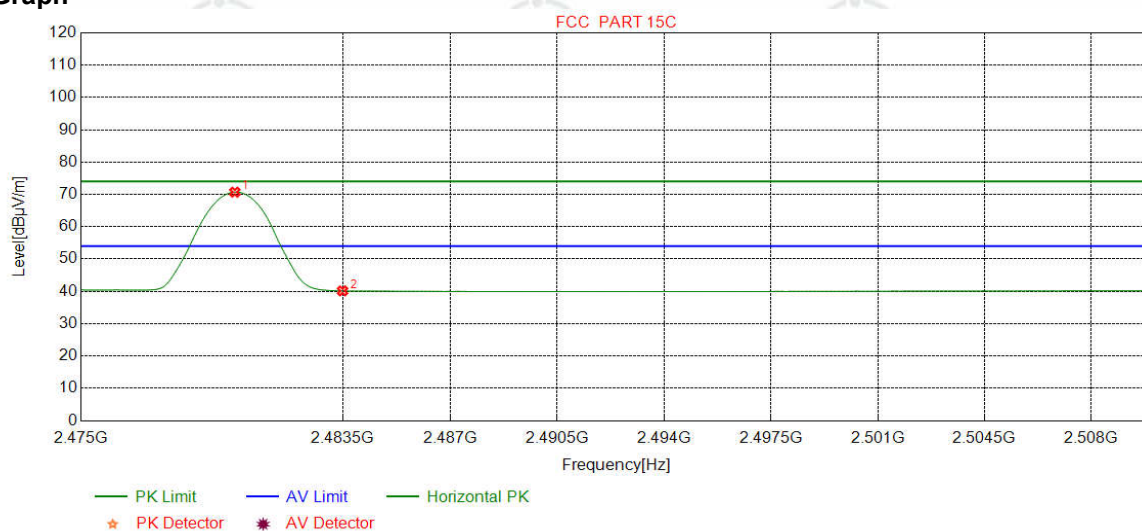

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	67.33	70.70	54.00	-16.70	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.80	40.16	54.00	13.84	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

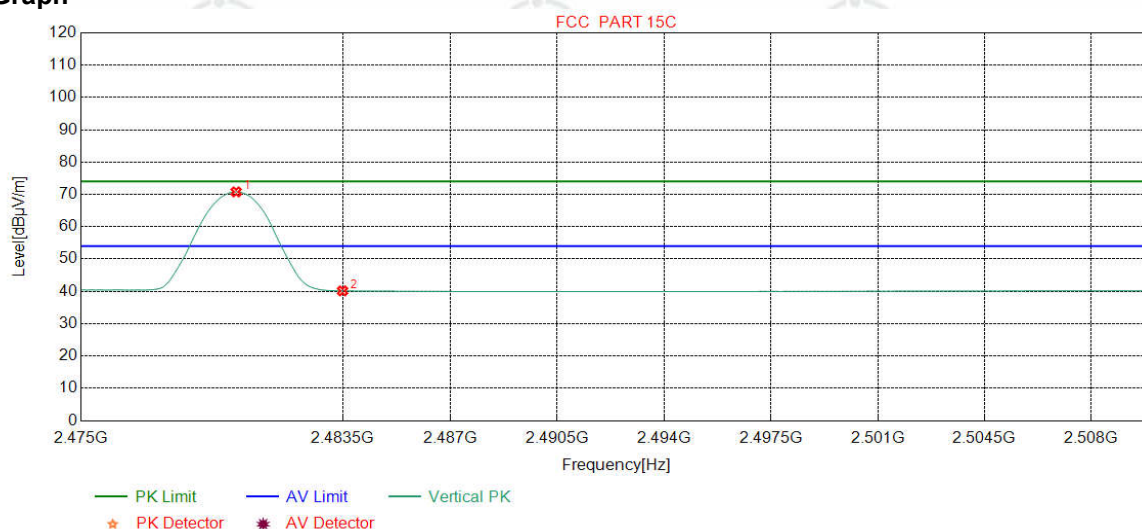

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	67.42	70.79	54.00	-16.79	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.79	40.15	54.00	13.85	Pass	Vertical

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:

Product : R500 Data Collector **Model/Type reference** : R500
Temperature : 23℃ **Humidity** : 54%

Radiated Emission below 1GHz

Mode:		GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	37.7608	11.58	0.69	-32.11	34.05	14.21	40.00	25.79	Pass	H
2	64.5355	10.42	0.92	-32.05	36.36	15.65	40.00	24.35	Pass	H
3	82.3852	7.65	1.05	-32.08	41.47	18.09	40.00	21.91	Pass	H
4	180.4620	9.04	1.58	-31.98	47.12	25.76	43.50	17.74	Pass	H
5	452.7683	16.24	2.52	-31.87	34.07	20.96	46.00	25.04	Pass	H
6	687.5318	19.70	3.14	-32.06	34.99	25.77	46.00	20.23	Pass	H
7	30.2910	10.51	0.63	-32.12	40.54	19.56	40.00	20.44	Pass	V
8	54.6405	12.46	0.84	-32.09	39.23	20.44	40.00	19.56	Pass	V
9	65.4085	10.19	0.92	-32.04	41.28	20.35	40.00	19.65	Pass	V
10	184.2454	9.40	1.59	-31.98	39.63	18.64	43.50	24.86	Pass	V
11	208.8859	11.13	1.71	-31.94	45.53	26.43	43.50	17.07	Pass	V
12	625.0575	19.20	2.97	-31.98	36.08	26.27	46.00	19.73	Pass	V

Mode:		GFSK Transmitting				Channel:		2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	37.6638	11.55	0.69	-32.11	34.02	14.15	40.00	25.85	Pass	H
2	64.9235	10.32	0.92	-32.05	36.45	15.64	40.00	24.36	Pass	H
3	80.1540	7.14	1.04	-32.07	42.45	18.56	40.00	21.44	Pass	H
4	182.4993	9.24	1.59	-31.99	47.39	26.23	43.50	17.27	Pass	H
5	457.2307	16.32	2.55	-31.85	33.86	20.88	46.00	25.12	Pass	H
6	687.5318	19.70	3.14	-32.06	35.40	26.18	46.00	19.82	Pass	H
7	30.1940	10.51	0.63	-32.12	42.13	21.15	40.00	18.85	Pass	V
8	55.2225	12.36	0.84	-32.07	39.58	20.71	40.00	19.29	Pass	V
9	65.5056	10.17	0.92	-32.04	40.84	19.89	40.00	20.11	Pass	V
10	184.3424	9.41	1.59	-31.98	40.02	19.04	43.50	24.46	Pass	V
11	208.8859	11.13	1.71	-31.94	45.48	26.38	43.50	17.12	Pass	V
12	625.0575	19.20	2.97	-31.98	36.07	26.26	46.00	19.74	Pass	V

Mode:		GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	30.1940	10.51	0.63	-32.12	42.13	21.15	40.00	18.85	Pass	H
2	55.2225	12.36	0.84	-32.07	39.58	20.71	40.00	19.29	Pass	H
3	65.5056	10.17	0.92	-32.04	40.84	19.89	40.00	20.11	Pass	H
4	184.3424	9.41	1.59	-31.98	40.02	19.04	43.50	24.46	Pass	H
5	208.8859	11.13	1.71	-31.94	45.48	26.38	43.50	17.12	Pass	H
6	625.0575	19.20	2.97	-31.98	36.07	26.26	46.00	19.74	Pass	H
7	30.2910	10.51	0.63	-32.12	41.33	20.35	40.00	19.65	Pass	V
8	55.3195	12.35	0.84	-32.07	40.03	21.15	40.00	18.85	Pass	V
9	65.2145	10.24	0.92	-32.04	40.65	19.77	40.00	20.23	Pass	V
10	184.3424	9.41	1.59	-31.98	39.14	18.16	43.50	25.34	Pass	V
11	208.8859	11.13	1.71	-31.94	45.93	26.83	43.50	16.67	Pass	V
12	625.0575	19.20	2.97	-31.98	37.30	27.49	46.00	18.51	Pass	V

Transmitter Emission above 1GHz

Mode:		GFSK Transmitting				Channel:		2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	4804.0000	34.50	4.55	-40.66	44.87	43.26	74.00	30.74	Pass	H
2	7206.0000	36.31	5.81	-41.02	45.47	46.57	74.00	27.43	Pass	H
3	9608.0000	37.64	6.63	-40.76	44.22	47.73	74.00	26.27	Pass	H
4	12010.0000	39.31	7.60	-41.21	43.46	49.16	74.00	24.84	Pass	H
5	4804.0000	34.50	4.55	-40.66	45.58	43.97	74.00	30.03	Pass	V
6	7206.0000	36.31	5.81	-41.02	44.27	45.37	74.00	28.63	Pass	V
7	9608.0000	37.64	6.63	-40.76	45.02	48.53	74.00	25.47	Pass	V
8	12010.0000	39.31	7.60	-41.21	43.16	48.86	74.00	25.14	Pass	V

Mode:		GFSK Transmitting				Channel:		2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	4882.0000	34.50	4.81	-40.60	45.12	43.83	74.00	30.17	Pass	H
2	7323.0000	36.42	5.85	-40.91	42.92	44.28	74.00	29.72	Pass	H
3	9764.0000	37.71	6.71	-40.62	43.69	47.49	74.00	26.51	Pass	H
4	12205.0000	39.42	7.67	-41.16	44.69	50.62	74.00	23.38	Pass	H
5	4882.0000	34.50	4.81	-40.60	44.68	43.39	74.00	30.61	Pass	V
6	7323.0000	36.42	5.85	-40.91	43.82	45.18	74.00	28.82	Pass	V
7	9764.0000	37.71	6.71	-40.62	42.18	45.98	74.00	28.02	Pass	V
8	12205.0000	39.42	7.67	-41.16	43.57	49.50	74.00	24.50	Pass	V

Mode:		GFSK Transmitting				Channel:		2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	4960.0000	34.50	4.82	-40.53	45.17	43.96	74.00	30.04	Pass	H
2	7440.0000	36.54	5.85	-40.82	44.11	45.68	74.00	28.32	Pass	H
3	9920.0000	37.77	6.79	-40.48	42.63	46.71	74.00	27.29	Pass	H
4	12400.0000	39.54	7.86	-41.12	45.05	51.33	74.00	22.67	Pass	H
5	4960.0000	34.50	4.82	-40.53	45.52	44.31	74.00	29.69	Pass	V
6	7440.0000	36.54	5.85	-40.82	44.23	45.80	74.00	28.20	Pass	V
7	9920.0000	37.77	6.79	-40.48	42.59	46.67	74.00	27.33	Pass	V
8	12400.0000	39.54	7.86	-41.12	43.71	49.99	74.00	24.01	Pass	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.