
								mo	odel n	ame: Mars1417V			
TOL +													//
RANGE	M1	M2	S1	S2	P1	P2	С	В					1 /
0~6	. 05	0. 1	. 15	0.2	. 05	0. 1	0.5	. 15					1 1
6~30	0. 1	0.2	. 15	. 25	0.1	. 15	1	. 15					1 1
30~80	. 15	. 25	0.2	0.3	0.2	0.4	2	. 25	A 1	去除小人标志,产品型号更改、			
80~180	. 15	0.3	. 25	. 45	0.4	0.8	3	. 25	A1	接入电源参数更改、增加FCC标示			08/20/14
180~315	0. 2	0. 5	0.4	0.6	0.6	1.2	3	0.3	A0	release			07/31/14
315~800	0.3	0.8	0.7	1. 1	0.8	1.5	4	0.5	ITEM	CONTENTS OF CHANGE	RVS	APV	M/D/Y

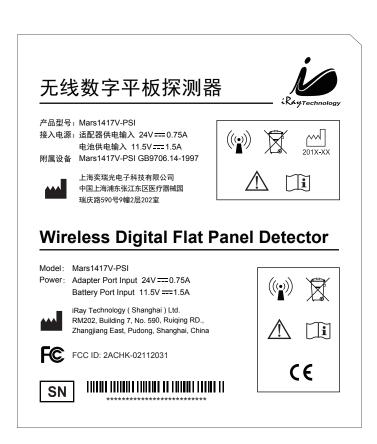

备注:

- 1. 生产日期暂用201X-XX代替。
- 2. 图示中SN条码仅作为位置示范。

Material (or approved equivalent):	Treatment.		Finishing.		
General Tolerances to:	Part No.			_	
	Drawn	WEN	NJUAN.GU	2014-08-20	
Description	Checke	ed			
研发试制	Releas	ed			
	Scale 1:1 Unit MM		MM	Mod. No	
	Doc.Type 标签	Lang	中文		
IRAY TECHNOLOGY Ltd	Doc.No 03	32-215-44		Rev. A1	

file name:

Mars1417V-探测器-中英文标签

