







ISO/IEC17025Accredited Lab.

Report No: FCC 1407023-03 File reference No: 2014-07-07

Applicant: Shenzhen Longgang Huatong Industry Co., Ltd.

Product: TABLET PC

Model No: MID-R7801QC,MID-R7802DC,MID-R7802QC,MID-B7804DC,

MID-B7804QC, MID-R7805QC, MID-R7806QC

Trademark: HUATONG

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: July 07, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: 1407023-03 Page 2 of 87

Date: 2014-07-07



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Date: 2014-07-07



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
6.1	Test Method and Test Procedure	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	33
8.0	Maximum Peak Output Power	49
9.0	Power Spectral Density Measurement.	52
10.0	Out of Band Measurement	67
11.0	Antenna Requirement.	76
12.0	FCC Label.	77
13.0	Photo of Test Setup and EUT View.	78

Date: 2014-07-07



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Longgang Huatong Industry Co., Ltd.

Address: 4-5F, Jinjijia Industrial Park, Xialilang, Nanwan Street, Longgang District, Shenzhen City,

Guangdong Province, P.R. China

Telephone: 00086-755-28886679 Fax: 00086-755-28883034

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Longgang Huatong Industry Co., Ltd.

Address: 4-5F, Jinjijia Industrial Park, Xialilang, Nanwan Street, Longgang District,

Shenzhen City, Guangdong Province, P.R. China

Brand Name: HUATONG
Model Number: MID-R7801QC

Additional Model Name MID-R7802DC,MID-R7802QC,MID-B7804DC,MID-B7804QC,MID-R7805QC,

MID-R7806QC

Power Adapter Model No.: JKY0212-0502000UL

Input: 100-240V, 50/60Hz, 0.3A; Output: 5V, 2A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz;

Channel Spacing 5MHz for IEEE 802.11b/g/n(HT20) Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: Up to 72.2Mbps

Frequency Selection By software

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1407023-03 Page 5 of 87

Date: 2014-07-07



Channel Number

IEEE 802.11b/g/n (HT20): 11 Channels

Antenna:

Integral Antenna with maximum gain -0.73dBi

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2014-06-18 to 2014-07-02

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Report No: 1407023-03 Page 6 of 87

Date: 2014-07-07



2.0	Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2013-08-23	2014-08-22		
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2013-08-23	2014-08-22		
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2013-08-23	2014-08-22		
Ultra Broadband ANT	R&S	HL562	100157	2013-08-25	2014-08-24		
ESDV Test Receiver	R&S	ESDV	100008	2013-08-23	2014-08-22		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2013-08-24	2014-08-23		
System Controller	CT	SC100	-				
Printer	EPSON	РНОТО ЕХЗ	CFNH234850				
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-		
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22		
ESPI Test Receiver	R&S	ESI26	838786/013	2013-08-23	2014-08-22		
3m OATS			N/A	2013-08-22	2014-08-21		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23		
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23		
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-21	2014-08-20		
LISN	AFJ	LS16C	10010947251	2013-08-21	2014-08-20		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22		
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21		
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22		

Report No: 1407023-03 Page 7 of 87

Date: 2014-07-07



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 6.5Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Date: 2014-07-07



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Page 9 of 87


Report No: 1407023-03

Date: 2014-07-07



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

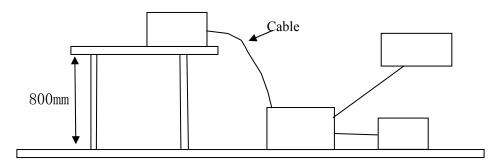

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Longgang Huatong Industry Co., Ltd.	MID-R7801QC	2ACPP-R7801QC

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1407023-03 Page 10 of 87

Date: 2014-07-07



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107 and RSS-210

Frequency Class A Limi		its (dB µ V)	Class B Lim	nits (dB µ V)
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2014-07-07



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

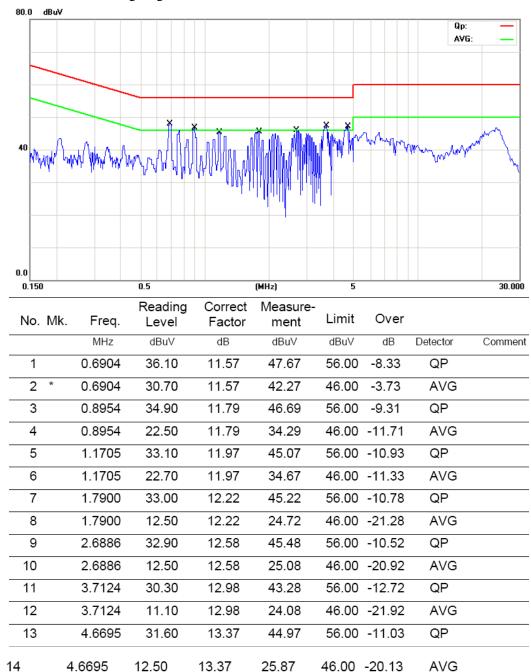

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-07



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

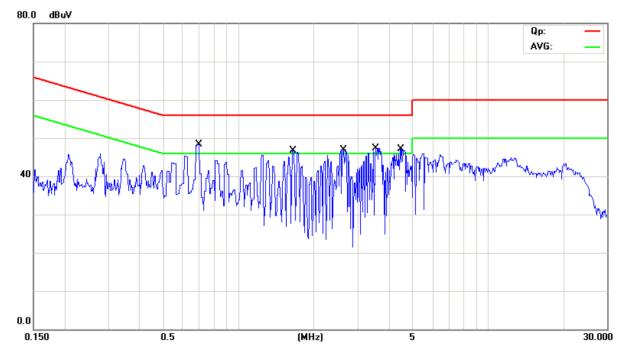

No. MI	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.6914	36.70	11.57	48.27	56.00	-7.73	QP	
2 *	0.6914	30.80	11.57	42.37	46.00	-3.63	AVG	
3	1.6552	34.30	12.16	46.46	56.00	-9.54	QP	
4	1.6552	19.90	12.16	32.06	46.00	-13.94	AVG	
5	2.6241	34.10	12.55	46.65	56.00	-9.35	QP	
6	2.6241	14.90	12.55	27.45	46.00	-18.55	AVG	
7	3.5300	34.20	12.91	47.11	56.00	-8.89	QP	
8	3.5300	13.40	12.91	26.31	46.00	-19.69	AVG	
9	4.4348	32.30	13.27	45.57	56.00	-10.43	QP	
10	4.4348	18.80	13.27	32.07	46.00	-13.93	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1407023-03 Page 13 of 87

Date: 2014-07-07



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1407023-03 Page 14 of 87

Date: 2014-07-07



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1407023-03 Page 15 of 87

Date: 2014-07-07



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Keep WIFI Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
237.600	25.20	Н	46.00
398.240	29.27	Н	46.00
30.240	35.56	V	40.00
399.560	31.75	V	46.00
35.200	31.60	V	40.00


Page 16 of 87

Report No: 1407023-03

Date: 2014-07-07



Test Figure:

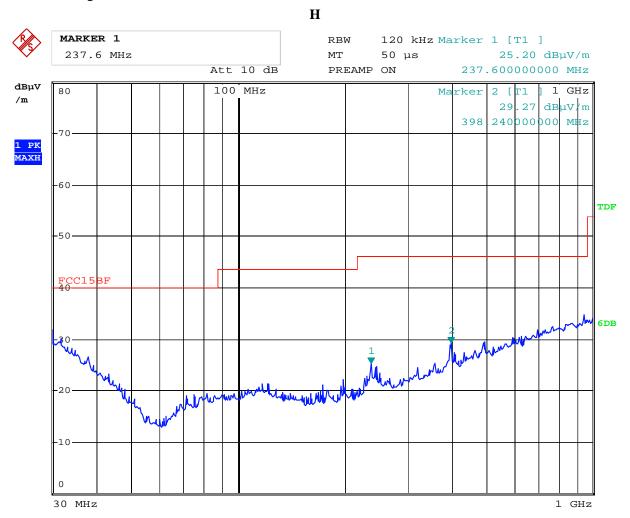


Date: 2.JUL.2014 18:57:18

Report No: 1407023-03 Page 17 of 87

Date: 2014-07-07



Test Figure:

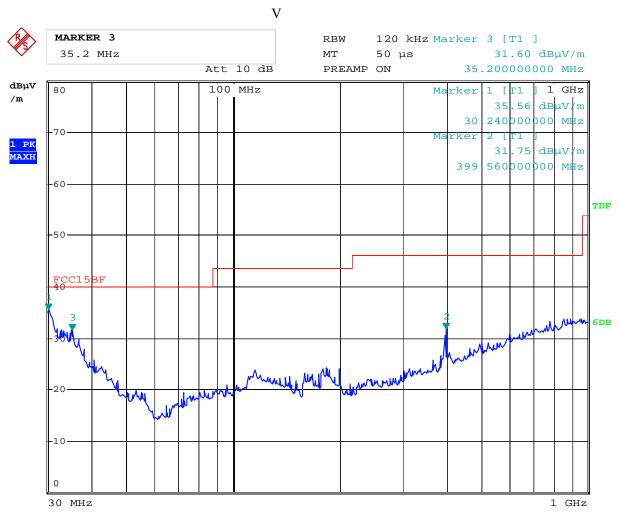

Date: 2.JUL.2014 18:54:10

Report No: 1407023-03 Page 18 of 87

Date: 2014-07-07



Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2412.00	95.39 (PK)	Н	Eundomontal Eroguanov
2412.00	95.19 (PK)	V	Fundamental Frequency
4824.00	48.28 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.32 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2014-07-07



Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2437.00	94.47 (PK)	Н	Fundamental Frequency
2437.00	94.44 (PK)	V	rundamental Frequency
4874.00	48.47 (PK)	V	74(Peak)/ 54(AV)
4874.00	48.82 (PK)	Н	74(Peak)/ 54(AV)
7311.00	ı	H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	1	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2462.00	93.43 (PK)	Н	Eundamental Fraguency
2462.00	93.36 (PK)	V	Fundamental Frequency
4924	48.08 (PK)	Н	74(Peak)/ 54(AV)
4924	47.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158	22158		74(Peak)/ 54(AV)
24650	24650 H/V 74(74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-07




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

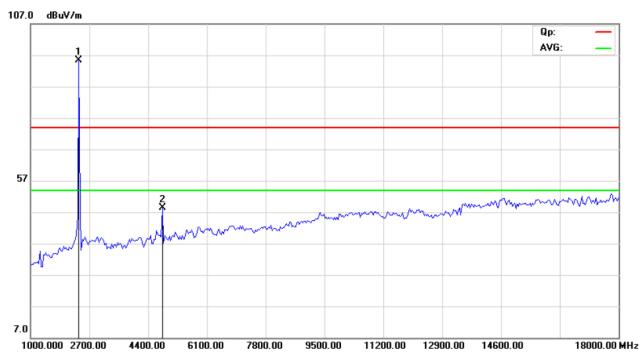

CH01 for 11g at 54Mbps: Vertical

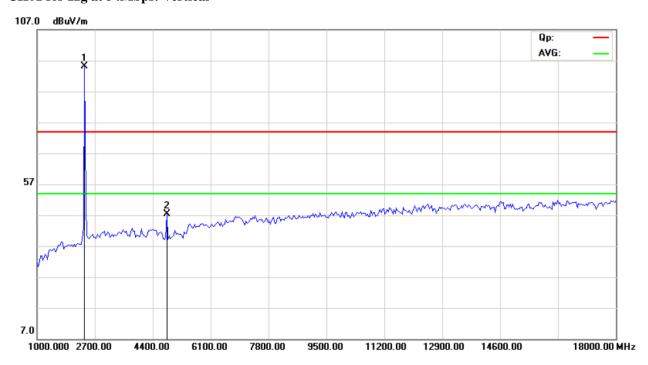


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-07-07



CH06 for 11g at 54Mbps: Vertical

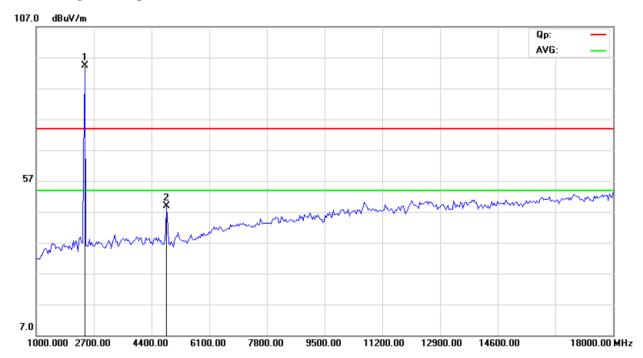

CH06 for 11g at 54Mbps: Horizontal

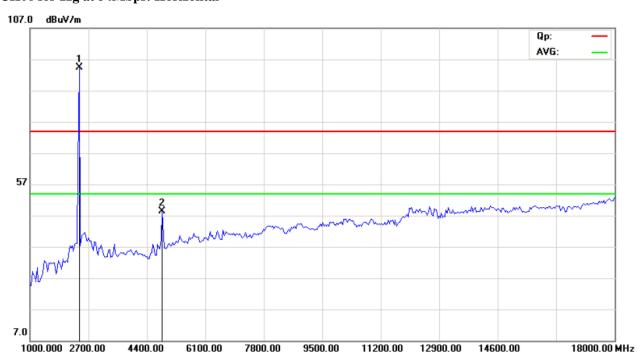


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-07-07



CH11 for 11g at 54Mbps: Vertical

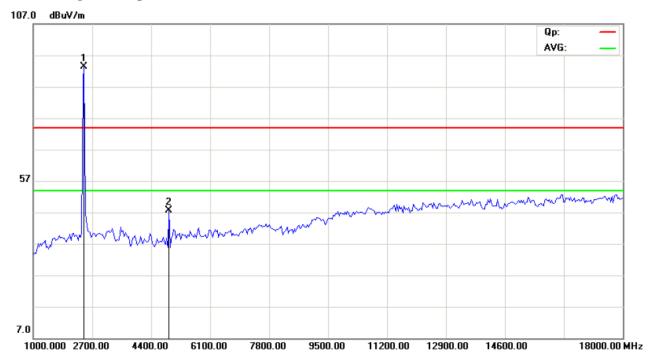

CH11 for 11g at 54Mbps: Horizontal

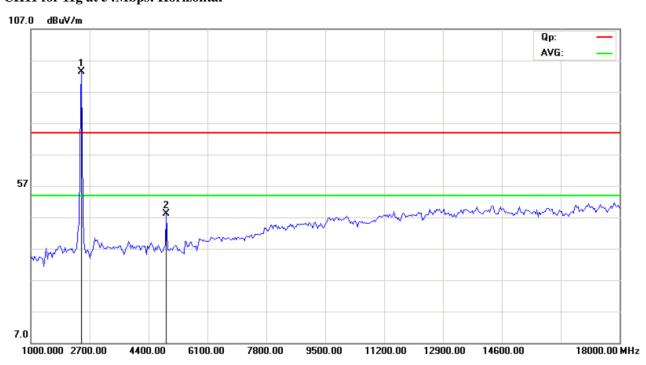

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-07



Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	93.76 (PK)	Н	Fundamental Frequency
2412.00	93.26 (PK)	V	Fundamental Frequency
4824.00	48.82 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120	H/V 74(Peak)/ 5 ²		74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	93.63 (PK)	Н	Fundamental Frequency
2437.00	93.65 (PK)	V	Fundamental Frequency
4874.00	48.62 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.08 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059	-1	H/V	74(Peak)/ 54(AV)
19496	H/V		74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1407023-03 Page 24 of 87

Date: 2014-07-07



Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2462.00	95.24 (PK)	Н	Eundomontal Eroguanov
2462.00	95.45 (PK)	V	Fundamental Frequency
4924	48.29 (PK)	Н	74(Peak)/ 54(AV)
4924	48.63 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps

Date: 2014-07-07




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

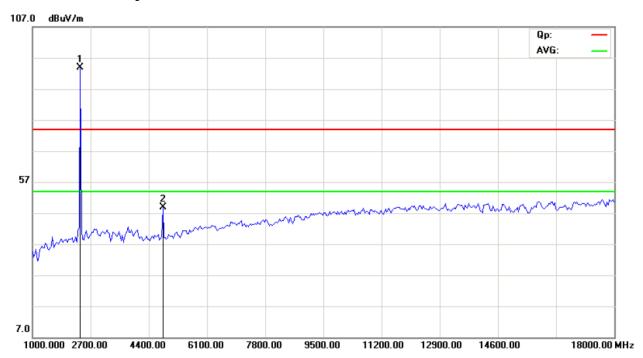

CH01 for 11b at 11Mbps: Vertical

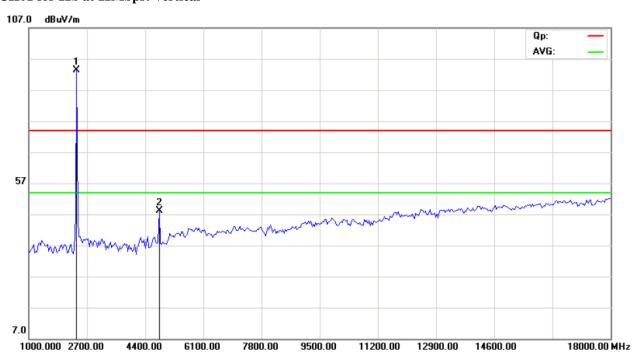


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-07-07



CH06 for 11b at 11Mbps: Vertical

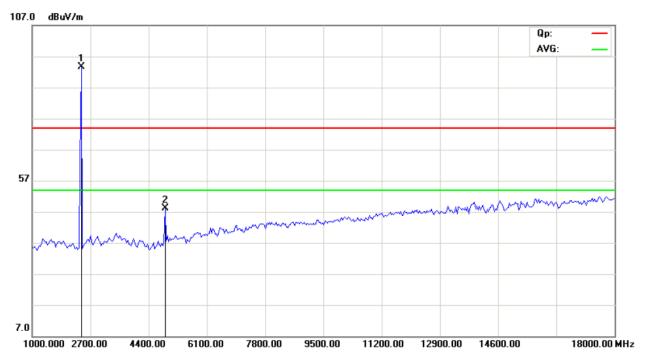


CH06 for 11b at 11Mbps: Horizontal

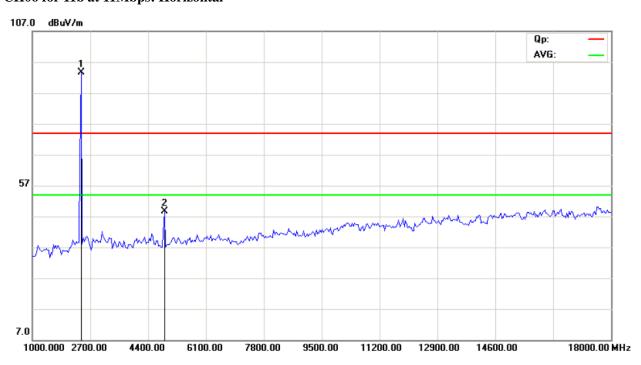


Date: 2014-07-07



CH11 for 11b at 11Mbps: Vertical

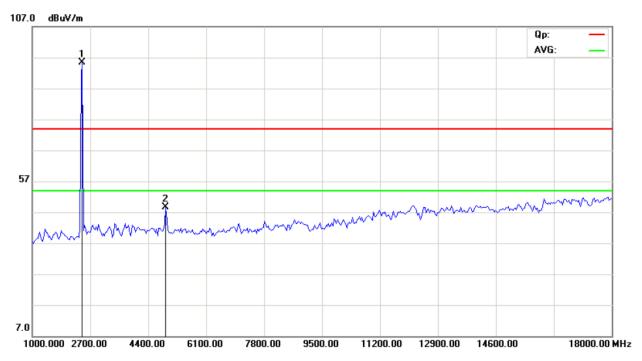

CH11 for 11b at 11Mbps: Horizontal

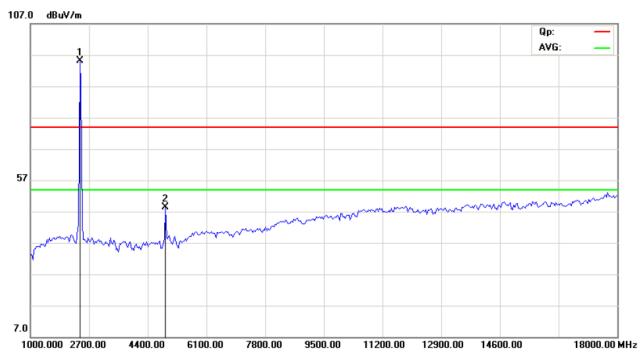

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-07



Operation Mode: Transmitting under CH01 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	94.36 (PK)	Н	Fundamental Frequency
2412.00	94.42 (PK)	V	Fundamental Frequency
4824.00	48.85 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.59 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V 74(Peak)/ 54(A	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 6.5Mbps

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
2437.00	93.55 (PK)	Н	Fundamental Frequency
2437.00	93.51 (PK)	V	Fundamental Frequency
4874.00	48.54 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.69 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1407023-03 Page 29 of 87

Date: 2014-07-07



Operation Mode: Transmitting under CH11 for 11n HT20 at 6.5Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2462.00	95.62 (PK)	Н	Even do montal Engavon av
2462.00	95.31 (PK)	V	Fundamental Frequency
4924	46.69 (PK)	Н	74(Peak)/ 54(AV)
4924	48.14 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V 74(Peak)/ 5	
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V 74(Peak)/ 54	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 6.5Mbps

Date: 2014-07-07




Please refer to the following test plots for details:

CH01 for 11n HT20 at 6.5Mbps: Horizontal

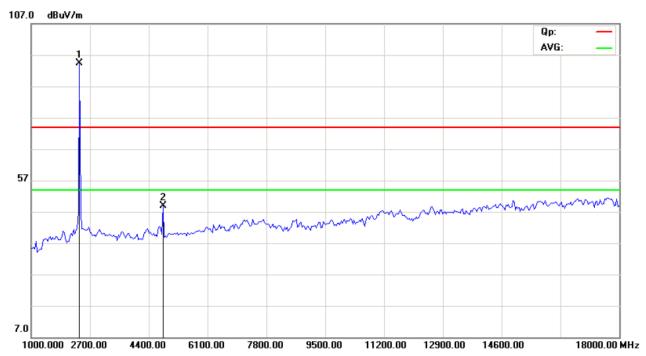

CH01 for 11n HT20 at 6.5Mbps: Vertical

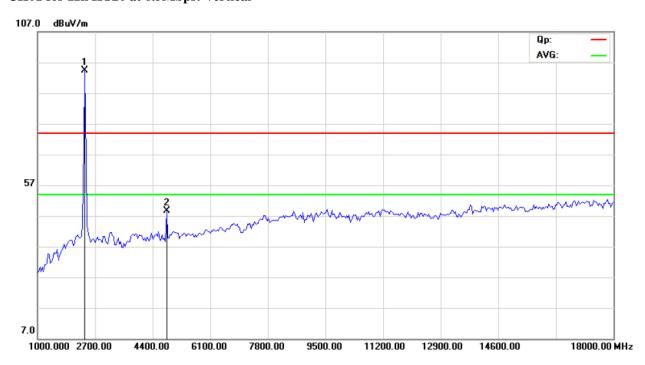


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-07-07



CH06 for 11n HT20 at 6.5Mbps: Vertical

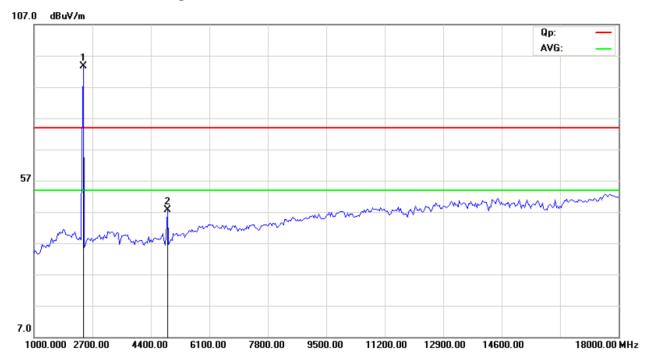

CH06 for 11n HT20 at 6.5Mbps: Horizontal

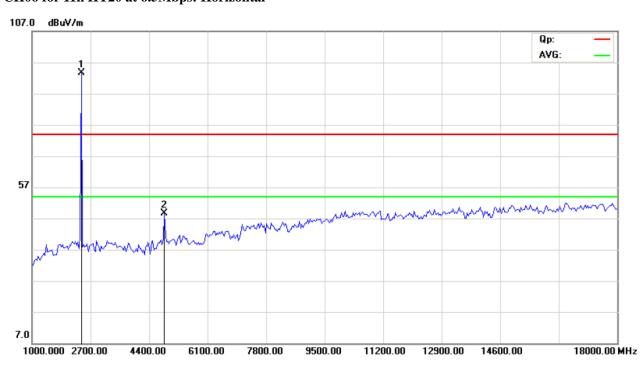


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Date: 2014-07-07



CH11 for 11n HT20 at 6.5Mbps: Vertical

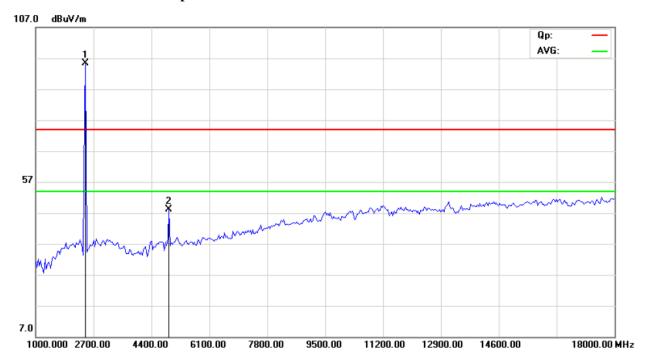

CH11 for 11n HT20 at 6.5Mbps: Horizontal

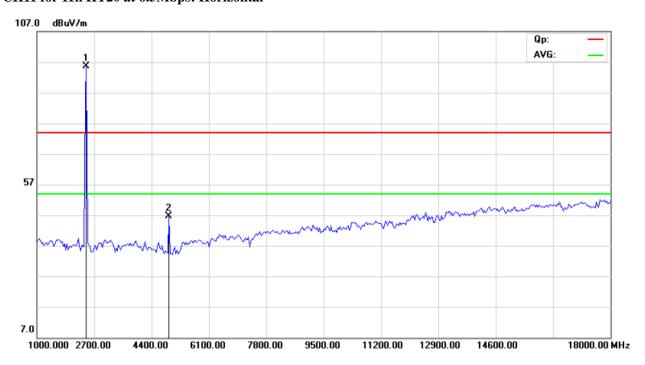

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: 1407023-03 Page 33 of 87

Date: 2014-07-07



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: 1407023-03 Page 34 of 87

Date: 2014-07-07



6dB Occupied Bandwidth


EUT		Tablet PC		Model		MID-R7801QC		
Mode 802		302.11b	02.11b II		Input Voltage		3.7V	
Temperature 24		4 deg. C,		Humidity		56% RH		
Channel		el Frequency Transfer 6 dB Bar (MHz) Rate (MHz) (Mbps)				Pass/ Fail		
1		2412	1	7.136		36 0.5		Pass
6		2437	1	7.111			0.5	Pass
11		2462	1	7.117			0.5	Pass
1		2412	11	7.037			0.5	Pass
6		2437	11	7.609			0.5	Pass
11		2462	11	6.6	673		0.5	Pass

Report No: 1407023-03 Page 35 of 87

Date: 2014-07-07



1. 802.11b at 1Mbps of CH01

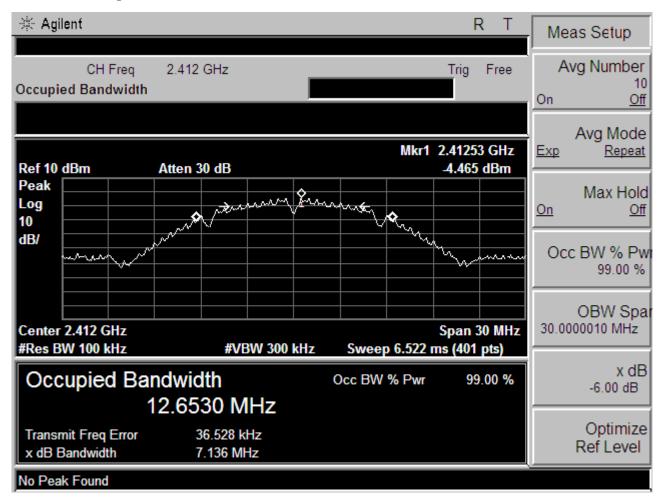


Report No: 1407023-03 Page 36 of 87

Date: 2014-07-07




2. 802.11b at 1Mbps of CH06

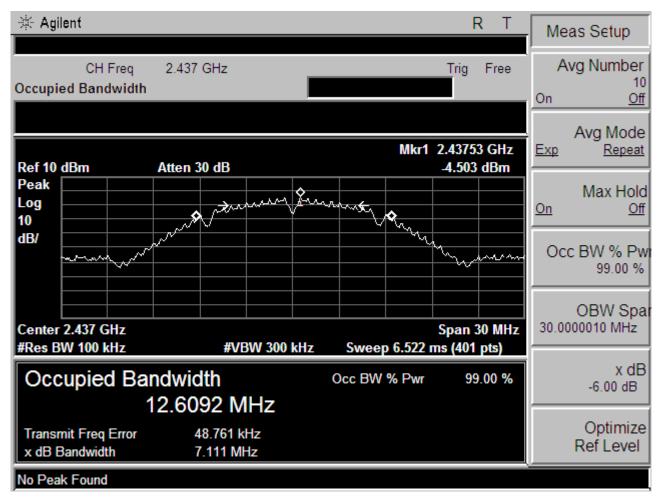

Report No: 1407023-03 Page 37 of 87

Date: 2014-07-07




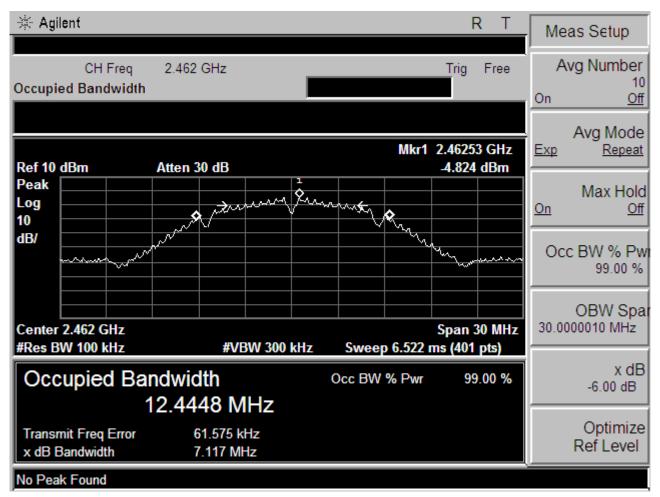

Report No: 1407023-03 Page 38 of 87

Date: 2014-07-07




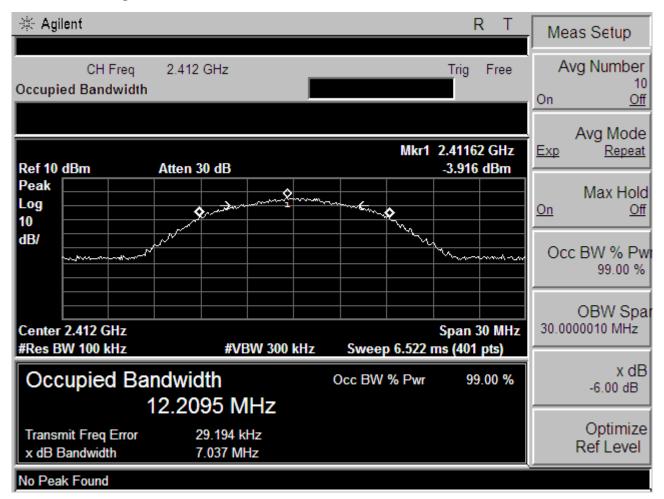

Report No: 1407023-03 Page 39 of 87

Date: 2014-07-07




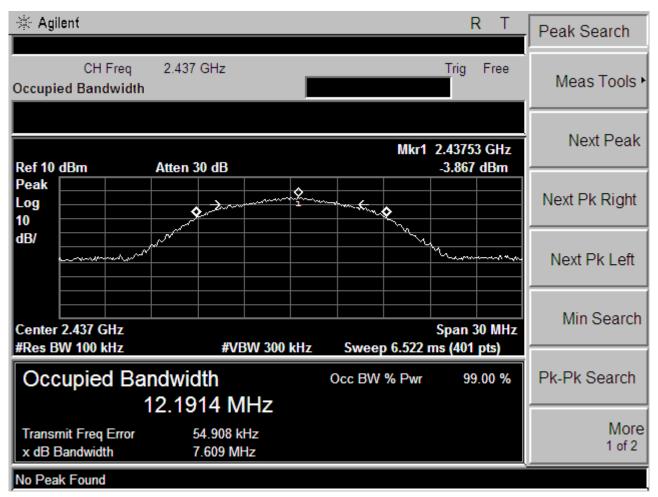

Report No: 1407023-03 Page 40 of 87

Date: 2014-07-07



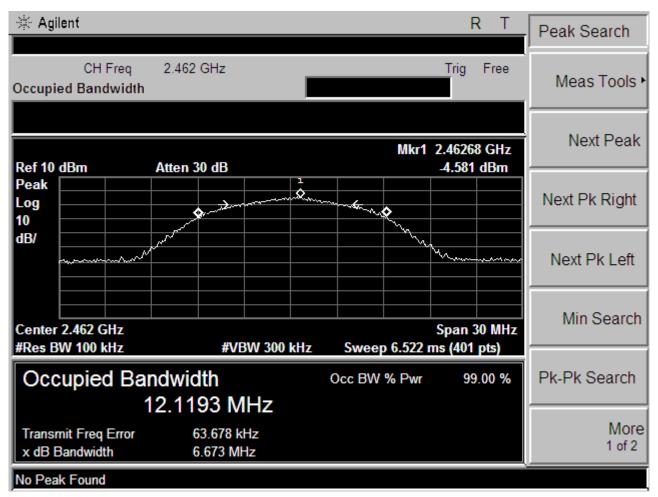

Report No: 1407023-03 Page 41 of 87

Date: 2014-07-07



6dB Occupied Bandwidth


EUT		Ta	ablet PC		Model		MID	-R7801QC
Mode		8	302.11g		Input Vol	tage	Ι	DC3.7V
Temperat	ure	24	4 deg. C,		Humidity	Humidity		6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	54	15.	166	166		Pass
6		2437	54	15.163		0.5		Pass
11		2462	54	15.	197		0.5	Pass

Report No: 1407023-03 Page 42 of 87

Date: 2014-07-07




Test Plots:

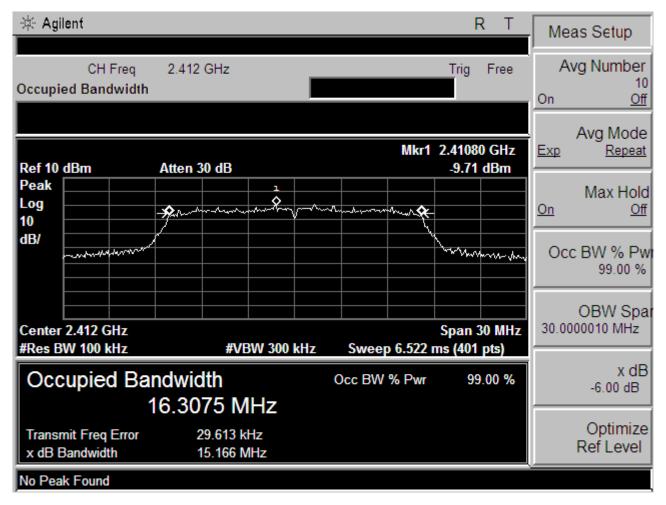

Report No: 1407023-03 Page 43 of 87

Date: 2014-07-07




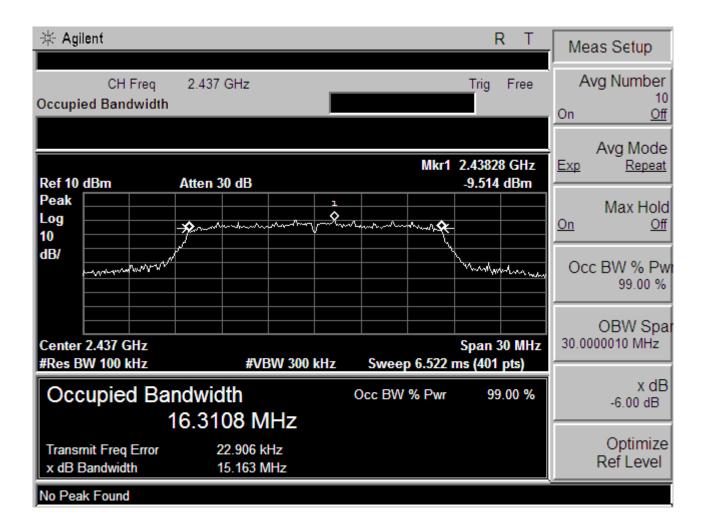

Report No: 1407023-03 Page 44 of 87

Date: 2014-07-07



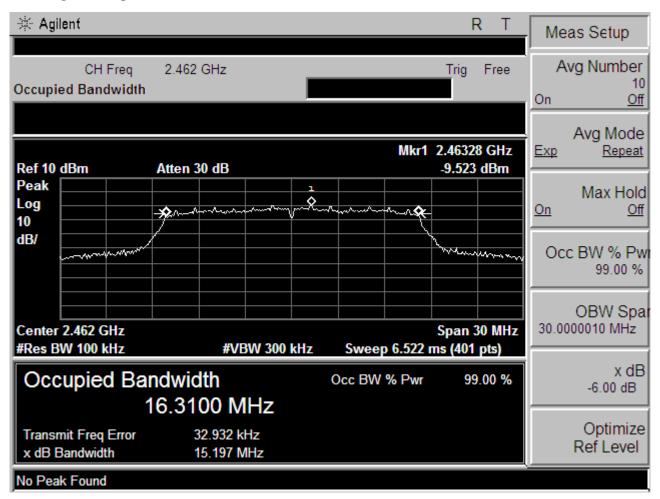

Report No: 1407023-03 Page 45 of 87

Date: 2014-07-07



6dB Occupied Bandwidth

EUT		T	ablet PC		Model		MID-R7801QC	
Mode		802	.11n HT20		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity	y 56% RH		% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ındwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	6.5M	15.	176		0.5	Pass
6		2437	6.5M	15.	184		0.5	Pass
11		2462	6.5M	16.	098		0.5	Pass

Page 46 of 87


Date: 2014-07-07



Test Plots:

1. 802.11n at HT20 of CH01


Report No: 1407023-03

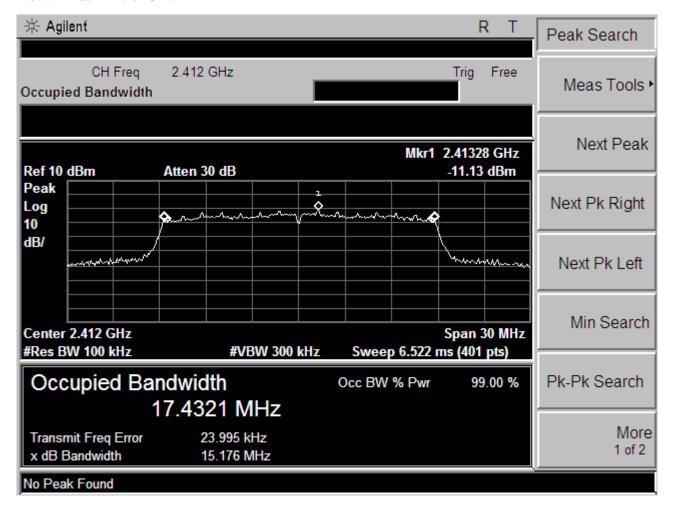

Report No: 1407023-03 Page 47 of 87

Date: 2014-07-07




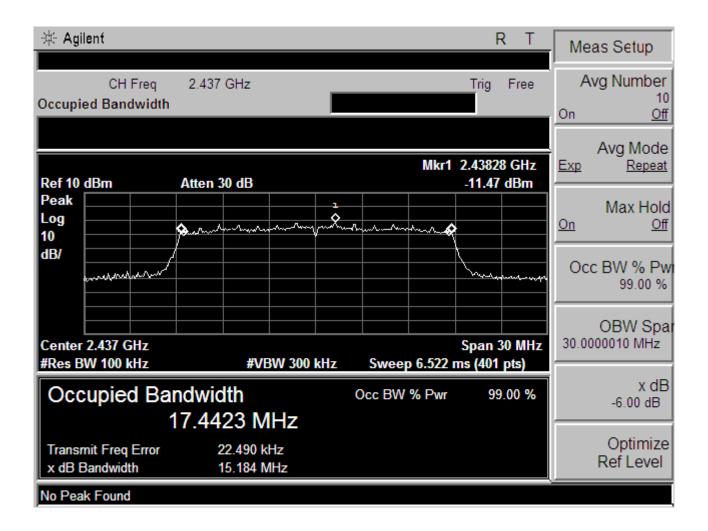

Report No: 1407023-03 Page 48 of 87

Date: 2014-07-07



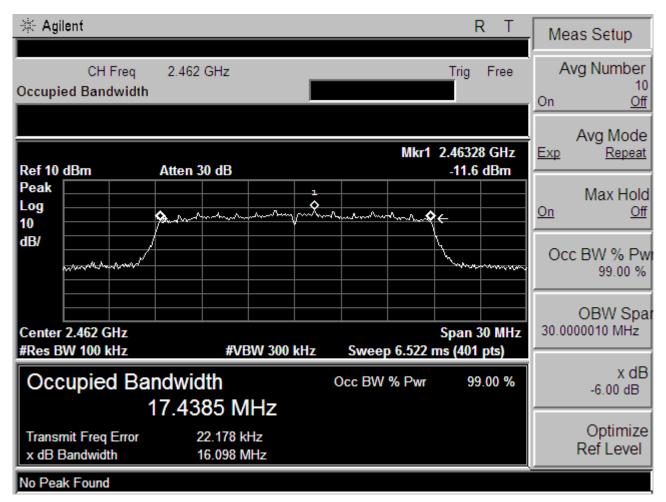

Report No: 1407023-03

Date: 2014-07-07



Page 49 of 87

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: 1407023-03 Page 50 of 87

Date: 2014-07-07



8.4Test Results

EUT	Tablet		PC Me		odel M		ID-R7801QC
Mode	Mode 802.11b		1b Input Voltag		Voltage	DC3.7V	
Temperat	ure	24 deg	24 deg. C, Humidity			56% RH	
Channel	hannel Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	8.45		30		Pass
6		2437	8.14		30		Pass
11		2462	8.14		30		Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT	EUT Tablet F		PC Mo		odel MI		ID-R7801QC
Mode	Mode 802.11g		1g	Input Voltage		DC3.7V	
Temperat	ure	24 deg	24 deg. C, Humidity			56% RH	
Channel	el Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	6.83	6.83)	Pass
6		2437	6.41	6.41)	Pass
11		2462	6.39		30		Pass

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No: 1407023-03 Page 51 of 87

Date: 2014-07-07



EUT	EUT Tablet		PC Mc		odel N		MID-R7801QC	
Mode		802.11n (11n (HT20) Input Voltage		DC3.7V			
Temperati	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Cha	annel Frequency (MHz)	Peak Power C (dBm)	i Lin		nit	Pass/ Fail	
1		2412	4.54		30		Pass	
6		2437	4.53		30		Pass	
11		2462	4.45	•	30		Pass	

Note: 1. At finial test to get the worst-case emission at 6.5Mbps of 11n HT20 for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow: Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No: 1407023-03 Page 52 of 87

Date: 2014-07-07



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = \max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: 1407023-03 Page 53 of 87

Date: 2014-07-07



9.4Test Result

EUT	EUT Tablet		t PC Mo		odel M		ID-R7801QC
Mode 802.11b 11Mbps		Input Voltage		DC3.7V			
Temperat	ure	24 deg	24 deg. C, Humidity			56% RH	
Channel	Cha	annel Frequency (MHz)	1		Maximum Limit (dBm)		Pass/ Fail
			11Mbps	S			
1		2412	-12.43		8		Pass
6		2437	-12.79	8			Pass
11		2462	-13.15		8		Pass

EUT	EUT Tablet		t PC Mo		odel M		ID-R7801QC
Mode	Mode 802.11b		1Mbps Input		Input Voltage		DC3.7V
Temperat	ure	24 deg	g. C,	Humidity			56% RH
Channal	Channel Frequency Final RF Power		wer	Maximum Limit		Pass/ Fail	
Channel	Channel (Level in (dBm)		(dB	m)	
			1Mbps				
1		2412	-12.09		8		Pass
6		2437	-13.04		8		Pass
11		2462	-13.03		8		Pass

Report No: 1407023-03 Page 54 of 87

Date: 2014-07-07



EUT	EUT Tablet		t PC Mod		odel M		ID-R7801QC	
Mode	Mode 802.11g 54Mbps Input Voltage		DC3.7V					
Temperati	ure	24 deg	g. C,	Hur	Humidity		56% RH	
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail	
Chamie		(MHz)	Level in (dBm)		(dBm)			
			54Mbp	S				
1		2412	-17.77		8		Pass	
6		2437	-17.38		8	Pass Pass		
11		2462	-16.56	8			Pass	


EUT	EUT Tablet		t PC Moo		odel M		ID-R7801QC	
Mode	Mode 802.11n HT20 6.5Mbps Input Voltag		Voltage		DC3.7V			
Temperat	ure	24 deg	g. C,	Hur	umidity		56% RH	
Channel	Channel Frequ		Final RF Power		Maximum Limit		Pass/ Fail	
Chamilei		(MHz)	Level (dBm)		(dBm)			
			HT20					
1		2412	-18.53		8		Pass	
6		2437 -19.37			8		Pass	
11		2462	-17.86		8		Pass	

Report No: 1407023-03 Page 55 of 87

Date: 2014-07-07



9.5 Photo of Power Spectral Density Measurement

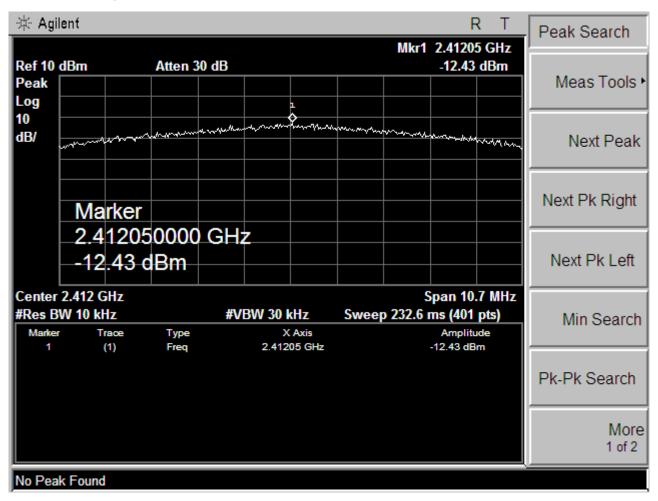


Page 56 of 87

Report No: 1407023-03

Date: 2014-07-07




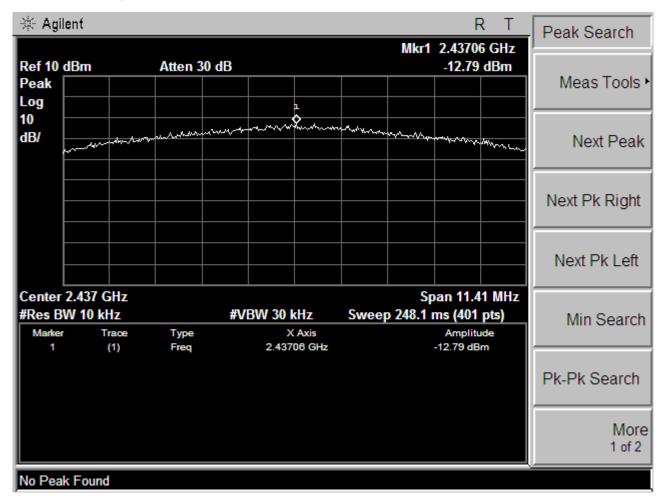

Report No: 1407023-03 Page 57 of 87

Date: 2014-07-07



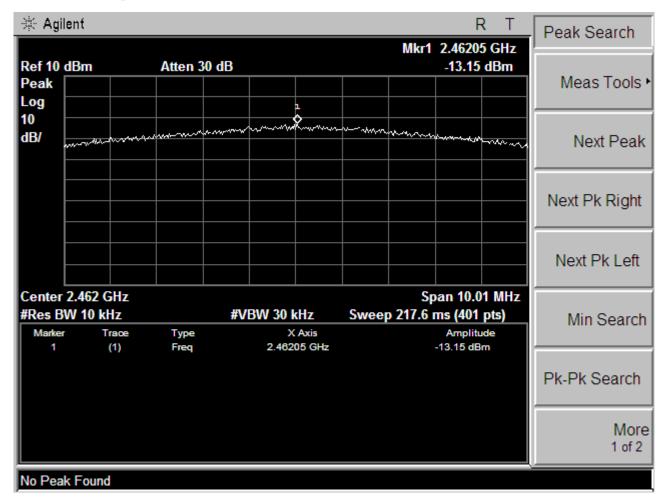


Page 58 of 87

Report No: 1407023-03

Date: 2014-07-07



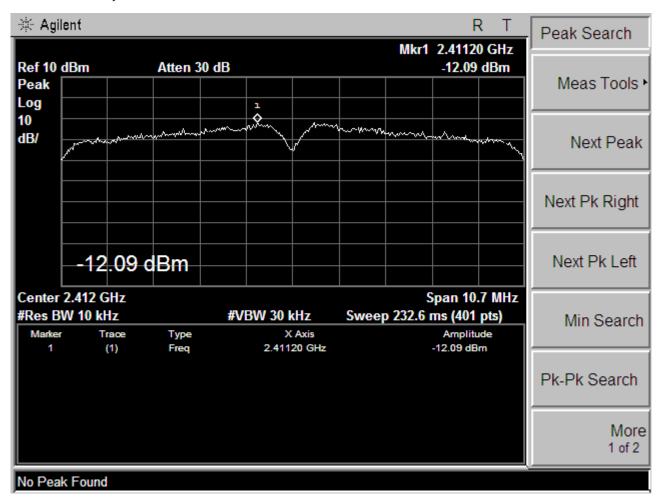


Page 59 of 87

Report No: 1407023-03

Date: 2014-07-07



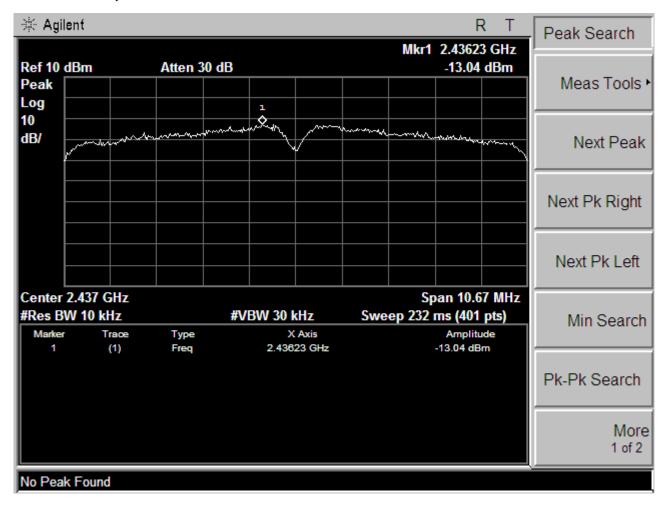


Page 60 of 87

Report No: 1407023-03

Date: 2014-07-07



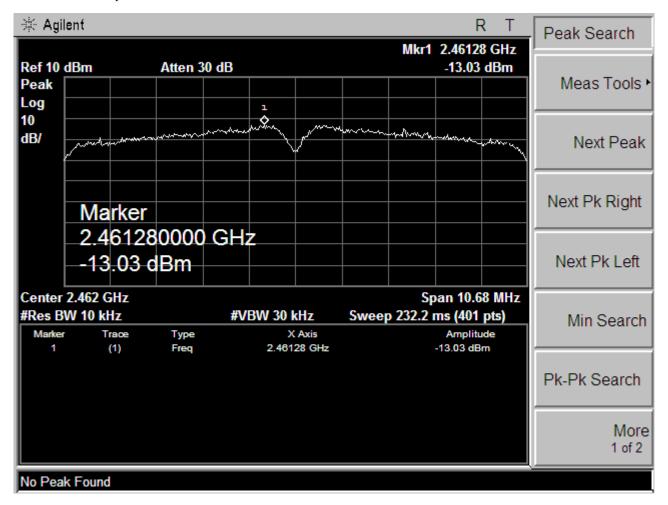


Page 61 of 87

Report No: 1407023-03

Date: 2014-07-07



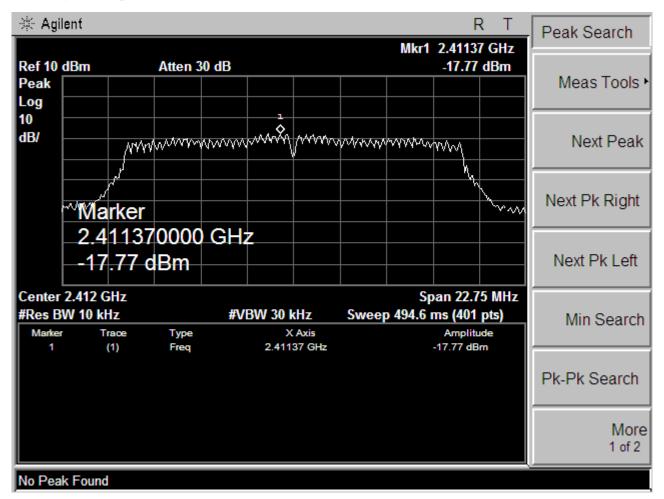


Page 62 of 87

Report No: 1407023-03

Date: 2014-07-07



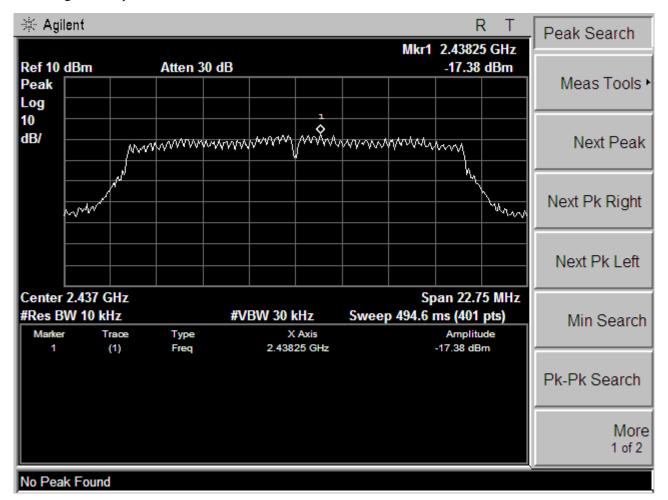


Page 63 of 87

Report No: 1407023-03

Date: 2014-07-07



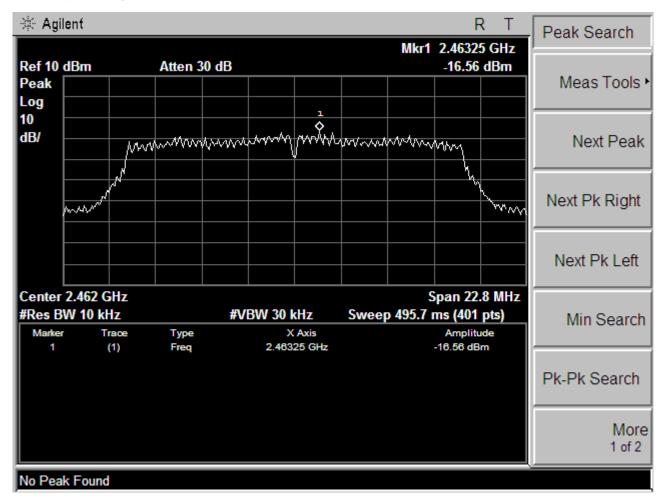


Page 64 of 87

Report No: 1407023-03

Date: 2014-07-07



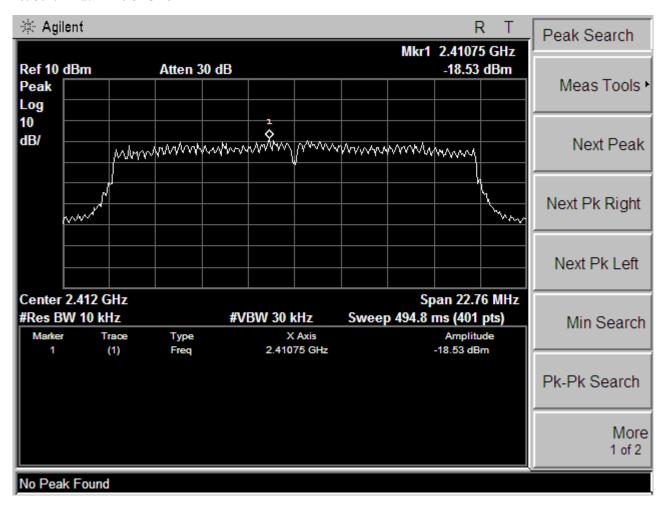


Page 65 of 87

Report No: 1407023-03

Date: 2014-07-07



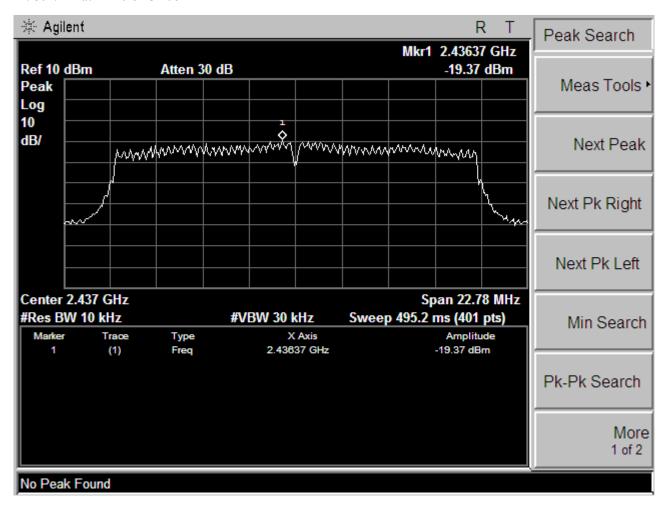


Page 66 of 87

Report No: 1407023-03

Date: 2014-07-07



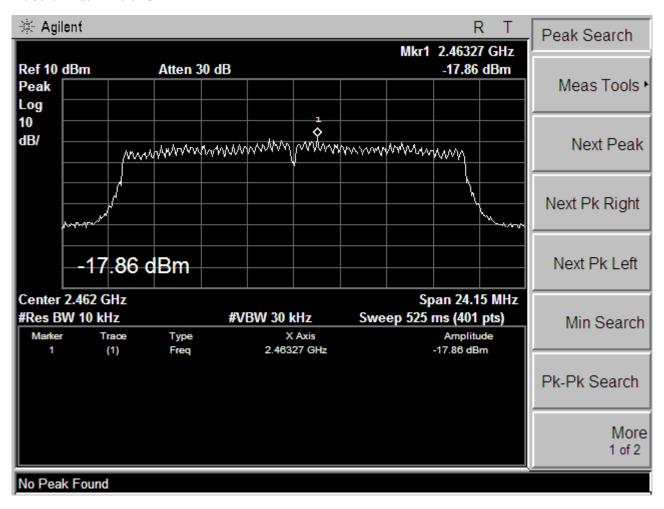


Report No: 1407023-03 Page 67 of 87

Date: 2014-07-07



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No: 1407023-03

Date: 2014-07-07




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	45.46	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	38.05	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure:

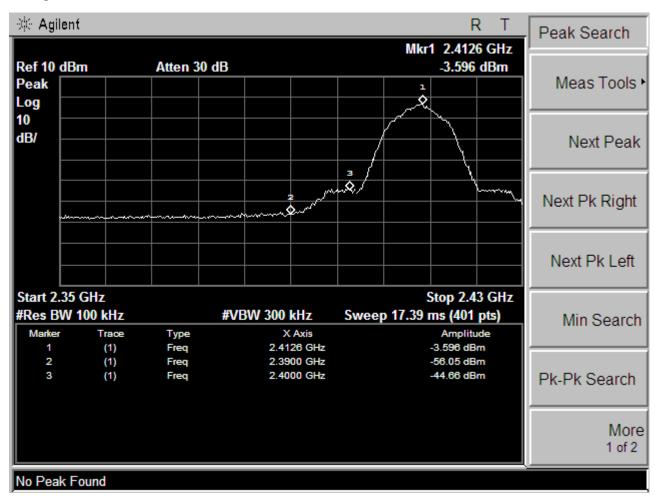

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 69 of 87

Report No: 1407023-03

Date: 2014-07-07




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2483.5	PK (dBµV/m)	42.22	T took	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

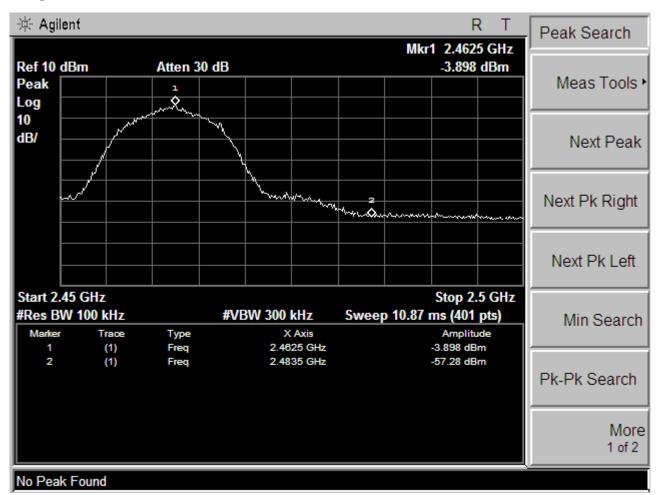

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 70 of 87

Report No: 1407023-03

Date: 2014-07-07




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400	PK (dBµV/m)	46.19	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$
2390	PK (dBµV/m)	38.17	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure:

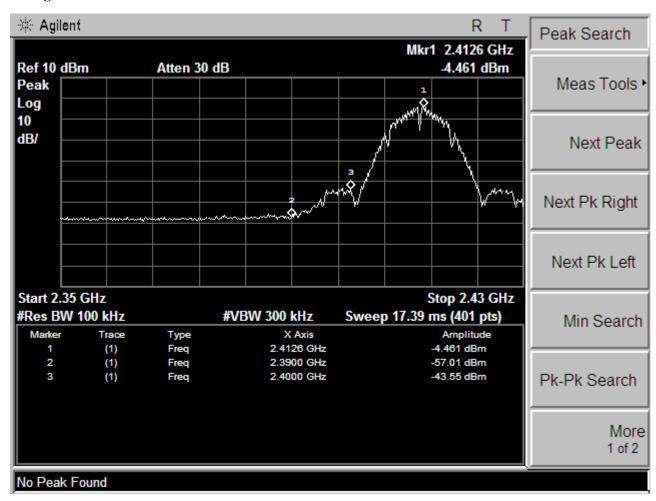

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 71 of 87

Report No: 1407023-03

Date: 2014-07-07




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	42.60	T **4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

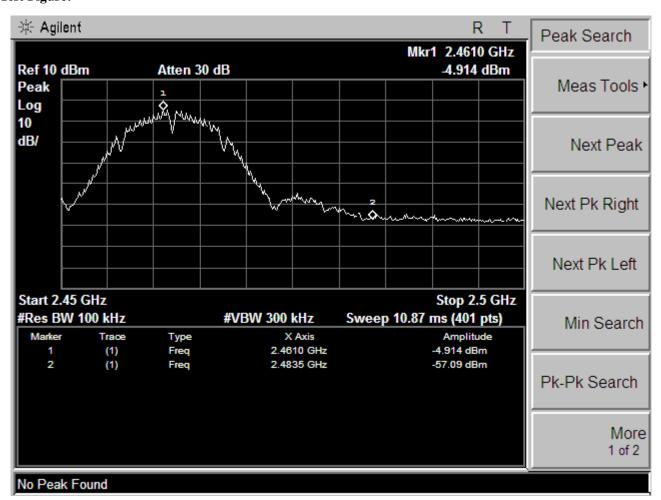

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 72 of 87

Report No: 1407023-03

Date: 2014-07-07




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC		
Mode	Keeping Transmitting		Input Voltage	DC3.7V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:	Pass		Detector	PK		
2400	PK (dBμV/m)	47.57	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)			$54(dB\mu V/m)$		
2390	PK (dBμV/m)	40.70	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)			54(dBμV/m)		

Test Figure:

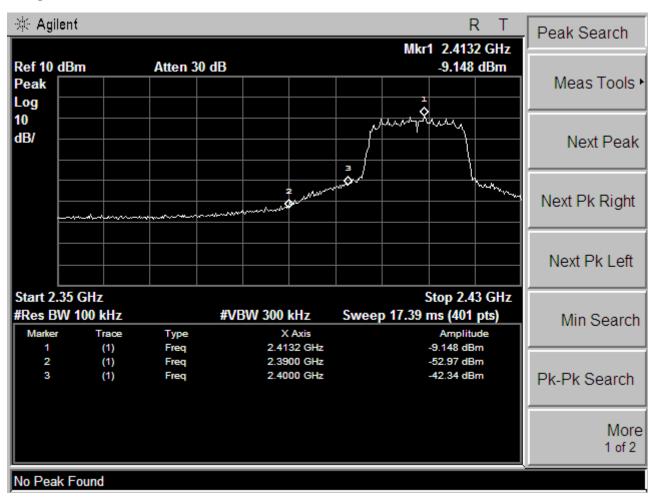

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 73 of 87

Report No: 1407023-03

Date: 2014-07-07




CH11 at 54Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model		MID-R7801QC
Mode	Keeping Transmitting		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Test Result:	Pass		Detector		PK
2483.5	PK (dBµV/m)	44.78	T 1 14	$74(dB\mu V/m)$ $54(dB\mu V/m)$	
	AV (dBμV/m)		Limit		

Test Figure:

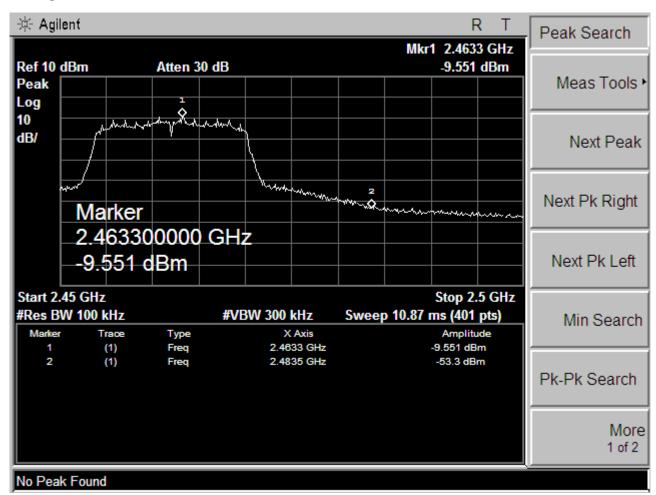

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2014-07-07




For 802.11n (HT20) mode

CH01 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Tablet PC		Model	MID-R7801QC
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBμV/m)	47.35	Limit	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBµV/m)
2390	PK (dBµV/m)	41.22	Limit	74(dBµV/m)
	AV (dBμV/m)		Lillit	54(dBµV/m)

Test Figure:

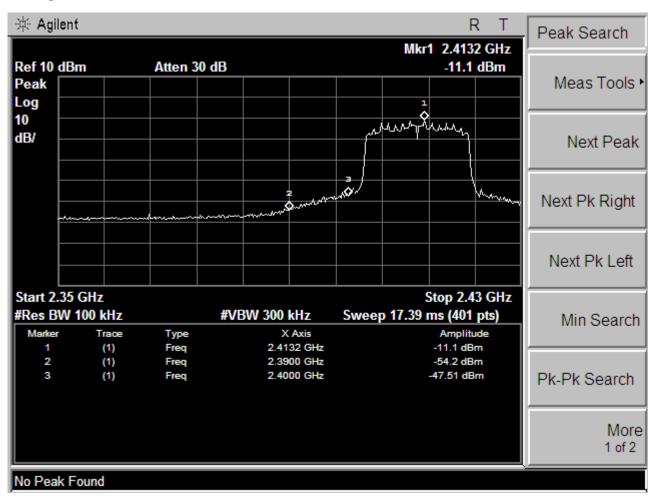

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 75 of 87

Report No: 1407023-03

Date: 2014-07-07




CH11 at 6.5Mbps

10.4 Band-edge and Restricted band Measurement

EUT	Ta	ablet PC	Model	MID-R7801QC
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	45.43	T 10014	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBµV/m)

Test Figure:

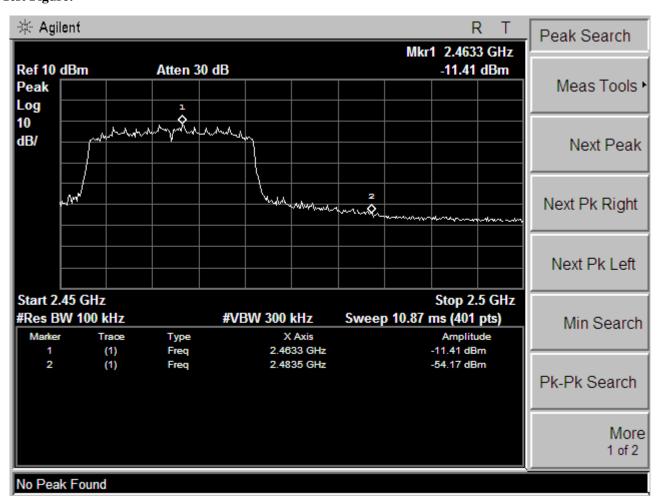

Note: The Max. FS in Restrict Band are measured in conventional method.

Date: 2014-07-07



Page 76 of 87

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is -0.73 dBi.

Report No: 1407023-03 Page 77 of 87

Date: 2014-07-07




12.0 FCC ID Label

FCC ID: 2ACPP-R7801QC

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

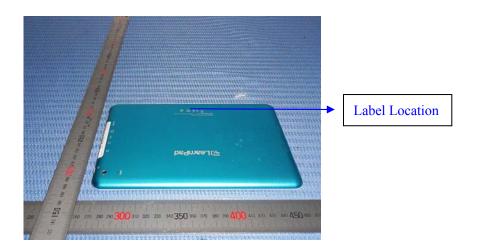

Report No: 1407023-03 Page 78 of 87

Date: 2014-07-07



13.0 Photo of testing

Conducted Emission Test Setup:



Date: 2014-07-07



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-07-07



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 81 of 87

Report No: 1407023-03

Date: 2014-07-07



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 82 of 87

Report No: 1407023-03

Date: 2014-07-07



Power Supply





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 83 of 87

Report No: 1407023-03

Date: 2014-07-07



Inside view

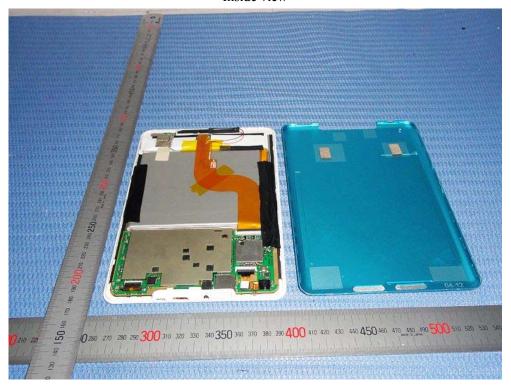



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 84 of 87

Report No: 1407023-03

Date: 2014-07-07



Inside view

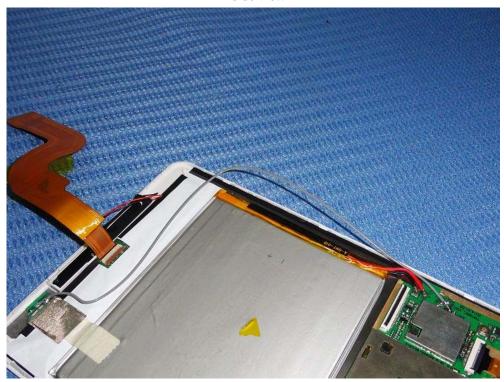



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 85 of 87


Report No: 1407023-03

Date: 2014-07-07



Inside view



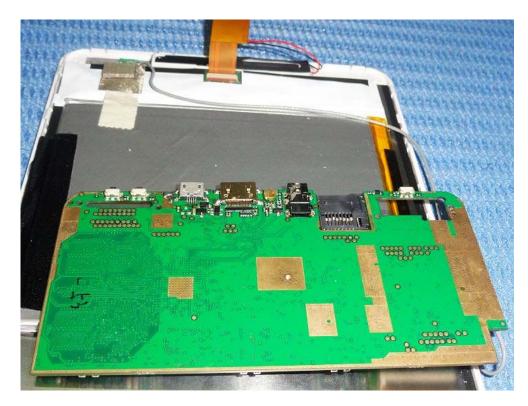

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-07-07



Inside view

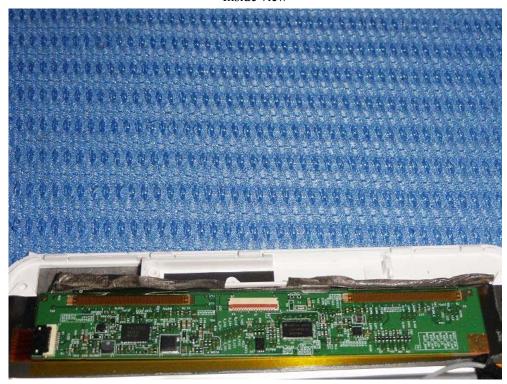



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 87 of 87

Report No: 1407023-03

Date: 2014-07-07



Inside view





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to