

Test Report

Customer:


SIGMATEK GmbH & Co KG

Obere Donaustr. 57/13
1020 Wien

Tel.: +43 1 212 1924-0
Fax: +43 1 212 1924-50

RF test report

140603-AU02+W02



Industry
Canada

Industrie
Canada

SIGMATEK GmbH & Co KG

Shoe Electronics

MS021



The test result refers exclusively
to the tested model.
This test report may not be copied or
published in a part without the written
authorization
of the accreditation agency and/or
EMV **TESTHAUS** GmbH
Revision: 1.0



Deutsche
Akkreditierungsstelle
D-PL-12155-01-01

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: company@emv-testhaus.com

Accreditation:



FCC facility registration number: 221458
Test Firm Type "2.948 listed": Valid until 2017-04-22
Test Firm Type "accredited": Valid until 2015-06-11
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site number: 3472A-1
Registration expiry date: 2015-10-02

Test Laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 2 of 83

Table of contents

1	Test regulations	7
2	Equipment under Test (EUT)	10
3	AC power line conducted emissions	12
4	Carrier Frequency Separation.....	14
5	Number of Hopping Frequencies	17
6	Time of Occupancy (Dwell time)	20
7	20 dB bandwidth.....	23
8	Occupied bandwidth (99 %).....	27
9	Maximum conducted output power	31
10	Band-edge Compliance	35
11	Spurious RF Conducted Emission	40
12	Radiated emission measurement (<1 GHz)	59
13	Radiated emission measurement (>1 GHz)	67
14	Equipment calibration status.....	79
15	Measurement uncertainty	81
16	Summary	82



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 3 of 83

List of pictures

Picture 1: Outline of conducted emission test setup	13
Picture 2: Test setup carrier frequency separation measurement	15
Picture 3: Carrier Frequency Separation	16
Picture 4: Test setup Number of hopping channels measurement	18
Picture 5: Number of hopping frequencies - lower part of band	19
Picture 6: Number of hopping frequencies - upper part of band	19
Picture 7: Test setup time of occupancy measurement	21
Picture 8: Signal-on-Time	22
Picture 9: Number of hops within Time of Transmission	22
Picture 10: Test setup for 20dB bandwidth measurement	24
Picture 11: 20dB bandwidth channel 0	25
Picture 12: 20dB bandwidth channel 39	25
Picture 13: 20dB bandwidth channel 78	26
Picture 14: Test setup for 99 % bandwidth measurement	28
Picture 15: Occupied bandwidth channel 0	29
Picture 16: Occupied bandwidth channel 39	29
Picture 17: Occupied bandwidth channel 78	30
Picture 18: Test setup for conducted output power measurement	32
Picture 19: Conducted output power channel 0	33
Picture 20: Conducted output power channel 39	34
Picture 21: Conducted output power channel 78	34
Picture 22: Test setup for band-edge compliance measurement	36
Picture 23: lower edge - PK	38
Picture 24: lower edge - AV	38
Picture 25: upper edge - PK	39
Picture 26: upper edge - AV	39
Picture 27: Test setup for conducted spurious emission measurement	41
Picture 28: spurious emission channel 0	42
Picture 29: spurious emission channel 39	43
Picture 30: spurious emission channel 78	43
Picture 31: spurious emission channel 0 - QP (30MHz – 1GHz)	44
Picture 32: spurious emission channel 39 - QP (30MHz – 1GHz)	45
Picture 33: spurious emission channel 78 - QP (30MHz – 1GHz)	46



Picture 34: spurious emission channel 0 - Table (1GHz - 26GHz)	47
Picture 35: spurious emission channel 0 - PK (1GHz - 26GHz)	47
Picture 36: spurious emission channel 0 - AV (1GHz - 26GHz)	48
Picture 37: spurious emission channel 0 - PK (1GHz - 26GHz)	49
Picture 38: spurious emission channel 0 - AV (1GHz - 26GHz)	49
Picture 39: spurious emission channel 0 - PK (1GHz - 26GHz)	50
Picture 40: spurious emission channel 0 - AV (1GHz - 26GHz)	50
Picture 41: spurious emission channel 39 - Table (1GHz - 26GHz)	51
Picture 42: spurious emission channel 39 - PK (1GHz - 26GHz)	51
Picture 43: spurious emission channel 39 - AV (1GHz - 26GHz)	52
Picture 44: spurious emission channel 39 - PK (1GHz - 26GHz)	53
Picture 45: spurious emission channel 39 - AV (1GHz - 26GHz)	53
Picture 46: spurious emission channel 39 - PK (1GHz - 26GHz)	54
Picture 47: spurious emission channel 39 - AV (1GHz - 26GHz)	54
Picture 48: spurious emission channel 78 - Table (1GHz - 26GHz)	55
Picture 49: spurious emission channel 78 - PK (1GHz - 26GHz)	55
Picture 50: spurious emission channel 78 - AV (1GHz - 26GHz)	56
Picture 51: spurious emission channel 78 - PK (1GHz - 26GHz)	57
Picture 52: spurious emission channel 78 - AV (1GHz - 26GHz)	57
Picture 53: spurious emission channel 78 - PK (1GHz - 26GHz)	58
Picture 54: spurious emission channel 78 - AV (1GHz - 26GHz)	58
Picture 55: Test setup for radiated emission measurement (< 30 MHz)	61
Picture 56: Test setup for radiated emission measurement (< 1 GHz)	61
Picture 57: Radiated emission 9 kHz – 30MHz (Channel 0)	63
Picture 58: Radiated emission 9 kHz – 30MHz (Channel 39)	63
Picture 59: Radiated emission 9 kHz – 30MHz (Channel 78)	64
Picture 60: Radiated emission 30 MHz – 1000MHz (Channel 0)	65
Picture 61: Radiated emission 30 MHz – 1000MHz (Channel 39)	66
Picture 62: Radiated emission 30 MHz – 1000MHz (Channel 78)	66
Picture 63: Test setup for radiated emission measurement (> 1 GHz)	69
Picture 64: Radiated emission 1 GHz – 26 GHz	70
Picture 65: Radiated emission 1 GHz – 26 GHz - PK	71
Picture 66: Radiated emission 1 GHz – 26 GHz - AV	71
Picture 67: Radiated emission 1 GHz – 26 GHz - PK	72
Picture 68: Radiated emission 1 GHz – 26 GHz - AV	72

Picture 69: Radiated emission 1 GHz – 26 GHz	73
Picture 70: Radiated emission 1 GHz – 26 GHz - PK	74
Picture 71: Radiated emission 1 GHz – 26 GHz - AV	74
Picture 72: Radiated emission 1 GHz – 26 GHz - PK	75
Picture 73: Radiated emission 1 GHz – 26 GHz - AV	75
Picture 74: Radiated emission 1 GHz – 26 GHz	76
Picture 75: Radiated emission 1 GHz – 26 GHz - PK	77
Picture 76: Radiated emission 1 GHz – 26 GHz - AV	77
Picture 77: Radiated emission 1 GHz – 26 GHz - PK	78
Picture 78: Radiated emission 1 GHz – 26 GHz - AV	78

List of tables

Table 1: Equipment Calibration status	80
Table 2: Measurement uncertainty	81



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

SIGMATEK GmbH & Co KG
 Shoe Electronics
 MS021

140603-AU02+W02

Page 6 of 83

1 Test regulations

47 CFR Part 2 October 2013	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
47 CFR Part 15 October 2013	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
KDB Publication no. 558074 June 5, 2014	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
OET Bulletin 65 August 1997	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
ANSI C63.4 December 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-Gen Issue 4, November 2014	General Requirements for Compliance of Radio Apparatus
RSS-102 Issue 4, March 2010, updated December 2010	Radio Frequency Exposure Compliance of Radiocommunications Apparatus
RSS-210 Issue 8, December 2010	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 7 of 83

1.1 Cross reference of FCC and Industry Canada standards

CFR 47 Part and Section	Test	Equivalent to IC
15.207	AC power line conducted emissions 0.150 MHz to 30 MHz	RSS-Gen Issue 4, section 8.8
15.247(a) Public Notice DA 00-705	Carrier Frequency Separation	RSS-210 Issue 8, section A8.1(b)
15.247(a) Public Notice DA 00-705	Number of Hopping Frequencies	RSS-210 Issue 8, section A8.1(d)
15.247(a) Public Notice DA 00-705	Time of Occupancy (Dwell time)	RSS-210 Issue 8, section A8.1(d)
15.247(a) Public Notice DA 00-705	20 dB bandwidth	RSS-210 Issue 8, section A8.1(a)
2.202(a) ANSI C63.4, section 13.7	Occupied bandwidth (99 %)	RSS-Gen Issue 4, section 6.6
15.247(b) Public Notice DA 00-705	Maximum conducted output power	RSS-Gen Issue 4, section 6.12 RSS-210 Issue 8, section A8.4
15.247(d) Public Notice DA 00-705	Band-edge Compliance	RSS-210 Issue 8, section A8.5
15.247(d) Public Notice DA 00-705	Spurious RF Conducted Emission	RSS-210 Issue 8, section A8.5
15.247(d) Public Notice DA 00-705	Radiated emission 9 kHz to 10 th Harmonic	RSS-Gen Issue 4, section 6.13 RSS-210 Issue 8, section A8.5



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 8 of 83

1.2 Summary of test results

Standard	Test result
FCC CFR 47 Part 15, section 15.247	Passed
RSS-210 Issue 8 Annex 8 and RSS-Gen Issue 4	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 9 of 83

2 Equipment under Test (EUT)

Product type:	Shoe Electronics
Model Name:	MS021
Manufacturer:	SIGMATEK GmbH & Co KG
Serial number:	- 96621 00 0014 -> module with onboard antenna ¹⁾ - 96621 00 0011 -> module with antenna connector ²⁾
FCC ID:	2ACQNAMM002
IC:	- - - -
Application freq. band:	2400 MHz – 2483.5 MHz
Frequency range:	2402MHz – 2480 MHz
Operating frequency:	2402MHz – 2480 MHz
Channel spacing:	1 MHz
Number of RF-channels:	79
Maximum output power:	<input checked="" type="checkbox"/> ≤ 125 mW <input type="checkbox"/> > 125 mW
Type of modulation:	FHSS
Antenna type:	smd onboard antenna
Antenna gain:	1.7 dBi
Power supply:	Host powered voltage range: 3.0 VDC to 4.2 VDC nominal: 3.6 VDC
Temperature range:	-5°C to +50°C

¹⁾ original assembly

²⁾ smd onboard antenna changed with an antenna connector for conducted tests only



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 10 of 83

2.1 Photo documentation

For photos taken during testing, see annex A.

For photos of the EUT, see annex B.

For internal photos of the EUT, see annex C.

2.2 Short description of the EUT

The EUT contains a RF modul that is used to transfer sensor data for an industrial person safety system. For example this system is used within a mechanical press.

During the pre-measurements it was investigated which EUT position is the respective worst-case. The EUT positions are documented in annex A.

2.3 Operation mode

For EUT-configuration the terminal program "Hterm" was used. The interface adapter RS232 listed in 2.4 was only used for configurations before testing. The user has no possibility to access the configuration interface.

The following adjustments were set for testing:

Tx-mode: - hopping where it was required
 - Channel 0 (low), 39 (mid), 78 (high) where it was required

Note: During charging it is not possible to use the EUT for its intended purpose.

2.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	S/N
Shoe Electronics	MS021 (for conducted measurements)	96621 00 0014
Shoe Electronics	MS021 (for radiated measurements)	96621 00 0011
PCB for activating	MS031	96620 00 0011
PCB for charging	MS031	94692 00 0011
switching power supply	PSM11R-050	P93504222A1
inteface adapter RS232	- - - -	n/a
USB-RS232-adapter	DIGITUS	n/a
FUJITSU Notebook	Lifebook A531	YLDS013094
AC power source	CHROMA 61602, 120VAC / 60Hz	616020002099

Used cables

- none -



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 11 of 83

3 AC power line conducted emissions

according to CFR 47 Part 15, section 15.207

3.1 Test location

Description	Manufacturer	Inventory No.
Shielded chamber	Siemens - Matsushita	E00107

3.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESCI	Rohde & Schwarz	E00001
<input type="checkbox"/>	ESH3 Z2	Rohde & Schwarz	E00028
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00004
<input type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00005

3.3 Limits

Frequency [MHz]	Quasi-peak [dB μ V]	Avarage [dB μ V]
0.15 – 0.5	66 - 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 12 of 83

3.4 Test procedure

1. The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50 Ohms and an EMI test receiver.
2. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz.
3. The EUT was placed on a wooden table and connected to the LISN.
4. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range from 0.15 MHz to 30 MHz were scanned.
5. After that all peaks values with fewer margins than 10 dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector.
6. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit than these values were re-measured again with an average detector.
7. These measurements were done on all current carrying conductors.

According to ANSI C63.4, section 13.1.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.

3.5 Test setup

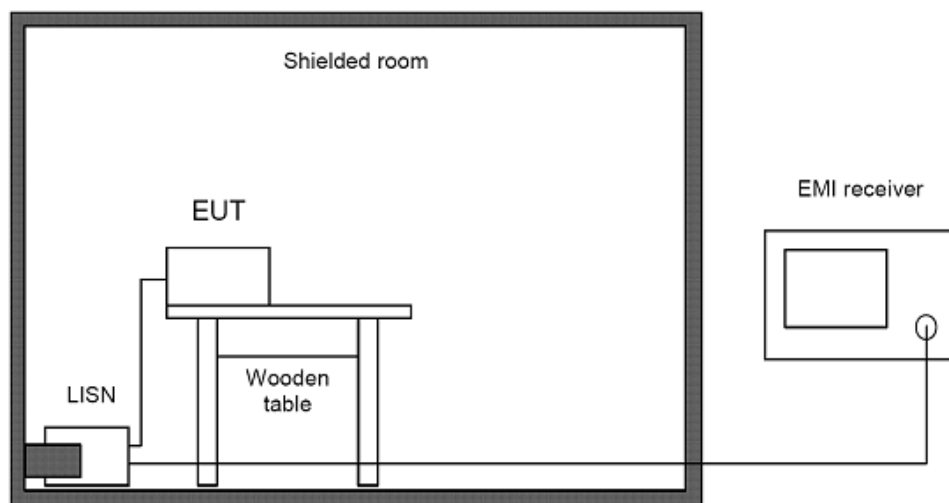

Picture 1: Outline of conducted emission test setup

Comments: Not applied, because during radio communication there is no possibility to connect the EUT to any form of power supply network.

3.6 Test results

- none -

4 Carrier Frequency Separation

according to CFR 47 Part 15, section 15.247(a), and Public Notice DA 00-705

4.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

4.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

4.3 Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

4.4 Test procedure

1. The EUT was connected to the spectrum analyzer
2. The EUT has its hopping function enabled
3. The unit was operated in continuous transmit mode with modulation.
4. After the trace has stabilized the peak of the adjacent channels was recorded using the delta Marker function.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 14 of 83

4.5 Test setup

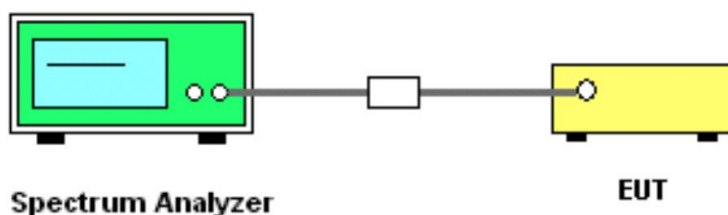

Picture 2: Test setup carrier frequency separation measurement

4.6 Test Deviation

There is no deviation with the original standard.

4.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode with enabled hopping function.


4.8 Test results

Temperature:	23°C	Humidity:	41%
Tested by:	M. Müller	Test date:	2015-02-19

Test Result		
Carrier Frequency Separation (MHz)	Minimum Separation (MHz)	Result
1.0032	0.7872	PASS

with

Maximum 20-dB-bandwidth: 1.1808 MHz ($\gg 25$ kHz), see clause 7.8 on page 24
Maximum output power: -12.85 dBm (0.052 mW < 125 mW),
see clause 9.8 on page 33
Minimum separation required: $\frac{2}{3} * 20\text{-dB-Bandwidth} = 0.7872$ MHz

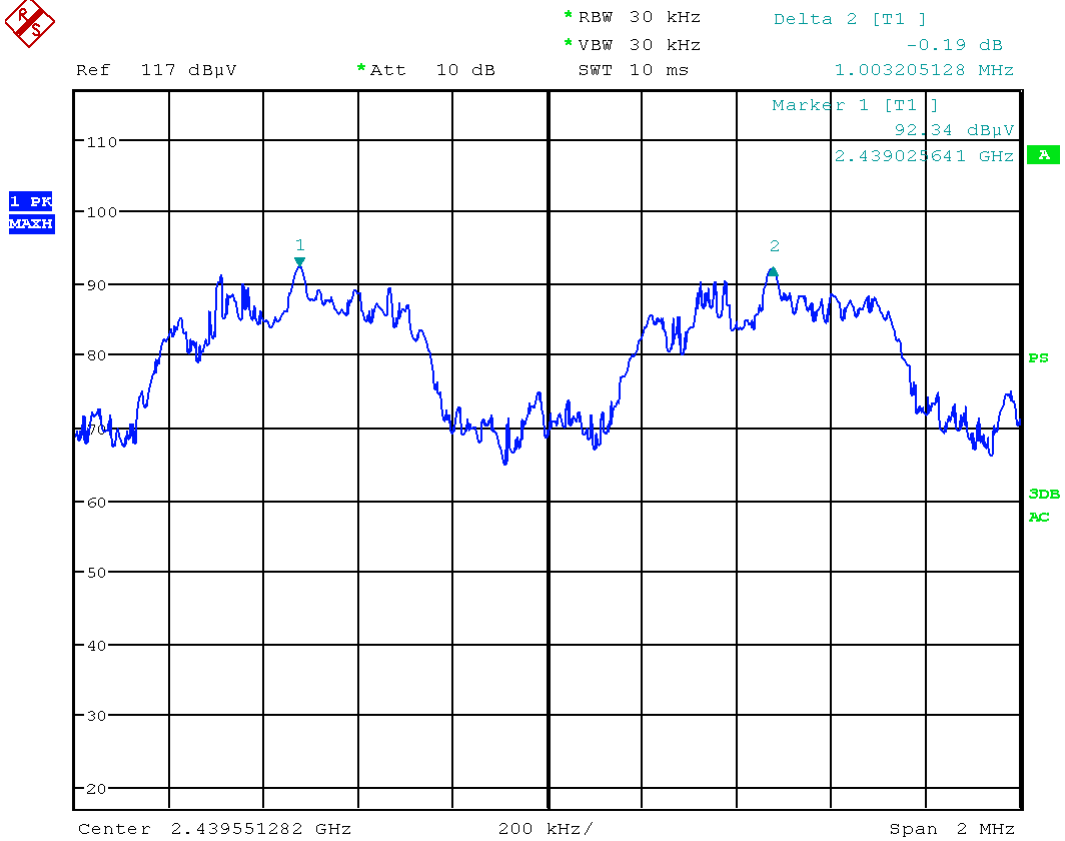

Picture 3: Carrier Frequency Separation

5 Number of Hopping Frequencies

according to CFR 47 Part 15, section 15.247(a), and Public Notice DA 00-705

5.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

5.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

5.3 Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.4 Test procedure

1. The EUT was connected to the spectrum analyzer
2. The EUT has its hopping function enabled
3. The unit was operated in continuous transmit mode with modulation.
4. After the trace has stabilized count the peaks.
5. To get a higher resolution the frequency range was split in two parts.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 17 of 83

5.5 Test setup

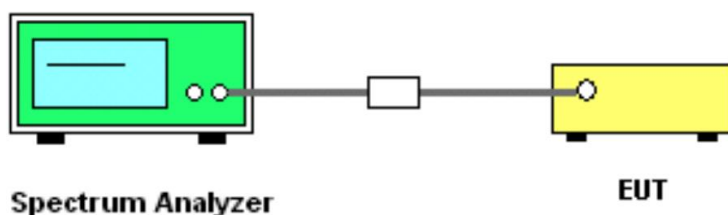

Picture 4: Test setup Number of hopping channels measurement

5.6 Test Deviation

There is no deviation with the original standard.


5.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode with enabled hopping function.


5.8 Test results

Temperature:	23°C	Humidity:	41%
Tested by:	M. Müller	Test date:	2015-02-19

Test Result	
Number of Hopping Channels	79

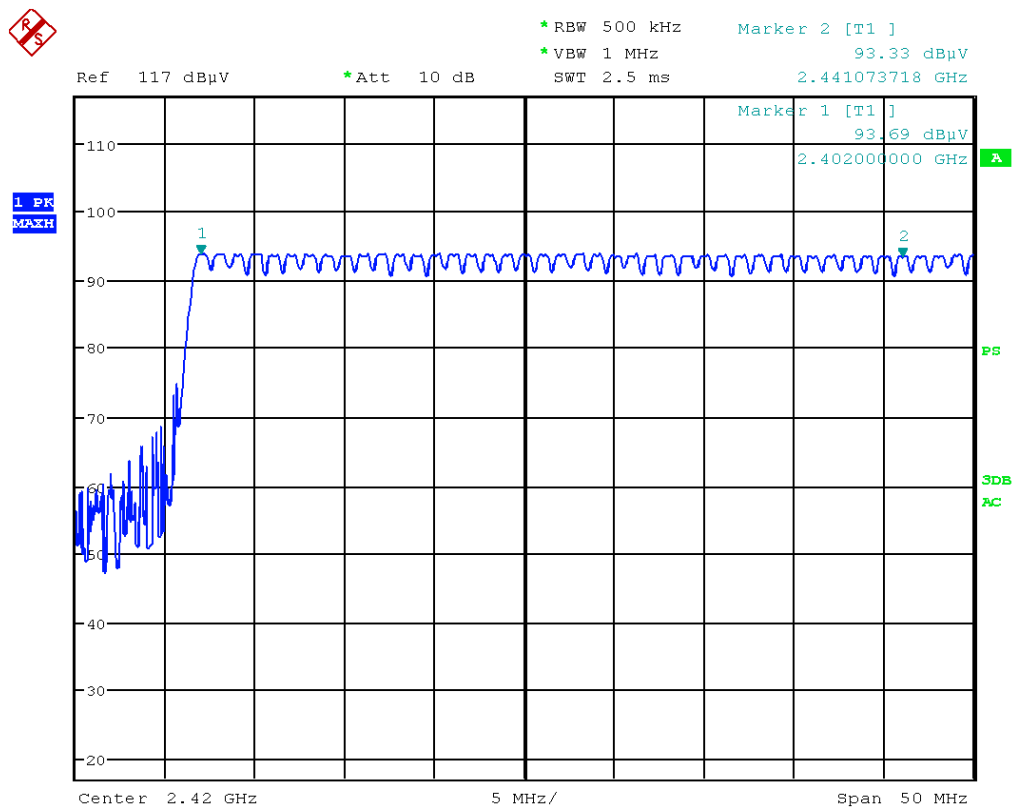

Picture 5: Number of hopping frequencies - lower part of band

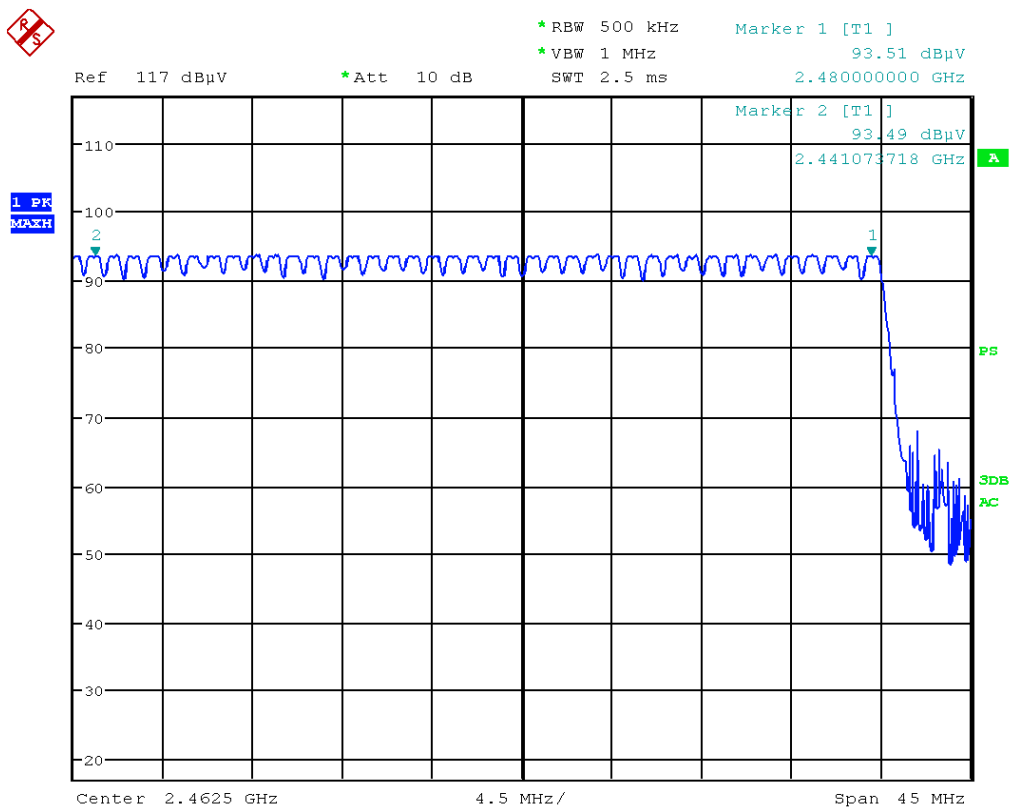

Picture 6: Number of hopping frequencies - upper part of band

6 Time of Occupancy (Dwell time)

according to CFR 47 Part 15, section 15.247(a), and Public Notice DA 00-705

6.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

6.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

6.3 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.4 Test procedure

1. The EUT was connected to the spectrum analyzer
2. The EUT has its hopping function enabled
3. The unit was operated in continuous transmit mode with modulation.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 20 of 83

6.5 Test setup

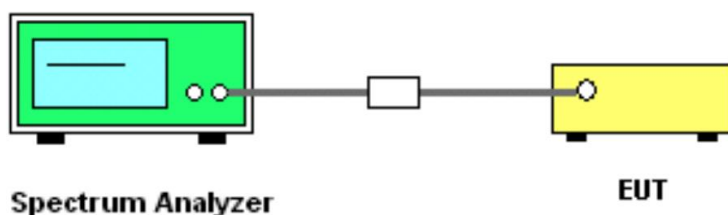

Picture 7: Test setup time of occupancy measurement

6.6 Test Deviation

There is no deviation with the original standard.

6.7 EUT operation during test


The EUT was programmed to be in continuously transmitting mode with enabled hopping function.

6.8 Test results


Temperature:	23°C	Humidity:	41%
Tested by:	M. Müller	Test date:	2015-02-19

Time of Transmission (79ch * 0.4s)	Number of hops within time of transmission	Signal On time (msec)	Result (Dwell Time) (msec)	Limit (msec)	Result
31.6s	40	0.8221	32.8840	400	PASS

Dwell Time = Number of hops within Time of Transmission*Signal On Time

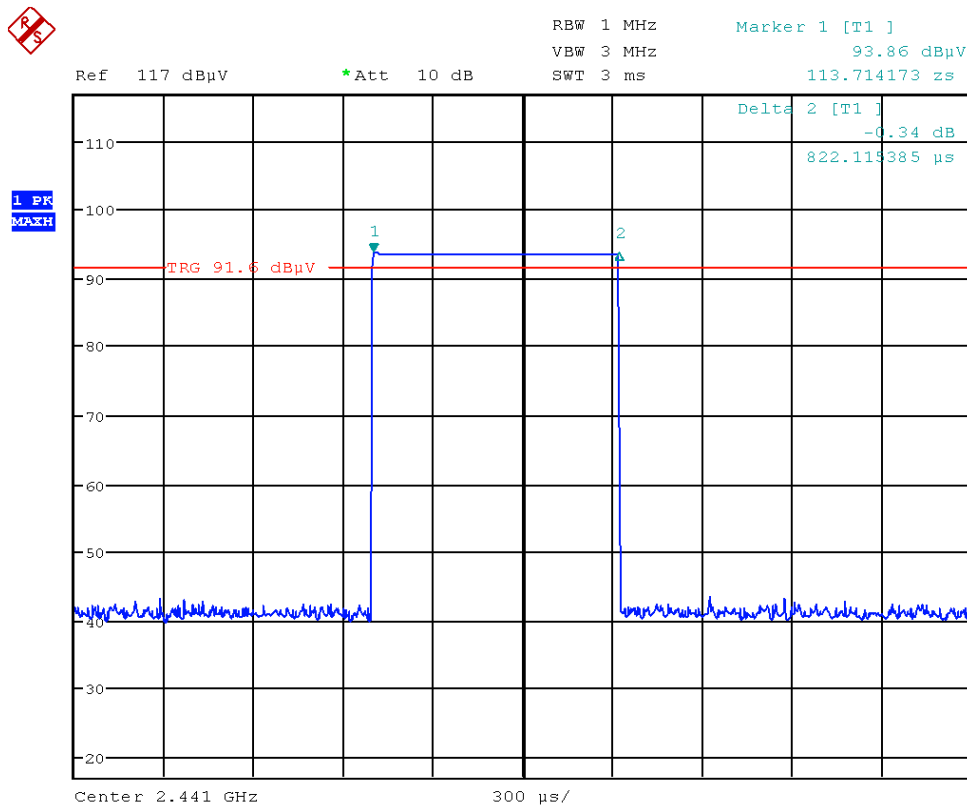

Picture 8: Signal-on-Time

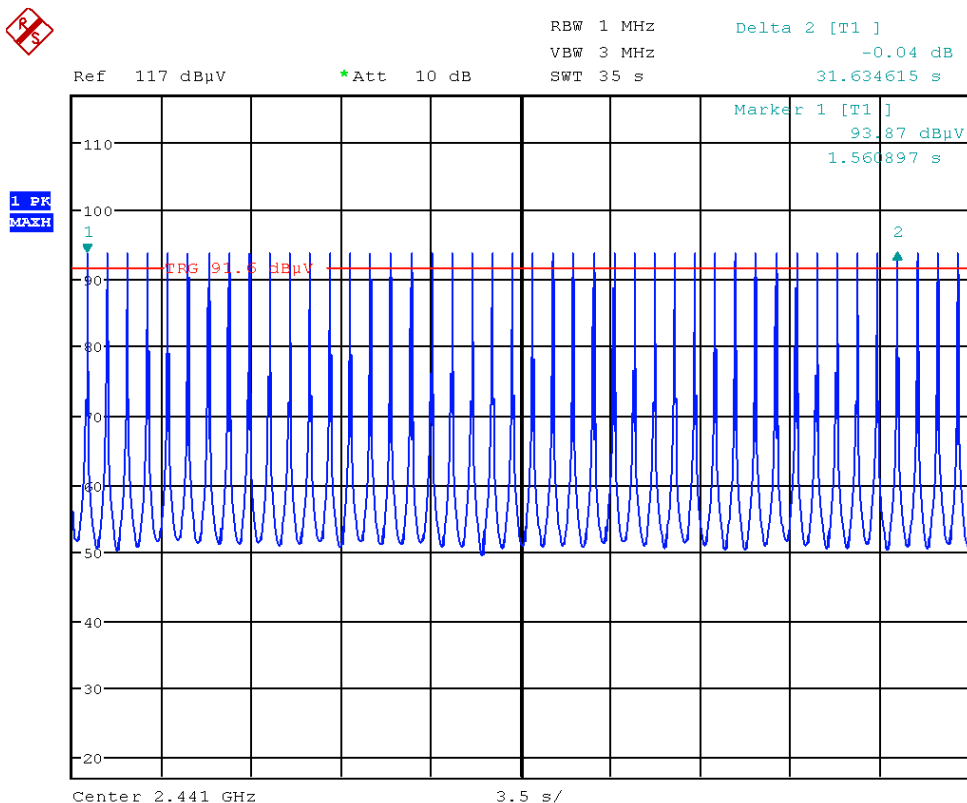

Picture 9: Number of hops within Time of Transmission

7 20 dB bandwidth

according to CFR 47 Part 15, section 15.247(a), and Public Notice DA 00-705

7.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

7.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

7.3 Limits

N/A

7.4 Test procedure

1. The test is performed in accordance with FCC Public Notice DA00-705
2. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
3. The unit was operated in continuous transmit mode with modulation.
4. Resolution and video bandwidth were set to at least 1 % of the 20 dB bandwidth.
5. Measure the spectrum width with power higher than 20 dB below carrier. The transmitter output (antenna port) was connected to the spectrum analyzer.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 23 of 83

7.5 Test setup

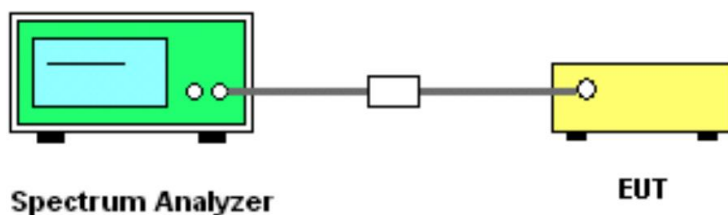

Picture 10: Test setup for 20dB bandwidth measurement

7.6 Test deviation

There is no deviation with the original standard.

7.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.

7.8 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-02-19

Channel	Frequency (GHz)	20 dB bandwidth (MHz)
0	2.402	1.1640
39	2.441	1.1722
78	2.480	1.1808



Picture 11: 20dB bandwidth channel 0



Picture 12: 20dB bandwidth channel 39




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 25 of 83

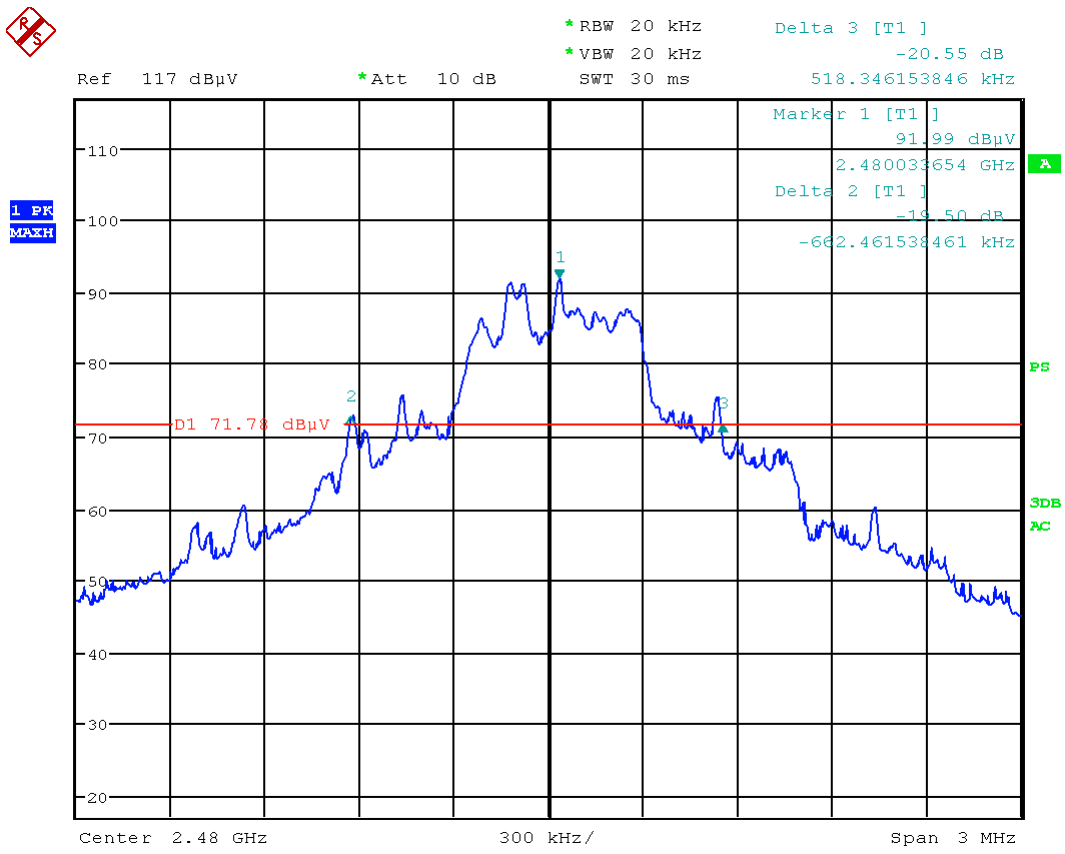

Picture 13: 20dB bandwidth channel 78



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

8 Occupied bandwidth (99 %)

according to CFR 47 Part 2, section 2.202(a), and ANSI C63.4, section 13.7

8.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

8.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

8.3 Limits

N/A

8.4 Test procedure

6. The test is performed in accordance with CFR 47 Part 2, section 2.202(a)
7. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
8. The unit was operated in continuous transmit mode with modulation.
9. As specified in ANSI C63.4, section 13.7, a minimum resolution bandwidth of 10 kHz for signals up to 1 GHz and 100 kHz above 1 GHz was used with video bandwidth set to at least the value of the resolution bandwidth.
10. The 99 % frequency bandwidth was measured so that, below its lower and above its upper frequency limits, the mean powers radiated were each equal to 0.5 percent of the total mean power radiated by a given emission.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 27 of 83

8.5 Test setup

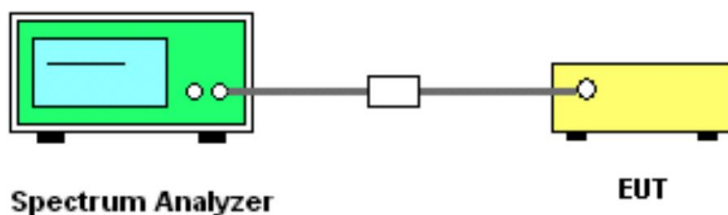

Picture 14: Test setup for 99 % bandwidth measurement

8.6 Test deviation

There is no deviation with the original standard.


8.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.


8.8 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-02-19

Channel	Frequency (GHz)	Occupied bandwidth (MHz)
0	2.402	1.0240
39	2.441	1.0673
78	2.480	1.0913

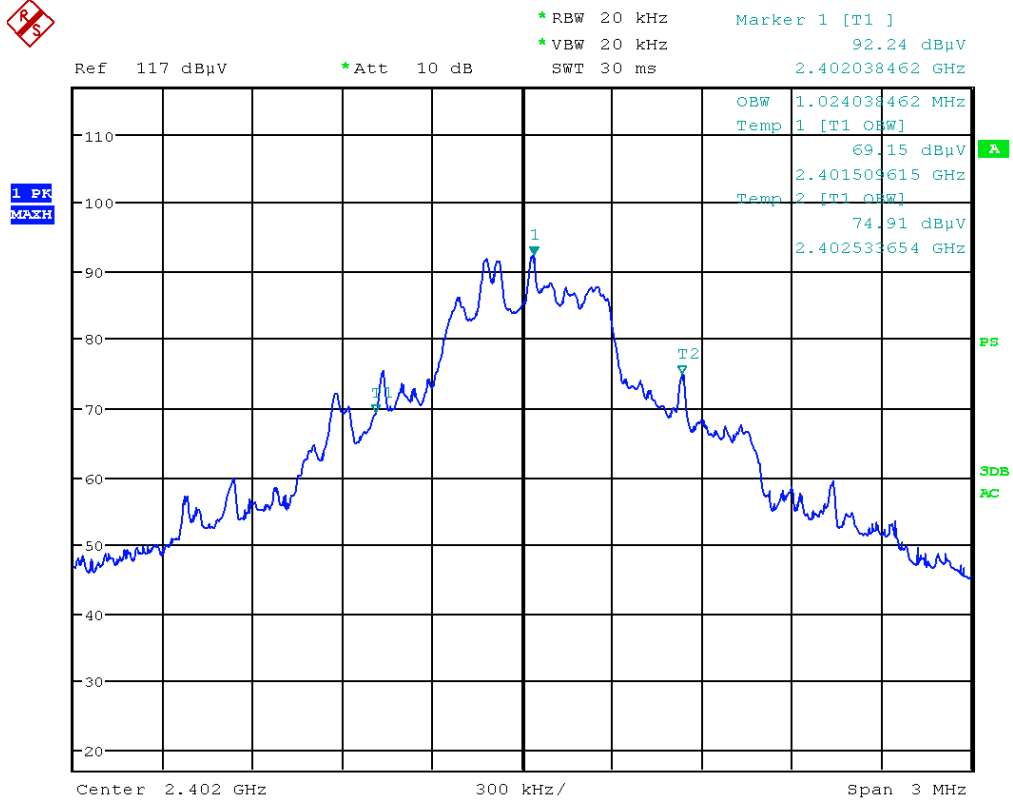

Picture 15: Occupied bandwidth channel 0

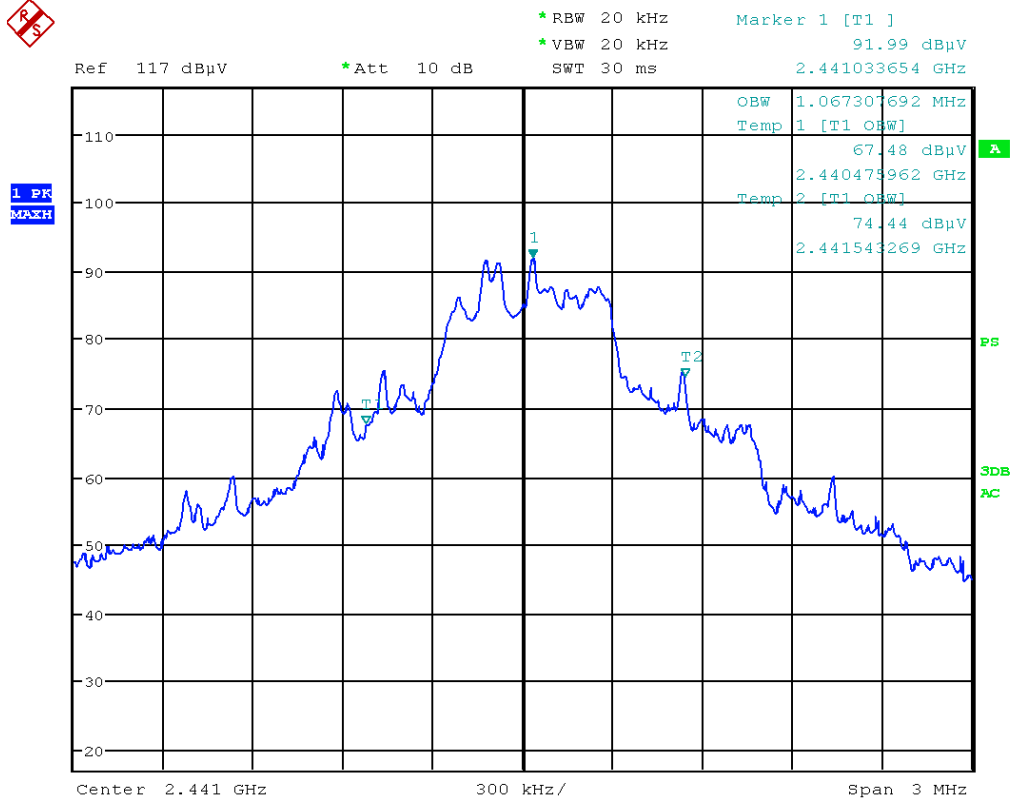

Picture 16: Occupied bandwidth channel 39




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 29 of 83

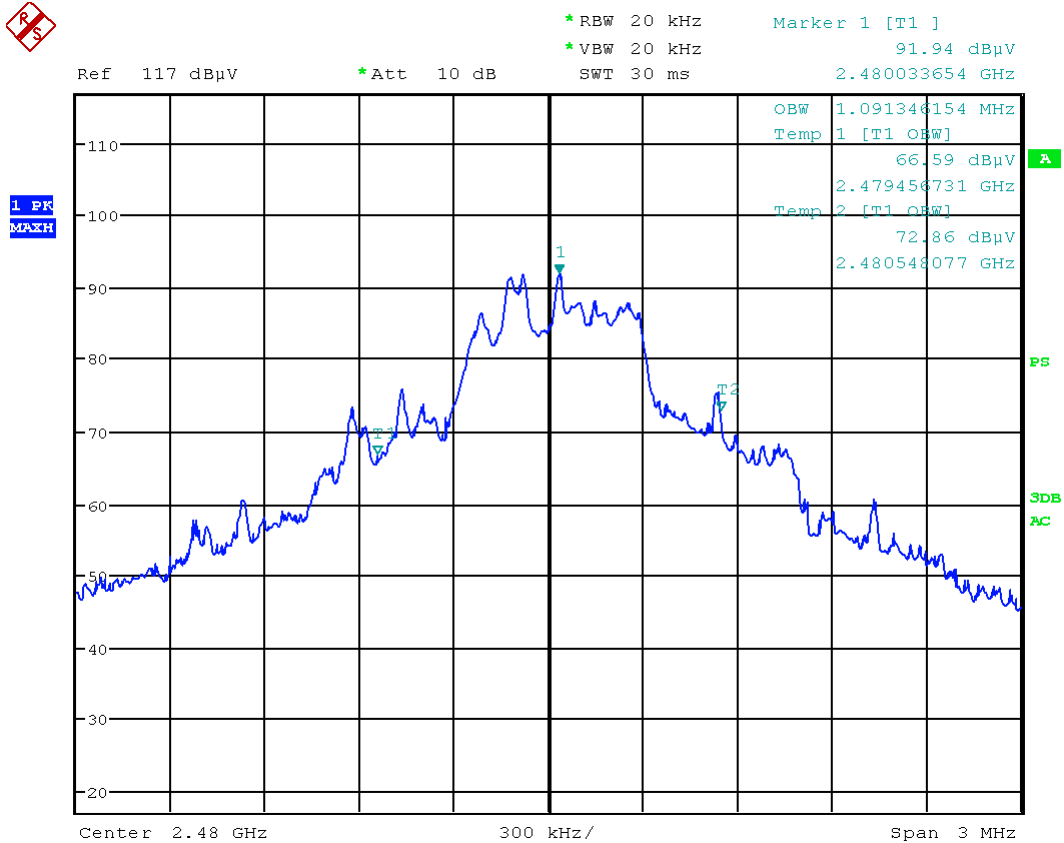

Picture 17: Occupied bandwidth channel 78



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 30 of 83

9 Maximum conducted output power

according to CFR 47 Part 15, section 15.247(b), and Public Notice DA 00-705

9.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

9.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

9.3 Limits

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt (30 dBm).

For all other frequency hopping systems in the 2400–2483.5 MHz band:
0.125 watts (21 dBm).

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level.

The conducted output power limit is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021


140603-AU02+W02

Page 31 of 83

9.4 Test procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.

9.5 Test setup

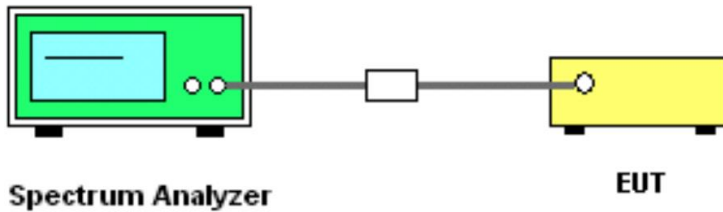

Picture 18: Test setup for conducted output power measurement

9.6 Test deviation

There is no deviation with the original standard.

9.7 EUT operation during Test


The EUT was programmed to be in continuously transmitting mode.

9.8 Test results


Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-02-19

Channel	Frequency (GHz)	Detector	Conducted power		Limit (dBm)	Result
			reading (dBm)	final (dBm)		
0	2.402	PK	-12.69	-12.24	21	PASS
39	2.441	PK	-12.37	-11.92	21	PASS
78	2.480	PK	-11.96	-11.51	21	PASS


Comments: Final conducted power value is reading value + cable attenuation (0.45 dB)

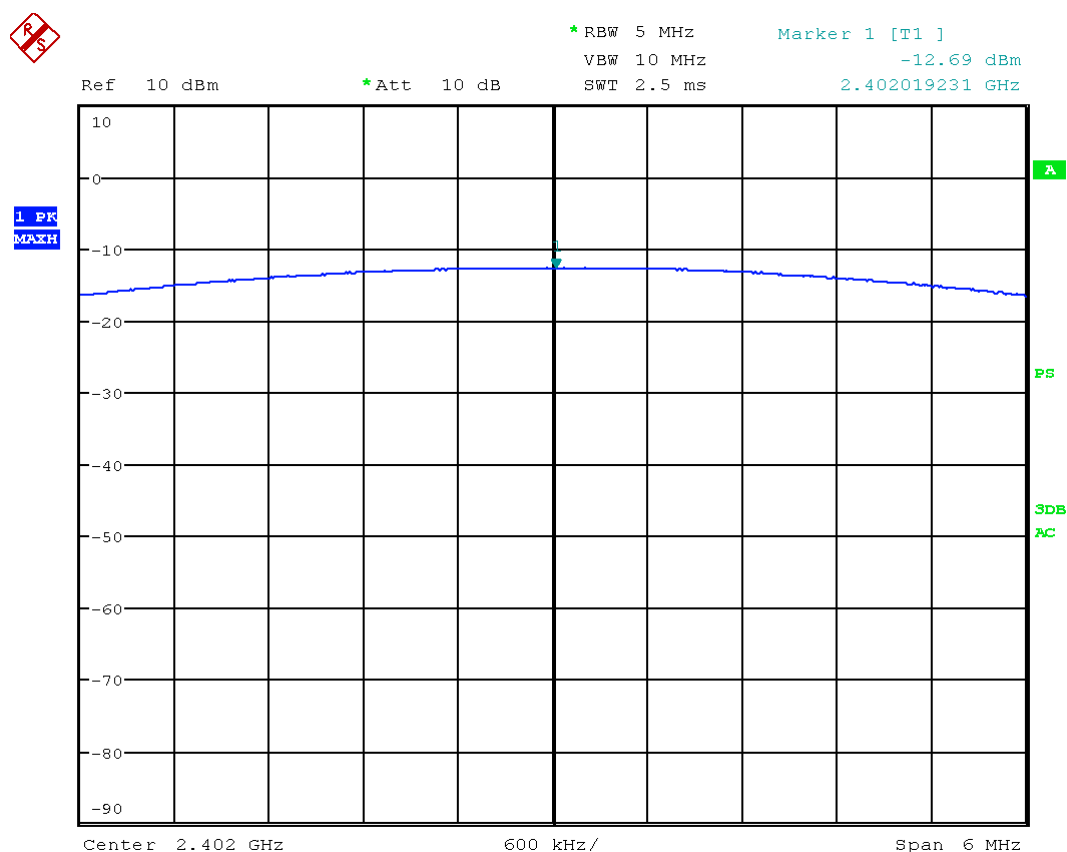

Picture 19: Conducted output power channel 0

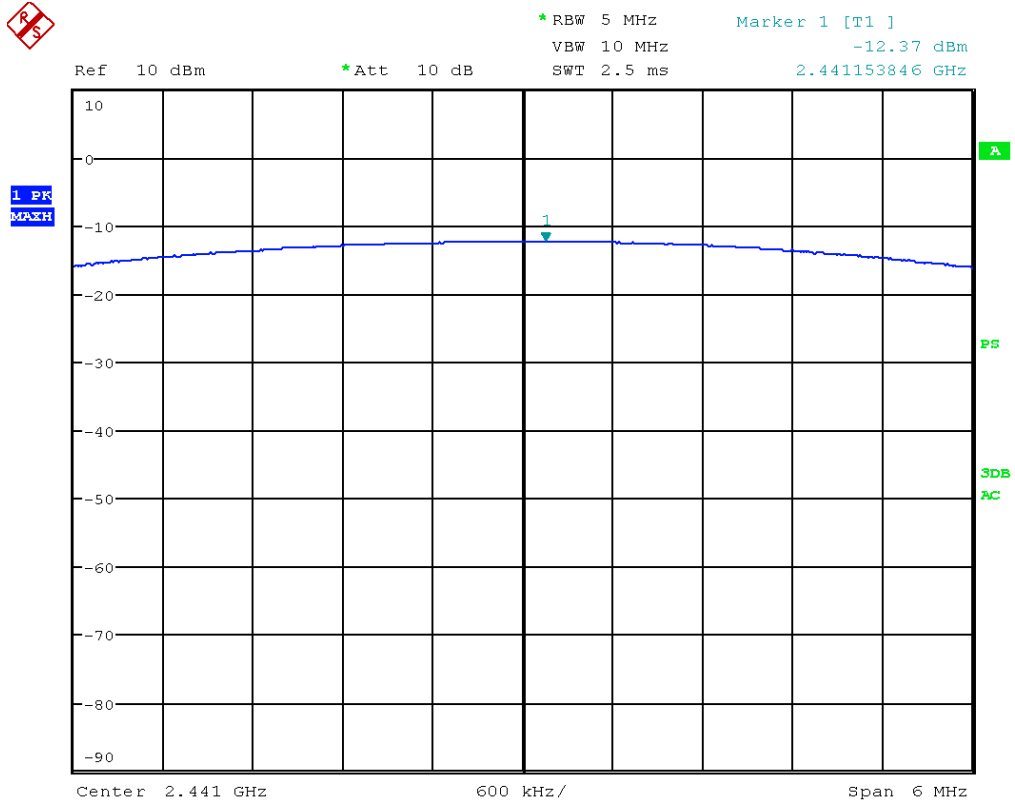

Picture 20: Conducted output power channel 39

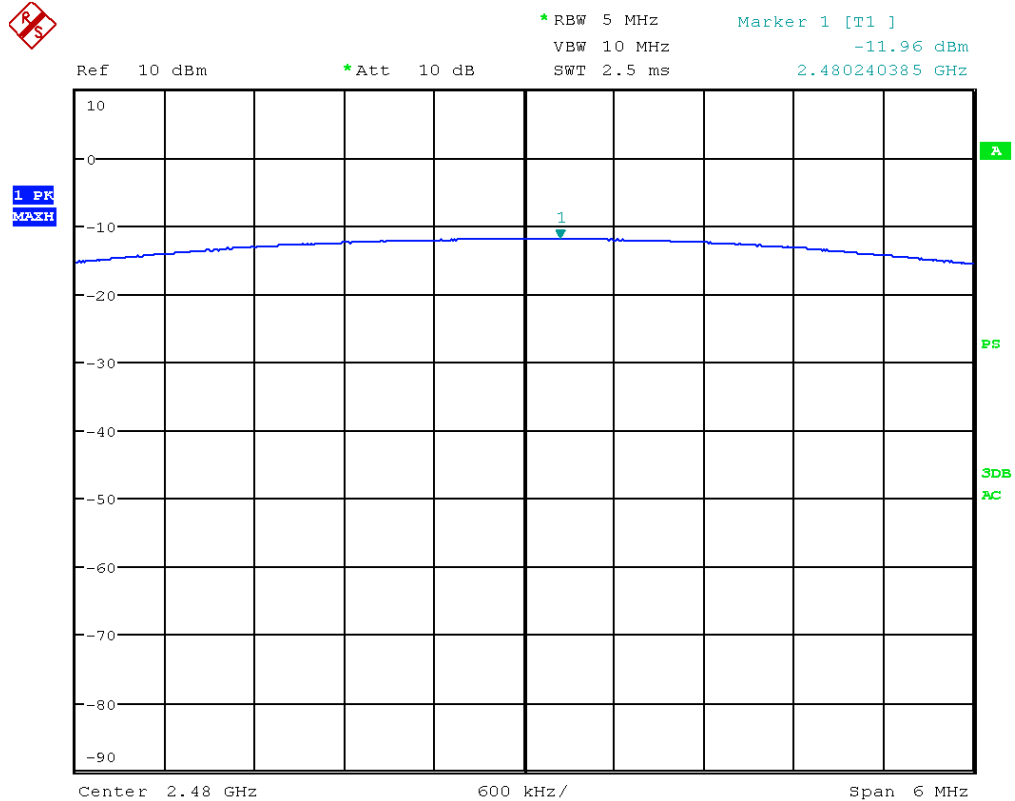

Picture 21: Conducted output power channel 78

10 Band-edge Compliance

according to CFR 47 Part 15, section 15.247(d), and Public Notice DA 00-705

10.1 Test location

☒ radiated measurement

10.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESU26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	AMF-5D-00501800-28-13P	Miteq	W00089
<input type="checkbox"/>	AMF-6F-16002650-25-10P	Miteq	W00090
<input checked="" type="checkbox"/>	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/>	BBHA 9170	Schwarzbeck	W00055
<input checked="" type="checkbox"/>	COSB 4-1-26	Conformitas	W00091

10.3 Limits

< -20dBc outside restricted bands
< 54dB μ V (video average) inside restricted bands
< 74dB μ V (peak detector) inside restricted bands

10.4 Test procedure

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a fully anechoic chamber.
2. Power on the EUT and all peripherals.
3. Set frequency to lowest channel
4. Set marker 20dB below the peak both sides of the intentional emission.
5. Record this trace
6. Set frequency to highest channel
7. Repeat step 4 and 5.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 35 of 83

10.5 Test setup

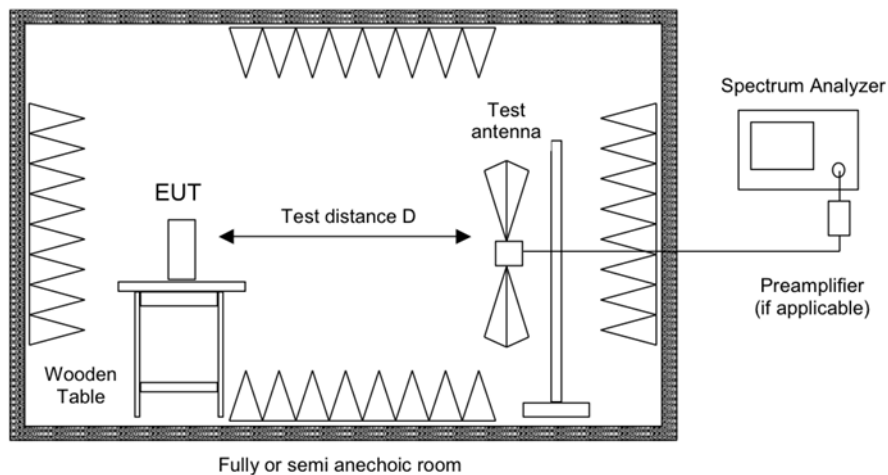

Picture 22: Test setup for band-edge compliance measurement

10.6 Test deviation

There is no deviation with the original standard.

10.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.

10.8 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2014-10-15

Frequency (GHz)	Detector	Reading value (dBµV/m)	Restricted Band	Limit (dBµV/m)	Result
2.3100	PK	36.23	Yes	74	Pass
2.3100	AV	23.22	Yes	54	Pass
2.3664	PK	38.59	Yes	74	Pass
2.3664	AV	23.15	Yes	54	Pass
2.3900	PK	36.77	Yes	74	Pass
2.3900	AV	22.82	Yes	54	Pass
2.4020	PK	55.32	No	- - -	Carrier
2.4022	AV	47.80	No	- - -	Carrier

Frequency (GHz)	Detector	Reading value (dBµV/m)	Restricted Band	Limit (dBµV/m)	Result
2.4797	PK	56.79	No	- - -	Carrier
2.4799	AV	48.57	No	- - -	Carrier
2.4835	PK	36.67	Yes	74	Pass
2.4835	AV	23.13	Yes	54	Pass
2.4935	PK	37.62	Yes	74	Pass
2.4926	AV	22.88	Yes	54	Pass
2.5000	PK	35.35	Yes	74	Pass
2.5000	AV	22.79	Yes	54	Pass




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 37 of 83

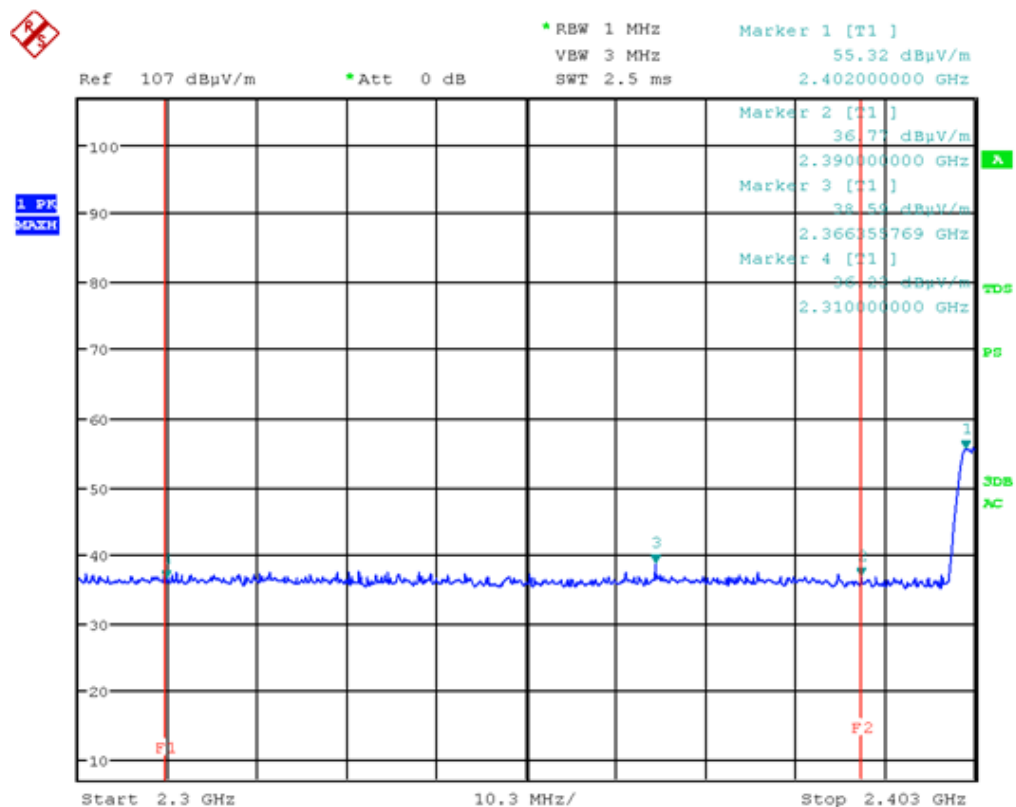


Picture 23: lower edge - PK

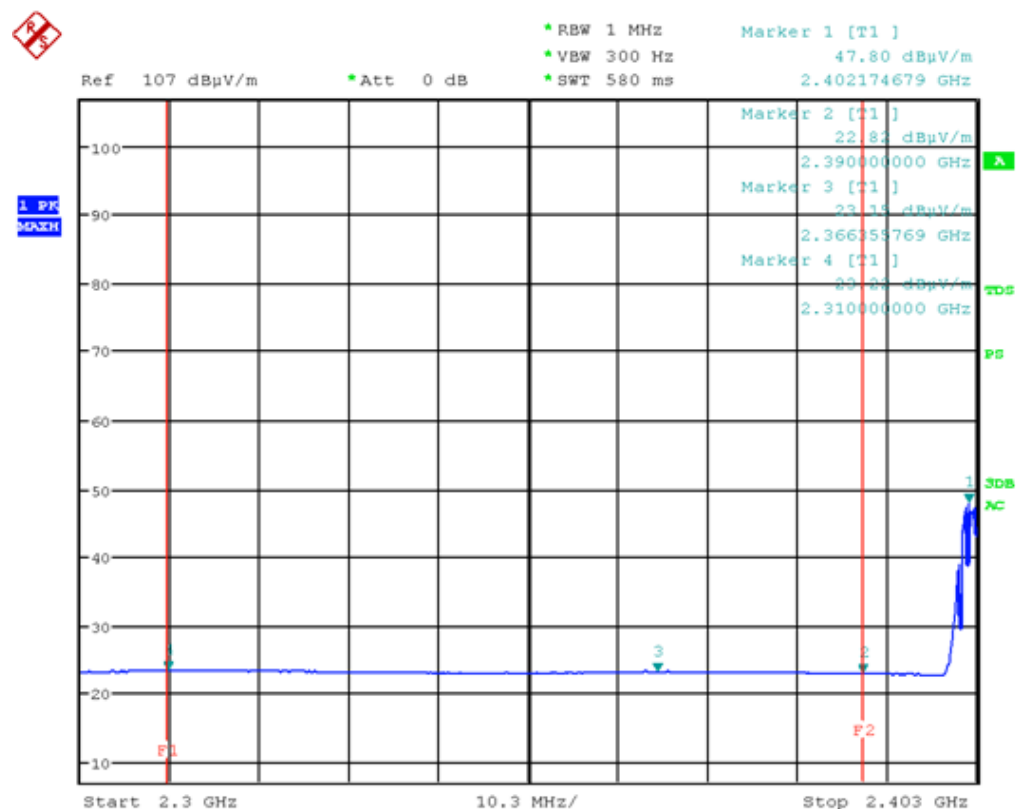

Picture 24: lower edge - AV

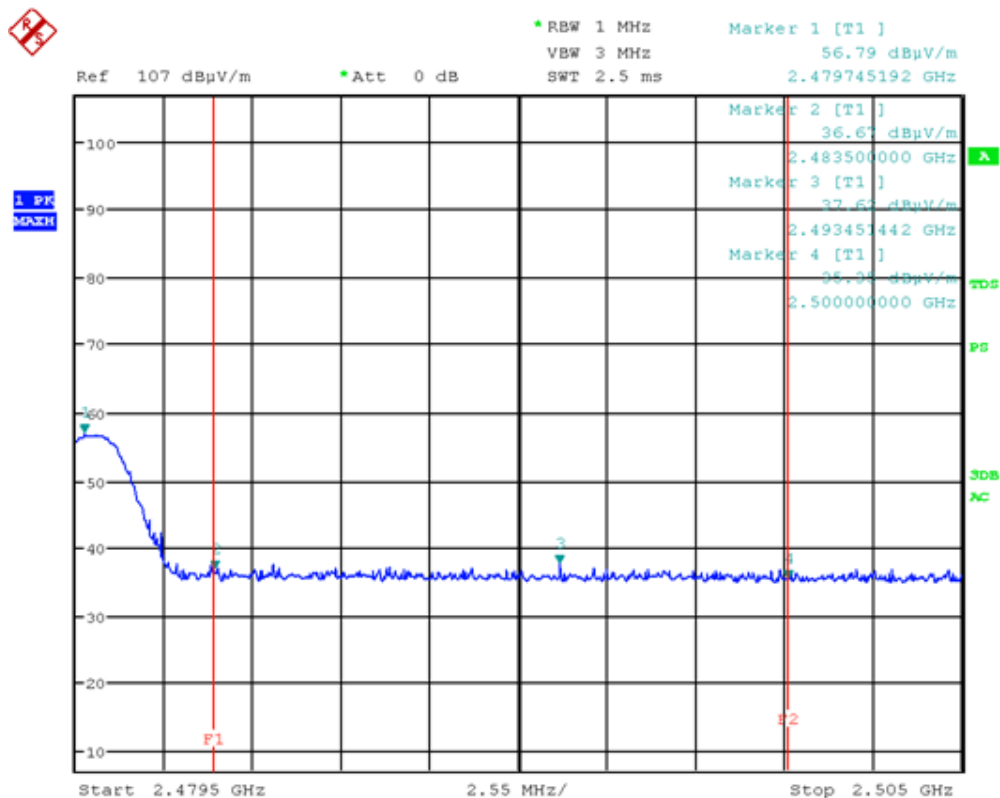

Picture 25: upper edge - PK

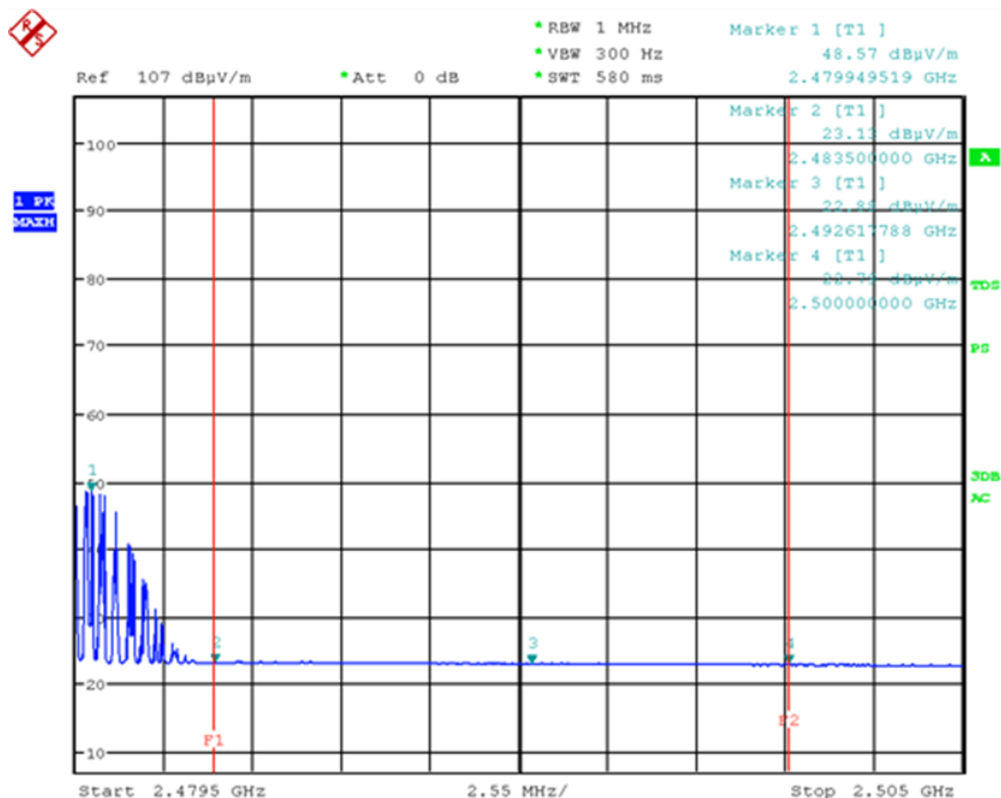

Picture 26: upper edge - AV

11 Spurious RF Conducted Emission

according to CFR 47 Part 15, section 15.247(d), and Public Notice DA 00-705

11.1 Test location

- ☒ Conducted measurement
- ☐ Scan with peak detector in 3 m CDC
- ☐ CISPR measurement with quasi peak detector on 10m open area test site.
- ☐ Measurement with peak detector on 3m open area test site

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open area test site	EMV TESTHAUS GmbH	E00354

11.2 Test Instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011

11.3 Limits

- < - 20dBc outside restricted bands
- < 54dBµV (video average) inside restricted bands
- < 74dBµV (peak detector) inside restricted bands

11.4 Test procedure

1. The test is performed in accordance with FCC Public Notice KBD 558074
2. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
3. The unit was operated in continuous transmit mode with modulation.
4. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
5. Measure the spectrum from the lowest frequency generated in the EUT up through the 10th harmonic.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 40 of 83

11.5 Test setup

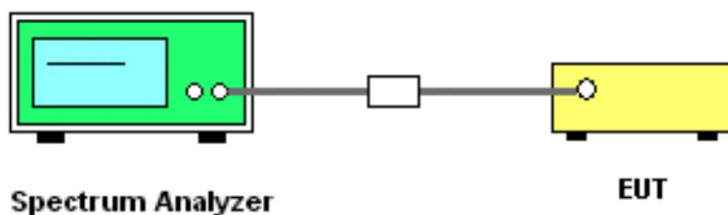

Picture 27: Test setup for conducted spurious emission measurement

11.6 Test deviation

There is no deviation with the original standard.


11.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.


11.8 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2015-02-20


11.9 Test results 9kHz - 30MHz

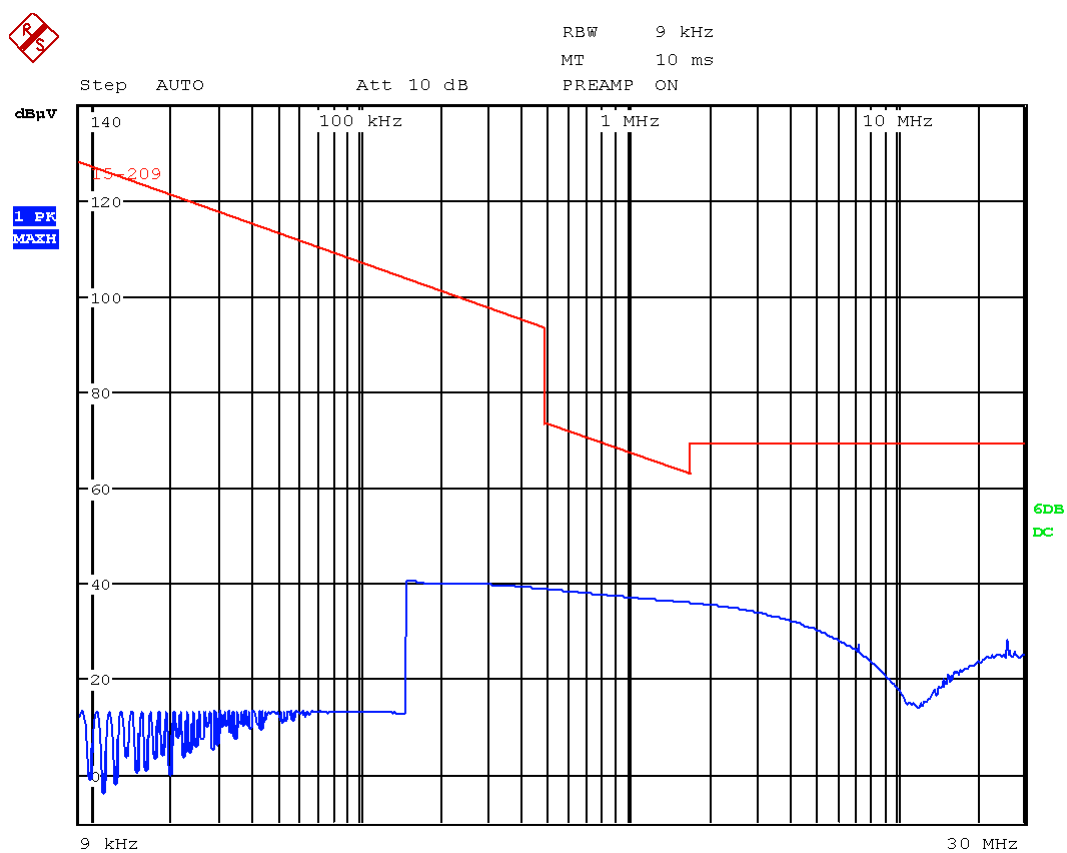

Picture 28: spurious emission channel 0

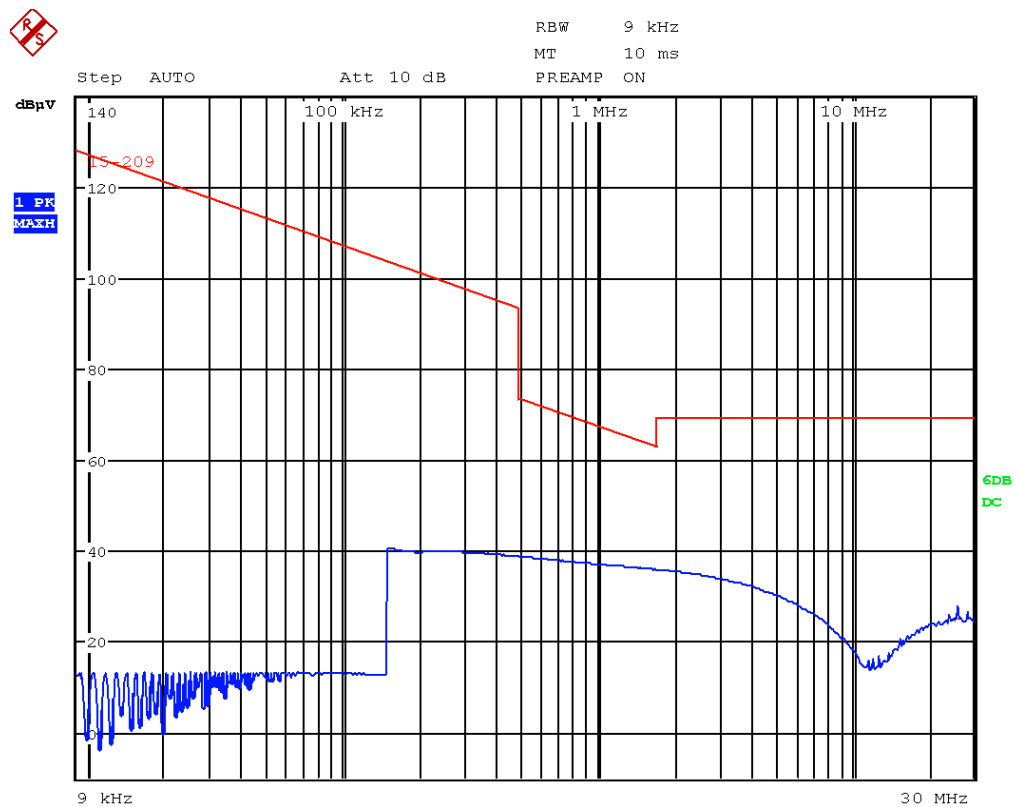


Picture 29: spurious emission channel 39

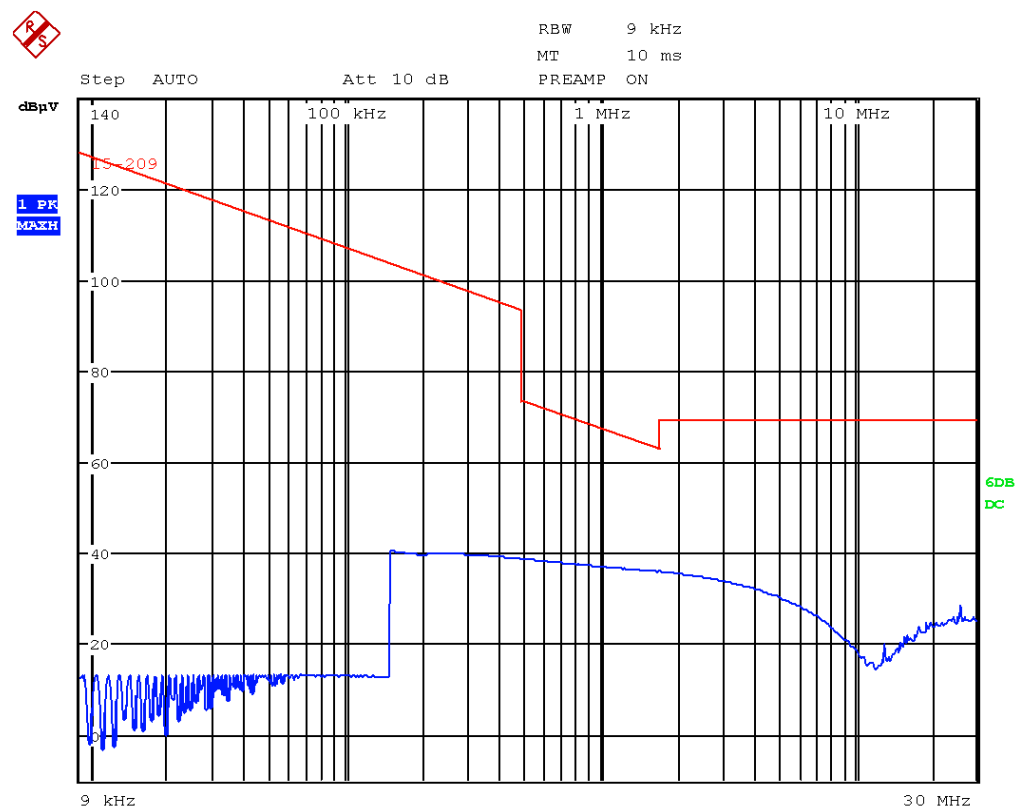


Picture 30: spurious emission channel 78

11.10 Test results 30MHz - 26GHz

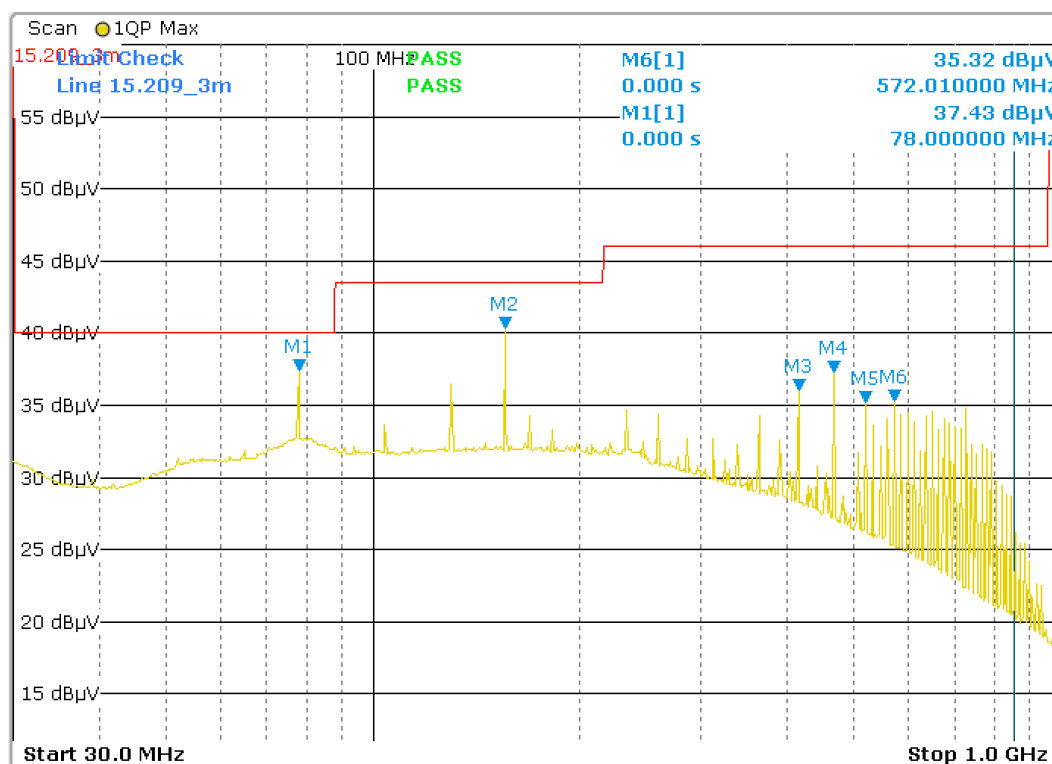


Frequency [MHz]	Marker	Detector	Reading [dBμV]	Limit [dBμV]	Result
78.000	1	QP	37.43	40.00	Pass
156.000	2	QP	40.41	43.52	Pass
416.010	3	QP	36.03	46.02	Pass
468.000	4	QP	37.27	46.02	Pass
520.020	5	QP	35.19	46.02	Pass
572.010	6	QP	35.32	46.02	Pass

Picture 31: spurious emission channel 0 - QP (30MHz – 1GHz)

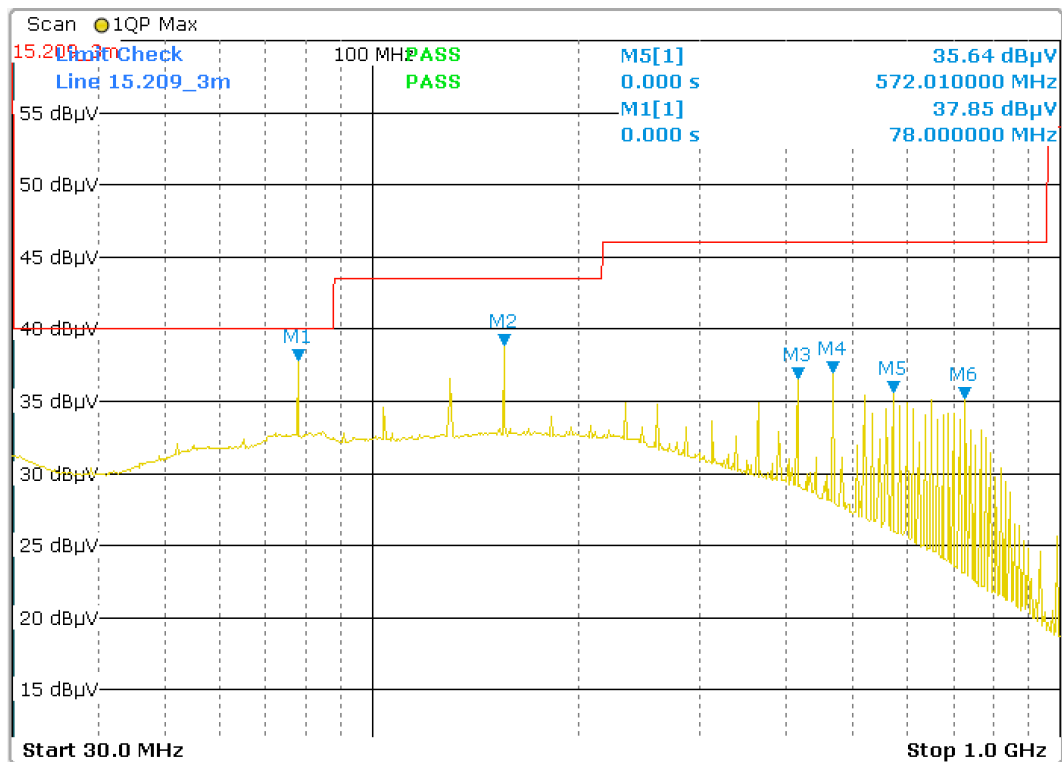

Frequency [MHz]	Marker	Detector	Reading [dBμV]	Limit [dBμV]	Result
78.000	1	QP	37.85	40.00	Pass
156.000	2	QP	38.87	43.52	Pass
416.010	3	QP	36.55	46.02	Pass
468.000	4	QP	37.04	46.02	Pass
572.010	5	QP	35.64	46.02	Pass
728.010	6	QP	35.16	46.02	Pass

Picture 32: spurious emission channel 39 - QP (30MHz – 1GHz)

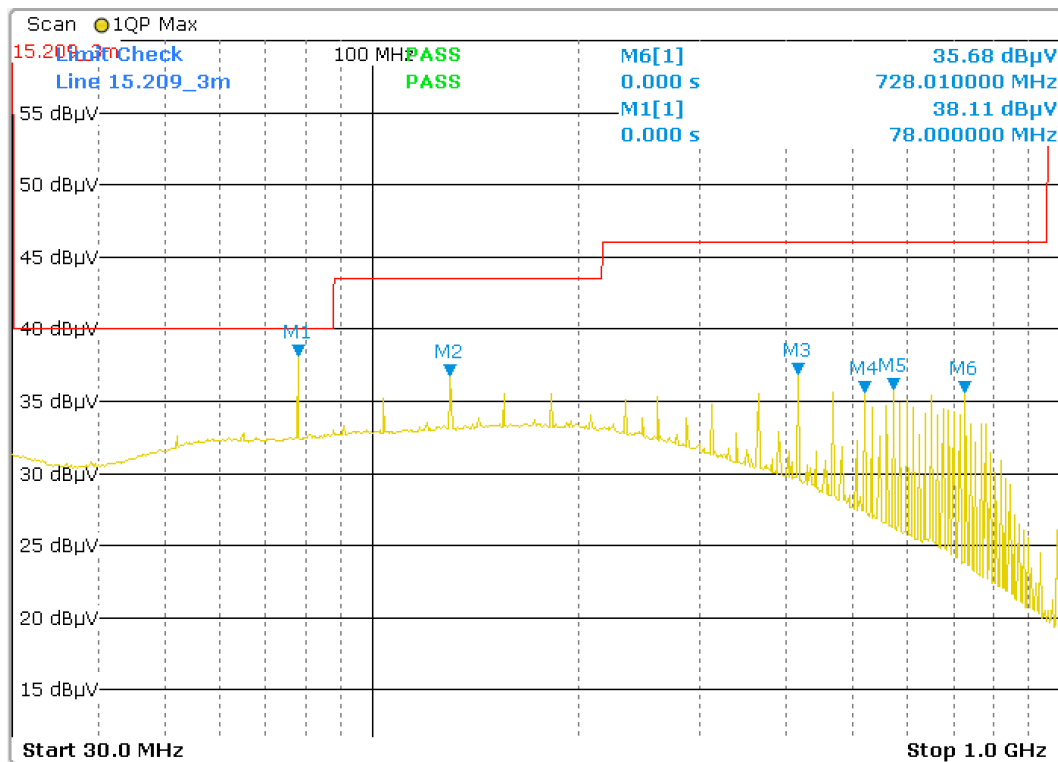


Frequency [MHz]	Marker	Detector	Reading [dBμV]	Limit [dBμV]	Result
78.000	1	QP	38.11	40.00	Pass
129.990	2	QP	36.80	43.52	Pass
416.010	3	QP	36.90	46.02	Pass
520.020	4	QP	35.65	46.02	Pass
572.010	5	QP	35.86	46.02	Pass
728.010	6	QP	35.68	46.02	Pass


Picture 33: spurious emission channel 78 - QP (30MHz – 1GHz)

Channel 0					
f [GHz]	Reading [dBμV]	Detector	Limit [dBμV]	Restricted Band	Result
2.4022	93.38	PK	- - - -	No	Carrier
2.4020	49.66	AV	- - - -		Carrier
4.8034	60.87	PK	74	Yes	Pass
4.8040	36.41	AV	54		Pass
7.2065	41.48	PK	-20dBc	No	Pass
7.2061	27.37	AV	-20dBc		Pass


Picture 34: spurious emission channel 0 - Table (1GHz - 26GHz)

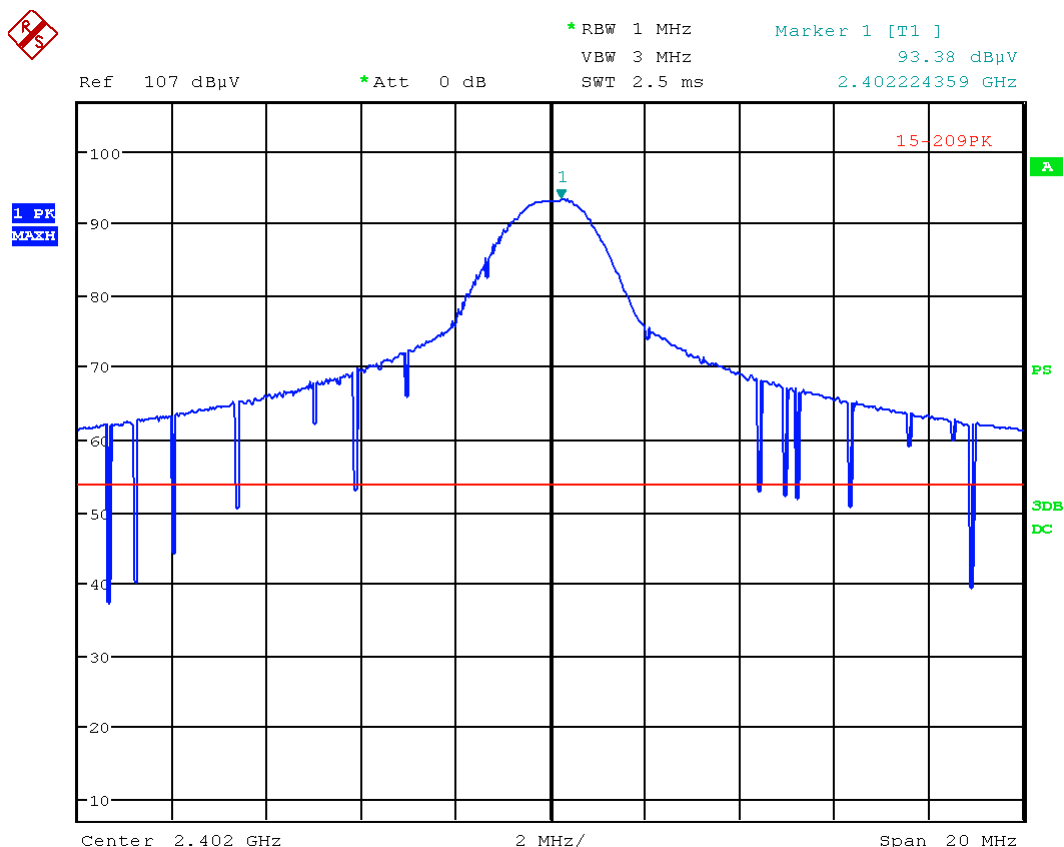


Picture 35: spurious emission channel 0 - PK (1GHz - 26GHz)

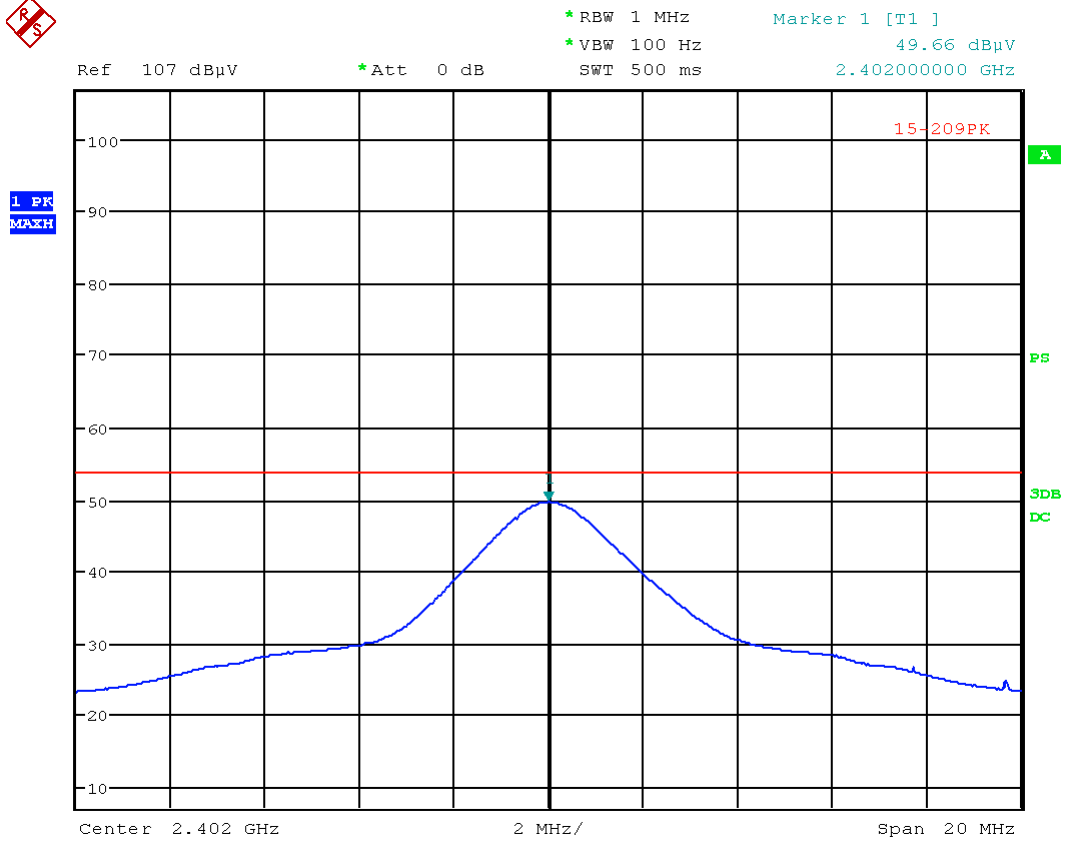


Picture 36: spurious emission channel 0 - AV (1GHz - 26GHz)

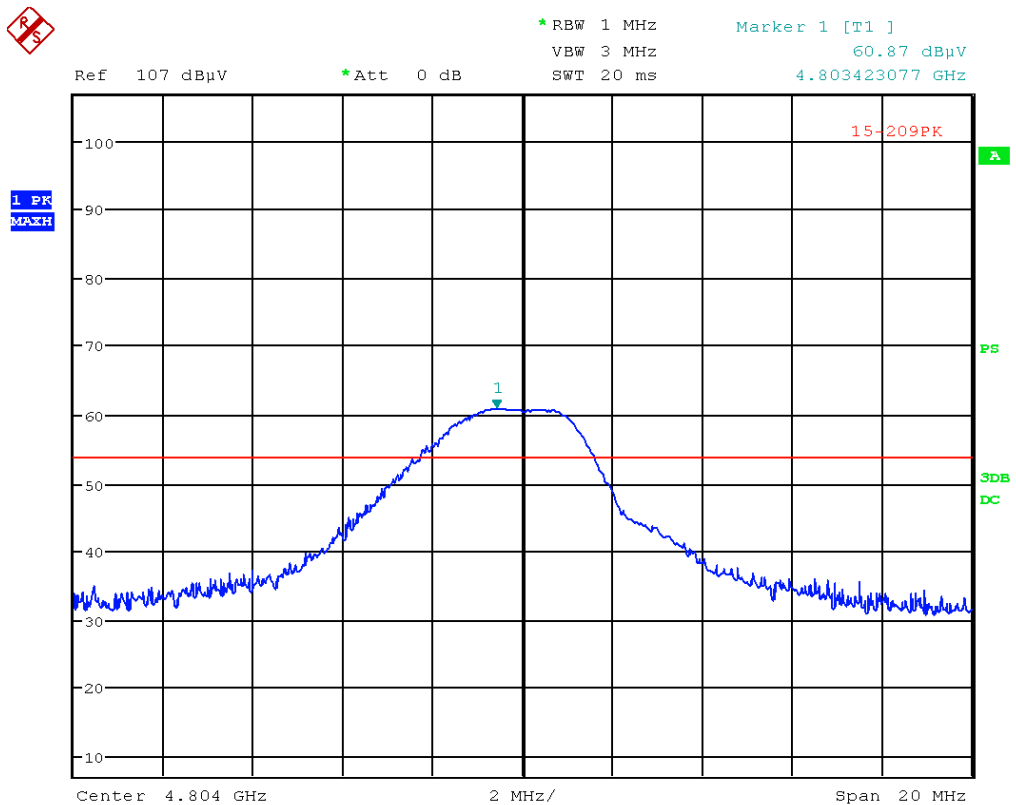


Picture 37: spurious emission channel 0 - PK (1GHz - 26GHz)

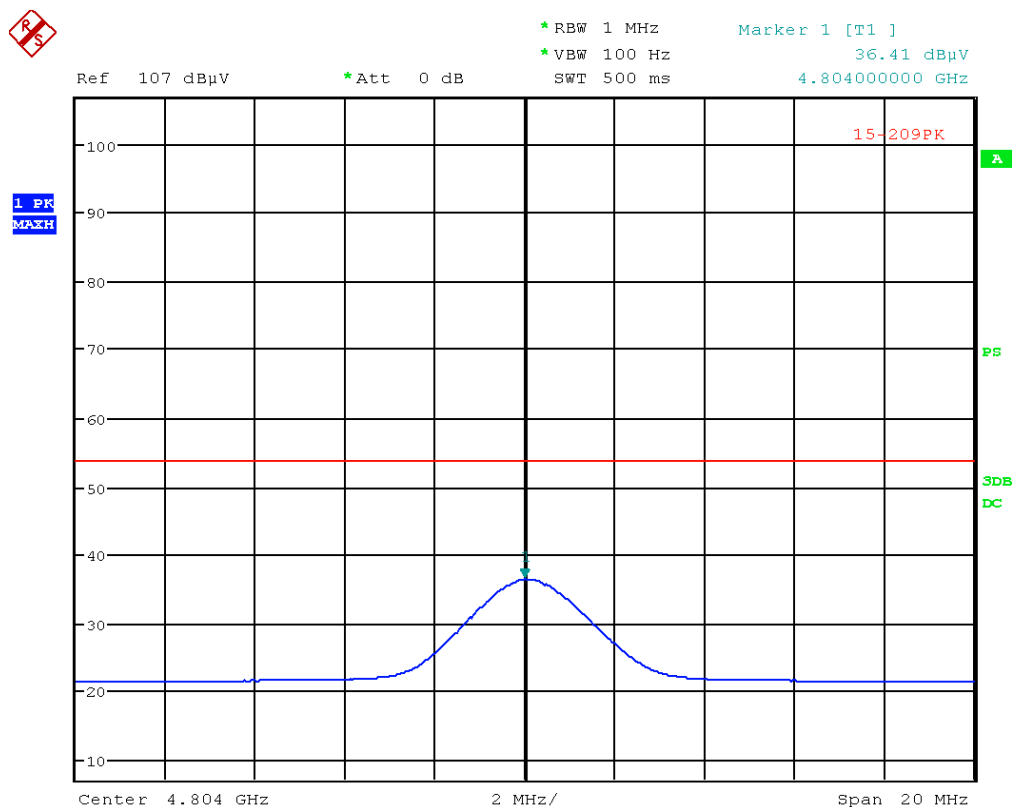

Picture 38: spurious emission channel 0 - AV (1GHz - 26GHz)

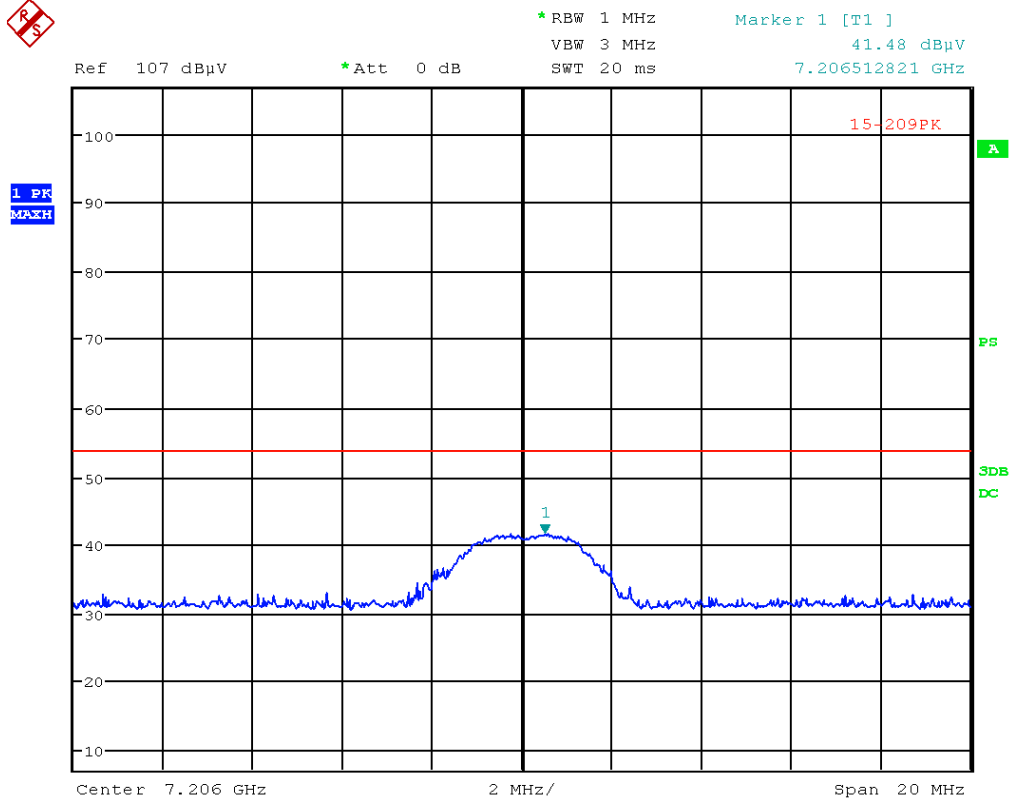

Picture 39: spurious emission channel 0 - PK (1GHz - 26GHz)

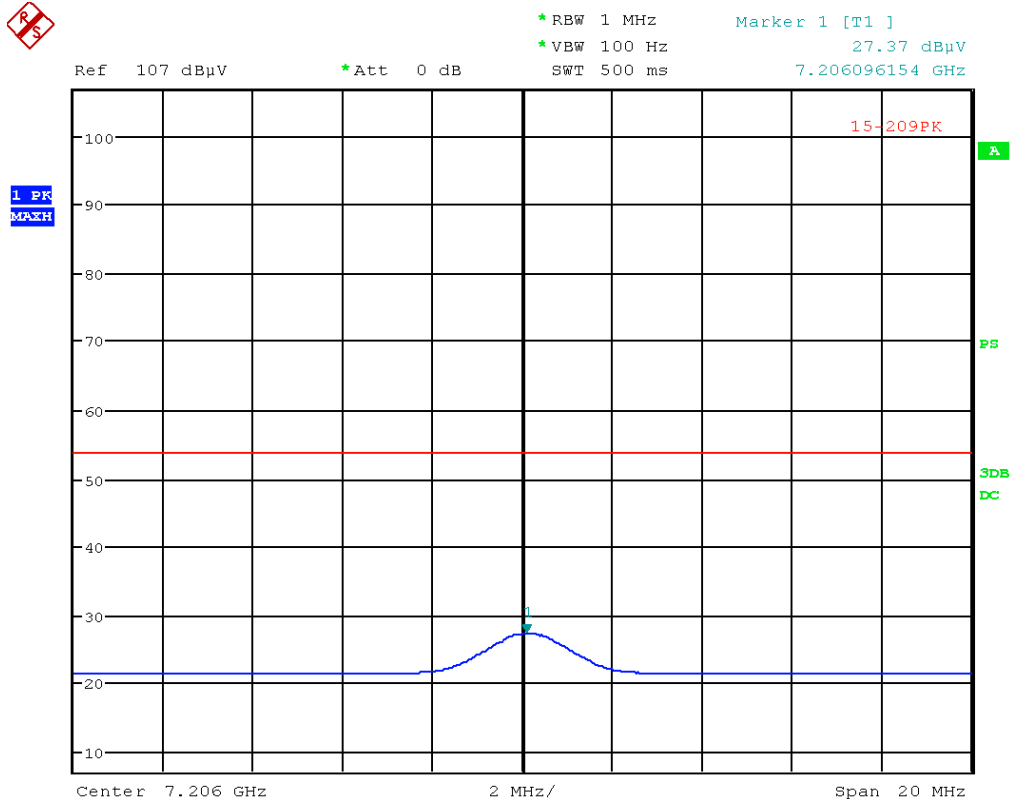

Picture 40: spurious emission channel 0 - AV (1GHz - 26GHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 50 of 83

Channel 39					
f [GHz]	Reading [dBμV]	Detector	Limit [dBμV]	Restricted Band	Result
2.4414	93.97	PK	- - - -	No	Carrier
2.4410	52.37	AV	- - - -		Carrier
4.8811	58.60	PK	74	Yes	Pass
4.8821	36.81	AV	54		Pass
7.3238	43.66	PK	74	Yes	Pass
7.3231	29.05	AV	54		Pass


Picture 41: spurious emission channel 39 - Table (1GHz - 26GHz)

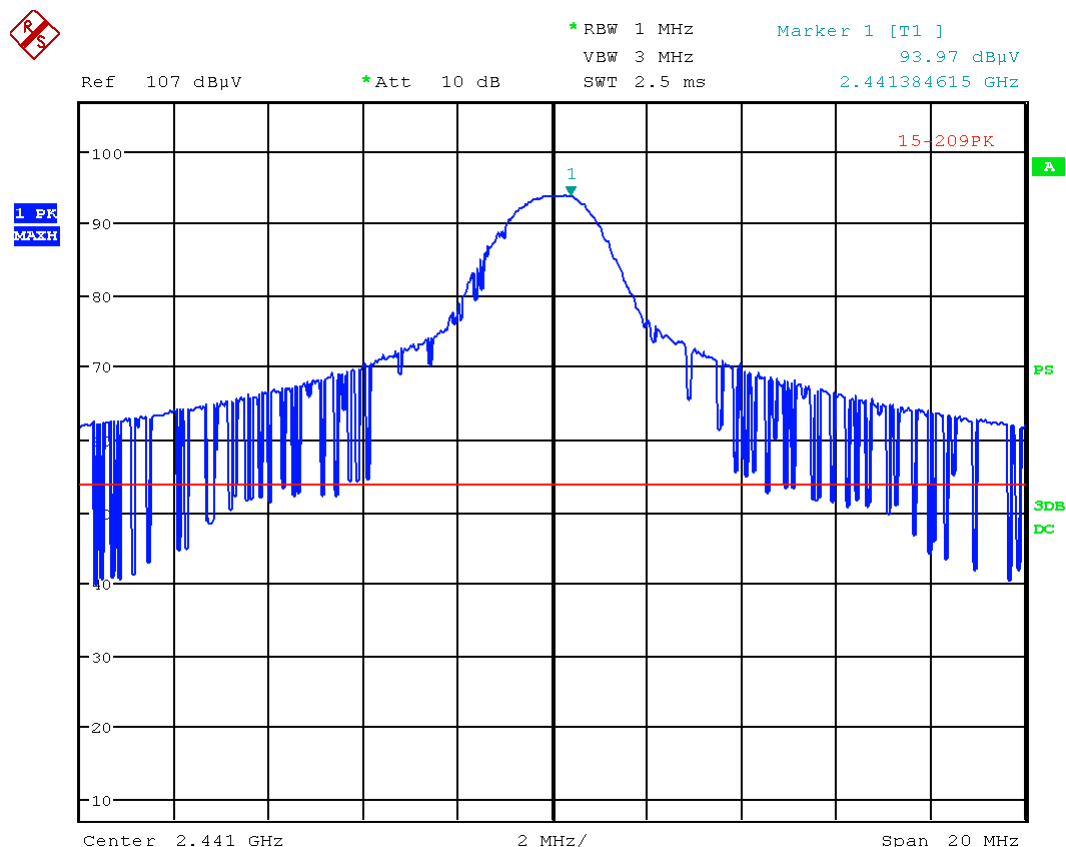


Picture 42: spurious emission channel 39 - PK (1GHz - 26GHz)

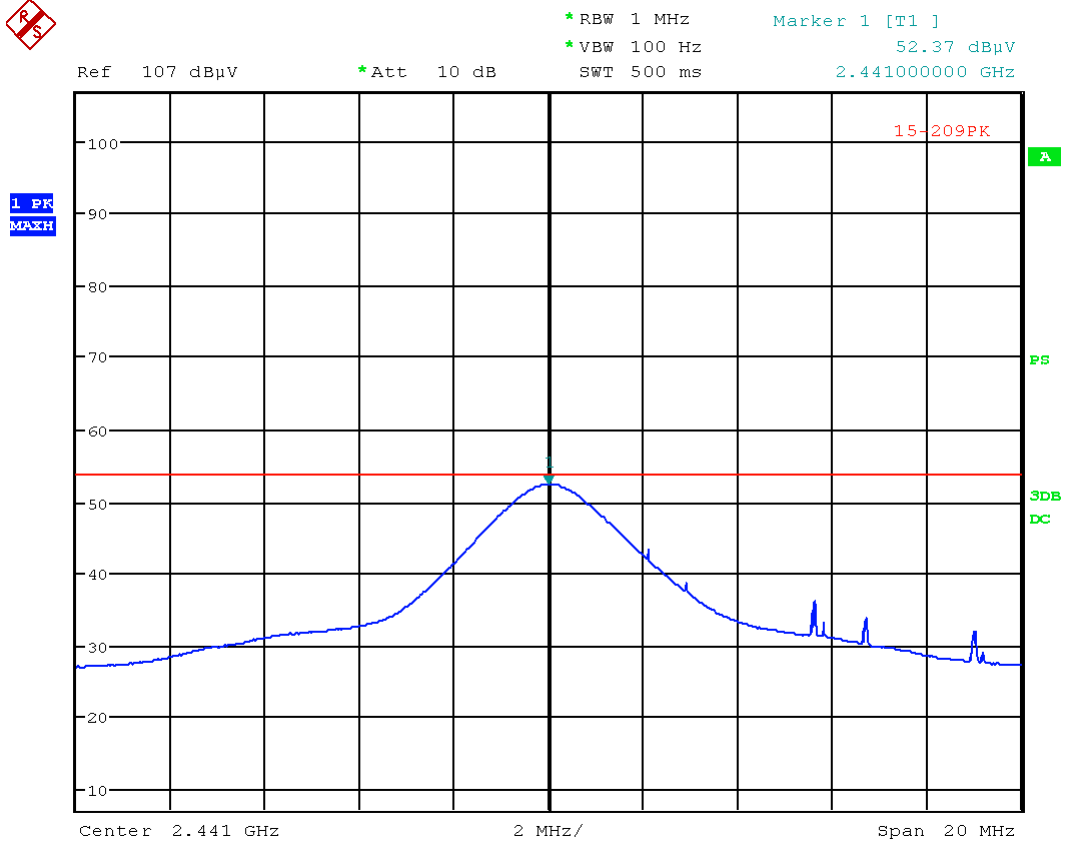



Picture 43: spurious emission channel 39 - AV (1GHz - 26GHz)

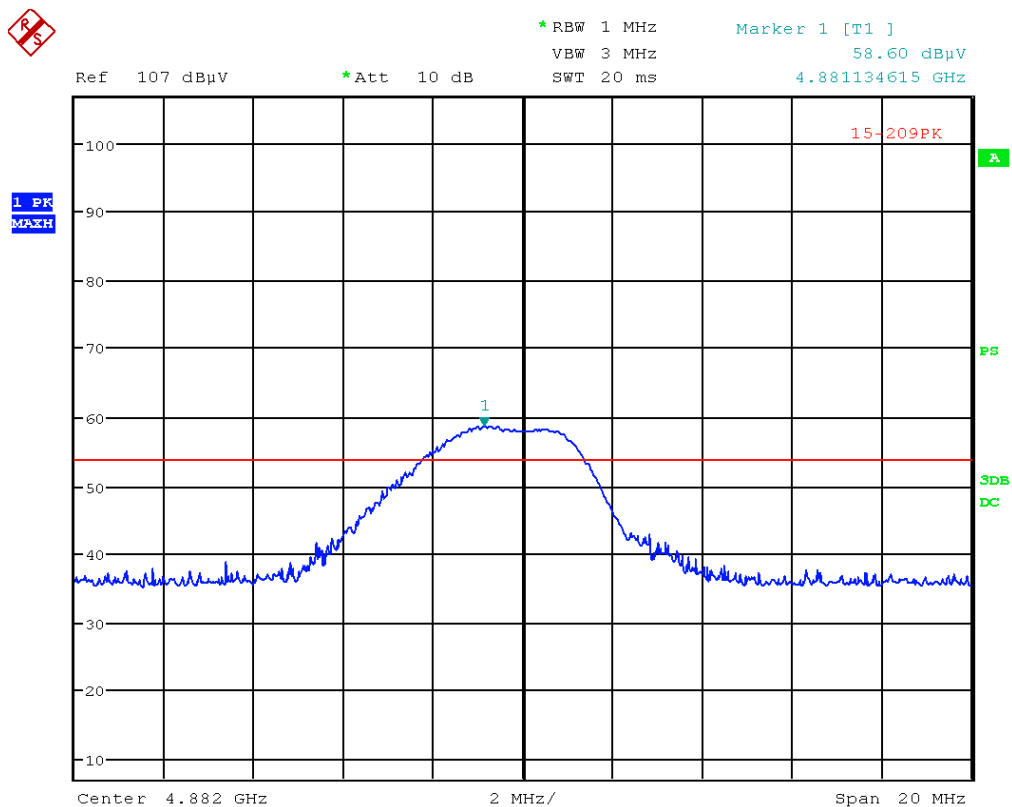

Picture 44: spurious emission channel 39 - PK (1GHz - 26GHz)

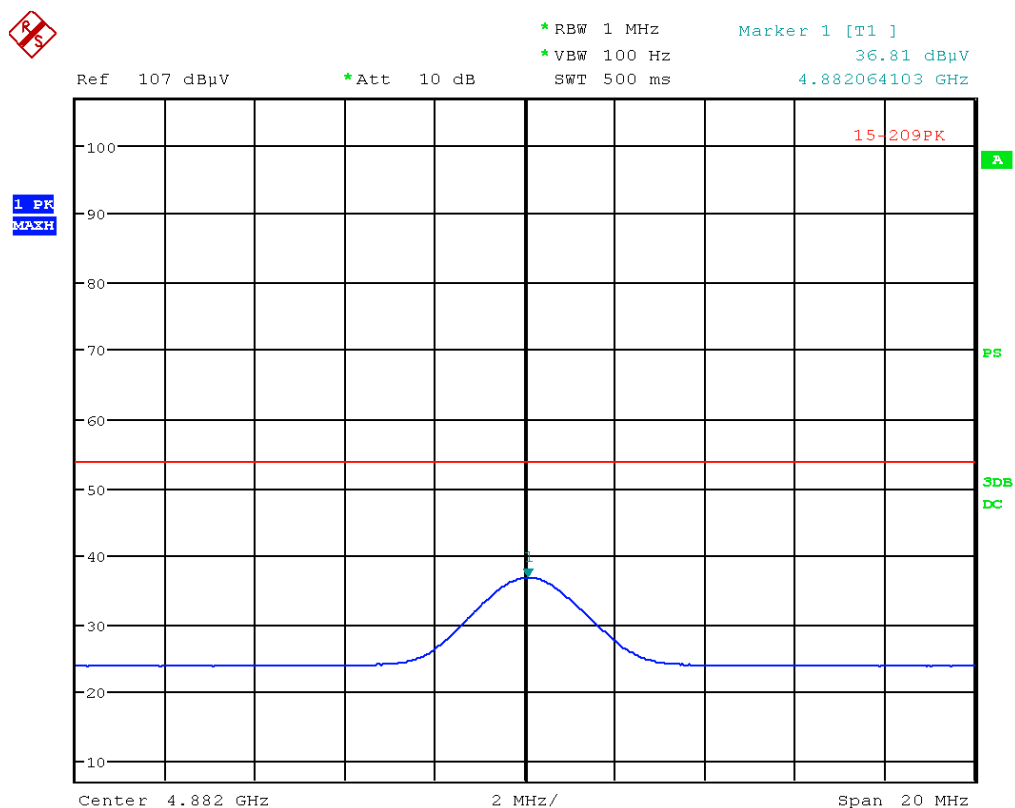


Picture 45: spurious emission channel 39 - AV (1GHz - 26GHz)

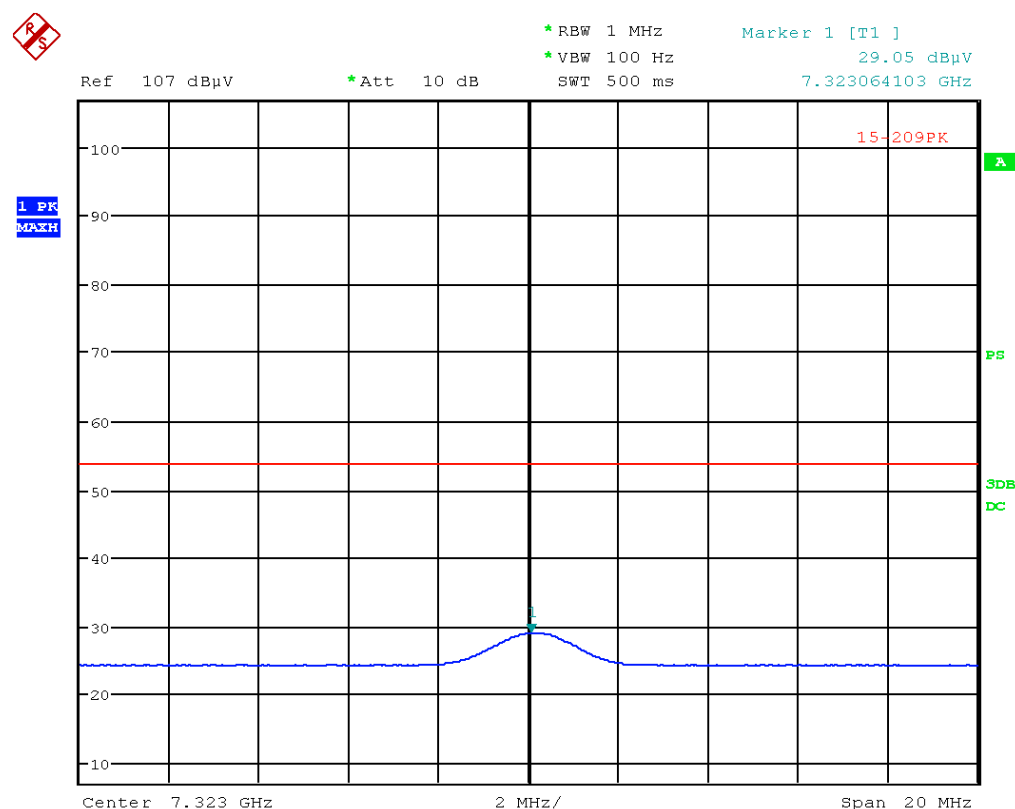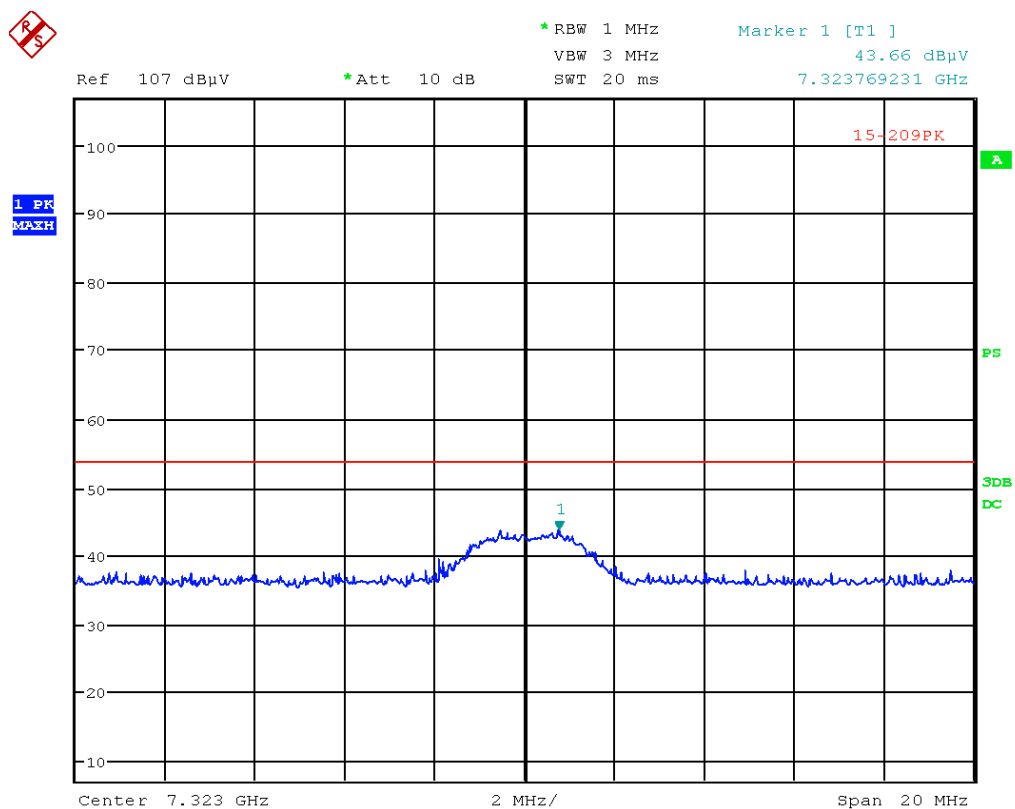


Channel 78					
f [GHz]	Reading [dBμV]	Detector	Limit [dBμV]	Restricted Band	Result
2.4804	94.01	PK	- - - -	No	Carrier
2.4800	52.34	AV	- - - -		Carrier
4.9589	54.84	PK	74	Yes	Pass
4.9601	35.19	AV	54		Pass
7.4404	43.56	PK	74	Yes	Pass
7.4401	28.98	AV	54		Pass


Picture 48: spurious emission channel 78 - Table (1GHz - 26GHz)

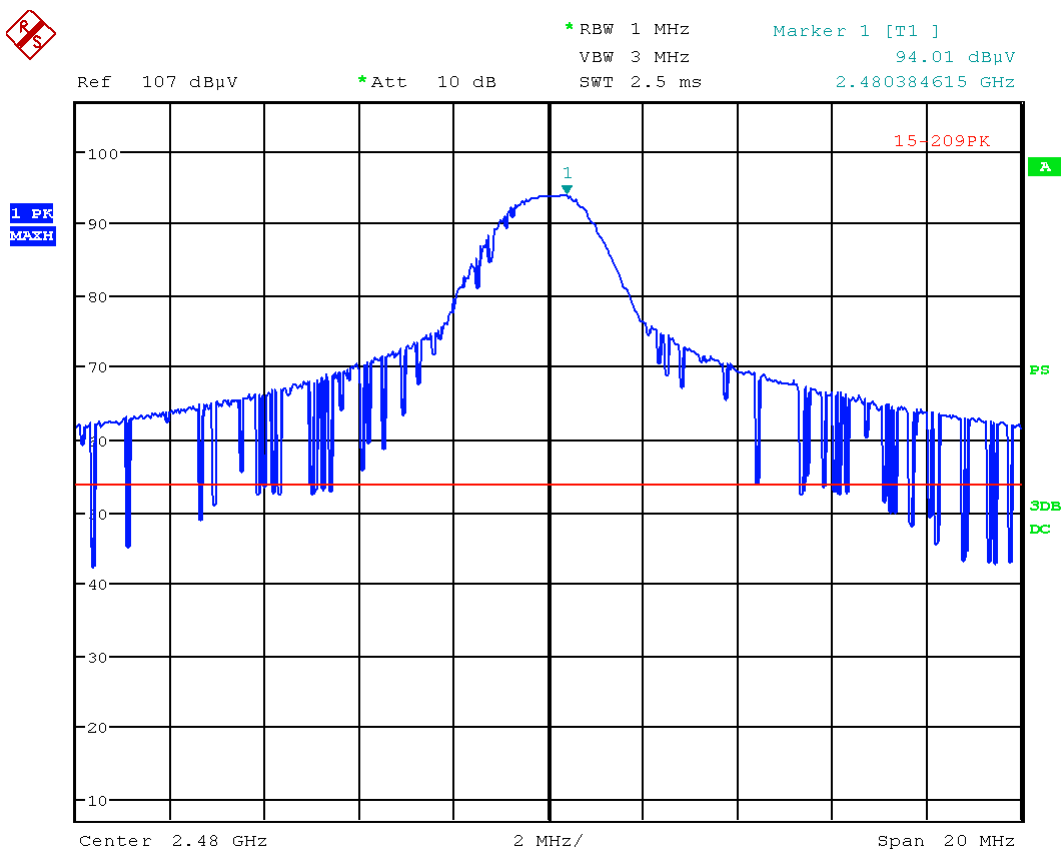


Picture 49: spurious emission channel 78 - PK (1GHz - 26GHz)

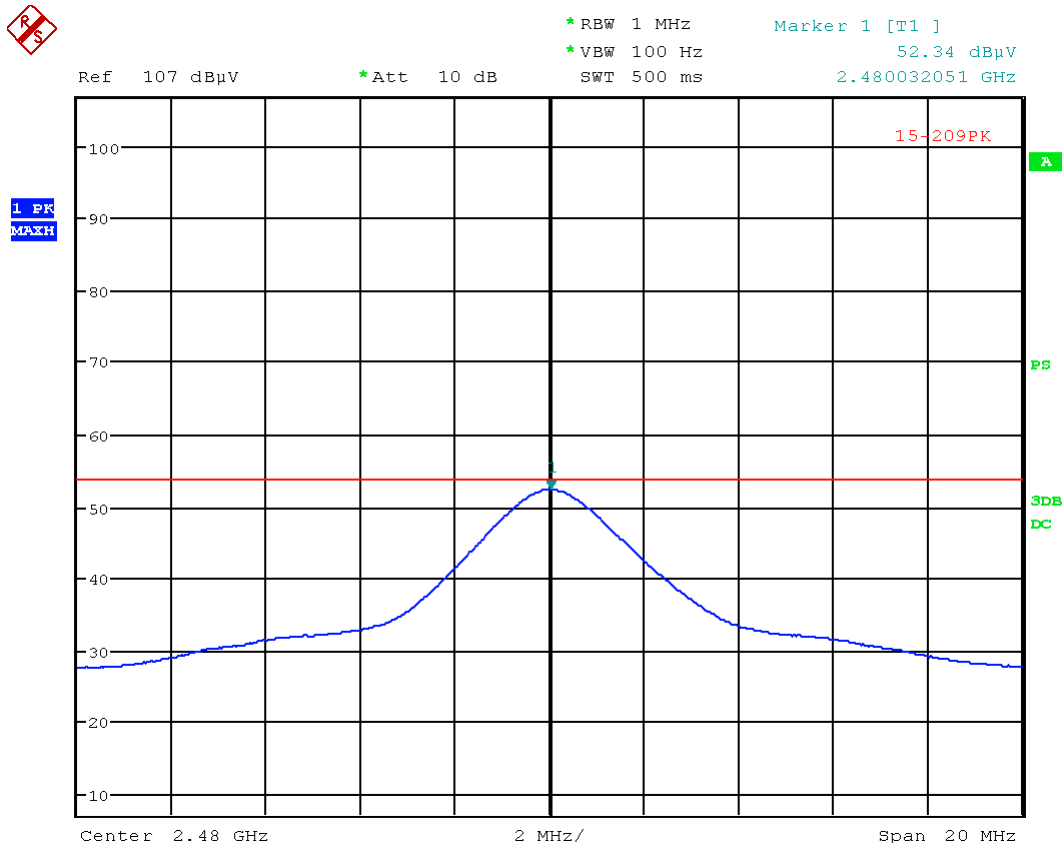


Picture 50: spurious emission channel 78 - AV (1GHz - 26GHz)

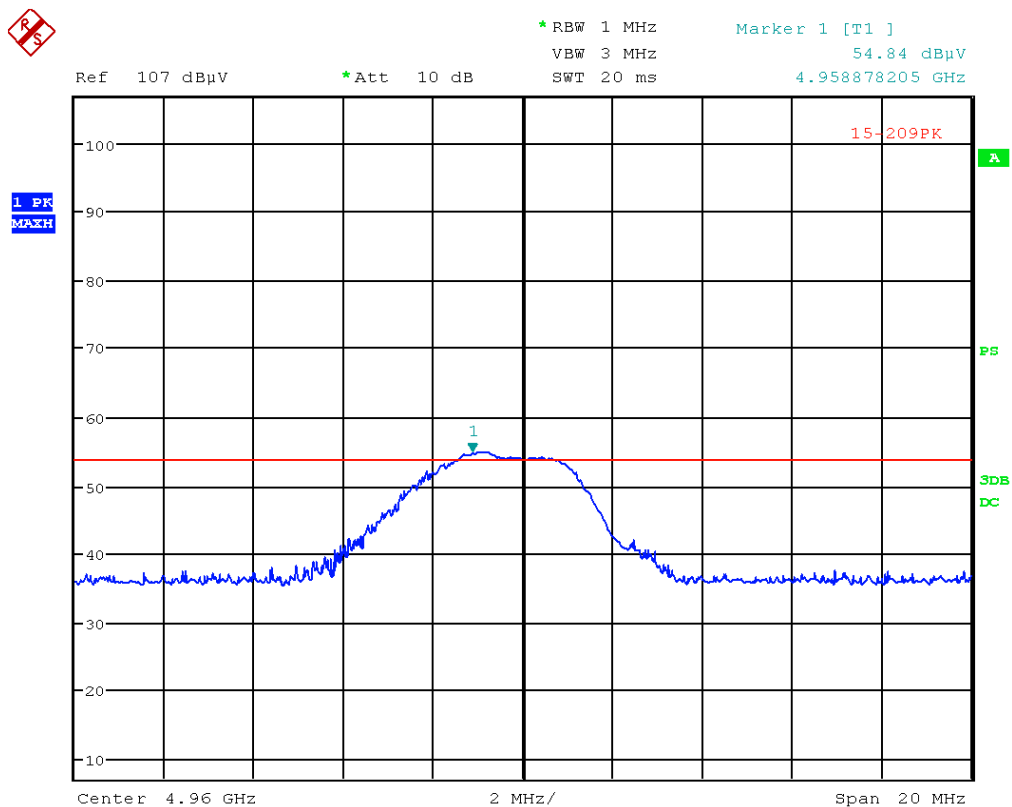


Picture 51: spurious emission channel 78 - PK (1GHz - 26GHz)

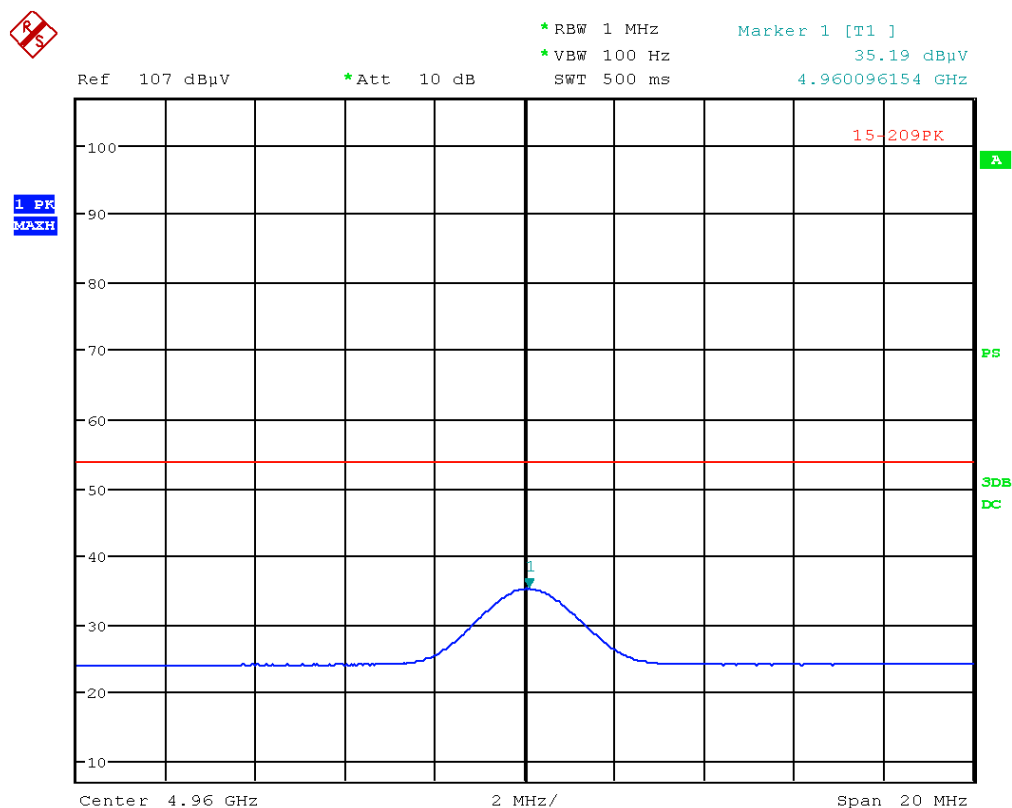

Picture 52: spurious emission channel 78 - AV (1GHz - 26GHz)

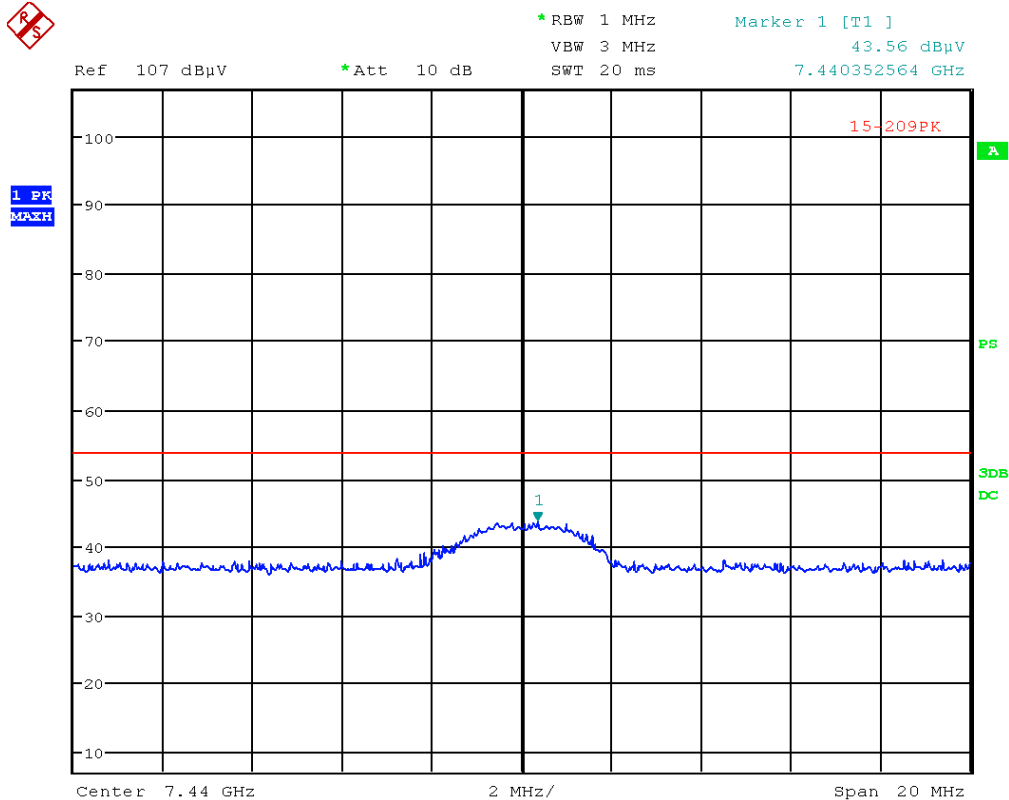

Picture 53: spurious emission channel 78 - PK (1GHz - 26GHz)

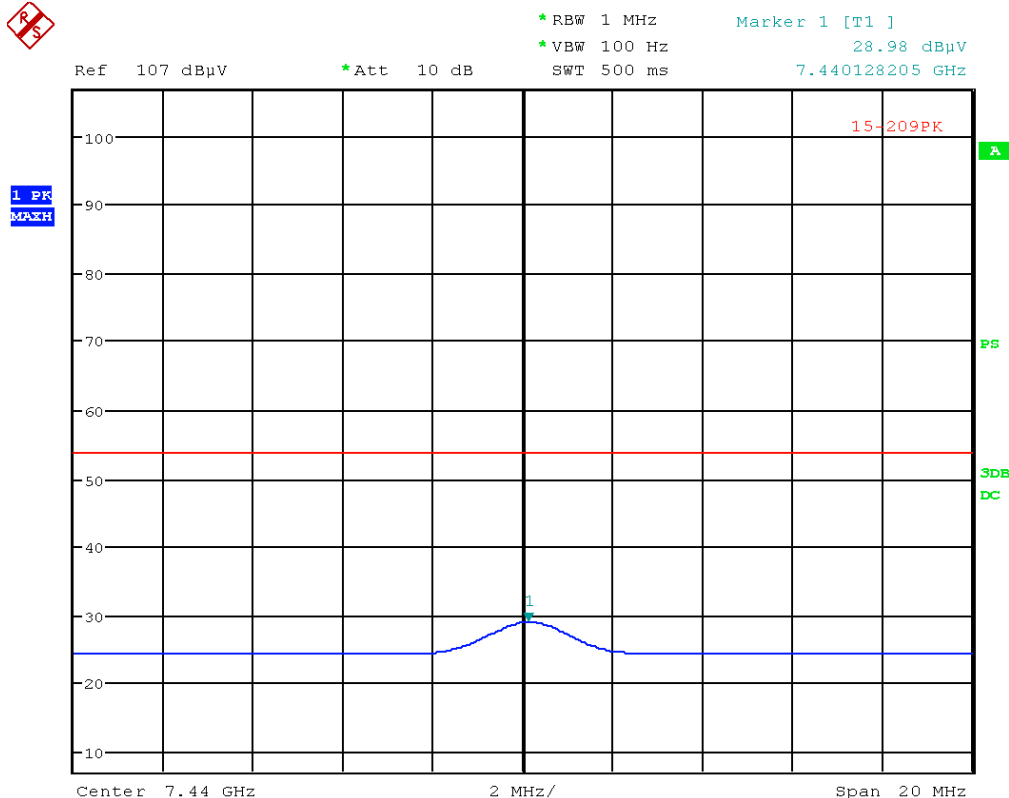

Picture 54: spurious emission channel 78 - AV (1GHz - 26GHz)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 58 of 83

12 Radiated emission measurement (<1 GHz)

according to CFR 47 Part 15, sections 15.205(a), 15.209(a),
15.247(d), and Public Notice DA 00-705

12.1 Test Location

- ☒ Scan with peak detector in 3 m CDC.
- ☒ Final CISPR measurement with quasi peak detector on 3 m open area test site.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open site area	EMV TESTHAUS GmbH	E00354

12.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input checked="" type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 59 of 83

12.3 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [$\text{dB}\mu\text{V/m}$]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

12.4 Test procedure

1. Configure the EUT according to ANSI C63.4. The EUT is placed on the top of the turntable 0.8 meter above ground. The receiving antenna is placed 3 meters from the turntable. For prescan measurements the test setup is placed inside a compact diagnostic chamber.
2. Power on the EUT and all peripherals.
3. The broadband antenna is set to vertical polarization.
4. The EMI receiver performs a scan from 9 kHz to 30 MHz or 30MHz to 1000MHz with the detector set to peak. Appropriate CISPR measurement bandwidths are used, i. e. 200 Hz for the frequency range 9 kHz to 150 kHz, 10 kHz for 150 kHz to 30 MHz and 120 kHz for 30MHz to 1000MHz.
5. The turn table is rotated to 6 different positions ($360^\circ / 6$) and the antenna polarization is changed to horizontal.
6. Repeat the test procedure at step 4 and 5.
7. Then the test setup is placed in an OATS at 3 m distance and all peak values over or with less than 6dB margin to the limit are re-measured with quasi-peak detector (except for the frequency bands 9–90 kHz and 110–490 kHz where average detector is used). If the margin of all emissions recorded prescan in the compact diagnostic chamber is more than 6 dB no final test in OATS is performed.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization. The highest value is recorded.
10. For emissions below 30MHz, measurements are performed with a loop antenna. The antenna height is not changed during this test.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021


140603-AU02+W02

Page 60 of 83

12.5 Test setup

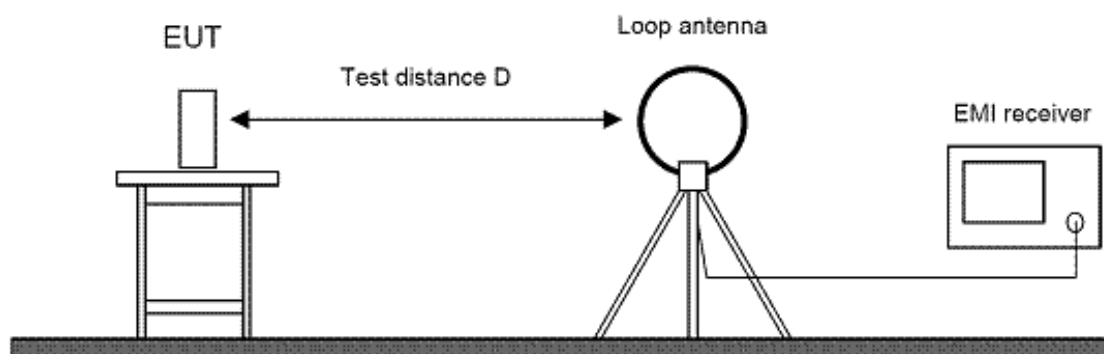

Picture 55: Test setup for radiated emission measurement (< 30 MHz)

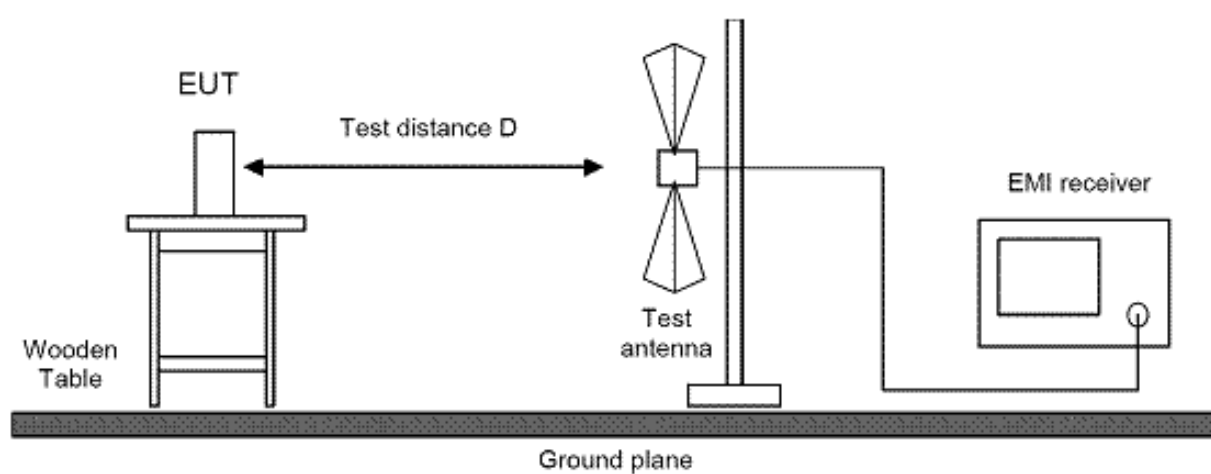

Picture 56: Test setup for radiated emission measurement (< 1 GHz)

12.6 Test deviation

There is no deviation with the original standard.

12.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.

It was also investigated that the EUT-position2 is the respective worst-case for the measurements below 1GHz.

For the measurements below 30MHz the loop-antenna was polarised to "I".

12.8 Test results

Transmit mode

Temperature:	21°C	Humidity:	44%
Tested by:	M. Müller	Test date:	2014-10-13

Radiated Emission Measurement 9 kHz – 30 MHz

Note:

Measured value = dB μ V/m @ 3 m

Recalculation factor = 40 dB / decade

Recalculated value1 = dB μ V/m @ 3 m - 40 dB = **dB μ V/m @ 30 m**

Recalculated value2 = dB μ V/m @ 30 m - 40 dB = **dB μ V/m @ 300 m**




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 62 of 83

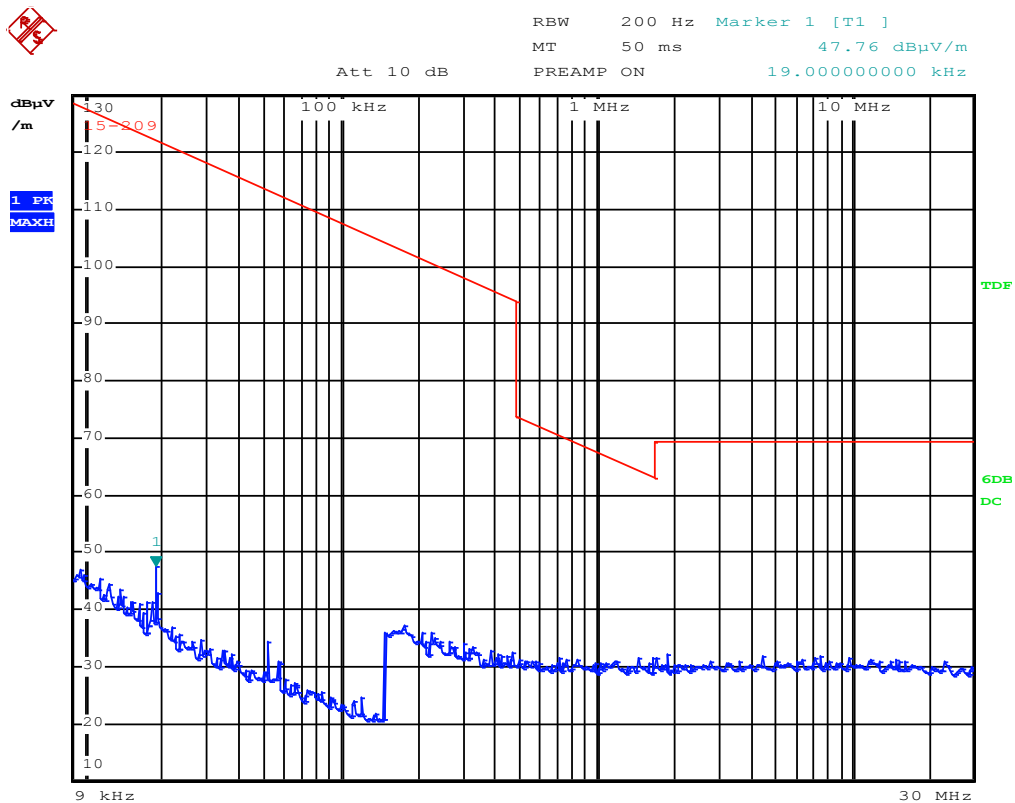

Picture 57: Radiated emission 9 kHz – 30MHz (Channel 0)

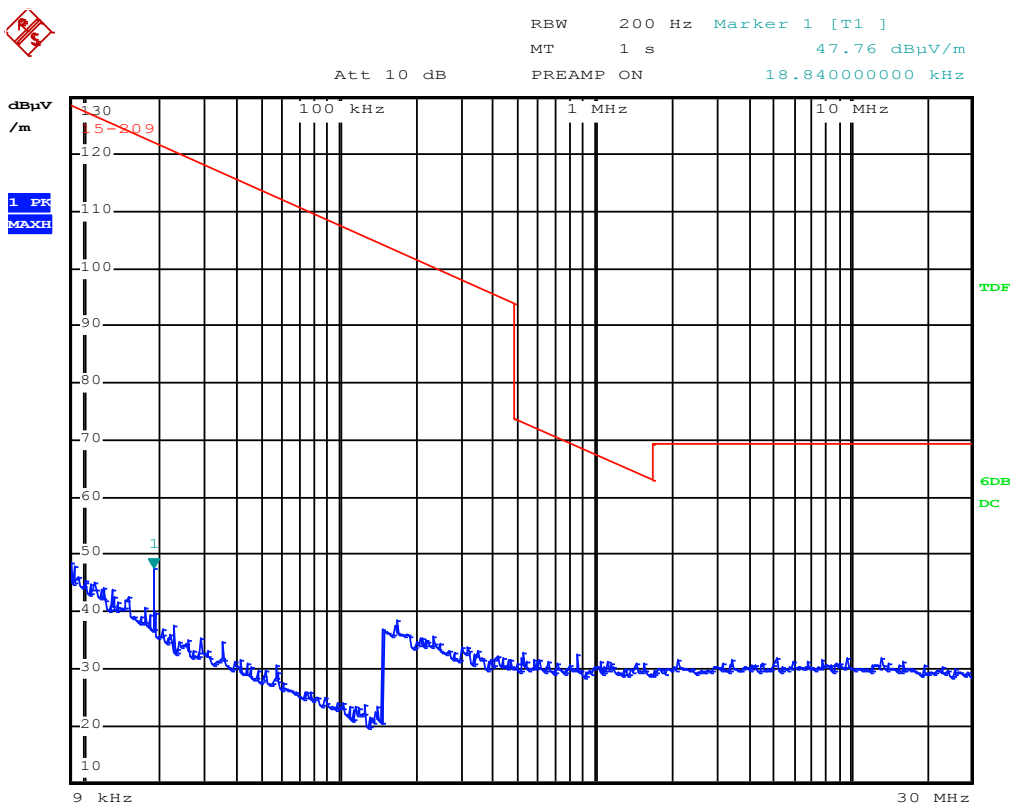

Picture 58: Radiated emission 9 kHz – 30MHz (Channel 39)

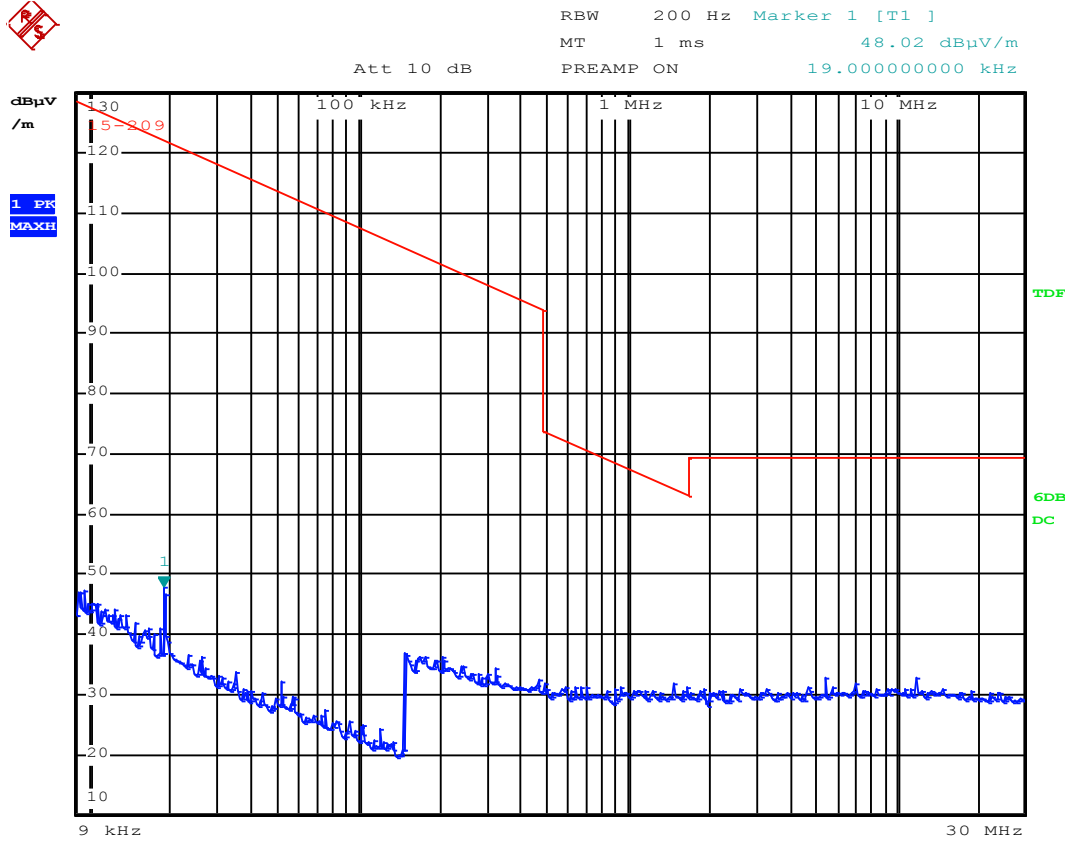

Picture 59: Radiated emission 9 kHz – 30MHz (Channel 78)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 64 of 83

Transmit mode


Temperature:	22°C	Humidity:	43%
Tested by:	M. Müller	Test date:	2014-10-08

Radiated Emission Measurement 30 MHz - 1 GHz


It was investigated that EUT position 2 is the respective worst-case.

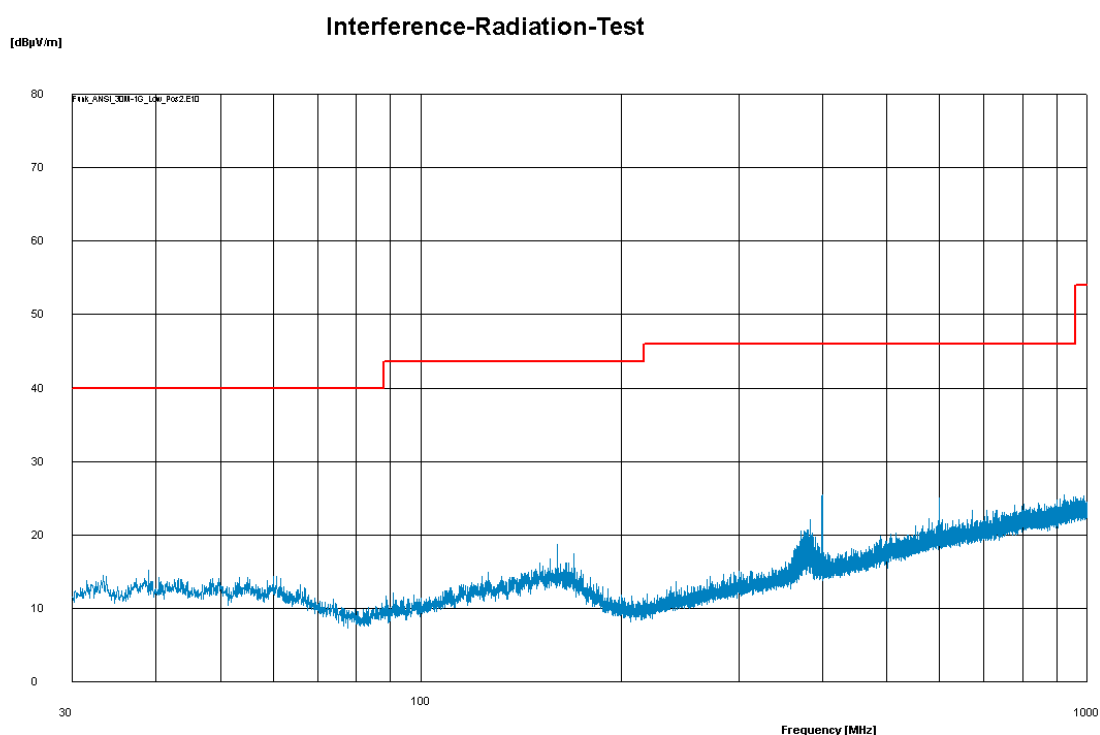

Picture 60: Radiated emission 30 MHz – 1000MHz (Channel 0)

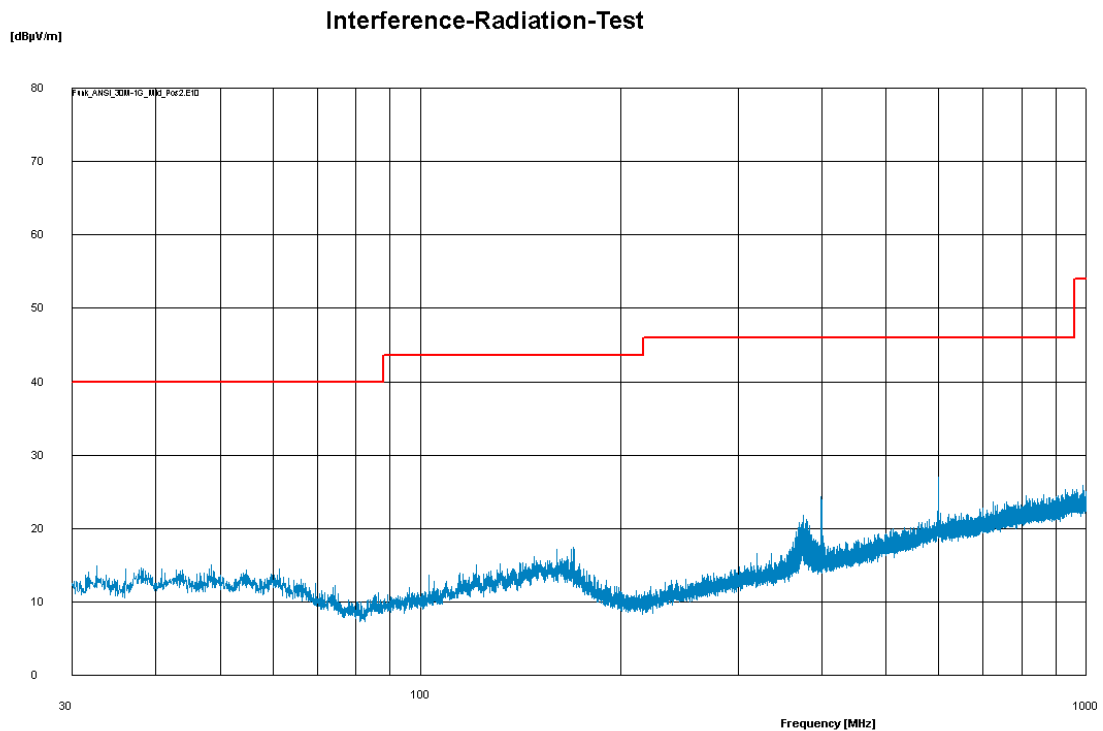

Picture 61: Radiated emission 30 MHz – 1000MHz (Channel 39)

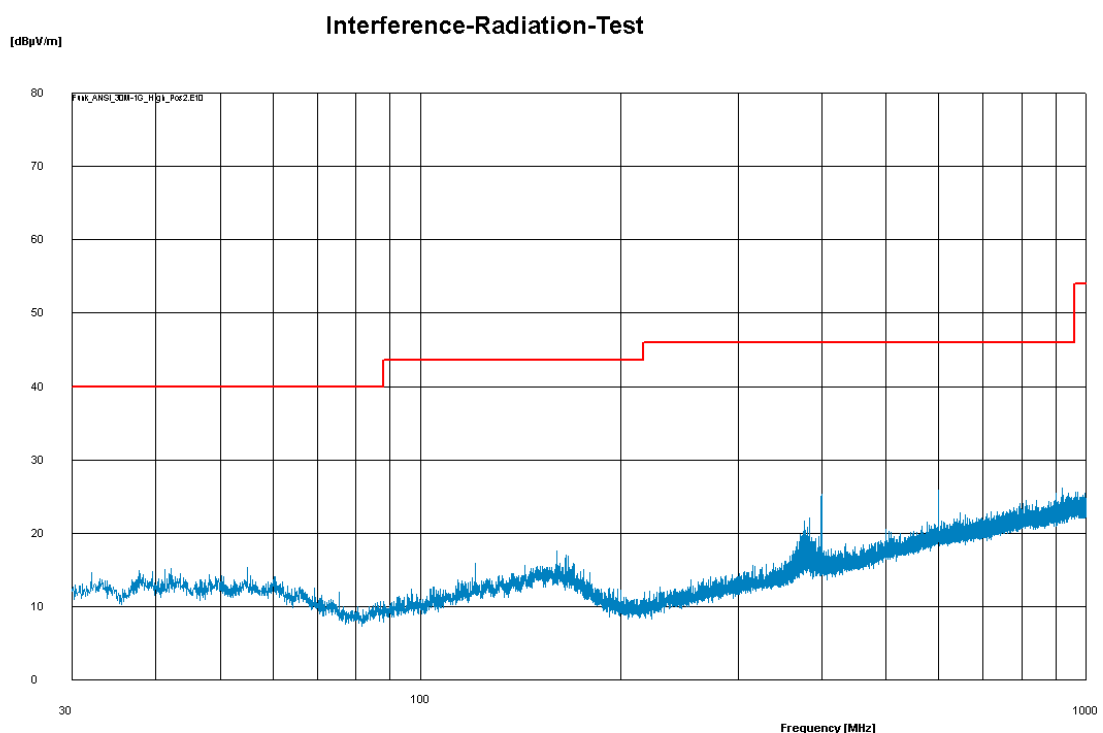

Picture 62: Radiated emission 30 MHz – 1000MHz (Channel 78)

13 Radiated emission measurement (>1 GHz)

according to CFR 47 Part 15, sections 15.205(a), 15.209(a), 15.247(d), and Public Notice DA 00-705

13.1 Test location

- ☒ Scan with peak detector in 3 m anechoic chamber
- ☒ Final measurement with average and max peak detector.

Description	Manufacturer	Inventory No.
Anechoic chamber	EMV TESTHAUS GmbH	E00100

13.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESU26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	AMF-5D-00501800-28-13P	Miteq	W00089
<input checked="" type="checkbox"/>	AMF-6F-16002650-25-10P	Miteq	W00090
<input checked="" type="checkbox"/>	BBHA 9120D	Schwarzbeck	W00053
<input checked="" type="checkbox"/>	BBHA 9170	Schwarzbeck	W00055
<input checked="" type="checkbox"/>	COSB 4-1-26	Conformitas	W00091

13.3 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 67 of 83

Frequency [MHz]	Field strength Fs [μV/m]	Field strength [dBμV/m]	Measurement distance d [m]
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

13.4 Test procedure

6. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a fully anechoic chamber.
7. Power on the EUT and all peripherals.
8. The broadband antenna was set to vertical polarization.
9. The EMI receiver performed a scan from 1000 MHz to 10th harmonic of the fundamental frequency with the detector set to peak and the measurement bandwidth set to 1 MHz (VBW ≥ 3 MHz). The trace data was recorded with the receiver Max Hold function.
10. The turn table was rotated in intervals of 15°.
11. After a full 360°-turn the antenna polarization was changed to horizontal and the test was repeated at step 4 and 5.
12. After the scan suspicious frequencies were selected and the RBW was set to 1 MHz and the VBW was set to 10Hz and the detector was changed to average reading.
13. The receiving antenna was set to vertical polarization.
14. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
15. The receiving antenna was then set to horizontal polarization and the measurement was repeated at step 9.
16. The highest recorded level was noted.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 68 of 83

13.5 Test setup

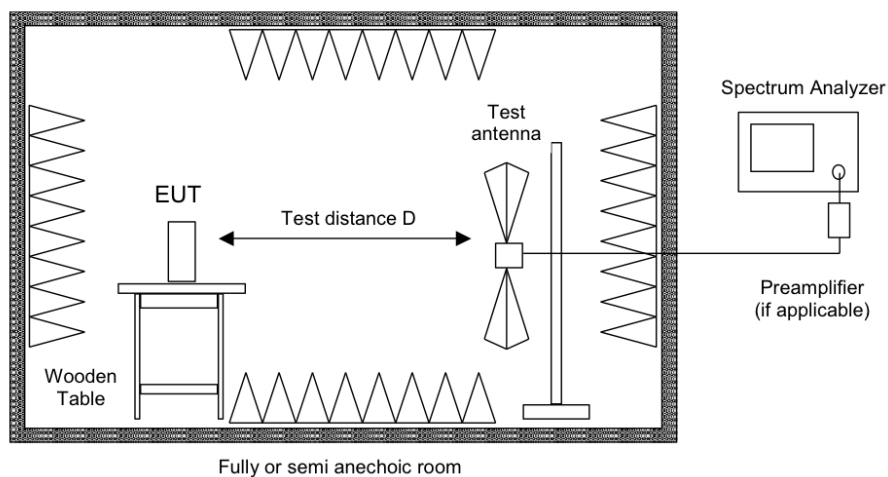

Picture 63: Test setup for radiated emission measurement (> 1 GHz)

13.6 Test deviation

There is no deviation with the original standard.

13.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode. For these measurements it was investigated that EUT-position2 in conjunction with antenna polarised to horizontal is the respective worst-case.

13.8 Test results channel 0

Temperature:	20°C	Humidity:	45%
Tested by:	M. Müller	Test date:	2014-10-15

Channel 0						
f [GHz]	Antenna polarisation	Reading [dBµV/m]	Detector	Limit [dBµV/m]	Restricted Band	Result
2.4019	horizontal	56.09	PK	- - - -	No	Carrier
2.4019		34.77	AV	- - - -		Carrier
4.8045	horizontal	47.14	PK	74	Yes	Pass
4.8041		32.67	AV	54		Pass

Picture 64: Radiated emission 1 GHz – 26 GHz




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 70 of 83

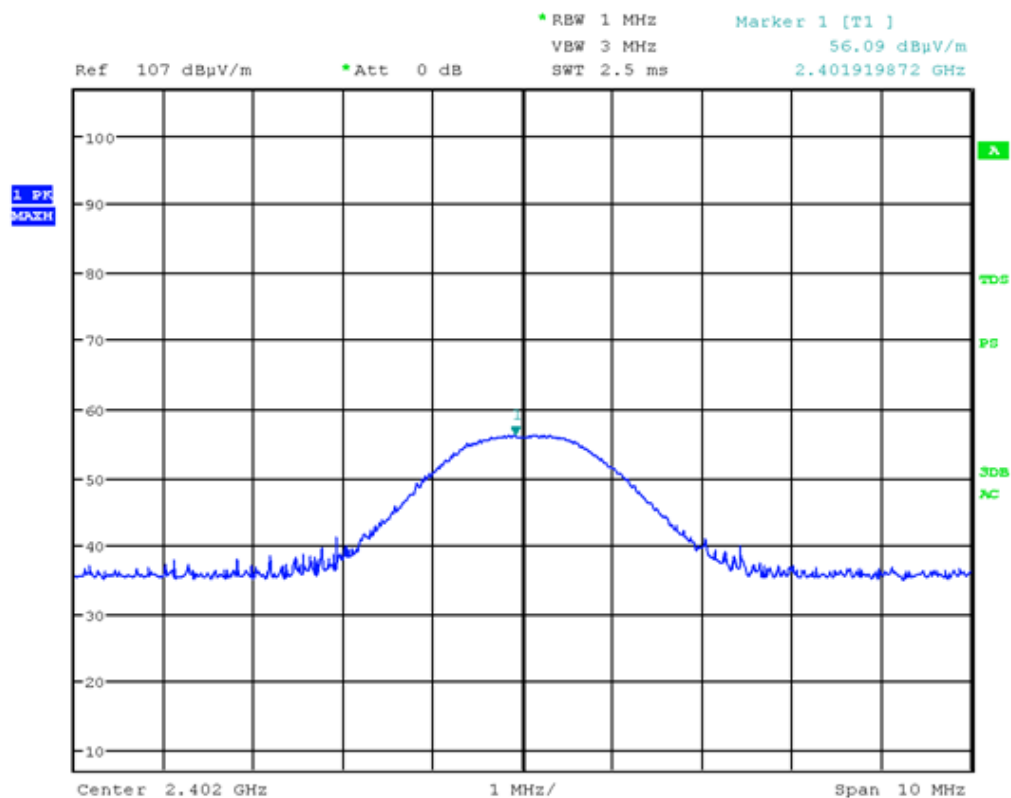


Picture 65: Radiated emission 1 GHz – 26 GHz - PK

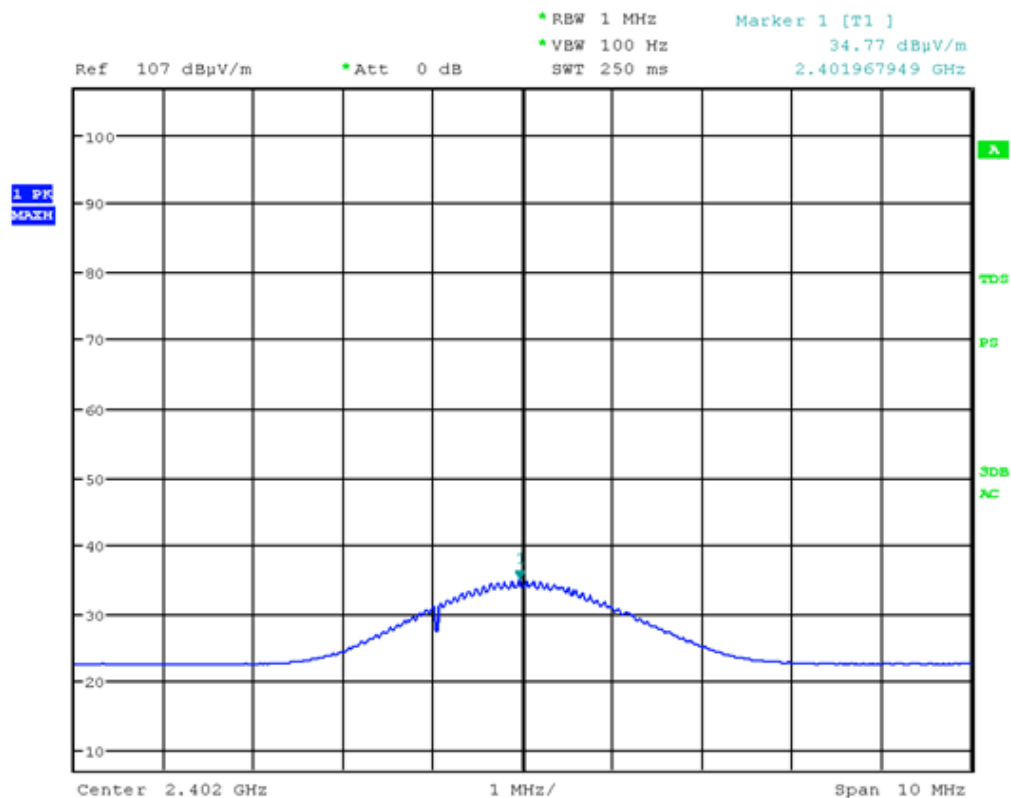

Picture 66: Radiated emission 1 GHz – 26 GHz - AV

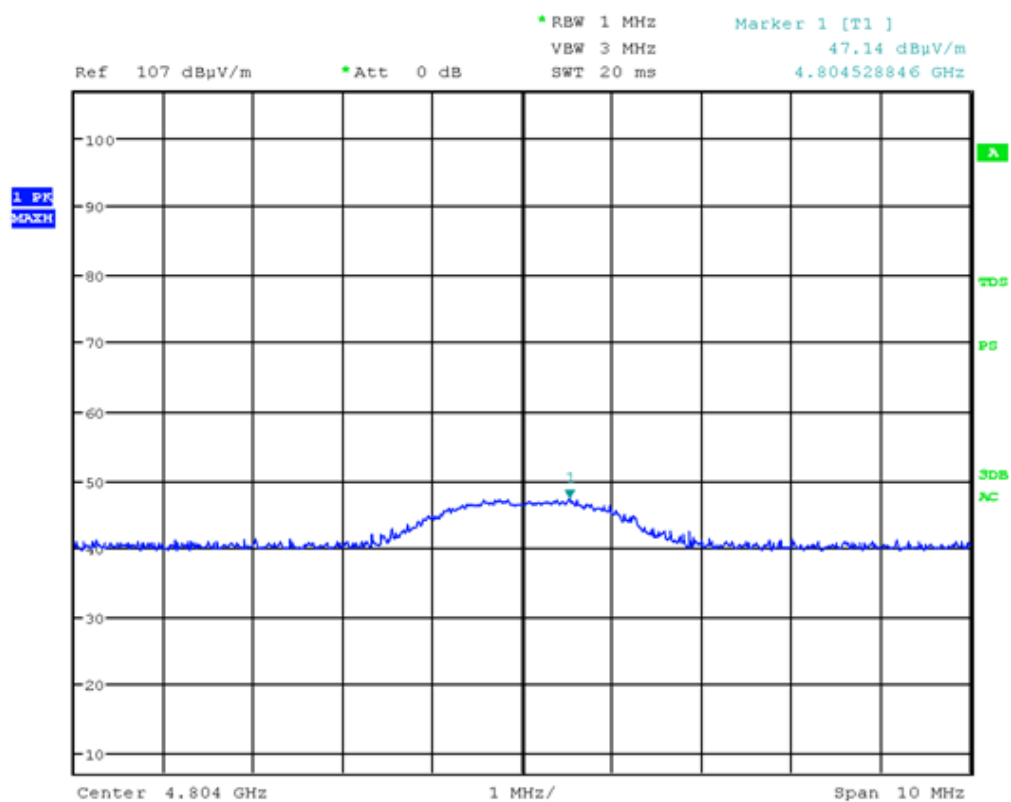

Picture 67: Radiated emission 1 GHz – 26 GHz - PK

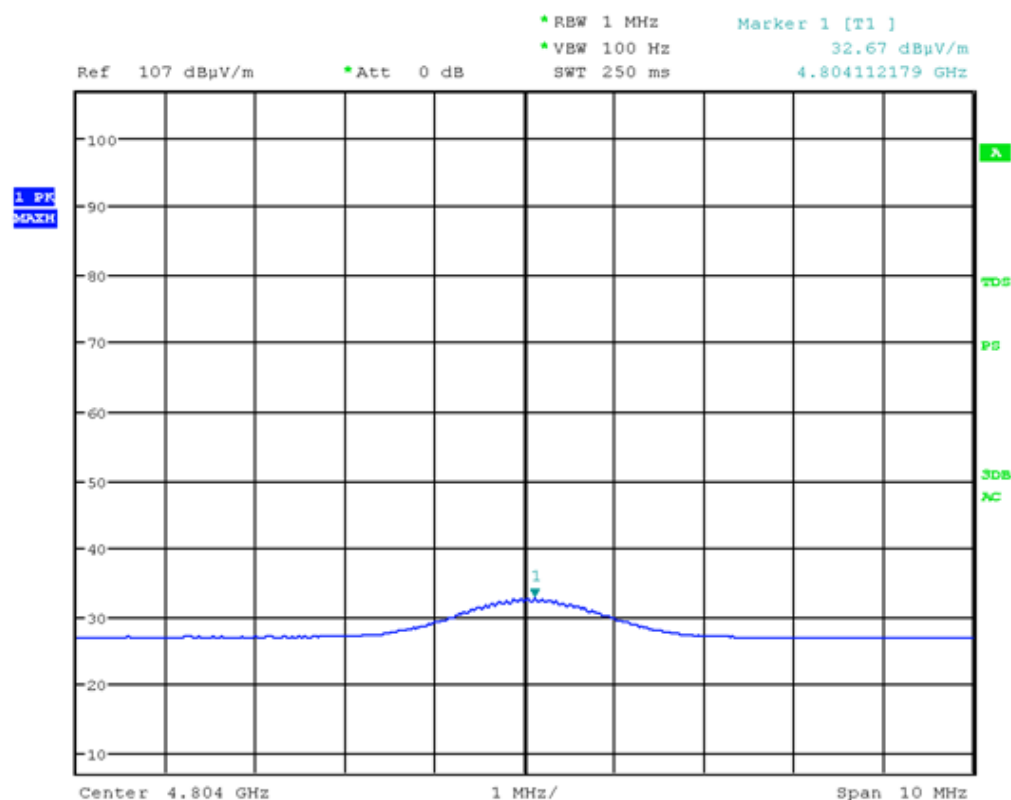

Picture 68: Radiated emission 1 GHz – 26 GHz - AV

13.9 Test results channel 39

Temperature:	20°C	Humidity:	45%
Tested by:	M. Müller	Test date:	2014-10-15

Channel 39						
f [GHz]	Antenna polarisation	Reading [dBµV/m]	Detector	Limit [dBµV/m]	Restricted Band	Result
2.4408	horizontal	57.61	PK	- - - -	No	Carrier
2.4409		35.62	AV	- - - -		Carrier
4.8823	horizontal	46.37	PK	74	Yes	Pass
4.8821		32.01	AV	54		Pass

Picture 69: Radiated emission 1 GHz – 26 GHz




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 73 of 83

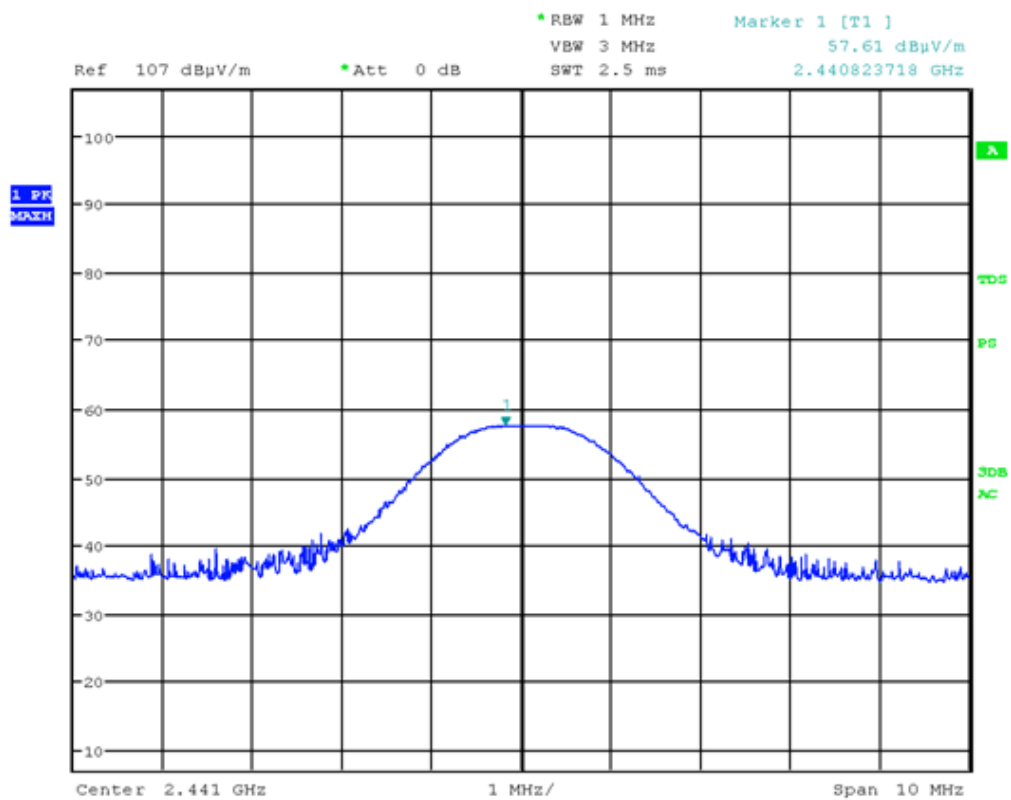


Picture 70: Radiated emission 1 GHz – 26 GHz - PK

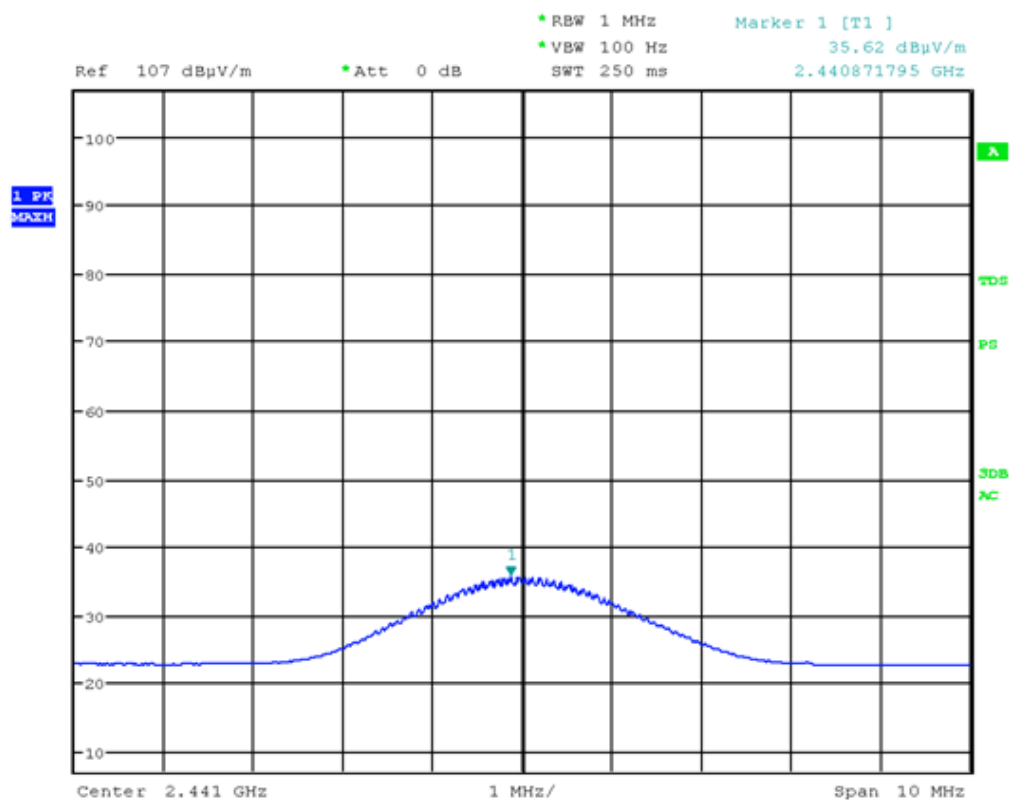

Picture 71: Radiated emission 1 GHz – 26 GHz - AV

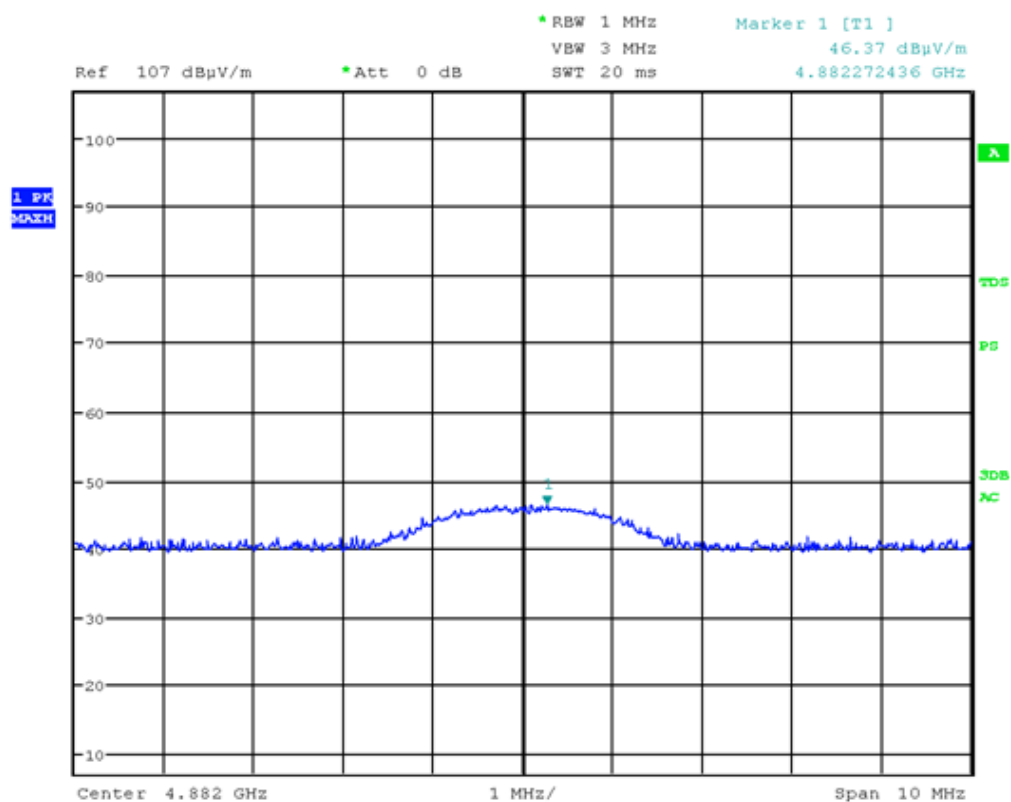

Picture 72: Radiated emission 1 GHz – 26 GHz - PK

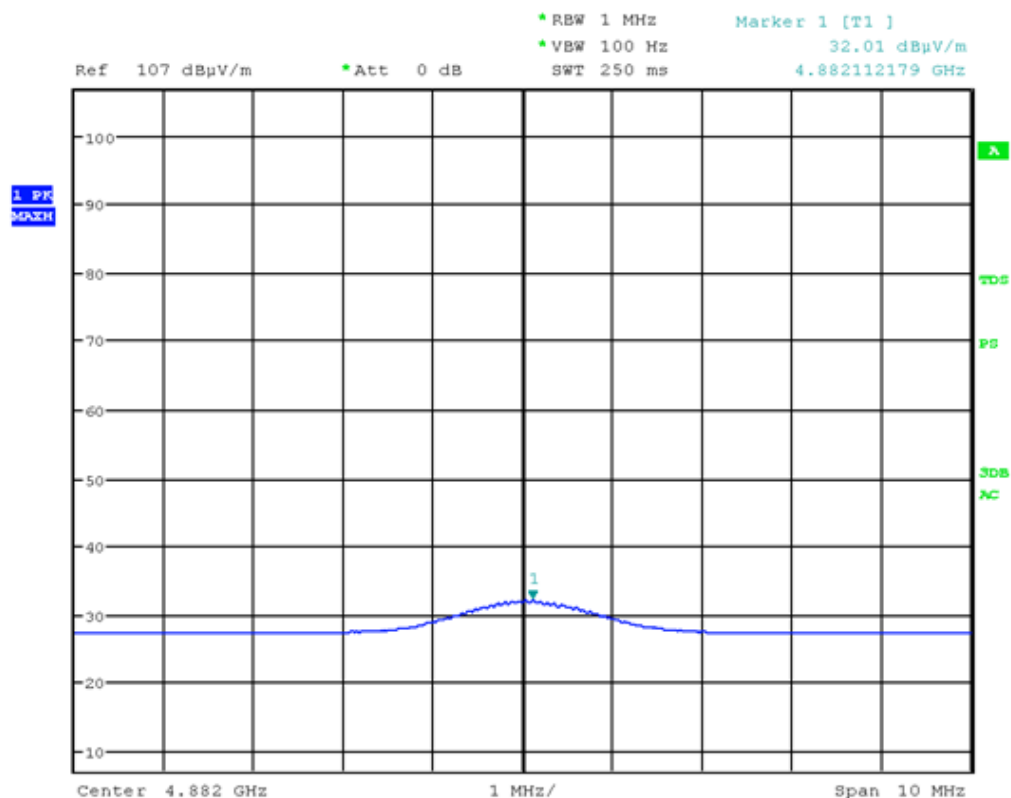

Picture 73: Radiated emission 1 GHz – 26 GHz - AV

13.10 Test results channel 78

Temperature:	20°C	Humidity:	45%
Tested by:	M. Müller	Test date:	2014-10-15

Channel 78						
f [GHz]	Antenna polarisation	Reading [dBµV/m]	Detector	Limit [dBµV/m]	Restricted Band	Result
2.4802	horizontal	58.18	PK	- - - -	No	Carrier
2.4801		35.94	AV	- - - -		Carrier
4.9605	horizontal	49.37	PK	74	Yes	Pass
4.9600		34.04	AV	54		Pass

Picture 74: Radiated emission 1 GHz – 26 GHz




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0


SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02


Page 76 of 83

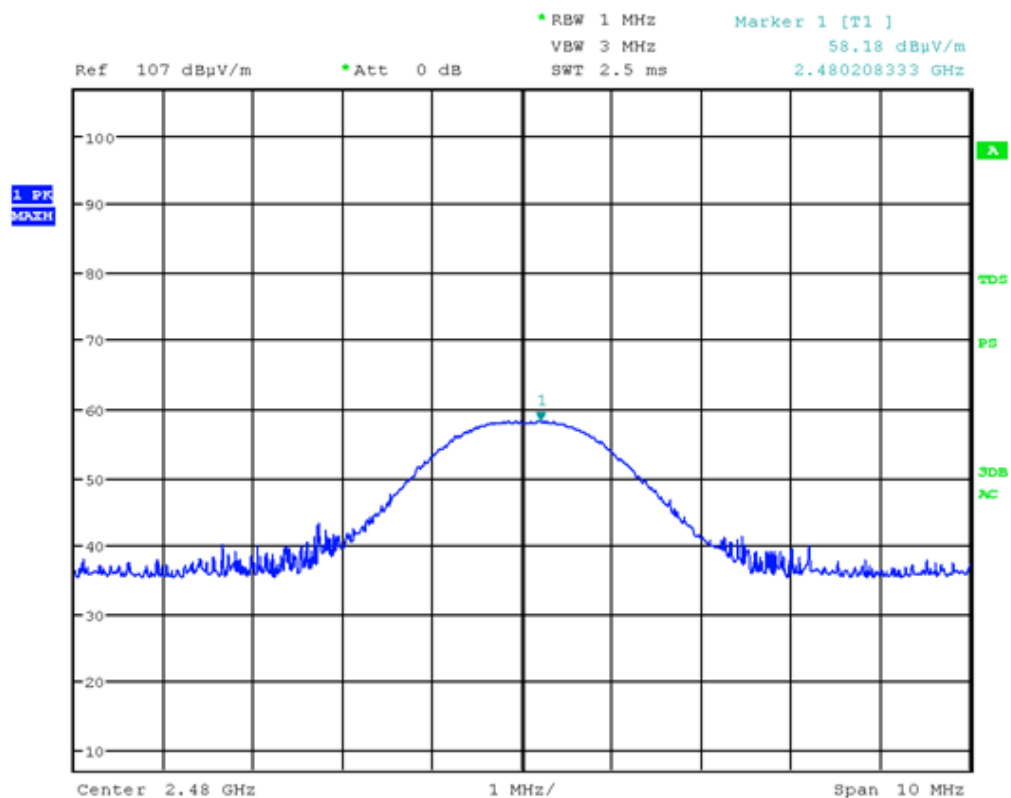


Picture 75: Radiated emission 1 GHz – 26 GHz - PK

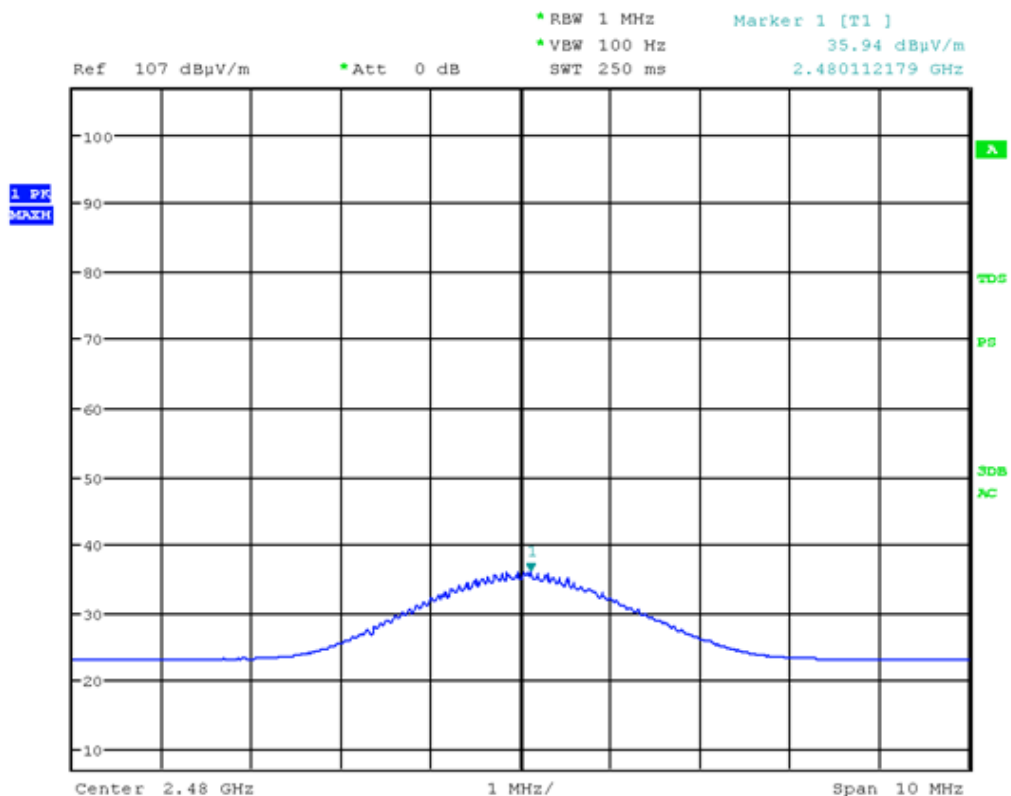

Picture 76: Radiated emission 1 GHz – 26 GHz - AV

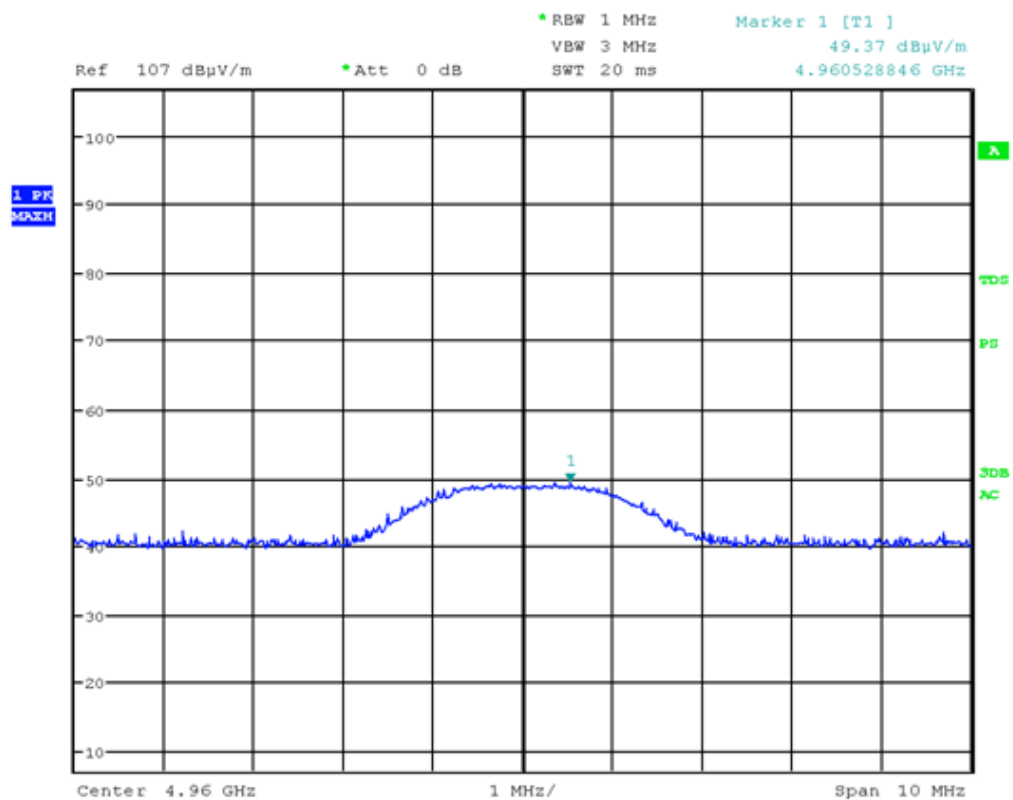

Picture 77: Radiated emission 1 GHz – 26 GHz - PK

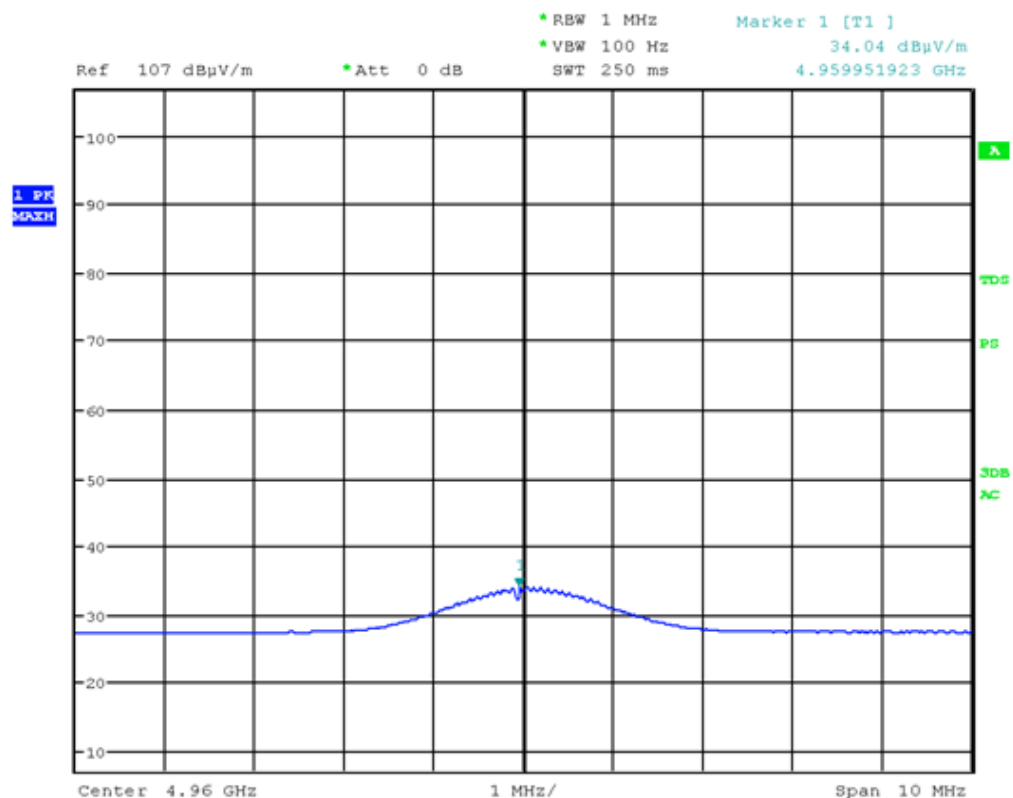

Picture 78: Radiated emission 1 GHz – 26 GHz - AV

14 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
Test receiver	ESU 26	100026	W00002	2014-02	2016-02
Test receiver	ESCI 3	100013	E00001	2013-12	2015-12
Test receiver	ESCI 3	100328	E00552	2014-07	2016-07
Test receiver	ESCS 30	825442/0002	E00003	2014-02	2016-02
Test receiver	ESCS 30	845552/0008	E00551	2014-01	2016-01
LISN	ESH2-Z5	881362/037	E00004	2013-03	2015-03
LISN	ESH2-Z5	893406/009	E00005	2014-01	2016-01
Broadband antenna	VULB 9163	9163-114	E00013	2013-09	2015-09
Broadband horn antenna	BBHA 9120D	9120D-593	W00053	2014-03	2016-03
Broadband horn antenna	BBHA 9170	9163-114	W00055	2014-03	2016-03
Loop antenna	HFH2-Z2	871398/0050	E00060	2014-07	2016-07
Magnetic field probe	RF-R 400-1	02-2030	E00270	N/A (see note 1)	
Shielded room	P92007	B83117C1109T211	E00107	N/A	
Compact Diagnostic Chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Open area test site (OATS)	---	---	E00354	2014-10	2015-10
Climatic chamber 340 I	VC ³ 4034	58566123250010	C00015	2014-09	2016-09
Cable set shielded room	Cable no. 30	---	E00424	2014-07	2015-07
Cable set CDC	Cables no. 37 and 38	---	E00459 E00460	2014-05	2015-05
Cable set OATS 3 m	Cables no. 19, 34 and 36	---	E00453 E00456 E00458	2014-10	2015-10
Cable set OATS 10 m	Cables no. 19, 33 and 36	---	E00453 E00455 E00458	2014-10	2015-10
Cable set anechoic chamber 01	Cables no. 01, 09, 11 and 13	---	W00095 E00307 E00319 E00436	2014-04	2015-04



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 79 of 83

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
Cable set anechoic chamber 02	Cables no. 01, 09, 12 and 14	---	W00095 E00307 E00320 E00437	2014-04	2015-04

Table 1: Equipment Calibration status

Note 1: Used for relative measurements only

Note 2: Expiration date of measurement facility registration (OATS) by

- FCC (registration number 221458): 2017-04
- Industry Canada (test site number 3472A-1): 2015-10



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 80 of 83

15 Measurement uncertainty

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	$\pm 4,0$ dB	2
Radiated emission open field (30 MHz to 1 GHz)	$\pm 4,5$ dB	2
Radiated emission absorber chamber (> 1000 MHz)	$\pm 5,4$ dB	2

Table 2: Measurement uncertainty

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. If k=2 the value of the measurements lies within the assigned range of values with a probability of 95 %.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

SIGMATEK GmbH & Co KG
 Shoe Electronics
 MS021

140603-AU02+W02

Page 81 of 83

16 Summary

The EMC Regulations according to the marked specifications are


☒ **KEPT**

The EUT does fulfill the general approval requirements mentioned.

☐ **NOT KEPT**

The EUT does not fulfill the general approval requirements mentioned.


Place, Date: Straubing, March 27th, 2015



Martin Müller

Test engineer

EMV **TESTHAUS** GmbH



Rainer Heller

Head of EMC / radio department

EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 82 of 83

17 Revision History

Date	Description	Person	Revision
2015-03-27	First edition	M. Müller	----



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

SIGMATEK GmbH & Co KG
Shoe Electronics
MS021

140603-AU02+W02

Page 83 of 83