





ISO/IEC17025Accredited Lab.

Report No.: FCC 1407153-01

File reference No.: 2014-7-23

Applicant: US HIGHTECH INC

Product: Tablet PC

Model No.: UHxxxxx (Where "x" could be any Arabic numerals, English

letter or blank)

Trademark: N/A

Test Standards: FCC Part 15.247

Test result: It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, ,FCC Part 15 Subpart C,

paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: 2014-7-23

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to Withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4,Anhua Industrial Zone.,No.8 Tanran Rd.CheGongMiao,Futian District, Shenzhen,CHINA.

Tel (755) 83448688, Fax (755) 83442996, e-Mail:info@timewaytech.com

Report No.: FCC1407045

Date: 2014-07-10



Page 2 of 74

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Date: 2014-07-23



TEST REPORT CONCLUSION CONTENT

1.0	GENERAL DETAILS	5
	TEST LAB DETAILS	
	APPLICANT DETAILS	
	DESCRIPTION OF EUT.	
	SUBMITTED SAMPLE:	
	TEST DURATION	
	TEST UNCERTAINTY	
1.7	TEST ENGINEER	6
2.0	TEST EQUIPMENTS	
3.0	TECHNICAL DETAILS	
3.1	SUMMARY OF TEST RESULTS	10
3.2	TEST STANDARDS	10
4.0	EUT MODIFICATION	10
5.0	POWER LINE CONDUCTED EMISSION TEST	11
5.1	SCHEMATICS OF THE TEST	11
5.2	TEST METHOD AND TEST PROCEDURE	11
	CONFIGURATION OF THE EUT	
5.4	EUT OPERATING CONDITION	12
5.5	POWER LINE CONDUCTED EMISSION LIMIT ACCORDING TO PARAGRAPH 15.107,15.207	12
	TEST RESULTS.	
5.0	RADIATED EMISSION MEASUREMENT	15
5.1	RADIATED EMISSION LIMITS	15
5.2	TEST PROCEDURE	16
5.3	DEVIATION FORM TEST STANDARD	16
5.4	TEST SETUP	17
5.5	EUT OPERATING CONDITIONS	18
	TEST RESULTS (BELOW 30 MHz)	
	TEST RESULTS (Between 30M – 1000 MHz)	
	TEST RESULTS (From 1000 MHz to 25GHz)	
5.9	TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	24
	NUMBER OF HOPPING CHANNEL	
	APPLIED PROCEDURES / LIMIT	
	TEST PROCEDURE.	
	DEVIATION FROM STANDARD	
	TEST SETUP	
	EUT OPERATION CONDITIONS	
	TEST RESULTS	
	AVERAGE TIME OF OCCUPANCY	
	APPLIED PROCEDURES / LIMIT	33
	TEST PROCEDURE.	
	DEVIATION FROM STANDARD	
	TEST SETUP	
	EUT OPERATION CONDITIONS	
	TEST RESULTS	
	HOPPING CHANNEL SEPARATION MEASUREMENT	
	APPLIED PROCEDURES / LIMIT	
	TEST PROCEDURE	
	DEVIATION FROM STANDARD	
	TEST SETUP	
	EUT OPERATION CONDITIONS	37

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 4 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



10.0	BANDWIDTH TEST	47
10.1	APPLIED PROCEDURES / LIMIT	47
10.2	TEST PROCEDURE	47
10.3	DEVIATION FROM STANDARD	47
10.4	TEST SETUP	47
10.5	EUT OPERATION CONDITIONS	47
	TEST RESULTS	
	PEAK OUTPUT POWER TEST	
11.1	APPLIED PROCEDURES / LIMIT	57
11.2	TEST PROCEDURE	57
	DEVIATION FROM STANDARD	
11.4	TEST SETUP	57
	EUT OPERATION CONDITIONS	
11.6	TEST RESULTS	58
<i>12.0</i>	ANTENNA APPLICATION	59
12.1	ANTENNA REQUIREMENT	59
	RESULT	
<i>13.0</i>	EUT TEST PHOTO	60
140	PHOTOGRAPHS OF FUT	62

Date: 2014-07-23



1.0 GENERAL DETAILS

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4,Anhua Industrial Zone.,No.8 Tanran Rd. CheGong Miao, Futian

District, Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission — United States

Registration Number: 899988

For 3m & 10m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10m OATS

1.2 Applicant Details

Applicant: US HIGHTECH INC

Address: 12658 TORREY BLUFF DR. #287, SAN DIEGO, CALIFORNIA 92130, USA

Telephone: --

Fax: --

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen DSO MicroElectronics CO., LTD.

Address: Goldlonghua Plaza Commercial Bldg Rm 1502, No. 3 East Longuan Rd.,

Longhua District, Shenzhen, China

Band Name: N/A

Additional Model Number: N/A

Type of Modulation GFSK, π/4QPSK, 8DPSK

Frequency range 2402 - 2480MHz

Number of Channel 79

Frequency Selection By Software

Antenna Type Integral Antenna Used, The Antenna Gain is 4.3dBi

Rated Power Rating Battery: 3.8V

Charging Input: 5V

Channel Separation 1MHz

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

eport No.: FCC1407153-02 Page 6 of 74

Report No.: FCC1407153-02 Date: 2014-07-23



1.4 Submitted Sample: 1 Sample

1.5 Test Duration 2014-7-5 to 2014-7-22

1.6 Test UncertaintyConducted Emissions Uncertainty = 3.6dBRadiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 7 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Page 8 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78

For Conducted Emission		
Final Test Mode	Description	
Mode 1	CH00	

For Radiated Emission			
Final Test Mode Description			
Mode 1	CH00		
Mode 2	CH39		
Mode 3	CH78		

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use new battery.
- (3) The data rates were set in 1Mbps, 2 Mbps, 3 Mbps for radiated emission due to the highest RF output power.
- (4) Record the worst case of each test item in this report.

Page 9 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	IS8434KCE99B LXLO*		
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22
3m OATS			N/A	2013-08-22	2014-08-21
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170265	2013-08-24	2014-08-23
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	2013-08-24	2014-08-23
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23
Power meter	Anritsu	MA2491A	32263	2013-08-24	2014-08-23
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-21	2014-08-20
LISN	AFJ	LS16C	10010947251	2013-08-21	2014-08-20
LISN(Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21
EMI Test Receiver	RS	ESCS30	10039	2013-08-23	2014-08-22

Report No.: FCC1407153-02 Page 10 of 74

Date: 2014-07-23



3.0 Technical Details

3.1 Summary of test results

Test procedures according to the technical standards:

FCC Part15 (15.247), Subpart C					
Standard Section Test Item Judgment Res					
15.207	Conducted Emission	PASS			
15.247(a)(1)	Hopping Channel Separation	PASS			
15.247(b)(1)	15.247(b)(1) Peak Output Power				
15.247(c)	15.247(c) Radiated Spurious Emission				
15.247(a)(iii)	Number of Hopping Frequency	PASS			
15.247(a)(iii)	Dwell Time	PASS			
15.247(a)(1)	Bandwidth	PASS			
15.205	15.205 Band Edge Emission				
15.203	Antenna Requirement	PASS			

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Date: 2014-07-23



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

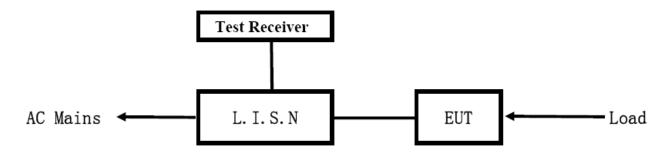


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~60Hz Block diagram of Test setup

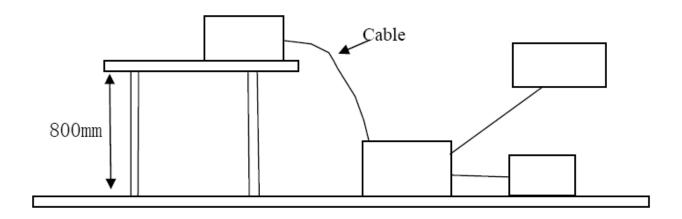

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

Page 12 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



A. EUT

Device	Device Manufacturer		FCC ID
Tablet PC	Shenzhen DSO MicroElectronics CO., LTD.	UH672G	2ACRMUH672G

B. Internal Device

Device Manufacturer		Model	FCC ID
	-	-	

C. Peripherals

Device Manufacturer		Model	FCC ID

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107,15.207

EDEOLIENCY (MUz)	Class A (dBuV)		Class B (dBuV)	
FREQUENCY (MHz)	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.


Page 13 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage :	DC5 V(Adapter Input AC 120V, 60Hz)	Hest Mode :	Mode 1 with GFSK modulation
Test Date	July 19, 2014		

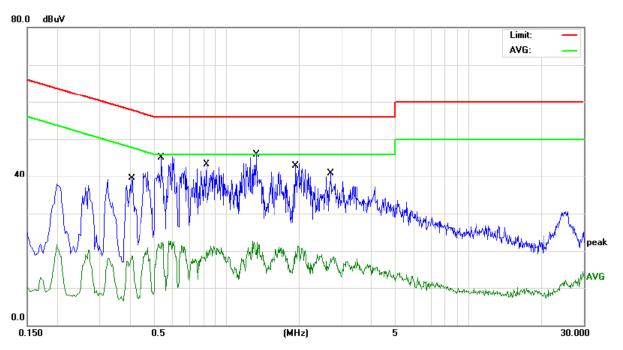

No. I	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4060	29.02	10.49	39.51	57.73	-18.22	QP	
2		0.4060	8.17	10.49	18.66	47.73	-29.07	AVG	
3		0.5380	34.64	10.51	45.15	56.00	-10.85	QP	
4		0.5380	11.77	10.51	22.28	46.00	-23.72	AVG	
5		0.8300	32.73	10.63	43.36	56.00	-12.64	QP	
6		0.8300	9.67	10.63	20.30	46.00	-25.70	AVG	
7	×	1.3300	35.19	10.74	45.93	56.00	-10.07	QP	
8		1.3300	9.49	10.74	20.23	46.00	-25.77	AVG	
9		1.9300	32.13	10.72	42.85	56.00	-13.15	QP	
10		1.9300	9.09	10.72	19.81	46.00	-26.19	AVG	
11		2.7060	30.26	10.69	40.95	56.00	-15.05	QP	
12		2.7060	7.17	10.69	17.86	46.00	-28.14	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 14 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	LIEST MINNE.	Mode 1 with GFSK modulation
Test Date	July 19, 2014		

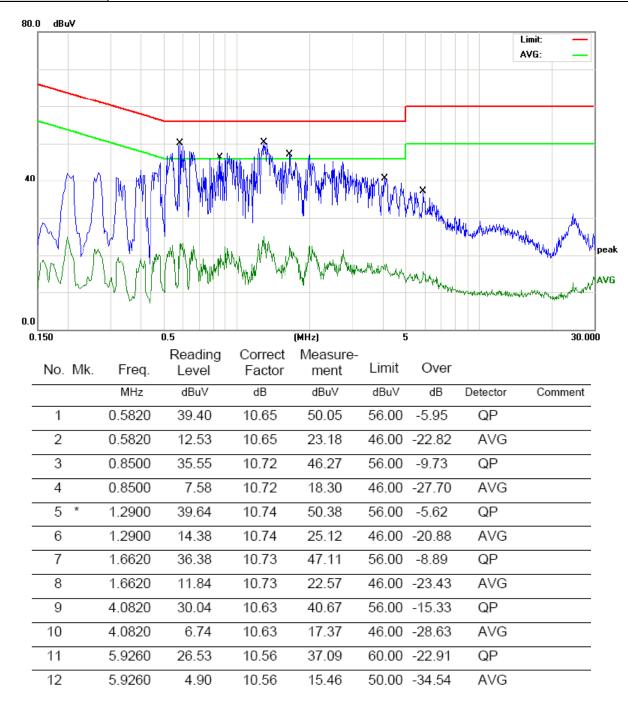

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 15 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



6.0 Radiated Emission Measurement

6.1 Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

EDECHENCY (MIL-)	Limit (dBuV/m) (at 3M)			
FREQUENCY (MHz)	PEAK	AVERAGE		
Above 1000	74	54		

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Date: 2014-07-23



Page 16 of 74

6.2 Test Procedure

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item -EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

6.3 Deviation Form Test Standard

No deviation

Page 17 of 74


Report No.: FCC1407153-02

Date: 2014-07-23




6.4 Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

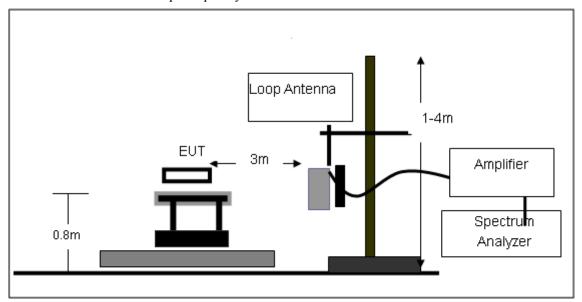

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

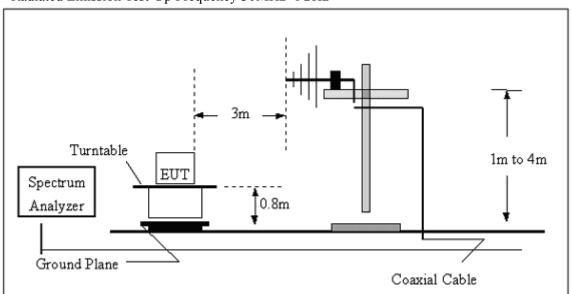


Report No.: FCC1407153-02 Page 18 of 74

Date: 2014-07-23



(C) Radiated Emission Test-Up Frequency Above 1GHz

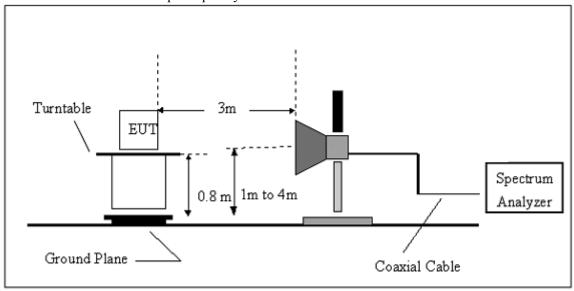

6.5 EUT Operating Conditions

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Date: 2014-07-23



Page 19 of 74

6.6 TEST RESULTS (Below 30 MHz)

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization:	
Test Voltage :	DC 5V(Adapter Input AC 120V, 60Hz)	Test Date	July 18, 2014
Test Mode :	Mode 1/ Mode 2/ Mode 3		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				P
				P

Note:

No result in this part for margin above 20dB.

Distance extrapolation factor =20 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Page 20 of 74


Report No.: FCC1407153-02

Date: 2014-07-23



6.7 TEST RESULTS (Between 30M – 1000 MHz)

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization:	Horizontal
riesi voltage .	DC 5V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	Mode 1 with GFSK modulation		

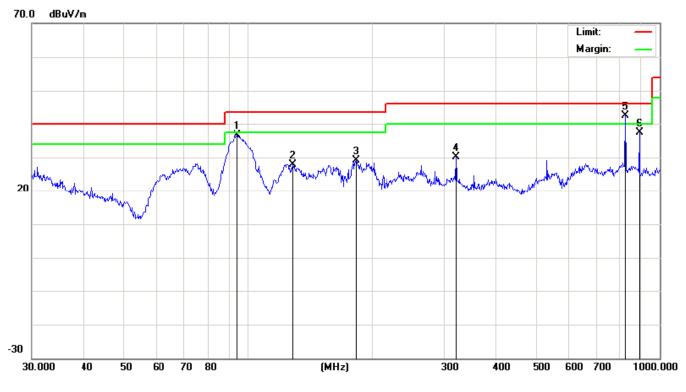

	No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
_												
-	1		94.4284	46.43	-9.90	36.53	43.50	-6.97	Peak			
	2		128.5630	33.60	-5.64	27.96	43.50	-15.54	Peak			
-	3		183.2005	36.97	-7.79	29.18	43.50	-14.32	Peak			
-	4		319.9370	32.35	-2.34	30.01	46.00	-15.99	Peak			
	5	*	827.4934	37.61	4.72	42.33	46.00	-3.67	Peak			
-	6		893.8567	33.88	3.58	37.46	46.00	-8.54	Peak			

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 21 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G			
Temperature:	20 ℃	Relative Humidity:	48%			
Pressure:	1010 hPa	Polarization :	Vertical			
Hest vollage .	DC 5V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014			
Test Mode :	Mode 1 with GFSK modulation					

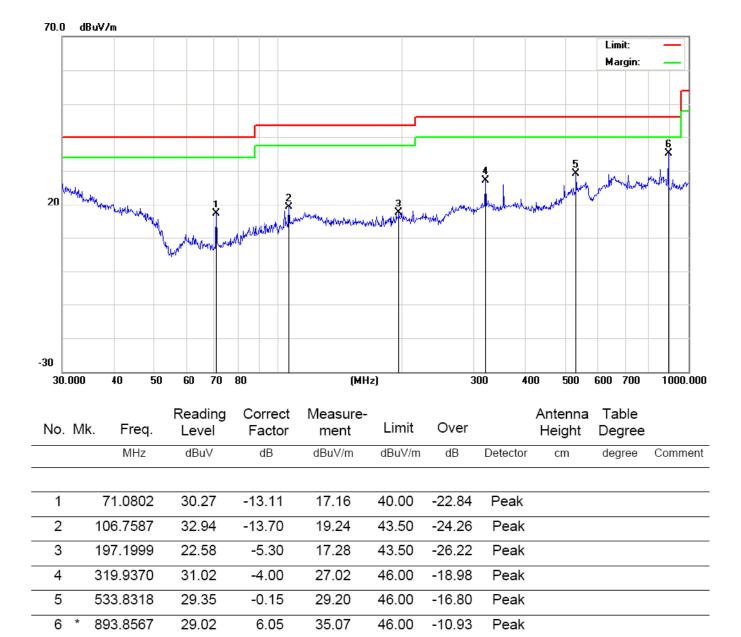

Remark: All of the Tx modes have been investigated, and only worst mode is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-23



Page 22 of 74

TEST RESULTS (From 1000 MHz to 25GHz)

Note: the worst case is 1Mbps(GFSK)mode as result in this part.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	120.7 '	Relative Humidity:	48%
Pressure:	1010 hPa	Hest Mode :	TX 2402MHz CH 00(1Mbps)
Test Voltage :	DC 5V(Adapter Input AC 120 V, 60 Hz)	Test Date:	July 18, 2014

Freq.	Ant.Pol.	Emission Level(dBuV) 1		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	59.9	40.3	74	54	-14.1	-13.7
7206	V	59.3	44.2	74	54	-14.7	-9.8
4804	Н	60.8	39.6	74	54	-13.2	-14.4
7206	Н	64.7	45.2	74	54	-9.3	-8.8

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor. Factor = Antenna Factor + Cable Loss - Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Page 23 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Mode :	TX 2441MHz CH 39 (1Mbps)
	DC 5V(Adapter Input AC 120 V, 60 Hz)	Test Date:	July 18, 2014

Freq.	Ant.Pol.	Emission Level(dBuV)		Limit		Over(dB)	
(MHz)				3m(dBuV/m)			
	H/V	PK	AV	PK	AV	PK	AV
4882	V	61.7	38.2	74	54	-12.3	-15.8
7323	V	63.2	47.0	74	54	-10.8	-7.0
9764	V	64.1	38.6	74	54	-9.9	-15.4
4882	Н	60.8	39.0	74	54	-13.2	-15.0
7323	Н	65.2	38.9	74	54	-8.8	-15.1
9764	Н	62.5	46.0	74	54	-11.5	-8.0

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	lest Mode :	TX 2480MHz CH 78(1Mbps)
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014

Freq.	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	58.2	45.4	74	54	-15.8	-8.6
7440	V	63.4	46.7	74	54	-10.6	-7.3
4960	Н	59.7	38.5	74	54	-14.3	-15.5
7440	Н	67.3	39.9	74	54	-6.7	-14.1

Remark

All emissions not reported were more than 20dB below the specified limit or in the noise floor. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-23



6.9 TEST RESULTS (Restricted Bands Requirements)

Test result for 1Mbps Mode:

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2402MHz-1Mbps	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	Туре
2379	73.7	-12.99	60.7	74	13.3	peak
2379	55.4	-12.99	42.4	54	11.6	AVG
2390	77.4	-12.99	64.4	74	9.6	peak
2390	55.1	-12.99	42.1	54	11.9	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2402MHz-1Mbps	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	
2374	71.3	-12.99	58.3	74	15.7	peak
2374	52.9	-12.99	39.9	54	14.1	AVG
2390	73.4	-12.99	60.4	74	13.6	peak
2390	59.6	-12.99	46.6	54	7.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 25 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Hest vollage .	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2480MHz-1Mbps	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	31
2483.5	77.1	-12.99	64.1	74	9.9	peak
2483.5	55.6	-12.99	42.6	54	11.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2480MHz-1Mbps	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	$(dB\mu V)$	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	31
2483.5	74.6	-12.99	61.6	74	12.4	peak
2483.5	54.9	-12.99	41.9	54	12.1	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 26 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Test result for 3Mbps Mode:

EUT:	Tablet PC	Model Name :	UH672G				
Temperature:	20 ℃	Relative Humidity:	48%				
Pressure:	1010 hPa						
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014				
Test Mode :	TX /2402MHz-3Mbps	Polarization:	Vertical				

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	
2378	80.8	-12.99	67.8	74	6.2	peak
2378	54.0	-12.99	41.0	54	13.0	AVG
2390	75.3	-12.99	62.3	74	11.7	peak
2390	53.6	-12.99	40.6	54	13.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2402MHz-3Mbps	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	
2376	73.9	-12.99	60.9	74	13.1	peak
2376	52.7	-12.99	39.7	54	14.3	AVG
2390	79.1	-12.99	66.1	74	7.9	peak
2390	57.4	-12.99	44.4	54	9.6	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 27 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
resi voltage .	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2480MHz-3Mbps	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	Jp.
2483.5	78.4	-12.99	65.5	74	8.5	peak
2483.5	54.3	-12.99	41.3	54	12.7	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	TX /2480MHz-3Mbps	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	
2483.5	73.0	-12.99	60.0	74	14.0	peak
2483.5	55.2	-12.99	42.2	54	11.8	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Page 28 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Test result for hopping mode:

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	hopping mode	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	J.
2381	74.0	-12.99	61.0	74	13.0	peak
2381	57.5	-12.99	44.5	54	9.5	AVG
2390	80.5	-12.99	67.5	74	6.5	peak
2390	55.8	-12.99	42.8	54	11.2	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode:	Hopping mode	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	J
2377	77.4	-12.99	64.4	74	9.6	peak
2377	52.3	-12.99	39.3	54	14.7	AVG
2390	76.0	-12.99	63.0	74	11.0	peak
2390	57.9	-12.99	44.9	54	9.1	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 29 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa		
resi vonage .	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	Hopping mode	Polarization:	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$	(dBµV/m)	(dB)	
2483.5	72.8	-12.99	59.8	74	14.2	peak
2483.5	52.6	-12.99	39.6	54	14.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	120.30	Relative Humidity:	48%
Pressure:	1010 hPa		
riesi voltage .	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 18, 2014
Test Mode :	Hopping mode	Polarization:	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	$(dB\mu V)$	(dB)	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)	71
2483.5	74.4	-12.99	61.4	74	12.6	peak
2483.5	53.4	-12.99	40.4	54	13.6	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-07-23



Page 30 of 74

7.0 NUMBER OF HOPPING CHANNEL

7.1 Applied procedures / limit

	FCC Part	15 (15.247), Subp	oart C	
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

Date: 2014-07-23



Page 31 of 74

7.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Page 32 of 74

Report No.: FCC1407153-02


Date: 2014-07-23



7.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1015 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014
Test Mode :	Hopping Mode		



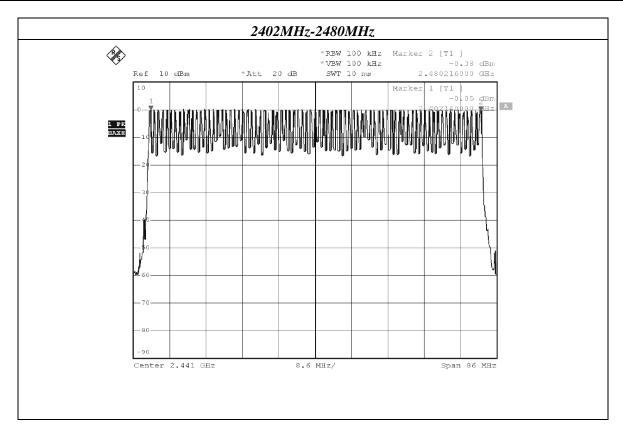

Date: 2014-07-23



Page 33 of 74

8.0 AVERAGE TIME OF OCCUPANCY

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS	

8.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH1 Dwell time = Pulse time*(1600/2/79)*31.6S
 - DH3 Dwell time = Pulse time*(1600/4/79)*31.6S
 - DH5 Dwell time = Pulse time*(1600/6/79)*31.6S

8.3 DEVIATION FROM STANDARD

No deviation.

Date: 2014-07-23



Page 34 of 74

8.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Page 35 of 74

Report No.: FCC1407153-02

Date: 2014-07-23




8.6 TEST RESULTS

Note: the worst case is DH-3Mbps as result in this part.

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa		
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014
Test Mode :	DH5-3Mbps		


Data Packet	Frequency	Dwell Time (S)	Limits (S)
DH5	2402MHz	0.316	0.4
DH5	2441MHz	0.318	0.4
DH5	2480MHz	0.183	0.4

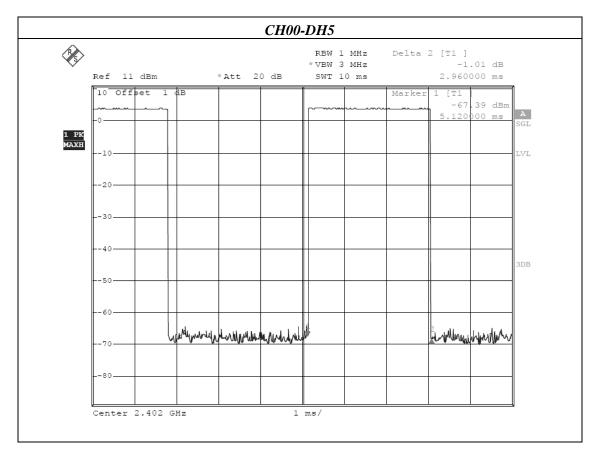

The report refers only to the sample tested and does not apply to the bulk.

Date: 2014-07-23



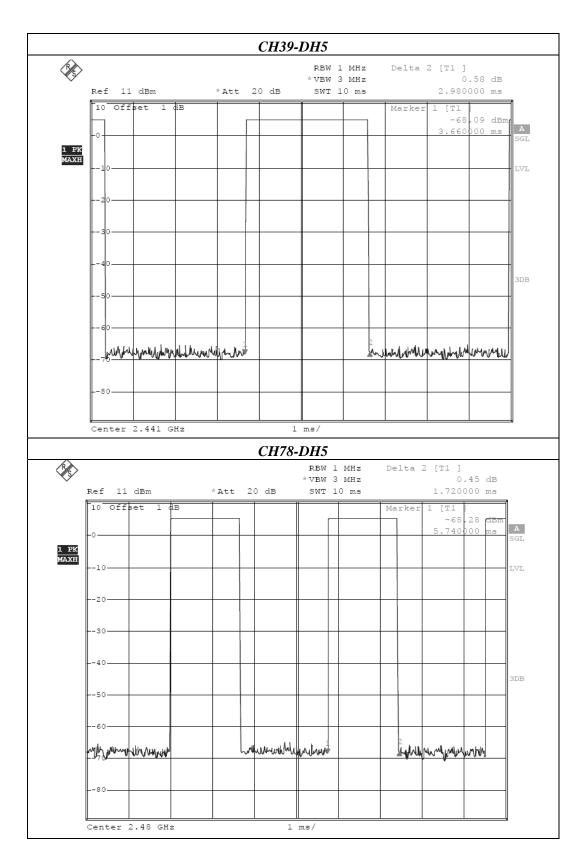

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1407153-02

Date: 2014-07-23



Page 37 of 74

9.0 HOPPING CHANNEL SEPARATION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency	> Measurement Bandwidth or Channel Separation	
RB	100 kHz (Channel Separation)	
VB	300 kHz (Channel Separation)	
Detector	Peak	
Trace	Max Hold	
Sweep Time	Auto	

9.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

Page 38 of 74

Report No.: FCC1407153-02

Date: 2014-07-23




TEST RESULTS

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa		Pass
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)		

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1002.00	>653
39	2441	1002.00	>645
78	2480	1002.00	>640

Note: 20db bandwith refer to section 6.1.5

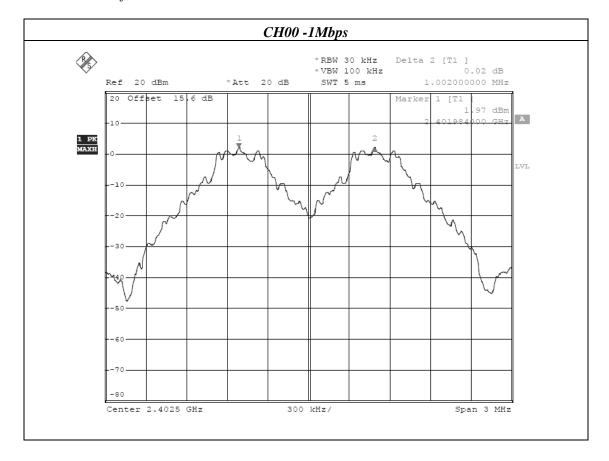


The report refers only to the sample tested and does not apply to the bulk.

Page 39 of 74

Report No.: FCC1407153-02




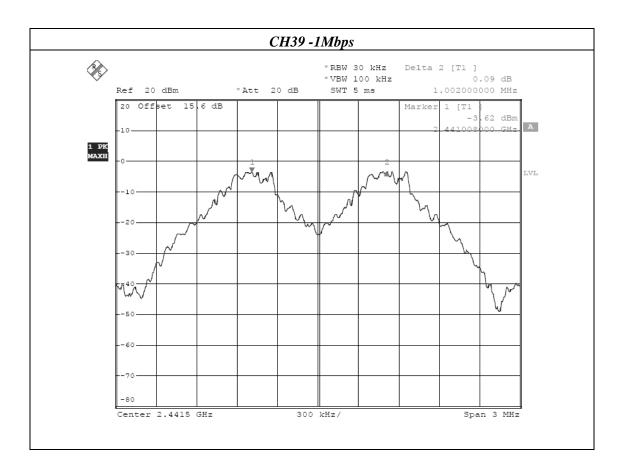

Page 40 of 74

Report No.: FCC1407153-02



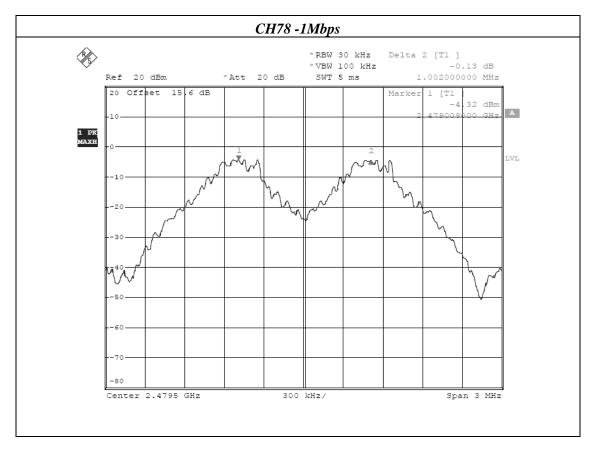

Page 41 of 74


Report No.: FCC1407153-02



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa		Pass
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014
Test Mode :	CH00 / CH39 /CH78 (2Mbps Mode)		

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1002.00	>852
39	2441	1002.00	>868
78	2480	1002.00	>852


Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

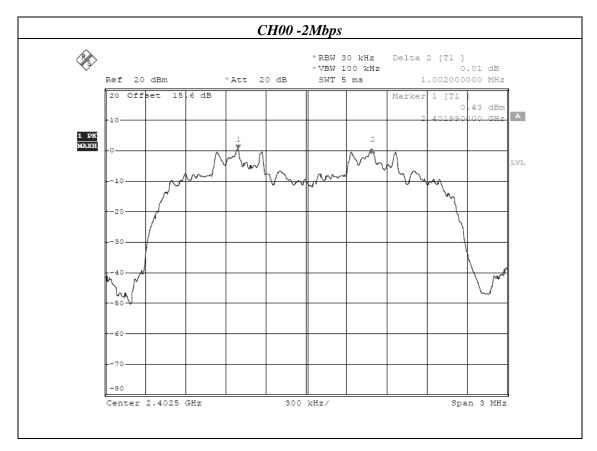

Page 42 of 74

Report No.: FCC1407153-02




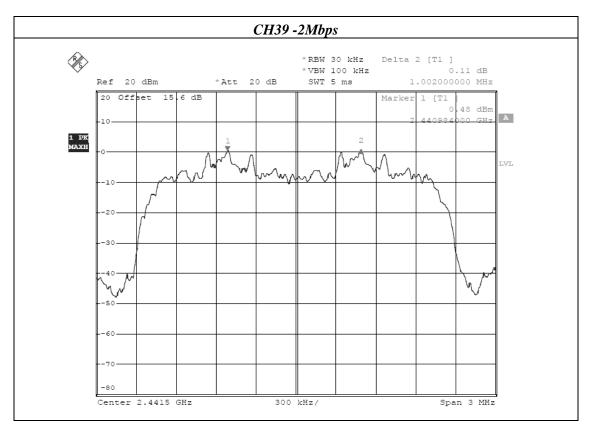

Page 43 of 74

Report No.: FCC1407153-02



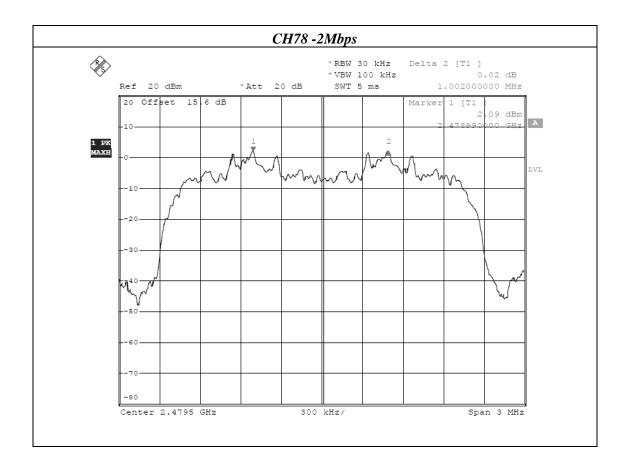

Page 44 of 74

Report No.: FCC1407153-02


Date: 2014-07-23



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
	1012 hPa		Pass
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014
Test Mode :	CH00 / CH39 /CH78 (3Mbps Mode)		

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit 2/3 20db down BW(KHz)
00	2402	1002.00	>876
39	2441	1002.00	>872
78	2480	1002.00	>868


Note: 20db bandwith refer to section 6.1.5

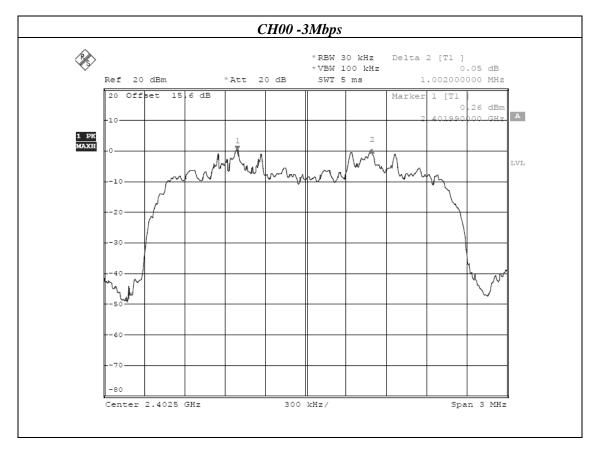

Page 45 of 74

Report No.: FCC1407153-02




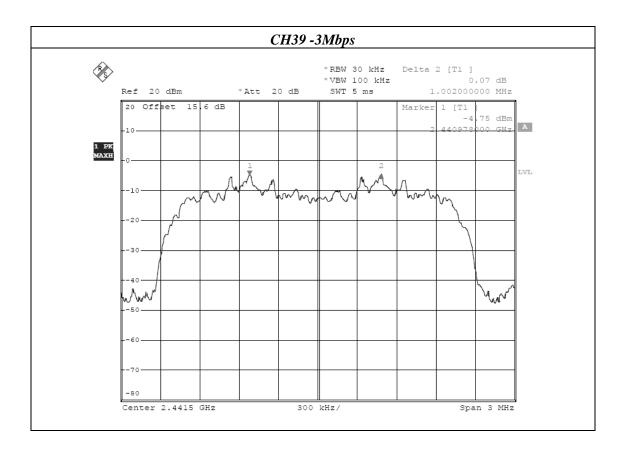

Page 46 of 74

Report No.: FCC1407153-02



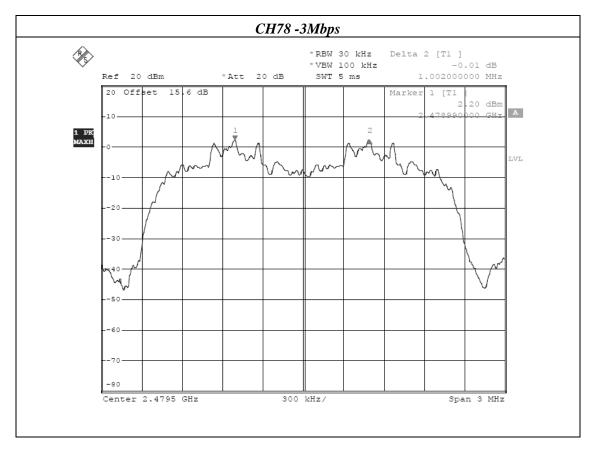

Report No.: FCC1407153-02 Page 47 of 74

Date: 2014-07-23



10.0 BANDWIDTH TEST

10.1 APPLIED PROCEDURES / LIMIT

	VI INTERESTROOM ON THE PROPERTY CONTRACTOR OF TH				
	FCC Part15 (15.247), Subpart C				
Section Test Item Limit Frequency Range (MHz) Result					
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS	

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.2 TEST PROCEDURE

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP



10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

The report refers only to the sample tested and does not apply to the bulk.

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

Page 48 of 74

Report No.: FCC1407153-02

Date: 2014-07-23




10.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
	1012 hPa	Test Mode :	CH00/CH39/C78(1Mbps)
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	980	PASS
2441 MHz	968	PASS
2480 MHz	960	PASS

CH00 -1Mbps

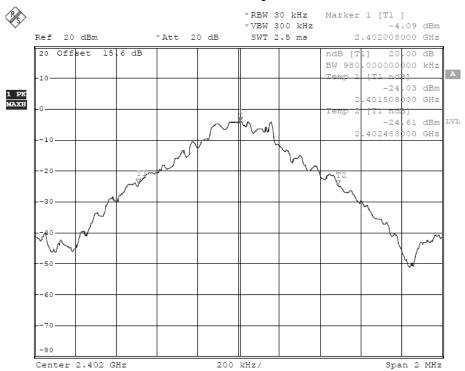


Page 49 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



CH39 -1Mbps

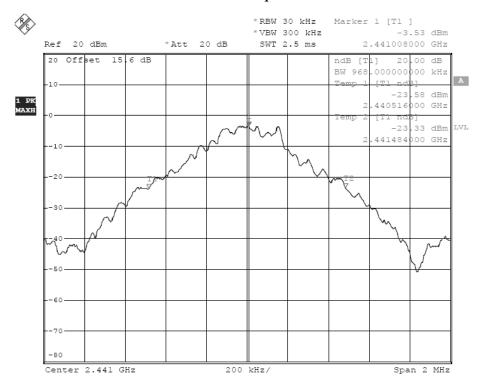


Page 50 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



CH78 -1Mbps

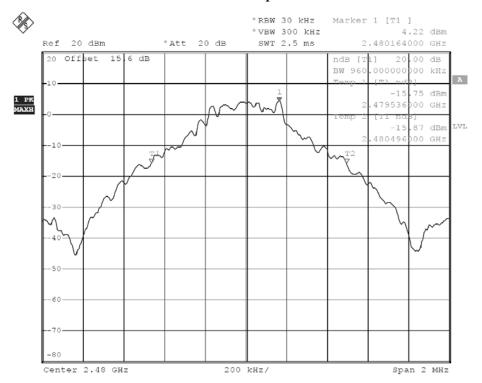


Page 51 of 74

Report No.: FCC1407153-02



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
	1012 hPa	Test Mode :	CH00/CH39/C78(2Mbps)
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1278	PASS
2441 MHz	1302	PASS
2480 MHz	1278	PASS

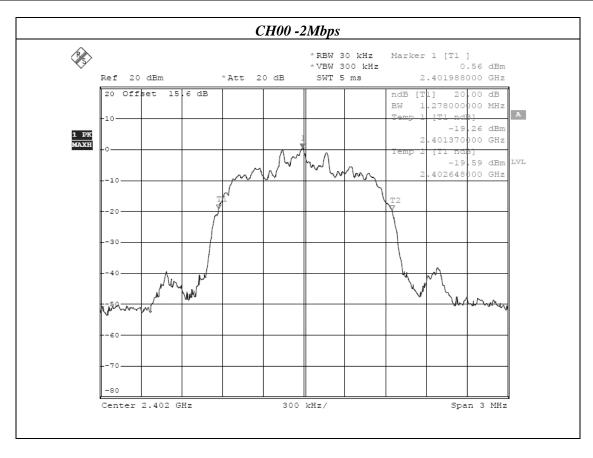

Page 52 of 74

Report No.: FCC1407153-02




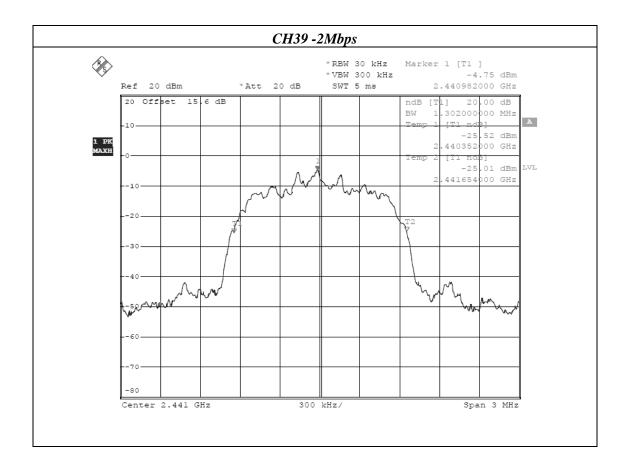

Page 53 of 74

Report No.: FCC1407153-02



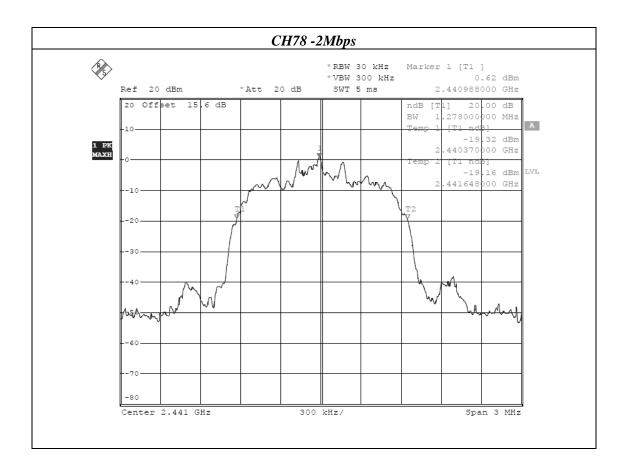


Page 54 of 74

Report No.: FCC1407153-02



EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Mode :	CH00/CH39/C78(3Mbps)
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014


Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1314	PASS
2441 MHz	1308	PASS
2480 MHz	1302	PASS

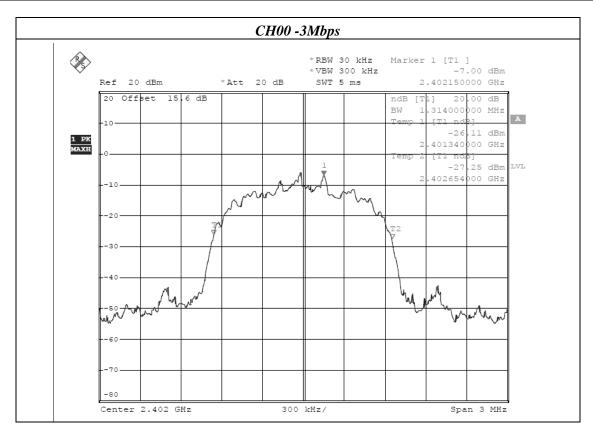

Page 55 of 74

Report No.: FCC1407153-02




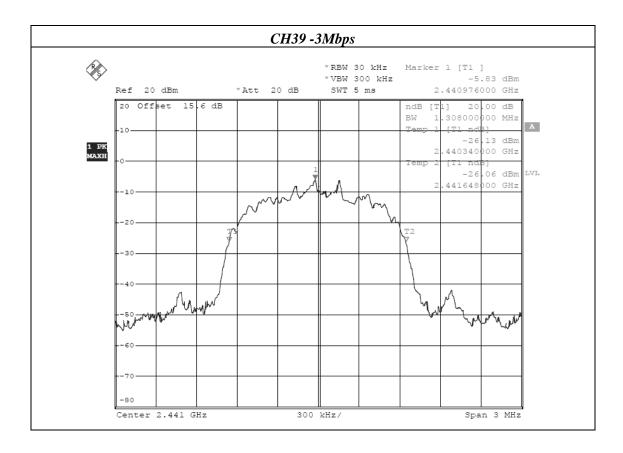

Page 56 of 74

Report No.: FCC1407153-02



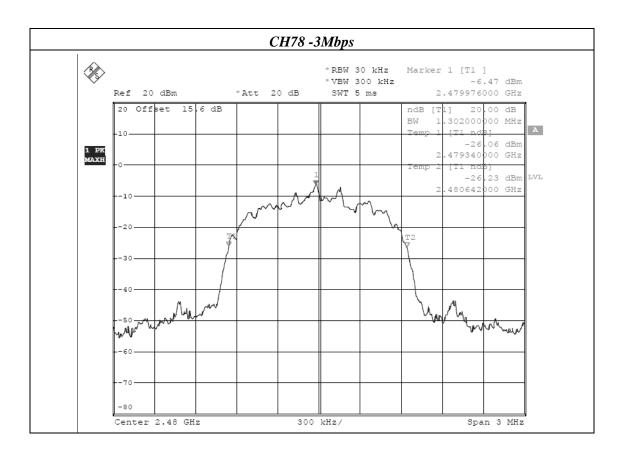

Report No.: FCC1407153-02

Date: 2014-07-23



Page 57 of 74

11.0 PEAK OUTPUT POWER TEST

11.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS

11.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Setting: RBW ≥ the 20 dB bandwidth of the emission being measured Span ≥ approximately 3 times the 20 dB bandwidth, centered on a hopping channel

 $VBW \ge RBW$

Sweep = auto


Detector function = peak

Trace = max hold

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 TEST SETUP



11.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1407153-02 Page 58 of 74

Date: 2014-07-23



11.6 TEST RESULTS

EUT:	Tablet PC	Model Name :	UH672G
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	lest Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)
Test Voltage :	DC 5 V(Adapter Input AC 120 V, 60 Hz)	Test Date	July 21, 2014

1Mbps					
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT(dBm)	Result	
CH00	2402	2.05	20.96	Pass	
CH39	2441	1.99	20.96	Pass	
CH78	2480	1.87	20.96	Pass	
2Mbps					
CH00	2402	1.06	20.96	Pass	
CH39	2441	0.99	20.96	Pass	
CH78	2480	0.83	20.96	Pass	
3Mbps					
CH00	2402	0.98	20.96	Pass	
CH39	2441	0.86	20.96	Pass	
CH78	2480	0.92	20.96	Pass	

Report No.: FCC1407153-02

Date: 2014-07-23



Page 59 of 74

12.0 ANTENNA APPLICATION

12.1 ANTENNA REQUIREMENT

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements: Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

12.2 RESULT

The EUT's antenna is integral, the antenna's gain is 4.3dBi and meets the requirement.

Page 60 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



EUT TEST PHOTO *13.0*

Conducted Emission Test Setup:




Page 61 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Radiated Emission Test Setup:

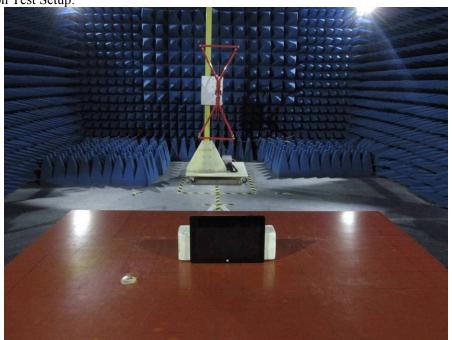



Page 62 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



14.0 PHOTOGRAPHS OF EUT

Appearance photograph of EUT





The report refers only to the sample tested and does not apply to the bulk.


Page 63 of 74

Report No.: FCC1407153-02













Page 64 of 74

Report No.: FCC1407153-02



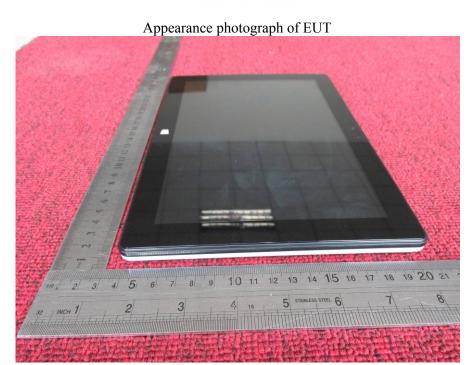

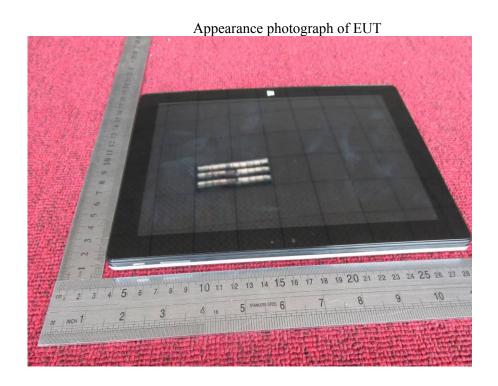


The report refers only to the sample tested and does not apply to the bulk.


Page 65 of 74

Report No.: FCC1407153-02











Page 66 of 74

Report No.: FCC1407153-02













Page 67 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



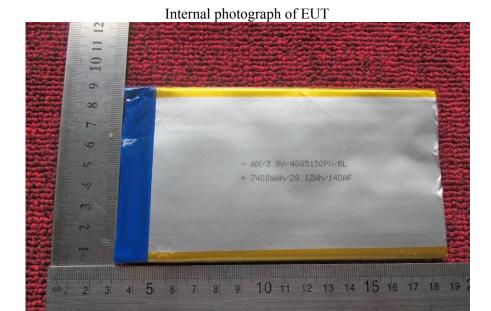

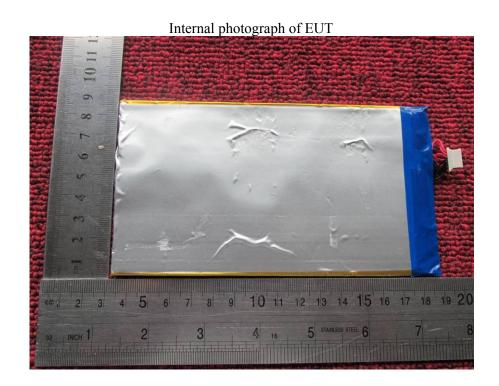



The report refers only to the sample tested and does not apply to the bulk.

Page 68 of 74

Report No.: FCC1407153-02



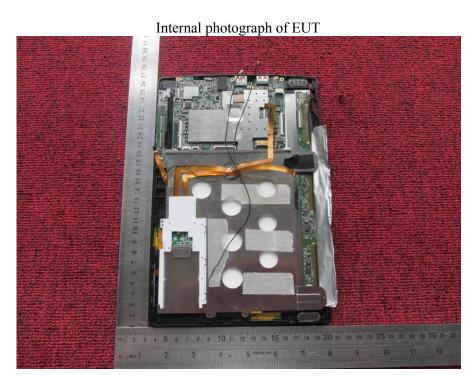

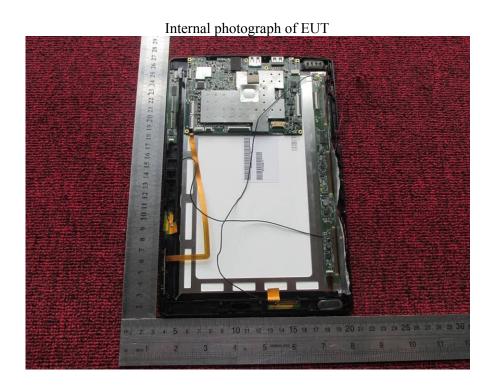

Page 69 of 74


Report No.: FCC1407153-02

Date: 2014-07-23







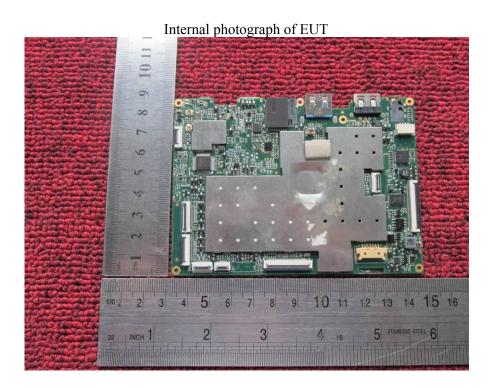

The report refers only to the sample tested and does not apply to the bulk.

Page 70 of 74


Report No.: FCC1407153-02

Date: 2014-07-23



Internal photograph of EUT



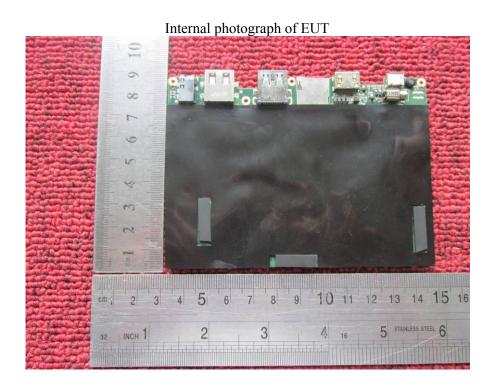

The report refers only to the sample tested and does not apply to the bulk.


Page 71 of 74

Report No.: FCC1407153-02

Date: 2014-07-23





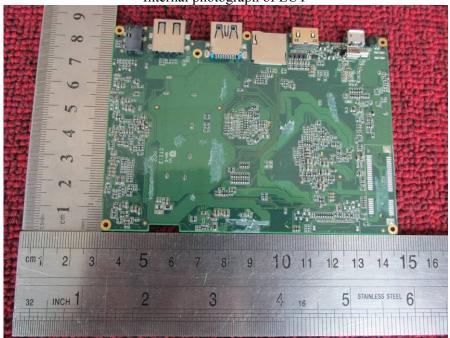


Internal photograph of EUT cm 1 8 4 INCH 1


The report refers only to the sample tested and does not apply to the bulk.

Page 72 of 74

Report No.: FCC1407153-02



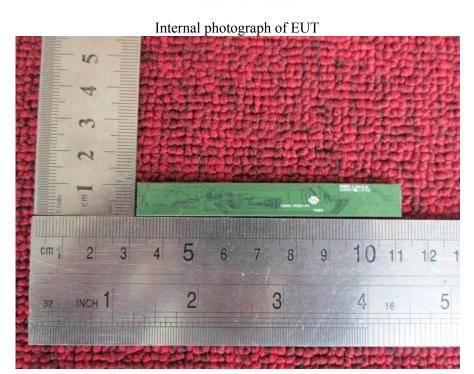

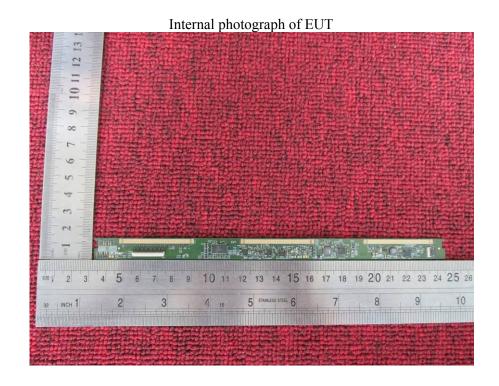



Page 73 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



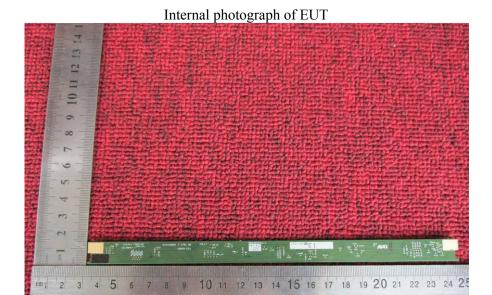

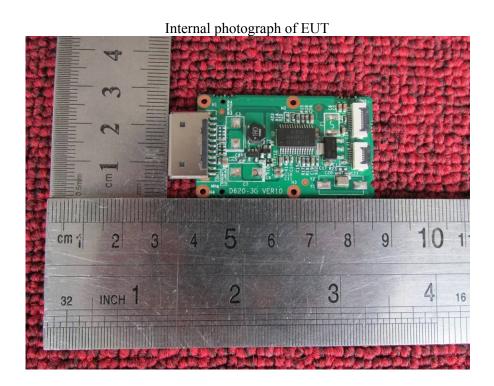

The report refers only to the sample tested and does not apply to the bulk.

Page 74 of 74

Report No.: FCC1407153-02

Date: 2014-07-23



Internal photograph of EUT 8 cm 1 2 3 3 INCH

– END OF REPORT ——