

FCC TEST REPORT

FCC ID: 2ACWDM2014

Product : Wireless Laser Receiver

Model Name : YT-880JSQ

Brand : Yumite

Report No. : PT1508248115E-FC02

Prepared for

Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building , B Area , Xingqiang Buiness Building , No.1 , Dezheng Road , Shilong
community , Shiyan, Bao'an District , Shenzhen, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen World Reputation Electronics Technology Co., Ltd.

Address : 6F, B Building , B Area , Xingqiang Buiness Building , No.1 ,
Dezheng Road , Shilong community , Shiyan, Bao'an District ,
Shenzhen, China

Manufacture's name : Shenzhen World Reputation Electronics Technology Co., Ltd.

Address : 6F, B Building , B Area , Xingqiang Buiness Building , No.1 ,
Dezheng Road , Shilong community , Shiyan, Bao'an District ,
Shenzhen, China

Product name : Wireless Laser Receiver

Model name : YT-880JSQ

Standards : FCC CFR47 Part 15 Section B

Test procedure : ANSI C63.4:2014

Test Date : Dec. 02, 2015 ~ Dec.22, 2015

Date of Issue : Dec. 23, 2015


Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu

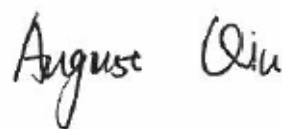


Technical Manager

Hack Ye



Authorized Signatory

Chris Du



Contents

	Page
2 TEST SUMMARY.....	4
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF E.U.T.....	5
3.2 TEST MODE.....	5
3.3 CONFIGURATION OF SYSTEM.....	5
4 EQUIPMENT DURING TEST.....	6
4.1 EQUIPMENTS LIST.....	6
4.2 DESCRIPTION OF SUPPORT UNITS.....	6
4.3 MEASUREMENT UNCERTAINTY.....	7
5 CONDUCTED EMISSION.....	8
5.1 E.U.T. OPERATION.....	8
5.2 EUT SETUP.....	8
5.3 MEASUREMENT DESCRIPTION.....	9
5.4 CONDUCTED EMISSION TEST RESULT.....	9
6 RADIATED SPURIOUS EMISSIONS.....	11
6.1 EUT OPERATION.....	11
6.2 TEST SETUP.....	12
6.3 SPECTRUM ANALYZER SETUP.....	13
6.4 TEST PROCEDURE.....	13
6.5 SUMMARY OF TEST RESULTS.....	14
7 TEST SETUP.....	17
8 EUT PHOTOS.....	19



2 Test Summary

Test Item	Test Requirement	Class	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B	Class B	ANSI C63.4: 2014	Pass
Radiated Emission (30MHz to 1GHz)	FCC PART 15, SUBPART B	Class B	ANSI C63.4: 2014	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B	Class B	ANSI C63.4: 2014	Pass

Remark:

N/A: Not Applicable

3 General Information

3.1 General Description of E.U.T.

Product Name : Wireless Laser Receiver

Model Name : YT-880JSQ

Brand : Yumite

Model Description : N/A

Receiving frequency : 433.92MHz

Type of Modulation : FSK


Power supply : DC 5V power by USB port

3.2 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Item	Test Mode
Conduction Emission	Receiving
Radiated Emission	Receiving

3.3 Configuration of System

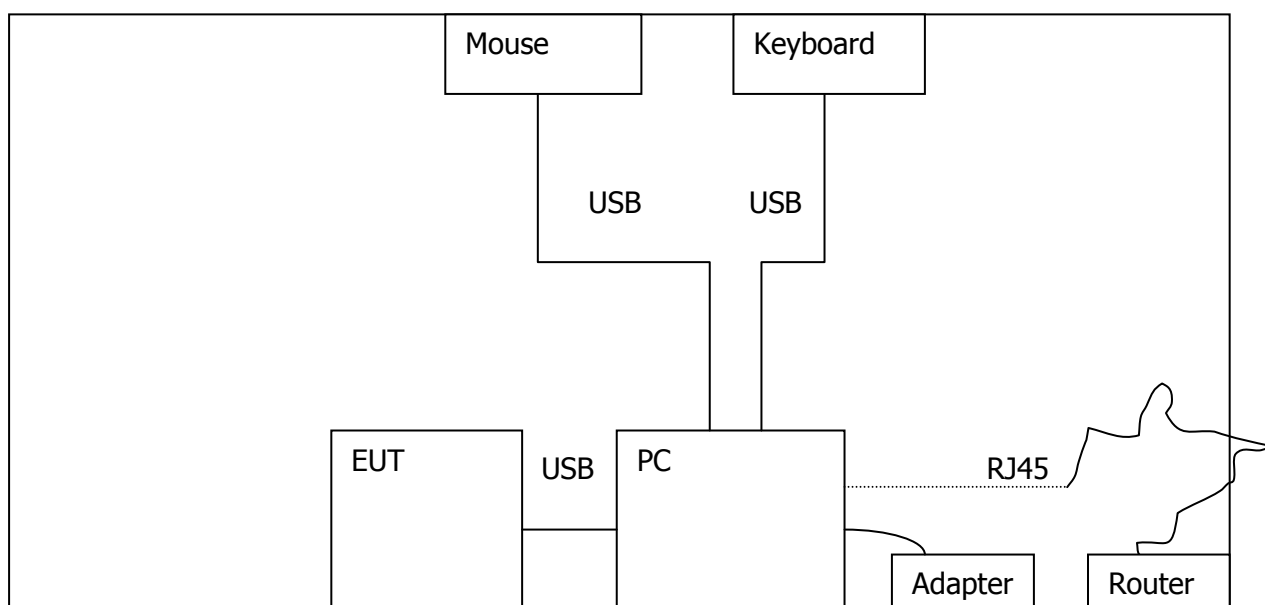

4 Equipment During Test

4.1 Equipments List

Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
4	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
5	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	July 15, 2015	July 14, 2016	1 year
6	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2015	July 14, 2016	1 year
7	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Coaxial Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year

4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.5m)	Cold come	JYD-20	C-2201
Mouse	Lisheng	M202	M-1101
Key board	Lisheng	KB202	KB-1102



4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.107
Test Method:	: ANSI C63.4:2014
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Limit:	: 66-56 dB μ V between 0.15MHz & 0.5MHz
	: 56 dB μ V between 0.5MHz & 5MHz
	: 60 dB μ V between 5MHz & 30MHz
Detector:	: Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

Temperature:	: 25.5 °C
Humidity:	: 51 % RH
Atmospheric Pressure:	: 101.2kPa
EUT Operation :	: Refer to section 3.2

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2014.

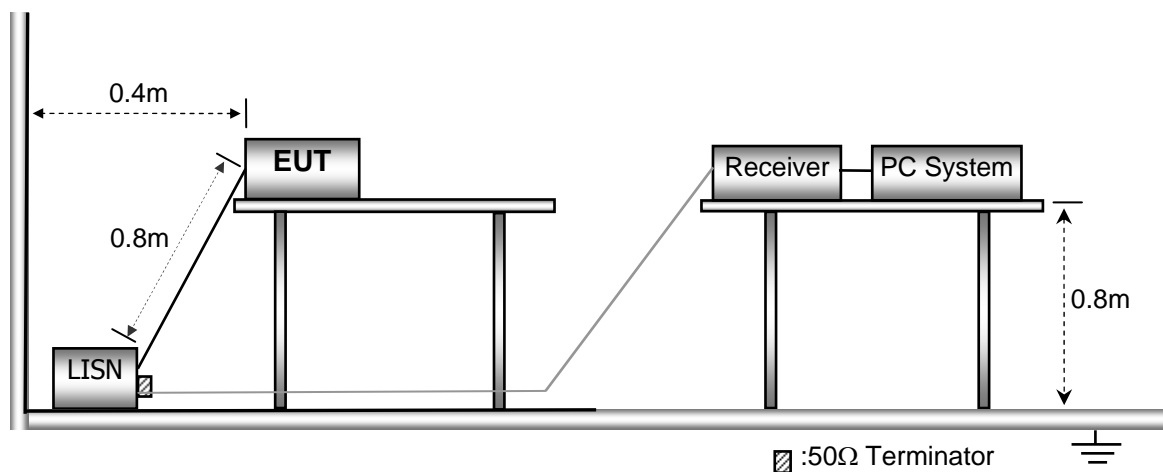


5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.4 Conducted Emission Test Result


Live line:

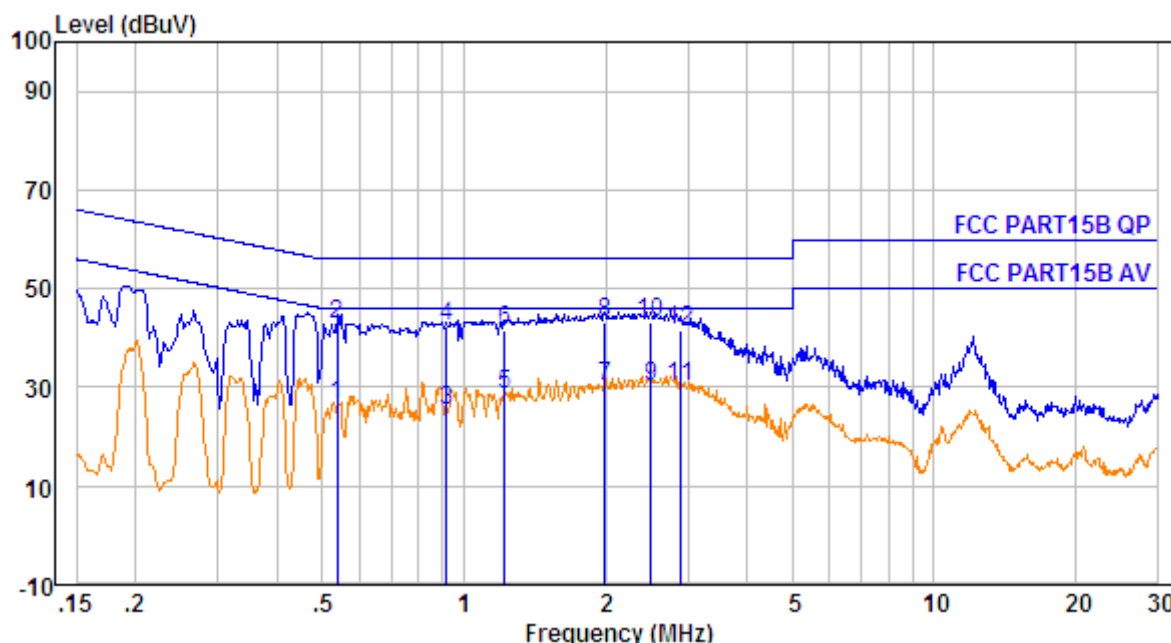

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.538	13.65	0.60	15.42	26.67	43.00	-19.33	Average
2.	0.538	13.65	0.60	31.42	42.67	53.00	-13.33	QP
3.	0.918	13.67	0.60	13.97	25.24	43.00	-20.76	Average
4.	0.918	13.67	0.60	30.97	42.24	53.00	-13.76	QP
5.	1.223	13.68	0.60	17.17	28.45	43.00	-17.55	Average
6.	1.223	13.68	0.60	30.17	41.45	53.00	-14.55	QP
7.	1.991	13.70	0.60	18.96	30.28	43.00	-15.72	Average
8.	1.991	13.70	0.60	31.96	43.28	53.00	-12.72	QP
9.	2.500	13.71	0.60	18.93	30.24	43.00	-15.76	Average
10.	2.500	10.71	3.60	31.93	43.24	56.00	-12.76	QP
11.	2.884	10.71	3.60	19.05	30.36	46.00	-15.64	Average
12.	2.884	10.71	3.60	30.05	41.36	56.00	-14.64	QP



Neutral line:

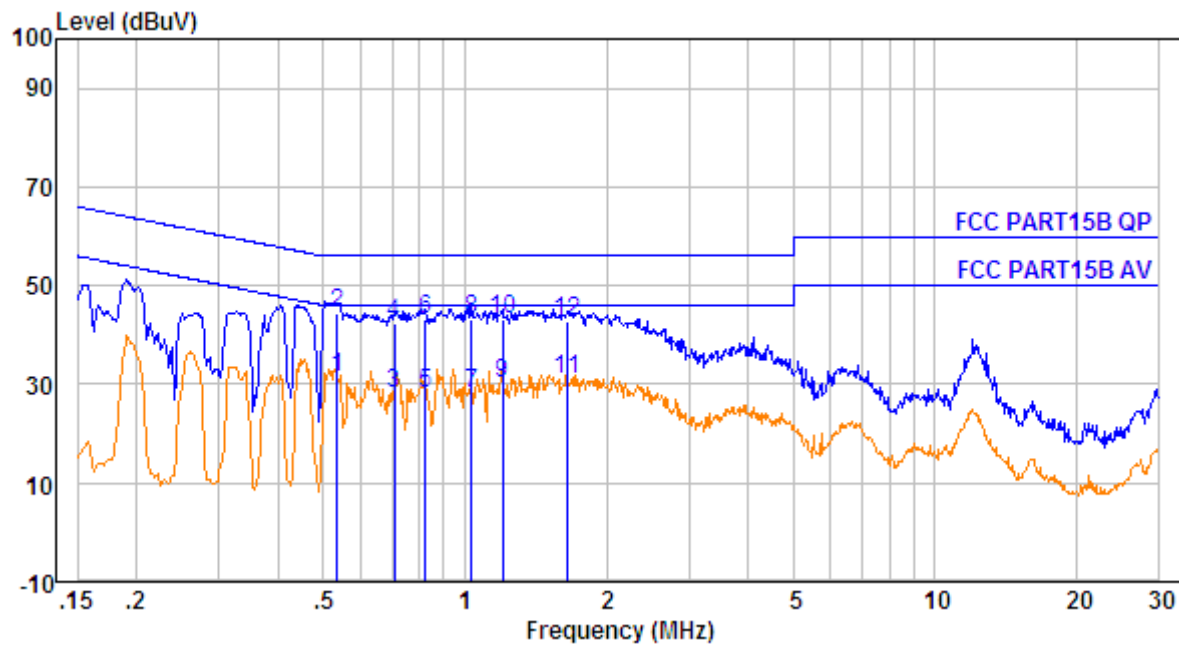

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.535	10.65	0.60	20.34	31.59	46.00	-14.41	Average
2.	0.535	10.65	0.60	33.34	44.59	56.00	-11.41	QP
3.	0.708	10.66	0.60	16.94	28.20	46.00	-17.80	Average
4.	0.708	10.66	0.60	30.94	42.20	56.00	-13.80	QP
5.	0.826	10.66	0.60	16.85	28.11	46.00	-17.89	Average
6.	0.826	10.66	0.60	31.85	43.11	56.00	-12.89	QP
7.	1.032	10.67	0.60	16.75	28.02	46.00	-17.98	Average
8.	1.032	10.67	0.60	31.75	43.02	56.00	-12.98	QP
9.	1.203	10.60	0.60	19.00	30.20	46.00	-15.72	Average
10.	1.203	10.68	0.60	32.00	43.28	56.00	-12.72	QP
11.	1.654	10.69	0.60	19.57	30.86	46.00	-15.14	Average
12.	1.654	10.69	0.60	31.57	42.86	56.00	-13.14	QP

6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.109

Test Method: : ANSI C63.4:2014

Measurement Distance: : 3m

Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation

Operating Environment :

Temperature: : 23.5 °C

Humidity: : 51.1 % RH


Atmospheric Pressure: : 101.2kPa

EUT Operation : : Refer to section 3.2


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement from 30 MHz to 1 GHz.

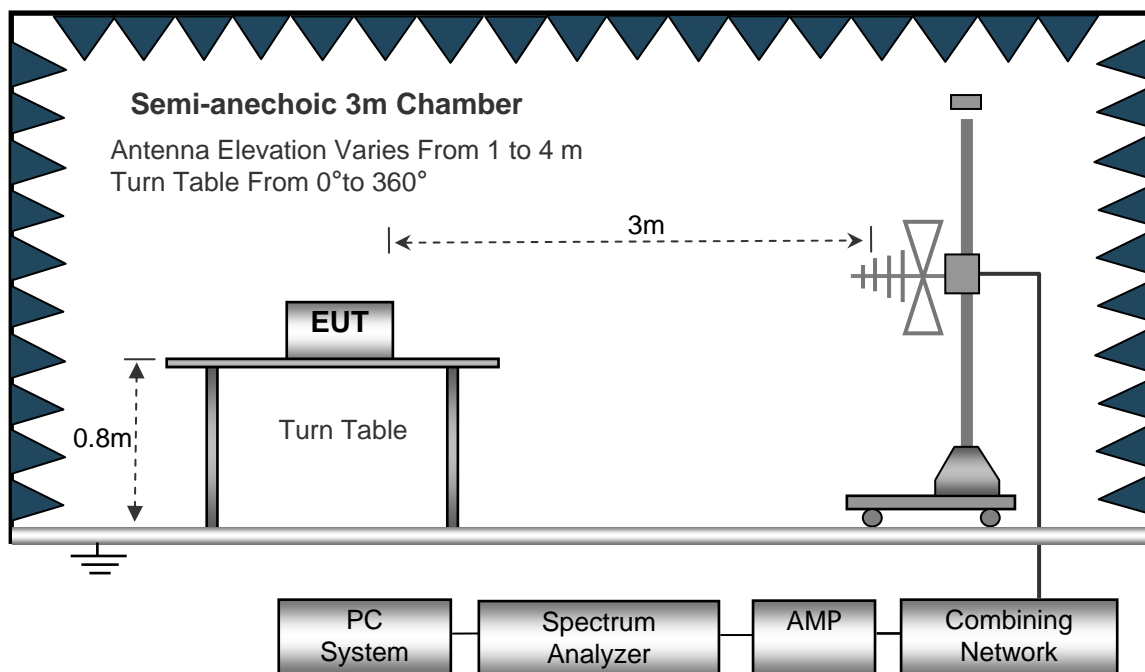

The test setup for emission measurement above 1 GHz.

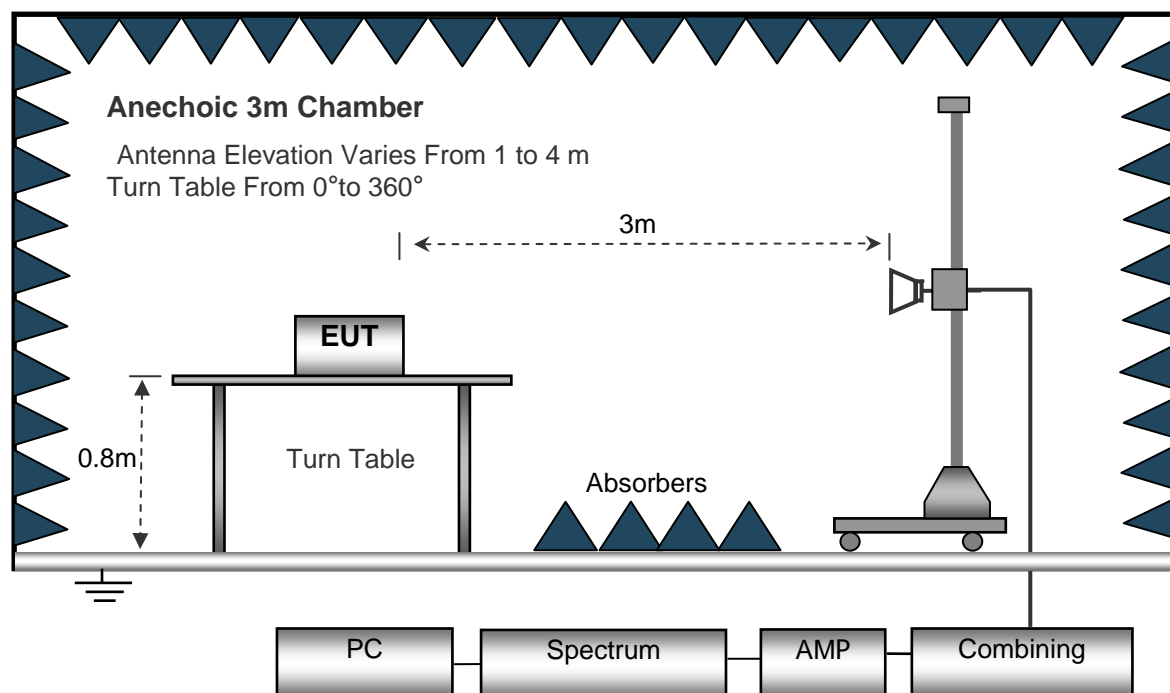

6.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

Sweep Speed	: Auto
Detector	: PK
Resolution Bandwidth	: 100kHz
Video Bandwidth	: 300kHz
Detector	: QP
Resolution Bandwidth	: 120kHz
Video Bandwidth	: 300kHz

Above 1GHz

Sweep Speed	: Auto
Detector	: PK
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 3MHz
Detector	: AV
Resolution Bandwidth	: 1MHz
Video Bandwidth	: 10Hz

6.4 Test Procedure


1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency: 30MHz ~ 1GHz


Antenna Polarization: Vertical

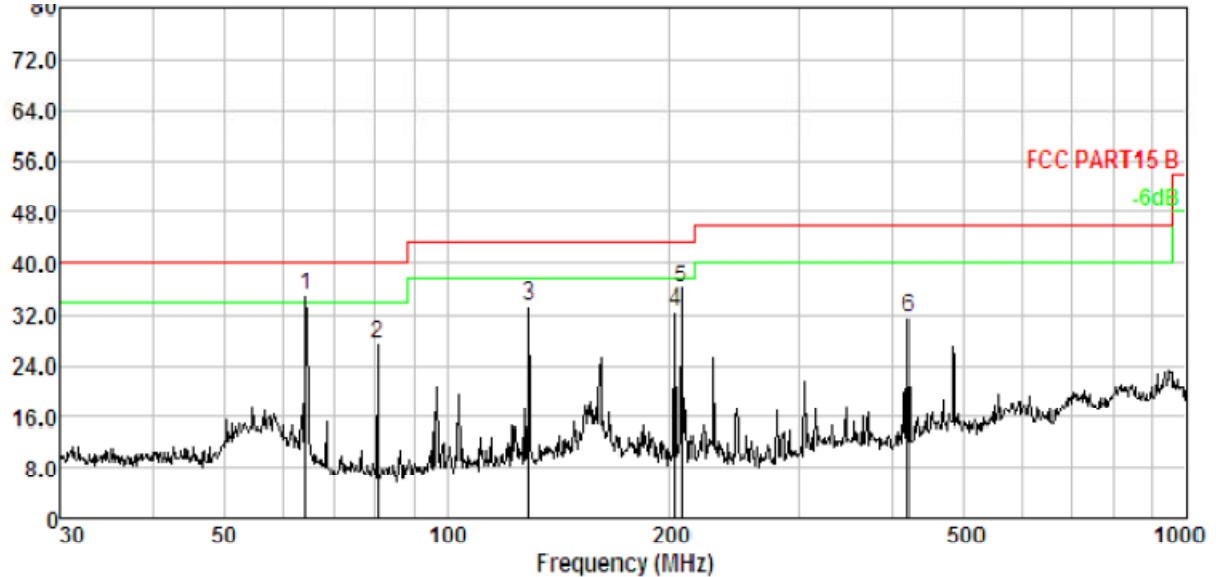

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	64.433	1.75	11.88	51.58	30.24	34.97	40.00	-5.03	QP
2.	80.644	1.95	8.76	47.20	30.31	27.60	40.00	-12.40	QP
3.	129.015	2.38	12.57	48.99	30.48	33.46	43.50	-10.04	QP
4.	203.523	2.79	10.45	49.93	30.64	32.53	43.50	-10.97	QP
5.	207.850	2.81	10.53	53.27	30.64	35.97	43.50	-7.53	QP
6.	420.580	3.45	15.72	43.36	30.89	31.64	46.00	-14.36	QP



Antenna Polarization: Horizontal

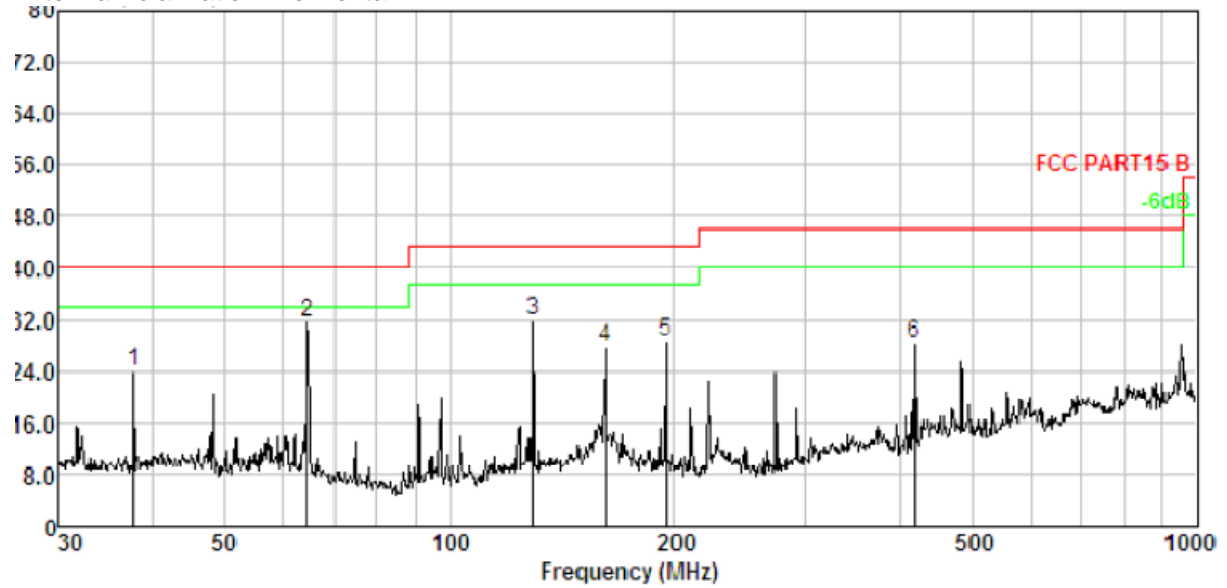


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	37.812	1.26	13.54	39.23	30.05	23.98	40.00	-16.02	QP
2.	64.433	1.75	11.88	48.17	30.24	31.56	40.00	-8.44	QP
3.	129.015	2.38	12.57	47.30	30.48	31.77	43.50	-11.73	QP
4.	161.474	2.58	13.80	41.88	30.56	27.70	43.50	-15.80	QP
5.	195.137	2.75	10.73	45.76	30.62	28.62	43.50	-14.88	QP
6.	419.108	3.44	15.68	40.25	30.89	28.48	46.00	-17.52	QP

Test Frequency: Above 1GHz


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
1126.62	67.41	-19.14	48.27	74	-25.73	peak	Vertical
1596.31	60.49	-16.43	44.06	74	-29.94	peak	Vertical
3041.55	61.27	-11.63	49.64	74	-24.36	peak	Vertical
4805.79	55.68	-3.64	52.04	74	-21.96	peak	Vertical
1128.16	71.82	-19.14	52.68	74	-21.32	peak	Horizontal
1593.27	66.66	-16.43	50.23	74	-23.77	peak	Horizontal
3042.50	59.33	-11.63	47.7	74	-26.3	peak	Horizontal
4802.42	51.24	-3.64	47.6	74	-26.4	peak	Horizontal

7 Test Setup


Radiated Emission
From 30MHz-1000MHz

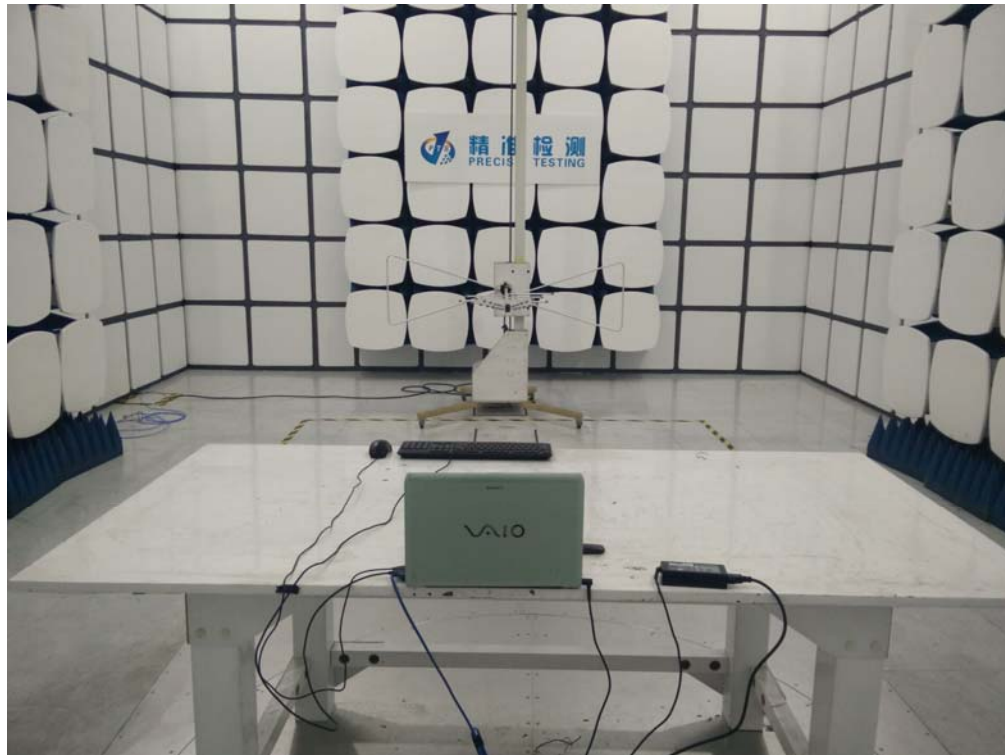

Above 1GHz

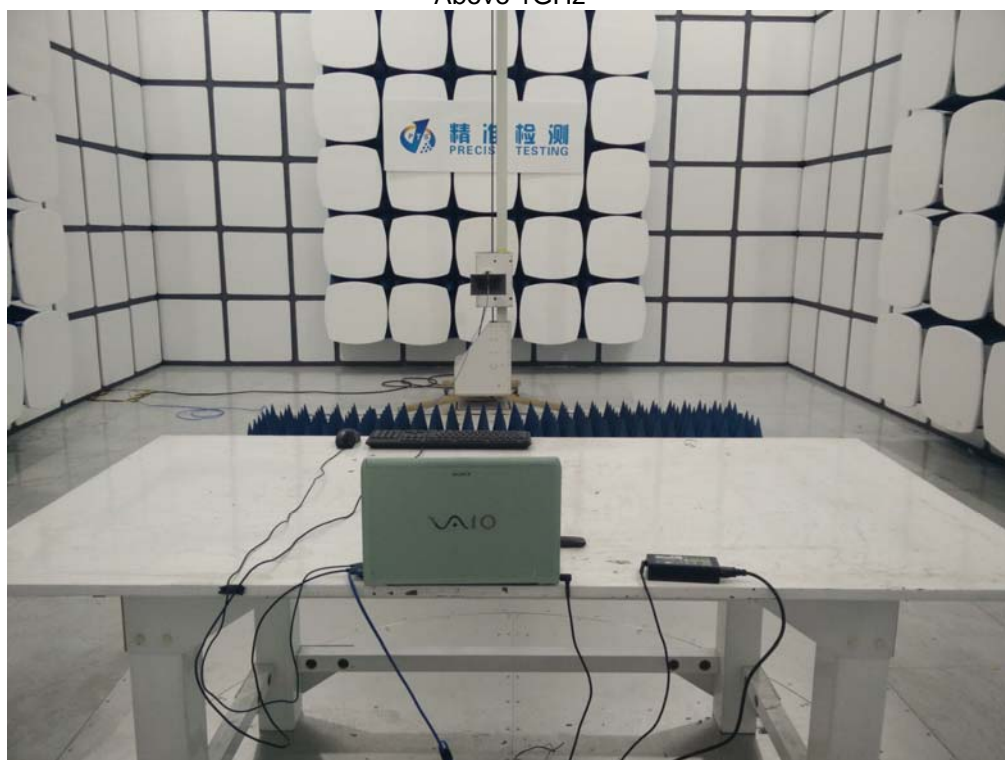

Conducted Emissions

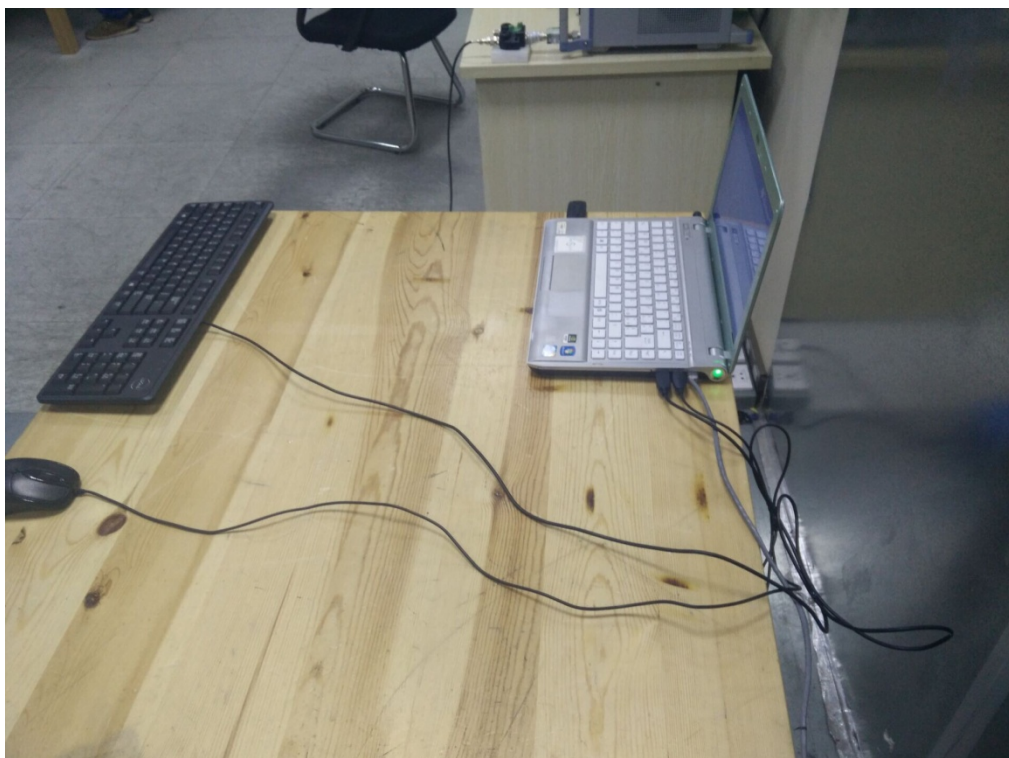

8 EUT Photos

External Photos












Internal Photos

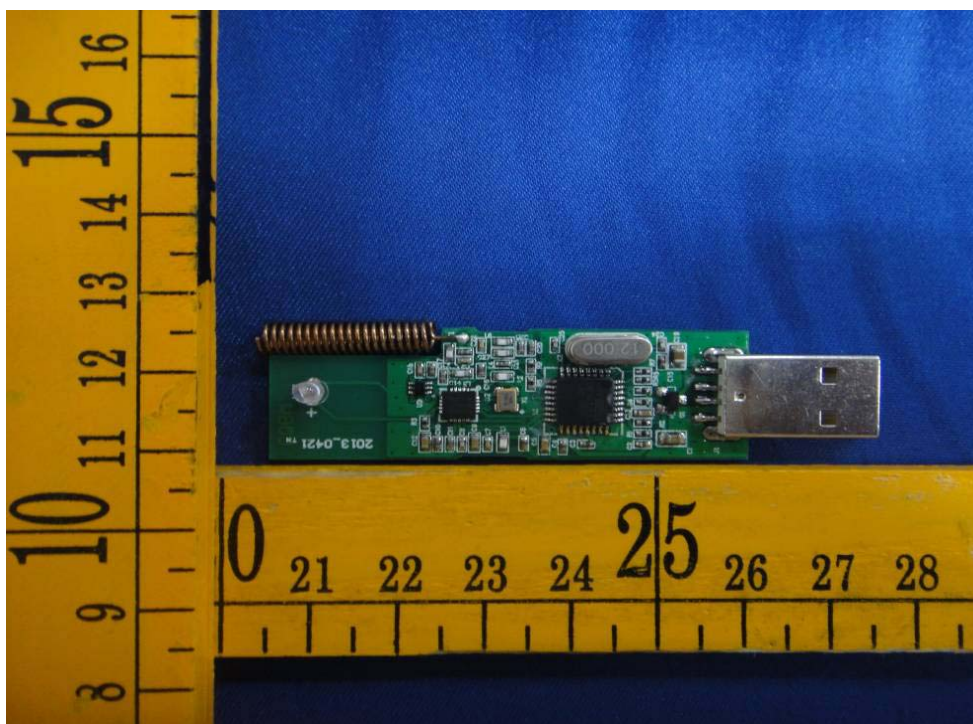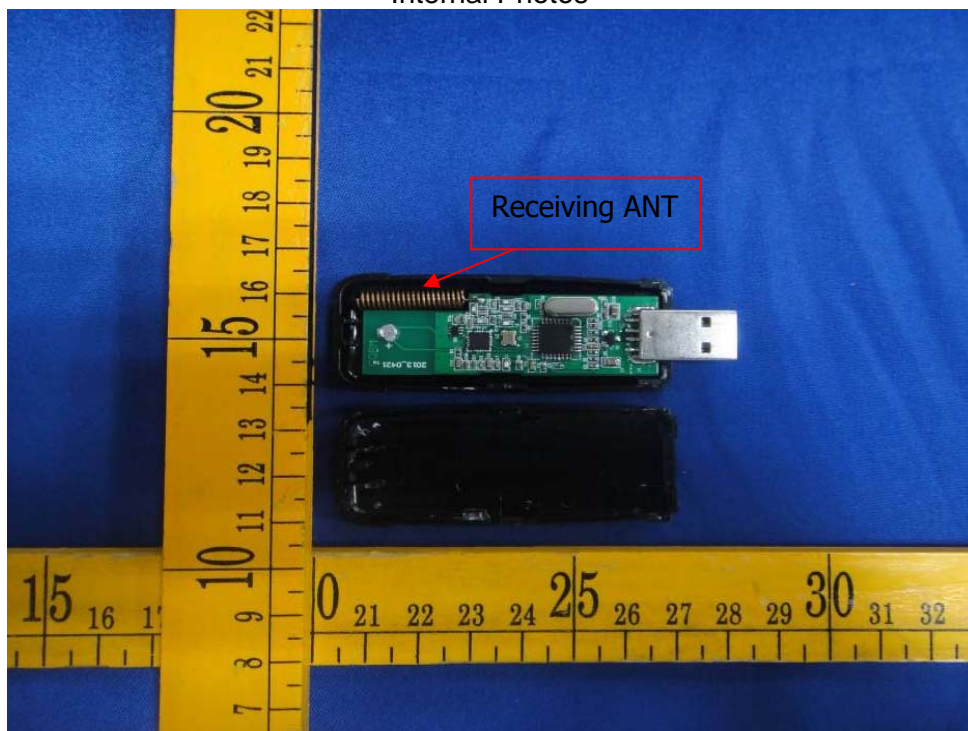

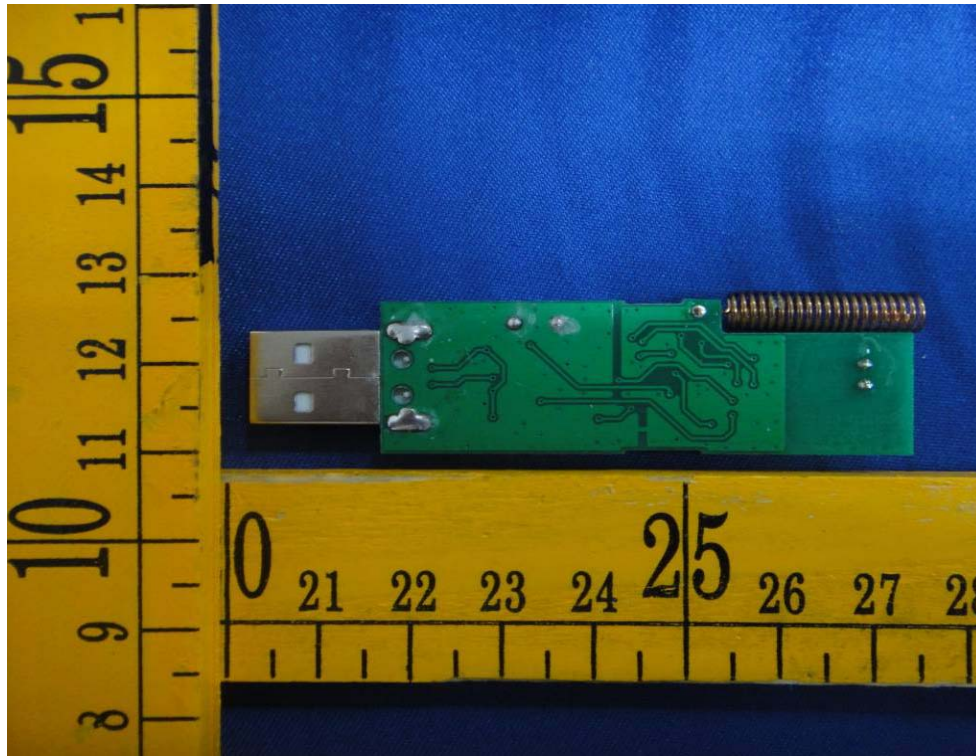

*****THE END REPORT*****