

## FCC TEST REPORT

**Product** : Thermal Receipt Printer  
**Trade mark** : RONGTA  
**Model/Type reference** : ACE V1  
**Serial Number** : N/A  
**Ratings** : DC 24V 2.5A  
**FCC ID** : 2AD6G-ACE-V1  
**Report Number** : EED32J000842  
**Date** : Jul. 12, 2017  
**Regulations** : See below

Test Standards	Results
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart B	PASS

Prepared for:

**XIAMEN RONGTA TECHNOLOGY CO., LTD.**

**3F, E Plant, Gaoqi Industrial Zones, No.1 95, Gaoqi Community, Gaodian Village, Huli Xiamen, Fujian, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**

**Hongwei Industrial Zone, Bao'an 70 District,**

**Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**

Compiled by:

*Jackson Wu*

Reviewed by:

*Peter Xiao*

Approved by:

*Christy Chen*

Date:

Jul. 12, 2017

Christy Chen

Lab supervisor

Check No.: 2496502512



## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
<b>2. TEST SUMMARY.....</b>	<b>3</b>
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>3</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP.....</b>	<b>4</b>
<b>5. FACILITIES AND ACCREDITATIONS.....</b>	<b>4</b>
5.1 TEST FACILITY.....	4
5.2 TEST EQUIPMENT LIST.....	4
<b>6. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
6.1. JUSTIFICATION.....	6
<b>7. CONDUCTED EMISSION TEST.....</b>	<b>7</b>
7.1. LIMITS.....	7
7.2. BLOCK DIAGRAM OF TEST SETUP.....	7
7.3. PROCEDURE OF CONDUCTED EMISSION TEST.....	7
7.4. WORST CASE TEST GRAPHS AND TEST DATA.....	8
<b>8. RADIATED EMISSION TEST.....</b>	<b>12</b>
8.1. LIMITS.....	12
8.2. BLOCK DIAGRAM OF TEST SETUP.....	12
8.3. PROCEDURE OF RADIATED EMISSION TEST.....	12
8.4. WORST CASE TEST GRAPHS AND TEST DATA.....	13
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....</b>	<b>15</b>
<b>APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT.....</b>	<b>16</b>
<b>APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT.....</b>	<b>20</b>

(Note: N/A means not applicable)

## 1. GENERAL INFORMATION

**Applicant:** XIAMEN RONGTA TECHNOLOGY CO., LTD.  
 3F,E Plant, Gaoqi Industrial Zones, No.195, Gaoqi Community, Gaodian Village, Huli Xiamen, Fujian, China

**Manufacturer:** XIAMEN RONGTA TECHNOLOGY CO., LTD.  
 3F,E Plant, Gaoqi Industrial Zones, No.195, Gaoqi Community, Gaodian Village, Huli Xiamen, Fujian, China

**Equipment Authorization:** Certification

**FCC ID:** 2AD6G-ACE-V1

**Product:** Thermal Receipt Printer

**Trade mark:** RONGTA

**Model/Type reference:** ACE V1

**Serial Number:** N/A

**Report Number:** EED32J000842

**Sample Received Date:** May 08, 2017

**Sample tested Date:** May 08, 2017 to May 18, 2017

The tested sample(s) and the sample information are provided by the client.

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard	Test Item	Test
FCC 15.107	Conducted Emission	Yes
FCC 15.109	Radiated Emission	Yes

## 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted disturbance	3.4
Radiated disturbance (30MHz to 1GHz)	5.3

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1. PRODUCT INFORMATION

**Ratings:** DC 24V 2.5A

**Adapter information:** Manufacture: GUANGZHOU DAJING SCIENCE AND TECHNOLOGY CO.,LTD  
Model No. : DJ-240250  
Input : 100-240V~, 50/60Hz 1.5 MAX  
Output: +24VDC--- 2.5 MAX

**Cable of Product**

No.	Cable Type	Quantity	Provider	Length (m)	Specification	Note
1	USB	1	Applicant	1.5	unshielded	With a ferrite ring in middle detachable

### 4.2. TEST SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between Product and support equipment.

### 4.3. SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	Notebook	LENOVO	E24L	---	---	---
2	Mouse	L.selection	OP-200	B1005023926IYNB	Shielded 1.5m	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 TEST FACILITY

All test facilities used to collect the test data are located at Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

### 5.2 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipments used at CTI for testing. The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

**Equipment used during the tests:**

Shielding Room No. 1 - Conducted Emission Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Receiver	R&S	ESCI	100435	06/15/2016	06/15/2018
LISN	R&S	ENV216	100098	06/15/2016	06/15/2018

3M Semi-anechoic Chamber (2)- Radiated disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06/04/2019
Receiver	R&S	ESCI	100009	06/15/2018
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	07/21/2017
Multi device Controller	maturo	NCD/070/10711112	---	N/A



## **6. SYSTEM TEST CONFIGURATION**

### **6.1. JUSTIFICATION**

The system was configured for testing in a typical fashion (as a customer would normally use it), The Product was placed on a turn table, which enabled the engineer to maximize emissions through its placement as outlined in ANSI C63.4 (2009).

The Product was powered by 120VAC/ 60Hz & 240VAC/ 50Hz during conducted emission test.

The Product was powered by 120VAC/ 60Hz during radiated emission test.

For maximizing emissions, the Product was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The rear of unit shall be flushed with the rear of the table.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

## 7. CONDUCTED EMISSION TEST

### 7.1. LIMITS


Limits for Class B digital devices

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**NOTE:** 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

### 7.2. BLOCK DIAGRAM OF TEST SETUP

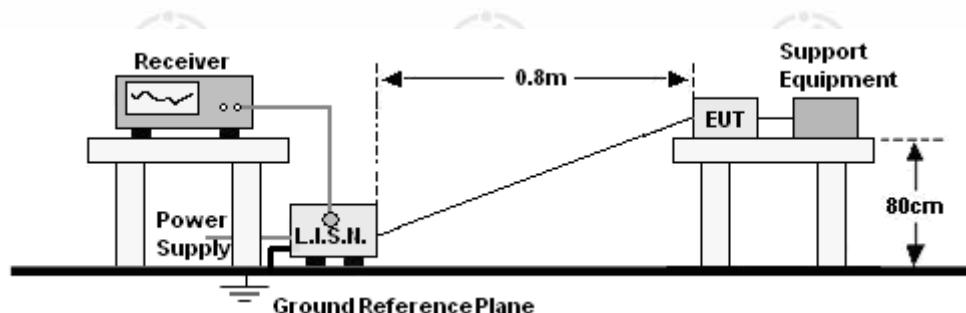


### 7.3. PROCEDURE OF CONDUCTED EMISSION TEST

- The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

## 7.4. WORST CASE TEST GRAPHS AND TEST DATA

**Product** : Thermal Receipt Printer      **Model/Type reference** : ACE V1  
**Power** : AC 120V/60Hz      **Temperature** : 22°C  
**Mode** : Print      **Humidity** : 53%  
**Phase** : L

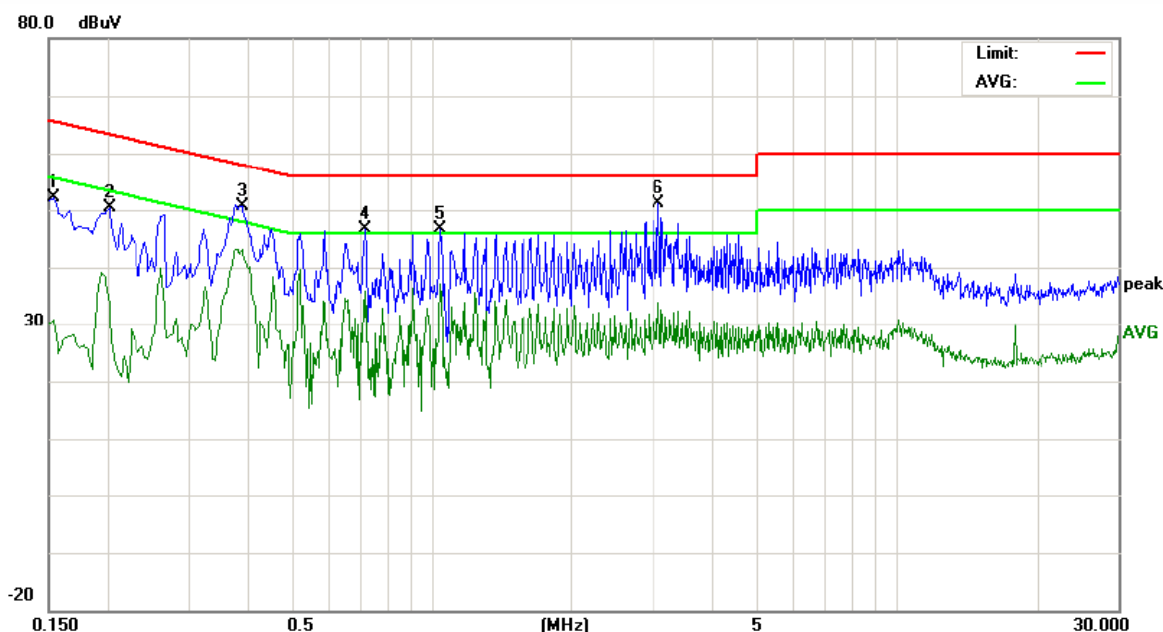


No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	42.29		21.20	9.76	52.05		30.96	65.78	55.78	-13.73	-24.82	P	
2	0.2020	40.72		23.89	9.71	50.43		33.60	63.52	53.52	-13.09	-19.92	P	
3	0.3899	40.96		33.50	9.75	50.71		43.25	58.06	48.06	-7.35	-4.81	P	
4	0.7180	36.78		26.17	9.75	46.53		35.92	56.00	46.00	-9.47	-10.08	P	
5	1.0460	36.92		27.53	9.62	46.54		37.15	56.00	46.00	-9.46	-8.85	P	
6	3.0740	41.52		24.20	9.68	51.20		33.88	56.00	46.00	-4.80	-12.12	P	



**Product** : Thermal Receipt Printer  
**Power** : AC 120V/60Hz  
**Mode** : Print  
**Phase** : N


**Model/Type reference** : ACE V1  
**Temperature** : 22°C  
**Humidity** : 53%

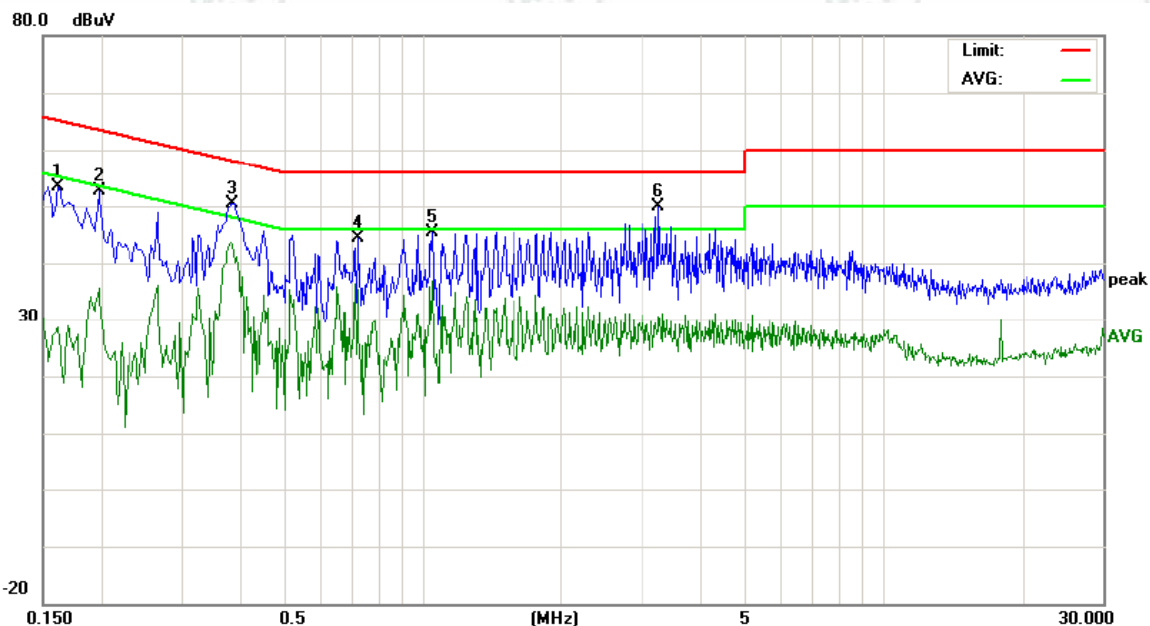

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor		Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG	dB		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	43.72		18.90	9.75		53.47		28.65	65.36	55.36	-11.89	-26.71	P	
2	0.1980	42.81		25.80	9.71		52.52		35.51	63.69	53.69	-11.17	-18.18	P	
3	0.3860	40.67		33.71	9.75		50.42		43.46	58.15	48.15	-7.73	-4.69	P	
4	0.7220	34.72		25.69	9.75		44.47		35.44	56.00	46.00	-11.53	-10.56	P	
5	1.0500	35.78		27.20	9.62		45.40		36.82	56.00	46.00	-10.60	-9.18	P	
6	3.2700	40.15		21.03	9.68		49.83		30.71	56.00	46.00	-6.17	-15.29	P	

**Product** : Thermal Receipt Printer  
**Power** : AC 240V/50Hz  
**Mode** : Print  
**Phase** : L


**Model/Type reference** : ACE V1  
**Temperature** : 22°C  
**Humidity** : 53%

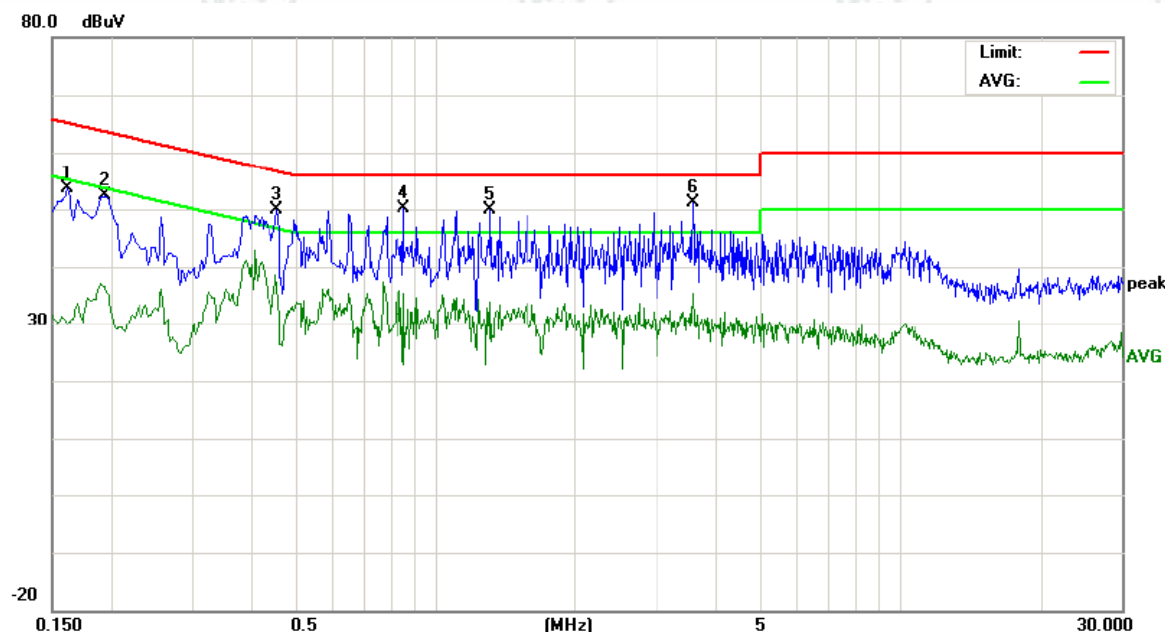

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1613	43.82		20.37	9.75	53.57		30.12	65.39	55.39	-11.82	-25.27	P	
2	0.1932	42.56		26.80	9.72	52.28		36.52	63.89	53.89	-11.61	-17.37	P	
3	0.4561	40.03		26.81	9.73	49.76		36.54	56.76	46.76	-7.00	-10.22	P	
4	0.8524	40.31		25.56	9.75	50.06		35.31	56.00	46.00	-5.94	-10.69	P	
5	1.3092	40.24		24.20	9.65	49.89		33.85	56.00	46.00	-6.11	-12.15	P	
6	3.5834	41.52		25.73	9.67	51.19		35.40	56.00	46.00	-4.81	-10.60	P	

**Product** : Thermal Receipt Printer  
**Power** : AC 240V/50Hz  
**Mode** : Print  
**Phase** : N

**Model/Type reference** : ACE V1  
**Temperature** : 22°C  
**Humidity** : 53%

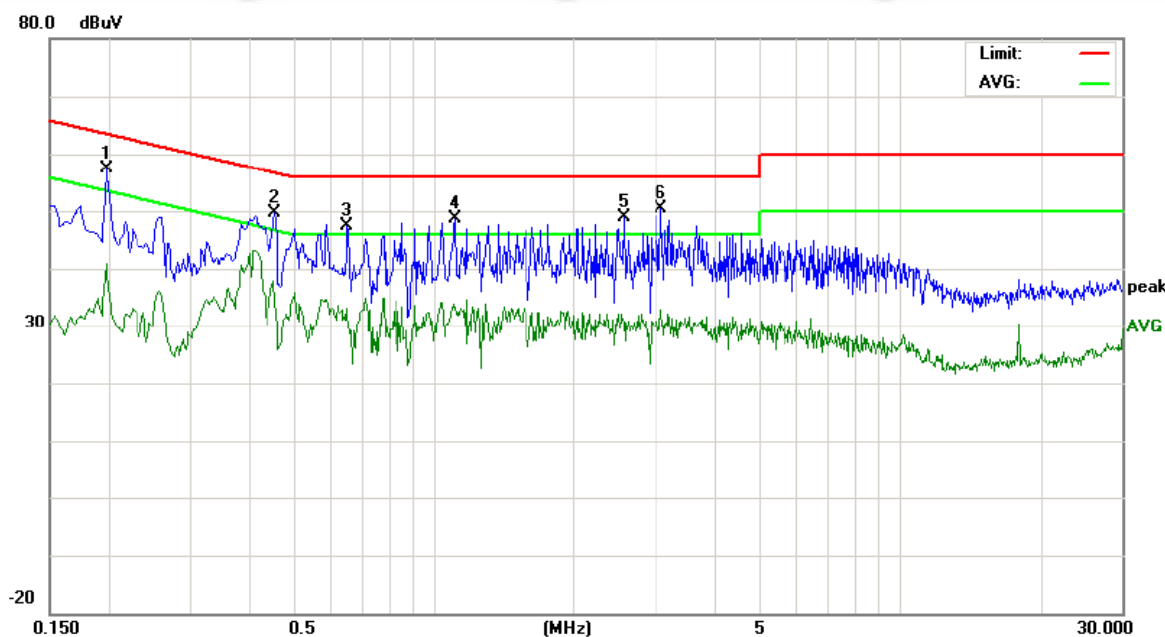

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1975	47.66		31.14	9.71	57.37		40.85	63.71	53.71	-6.34	-12.86	P	
2	0.4561	39.78		24.71	9.73	49.51		34.44	56.76	46.76	-7.25	-12.32	P	
3	0.6503	37.54		22.10	9.75	47.29		31.85	56.00	46.00	-8.71	-14.15	P	
4	1.1108	39.11		23.70	9.63	48.74		33.33	56.00	46.00	-7.26	-12.67	P	
5	2.5527	39.19		21.05	9.70	48.89		30.75	56.00	46.00	-7.11	-15.25	P	
6	3.0729	40.62		23.17	9.68	50.30		32.85	56.00	46.00	-5.70	-13.15	P	

## 8. RADIATED EMISSION TEST


### 8.1. LIMITS

Limits for Class B digital devices

Frequency (MHz)	limits at 3m dB( $\mu$ V/m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

- NOTE:**
1. The lower limit shall apply at the transition frequency.
  2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
  3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

### 8.2. BLOCK DIAGRAM OF TEST SETUP

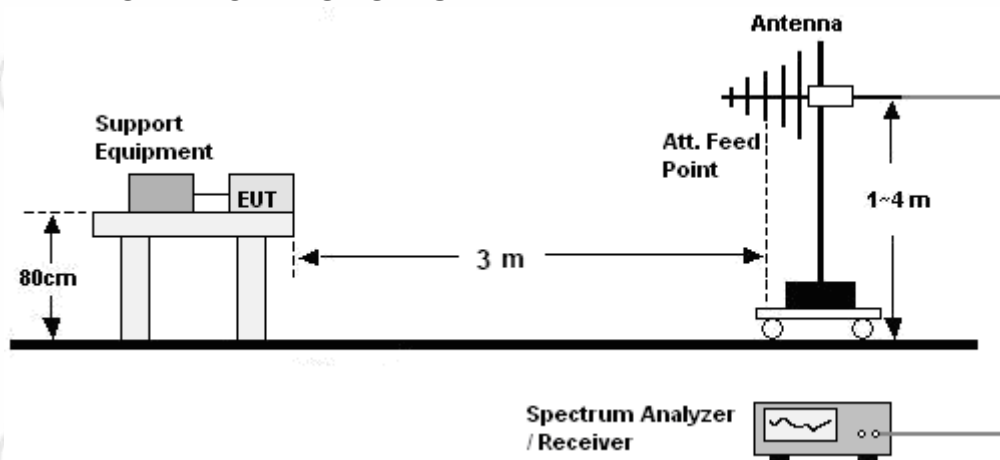


### 8.3. PROCEDURE OF RADIATED EMISSION TEST

#### 30MHz ~ 1GHz:

- a. The Product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### 8.4. WORST CASE TEST GRAPHS AND TEST DATA

**Product** : Thermal Receipt Printer      **Model/Type reference** : ACE V1  
**Power** : AC 120V/60Hz      **Temperature** : 24°C  
**Mode** : Print      **Humidity** : 50%  
**Polarization** : Horizontal

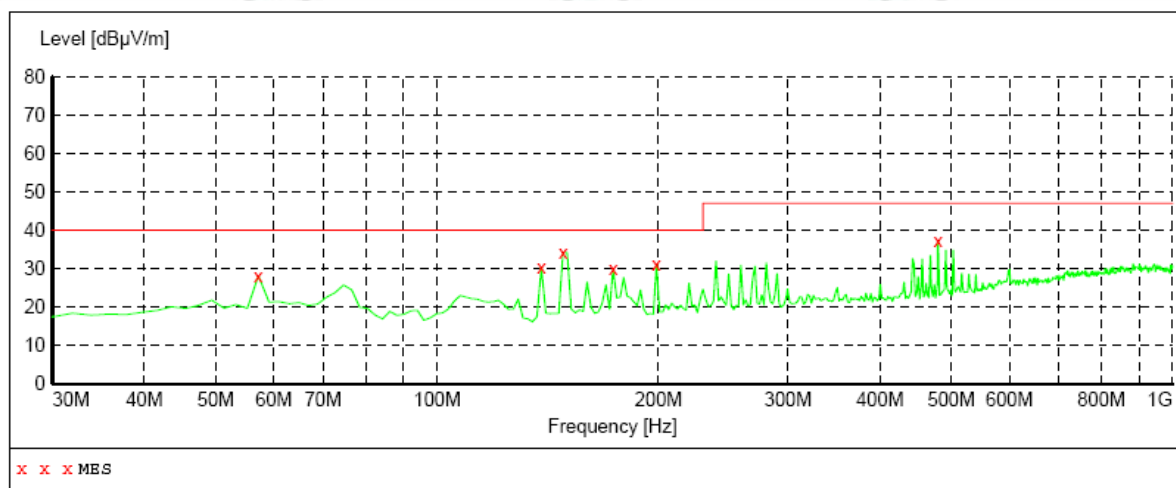


#### MEASUREMENT RESULT:

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
57.160000	28.20	14.0	40.0	11.8	QP	200.0	328.00	HORIZONTAL
138.640000	30.30	10.0	40.0	9.7	QP	200.0	90.00	HORIZONTAL
148.340000	34.20	9.3	40.0	5.8	QP	200.0	289.00	HORIZONTAL
173.560000	30.00	11.1	40.0	10.0	QP	200.0	278.00	HORIZONTAL
198.780000	31.10	13.1	40.0	8.9	QP	200.0	316.00	HORIZONTAL
480.080000	37.30	18.9	47.0	9.7	QP	100.0	350.00	HORIZONTAL



**Product** : Thermal Receipt Printer  
**Power** : AC 120V/60Hz  
**Mode** : Print

**Model/Type reference** : ACE V1  
**Temperature** : 24°C  
**Humidity** : 50%  
**Polarization** : Vertical

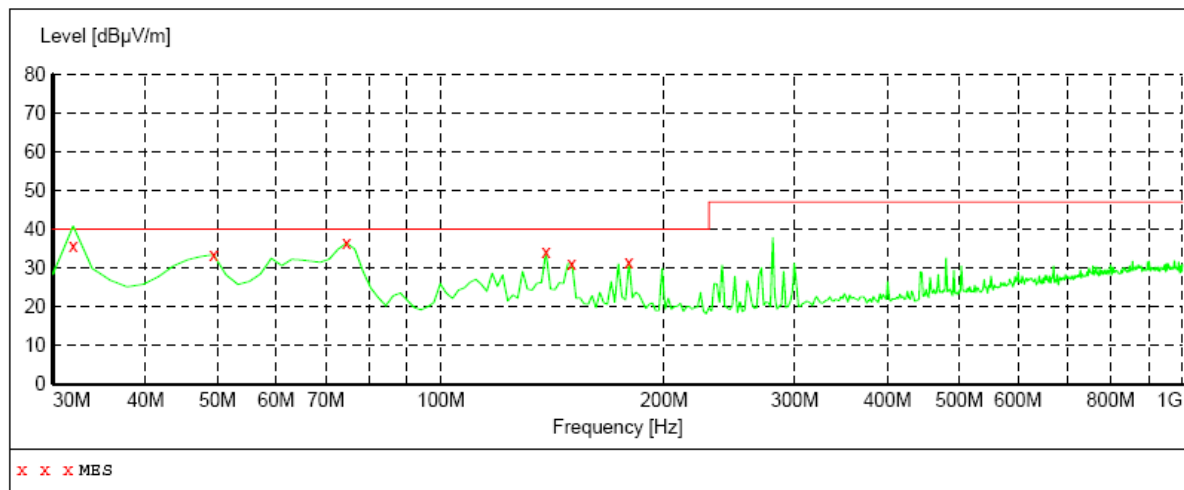

#### MEASUREMENT RESULT:

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	36.80	11.8	40.0	3.2	QP	100.0	185.00	VERTICAL
49.400000	33.40	14.7	40.0	6.6	QP	100.0	320.00	VERTICAL
74.620000	36.40	9.1	40.0	3.6	QP	200.0	76.00	VERTICAL
138.640000	34.20	10.0	40.0	5.8	QP	100.0	360.00	VERTICAL
150.280000	31.20	9.2	40.0	8.8	QP	100.0	174.00	VERTICAL
179.380000	31.50	11.6	40.0	8.5	QP	100.0	360.00	VERTICAL

Remark:

The highest frequency of the internal sources of the EUT is 100 MHz, so the measurement shall only be made up to 1 GHz.

## APPENDIX 1 PHOTOGRAPHS OF TEST SETUP



**CONDUCTED EMISSION TEST SETUP**



**RADIATED EMISSION TEST SETUP**

## APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT



External View of Product-1



External View of Product-2





External View of Product-3



External View of Product-4



External View of Product-5



External View of Product-6






External View of Product-7




External View of Product-8

### APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT

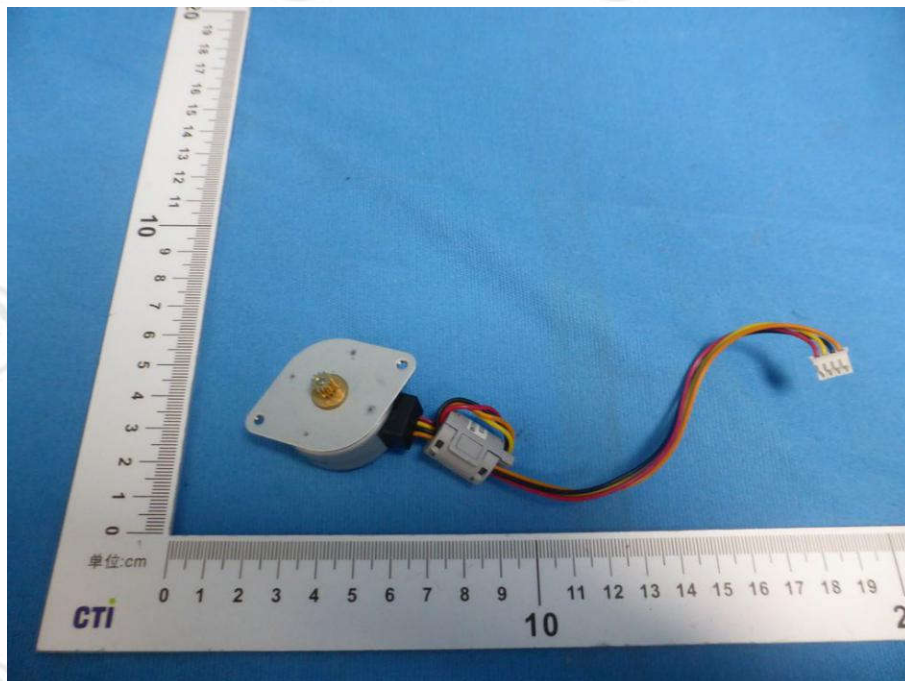


Internal View of Product-1

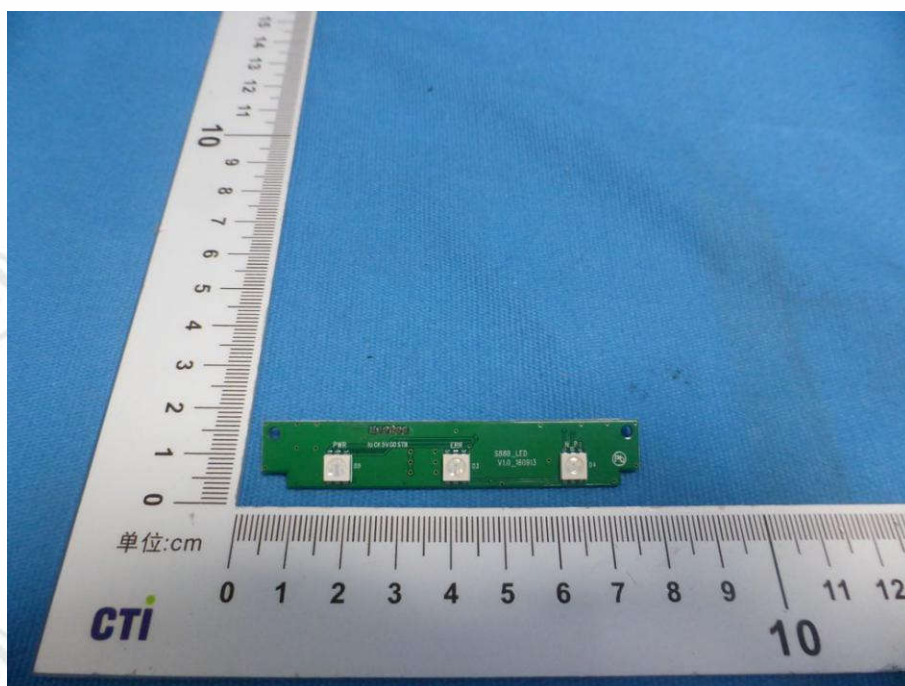


Internal View of Product-2




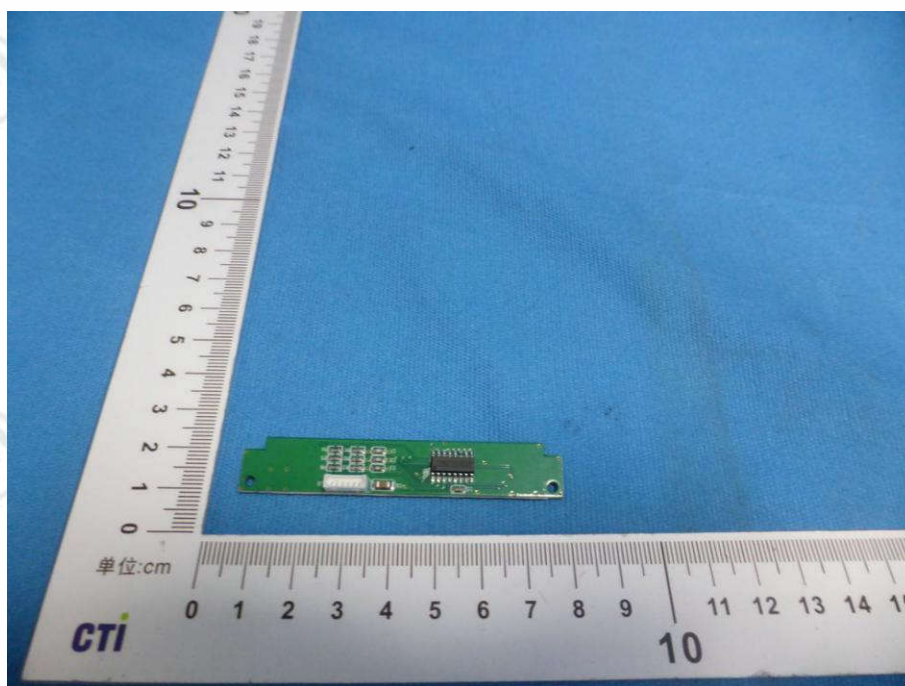


Internal View of Product-3

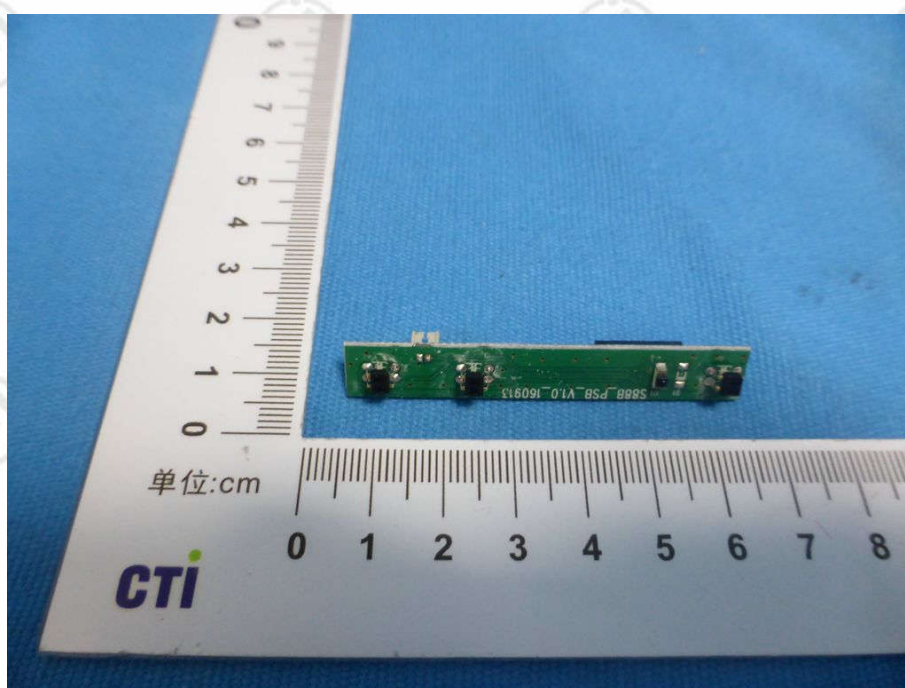

Internal View of Product-4

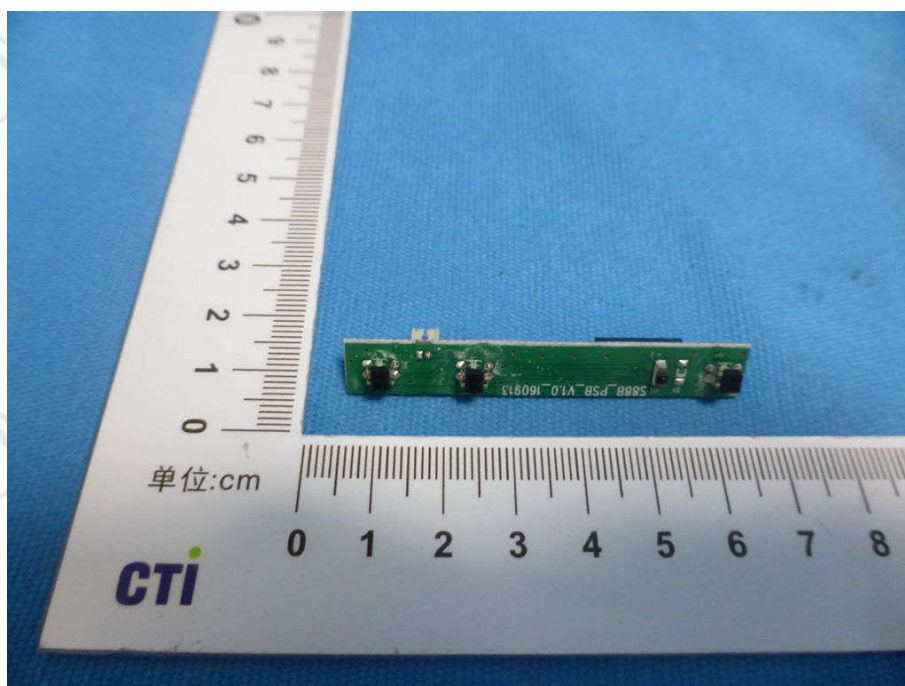


Internal View of Product-5

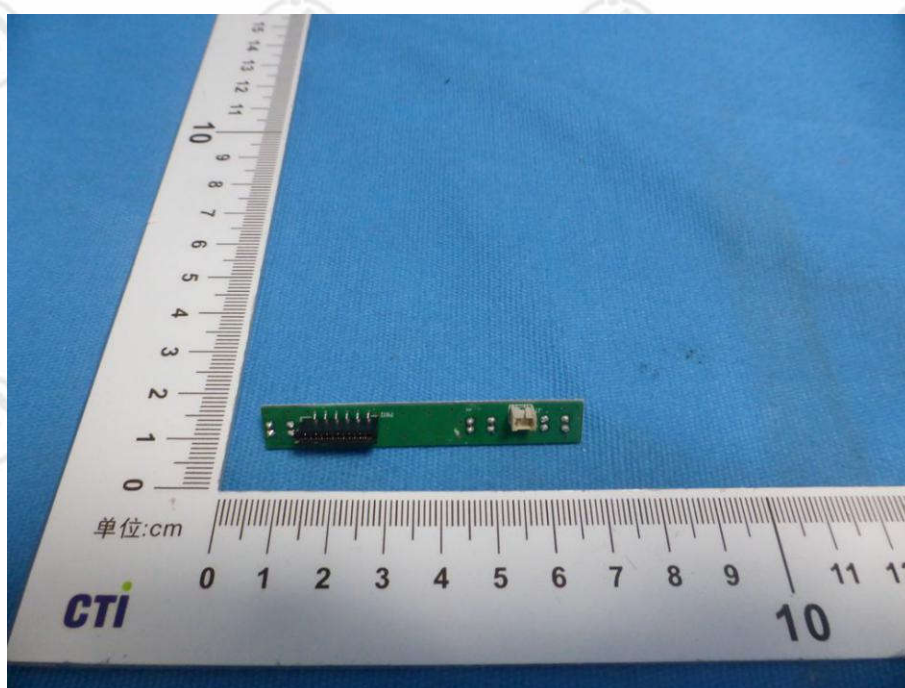


Internal View of Product-6



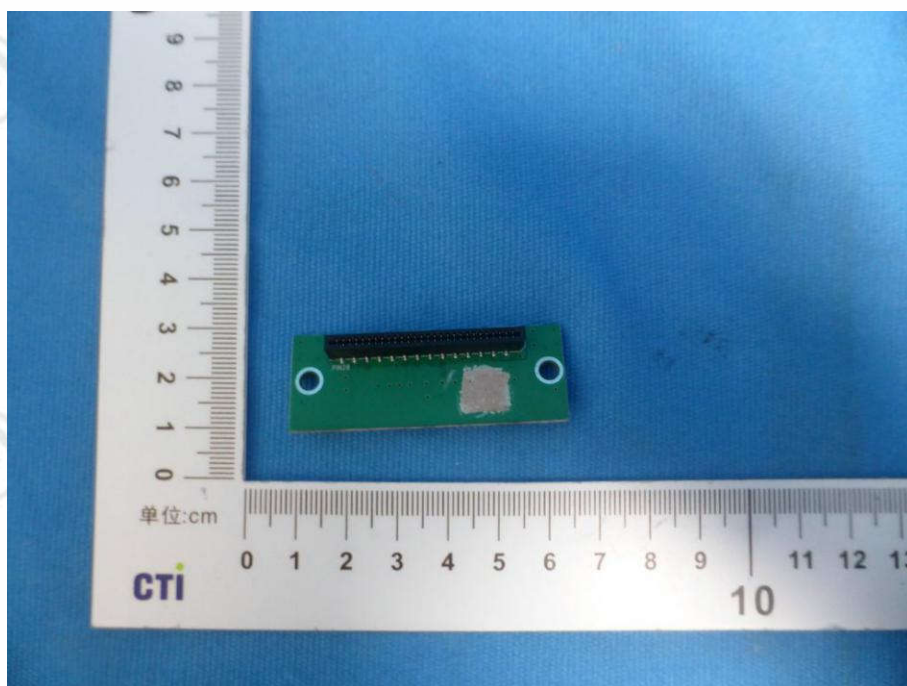

Internal View of Product-7

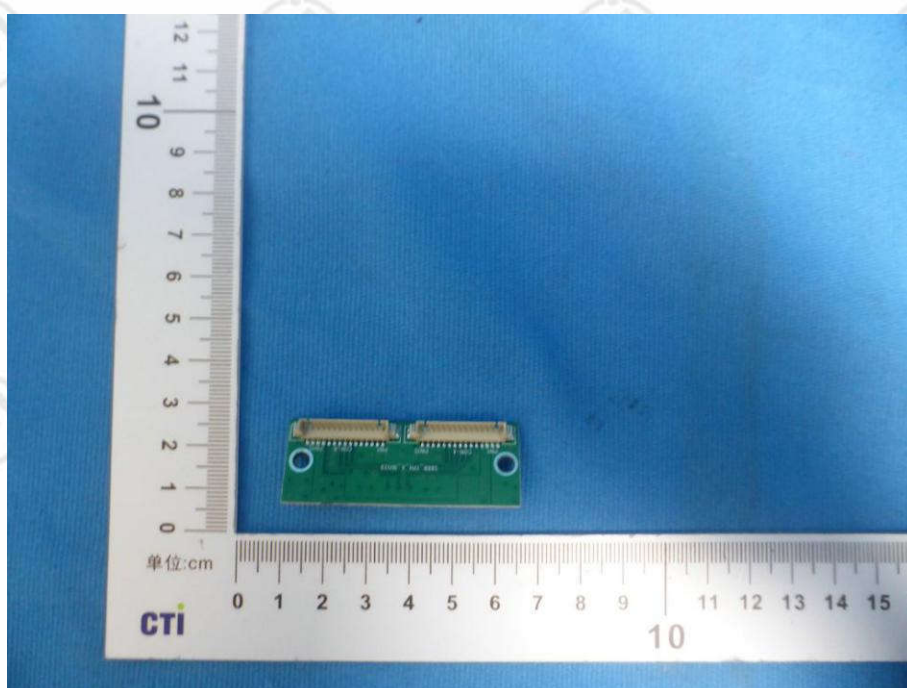


Internal View of Product-8






Internal View of Product-9

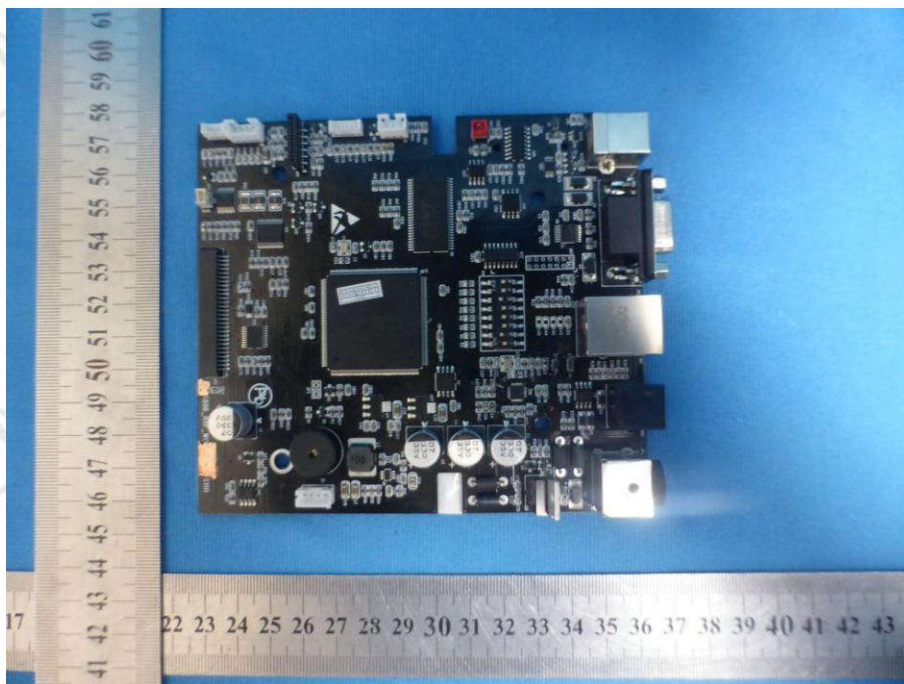

Internal View of Product-10

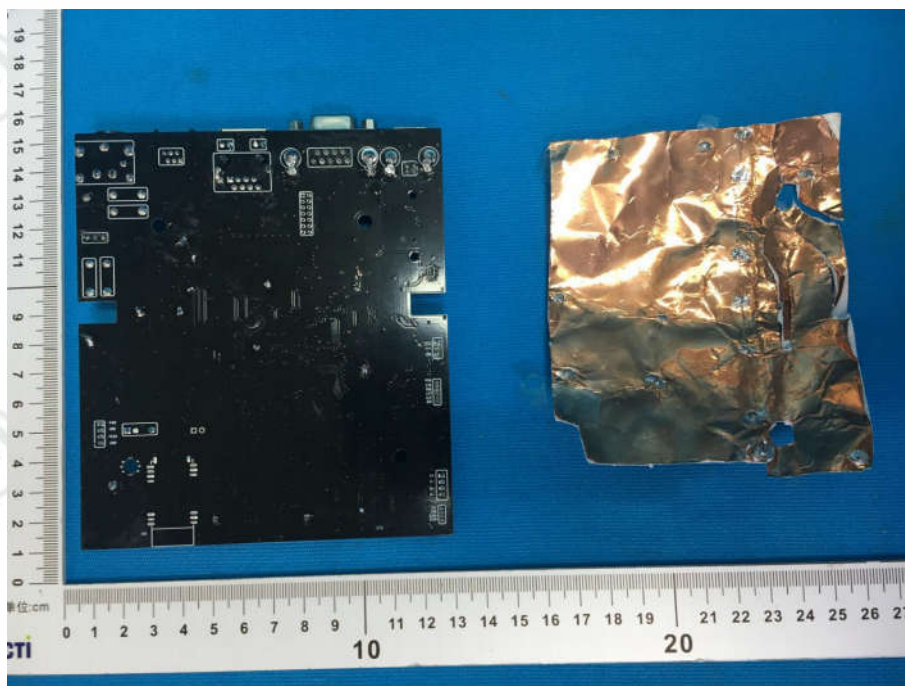

Internal View of Product-11



Internal View of Product-12

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.