

# FCC REPORT

**Applicant:** SKANNEX AS

**Address of Applicant:** Gaustadalleen 21, Oslo, 0349, Norway

**Equipment Under Test (EUT)**

Product Name: Tablet PC

Model No.: RL-SM02BD

Trade mark: N/A

**FCC ID:** 2AD7E-RLSM02BD

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** Jan. 27, 2015

**Date of Test:** Jan. 28 – Feb. 25, 2015

**Date of report issued:** Feb. 26, 2015

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

*The results detailed in this test report relate only to the specific sample(s) tested. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. This report is not to be reproduced except in full, without written approval from TCT Testing Technology.*

## 2 Version

Version No.	Date	Description
00	Feb. 26, 2015	Original

Prepared by:




Date:

Feb. 26, 2015

**Report Clerk**

Reviewed by:



Date:

Feb. 26, 2015

**EMC Manager**

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T. ....	5
5.3 MEASUREMET UNCERTAINTY .....	6
5.4 TEST MODE .....	7
5.5 LABORATORY FACILITY .....	7
5.6 LABORATORY LOCATION.....	7
5.7 TEST INSTRUMENTS LIST .....	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT:.....	9
6.2 CONDUCTED EMISSIONS .....	10
6.3 CONDUCTED OUTPUT POWER.....	13
6.4 20dB OCCUPY BANDWIDTH.....	14
6.5 CARRIER FREQUENCIES SEPARATION .....	18
6.6 HOPPING CHANNEL NUMBER.....	23
6.7 DWELL TIME.....	25
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	27
6.9 CONDUCTED BAND EDGE MEASUREMENT .....	28
6.10 CONDUCTED SPURIOUS EMISSION MEASUREMENT .....	32
6.11 RADIATED SPURIOUS EMISSION MEASUREMENT .....	36

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	SKANNEX AS
Address of Applicant:	Gaustadalleen 21, Oslo, 0349, Norway
Manufacturer:	SKANNEX AS
Address of Manufacturer:	Gaustadalleen 21, Oslo, 0349, Norway

### 5.2 General Description of E.U.T.

Product Name:	Tablet PC
Model No.:	RL-SM02BD
Trade mark:	N/A
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	Internal Antenna
Antenna gain:	2dBi
Power supply:	Rechargeable Li-ion Battery DC 3.7V
AC adapter:	--

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		
Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.							

### 5.3 Measuremet uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission	$\pm 3.28\text{dB}$
2	RF power,conducted	$\pm 0.12\text{dB}$
3	Spurious emissions,conducted	$\pm 0.11\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.88\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.88\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 5.4 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with worst case data rate.
Remark	GFSK (1 Mbps) is the worst case mode.
The sample was placed 0.8m above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

## 5.5 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <p>● <b>FCC - Registration No.: 572331</b> Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab</p> <p>The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.</p> <p>● <b>IC - Registration No.: 10668A-1</b> The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing</p> <p>● <b>CNAS - Registration No.: CNAS L6165</b> Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.</p>
--

## 5.6 Laboratory Location

<p>Shenzhen Tongce Testing Lab</p> <p>Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China</p> <p>Tel: 13410377511</p> <p>Fax: --</p>
---

## 5.7 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
FICO	Adapter	JD-050200	N/A	N/A
Edifier	Earphone	H275P	N/A	N/A

## 5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Sep.17, 2014	Sep.16, 2015
2	Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Sep.17, 2014	Sep.16, 2015
3	Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep.17, 2014	Sep.16, 2015
4	Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep.17, 2014	Sep.16, 2015
5	Pre-amplifier	HP	8447D	2727A05017	Sep.17, 2014	Sep.16, 2015
6	Loop antenna	ZHINAN	ZN30900A	12024	Dec.15, 2014	Dec.14, 2015
7	Broadband Antenna	Schwarzbeck	VULB9163	340	Sep.17, 2014	Sep.16, 2015
8	Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep.17, 2014	Sep.16, 2015
9	Loop antenna	ZHINAN	ZN30900A	12024	Dec.15, 2014	Dec.14, 2015
10	Coax cable	TCT	N/A	N/A	Sep.14, 2014	Sep.15, 2015
11	Coax cable	TCT	N/A	N/A	Sep.14, 2014	Sep.15, 2015
12	Coax cable	TCT	N/A	N/A	Sep.14, 2014	Sep.15, 2015
13	Coax cable	TCT	N/A	N/A	Sep.14, 2014	Sep.15, 2015
14	EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A	N/A


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCS30	100139	Sep.17, 2014	Sep.16, 2015
2	LISN-1	AFJ	LS16C	16010947251	Sep.17, 2014	Sep.16, 2015
3	LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep.17, 2014	Sep.16, 2015
4	Coax cable	TCT	N/A	164080	Sep.17, 2014	Sep.16, 2015
5	EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A	N/A

Conducted method test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	200054	Sep.17, 2014	Sep.16, 2015
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 22, 2014	Oct. 23, 2015
3	Pulse Power Senor	Anritsu	MA2411B	0917070	Dec. 12 2014	Dec. 11, 2015
4	Power Meter	Anritsu	ML2495A	1005002	Dec. 12 2014	Dec. 11, 2015



## 6 Test results and Measurement Data

### 6.1 Antenna requirement:

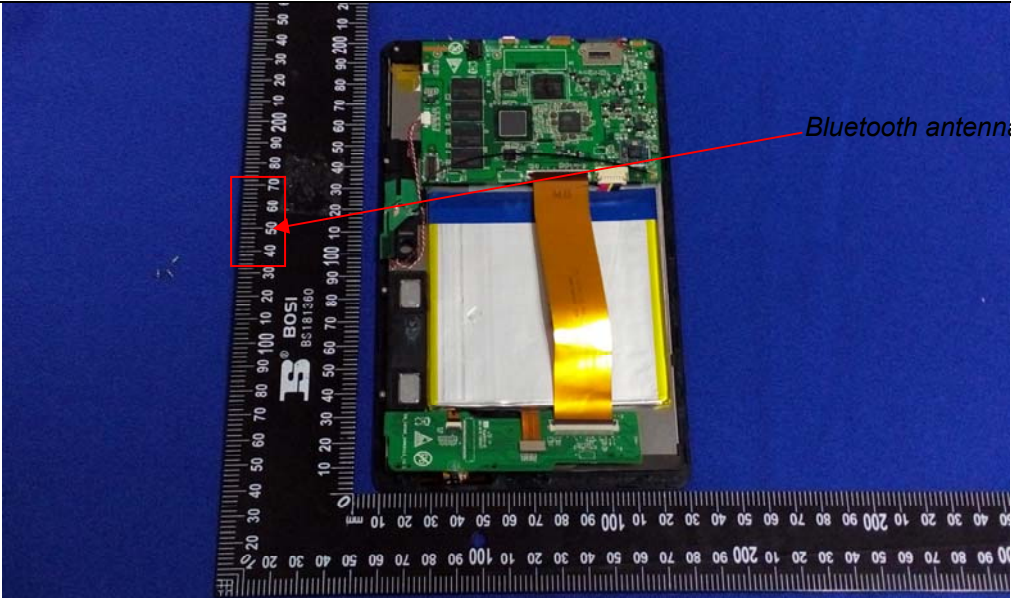
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><i>15.247(c) (1)(i) requirement:</i> (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The Bluetooth antenna is an internal PCB antenna which permanently attached, and the best case gain of the antenna is 2 dBi.</p>	
	

## 6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4:2003		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBUV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<div><p style="text-align: center;"><b>Reference Plane</b></p><p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>		
Test procedure:	<div><ol style="list-style-type: none"><li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li></ol></div>		
Test Instruments:	Refer to section 5.7 for details		
Test mode:	Bluetooth (Continuous transmitting) mode		
Test results:	Pass		

### Measurement Data

**Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)**

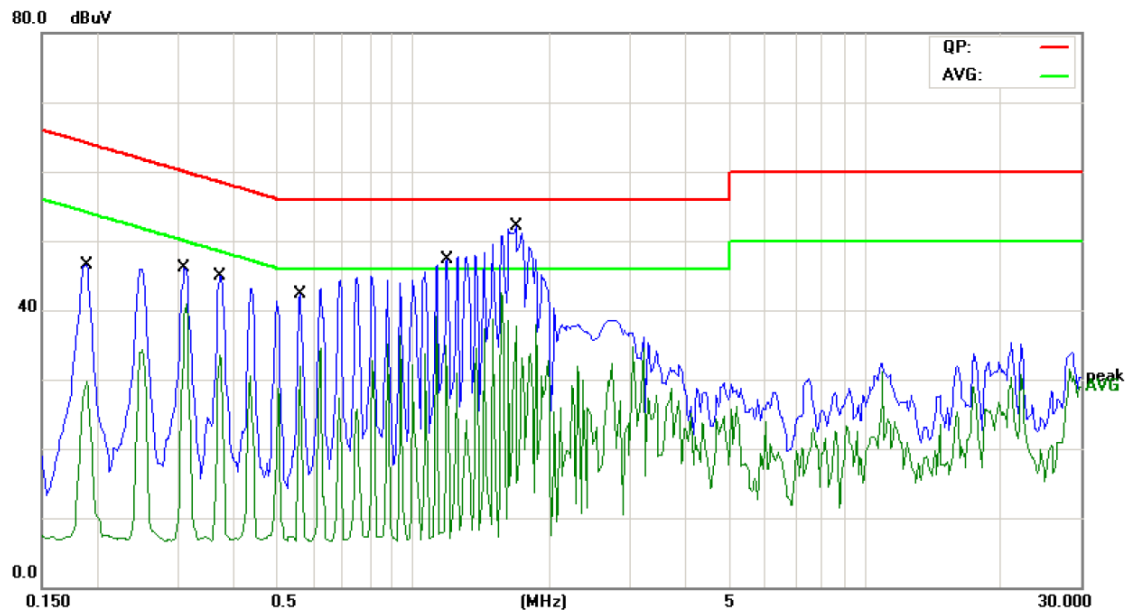

Site Chamber #1

Phase: **L1**

Temperature: 23 (C)

Limit: FCC PART15 Conduction(QP)

Power: AC 120V/60Hz

Humidity: 52 %

EUT: Tablet PC


M/N: RL-SM02BD

Mode: Tx Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1891	32.22	11.47	43.69	64.07	-20.38	QP	
2		0.1891	19.79	11.47	31.26	54.07	-22.81	AVG	
3		0.3102	33.47	11.40	44.87	59.96	-15.09	QP	
4		0.3102	20.96	11.40	32.36	49.96	-17.60	AVG	
5		0.3727	32.27	11.36	43.63	58.44	-14.81	QP	
6		0.3727	21.73	11.36	33.09	48.44	-15.35	AVG	
7		0.5602	26.34	11.27	37.61	56.00	-18.39	QP	
8		0.5602	15.41	11.27	26.68	46.00	-19.32	AVG	
9		1.1852	34.14	11.26	45.40	56.00	-10.60	QP	
10		1.1852	23.65	11.26	34.91	46.00	-11.09	AVG	
11	*	1.6812	37.82	11.51	49.33	56.00	-6.67	QP	
12		1.6812	26.49	11.51	38.00	46.00	-8.00	AVG	

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

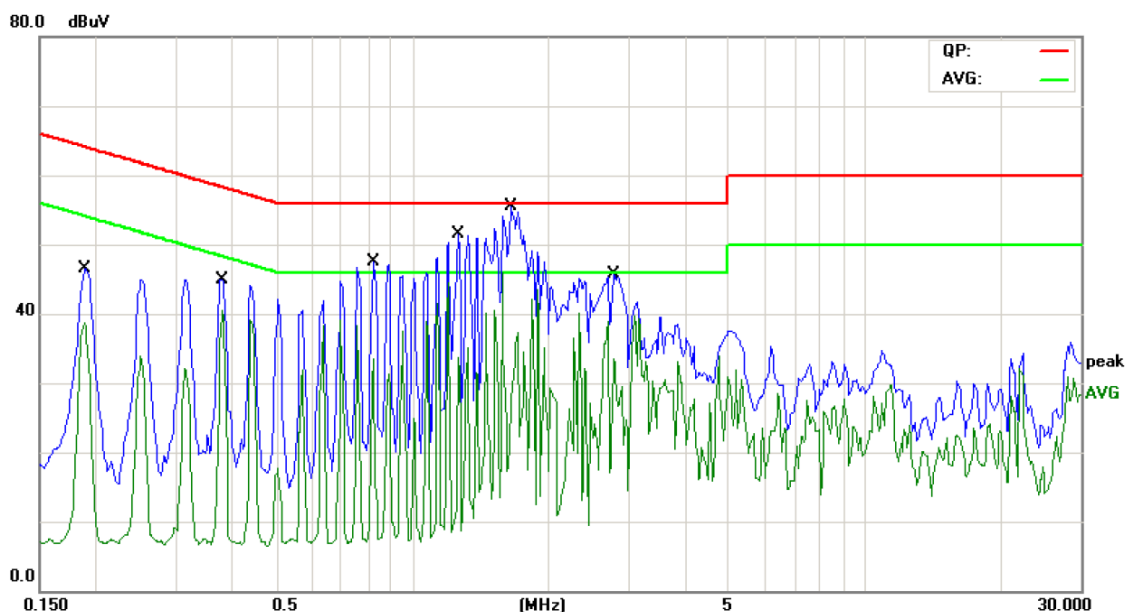

Site Chamber #1

Phase: **N**

Temperature: 23 (C)

Limit: FCC PART15 Conduction(QP)

Power: AC 120V/60Hz

Humidity: 52 %

EUT: Tablet PC

M/N: RL-SM02BD

Mode: Tx Mode


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1891	33.15	11.49	44.64	64.07	-19.43	QP	
2		0.1891	24.72	11.49	36.21	54.07	-17.86	AVG	
3		0.3766	32.65	11.37	44.02	58.35	-14.33	QP	
4	*	0.3766	27.38	11.37	38.75	48.35	-9.60	AVG	
5		0.8219	27.59	11.20	38.79	56.00	-17.21	QP	
6		0.8219	12.02	11.20	23.22	46.00	-22.78	AVG	
7		1.2672	11.49	11.32	22.81	56.00	-33.19	QP	
8		1.2672	-0.97	11.32	10.35	46.00	-35.65	AVG	
9		1.6500	14.37	11.51	25.88	56.00	-30.12	QP	
10		1.6500	-1.92	11.51	9.59	46.00	-36.41	AVG	
11		2.7906	23.25	11.41	34.66	56.00	-21.34	QP	
12		2.7906	3.71	11.41	15.12	46.00	-30.88	AVG	

**Notes:**

1. An initial pre-scan was performed on the line and neutral terminal of the power line with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + Correct Factor
4. \* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


### 6.3 Conducted Output Power

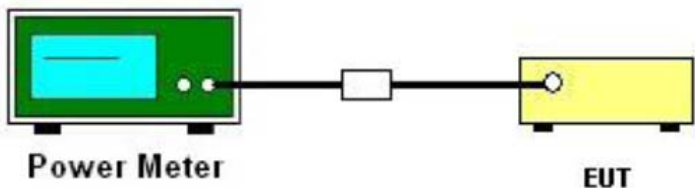Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
Test setup:	 <p>The diagram illustrates the test setup. A green Power Meter is connected via a black cable to a small white attenuator, which is then connected to a yellow EUT (Equipment Under Test).</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test procedure:	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Measure the conducted output power with cable loss and record the results in the test report.</li> <li>5. Measure and record the results in the test report.</li> </ol>
Test results:	Pass

#### Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.65	21.00	Pass
Middle	2.32	21.00	Pass
Highest	1.75	21.00	Pass
$\pi/4$ -DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.05	21.00	Pass
Middle	1.22	21.00	Pass
Highest	1.68	21.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.46	21.00	Pass
Middle	1.55	21.00	Pass
Highest	1.63	21.00	Pass

## 6.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	NA
Test setup:	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW <math>\geq</math> 1% of the 20 dB bandwidth; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>5. Measure and record the results in the test report.</li> </ol>
Test results:	Pass


### Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ -DQPSK	8DPSK
Lowest	917.47	1241.99	1225.96
Middle	913.46	1270.03	1225.96
Highest	913.46	1262.02	1225.96


Test plot as follows:

Modulation mode:


GFSK

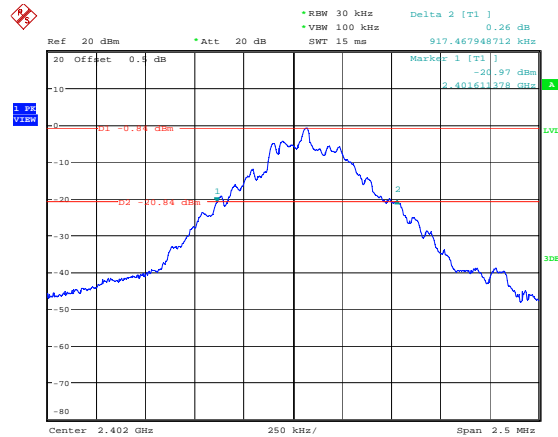

Lowest channel

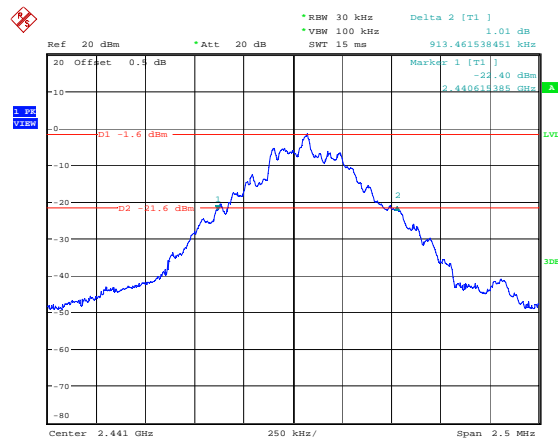


Middle channel

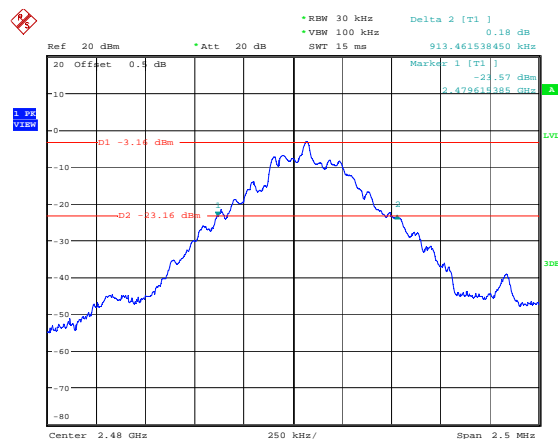


Highest channel

Modulation mode:


$\pi/4$ -DQPSK

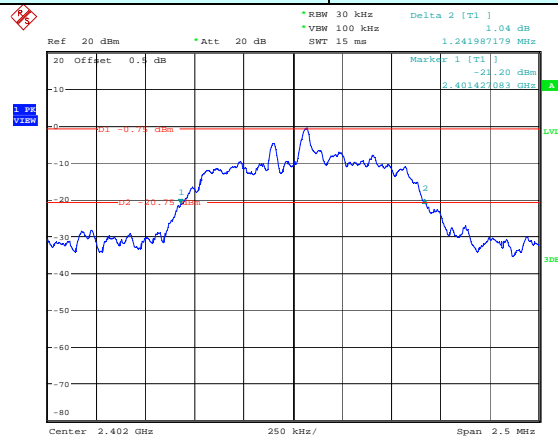

Lowest channel

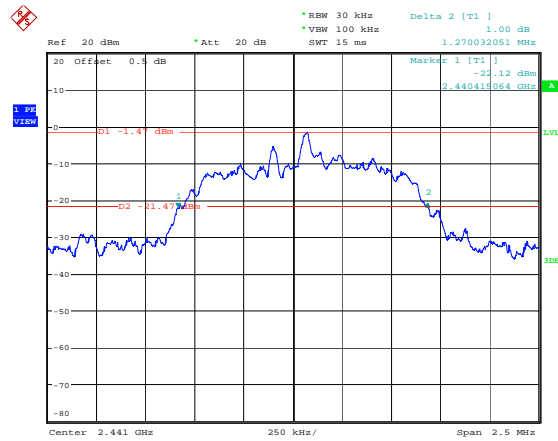

Middle channel

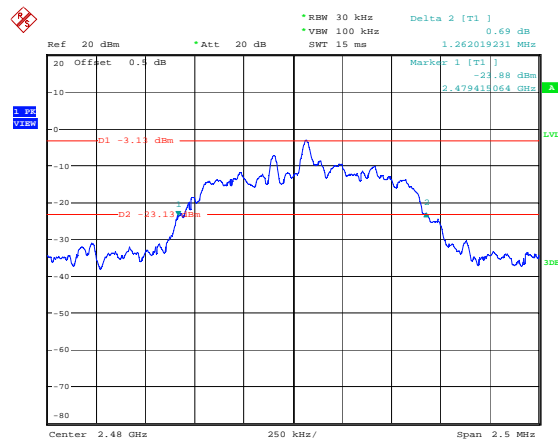


Highest channel




Modulation mode:


8DPSK

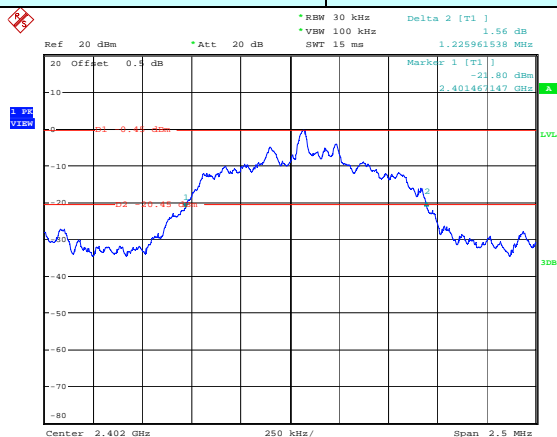

Lowest channel

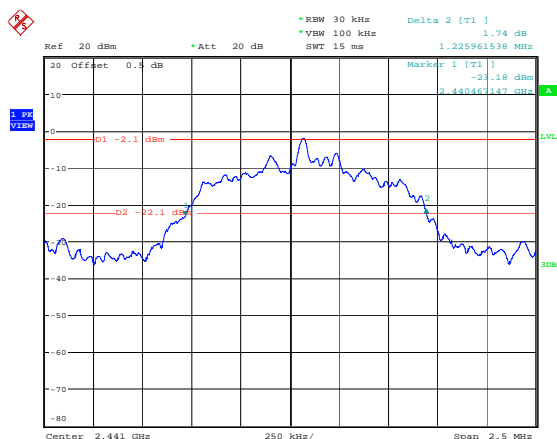


Middle channel

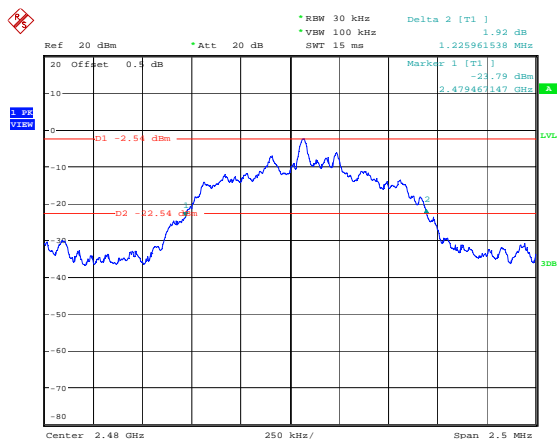

Highest channel

## 6.5 Carrier Frequencies Separation

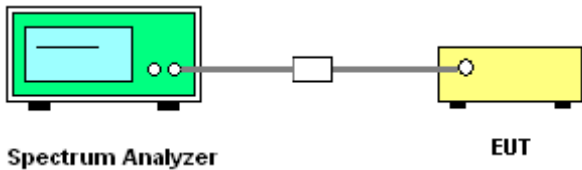Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a blue screen. A red line representing an RF cable connects the Spectrum Analyzer to a small white square representing an attenuator. Another red line connects the attenuator to a yellow rectangular box representing the EUT (Equipment Under Test).</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW <math>\geq</math> 1% of the span; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>6. Measure and record the results in the test report.</li> </ol>
Test results:	Pass

### Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1022	611.65	Pass
Middle	1000	611.65	Pass
Highest	1000	611.65	Pass
$\pi/4$ -DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1018	846.69	Pass
Middle	1002	846.69	Pass
Highest	1002	846.69	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	817.31	Pass
Middle	1002	817.31	Pass
Highest	1000	817.31	Pass


Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	917.47	611.65
$\pi/4$ -DQPSK	1270.03	846.69
8DPSK	1225.96	817.31


Test plot as follows:

Modulation mode:


GFSK

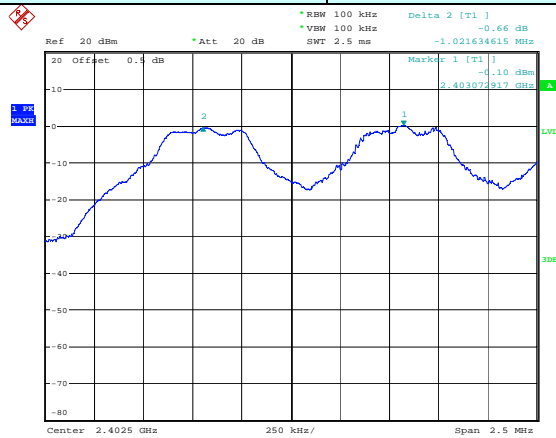

Lowest channel

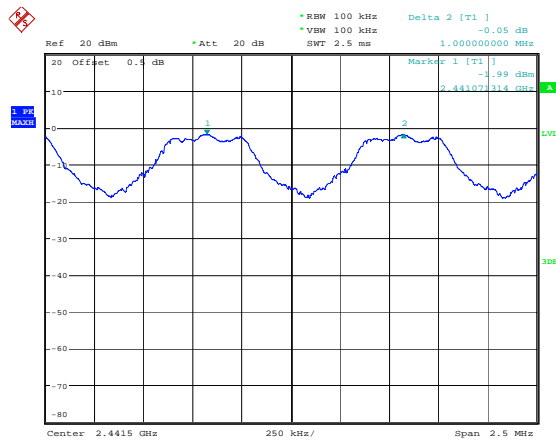


Middle channel

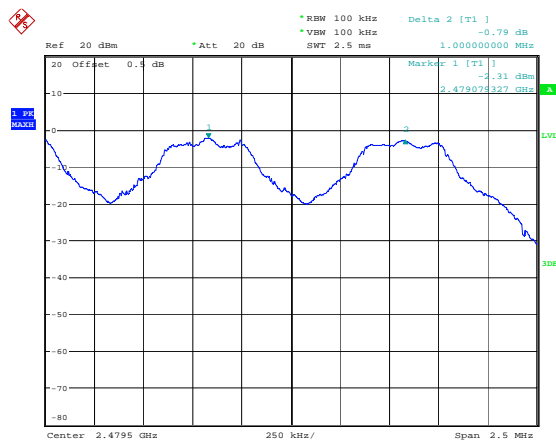


Highest channel

Modulation mode:


$\pi/4$ -DQPSK

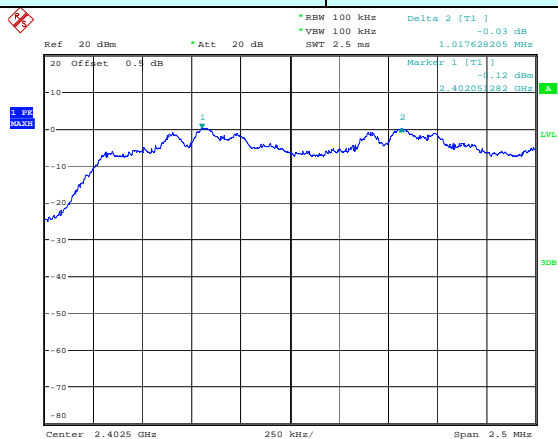

Lowest channel

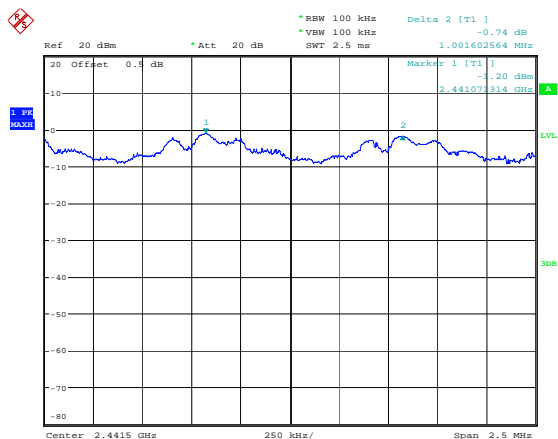


Middle channel

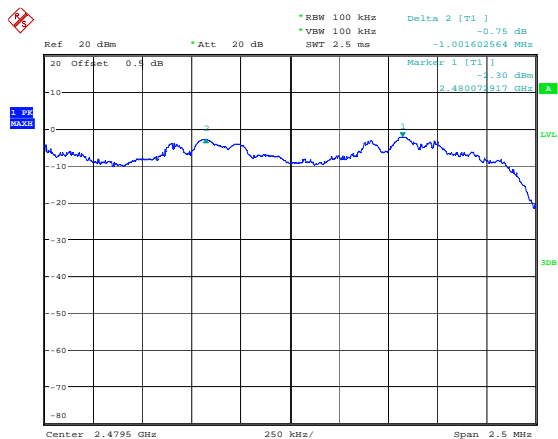


Highest channel

Modulation mode:


8DPSK

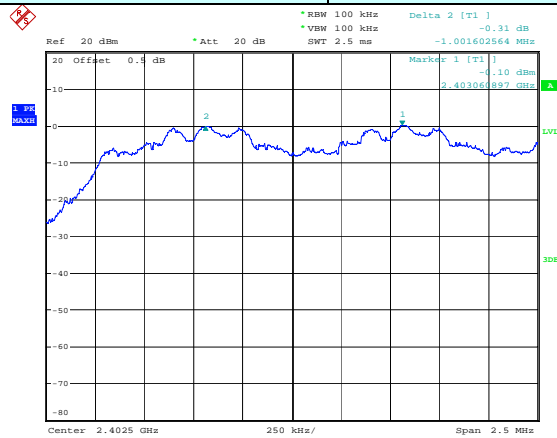

Lowest channel

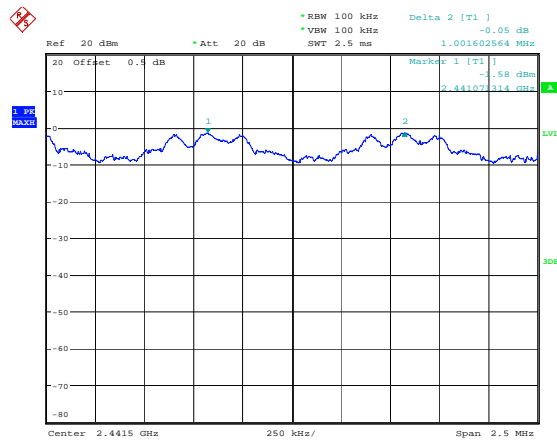


Middle channel

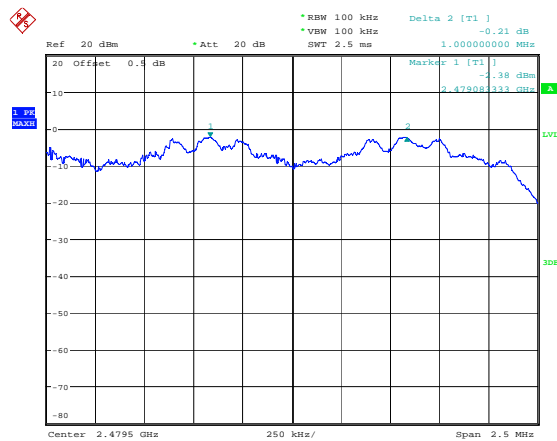

Highest channel


## 6.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = the frequency band of operation; <math>RBW \geq 1\%</math> of the span; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>6. The number of hopping frequency used is defined as the number of total channel.</li> <li>7. Record the measurement data derived from spectrum analyzer.</li> </ol>
Test results:	Pass


### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK, $\pi/4$ -DQPSK, 8DPSK	79	15	Pass


### GFSK

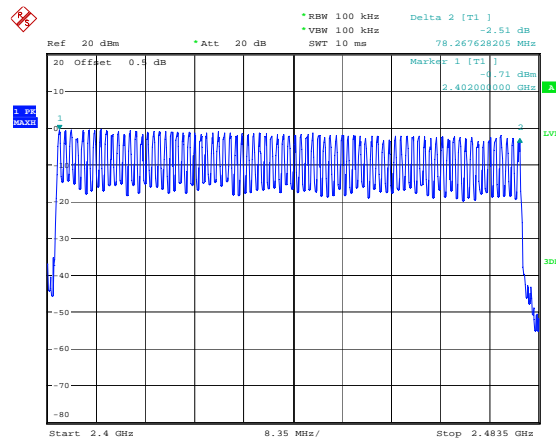

### $\pi/4$ -DQPSK

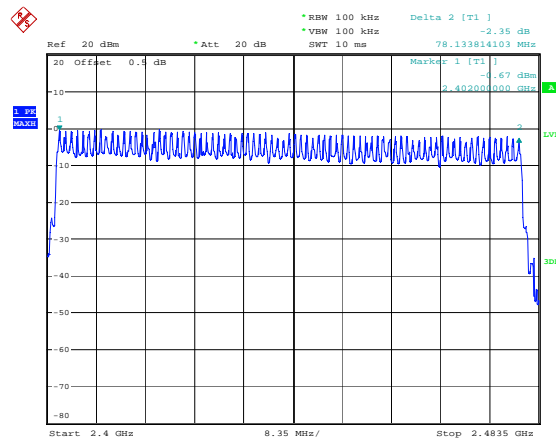


### 8DPSK

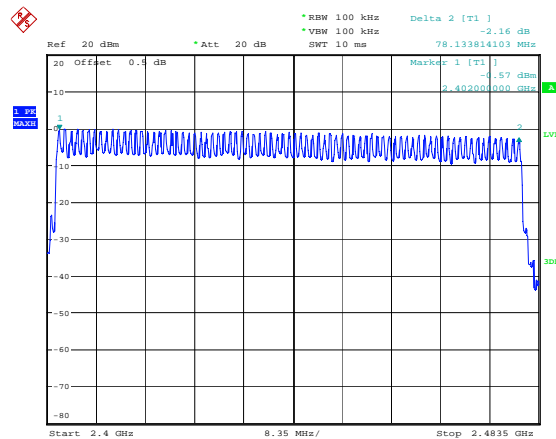



## 6.7 Dwell Time

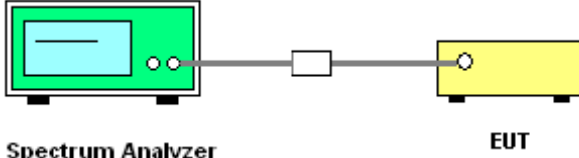Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test setup:	 <p style="text-align: center;"><b>Spectrum Analyzer</b>                      <b>EUT</b></p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
	<ol style="list-style-type: none"> <li>1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Enable the EUT hopping function.</li> <li>5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.</li> <li>6. Measure and record the results in the test report.</li> </ol>
Test results:	Pass

### Measurement Data (Worst case)

Mode	Packet	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell time (second)	Limit (second)	Result
GFSK	DH5	106.67	3.01	0.32	0.4	Pass
π/4-DQPSK	2-DH5	106.67	2.97	0.32	0.4	Pass
8DPSK	3-DH5	106.67	2.96	0.32	0.4	Pass

Remark: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.


With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),

Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time


## Test plot Package Transfer Time:

Modulation mode:	GFSK
------------------	------

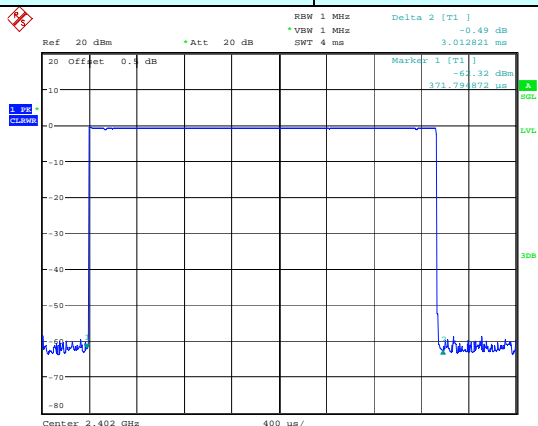


## DH5

Modulation mode:	$\pi/4$ -DQPSK
------------------	----------------

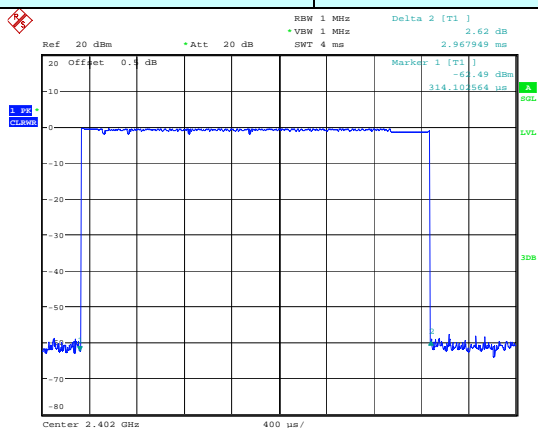



## 2-DH5

Modulation mode:	8DPSK
------------------	-------

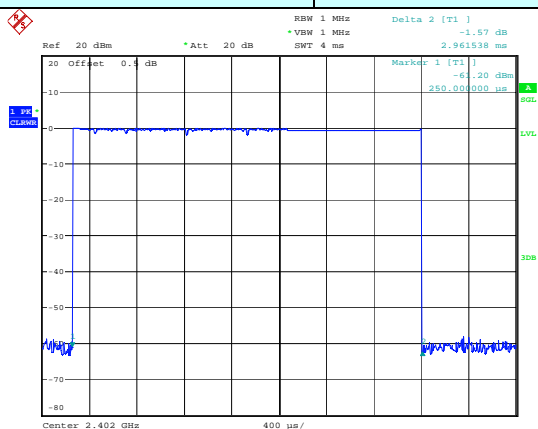


## 3-DH5

## 6.8 Pseudorandom Frequency Hopping Sequence
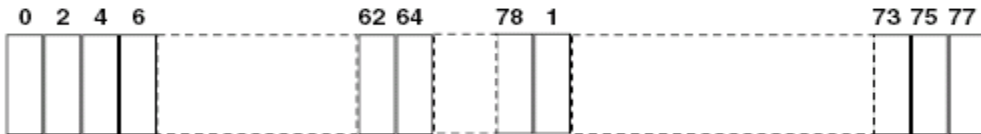
<b>Test Requirement:</b>	<b>FCC Part15 C Section 15.247 (a)(1) requirement:</b>
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>
	<b>EUT Pseudorandom Frequency Hopping Sequence</b>
	<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p>
	<ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>
	
	<b>Linear Feedback Shift Register for Generation of the PRBS sequence</b>
	An example of Pseudorandom Frequency Hopping Sequence as follow:
	
	Each frequency used equally on the average by each transmitter.
	The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.


## 6.9 Conducted Band Edge Measurement

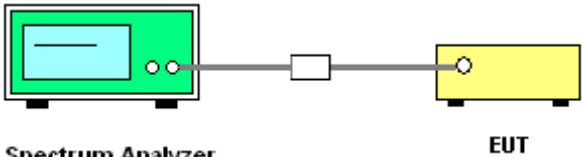Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A cable connects it to a yellow box on the right labeled 'EUT'. A small white box is positioned between the two main components on the cable line.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test procedure:	<ol style="list-style-type: none"> <li>1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>3. Set RBW = 100kHz (<math>\geq 1\%</math> span=10MHz ), VBW = 300kHz (<math>\geq</math>RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>4. Enable hopping function of the EUT and then repeat step 2. and 3.</li> <li>5. Measure and record the results in the test report.</li> </ol>
Test results:	Pass


Test plot as follows:

GFSK

Test channel:	Lowest channel
---------------	----------------

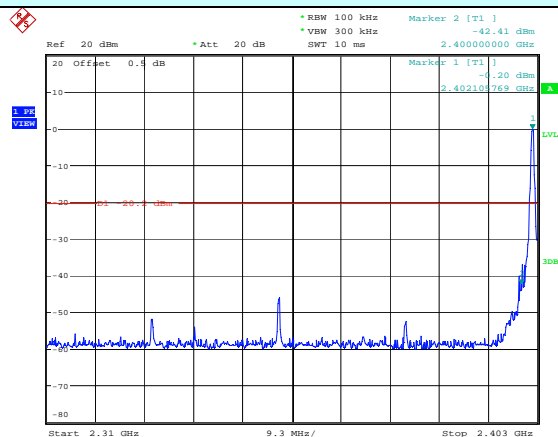


No-hopping mode

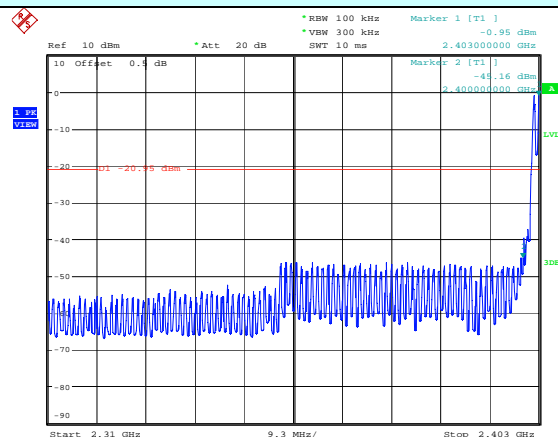


Hopping mode

Test channel:	Highest channel
---------------	-----------------

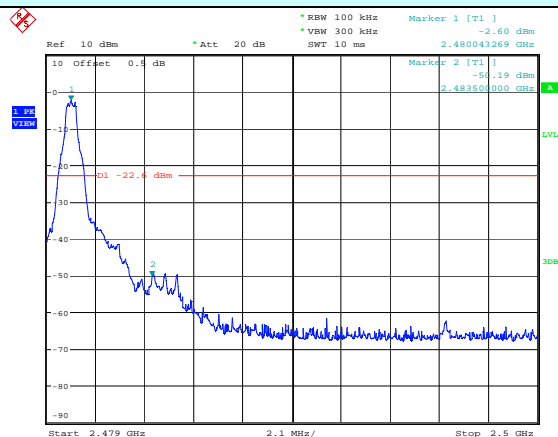


No-hopping mode

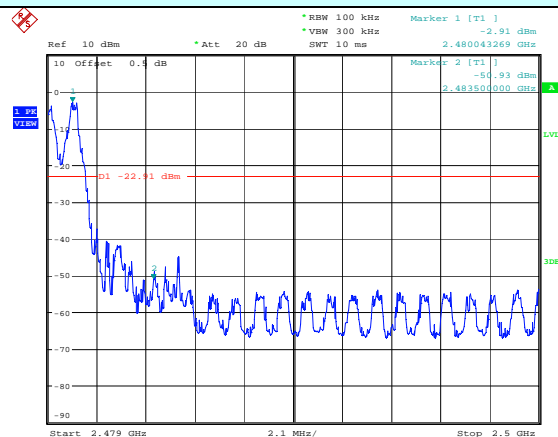


Hopping mode

$\pi/4$ -DQPSK

Test channel:	Lowest channel
---------------	----------------

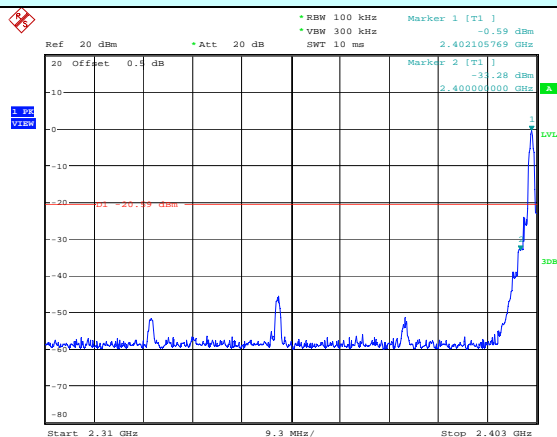


No-hopping mode

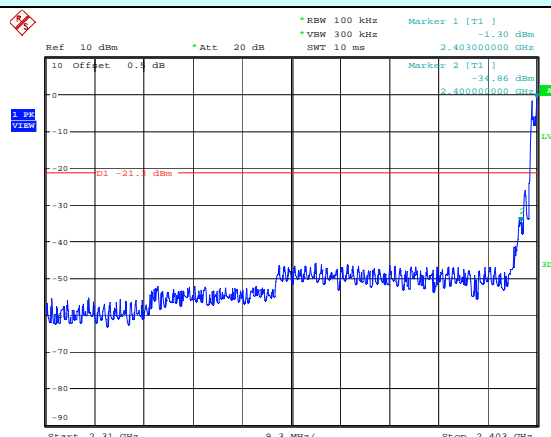


Hopping mode

Test channel:	Highest channel
---------------	-----------------

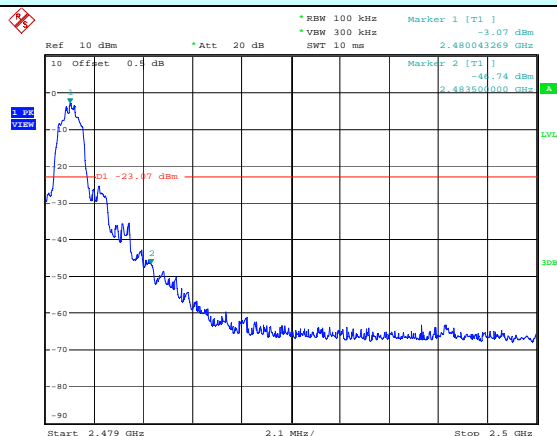

No-hopping mode

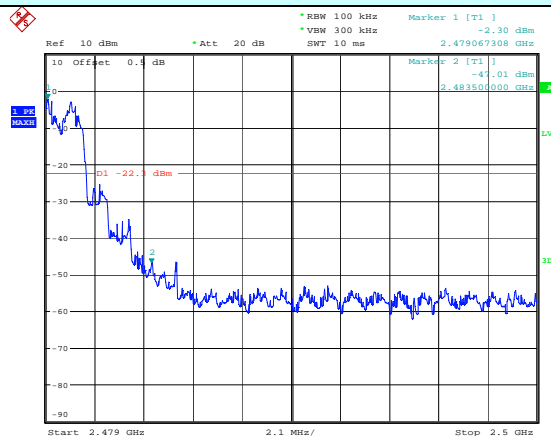


Hopping mode


8DPSK

Test channel:

Lowest channel

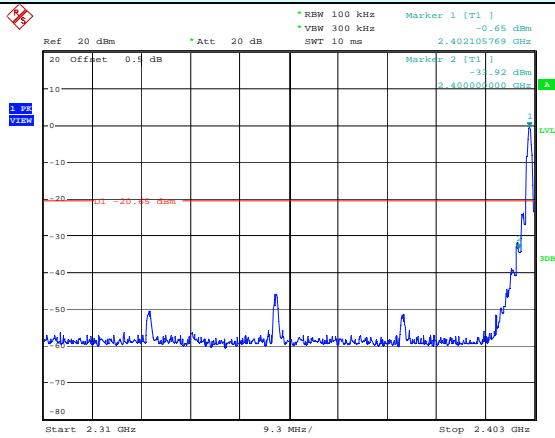


No-hopping mode

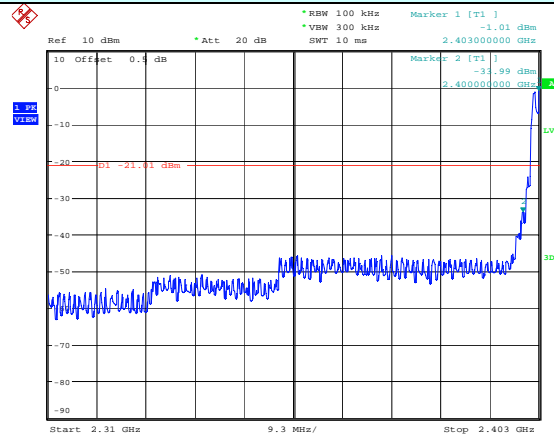


Hopping mode

Test channel:

Highest channel

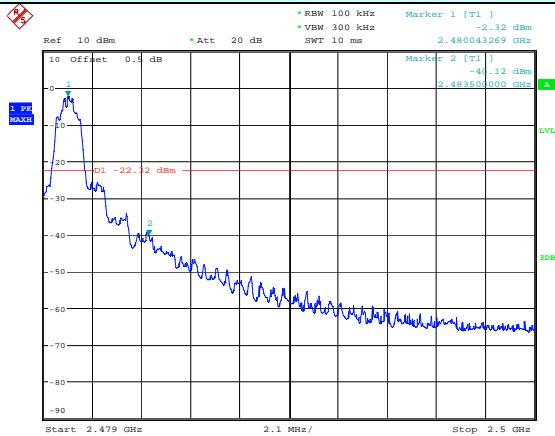


No-hopping mode

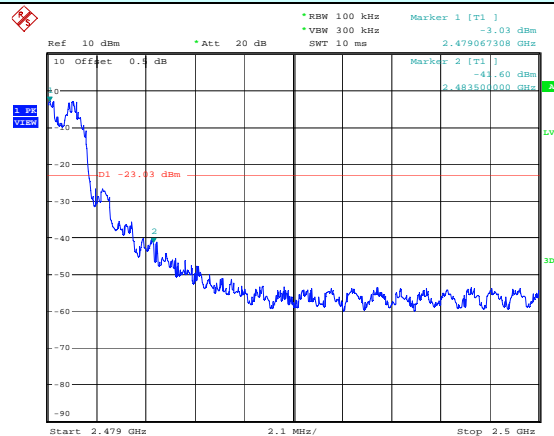

Hopping mode


## 6.10 Conducted Spurious Emission Measurement

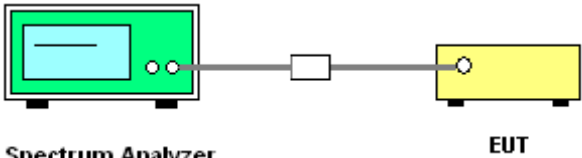Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
	<ol style="list-style-type: none"> <li>1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines</li> <li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.</li> <li>5. Measure and record the results in the test report.</li> <li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
Test results:	Pass




GFSK

Lowest channel

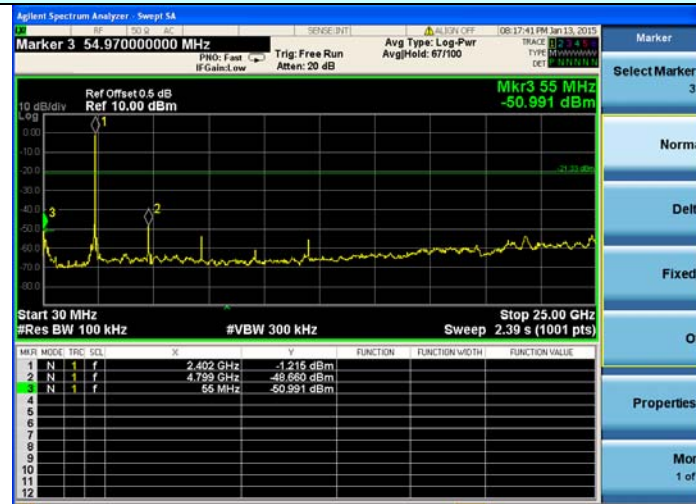


30MHz~25GHz

Middle channel

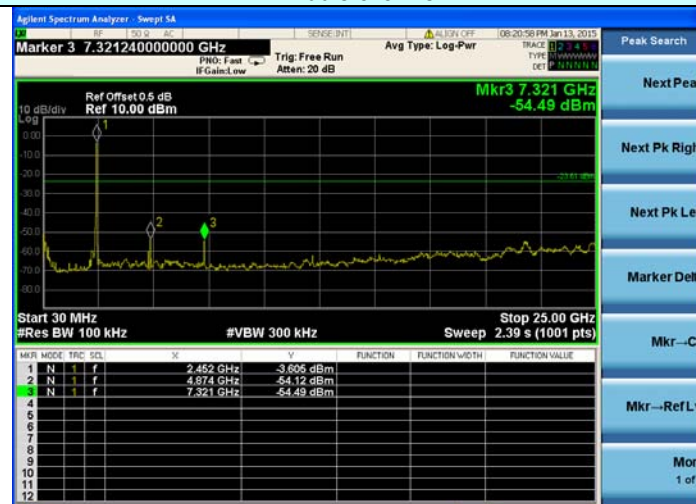

30MHz~25GHz


Highest channel

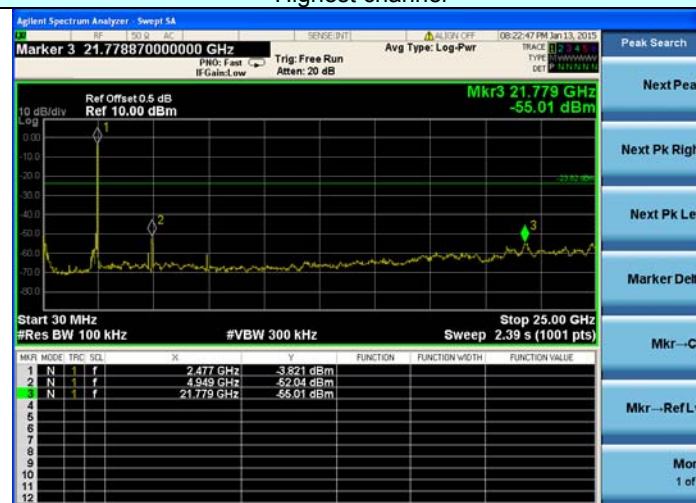

30MHz~25GHz


$\pi/4$ -DQPSK

## Lowest channel

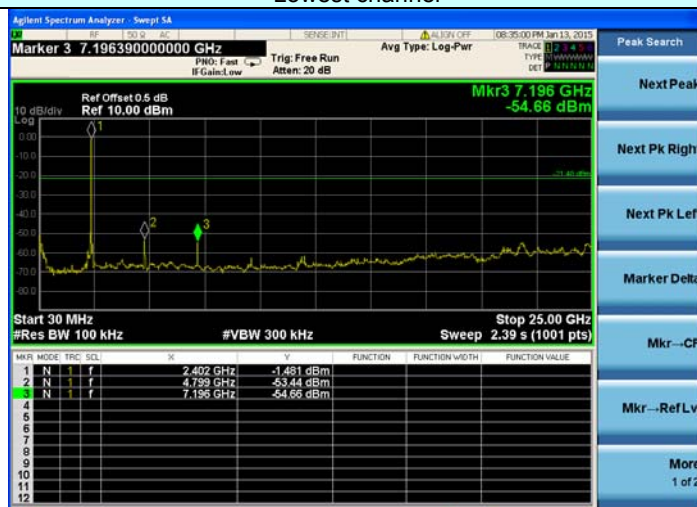


30MHz~25GHz

## Middle channel

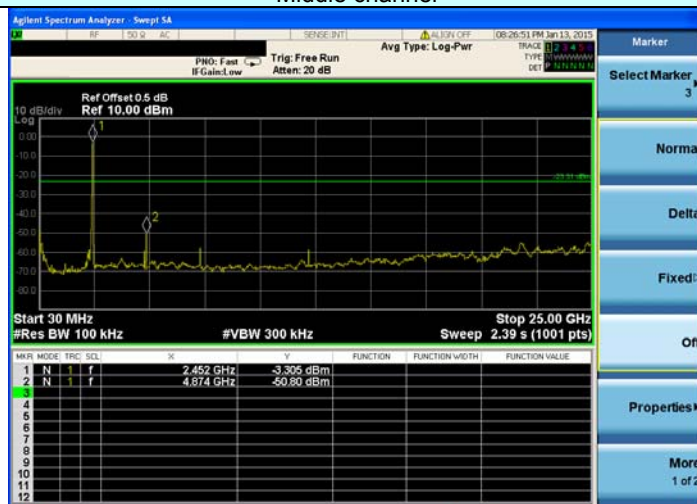

30MHz~25GHz


## Highest channel

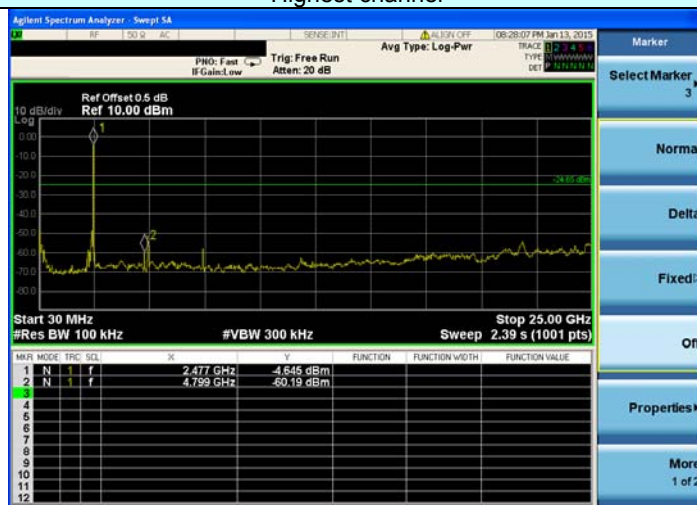

30MHz~25GHz


8DPSK

Lowest channel

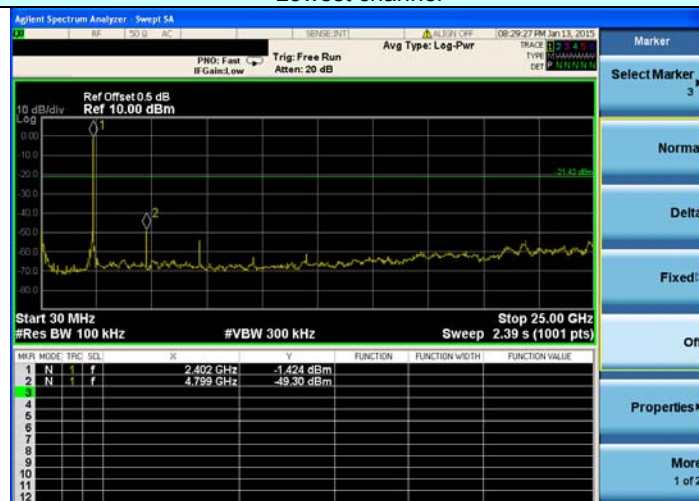

30MHz~25GHz

Middle channel

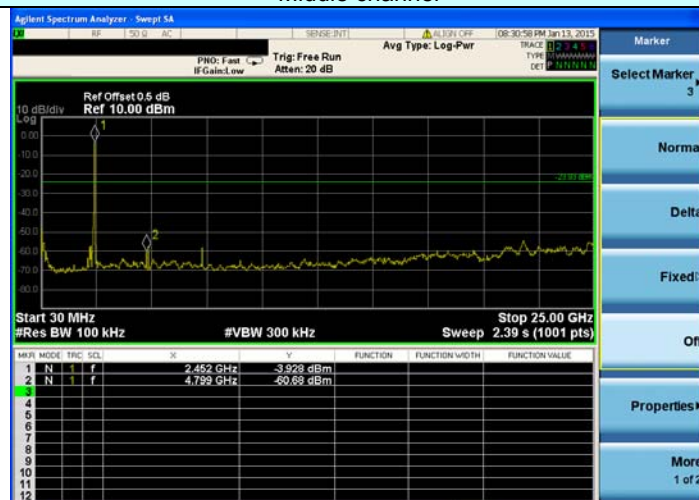



30MHz~25GHz


Highest channel



30MHz~25GHz

## 6.11 Radiated Spurious Emission Measurement

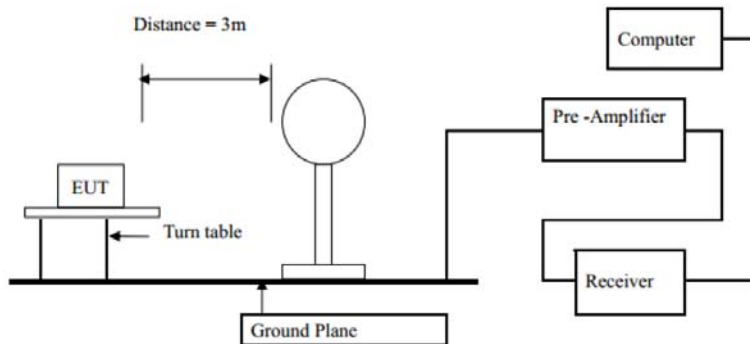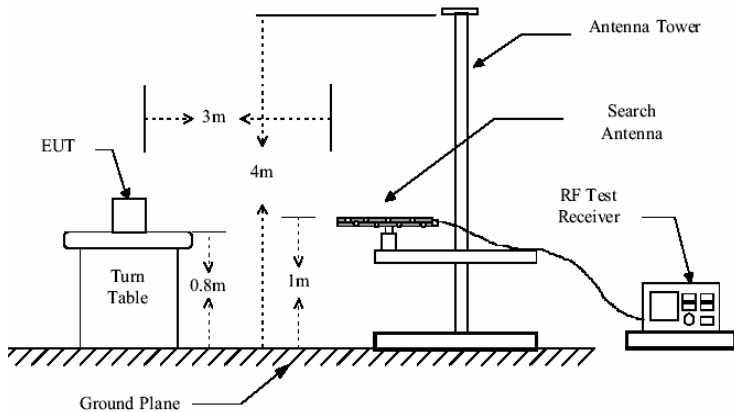Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	9 kHz to 25 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				
					
	Above 1GHz				

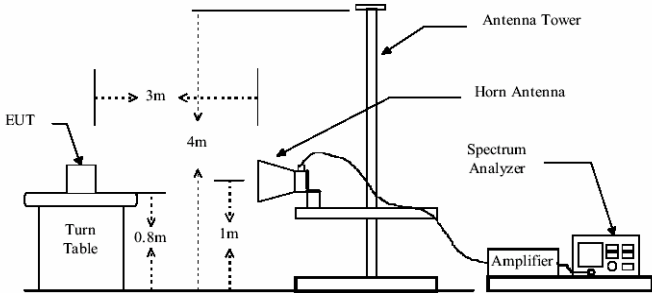	
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.</li> <li>2. The EUT was placed on a turntable with 0.8 meter above ground.</li> <li>3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.</li> <li>5. Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>6. Use the following spectrum analyzer settings:             <ol style="list-style-type: none"> <li>(1) Span shall wide enough to fully capture the emission being measured;</li> <li>(2) Set RBW=100 kHz for <math>f &lt; 1\text{ GHz}</math>, RBW=1MHz for <math>f &gt; 1\text{ GHz}</math>; VBW<math>\geq</math>RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak</li> <li>(3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds  <math display="block">\text{On time} = N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n</math>                     Where <math>N_1</math> is number of type 1 pulses, <math>L_1</math> is length of type 1 pulses, etc.                      Average Emission Level = Peak Emission Level + <math>20 \cdot \log(\text{Duty cycle})</math> </li> </ol> </li> <li>7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 5.7 for details</p>
<p>Test mode:</p>	<p>Non-hopping mode</p>
<p>Test results:</p>	<p>Pass</p>


Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
2. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.


Measurement data:

## Duty cycle correction factor for average measurement

### DH5 on time (One Pulse) Plot on Channel 39

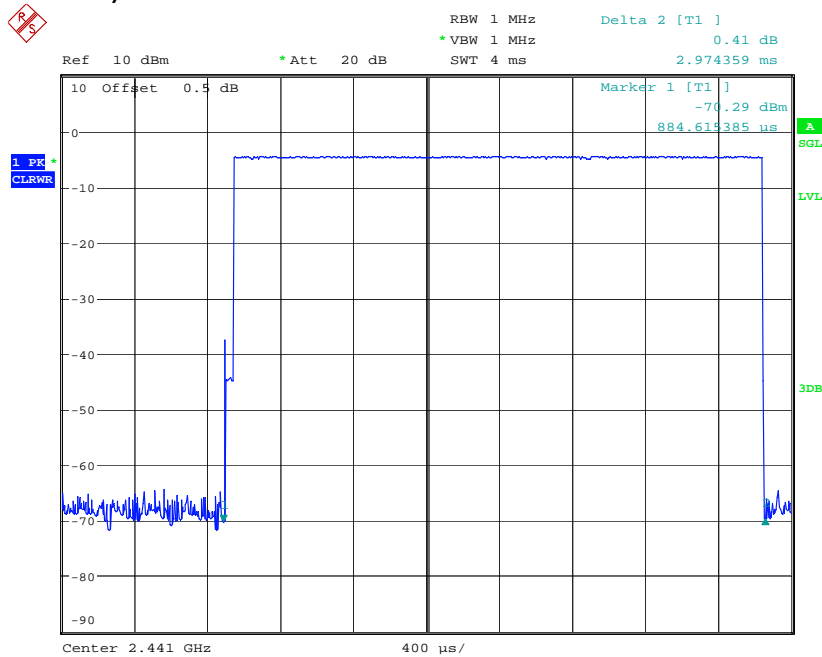

### DH5 on time (Count Pulses) Plot on Channel 39

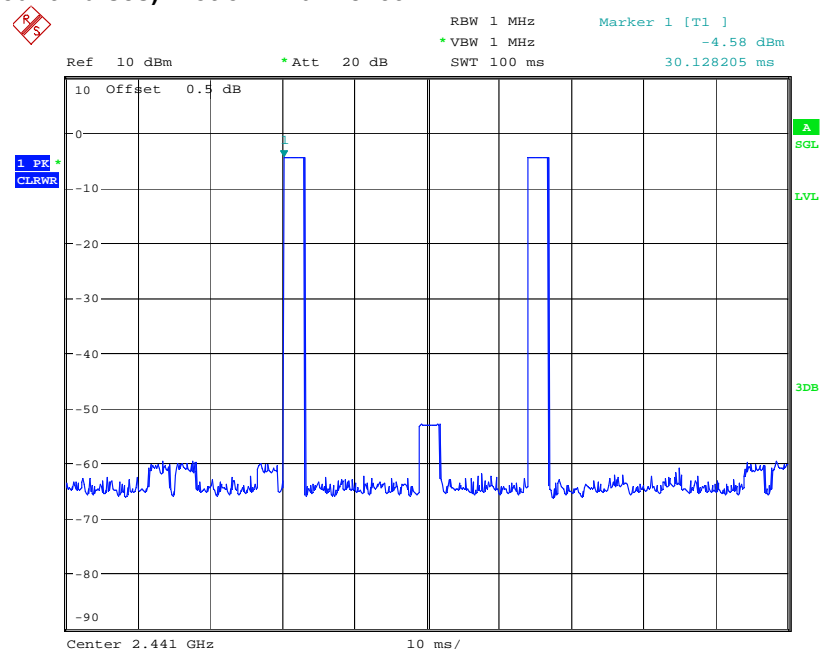


#### Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.97 / 100 = 0.0594$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.52\text{dB}$
3. DH5 has the highest duty cycle worst case and is reported.
4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.52dB) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

## Below 1GHz

Vertical:

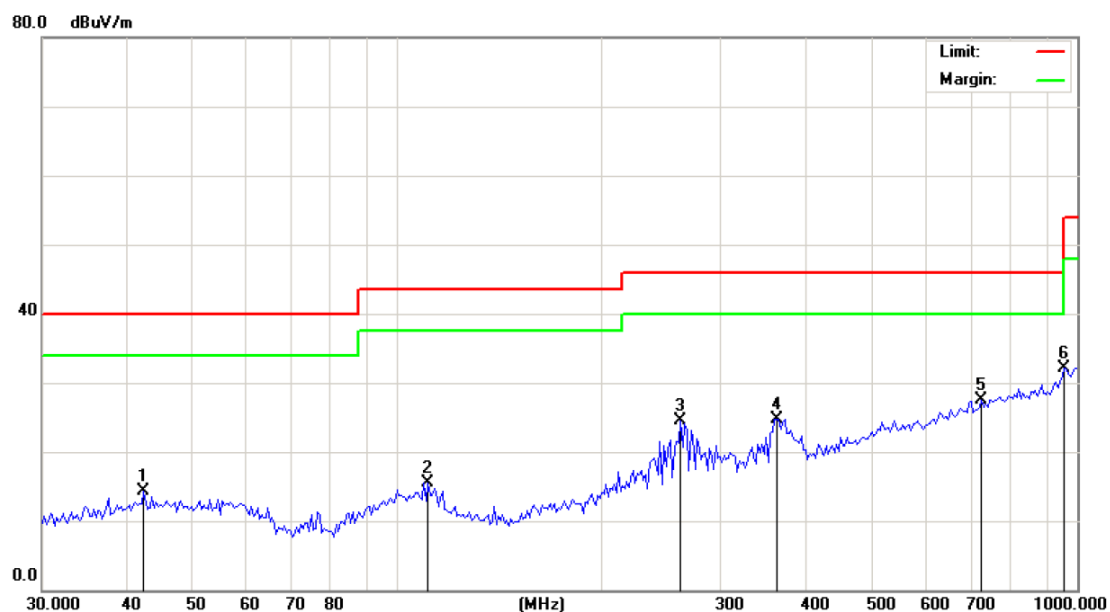

Site

Polarization: **Vertical**

Temperature: 27

Limit: FCC Part 15B Class B RE\_3 m

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

Distance: 3m

M/N: RL-SM02BD


Mode: Tx Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		42.3314	26.58	-12.37	14.21	40.00	-25.79	peak	0	
2		110.8581	27.65	-12.13	15.52	43.50	-27.98	peak	0	
3		261.2730	34.03	-9.57	24.46	46.00	-21.54	peak	0	
4		360.9775	31.75	-6.99	24.76	46.00	-21.24	peak	0	
5		723.7930	27.10	0.45	27.55	46.00	-18.45	peak	0	
6	*	958.7135	27.37	4.66	32.03	46.00	-13.97	peak	0	



Horizontal:

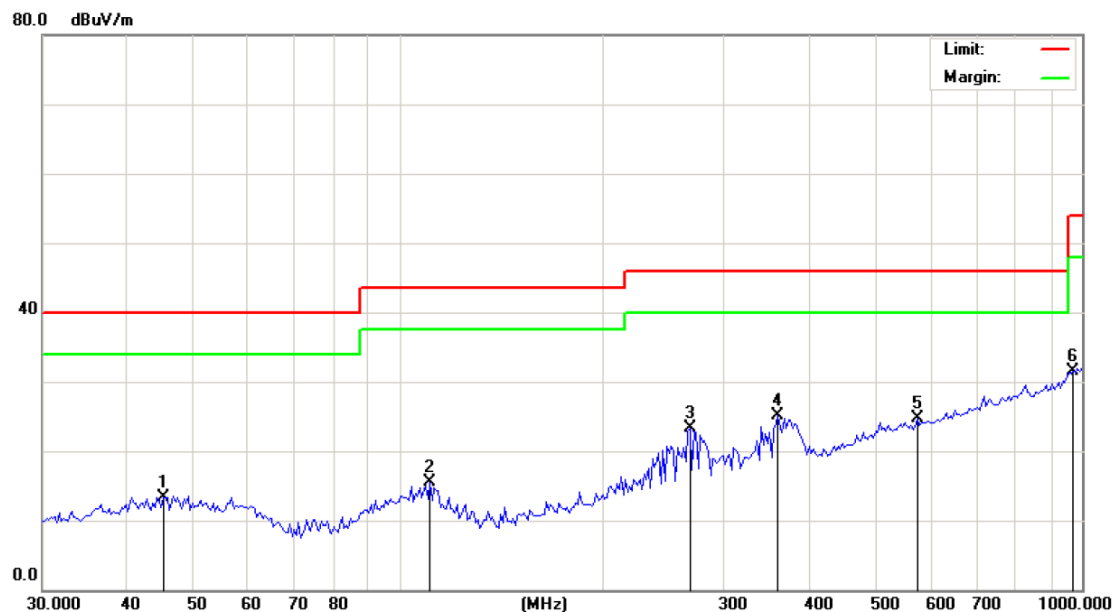

Site: Limit: FCC Part 15B Class B RE\_3 m  
 EUT: Tablet PC  
 M/N: RL-SM02BD  
 Mode: Tx Mode  
 Note:

Polarization: **Horizontal**  
 Power: AC 120V/60Hz  
 Distance: 3m

Temperature: 27  
 Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		45.0951	25.61	-12.25	13.36	40.00	-26.64	peak	0	
2		110.8581	27.69	-12.13	15.56	43.50	-27.94	peak	0	
3		266.8395	32.67	-9.38	23.29	46.00	-22.71	peak	0	
4	*	358.4497	32.09	-7.04	25.05	46.00	-20.95	peak	0	
5		573.9882	26.88	-2.21	24.67	46.00	-21.33	peak	0	
6		972.2827	26.43	5.12	31.55	54.00	-22.45	peak	0	



**Above 1GHz:**

Modulation Type: 8DPSK

Low channel: 2402 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1303.12	H	48.97	---	-4.20	44.77	---	74	54	-9.23
4804.00	H	50.28	---	-3.94	46.34	---	74	54	-7.66
7206.00	H	44.89	---	0.52	45.41	---	74	54	-8.59
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1304.09	V	48.11	---	-4.25	43.86	---	74	54	-10.14
4804.00	V	50.92	---	-3.94	46.98	---	74	54	-7.02
7206.00	V	44.54	---	0.59	45.13	---	74	54	-8.87
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Middle channel: 2441 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1241.87	H	49.26	---	-4.20	45.06	---	74	54	-8.94
4882.00	H	51.60	---	-3.98	47.62	---	74	54	-6.38
7323.00	H	46.19	---	0.56	46.75	---	74	54	-7.25
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1306.45	V	48.64	---	-4.25	44.39	---	74	54	-9.61
4882.00	V	51.02	---	-3.98	47.04	---	74	54	-6.96
7323.00	V	45.40	---	0.57	45.97	---	74	54	-8.03
---	V	---	---	---	---	---	---	---	---

High channel: 2480 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1303.34	H	48.05	---	-4.20	43.85	---	74	54	-10.15
4960.00	H	49.60	---	-3.98	45.62	---	74	54	-8.38
7440.00	H	44.49	---	0.52	45.01	---	74	54	-8.99
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
1309.82	V	48.57	---	-4.25	44.32	---	74	54	-9.68
4960.00	V	50.13	---	-3.98	46.15	---	74	54	-7.85
7440.00	V	45.21	---	0.57	45.78	---	74	54	-8.22
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Remark:

1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---”in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

-----End of report-----