

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C  
REQUIREMENT T**

*OF*

Emitter

MODEL No.: DC141

Trademark: alse

FCC ID: 2AD8F-DC141

REPORT NO: ES150119195E

ISSUE DATE: February 10, 2015

*Prepared for*

ALSE LATINA SRL

Colombia 370 Villa Martelli (1603) Buenos Aires Argentina

*Prepared by*

SHENZHEN EMTEK CO., LTD

Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

## VERIFICATION OF COMPLIANCE


Applicant	:	ALSE LATINA SRL Colombia 370 Villa Martelli (1603) Buenos Aires Argentina
Manufacturer	:	ALSE LATINA SRL Colombia 370 Villa Martelli (1603) Buenos Aires Argentina
Product Description	:	Emitter
Model Number	:	DC141
Serial Number	:	N/A
File Number	:	ES150119195E
Date of Test	:	January 26, 2015 to February 10, 2015


**We hereby certify that:**


The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : January 26, 2015 to February 10, 2015

Prepared by :   
Jack Li/Editor

Reviewer :   
Joe Xia/Supervisor

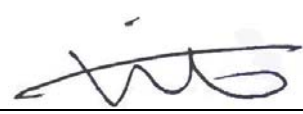Approve & Authorized Signer :   
Lisa Wang/Manager

## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
1.1.	PRODUCT DESCRIPTION.....	4
1.2.	RELATED SUBMITTAL(S) / GRANT (S) .....	4
1.3.	TEST METHODOLOGY .....	4
1.4.	SPECIAL ACCESSORIES.....	4
1.5.	EQUIPMENT MODIFICATIONS.....	4
1.6.	MEASUREMENT UNCERTAINTY .....	5
1.7.	TEST FACILITY .....	5
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1.	EUT CONFIGURATION .....	6
2.2.	EUT EXERCISE .....	6
2.3.	TEST PROCEDURE .....	6
2.4.	DESCRIPTION OF TEST MODES.....	6
2.5.	SUMMARY OF TEST RESULTS .....	6
2.6.	DESCRIPTION OF SUPPORT UNITS .....	6
<b>3.</b>	<b>RADIATED EMISSION TEST.....</b>	<b>7</b>
3.1.	MEASUREMENT PROCEDURE.....	7
3.2.	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	7
3.3.	MEASUREMENT EQUIPMENT USED:.....	8
3.4.	RADIATED EMISSION LIMIT .....	9
3.5.	CALCULATION OF AVERAGE FACTOR.....	10
3.6.	MEASUREMENT RESULT.....	13
<b>4.</b>	<b>TRANSMISSION REQUIREMENT .....</b>	<b>14</b>
4.1.	REQUIREMENT .....	14
4.2.	TEST SET-UP.....	14
4.3.	MEASUREMENT EQUIPMENT USED:.....	14
4.4.	TEST PROCEDURE .....	14
4.5.	TEST DATA .....	14
<b>5.</b>	<b>BANDWIDTH TEST .....</b>	<b>16</b>
5.1.	MEASUREMENT PROCEDURE.....	16
5.2.	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	16
5.3.	MEASUREMENT EQUIPMENT USED:.....	16
5.4.	MEASUREMENT RESULTS: .....	16
<b>6.</b>	<b>ANTENNA APPLICATION.....</b>	<b>18</b>
6.1.	ANTENNA REQUIREMENT .....	18
6.2.	RESULT .....	18

## **1. GENERAL INFORMATION**

### **1.1. Product Description**

Emitter (referred to as the EUT in this report), it is designed by way of utilizing the ASK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 433.904MHz
- B). Modulation: ASK
- C). Antenna Type: PCB antenna
- D). Antenna Gain: <3dBi
- E). Power Supply: DC 12V

### **1.2. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: 2AD8F-DC141 filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

### **1.3. Test Methodology**

The radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1.4. Special Accessories**

Not available for this EUT intended for grant.

### **1.5. Equipment Modifications**

Not available for this EUT intended for grant.

## 1.6. Measurement Uncertainty

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Fundamental Fieldstrength	Not Applicable	95%	±2.94dB
Transmitter 20 dB Bandwidth	Not Applicable	95%	±0.92PPm
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±3.00dB
Conducted Emission	0.15MHz to 0.50MHz	95%	±2.0dB

## 1.7. Test Facility

### Site Description

#### EMC Lab.

: Accredited by CNAS, 2013.10.29  
The certificate is valid until 2016.10.28  
The Laboratory has been assessed and proved to be in compliance with  
CNAS/CL01:2006(identical to ISO/IEC17025: 2005)  
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25  
The Laboratory has been assessed according to the requirements ISO/IEC  
17025

Accredited by FCC, April 17, 2014  
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010  
The Certificate Registration Number is 4480A-2.

#### Name of Firm

: SHENZHEN EMTEK CO., LTD

#### Site Location

: Bldg 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 2. SYSTEM TEST CONFIGURATION

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3. Test Procedure

#### 2.3.1 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. Emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.4 of ANSI C63.4-2009.

### 2.4. Description of test modes

The EUT (Emitter) has been tested under normal operating condition. Let EUT transmit during test, and the result was reported.

### 2.5. Summary of Test Results

FCC Part15, Subpart C		
Standard Section	Test Item	Result
FCC		
15.231(a)(1)	Transmission Requirement	Pass
15.231(b)	Radiated Emission	Pass
15.231(c)	20dB Bandwidth	Pass
15.207(a)	Conducted Emission	N/A

Note: (1)"N/A" denotes test is not applicable in this test report.

### 2.6. Description of Support Units

Equipment	Mfr/Brand	Model/Type No.	FCC ID / IC	Series No.	Note
Emitter	N/A	DC141	2AD8F-DC141	N/A	EUT

### 3. RADIATED EMISSION TEST

#### 3.1. Measurement Procedure

a. 9 kHz to 30 MHz emissions

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

b. 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

c. Above 1 GHz emissions:

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Detector: For Peak:

RBW = 1 MHz for  $f \geq 1$  GHz,

200 Hz for 9 kHz to 150 kHz

9 kHz for 150 kHz to 30 MHz

100 kHz for 30 MHz to 1GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak for  $f \geq 1$  GHz, QP for  $f < 1$  GHz


Trace = max hold

For AV value:


Average = Peak value + 20log (Duty cycle)

#### 3.2. Test SET-UP (Block Diagram of Configuration)


a. Radiated Emission Test Set-Up, Frequency Below 30MHz

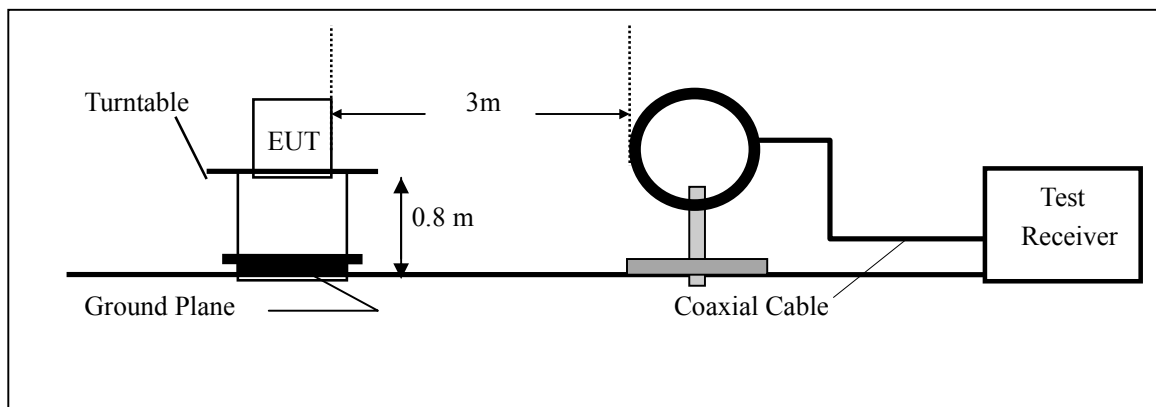

b. Radiated Emission Test Set-Up, Frequency Below 1000MHz

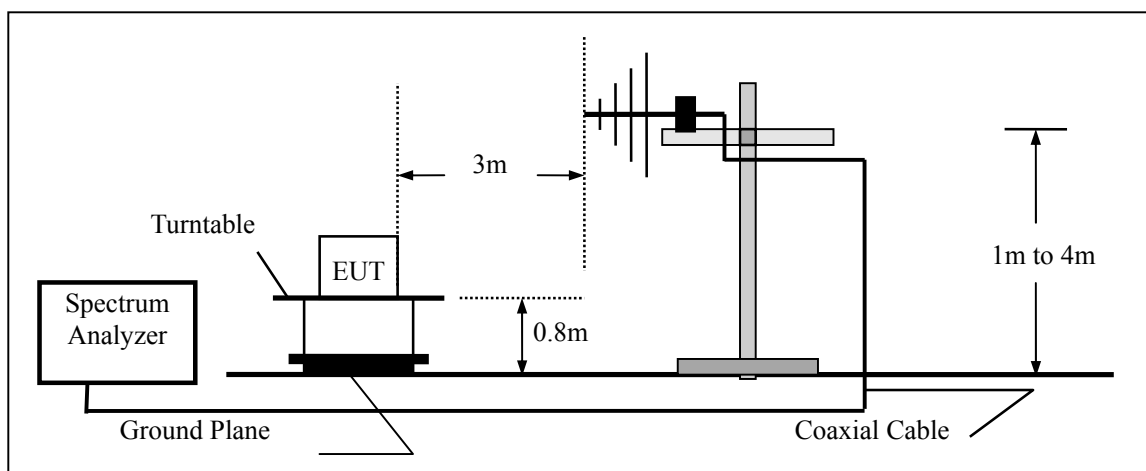

c. Radiated Emission Test Set-Up, Frequency above 1000MHz

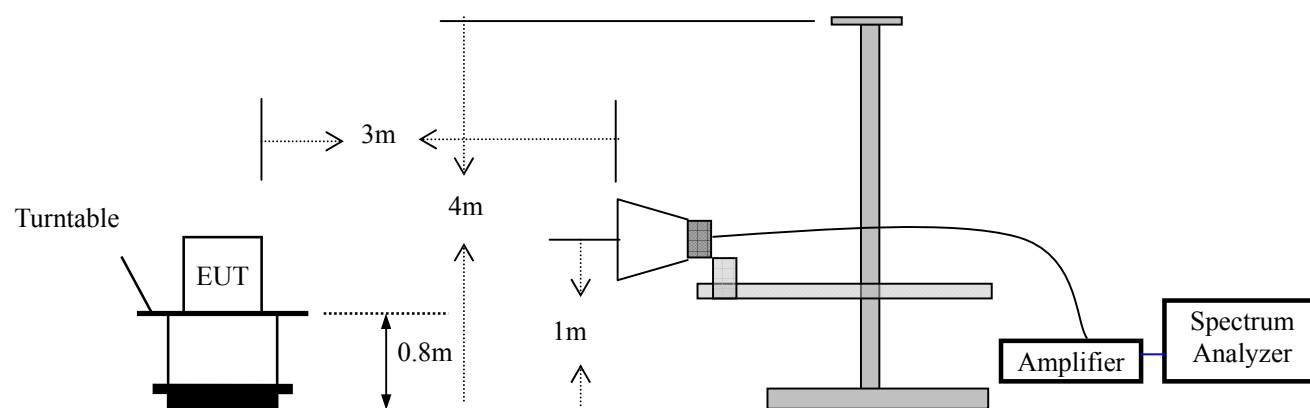

**3.3. Measurement Equipment Used:**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	ESCI	10017	08/01/2014	08/01/2015
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/17/2014	05/16/2015
Spectrum Analyzer	HP	E4407B	839840481	05/17/2014	05/16/2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015



### 3.4. Radiated Emission Limit

FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

FCC 15.209 Limited

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1GHz	74 dBuV/m (PEAK) 54 dBuV/m (AVERAGE)	

### 15.231 Limited

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The fundamental frequency of the EUT is 433.904MHz

The limit for average field strength dBuV/m for the fundamental emission= 80.82 dBuV/m

No fundamental is allowed in the restricted bands.

Spurious Emissions do not fall in the restricted bands must be less than 60.82 dBuV/m or limits shown in Section 15.209, whichever limit permits a higher field strength.

Spurious Emissions appear within the restricted bands shall not exceed the limits shown in Section 15.209.

FCC Part15 (15.231) , Subpart C		
Fundamental Frequency	Field Strength Of Fundamental	Field Strength of Spurious Emissions
433.904 MHz	AV:80.82 dBuV/m at 3m distance	AV:60.82 dBuV/m at 3m distance
	PK:100.82dBuV/m at 3m distance	PK:80.82 dBuV/m at 3m distance

### 3.5. Calculation of Average factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100ms or the repetition cycle period, whichever is a shorter time frame, the duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB=20log(duty cycle)


Where the duty factor is calculated from following formula:

$20\log(\text{Duty cycle})=20\log((0.3*16+0.65*13)/37)=-8.91\text{dB}$


Therefore, the averaging factor is -8.91dB.

Pulse Width(PW)=0.3,  $2/PW=2/0.3=6.7\text{KHz}$ ,  $\text{RBW}=100\text{KHz}>6.7\text{KHz}$ , Therefore PDCF is not needed.


Please see the diagrams below:

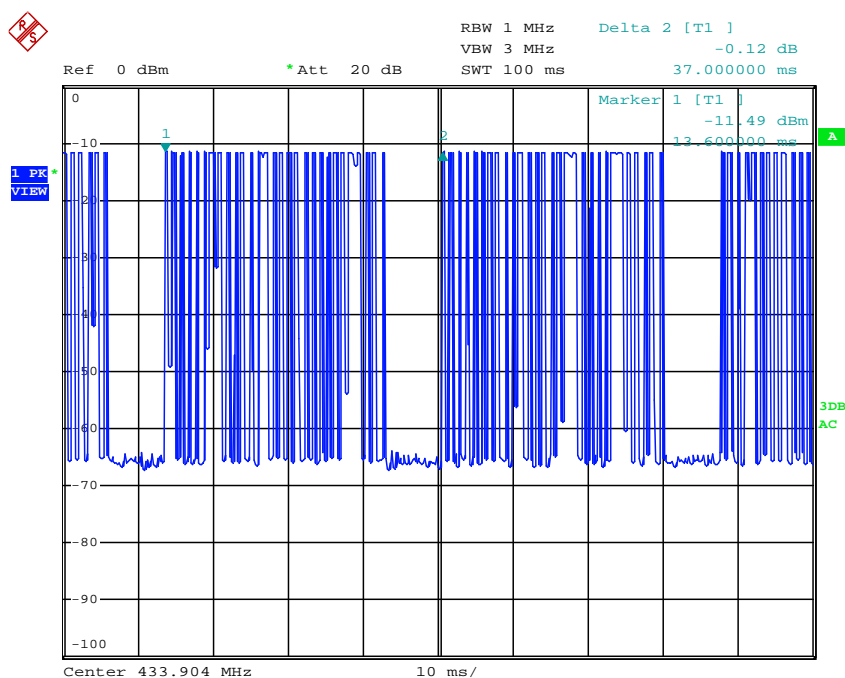


Date: 26.JAN.2015 18:00:43

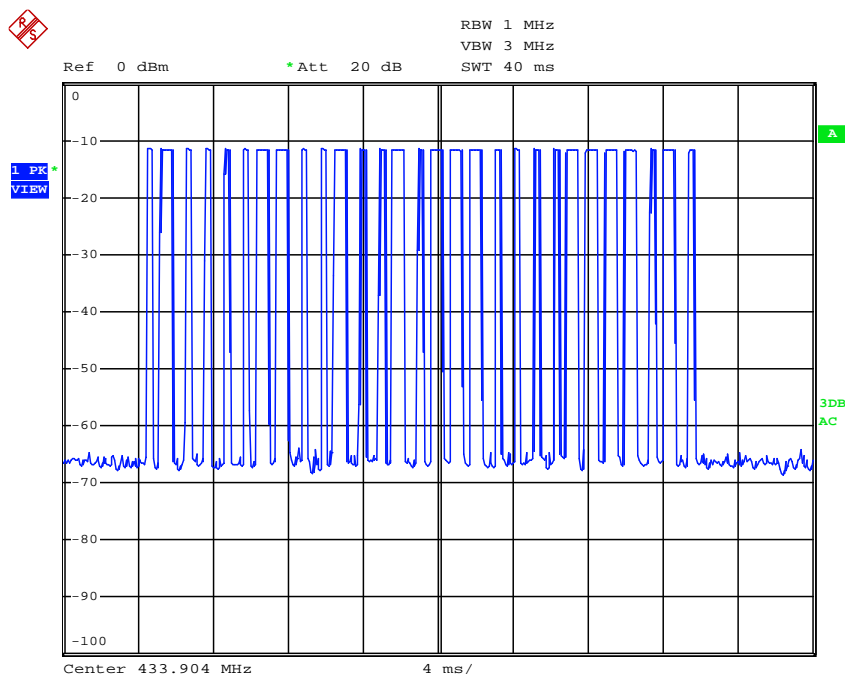

Date: 26.JAN.2015 18:01:36

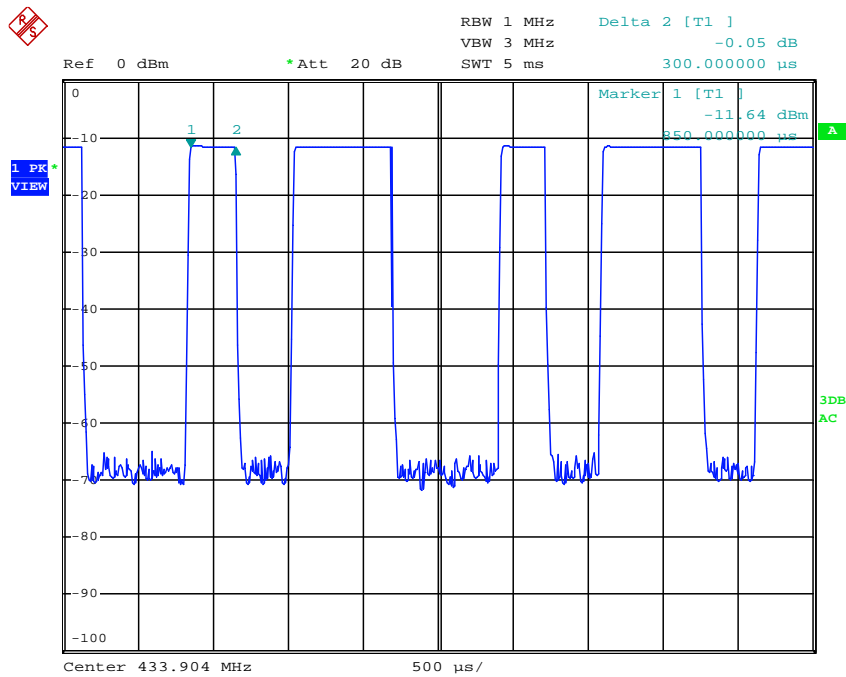

Date: 26.JAN.2015 18:05:42

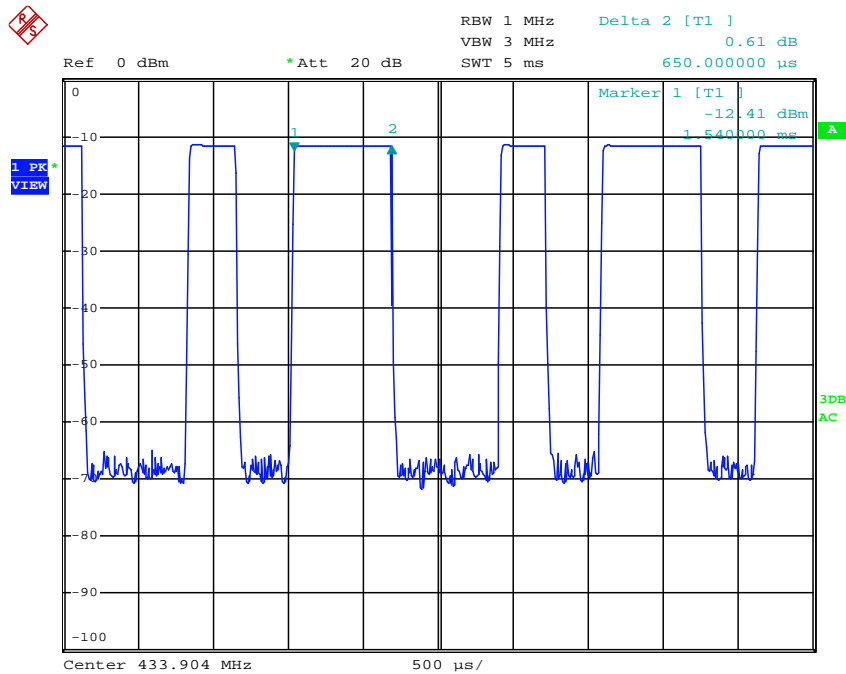

Date: 26.JAN.2015 18:06:02

### 3.6.Measurement Result

#### Pass

##### a. Fundamental emission:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
433.904	V	63.35	54.44	100.82	80.82	-37.47	-26.38
433.904	H	78.34	69.43	100.82	80.82	-22.48	-11.39

##### b. Other emissions

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
867.808	V	45.97	37.06	80.82	60.82	-34.85	-23.76
1300.712	V	47.11	38.20	74.00	54.00	-26.89	-15.80
1735.616	V	52.10	43.19	80.82	60.82	-28.72	-17.63
2169.520	V	49.45	40.54	80.82	60.82	-31.37	-20.28
2603.424	V	54.91	46.00	80.82	60.82	-25.91	-14.82
3037.328	V	57.95	49.04	80.82	60.82	-22.87	-11.78
3905.136	V	60.84	51.93	74.00	54.00	-13.16	-2.07
-	-	-	-	-	-	-	-
867.808	H	49.16	40.25	80.82	60.82	-31.66	-20.57
1300.712	H	45.51	36.60	74.00	54.00	-28.49	-17.40
1735.616	H	51.23	42.32	80.82	60.82	-29.59	-18.50
2603.424	H	53.39	44.48	80.82	60.82	-27.43	-16.34
3037.328	H	60.37	51.46	80.82	60.82	-20.45	-9.36
3471.232	H	51.03	42.12	80.82	60.82	-29.79	-18.70
3905.136	H	61.40	52.49	74.00	54.00	-12.60	-1.51
-	-	-	-	-	-	-	-

Note: (1) All Readings are Peak Value.

(2) Correct Factor= Antenna Factor +Cable Loss- Amplifier Gain

(3) Emission Level= Reading Level+Probe Factor +Cable Loss

(4) True Value = Emission Level + Duty Cycle Correction Factor

(5) DF= Duty Cycle Correction Factor

(6) Duty Cycle Correction Factor (dB) =  $20 \times \log_{10} \text{Duty Cycle}$

(7) Margin = TrueValue – limit(if margin is minus means under limit)

(8) The “\*” means restricted bands


(8) All the orientation has been investigated, and only worst case is presented in this report.

## 4. TRANSMISSION REQUIREMENT

### 4.1. Requirement

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 4.2. Test SET-UP



### 4.3. Measurement Equipment Used:

Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	ESCI	10017	08/01/2014	08/01/2015

### 4.4. Test Procedure

The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
Span Frequency	0Hz
RB	1000KHz
VB	3000KHz
Detector	Peak
Trace	Max hold
Sweep Time	6S

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1000KHz and VBW to 3000KHz, Set Detector to Peak, Trace to Max Hold.
- Set the span to 0Hz and the sweep time to 6s and record the value.

### 4.5. Test Data


Environmental Conditions

Temperature:	20°C
Relative Humidity:	52%
ATM Pressure:	1032mbar

Test Mode: Transmitting

Frequency (MHz)	Transmitting time (ms)	Limit (Second)	Result
433.904	180	5	PASS

Refer to the attached plot

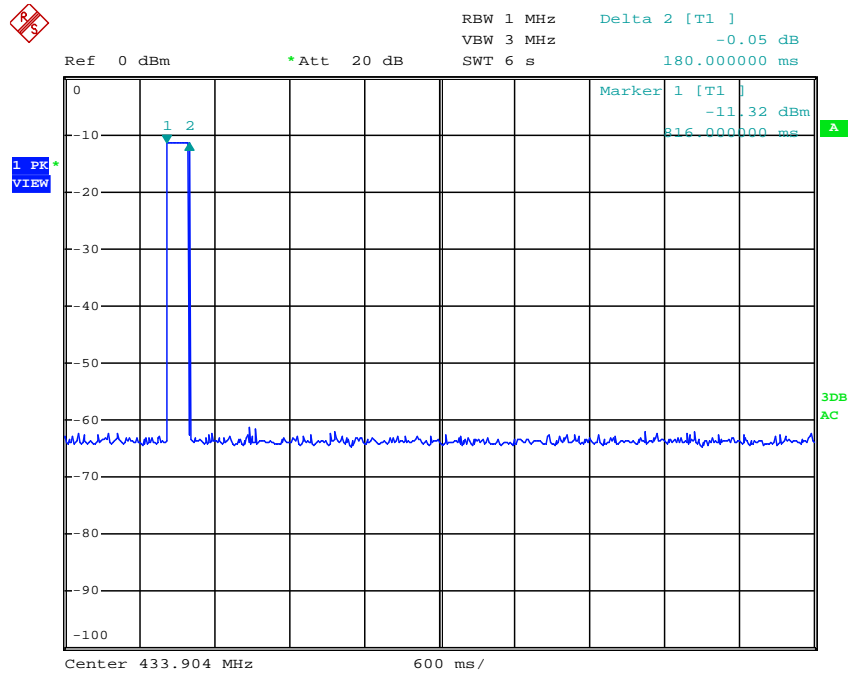


Date: 26.JAN.2015 18:08:20

## 5. BANDWIDTH TEST

### 5.1. Measurement Procedure

The EUT was operated in hopping mode or could be controlled its channel. Print out the test result from the spectrum by hard copy function.

### 5.2. Test SET-UP (Block Diagram of Configuration)



The resolution bandwidth of the spectrum analyzer was set to 100KHz, which is greater 5 percent of the maximum permitted bandwidth that required by the ANSI C63.4 section13. Bandwidth is determined at the point 20dB down from the modulator carrier. The maximum permitted bandwidth specified by the rule was 0.25% of the center frequency of the EUT, e.g.  $433.904\text{MHz} \times 0.25\% = 1.08476\text{MHz}$ . The detector function was set to peak and hold mode to clearly observe the components.

### 5.3. Measurement Equipment Used:


Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	ESCI	10017	08/01/2014	08/01/2015

### 5.4. Measurement Results:

Spectrum Detector:	PK	Test Date:	February 06, 2015
Test By:	Jack Li	Temperature:	21°C
Test Result:	PASS	Humidity:	53 %
Modulation:	ASK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)	Limit
CH1	433.904	488	$\leq 1.08476\text{MHz}$



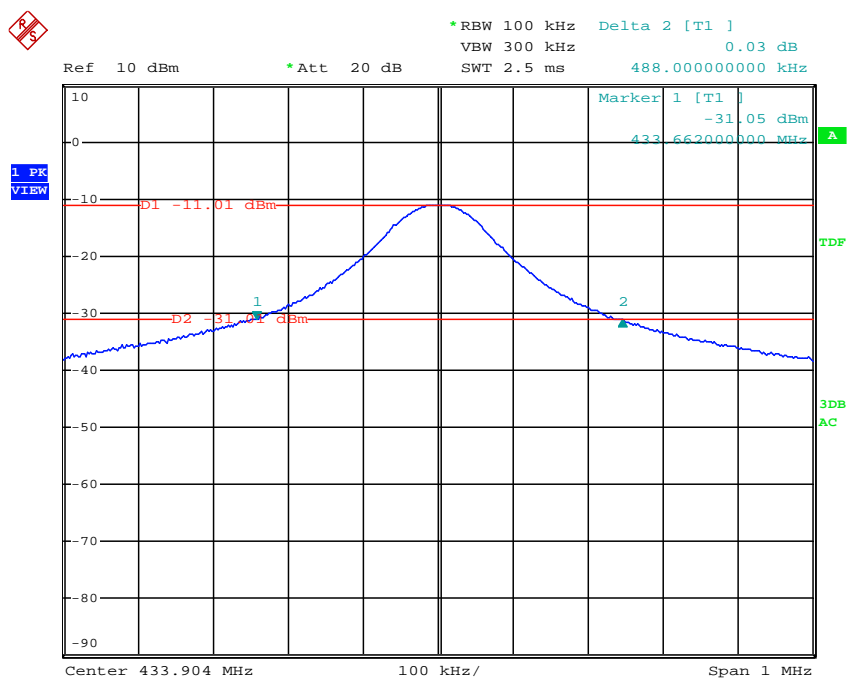

Date: 6.FEB.2015 12:44:32

## **6. ANTENNA APPLICATION**

### **6.1. Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2. Result**

The EUT's antenna is PCB antenna, using a permanently attached antenna which is not replaceable. The antenna's gain is less than 3dBi and meets the requirement.

**---END OF REPORT---**