
Technical description

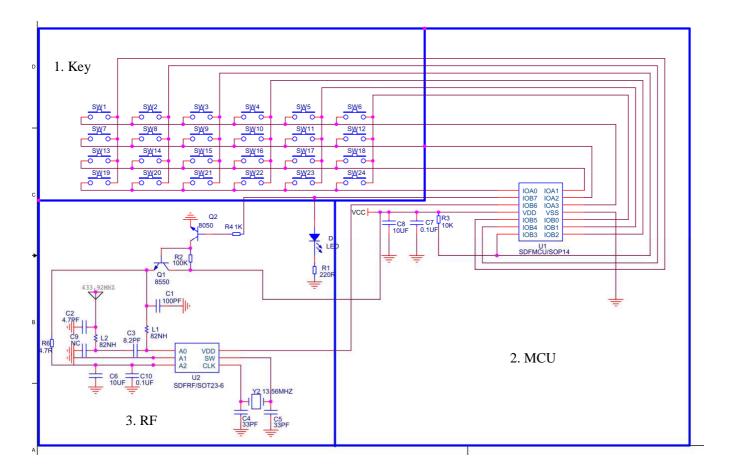

- 1. Key: User interface.
- 2. MCU: Receiving data from key unit and output signal to RF transmitting unit.
- 3. RF: Receiving signal from MCU and output signal via antenna.
- 4. The whole unit is powered by 3 AA battery.

An integral antenna has been used.